

# FCC 47 CFR PART 15 SUBPART B TEST REPORT

For

**Applicant: Mastercell LLC** 

Address: 759 Bloomfield Ave 161 West Caldwell, NJ 07006 USA.

**Product Name: Mobile Phone** 

**Model Name: Fénix** 

**Brand Name: Xeuss** 

**FCC ID: Y2X-TIKE** 

Report No.: STS101109F1

Date of Issue: December. 01, 2010

Issued by: Shenzhen Super Test Service Technology Co., Ltd.

No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Address: Shenzhen, Guangdong, China

Tel:86-755-2795 8522

Fax:86-755-2795 8022

The report consists 39 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by STS. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

## **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	3
2. GENERAL INFORMATION	4
2.1 PRODUCT INFORMATION	4
2.2 OBJECTIVE	5
2.3 TEST STANDARDS AND RESULTS	5
2.4 ENVIRONMENTAL CONDITIONS	5
3. TEST FACILITY	6
4. TEST EQUIPMENT LIST	7
5. 47 CFR PART 15B REQUIREMENTS	8
5.1 GENERAL INFORMATION	8
6. LINE CONDUCTED EMISSION TEST	10
6.1. LIMITS OF LINE CONDUCTED EMISSION TEST	10
6.2. BLOCK DIAGRAM OF TEST SETUP	10
6.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	11
6.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	11
6.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	12
7. RADIATED EMISSION TEST	18
7.1. LIMITS OF RADIATED DISTURBANCES AT 3M DISTANCES FOR CLASS B	18
7.2 TEST DESCRIPTION	18
7.3 TEST RESULT	20
APPENDIX 1	26
PHOTOGRAPHS OF TEST SETUP	26
APPENDIX 2	31
PHOTOGRAPHS OF EUT	31

#### 1. VERIFICATION OF CONFORMITY

**Equipment Under Test:** Mobile Phone

**Brand Name:** Xeuss Model Number: Fénix Series Model Name: N/A **Series Model Difference** 

description:

N/A

FCC ID: Y2X-TIKE

Applicant: Mastercell LLC.

759 Bloomfield Ave 161 West Caldwell, NJ 07006 USA.

Manufacturer: Shenzhen Main Tech Asia Limited.

Room15CD, Tianmian City Tower, Shennan Road, Futian, Shenzhen, China.

**Technical Standards:** FCC Part 15 B File Number: STS101109F1

Date of test: November. 27 ~ November. 30, 2010

**Deviation:** None Condition of Test Sample: Normal **PASS Test Result:** 

The above equipment was tested by Shenzhen Super Test Service Technology Co., Ltd. for compliance with the requirements set forth in FCC Part 15 and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Petter Ping Tested by (+ signature): Petter Ping/Engineer December. 01, 2010 Review by (+ signature): July Wen/Lab Manager December. 01, 2010 Approved by (+ signature):

Terry Yang/Manager December. 01, 2010

## 2. GENERAL INFORMATION

## 2.1 PRODUCT INFORMATION

THE Makila Blance	
EUT1- Mobile Phone	
Description:	Mobile Phone
Model Name:	Fénix
Serial No.:	N/A
Model Difference description:	N/A
IMEI No.:	357470005665264
Frequency:	GSM 850MHz/1900MHz
Hardware Version:	H609_V1.0
Software Version:	H690TV.MST.MSW8533.GPRS.10AW0913.01.05jf.02.HKH.
	GW.V006.06301706
EUT2- Battery	
Description:	Lithium-ion Battery
Model Name:	BL-4C
Brand Name:	N/A
Manufacturer:	SHENZHEN ZHIYING ELECTRONICTECHNOLOGY CO., LTD.
Capacitance:	850 mAh
Rated Voltage:	3.7V
Charge Limit:	4.2V
EUT3 – Power Supply	
Description:	Travel Charger
Model Name:	XE2010SM
Brand Name:	Xeuss
Manufacturer:	SHENZHEN DONGZHIBAO PLASTIC ELECTRONICS
Rated Input:	AC 110-240V, 50/60HZ 150mA
Rated Output:	DC 5.0V, 500mA
Length USB cable:	1.00m

#### **NOTE:**

- 1. The EUT is a model of GSM Portable Mobile Station (MS). It consists of **hand telephone set**, **Lithium battery**, **headphone**, **USB cable** and **Charger** as listed above.
- 2. Please refer to Appendix 2 for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual.

## 2.2 OBJECTIVE

Perform FCC Part 15 Subpart B tests for FCC Marking.

## 2.3 TEST STANDARDS AND RESULTS

Test items and the results are as bellow:

EMISSION								
Standard		Item	Result	Remarks				
FCC 47 CFR Part 15 Subpart B	§15.107	Conducted Emission	PASS	Meet Class B limit				
(10-1-05 Edition)	§15.109	Radiated Emission	PASS	Meet Class B limit				

Note:

- 1. The test result judgment is decided by the limit of measurement standard
- 2. The information of measurement uncertainty is available upon the customer's request.

## 2.4 ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C - Humidity: 30-60 %

- Atmospheric pressure: 86-106 kPa

#### 3. TEST FACILITY

Test Site: Most Technology Service Co., Itd

Location: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen,

Guangdong ,China

Description: There is one 3m semi-anechoic an area test sites and two line conducted labs for final

test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003 and CISPR

16 requirements. The FCC Registration Number is 490827.

The CNAS Registration Number is CNAS L3573.

Site Filing: The site description is on file with the Federal Communications

Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

Instrument Tolerance: All measuring equipment is in accord with ANSI C63.4:2003 and CISPR 16

requirements that meet industry regulatory agency and accreditation agency

requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted

Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. It has no holes or gaps having longitudinal dimensions larger than one-tenth of a wavelength at the highest frequency of

measurement up to 1GHz.

## 4. TEST EQUIPMENT LIST

**Instrumentation:** The following list contains equipment used at MOST for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calculator due date
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2011/03/14
2	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2011/03/14
3	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2011/03/14
4	Terminator	Hubersuhner	50Ω	No.1	2011/03/14
5	RF Cable	SchwarzBeck	N/A	No.1	2011/03/14
6	Test Receiver	Rohde & Schwarz	ESPI	101202	2011/03/14
7	Bilog Antenna	Sunol	JB3	A121206	2011/03/14
8	Test Antenna - Horn	Schwarzbeck	BBHA 9120C		2011/03/14
9	Test Antenna - Bi-Log	Schwarzbeck	VULB 9163		2011/03/14
10	Cable	Resenberger	N/A	NO.1	2011/03/14
11	Cable	SchwarzBeck	N/A	NO.2	2011/03/14
12	Cable	SchwarzBeck	N/A	NO.3	2011/03/14
13	DC Power Filter	DuoJi	DL2×30B	N/A	2011/03/14
14	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2011/03/14
15	3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	2011/03/14
16	Test Receiver	Rohde & Schwarz	ESCI	100492	2011/03/14
17	Absorbing Clamp	Luthi	MDS21	3635	2011/03/14
18	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2011/03/14
19	AC Power Source	Kikusui	AC40MA	LM003232	2011/03/14
20	Test Analyzer	Kikusui	KHA1000	LM003720	2011/03/14
21	Line Impendence Network	Kikusui	LIN40MA- PCR-L	LM002352	2011/03/14
22	ESD Tester	Kikusui	KES4021	LM003537	2011/03/14
23	EMCPRO System	EM Test	UCS-500-M4	V0648102026	2011/03/14
24	Signal Generator	IFR	2032	203002/100	2011/03/14
25	Amplifier	A&R	150W1000	301584	2011/03/14
26	CDN	FCC	FCC-801-M2-25	47	2011/03/14
27	CDN	FCC	FCC-801-M3-25	107	2011/03/14
28	EM Injection Clamp	FCC	F-203I-23mm	403	2011/03/14
29	RF Cable	MIYAZAKI	N/A	No.1/No.2	2011/03/14
30	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2011/03/14
31	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2011/03/14

NOTE: Equipments listed above have been calibrated and are in the period of validation.

## 5. 47 CFR PART 15B REQUIREMENTS

## **5.1 GENERAL INFORMATION**

#### **EUT Function and Test Mode**

#### Mode 1: Call Mode

Before the measurement, the lithium battery was completely discharge.

During the measurement, the lithium battery and the charger were installed, and the MS were in charging state. A communication link was established between the MS and a System Simulator (SS). The MS operated at GSM 850/1900MHz mid ARFCN and maximum output power.

The EUT configuration of the emission test was MS + Battery+ Charger.

#### Mode 2: Idle Mode

The MS was registered to the base station simulator but no call was set up.

The EUT configuration of the emission test was MS + Battery+ Charger.

#### Mode 3: MP3/MP4 Mode

During the test, the MS was playing the MP3/MP4 function continuously.

The EUT configuration of the emission test was MS + Battery + Charger.

#### Mode 4: USB Mode

During the test, the MS was connected with the notebook and made the data transmission function continuously.

The EUT configuration of the emission test was **MS + Battery+ USB Cable+ Notebook** (Samsung NP-R428-DS0YCN, SN: ZVC093FZ800422X).

#### Mode 5: GPRS Mode

During the test, the MS was playing the GPRS function continuously.

The EUT configuration of the emission test was **MS** + **Battery**+ **Charger**.

## Mode 6: Camera Mode

During the test, the MS was playing the camera function continuously.

The EUT configuration of the emission test was MS + Battery+ Charger.

## Mode 7: Bluetooth Mode

During the measurement, the lithium battery and the charger were installed, and the MS were in charging state. A communication link was established between the EUT and the Bluetooth Earphone and a System Simulator (SS).

The MS operated at GSM 850/1900MHz mid and maximum output power.

During the test, the MS was playing the Bluetooth function continuously.

The EUT configuration of the emission test was **MS** + **Battery**+ **Charger**+**BT Earphone**.

## **Mode 8: TV Mode**

During the test, the MS was playing the TV function continuously.

The EUT configuration of the emission test was **MS + Battery+ Charger**.

#### Mode 9: FM Mode

During the test, the MS was playing the FM function continuously.

The EUT configuration of the emission test was **MS** + **Battery**+ **Earphone**.

Due to the different configuration and test, in this list only some worster mode. The worst test data of the worst mode is reported by this report.


## 6. LINE CONDUCTED EMISSION TEST

## 6.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Fraguency	Maximum RF	Line Voltage
Frequency	Q.P.( dBuV)	Average( dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

<sup>\*\*</sup>Note: 1. the lower limit shall apply at the transition frequency.

## 6.2. BLOCK DIAGRAM OF TEST SETUP

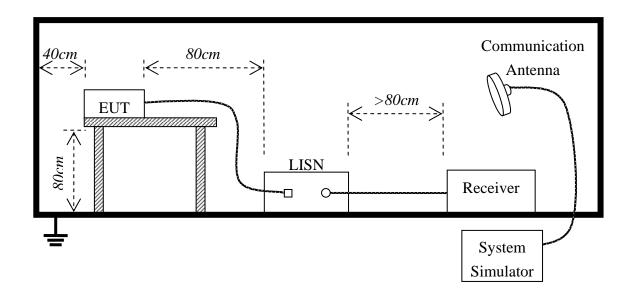

<sup>2.</sup> The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

#### 6.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per FCC Part 15 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- Support equipment, if needed, was placed as per FCC Part 15.
- 3) All I/O cables were positioned to simulate typical actual usage as per FCC Part 15.
- 4) The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- All support equipments received power from a second LISN supplying power of AC 120V/60Hz, if any.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:

	Preliminary Conducted Emission Test							
Frequency Range In	vestigated	150KHz TO 30 MHz						
Mode of operation	Date	Report No.	Data#	Worst Mode				
Call Mode	2010-11-27	STS101109F1	Tiké_1_(L, N)					
Idle Mode	2010-11-27	STS101109F1	Tiké_2_(L, N)					
MP3/MP4 Mode	2010-11-27	STS101109F1	Tiké_3_(L, N)					
USB Mode	2010-11-27	STS101109F1	Tiké_4_(L, N)					
GPRS Mode	2010-11-27	STS101109F1	Tiké_5_(L, N)					
Camera Mode	2010-11-27	STS101109F1	Tiké_6_(L, N)					
Bluetooth Mode	2010-11-27	STS101109F1	Tiké_7_(L, N)					
TV Mode	2010-11-27	STS101109F1	Tiké_8_(L, N)					

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


#### 6.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

EUT and support equipment was set up on the test bench as per step 9 of the preliminary test. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector. The test data of the worst case condition(s) was reported on the Summary Data page.

## 6.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China Tel: 0755-86170306 Fax 0755-86170310

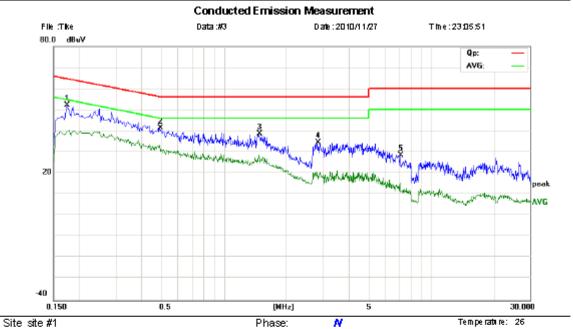

Power: AC 120V/60Hz

Hemidity: 60 %

Limit: FCC Part15 B Class B QP

EUT: Mobile Phone

M/N: Tike Mode: Call


Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBŧV	₫₿	dB (V	dBiV	dB	Defector	Comment
1 *	0.1740	41.88	10.44	52.32	64.77	-12.45	peak	
2	0.4900	31.43	10.07	41.50	56.17	-14.67	peak	
3	1.4780	29.19	9.52	38.71	56.00	-17.29	peak	
4	2.8340	24.84	9.83	34.67	56.00	-21.33	peak	
5	7.0940	17.81	10.74	28.55	60.00	-31.45	peak	

<sup>\*:</sup>Maximum data x:Over limit !:over margin



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China Tel: 0755-86170306 Fax 0755-86170310

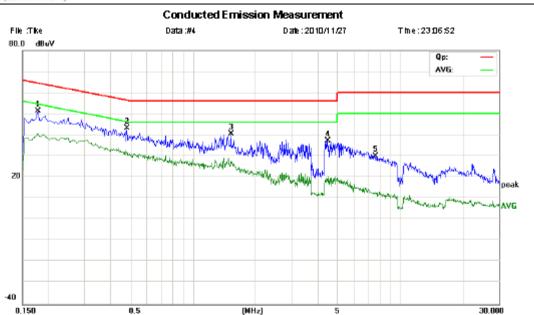

Site site #1

Limit: FCC Part15 B Class B QP

EUT: Mobile Phone

M/N: Tike Mode: call Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHZ	dBŧV	dB	dB (V	dBiV	dB	Defector	Comment
1	0.1780	40.60	10.68	51.28	64.58	-13.30	peak	
2 *	0.4780	32.99	10.15	43.14	56.37	-13.23	peak	
3	1.5220	31.11	9.48	40.59	56.00	-15.41	peak	
4	4.4340	25.74	11.43	37.17	56.00	-18.83	peak	
5	7.5340	19.70	10.48	30.18	60.00	-29.82	peak	

Phase:

Power: AC 120V/60Hz

L1

Temperature: 26


Ham lidiby: 60 %

<sup>\*:</sup>Maximum data x:Over limit !:over margin



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

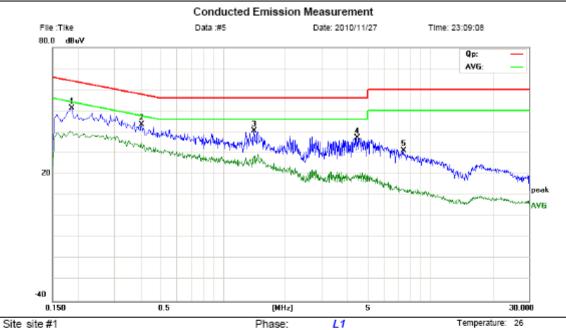

Power: AC 120V/60Hz

Humidity: 60 %

Limit: FCC Part15 B Class B QP

EUT: Mobile Phone

M/N: Tike Mode: Camera

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1	*	0.1860	40.14	11.16	51.30	64.21	-12.91	peak		
2		0.4020	32.81	10.65	43.46	57.81	-14.35	peak		
3		1.4060	31.08	9.59	40.67	56.00	-15.33	peak		
4		4.4140	25.98	11.41	37.39	56.00	-18.61	peak		
- 5		7.4220	20.62	10.55	31.17	60.00	-28.83	peak		

<sup>\*:</sup>Maximum data x:Over limit !:over margin



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

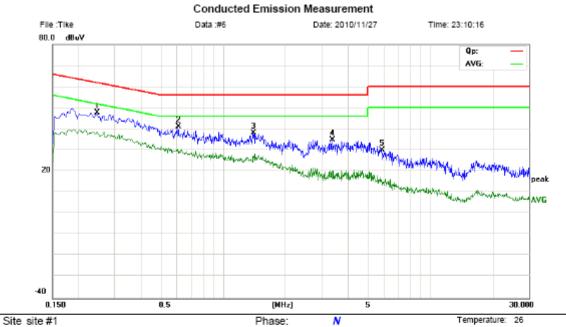

Power: AC 120V/60Hz

Humidity: 60 %

Limit: FCC Part15 B Class B QP

EUT: Mobile Phone

M/N: Tike Mode: Camera

Note:


No. Mi	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1 *	0.2460	36.17	11.69	47.86	61.89	-14.03	peak		
2	0.6060	31.16	10.00	41.16	56.00	-14.84	peak		
3	1.4020	28.45	9.60	38.05	56.00	-17.95	peak		
4	3.3500	24.51	10.35	34.86	56.00	-21.14	peak		
5	5.8100	18.59	11.51	30.10	60.00	-29.90	peak		

<sup>\*:</sup>Maximum data x:Over limit !:over margin



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

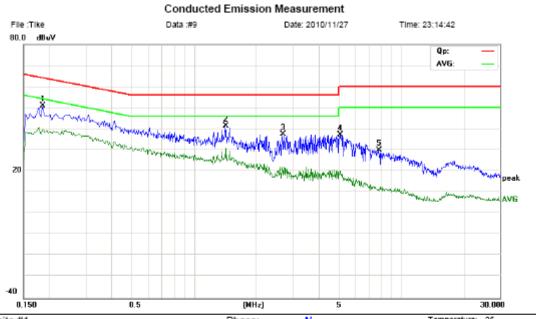

Site site #1 Limit: FCC Part15 B Class B QP

EUT: Mobile Phone

M/N: Tike Mode: TV Note: 
 Phase:
 N
 Temperature:
 26

 Power:
 AC 120V/60Hz
 Humidity:
 60 %


No. M	Λk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *		0.1860	40.03	11.16	51.19	64.21	-13.02	peak	
2		1.4140	31.75	9.59	41.34	56.00	-14.66	peak	
3		2.6660	27.80	9.67	37.47	56.00	-18.53	peak	
4		5.0820	25.37	11.95	37.32	60.00	-22.68	peak	
5		7.7780	19.60	10.33	29.93	60.00	-30.07	peak	

<sup>\*:</sup>Maximum data x:Over limit !:over margin



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

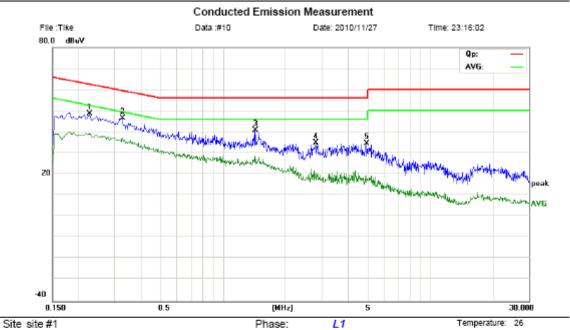

Power: AC 120V/60Hz

56.00 -21.12

56.00 -21.37

Limit: FCC Part15 B Class B QP

Freq.

MHz

0.2260

0.3260

1.4300

2.7980

4.9220

Level

dBuV

36.93

35.31

31.22

25.08

22.71

9.80

11.92

34.88

34.63

EUT: Mobile Phone

M/N: Tike Mode: TV Note:

No. Mk.

1

2

3

4

5

Reading Correct Measure-Limit Over Factor ment dBuV dBuV dΒ Detector Comment 11.83 48.76 62.60 -13.84 peak 59.55 -13.08 46.47 11.16 peak 9.57 40.79 56.00 -15.21 peak

peak

peak

Humidity: 60 %

<sup>\*:</sup>Maximum data x:Over limit !:over margin

## 7. RADIATED EMISSION TEST

## 7.1. LIMITS OF RADIATED DISTURBANCES AT 3M DISTANCES FOR CLASS B

According to FCC section 15.109, except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

#### NOTE:

- 1. Field Strength ( $dB\mu V/m$ ) = 20\*log[Field Strength ( $\mu V/m$ )].
- 2. In the emission tables above, the tighter limit applies at the band edges.

#### 7.2 TEST DESCRIPTION

#### **Test Setup:**

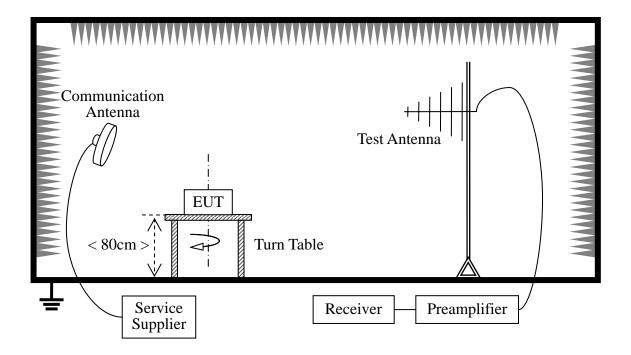

The EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the EUT is activated and transmitting with the other Bluetooth device (Supply by the Applicant) during the test.

#### For the Test Antenna:

(a) In the frequency range of 9 kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.


Preliminary Radiated Emission Test										
Frequenc	y Range Invest	30 MHz TO 1000 MHz								
Mode of operation	Date	Report No.	Data#	Worst Mode						
Call Mode	2010-11-27	STS101109F1	Tiké_1_(H, V)	$\boxtimes$						
Idle Mode	2010-11-27	STS101109F1	Tiké_2_(H, V)							
MP3/MP4 Mode	2010-11-27	STS101109F1	Tiké_3_(H, V)							
USB Mode	2010-11-27	STS101109F1	Tiké_4_(H, V)							
GPRS Mode	2010-11-27	STS101109F1	Tiké_5_(H, V)							
Camera Mode	2010-11-27	STS101109F1	Tiké_6_(H, V)							
Bluetooth Mode	2010-11-27	STS101109F1	Tiké_7_(H, V)							
TV Mode	2010-11-27	STS101109F1	Tiké_8_(H, V)							
FM Mode	2010-11-27	STS101109F1	Tiké_9_(H, V)							

## 7.3 TEST RESULT



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong, China

Tel: 0755-86170306 Fax: 0755-86170310

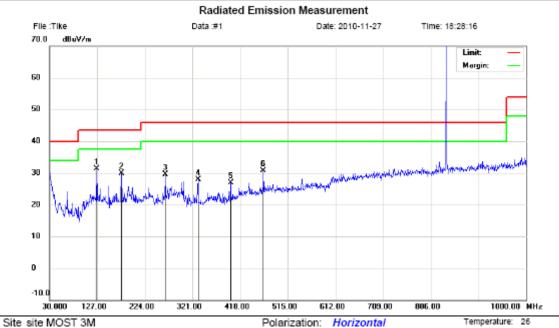

Limit: FCC Part15 B 3M Radiation

EUT: Mobile Phone

M/N: Tike Mode: Call Note:

Power: AC 120V/60Hz

Distance:

Humidity:

60 %

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	126.0300	13.58	17.70	31.28	43.50	-12.22	peak			
2		176.4700	12.94	16.88	29.82	43.50	-13.68	peak			
3		265.7100	11.14	18.35	29.49	46.00	-16.51	peak			
4		332.6400	10.86	17.03	27.89	46.00	-18.11	peak			
5		398.6000	8.28	18.66	26.94	46.00	-19.06	peak			
6		465.5300	9.75	20.98	30.73	46.00	-15.27	peak			


<sup>\*:</sup>Maximum data x:Over limit !:over margin



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong, China

Distance:

Tel: 0755-86170306 Fax: 0755-86170310

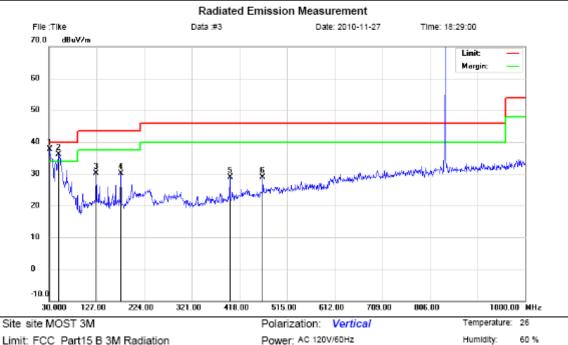

Limit: FCC Part15 B 3M Radiation

EUT: Mobile Phone

M/N: Tike Mode: Call Note:

6

465.5300

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height		
140.	IVIIK	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	×	31.9400	14.42	23.31	37.73	40.00	-2.27	peak			
2	ļ	49.4000	24.44	11.58	36.02	40.00	-3.98	peak			
3		126.0300	12.43	17.70	30.13	43.50	-13.37	peak			
4		176.4700	13.28	16.88	30.16	43.50	-13.34	peak			
- 5		398.6000	10.15	18.66	28.81	46.00	-17.19	peak			

46.00 -17.11

peak

7.91

20.98

28.89

## Notes:


(1) The spikes which exceed the limit should be ignored because they are MS and SS carrier frequency.

x:Over limit !:over margin \*:Maximum data



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong, China

Tel: 0755-86170306 Fax: 0755-86170310

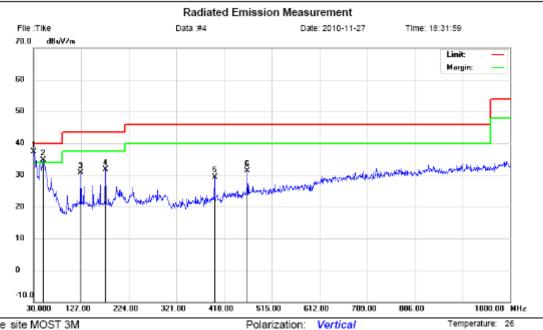

Power: AC 120V/60Hz

Humidity:

Distance:

60 %

Site site MOST 3M

Limit: FCC Part15 B 3M Radiation

EUT: Mobile Phone

M/N: Tike Mode: Camera

Note:


Reading Correct Measure-Antenna Table Limit Over No. Mk. Freq. Level Factor ment Height Degree MHz dBuV dΒ dBuV/m dBuV/m dΒ Detector degree Comment 30.9700 13.34 24.05 37.39 40.00 1 \* -2.61 peak 2! 49.4000 23.03 11.58 34.61 40.00 -5.39 peak 3 126.0300 13.08 17.70 30.78 43.50 -12.72 peak 16.88 4 176.4700 14.85 31.73 43.50 -11.77 peak 5 398.6000 10.73 18.66 29.39 46.00 peak -16.61 20.98 6 465.5300 10.34 31.32 46.00 -14.68 peak

<sup>\*:</sup>Maximum data x:Over limit !:over margin



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

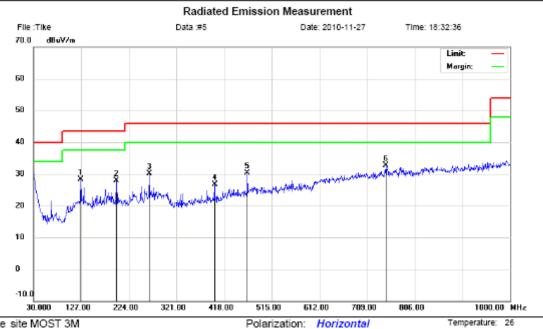

Power: AC 120V/60Hz

Humidity:

Distance:

60 %

Site site MOST 3M

Limit: FCC Part15 B 3M Radiation

EUT: Mobile Phone

M/N: Tike Mode: Camera

Note:


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		126.0300	10.69	17.70	28.39	43.50	-15.11	peak			
2		198.7800	10.61	17.27	27.88	43.50	-15.62	peak			
3		265.7100	11.79	18.35	30.14	46.00	-15.86	peak			
4		398.6000	8.03	18.66	26.69	46.00	-19.31	peak			
5		465.5300	9.23	20.98	30.21	46.00	-15.79	peak			
6	*	746.8300	6.91	25.80	32.71	46.00	-13.29	peak			

<sup>\*:</sup>Maximum data x:Over limit !:over margin



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

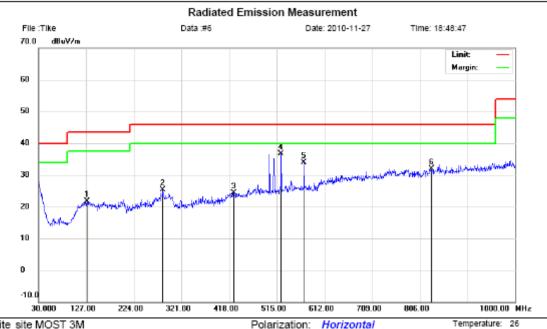

Site site MOST 3M

Limit: FCC Part15 B 3M Radiation

EUT: Mobile Phone

M/N: Tike Mode: FM Note:

Polarization: Horizontal

Power: DC 3.7V

Distance:

Humidity:


No.	Mk.	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		128.9400	4.07	17.70	21.77	43.50	-21.73	peak			
2		283.1700	5.93	19.43	25.36	46.00	-20.64	peak			
3		427.7000	4.03	20.30	24.33	46.00	-21.67	peak			
4	*	523.7300	14.80	21.99	36.79	46.00	-9.21	peak			
5		570.2900	11.06	22.89	33.95	46.00	-12.05	peak			
6		828.3100	4.95	26.93	31.88	46.00	-14.12	peak			

<sup>\*:</sup>Maximum data x:Over limit !:over margin



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

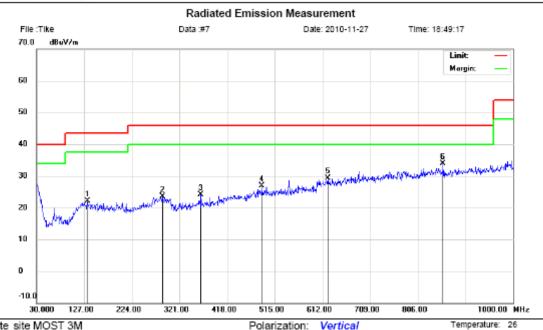

Site site MOST 3M

Limit: FCC Part15 B 3M Radiation

EUT: Mobile Phone

M/N: Tike Mode: FM Note:

Polarization: Vertical

Power: DC 3.7V

Distance:

Humidity:

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		133.7900	4.52	17.51	22.03	43.50	-21.47	peak			
2		286.0800	4.15	19.44	23.59	46.00	-22.41	peak			
3		364.6500	5.90	18.25	24.15	46.00	-21.85	peak			
4		488.8100	5.14	21.72	26.86	46.00	-19.14	peak			
5		622.6700	5.71	23.55	29.26	46.00	-16.74	peak			
6	×	857.4100	6.73	27.08	33.81	46.00	-12.19	peak			

<sup>\*:</sup>Maximum data x:Over limit !:over margin


# APPENDIX 1 PHOTOGRAPHS OF TEST SETUP













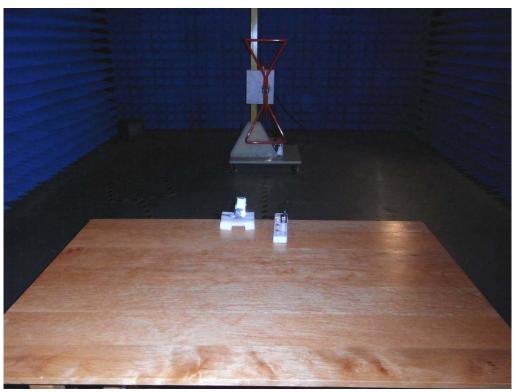

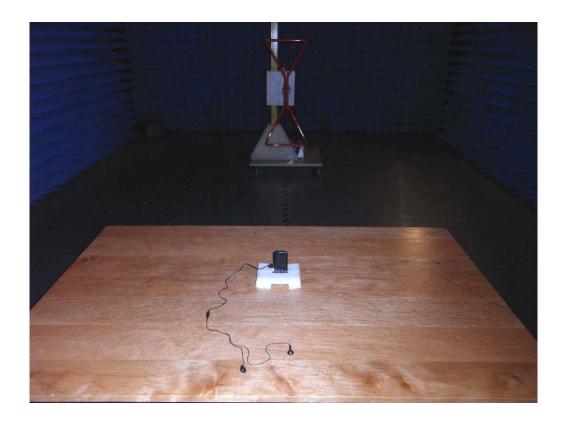

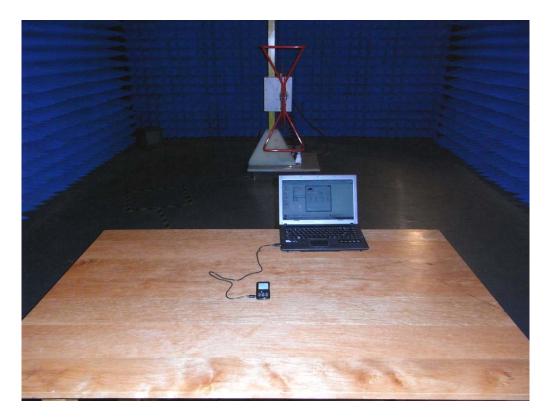

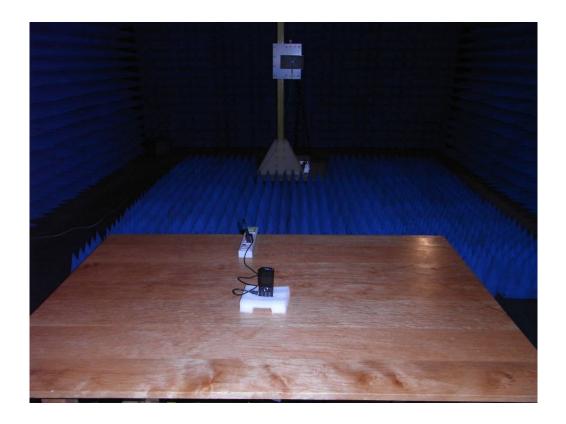

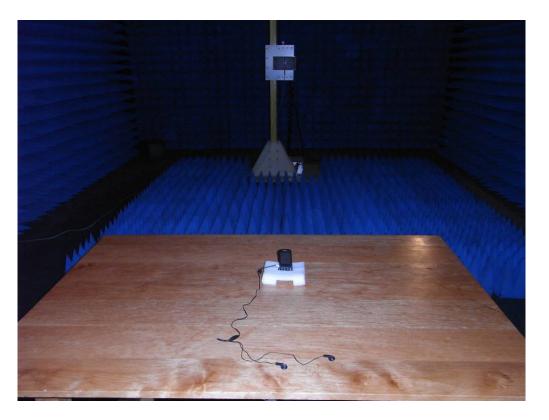

## APPENDIX 2 PHOTOGRAPHS OF EUT

## FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE



## LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE



TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE



PHOTO OF POWER SUPPLY



PHOTO OF USB CABLE



## PHOTO OF HEADPHONE




PHOTO OF BATTERY




## PHOTO OF THE ENTIRE SAMPLE




INTERNAL PHOTO OF SAMPLE - 1

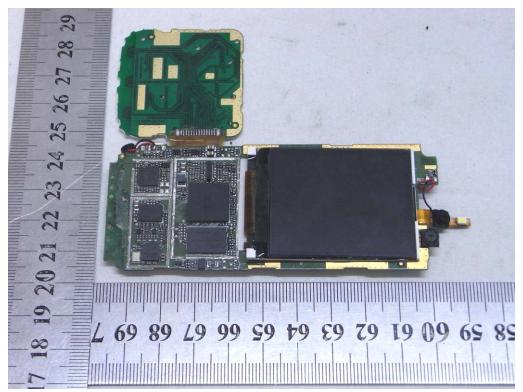


INTERNAL PHOTO OF SAMPLE -2

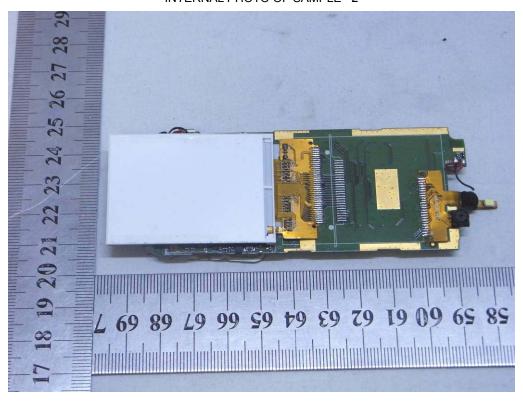


INTERNAL PHOTO OF SAMPLE -3

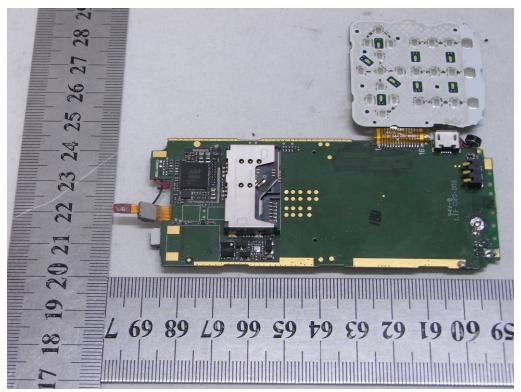

## INTERNAL PHOTO OF POWER SUPPLY-1

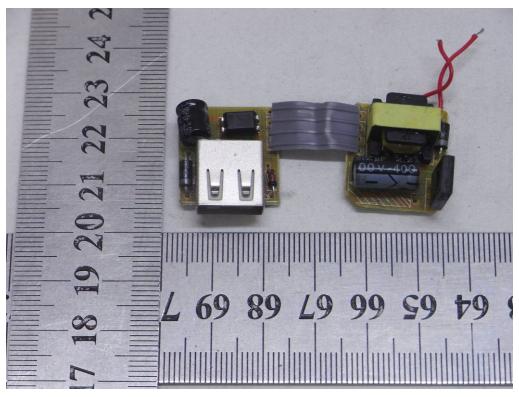

INTERNAL PHOTO OF POWER SUPPLY-2

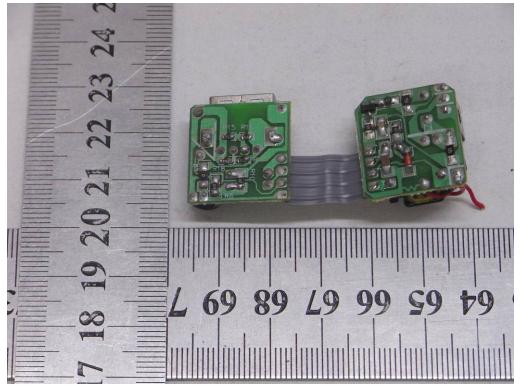

-----END OF REPORT-----