

Antenna Report

Client Name: Dongguan Newmen Electronics Technology Co.,Ltd

Client Address: No.5, Xifa Road, Lin Village, Tangxia Town, Dongguan City, 523711 Guangdong, P.R. China

Product Name: PX-012B

Manufacture: Dingnan Jinpeng Electronic Co., LTD

Address: Jinpeng Industrial Park, Futian Industrial Park, Dingnan County, Ganzhou City, Jiangxi Province

Antenna Type: PCB antenna

Antenna Size:8.5mm*2.7mm

Project Engineer: Issac

Test Standards: ANSI/IEEE Std 149-2021

Test software being used: Emquest

Software Version:1.13

Test Result: PASS

Issued Date: 2022-03-21

Name	Parameter	Method	Standard no.
Antenna performance	Radiation efficiency	IEEE Standard Test Procedures for Antennas	ANSI/IEEE Std 149- 2021


Equipment	Manufacturer	Mode No	Serial No	Cal date	Cal Due
Network Analyzer	Agilent	E5071B	MY48360957	2021/5/20	2022/5/19
Quad-Ridge Horn Antenna	ETS	Apr-64	62743	2021/5/20	2022/5/19
700 MHz-6 GHz	ETS	7006	59957	2021/12/17	2022/12/16
MAPS Controller					
Switch Control System	ETS	7001	MY42001152	2021/12/17	2022/12/16

2 Test Temperature and Humidity

Temperature: 23.2°C

Humidity: 65%

Test Setup

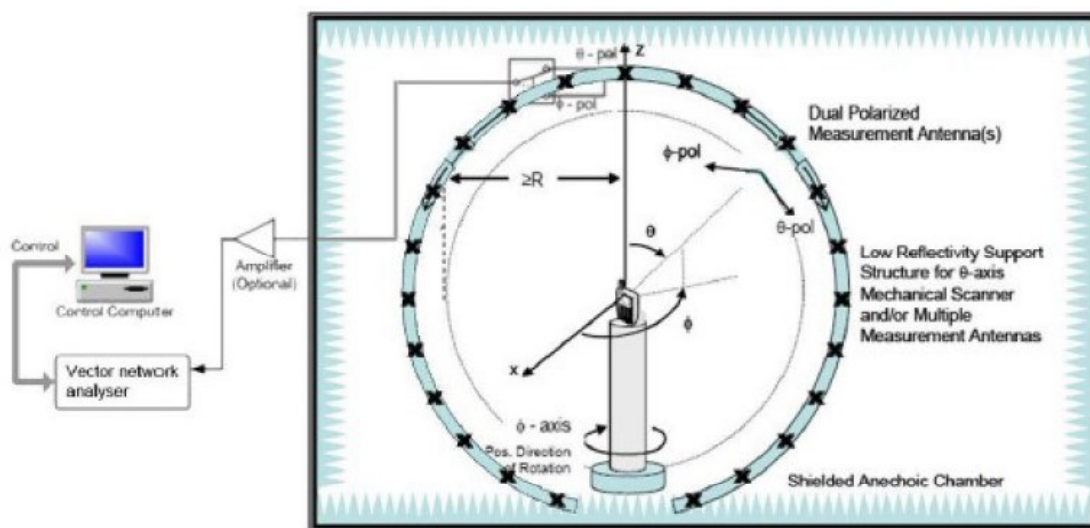


Name	Shenzhen RFI-LAB Communication Technology Co.,Ltd.
Address	10/F A, Lingyun Bld, Liufang Rd, Baoan District, SZ
Tel	13682621346
E-mail	rfi-lab@tech-now.com

Antenna Report

Specifications Summary

ITEM	SPEC.					
Model Name						
Center Frequency	Horizontal			Vertical		
	2403MHz	2441MHz	2480MHz	2403MHz	2441MHz	2480MHz
	-2.64	-1.89	-1.66	-7.09	-4.70	-3.15
MAX. Gain	-1.66					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	32mm					
Manufacture	COMPX Semiconductor Corp					


Antenna Photo & Length (mm)

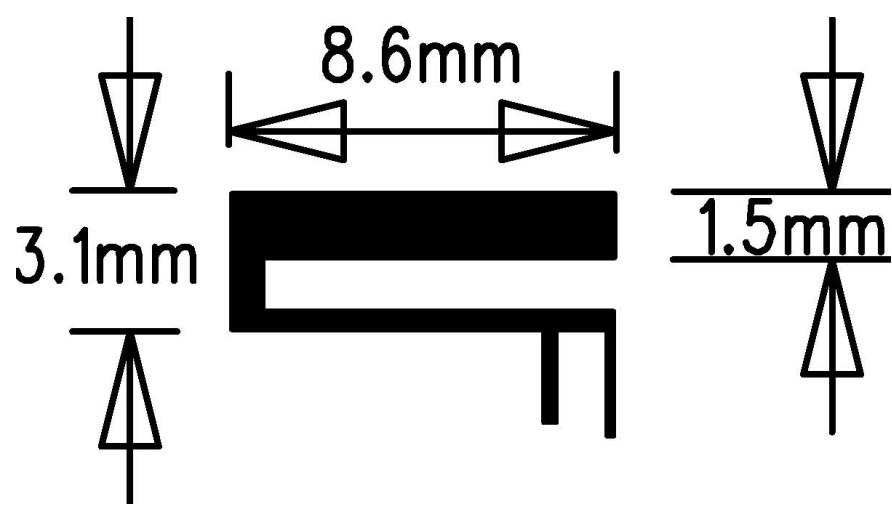

1. Main antenna:2403MHz

1 . 1 H o r i z o n t a l

Total EIRP, Top View

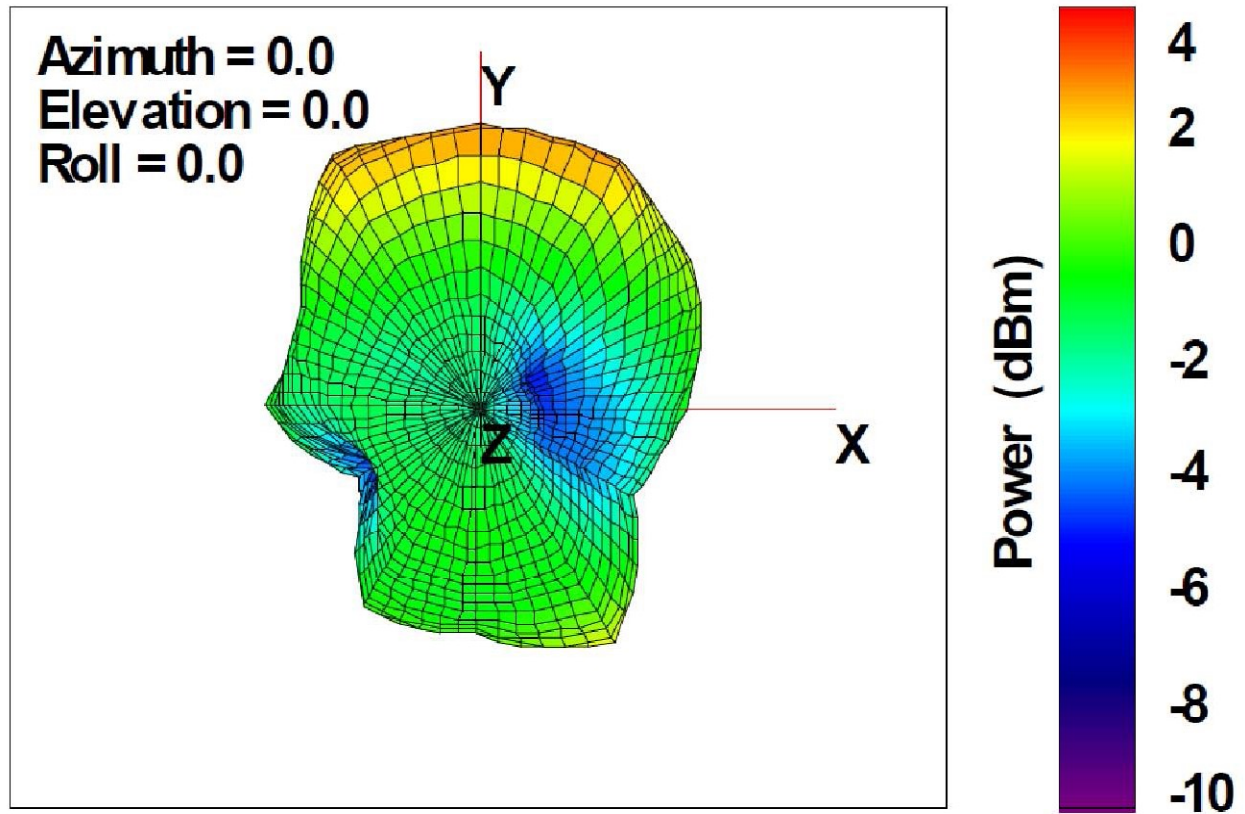

Frequency (MHZ): 2403 Antenna Polarity: Horizontal


Maximum Value (dBi): -2.64

Average Gain (dBi) : - 1.4

Minimum Gain (dBi):-61.26

1.2.Vertical

Total EIRP, Bottom View

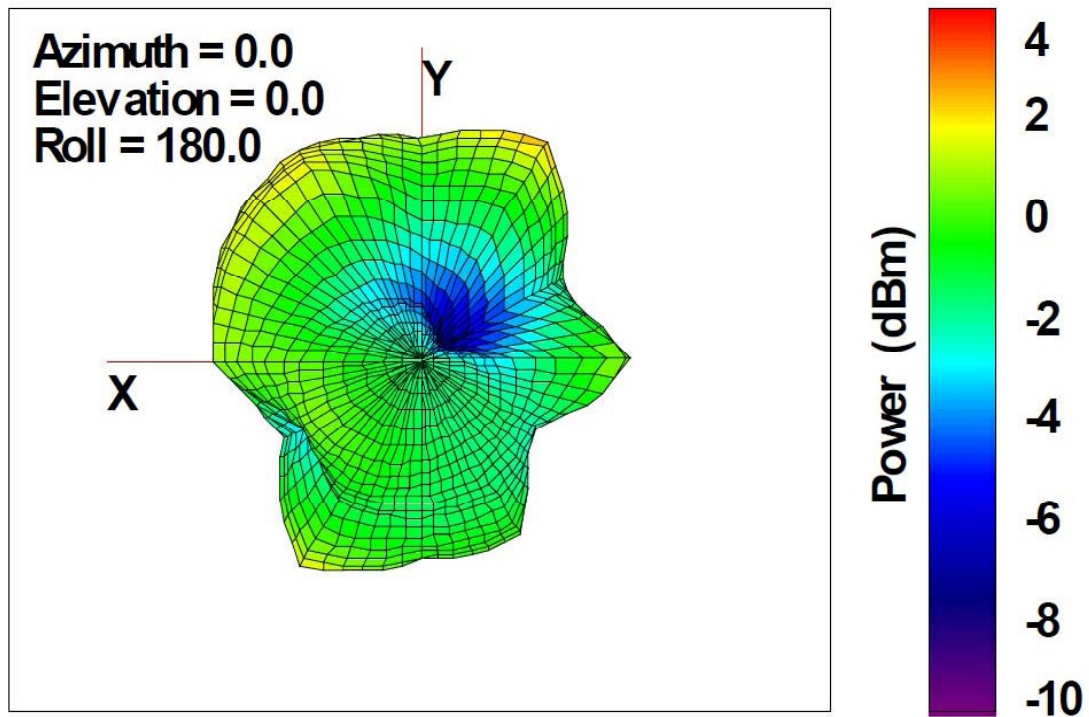

Frequency (MHZ): 2403 Antenna Polarity: Vertical

Maximum Value (dBi): -7.09


Average Gain (dBi): -12

Minimum Gain dBi: -64

2. Main antenna:2441MHz

2.1 Horizontal

Total EIRP, Right Side View

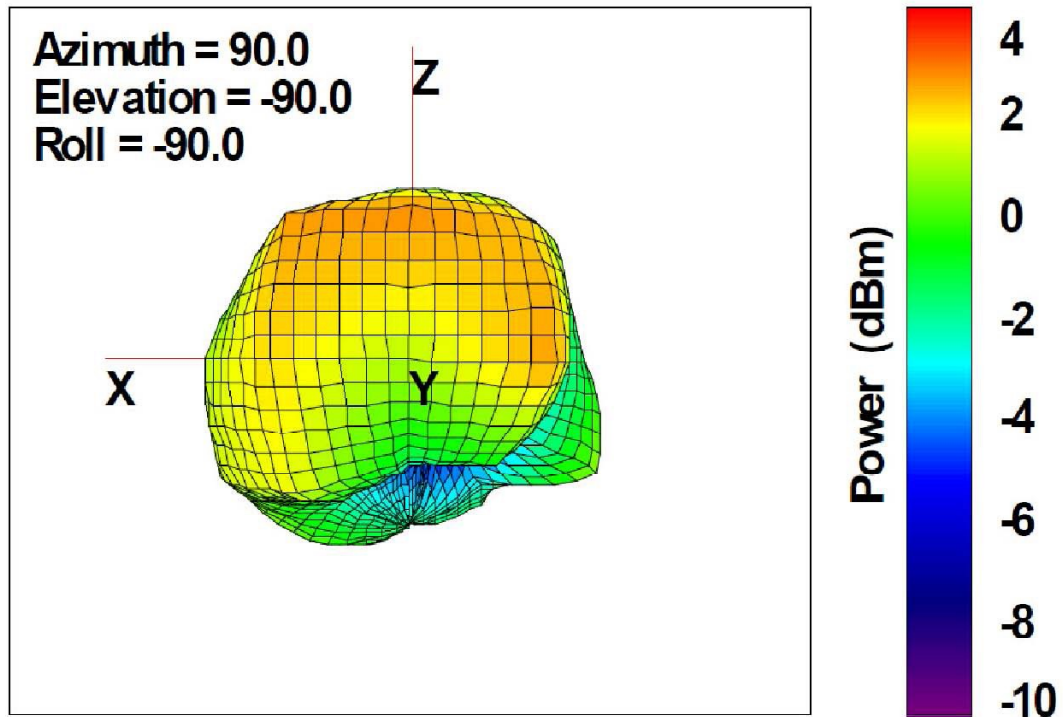

Frequency (MHZ): 2441 Antenna Polarity:Horizontal


Maximum Value (dBi): -1.89

Average Gain (dBi): - 1.2

Minimum Gain(dBi):- 60

2.2 Vertical

Total EIRP, Left Side View

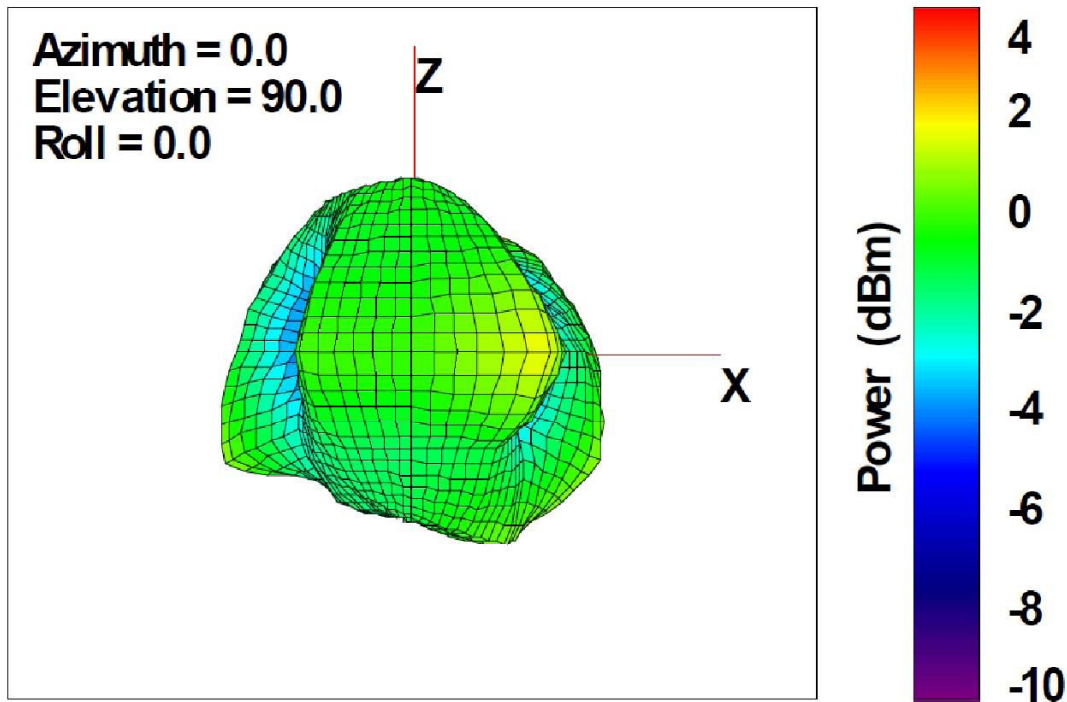

Frequency (MHZ): 2441 Antenna Polarity: Vertical

Maximum Value (dBi): -4.7


Average Gain(dBi): -12

Minimum Gain (dBi) : -54

3. Main antenna:2480MHz

2.1 Horizontal

Total EIRP, Front View

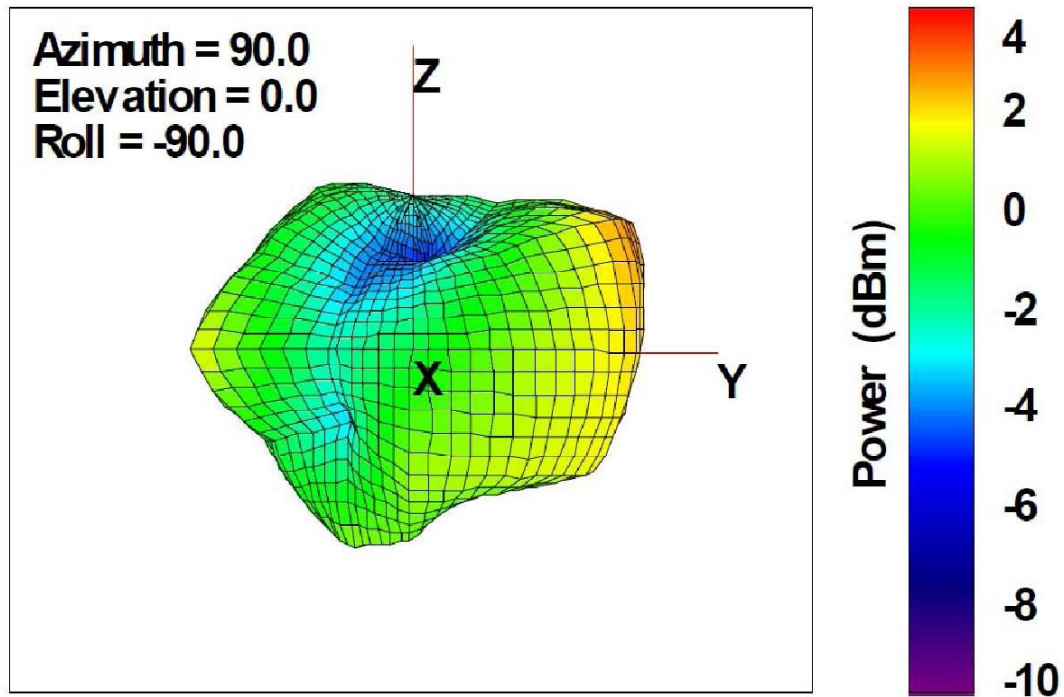

Frequency (MHZ): 2480 Antenna Polarity: Horizontal


Maximum Value (dBi) : -1.66

Average Gain (dBi) : -2.5

Minimum Gain (dBi) : -52

2.2 Vertical

Total EIRP, Back View

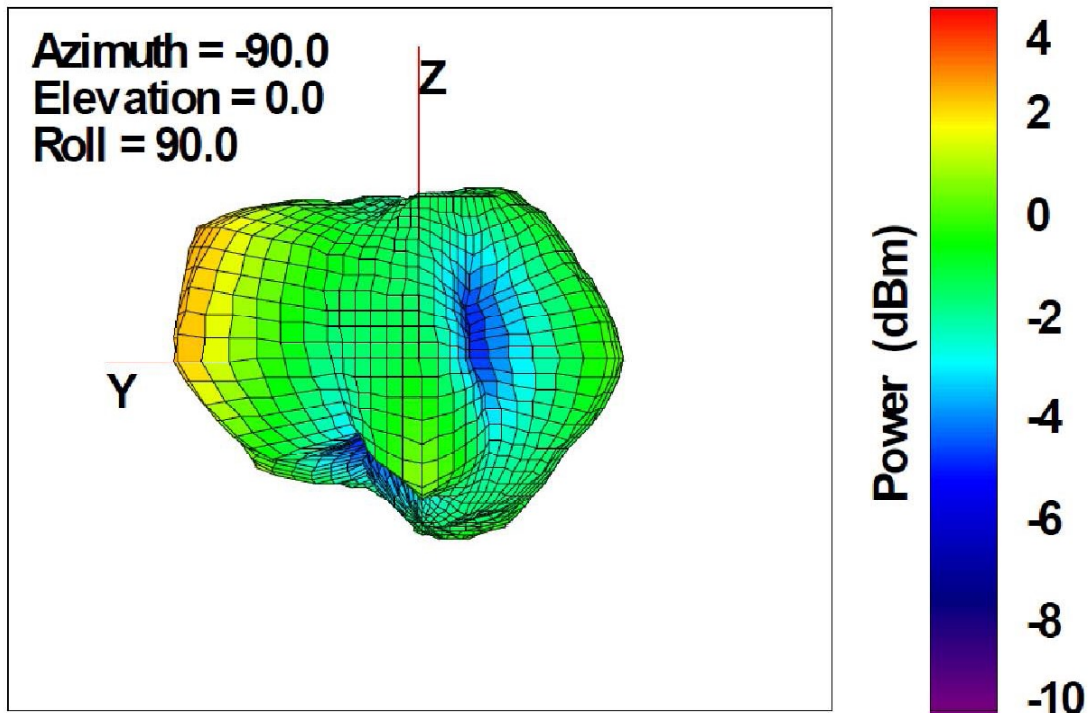

Frequency (MHZ) : 2480 Antenna Polarity: Vertical

Maximum Value (dBi): - 3.15

Average Gain (dBi): - 11

Minimum Gain (dBi): - 50