



QUBE 6015 PLUS

UHF RFID Antenna


Specification

1. Part Name
KSA-921A6015B100E


2. Electrical Specifications

Item	Specifications			
	Min.	Typical	Max.	Unit
Center Frequency (= Fc)	917	921	925	MHz
3dB Bandwidth	26	30		MHz
Return Loss @ Fc			-15	dB
Polarization	R.H.C.P			
Peak Gain @ Fc (RHCP)		4		dBic
Gain @ Reference Antenna	-14	-11		dB

Note 1. Operating frequency is defined as frequency range between f3dB_low and f3dB_high.

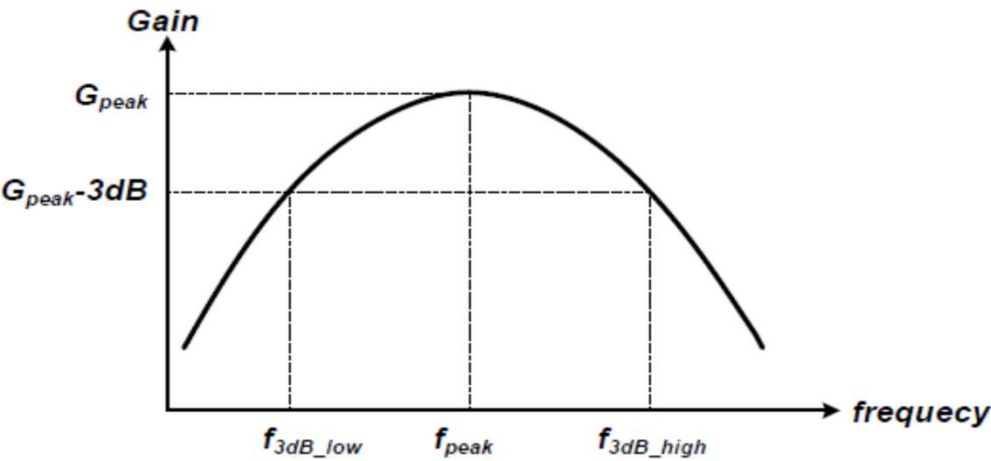

3. Dimensions

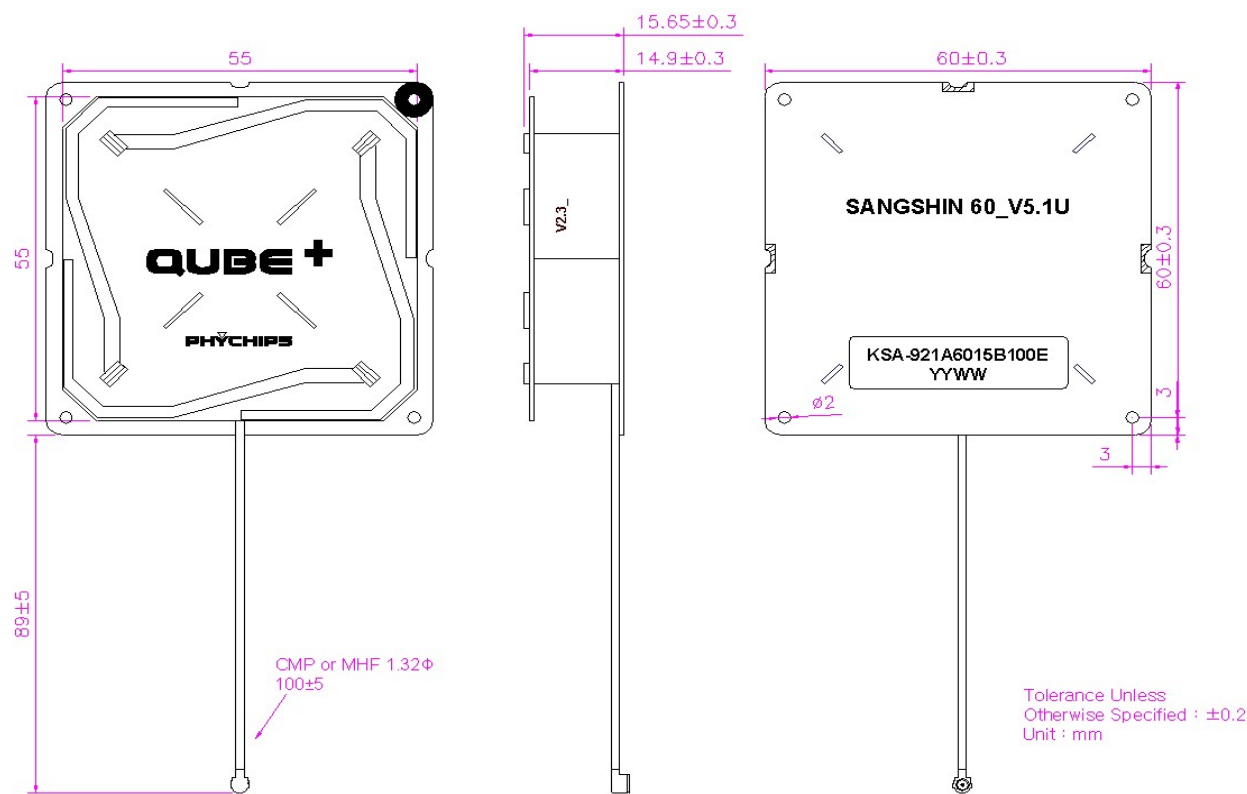

* Both CMP(Gigalane) and MHF(I-PEX) can be used interchangeably.
However, only one type, either CMP or MHF, must be used in the same LOT production.

* YYWW : Date Code

* Dimensions of Connector


CMP	MHF

4. S-parameter Data


4.1 Return Loss (S11)



4.2 Smith Chart (S11)

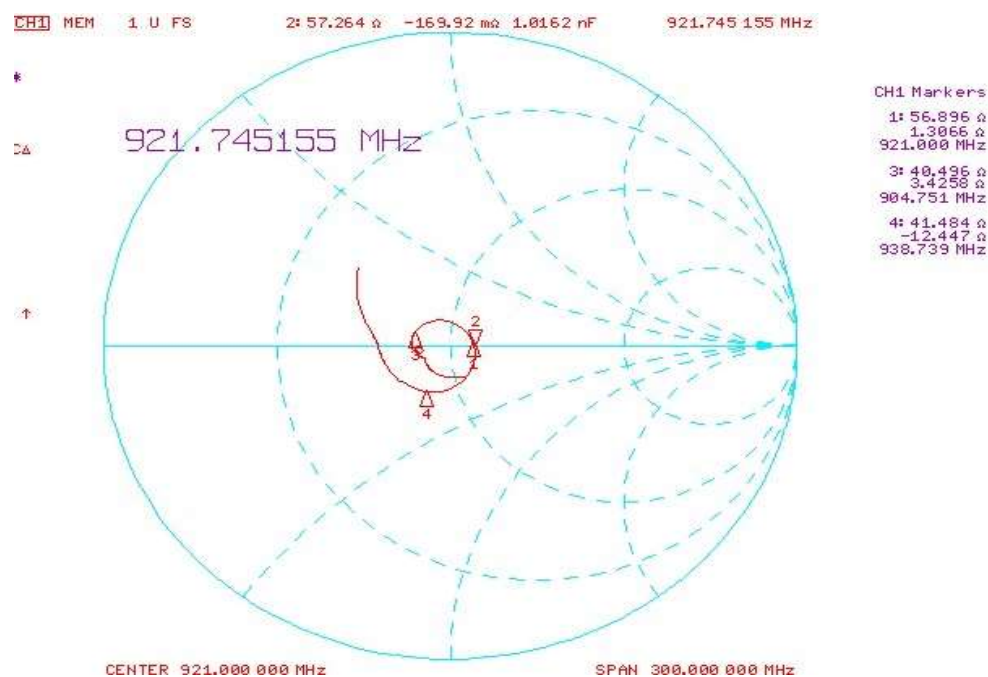


4.3 Gain (S21)

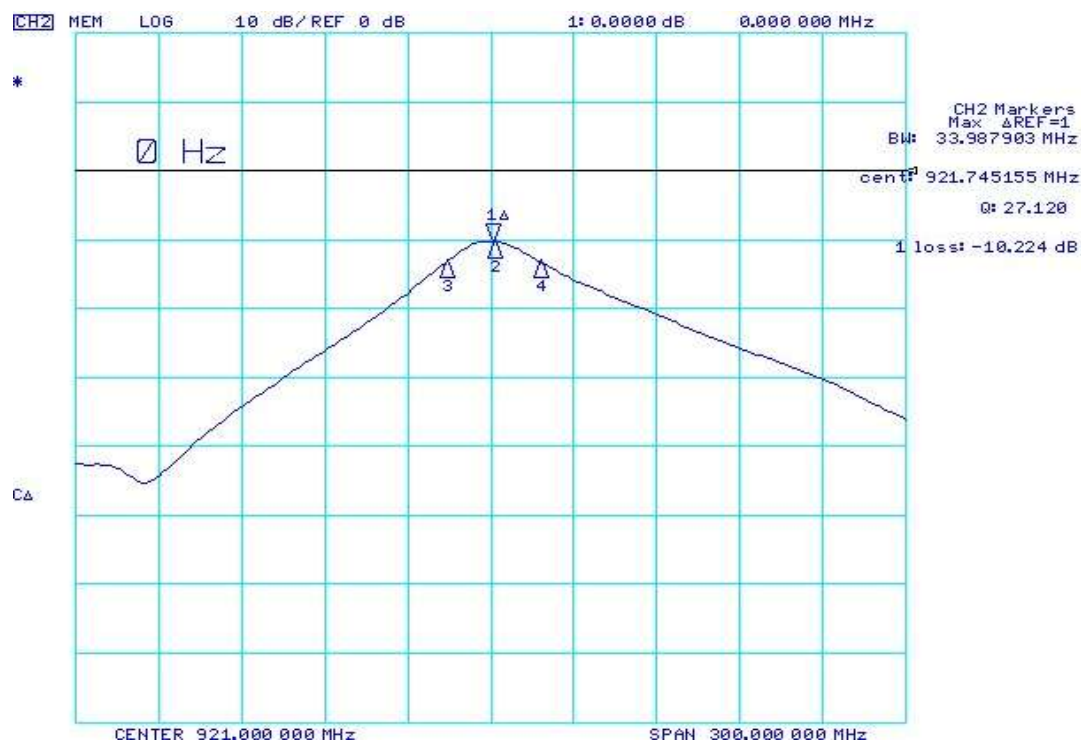


5. Antenna Chamber Data

5.1 RHCP Gain

No.	Freq.	RHCP				Phi[deg]	H(Theta=0)				E1(Phi=0)	E2(Phi=90)			
		Eff.[%]	Avg.[dBic]	Peak[dBic]	Theta[deg]		Avg.[dBic]	Peak[dBic]	[deg]	BW[deg]		Avg.[dBic]	Peak[dBic]	Theta[deg]	BW[deg]
4	906.000	45.86	-3.39	1.58	0.00	255.00	-4.92	-4.19	30.00	999.00	-2.67	1.43	0.00	124.17	123.39
5	908.000	51.74	-2.86	2.09	0.00	255.00	-4.39	-3.62	30.00	999.00	-2.14	1.96	0.00	123.91	123.16
6	910.000	57.84	-2.38	2.57	0.00	255.00	-3.90	-3.11	30.00	999.00	-1.66	2.42	0.00	123.99	122.97
7	912.000	64.32	-1.92	3.03	0.00	255.00	-3.43	-2.60	30.00	999.00	-1.20	2.89	0.00	123.35	122.91
8	914.000	70.58	-1.51	3.43	0.00	255.00	-3.02	-2.17	30.00	999.00	-0.80	3.29	0.00	122.79	122.75
10	916.000	75.51	-1.22	3.73	0.00	255.00	-2.72	-1.78	240.00	999.00	-0.53	3.56	0.00	122.42	122.37
11	918.000	78.49	-1.05	3.93	0.00	255.00	-2.54	-1.50	240.00	999.00	-0.37	3.73	0.00	121.45	122.17
12	920.000	79.66	-0.99	4.00	0.00	255.00	-2.46	-1.37	240.00	999.00	-0.33	3.79	0.00	120.46	121.82
13	921.000	79.80	-0.98	4.01	0.00	270.00	-2.45	-1.32	240.00	999.00	-0.34	3.81	0.00	119.98	121.73
14	922.000	79.58	-0.99	4.01	0.00	255.00	-2.46	-1.31	240.00	359.29	-0.36	3.80	0.00	119.44	121.55
15	924.000	78.25	-1.06	3.97	0.00	270.00	-2.53	-1.36	240.00	358.63	-0.45	3.74	0.00	118.31	120.73
16	926.000	75.33	-1.23	3.84	0.00	255.00	-2.69	-1.51	240.00	999.00	-0.64	3.61	0.00	116.45	119.91
17	928.000	71.07	-1.48	3.63	0.00	255.00	-2.95	-1.75	240.00	999.00	-0.89	3.41	0.00	114.73	118.83
18	930.000	66.25	-1.79	3.36	0.00	270.00	-3.27	-2.08	240.00	999.00	-1.21	3.14	0.00	113.56	117.56
19	932.000	61.37	-2.12	3.09	0.00	270.00	-3.62	-2.47	240.00	999.00	-1.54	2.87	0.00	112.07	116.27
20	934.000	56.49	-2.48	2.78	0.00	270.00	-4.01	-2.88	240.00	999.00	-1.90	2.56	0.00	111.08	115.08
21	936.000	51.41	-2.89	2.40	0.00	270.00	-4.46	-3.32	240.00	999.00	-2.30	2.21	0.00	109.63	114.05

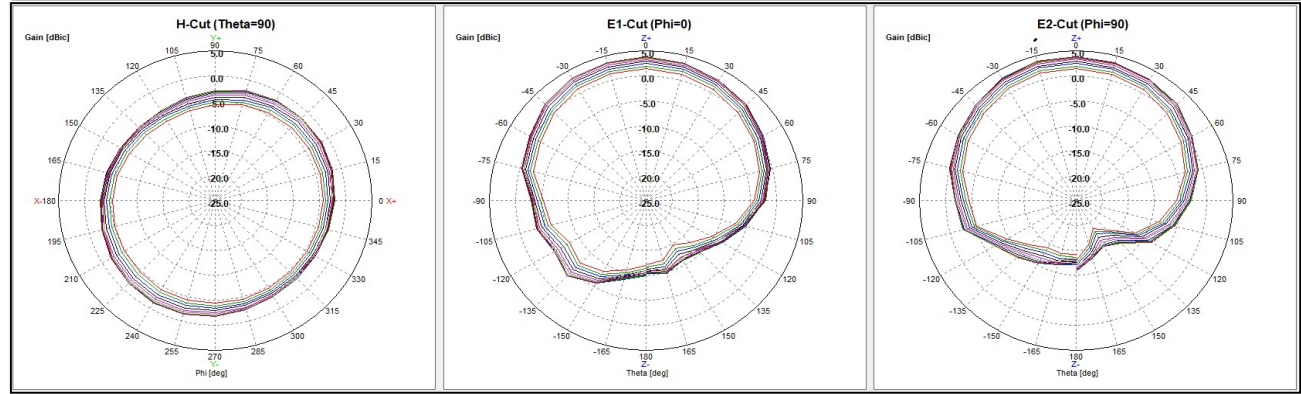

5.2 Gain vs Frequency

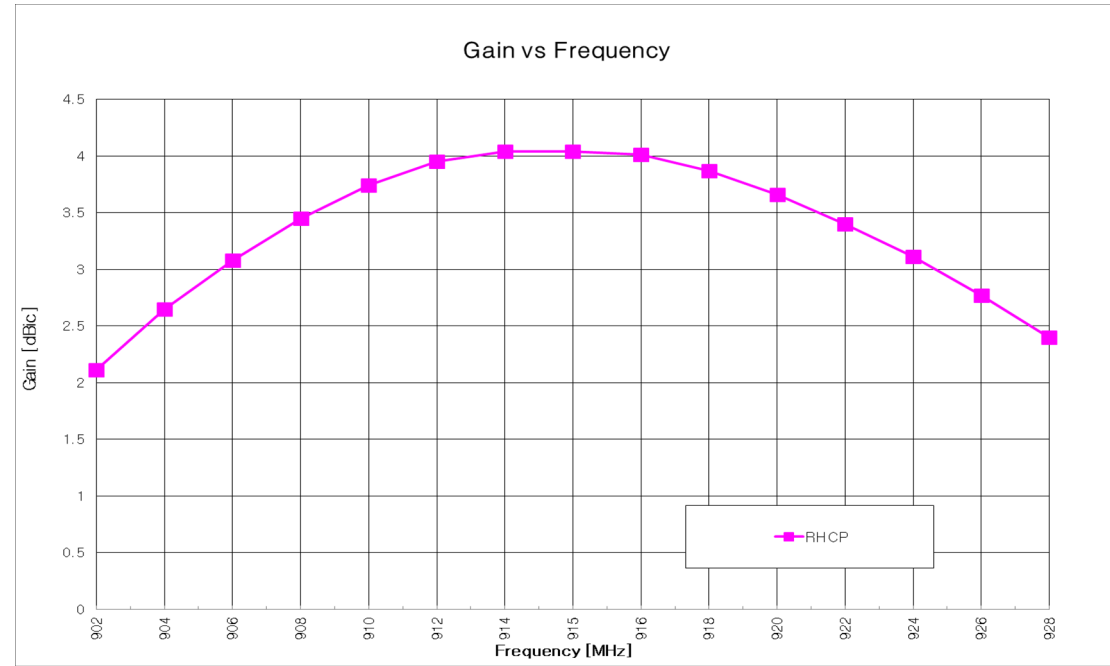

6. Measurement within enclosure
TBD

6.1 Reader or Model Name


6.2 Electrical Specifications

Item	Specifications			
	Min.	Typical	Max.	Unit
Center Frequency (= Fc)				MHz
3dB Bandwidth				MHz
Return Loss @ Fc				dB
Polarization	R.H.C.P			
Peak Gain @ Fc (RHCP)				dBic


6.3 Antenna Chamber Data within enclosure

7. Measurement Condition


7.1 S-parameter Measurement

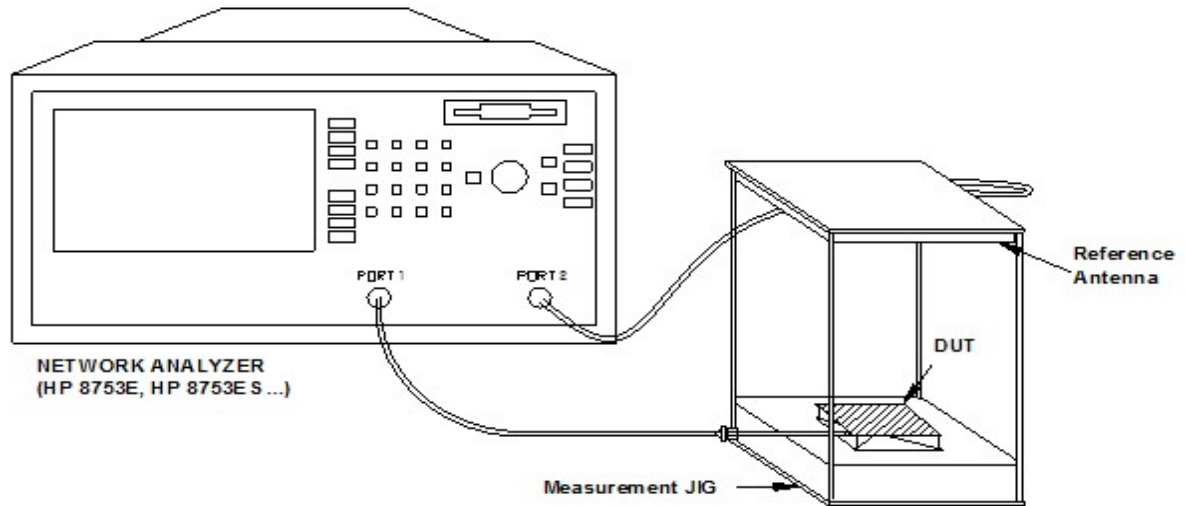

7.2 Gain Measurement

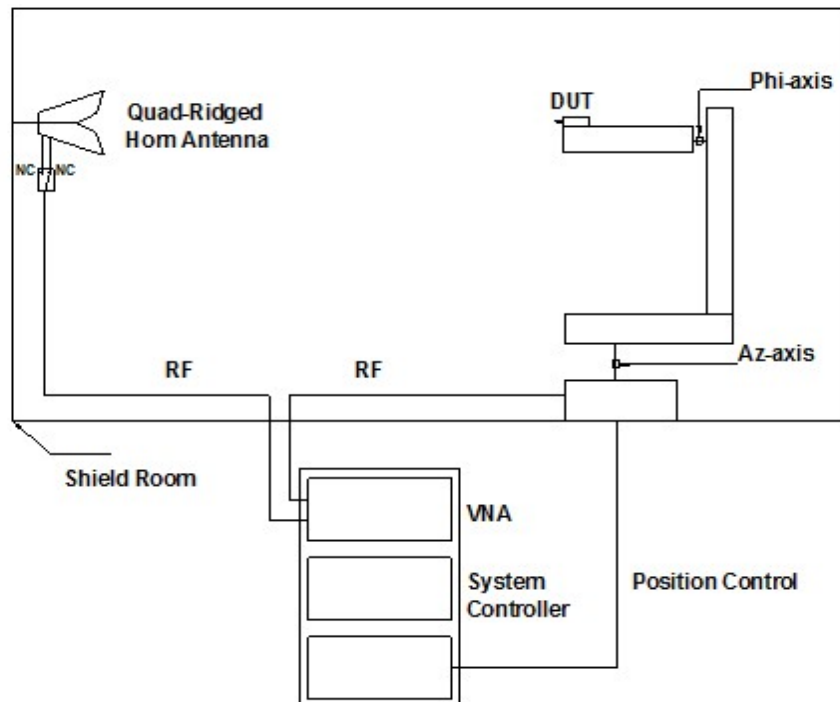

8. Package

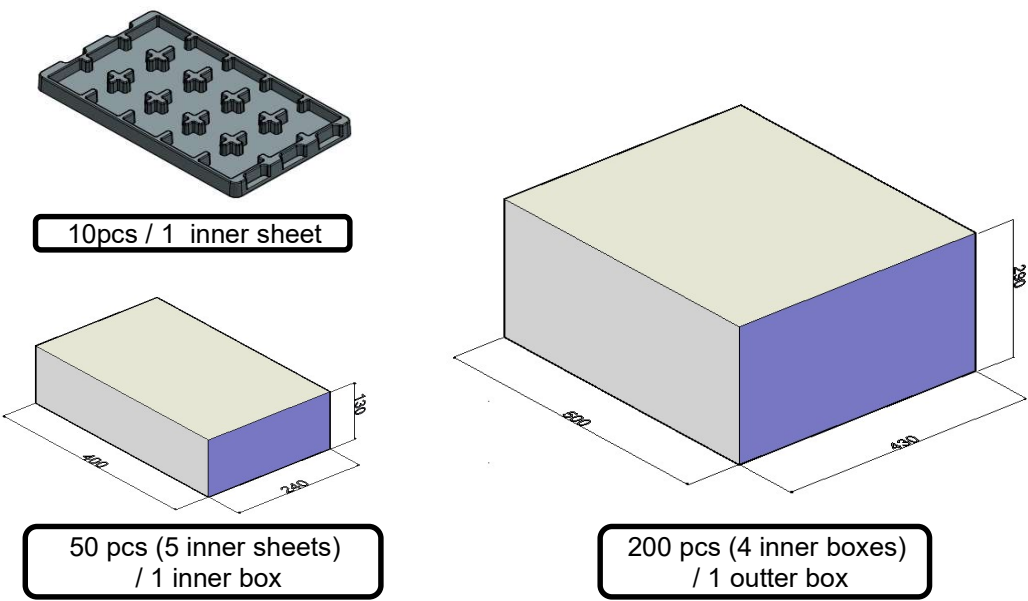

9. Revision

Revision No.	Originator	Description of Change	Date of Changes
1.0.0	SM Yun	Full specification	10-Jan-24

10. Contact Information

PHYCHIPS Inc.

**#104, 187 Techno 2-ro Yuseong-gu, Daejeon, Korea
(Yongsan-dong. Migun Technoworld 2), 34025**

Web site : <http://www.phychips.com>

E-mail : sales@phychips.com

TEL : +82-42-864-2402

FAX : +82-42-864-2403

Disclaimer: PHYCHIPS reserves the right to make changes to the information in this document without prior notice. The purchase of PHYCHIPS products does not convey any license under patent rights owned by PHYCHIPS or others. PHYCHIPS does not assume any responsibility for the use of this product. It is the customer's responsibility to make sure that the system complies with regulations.

© 2024 PHYCHIPS Inc. All rights reserved. The reproduction of this document is NOT allowed without approval of PHYCHIPS Inc.