



## COMPLIANCE WORLDWIDE INC. TEST REPORT 478-10

In Accordance with the Requirements of  
**FCC PART 15.209**  
**INDUSTRY CANADA RSS 210, ISSUE 8, Annex 8**

**License-exempt Radio Apparatus  
(All Frequency Bands): Category I**

Issued to

**David Clark Company Incorporated  
360 Franklin St.  
PO Box 15054  
Worcester, MA. 01615**

for the

**Models U9911-BSC, U9920-GPB  
U9921-GUV and U9922-G38**

**FCC ID: Y3J-U9921  
IC: 9409A-U9921**

**Report Issued on February 11, 2011**

Tested by

  
\_\_\_\_\_  
Brian F. Breault

Reviewed by

  
\_\_\_\_\_  
Larry K. Stillings

This test report shall not be reproduced, except in full, without written permission from Compliance Worldwide, Inc.

## Table of Contents

|  |    |
|--|----|
| 1. Scope .....   | 3  |
| 2. Product Details .....                                     | 3  |
| 2.1. Manufacturer .....                                      | 3  |
| 2.2. Model Number .....                                      | 3  |
| 2.3. Serial Number.....                                      | 3  |
| 2.4. Description of EUT .....                                | 3  |
| 2.5. Power Source .....                                      | 3  |
| 2.6. EMC Modifications.....                                  | 3  |
| 3. Product Configuration.....                                | 3  |
| 3.1. Operational Characteristics & Software.....             | 3  |
| 3.2. EUT Hardware.....                                       | 3  |
| 3.3. EUT Cables/Transducers .....                            | 4  |
| 3.4. Support Equipment.....                                  | 4  |
| 3.5. Block Diagram .....                                     | 4  |
| 4. Measurements Parameters .....                             | 5  |
| 4.1. Measurement Equipment Used to Perform Test .....        | 5  |
| 4.2. Measurement & Equipment Setup.....                      | 5  |
| 4.3. Test Procedure .....                                    | 5  |
| 5. Choice of Equipment for Test Suites .....                 | 6  |
| 5.1. Choice of Model.....                                    | 6  |
| 5.2. Presentation .....                                      | 6  |
| 5.3. Choice of Operating Frequencies .....                   | 6  |
| 5.4. Antennas Used with this Device .....                    | 6  |
| 6. Measurement Summary .....                                 | 7  |
| 7. Measurement Data .....                                    | 8  |
| 7.1. Antenna Requirement.....                                | 8  |
| 7.2. Minimum 26 dB Bandwidth.....                            | 8  |
| 7.3. 99% Bandwidth.....                                      | 9  |
| 7.4. Transmitter Frequency Stability.....                    | 10 |
| 7.5. Transmitter Field Strength / Output Power .....         | 12 |
| 7.6. Conducted Emissions.....                                | 13 |
| 7.7. Radiated (Spurious) Emissions .....                     | 15 |
| 7.8. Radiated (Harmonic) Emissions .....                     | 18 |
| 7.9. Receiver Spurious Emissions .....                       | 18 |
| 7.10. Public Exposure to Radio Frequency Energy Levels ..... | 18 |
| 8. Test Site Description .....                               | 29 |

**Test Number: 478-10****Issue Date: 1/28/2011**

## 1. Scope

This test report certifies that the David Clark Company models U9911-BSC, U9920-GPB, U9921-GUV and U9922-G38, as tested, meet the FCC Part 15.209, and Industry Canada RSS 210 requirements.

The scope of this test report is limited to the test samples provided by the client, only in as much as those samples represent other production units. If any significant changes are made to the units, the changes shall be evaluated and a retest may be required.

## 2. Product Details

**2.1. Manufacturer:** David Clark Company Inc.

**2.2. Model Numbers:**

|           |   |
|-----------|---|
| U9911-BSC | Controller Belt Station                   |
| U9920-GPB | Push Back Gateway                         |
| U9921-GUV | Universal Gateway (Part Number 40994G-01) |
| U9922-G38 | 3800 Gateway                              |

**2.3. Serial Number:** P51684-06

**2.4. Description of EUT:** Universal Gateway (Model U9921-GUV was tested)

**2.5. Power Sources:**

|           |          |
|-----------|----------|
| U9911-BSC | +3.7 VDC |
| U9920-GPB | +3.7 VDC |
| U9921-GUV | +12 VDC  |
| U9922-G38 | +12 VDC  |

**2.6. Hardware Revision:** Rev 5

**2.7. Software Revision:** N/A

**2.8. EMC Modifications:** None

## 3. Product Configuration

### 3.1. Operational Characteristics & Software

The David Clark Company models listed in section 2.2 were tested using customized firmware. This modification allowed the unit to transmit a typically modulated signal continuously once power was applied to the unit.

### 3.2. EUT Hardware

| Qty | Manufacturer        | Model     | Serial Number | Input Volts | Freq (Hz) | Description/Function    |
|-----|---------------------|-----------|---------------|-------------|-----------|-------------------------|
| 1   | David Clark Company | U9911-BSC | N/A           | 3.7         | VDC       | Controller Belt Station |
| 1   | David Clark Company | U9920-GPB | N/A           | 3.7         | VDC       | Push Back Gateway       |
| 1   | David Clark Company | U9921-GUV | N/A           | 12          | VDC       | Universal Gateway       |
| 1   | David Clark Company | U9922-G38 | N/A           | 12          | VDC       | 3800 Gateway            |

Test Number: 478-10

Issue Date: 1/28/2011

### 3. Product Configuration (continued)

#### 3.3. EUT Cables/Transducers


| Manufacturer        | Model/Part # | Length (m) | Shield Y/N | Description          | From         | To        |
|---------------------|--------------|------------|------------|----------------------|--------------|-----------|
| David Clark Company | 40828G       | .5         | Y          | Power & Signal Cable | Power Supply | U9921-GUV |
| David Clark Company | C3408        | .5         | Y          | Power & Signal Cable | Power Supply | U9922-G38 |

#### 3.4. Support Equipment


| Manufacturer | Model   | Serial Number | Input Voltage | Frq (Hz) | Description/Function   |
|--------------|---------|---------------|---------------|----------|--|
| Sorensen     | QRS60-5 | 536           | 120           | 60       | 0-60 VDC, .5A Power Supply (for units U9921-GUV and U9922-G38) |

#### 3.5. Block Diagrams

##### 3.5.1. Units U9911-BSC, U9920-GPB (internal 3.7 VDC battery)



##### 3.5.2. Units U9921-GUV, U9922-G38

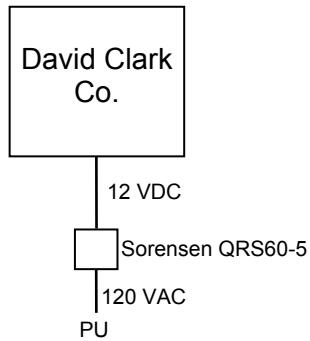

**Test Number: 478-10**
**Issue Date: 1/28/2011**

#### 4. Measurements Parameters

##### 4.1. Measurement Equipment Used to Perform Test

| Device            | Manufacturer            | Model No.   | Serial No. | Cal Due    |
|-------------------|-------------------------|-------------|------------|------------|
| EMI Receiver      | Agilent                 | E7405A      | MY4511543  | 10/22/2011 |
| Spectrum Analyzer | Hewlett Packard         | 8593E       | 3829A03887 | 8/23/2011  |
| Loop Antenna      | EMCO                    | 6502        | 2197       | 7/21/2012  |
| Bilog Antenna     | Com-Power               | AC-220      | 25509      | 8/30/2011  |
| Horn Antenna      | Electro-Metrics         | EM-6961     | 6337       | 10/19/2012 |
| Horn Antenna      | ComPower                | AH-840      | 03075      | 7/20/2012  |
| LISN              | EMCO                    | 3825/2      | 9109-1860  | 6/2/2011   |
| DMM / Temperature | Fluke                   | 187         | 79690058   | 10/9/2012  |
| Thermal Chamber   | Associated Testing Labs | SLHU-1-CRLC | N/A        | N/A        |

##### 4.2. Measurement & Equipment Setup

|                                      |   |
|--------------------------------------|---|
| Test Dates:                          | Jan 10 - 21, 2011   |
| Test Engineer:                       | Brian Breault   |
| Normal Site Temperature (15 - 35°C): | 24.0  |
| Relative Humidity (20 -75%RH):       | 33%   |
| Frequency Range:                     | .009 MHz to 1 GHz   |
| Measurement Distance:                | 3 Meters  |
| EMI Receiver IF Bandwidth:           | 200 Hz – 9 kHz to 150 kHz<br>9 kHz – 150 kHz to 30 MHz<br>120 kHz- 30 MHz to 1 GHz<br>1 MHz - Above 1 GHz                 |
| EMI Receiver Avg Bandwidth:          | 300 Hz – 9 kHz to 150 kHz<br>30 kHz – 150 kHz to 30 MHz<br>300 kHz - 30 MHz to 1 GHz<br>3 MHz - Above 1 GHz               |
| Detector Function:                   | Peak, QP, Avg – 150 kHz to 30 MHz<br>Peak, QP - 30 MHz to 1 GHz<br>Peak, Avg - Above 1 GHz<br>Unless otherwise specified. |

##### 4.3. Test Procedure

The test measurements contained in this report are based on the requirements detailed in FCC Part 15, Section 15.09: Radiated emission limits; general requirements and RSS-210 Issue 8; License-exempt Radio Apparatus.

The test methods used to generate the data in this test report are in accordance with ANSI C63.4: 2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

When required, the device under test was rotated through three orthogonal axes to determine which attitude produced the highest emission relative to the limit in accordance with ANSI C63.4-2009, section 13.4.1, c). The attitude that produced the highest emission relative to the limit was used for all radiated emission measurements.

Test Number: 478-10

Issue Date: 1/28/2011

## 5. Choice of Equipment for Test Suits

### 5.1. Choice of Model

This test report is based on the test samples supplied by the manufacturer and are reported by the manufacturer to be equivalent to the production units. All four models are supplied with identical transmitters and have been measured for fundamental and harmonic field strength. Of the four units, the U9921-GUV (Part Number 40994G-01) had the highest measured field strength. This unit was selected as the representative unit for all other measurements.

### 5.2. Presentation

This test samples were tested complete with all required ancillary equipment. Refer to Section 3 of this report for the product equipment configuration.

### 5.3. Choice of Operating Frequencies

This unit utilizes a single operating frequency at approximately 125 kHz

**Test Number: 478-10**
**Issue Date: 1/28/2011**

## 6. Measurement Summary

| Test Requirement                                 | FCC Reference                 | IC RSS Reference        | Test Report Sect. | Result    | Comment  |
|--|-------------------------------|-------------------------|-------------------|-----------|--|
| Antenna Requirement                              | 15.203                        | RSS-GEN §7.1.2          | 7.1               | Compliant | Unit has a permanently mounted internal antenna.   |
| Minimum 26 dB Bandwidth                          | ANSI C63.4:2009 §13.7         | N/A                     | 7.2               | Compliant |  |
| 99% Power Bandwidth                              | N/A                           | RSS-GEN §4.6.1          | 7.3               | Compliant |  |
| Field Strength / Transmitter Output Power        | 15.209 (a)                    | RSS-GEN §4.8            | 7.4               | Compliant |  |
| Transmitter Frequency Stability                  | ANSI C63.4:2009 §13.5 & §13.6 | RSS-GEN Section 4.7     | 7.5               | Compliant |  |
| AC Power-line Conducted Emission Measurements    | ANSI C63.4:2009 §13.3         |                         | 7.6               | Compliant | Unit is powered by 12 Volts DC   |
| Radiated (Spurious) Emissions Measurements       | ANSI C63.4:2009 §13.4         |                         | 7.7               | Compliant |  |
| Radiated (Harmonic) Emissions Measurements       | ANSI C63.4:2009 §13.4         |                         | 7.8               | Compliant |  |
| Lower and Upper Band Edge                        | N/A                           | N/A                     | N/A               | Compliant | Sections 7.2 and 7.5 provide enough data to prove that the transmitter meets the in-band requirements. |
| Receiver Spurious Emissions                      | N/A                           | RSS-GEN §4.10           | 7.9               | Compliant |  |
| Public Exposure to Radio Frequency Energy Levels | 47 CFR 1.1307(b)              | RSS-GEN §5.5<br>RSS-102 | 7.9               | Compliant |  |

Test Number: 478-10

Issue Date: 1/28/2011

## 7. Measurement Data

### 7.1. Antenna Requirement (Section 15.203, RSS-GEN 7.1.2)

Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.


Status: The unit under test employs a permanent, internally mounted antenna.

### 7.2. Minimum 26 dB Bandwidth (ANSI C63.4, Section 13.7)

Requirement: If no bandwidth requirement is specified by the procuring or regulatory agency, measure the bandwidth at -26 dB with respect to the reference level.

Resolution Bandwidth : 200 Hz  
 Video Bandwidth : 300 kHz  
 Sweep Time : 2.4 Sec

| Frequency (kHz) | 26 dB Bandwidth (kHz) |
|-----------------|-----------------------|
| 124.5           | 1.712                 |

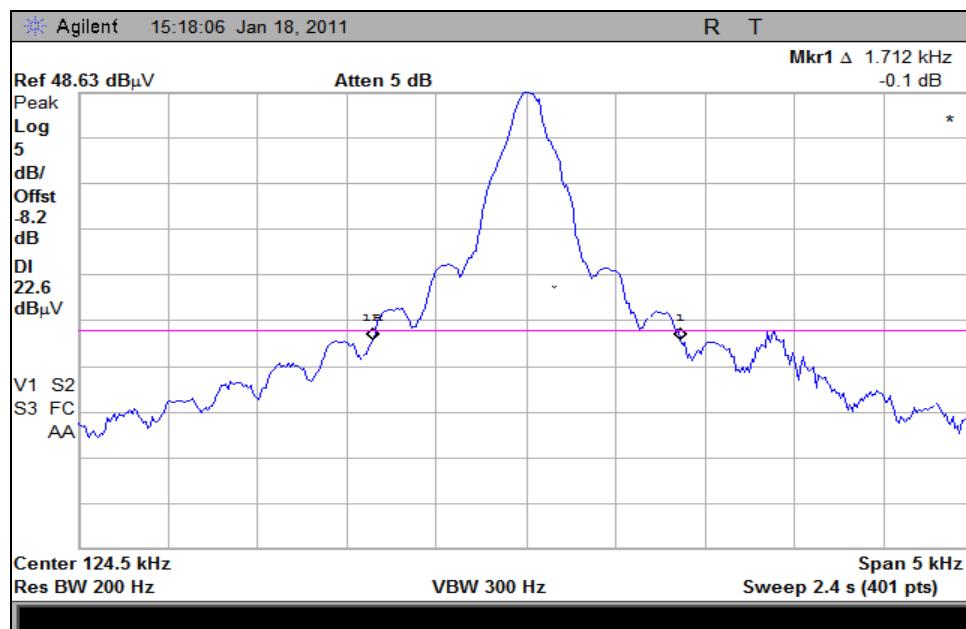

Test Number: 478-10


Issue Date: 1/28/2011

## 7. Measurement Data (continued)

### 7.3. 99% Power Bandwidth (Section 15.203, RSS-GEN 7.1.2)

Requirement: When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

| Frequency (kHz) | 99% Power Bandwidth (kHz) |
|-----------------|---------------------------|
| 124.5           | 1.975                     |

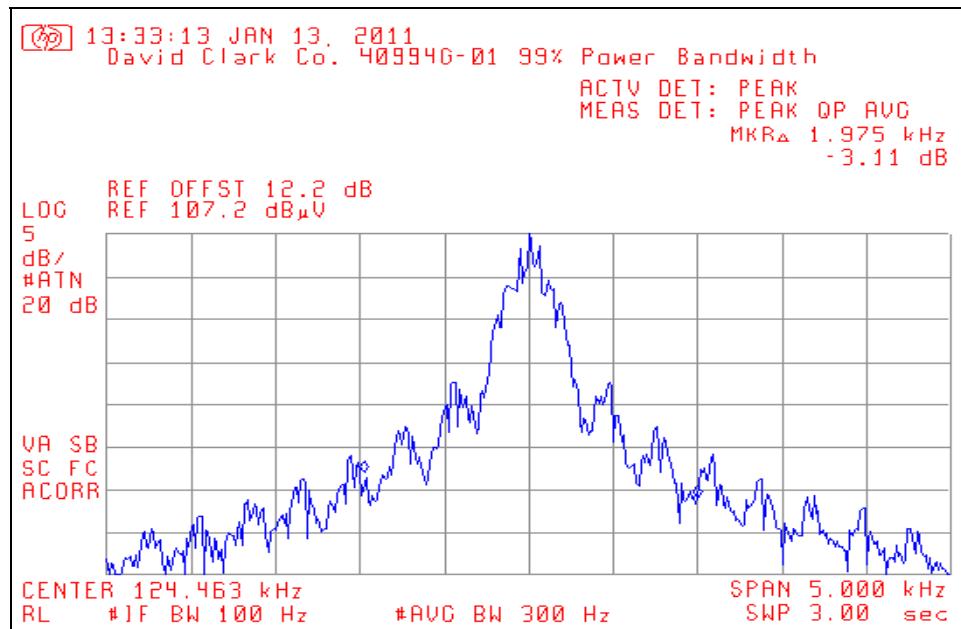

**Test Number: 478-10****Issue Date: 1/28/2011**

## 7. Measurement Data (continued)

### 7.4. Transmitter Frequency Stability (RSS-GEN 4.7)

Requirement: Frequency stability is a measure of frequency drift due to temperature and supply voltage variations with reference to the frequency measured at an appropriate reference temperature and the rated supply voltage.

With the transmitter installed in an environment test chamber, the unmodulated carrier frequency shall be measured under the conditions specified below. A sufficient stabilization period at each temperature shall be used prior to each frequency measurement. The following temperatures and supply voltage ranges apply, unless specified otherwise in the applicable RSS.

- At temperatures of -30°C, +20°C and +50°C, and the manufacturer's rated supply voltage.
- At a temperature of +20°C and at  $\pm 15$  percent of the manufacturer's rated supply voltage.

Test Note: The mode of operation for the device under test requires a modulated transmission.

| Test Condition |          | Measured Frequency (kHz) | Analyzer RBW (Hz) |
|----------------|----------|--------------------------|-------------------|
| Temp           | Voltage  |                          |                   |
| -30 °C         | 12.0 VDC | 124.509                  | 30                |
| +20 °C         |          | 124.509                  | 30                |
| +50 °C         |          | 124.509                  | 30                |
| +20 °C         | 10.2 VDC | 124.509                  | 30                |
|                | 13.8 VDC | 124.509                  | 30                |


Test Number: 478-10

Issue Date: 1/28/2011

## 7. Measurement Data (continued)


### 7.4. Transmitter Frequency Stability (RSS-GEN 4.7) (continued)

#### 7.4.1. Transmitter Frequency Stability – Temperature

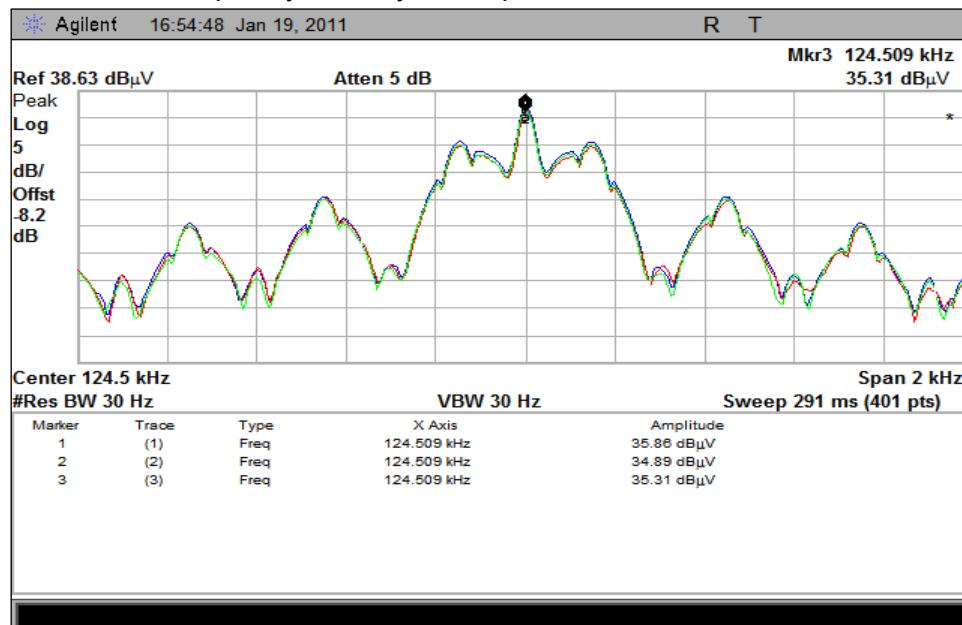

Marker 1 +20°C, Marker 2 -30°C, Marker 3 +50°C Volts DC

#### 7.4.2. Transmitter Frequency Stability – Voltage

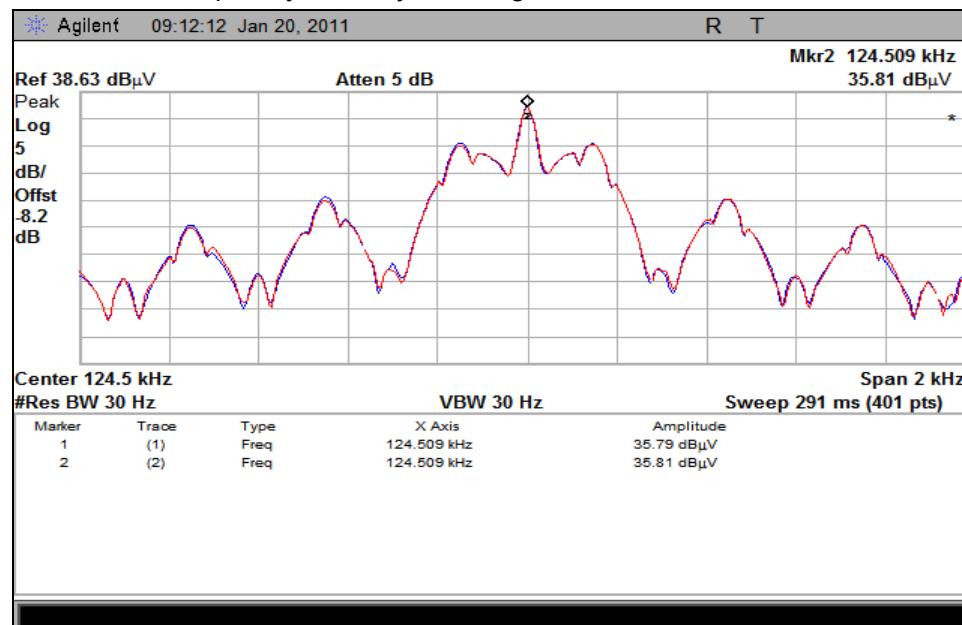

Marker 1 +10.2 VDC, Marker 2 +13.8 VDC

**Test Number: 478-10**
**Issue Date: 1/28/2011**

## 7. Measurement Data (continued)

### 7.5. Transmitter Field Strength / Output Power

Requirement: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the specified field strength level: 84.75 dB $\mu$ V/m at 10 meters.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.


The following formula may be used to convert field strength (FS) in volts/meter to transmitter output power (TP) in watts:

$$TP = (FS \times D)^2 / (30 \times G)$$

TP Transmitter output power (watts)  
 FS Field strength (volts/meter)  
 D Distance (meters)  
 G Antenna numerical gain

| Frequency<br>kHz | Meas.<br>Distance<br>Meters | Peak<br>Field<br>Strength | Average<br>Field<br>Strength | Limit<br>@10M<br>dB $\mu$ V/m | Margin<br>dB | Ant<br>Gain<br>dBi | Transmit Power |        |
|------------------|-----------------------------|---------------------------|------------------------------|-------------------------------|--------------|--------------------|----------------|--------|
|                  |                             | dB $\mu$ V/m              | dB $\mu$ V/m                 |                               |              |                    | mW             | dBm    |
| 125              | 10                          | 78.0                      | 72.5                         | 84.75                         | -12.25       | 1                  | 0.05           | -13.27 |

#### 7.5.1. Transmitter Field Strength (10 Meters)

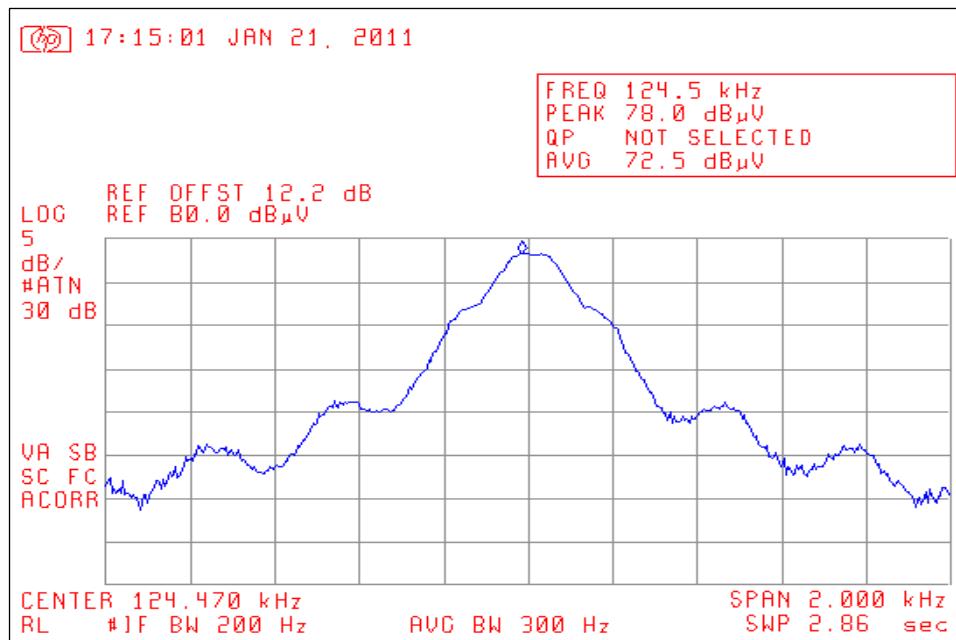

**Test Number: 478-10**
**Issue Date: 1/28/2011**


## 7. Measurement Data (continued)

### 7.6. AC power-line conducted emissions (ANSI C63.4:2009 §13.3)

Requirement: Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprise the EUT over the frequency range specified by the procuring or regulatory agency. See ANSI C63.4:2009, Section 10.2.8.1 for full reporting requirements. Diagram or photograph the test setup that was used (see ANSI C63.4:2009, Section 10.2.12).

Test Note: The AC power line of the power supply used to power the device under test was measured for conducted emissions.

#### 7.6.1. 120 Volts, 60 Hz Phase

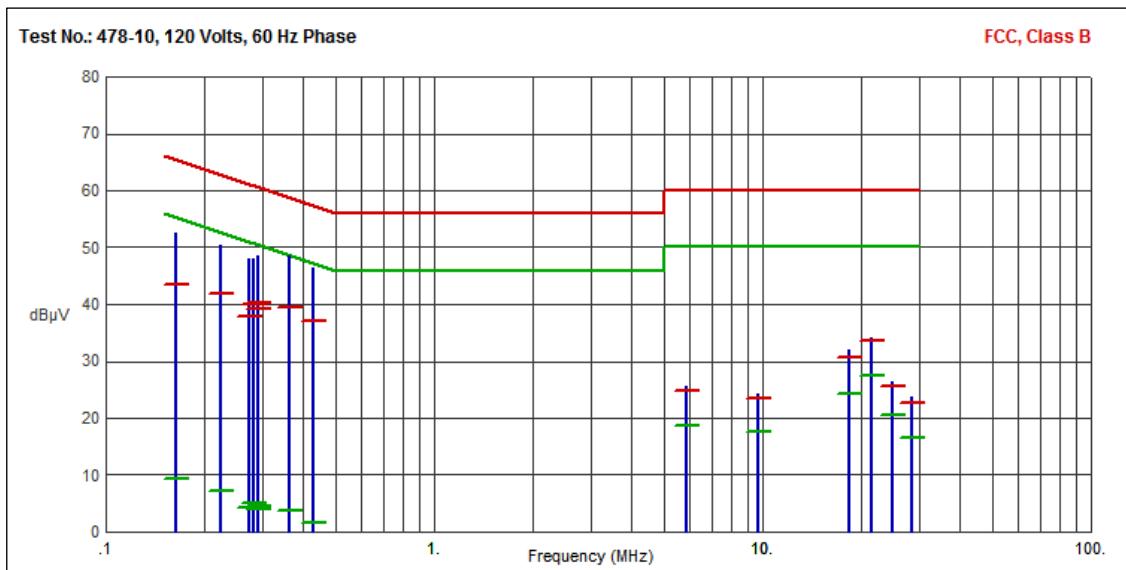


| Frequency (MHz) | Pk Amp (dBµV) | QP Amp (dBµV) | QP Limit (dBµV) | QP Margin (dB) | Avg Amp (dBµV) | Avg Limit (dBµV) | Avg Margin (dB) | Comments |
|-----------------|---------------|---------------|-----------------|----------------|----------------|------------------|-----------------|----------|
| .1634           | 52.53         | 43.40         | 65.29           | -21.89         | 9.32           | 55.29            | -45.97          |          |
| .2248           | 50.36         | 41.81         | 62.64           | -20.83         | 7.19           | 52.64            | -45.45          |          |
| .2729           | 48.02         | 37.76         | 61.03           | -23.27         | 4.17           | 51.03            | -46.86          |          |
| .2814           | 47.91         | 40.06         | 60.77           | -20.71         | 5.17           | 50.77            | -45.60          |          |
| .2900           | 48.52         | 40.17         | 60.52           | -20.35         | 4.58           | 50.52            | -45.94          |          |
| .2916           | 48.28         | 39.09         | 60.48           | -21.39         | 3.87           | 50.48            | -46.61          |          |
| .3627           | 48.44         | 39.39         | 58.67           | -19.28         | 3.85           | 48.67            | -44.82          |          |
| .4273           | 46.51         | 37.03         | 57.31           | -20.28         | 1.51           | 47.31            | -45.80          |          |
| 5.8513          | 25.49         | 24.74         | 60.00           | -35.26         | 18.80          | 50.00            | -31.20          |          |
| 9.7118          | 24.24         | 23.49         | 60.00           | -36.51         | 17.51          | 50.00            | -32.49          |          |
| 18.4270         | 32.05         | 30.76         | 60.00           | -29.24         | 24.21          | 50.00            | -25.79          |          |
| 21.5397         | 34.08         | 33.57         | 60.00           | -26.43         | 27.56          | 50.00            | -22.44          |          |
| 24.9014         | 26.33         | 25.48         | 60.00           | -34.52         | 20.42          | 50.00            | -29.58          |          |
| 28.5124         | 23.72         | 22.54         | 60.00           | -37.46         | 16.59          | 50.00            | -33.41          |          |

**Test Number: 478-10**
**Issue Date: 1/28/2011**

## 7. Measurement Data (continued)

### 7.6. AC power-line conducted emissions (ANSI C63.4:2009 §13.3) (continued)

#### 7.6.2. 120 Volts, 60 Hz Neutral

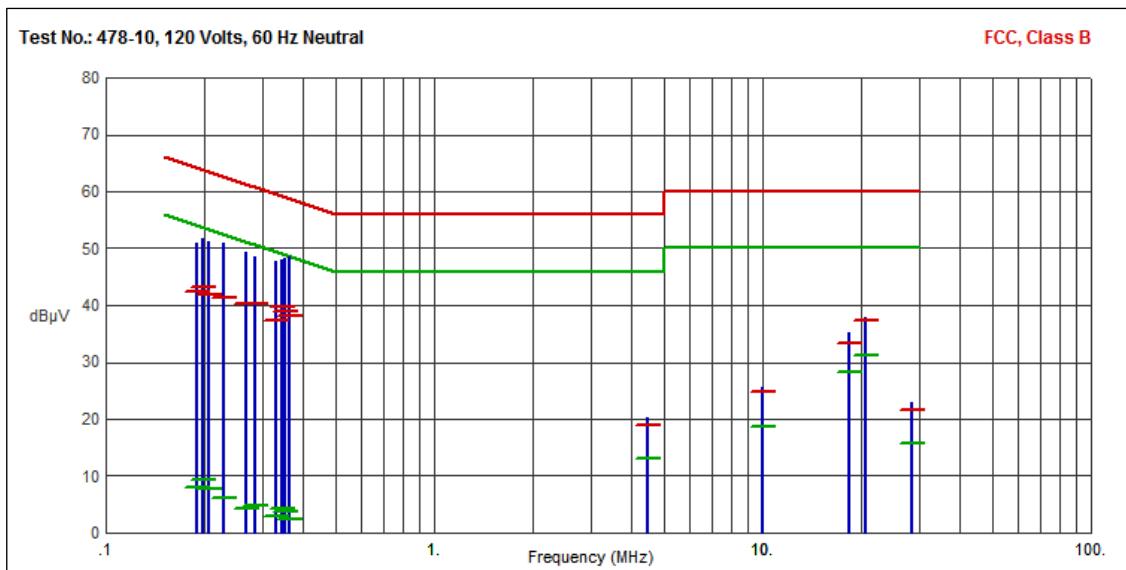

| Frequency (MHz) | Pk Amp (dB $\mu$ V) | QP Amp (dB $\mu$ V) | QP Limit (dB $\mu$ V) | QP Margin (dB) | Avg Amp (dB $\mu$ V) | Avg Limit (dB $\mu$ V) | Avg Margin (dB) | Comments |
|-----------------|---------------------|---------------------|-----------------------|----------------|----------------------|------------------------|-----------------|----------|
| .1887           | 50.85               | 42.43               | 64.09                 | -21.66         | 8.07                 | 54.09                  | -46.02          |          |
| .1977           | 51.70               | 43.13               | 63.71                 | -20.58         | 9.46                 | 53.71                  | -44.25          |          |
| .2064           | 51.17               | 41.86               | 63.35                 | -21.49         | 7.81                 | 53.35                  | -45.54          |          |
| .2283           | 50.86               | 41.40               | 62.51                 | -21.11         | 6.23                 | 52.51                  | -46.28          |          |
| .2664           | 49.41               | 40.25               | 61.23                 | -20.98         | 4.27                 | 51.23                  | -46.96          |          |
| .2852           | 48.43               | 40.17               | 60.66                 | -20.49         | 4.85                 | 50.66                  | -45.81          |          |
| .3311           | 47.69               | 37.40               | 59.42                 | -22.02         | 2.97                 | 49.42                  | -46.45          |          |
| .3428           | 48.00               | 39.63               | 59.14                 | -19.51         | 4.36                 | 49.14                  | -44.78          |          |
| .3521           | 48.20               | 38.92               | 58.91                 | -19.99         | 3.76                 | 48.91                  | -45.15          |          |
| .3639           | 48.64               | 38.07               | 58.64                 | -20.57         | 2.36                 | 48.64                  | -46.28          |          |
| 4.4827          | 20.33               | 19.00               | 56.00                 | -37.00         | 13.04                | 46.00                  | -32.96          |          |
| 9.9604          | 25.68               | 24.77               | 60.00                 | -35.23         | 18.59                | 50.00                  | -31.41          |          |
| 18.4275         | 35.13               | 33.36               | 60.00                 | -26.64         | 28.26                | 50.00                  | -21.74          |          |
| 20.5439         | 37.95               | 37.26               | 60.00                 | -22.74         | 31.27                | 50.00                  | -18.73          |          |
| 28.5127         | 22.91               | 21.58               | 60.00                 | -38.42         | 15.61                | 50.00                  | -34.39          |          |

**Test Number: 478-10**
**Issue Date: 1/28/2011**


## 7. Measurement Data (continued)

### 7.7. Radiated (Spurious) Emissions (ANSI C63.4:2009 §13.4) (continued)

Requirement: On each of the frequencies to which the device is tuned, record the frequency and amplitude of the highest fundamental emission, the frequency and amplitude of the three highest harmonic or spurious emissions relative to the limit, and the frequency and amplitude of the three highest restricted band emissions relative to the limit. See ANSI C63.4:2009, Section 10.2.8.2 for reporting requirements. Diagram or photograph the test setup that was used.

Test Note: Measurements were made with the unit positioned in the Y axis (normal operating position) and Z axis (unit face pointing up) positions. Based on the design of the device, X axis measurements were not performed.

#### 7.7.1. Unit Tested on Y-axis, Antenna is in the Horizontal Polarity

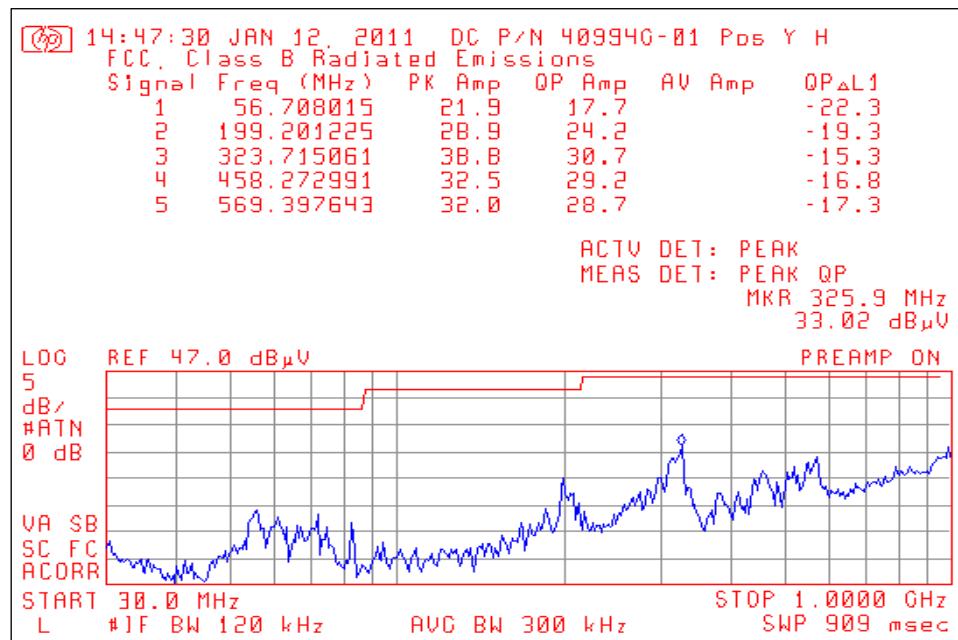


**Test Number: 478-10**
**Issue Date: 1/28/2011**


## 7. Measurement Data (continued)

### 7.7. Radiated (Spurious) Emissions (ANSI C63.4:2009 §13.4) (continued)

#### 7.7.2. Unit Tested on Y-axis, Antenna is in the Vertical Polarity

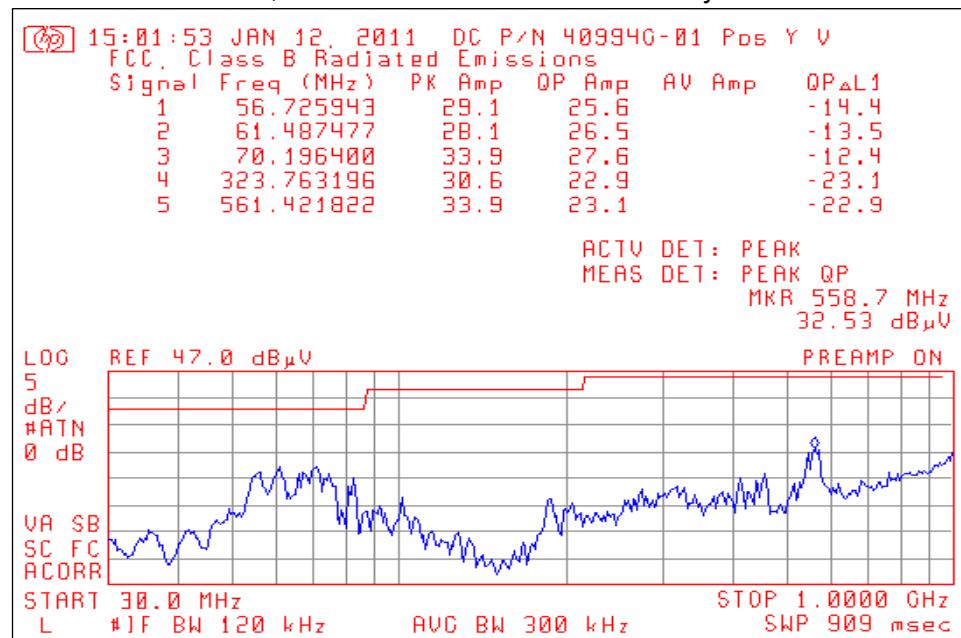

#### 7.7.3. Unit Tested on Z-axis, Antenna is in the Horizontal Polarity

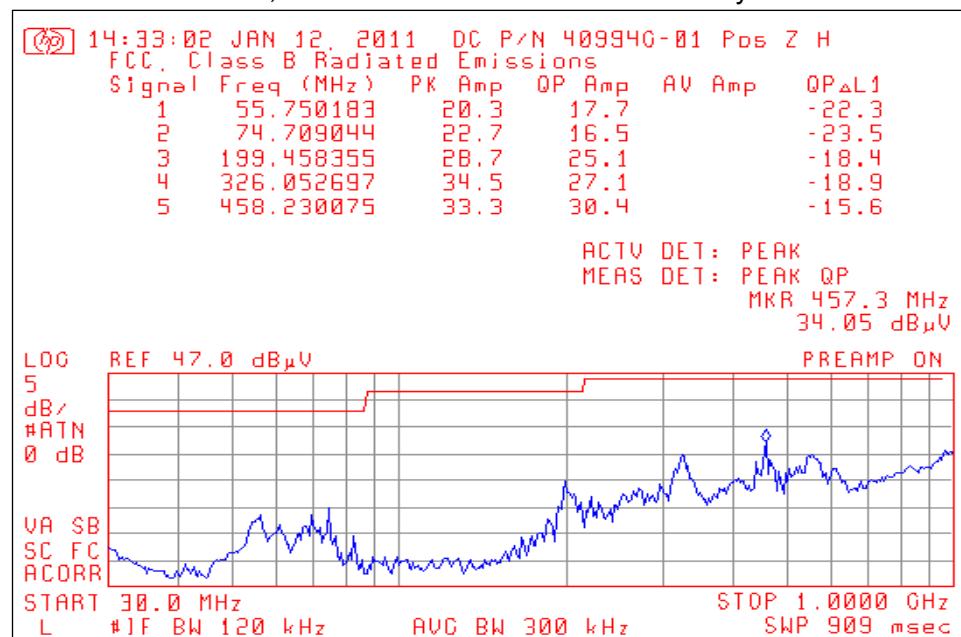


Test Number: 478-10

Issue Date: 1/28/2011

## 7. Measurement Data (continued)

### 7.7. Radiated (Spurious) Emissions (ANSI C63.4:2009 §13.4) (continued)

#### 7.7.4. Unit Tested on Z-axis, Antenna is in the Vertical Polarity

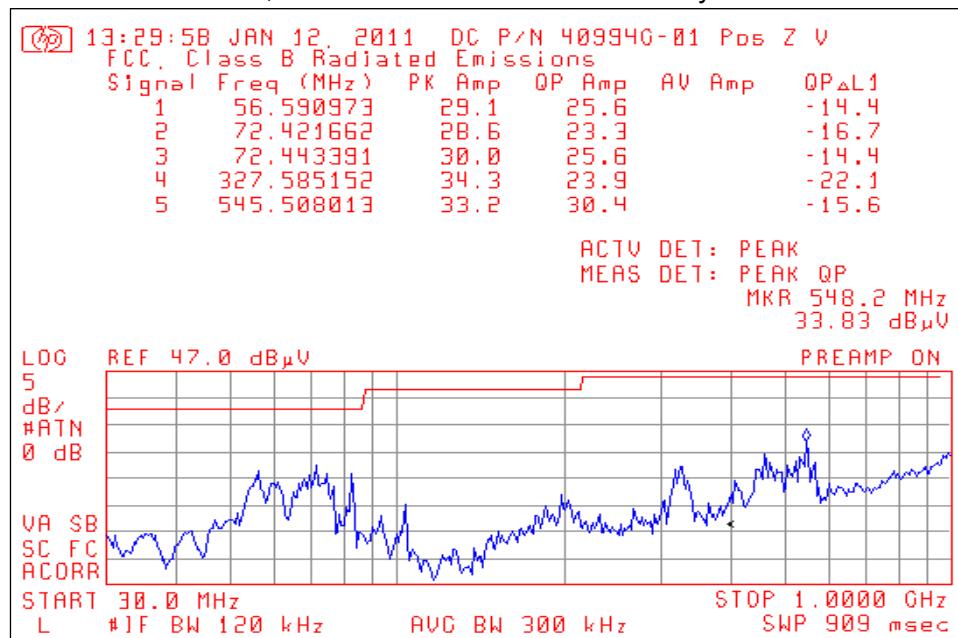

Test Number: 478-10

Issue Date: 1/28/2011

## 7. Measurement Data (continued)

### 7.8. Radiated (Harmonic) Emissions (ANSI C63.4:2009 §13.4)

Test Note: The DUT positions are as follows:

- Y Axis – The device under test is positioned front bezel is facing toward the antenna at 0 degrees. This is the normal operating position.
- Z Axis – The device under test front bezel is facing up. The bottom edge of the unit is facing toward the antenna at 0 degrees.

Note: An X axis position was not investigated because it would not represent a real world condition.

| Frequency (MHz) | DUT Position | Field Strength (dB $\mu$ V/m) |                     | Limit (dB $\mu$ V/m) |                     | Margin (dB $\mu$ V/m) |                     | Turntable Position (deg) |
|-----------------|--------------|-------------------------------|---------------------|----------------------|---------------------|-----------------------|---------------------|--------------------------|
|                 |              | Peak                          | Avg/QP <sup>1</sup> | Peak                 | Avg/QP <sup>1</sup> | Peak                  | Avg/QP <sup>1</sup> |                          |
| 0.250           | Y Axis - 1   | 54.10                         | 42.00               | 125.66               | 105.66              | -71.56                | -63.66              | 0                        |
|                 | Z Axis - 1   | 53.10                         | 41.70               | 125.66               | 105.66              | -72.56                | -63.96              | 0                        |
|                 | Y Axis - 2   | 55.80                         | 45.20               | 125.66               | 105.66              | -69.86                | -60.46              | 0                        |
|                 | Z Axis - 2   | 55.60                         | 44.40               | 125.66               | 105.66              | -70.06                | -61.26              | 0                        |
| 0.375           | Y Axis - 1   | 59.20                         | 49.80               | 125.66               | 105.66              | -66.46                | -55.86              | 274                      |
|                 | Z Axis - 1   | 56.90                         | 48.10               | 125.66               | 105.66              | -68.76                | -57.56              | 278                      |
|                 | Y Axis - 2   | 56.60                         | 46.30               | 125.66               | 105.66              | -69.06                | -59.36              | 0                        |
|                 | Z Axis - 2   | 56.00                         | 45.90               | 125.66               | 105.66              | -69.66                | -59.76              | 184                      |
| 0.500           | Y Axis - 1   | 49.70                         | 44.30               | 125.66               | 105.66              | -75.96                | -61.36              | 0                        |
|                 | Z Axis - 1   | 49.10                         | 43.10               | 125.66               | 105.66              | -76.56                | -62.56              | 0                        |
|                 | Y Axis - 2   | 50.70                         | 45.00               | 125.66               | 105.66              | -74.96                | -60.66              | 0                        |
|                 | Z Axis - 2   | 49.90                         | 44.80               | 125.66               | 105.66              | -75.76                | -60.86              | 0                        |
| 0.625           | Y Axis - 1   | 52.90                         | 47.60               | 125.66               | 105.66              | -72.76                | -58.06              | 0                        |
|                 | Z Axis - 1   | 56.00                         | 52.20               | 125.66               | 105.66              | -69.66                | -53.46              | 0                        |
|                 | Y Axis - 2   | 50.70                         | 44.30               | 125.66               | 105.66              | -74.96                | -61.36              | 0                        |
|                 | Z Axis - 2   | 43.80                         | 34.10               | 125.66               | 105.66              | -81.86                | -71.56              | 0                        |
| 0.750           | Y Axis - 1   | 46.80                         | 41.70               | 125.66               | 105.66              | -78.86                | -63.96              | 0                        |
|                 | Z Axis - 1   | 52.40                         | 45.70               | 125.66               | 105.66              | -73.26                | -59.96              | 0                        |
|                 | Y Axis - 2   | 48.80                         | 41.90               | 125.66               | 105.66              | -76.86                | -63.76              | 0                        |
|                 | Z Axis - 2   | 46.60                         | 40.50               | 125.66               | 105.66              | -79.06                | -65.16              | 0                        |
| 0.875           | Y Axis - 1   | 46.10                         | 41.50               | 125.66               | 105.66              | -79.56                | -64.16              | 0                        |
|                 | Z Axis - 1   | 46.40                         | 41.90               | 125.66               | 105.66              | -79.26                | -63.76              | 0                        |
|                 | Y Axis - 2   | 45.50                         | 40.90               | 125.66               | 105.66              | -80.16                | -64.76              | 0                        |
|                 | Z Axis - 2   | 48.20                         | 43.40               | 125.66               | 105.66              | -77.46                | -62.26              | 0                        |
| 1.000           | Y Axis - 1   | 46.50                         | 41.80               | 125.66               | 105.66              | -79.16                | -63.86              | 0                        |
|                 | Z Axis - 1   | 52.20                         | 41.20               | 125.66               | 105.66              | -73.46                | -64.46              | 0                        |
|                 | Y Axis - 2   | 46.30                         | 42.60               | 125.66               | 105.66              | -79.36                | -63.06              | 0                        |
|                 | Z Axis - 2   | 47.20                         | 37.30               | 125.66               | 105.66              | -78.46                | -68.36              | 0                        |
| 1.125           | Y Axis - 1   | 58.40                         | 55.10               | 125.66               | 105.66              | -67.26                | -50.56              | 0                        |
|                 | Z Axis - 1   | 63.30                         | 55.40               | 125.66               | 105.66              | -62.36                | -50.26              | 0                        |
|                 | Y Axis - 2   | 47.50                         | 41.20               | 125.66               | 105.66              | -78.16                | -64.46              | 0                        |
|                 | Z Axis - 2   | 47.70                         | 37.00               | 125.66               | 105.66              | -77.96                | -68.66              | 0                        |
| 1.250           | Y Axis - 1   | 57.50                         | 44.70               | 125.66               | 105.66              | -68.16                | -60.96              | 0                        |
|                 | Z Axis - 1   | 56.30                         | 48.60               | 125.66               | 105.66              | -69.36                | -57.06              | 0                        |
|                 | Y Axis - 2   | 58.10                         | 52.90               | 125.66               | 105.66              | -67.56                | -52.76              | 0                        |
|                 | Z Axis - 2   | 57.90                         | 53.80               | 125.66               | 105.66              | -67.76                | -51.86              | 0                        |


Test Number: 478-10

Issue Date: 1/28/2011


## 7. Measurement Data (continued)

### 7.9. Receiver Spurious Emissions (RSS-Gen Section 4-10)

#### 7.9.1. Horizontal Polarity

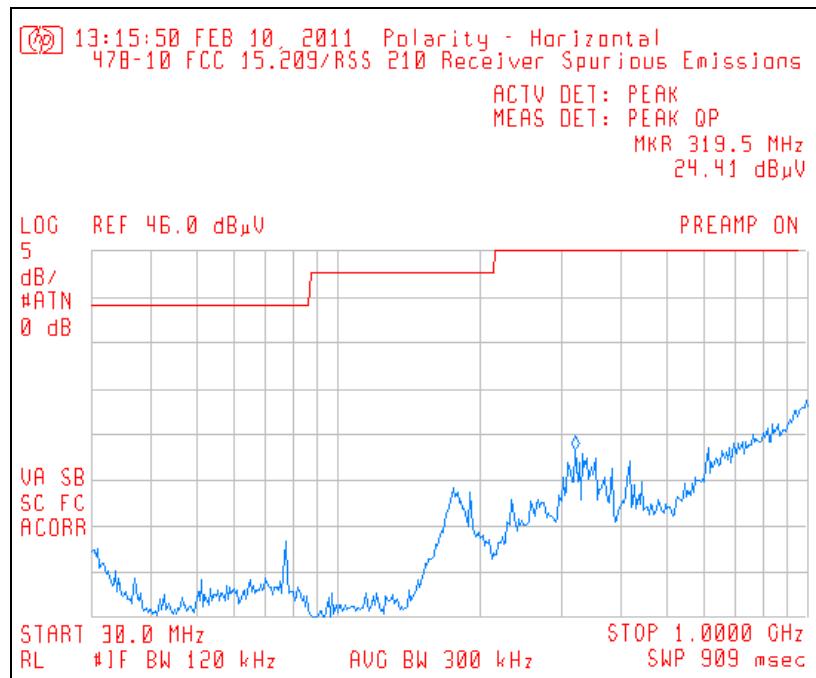

#### 7.9.2. Vertical Polarity

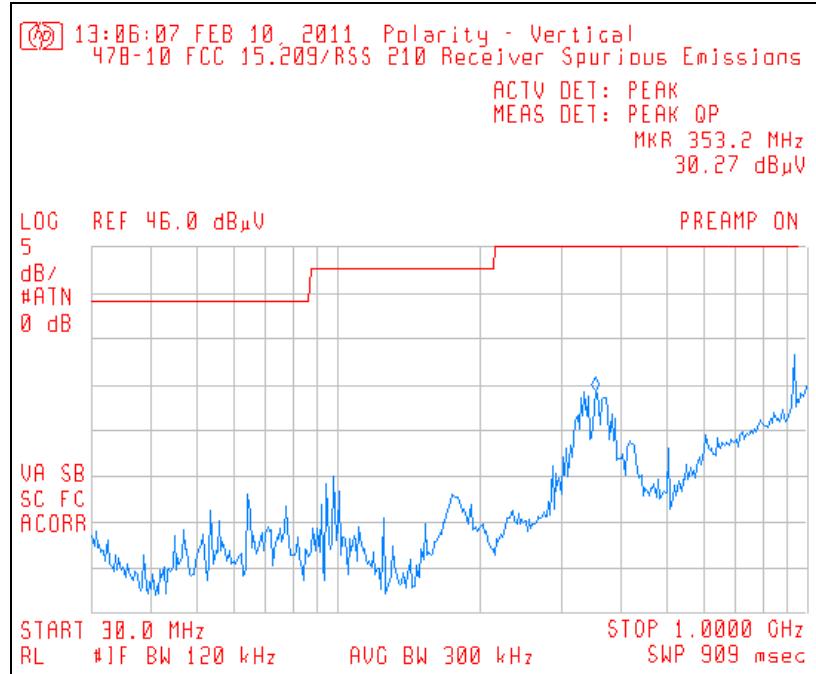

Test Number: 478-10

Issue Date: 1/28/2011

## 7. Measurement Data (continued)

### 7.10. Public Exposure to Radio Frequency Energy Levels ((47 CFR 1.1307(b) RSS-GEN 5.6, RSS 102

| Channel | MPE Distance (cm) | DUT Output Power (dBm) | DUT Antenna Gain (dBi) | Power Density (mW/cm <sup>2</sup> ) | Limit (mW/cm <sup>2</sup> ) | Result |
|---------|-------------------|------------------------|------------------------|-------------------------------------|-----------------------------|--------|
|         | (1)               | (2)                    | (3)                    | (4)                                 | (5)                         |        |
| N/A     | 20.0              | -7.77                  | 1.0                    | 0.0000418                           | 0.0004184                   | 1      |

$$PD = \frac{OP + AG}{(4 \times \pi \times d^2)}$$

- PD = Power Density (mW/cm<sup>2</sup>)
- OP = DUT Output Power (dBm)
- AG = DUT Antenna Gain (dBi)
- d = MPE Distance (cm)

Reference CFR 2.1093(b): For purposes of this section, a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user.

1. Section 7.4 of this test report.
2. Data supplied by the client. Antenna specification data of worst case antenna used by the DUT.
3. Power density is calculated from field strength measurement and antenna gain.
4. Reference CFR 1.1310, Table 1: Limits for Maximum Permissible Exposure (MPE), Section (B): Limits for General Population/Uncontrolled Exposure.

Test Number: 478-10

Issue Date: 1/28/2011

## 8. Test Site Description

Compliance Worldwide is located at 357 Main Street in Sandown, New Hampshire. The test sites at Compliance Worldwide are used for conducted and radiated emissions testing in accordance with Federal Communications Commission (FCC) and Industry Canada standards. A description of the test sites is on file with the FCC (registration number **96392**) and Industry Canada (file number **IC 3023A-1**).

The radiated emissions test site is a 3 and 10 meter enclosed open area test site (OATS). Personnel, support equipment and test equipment are located in the basement beneath the OATS ground plane.

The conducted emissions site is part of a 16' x 20' x 12' ferrite tile chamber and uses one of the walls for the vertical ground plane required by EN 55022.

Both sites are designed to test products or systems 1.5 meter W x 1.5 meter L x 2.0 meter H, floor standing or table top.