



Engineering and Testing for EMC and Safety Compliance

**Certification Application Report for Full Modular Approval
FCC Part 15.249 & Industry Canada RSS-210**

Test Lab: Rhein Tech Laboratories, Inc. Tel: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 www.rheintech.com Herndon, VA 20170 E-Mail: atcbinfo@rheintech.com		Applicant: Evolve Guest Controls Inc. Tel: 516-328-6900 85 Denton Avenue Fax: 516-238-6622 New Hyde Park, NY 11040 www.eguestcontrols.com	
FCC ID/IC:	Y3K-PORT/ TBD	Test Report Date:	November 18, 2010
Platform:	N/A	RTL Work Order #:	2010226
Model:	EvolveNet Portal	RTL Quote #:	QRTL10-459
American National Standard Institute:	ANSI C63.4-2003: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz		
FCC Classification:	DXX – Part 15 Low Power Communication Device Transmitter		
FCC Rule Part(s)/Guidance:	Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz, and 24.0-24.25 GHz (10-01-09)		
Industry Canada:	RSS-210 Issue 7: Low Power License-Exempt Communications Devices		
Digital Interface Information:	Digital Interface was found to be compliant		
Frequency Range (MHz)	Output Power (W)*	Frequency Tolerance	Emission Designator
908.4	0.0005	N/A	392KFXD

** power is converted from radiated measurement*

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, Industry Canada RSS-210 and ANSI C63.4.

Signature: 

Date: November 18, 2010

Typed/Printed Name: Desmond A. Fraser

Position: President

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and Evolve Guest Controls Inc. The test results relate only to the item(s) tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACLASS. Refer to certificate and scope of accreditation AT-1445.

Table of Contents

1	General Information	5
1.1	Scope	5
1.2	Description of EUT	5
1.3	Test Facility	5
1.4	Related Submittal(s)/Grant(s)	5
1.5	Required Grant Notes	5
1.6	Modifications	5
2	Test Information	6
2.1	Test Justification	6
2.2	Exercising the EUT	6
2.3	Test Result Summary.....	6
2.4	Test System Details	6
2.5	Configuration of Tested System.....	7
3	Conducted AC Emissions – FCC §15.207	8
3.1	Site and Test Description	8
3.2	Test Limits	8
3.3	Conducted AC Emissions Test Data.....	9
4	Radiated Emission Limits Fundamental Emissions – FCC §15.249	10
4.1	Radiated Emission Limits Test Procedure	10
4.2	Radiated Emission Limits Test Data	10
5	Radiated Emission Limits Radiated Harmonics – FCC §15.249	11
5.1	Radiated Emission Limits Test Procedure	11
6	In-Band Emissions Requirement – FCC 15.215(c)	13
6.1	Test Procedure.....	13
6.2	FCC 15.215(c) Requirement	13
6.3	Test Data.....	13
7	Conclusion	14

Figure Index

Figure 2-1:	Worst Case Configuration of System under Test.....	7
Figure 3-1:	Conducted AC Emissions; Neutral (Line 1); Transmit Mode	9
Figure 3-2:	Conducted AC Emissions; Hot (Line 2); Transmit Mode	9

Table Index

Table 2-1:	Test Result Summary with FCC Rules and Regulations	6
Table 2-2:	Equipment under Test (EUT)	6
Table 2-3:	Support Equipment.....	6
Table 3-1:	Conducted Emissions Test Equipment	8
Table 4-1:	Radiated Fundamental Emissions Test Equipment	10
Table 4-2:	Radiated Emissions Fundamental Emissions – External Antenna	10
Table 5-1:	Radiated Spurious Emissions	11
Table 5-2:	Radiated Spurious Emissions Test Equipment.....	12
Table 6-1:	In-band Test Equipment.....	14

Plot Index

Plot 6-1:	20 dB Bandwidth	13
-----------	-----------------------	----

Appendix Index

Appendix A:	ATCB Agency Authorization Letter	15
Appendix B:	FCC Confidentiality Request Letter.....	16
Appendix C:	FCC Modular Approval – DA 00-1407	17
Appendix D:	IC Letters	18
Appendix E:	IC Confidentiality Request.....	19
Appendix F:	IC Modular Construction – RSS-Gen 7.1.1	20
Appendix G:	Label and Label Location	21
Appendix H:	Technical Operational Description	23
Appendix I:	Schematics.....	24
Appendix J:	Block Diagram	25
Appendix K:	Manual.....	26
Appendix L:	Test Photographs	27
Appendix M:	External Photographs.....	31
Appendix N:	Internal Photographs	34

Photograph Index

Photograph 1:	ID Label Sample for Module.....	21
Photograph 2:	ID Label Location on PCB Bottom	21
Photograph 3:	Sample “Contains FCC ID.....” Label Sample for Host	22
Photograph 4:	Radiated Emissions Testing – Front View	27
Photograph 5:	Radiated Emissions Testing – Back View.....	28
Photograph 6:	Conducted Emissions Testing – Front View	29
Photograph 7:	Conducted Emissions Testing – Back View.....	30
Photograph 8:	Top of PCB.....	31
Photograph 9:	Bottom of PCB.....	32
Photograph 10:	Sample Enclosure	33
Photograph 11:	Top of PCB.....	34
Photograph 12:	Bottom of PCB.....	35

1 General Information

1.1 Scope

This is an original certification application request for full modular approval.

Applicable Standards:

- FCC Rules Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz, and 24.0-24.25
- Industry Canada RSS-210: Low Power License-Exempt Communications Devices

1.2 Description of EUT

Equipment Under Test	Transceiver
Model	EvolveNet Portal
Power Supply	+3.3V DC
Modulation Type	DSSS
Frequency Range	908.4 MHz
Antenna Type	Permanent PCB trace antenna

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4-2003).

1.4 Related Submittal(s)/Grant(s)

This is an original application for **full modular approval** for Evolve Guest Controls Inc. Model EvolveNet Portal, FCC ID: Y3K-PORT, IC: TBD.

1.5 Required Grant Notes

This application should include the following FCC Grant Notes:

This transmitter may be co-located with up to two other instances of itself and the transmitter covered under FCC ID: Y3K-ENR.

1.6 Modifications

No modifications were made to the equipment during testing in order to achieve compliance with these standards.

2 Test Information

2.1 Test Justification

The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. 908.4 MHz was tested and investigated from 9 kHz to 9 GHz. The test results relate only to the item that was tested.

2.2 Exercising the EUT

The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that the information was being transmitted. There were no deviations from the test standard(s) and/or methods. The IF, LO, and up to the 2nd LO, were investigated and tested, and found to be compliant.

2.3 Test Result Summary

Table 2-1: Test Result Summary with FCC Rules and Regulations

Standard	Test	Pass/Fail or N/A
FCC 15.249(a)	Radiated Emissions	Pass
FCC 15.207	AC Line Conducted Emissions	Pass

2.4 Test System Details

The test samples were received on November 12, 2010. The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system, are in the table below.

Table 2-2: Equipment under Test (EUT)

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
Transceiver Module	Evolve Guest Controls Inc.	EvolveNet Portal	N/A	Y3K-PORT	19953

Table 2-3: Support Equipment

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
DC Power Supply	Instek	PSS-3203	Power Supply	N/A	Not required

2.5 Configuration of Tested System

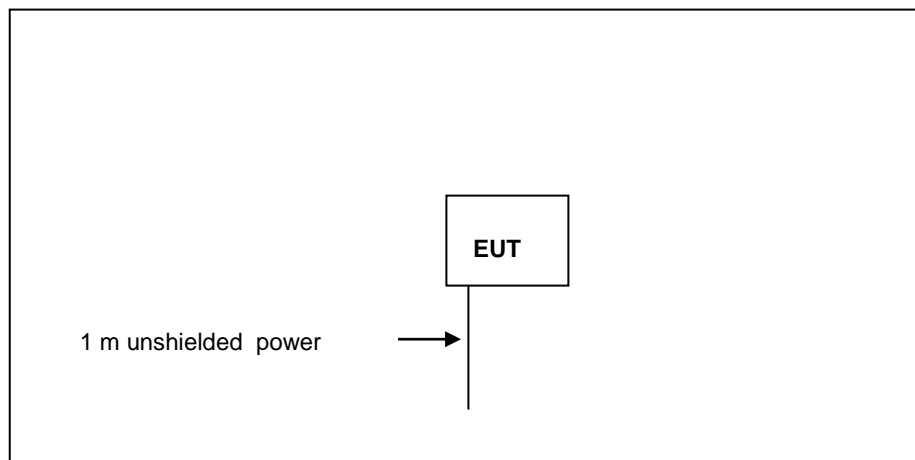


Figure 2-1: Worst Case Configuration of System under Test

3 Conducted AC Emissions – FCC §15.207

3.1 Site and Test Description

The power line conducted emissions measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50-ohm/50 microhenry Line Impedance Stabilization Network (LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 100 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 100 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode, if applicable).

The analyzer's 6 dB bandwidth was set to 9 kHz. Video filter less than 10 times the resolution bandwidth is not used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded.

3.2 Test Limits


Line-Conducted Emissions		
Limit (dBµV)		
Frequency (MHz)	Quasi-Peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.00	56	46
5.00 to 30.00	60	50

Table 3-1: Conducted Emissions Test Equipment


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159	8/2/11
901082	AFJ International	LS16	16A LISN	16010020081	4/13/11

3.3 Conducted AC Emissions Test Data

Plot 3-1: Conducted AC Emissions; Neutral (Line 1); Transmit Mode

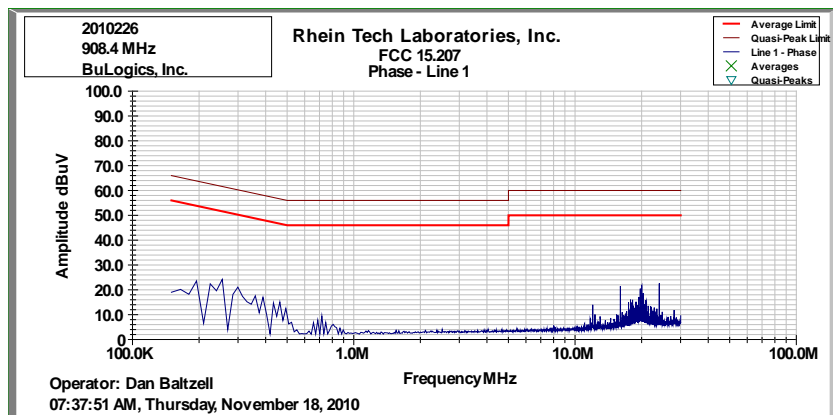

Plot 3-2: Conducted AC Emissions; Hot (Line 2); Transmit Mode

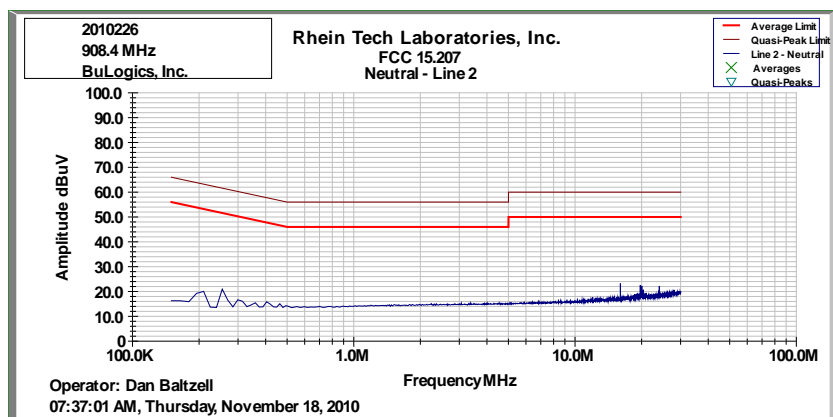

Test Personnel:

Daniel W. Baltzell
Test Engineer

Signature

November 18, 2010
Date of Tests

4 Radiated Emission Limits Fundamental Emissions – FCC §15.249

4.1 Radiated Emission Limits Test Procedure

Radiated Emissions of the Fundamentals were tested at three meters, and meet the quasi-peak limit of 50 mV/m. The EUT was tested in all three orthogonal planes for the channel; the worst case emissions are shown. Peak measurements were taken and are compared to the quasi-peak limit.

Table 4-1: Radiated Fundamental Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900791	Chase	CBL6111B	Bilog antenna (30 MHz – 2000 MHz)	N/A	12/12/10
901413	Agilent Technologies	E4448A	Spectrum Analyzer	US44020346	11/11/11
901516	Insulated Wire, Inc.	KPS-1503-2400-KPS-09302008	RF cable, 20'	NA	10/17/11
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required

4.2 Radiated Emission Limits Test Data

Table 4-2: Radiated Emissions Fundamental Emissions – External Antenna

Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
908.4	Pk	67.3	24.9	92.2	94.0	-1.8


Conversion to W:

$$92.2 \text{ dBuV/m} = 40738 \text{ uV/m}$$

$$0.0005 \text{ W} = (0.040738 \text{ V/m} \times 3\text{m})^2 / 30$$

Test Personnel:

Daniel Baltzell
Test Engineer



Signature

November 18, 2010
Date of Test

5 Radiated Emission Limits Radiated Harmonics – FCC §15.249

5.1 Radiated Emission Limits Test Procedure

Radiated emissions of the harmonics were tested at three meters, and meet the requirements of 500 microvolts/meter in average mode, and 20 dB higher in peak mode, per 15.249(e). The EUT was tested by rotating through three orthogonal planes, each at 360° rotation with the receive antenna in both vertical and horizontal polarity.


Table 5-1: Radiated Spurious Emissions

Emission Frequency (MHz)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1816.8	43.8	8.8	52.6	54.0	-1.4
2725.2	54.0	-5.1	48.9	54.0	-5.1
3633.6	45.0	-3.7	41.3	54.0	-12.7
4542.0	29.6	2.0	31.6	54.0	-22.4
5450.4	27.3	3.0	30.3	54.0	-23.7
6358.8	27.6	4.5	32.1	54.0	-21.9
7267.2	27.4	5.5	32.9	54.0	-21.1
8175.6	26.6	11.7	38.3	54.0	-15.7
9084.0	25.0	12.5	37.5	54.0	-16.5

Table 5-2: Radiated Spurious Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900791	Chase	CBL6111B	Bilog Antenna (30 MHz – 2000 MHz)	N/A	12/12/10
901365	MITEQ	JS4-00102600-41-5P	30dB Amplifier, 0.1-26 GHz	N/A	11/16/11
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	6/14/11
900323	EMCO	3160-07	Horn Antenna (8.2 - 12.4 GHz)	9605-1054	6/14/11
900321	EMCO	3161-03	Horn Antenna (4.0 - 8.2 GHz)	9508-1020	6/14/11
901413	Agilent Technologies	E4448A	Spectrum Analyzer	US44020346	11/11/11
901516	Insulated Wire	KPS-1503-2400-KPS-09302008	RF cable, 20'	NA	10/17/11
901517	Insulated Wire	KPS-1503-360-KPS-09302008	RF cable 36"	NA	10/17/11
900913	Hewlett Packard	85462A	EMI Receiver (9 KHz – 6.5 GHz)	3325A00159	8/2/11
900905	Rhein Tech Laboratories, Inc.	PR-1040	Preamplifier 40dB	1006	4/10/11

Test Personnel:

Daniel Baltzell		November 18, 2010
Test Engineer	Signature	Date of Tests

6 In-Band Emissions Requirement – FCC 15.215(c)

6.1 Test Procedure


The 20 dB bandwidth was measured using a 50-ohm spectrum analyzer with the resolution bandwidth set at 100 kHz (1% of span), and the video bandwidth set at 1 MHz. The spectrum analyzer's automated display markers adjusted to -20 dBc using max hold until the spectrum was filled and a plot taken.

6.2 FCC 15.215(c) Requirement

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

6.3 Test Data

Plot 6-1: 20 dB Bandwidth

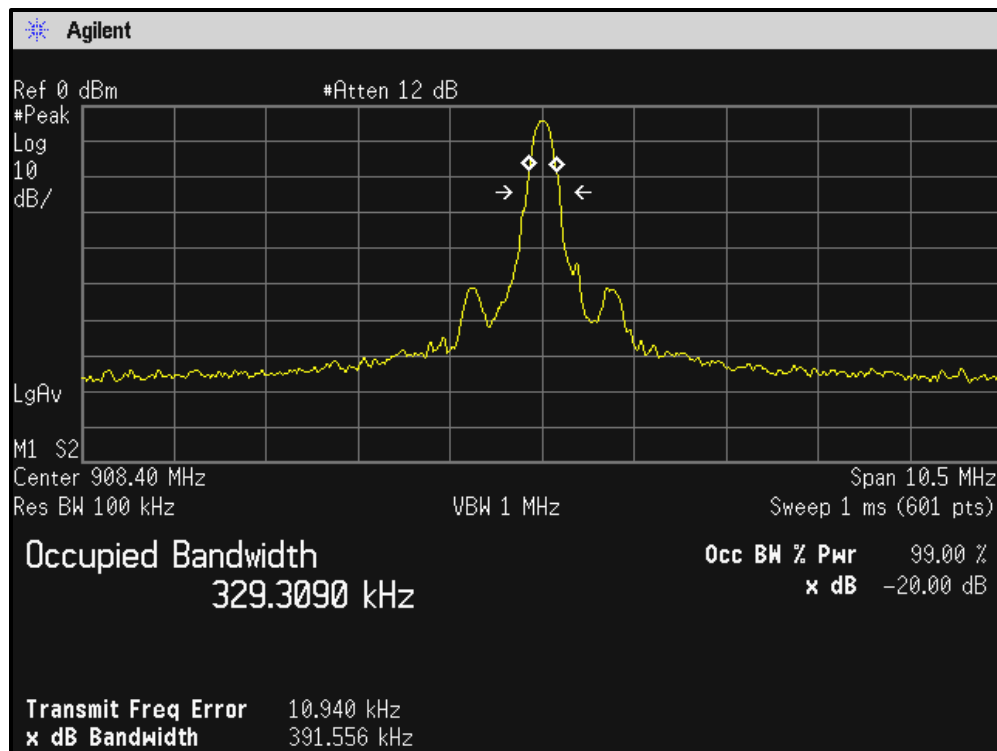


Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Evolve Guest Controls Inc.
Model: EvolveNet Portal
Standards: FCC 15.249 / IC RSS-210
ID's: Y3K/PORT / TBD
Report #: 2010226

Table 6-1: In-band Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901413	Agilent Technologies	E4448A	Spectrum Analyzer	US44020346	11/11/11

Test Personnel:

Daniel Baltzell		November 17, 2010
Test Engineer	Signature	Date of Tests

7 Conclusion

The data in this measurement report shows that the EUT as tested, Evolve Guest Controls Inc. Model EvolveNet Port , FCC ID: Y3K-PORT, IC: TBD, complies with all the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations and Industry Canada RSS-210 for limited modular approval.