

EMC TEST REPORT
No. SH10100992-001

Applicant : Interpet Limited
Hamwood, Bishops Hull Hill, Bishops Hull, Taunton,
Somerset, England. TA1 5EA.

Manufacturer : Hangzhou Cheerland Household Articles Co.,Ltd
No.69 TongYun Road, GouZhuang, Yu Hang
District, Hangzhou, China

Equipment : Wireless Hand Held Transmitter

Product number : 1050203

SUMMARY


The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2009): Radio Frequency Devices

ANSI C63.4 (2003): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Date of issue: Dec 22, 2010

Prepared by:

Johnson Chen

Johnson Chen (Project Engineer)

Reviewed by:

Daniel Zhao

Daniel Zhao (Reviewer)

Description of Test Facility

Name: Intertek Testing Services Shanghai
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

FCC Registration Number: 236597

Name of contact: Steve Li
Tel: +86 21 64956565 ext. 214
Fax: +86 21 54262335 ext. 214

Content

DESCRIPTION OF TEST FACILITY	2
1. GENERAL INFORMATION	4
1.1 Applicant Information	4
1.2 Identification of the EUT	4
1.3 Technical specification.....	5
1.4 Mode of operation during the test / Test peripherals used	5
2. TEST SPECIFICATION	6
2.1 Instrument list.....	6
2.2 Test Standard.....	6
3. FUNDAMENTAL & SPURIOUS EMISSION & RESTRICT BAND RADIATED EMISSION	8
3.1 Test limit.....	8
3.2 Test Configuration	9
3.3 Test procedure and test setup.....	9
3.4 Test protocol.....	10
4. DEACTIVATING TIME	11
4.1 Test limit.....	11
4.2 Test Configuration	12
4.3 Test procedure and test setup.....	12
4.4 Test protocol	12
5. EMISSION BANDWIDTH	13
5.1 Test limit	13
5.2 Test Configuration	13
5.3 Test procedure and test setup	13
5.4 Test protocol	14
ANNEX I. PHOTO OF TEST SETUP.....	15
APPENDIX II: PHOTOGRAPH OF EUT	18

1. General Information

1.1 Applicant Information

Application : Interpet Limited
Hamwood, Bishops Hull Hill, Bishops Hull, Taunton,
Somerset, England. TA1 5EA.

Name of contact : Adam J Newick

Tel : 44(0)1823 250134

Manufacturer : Hangzhou Cheerland Household Articles Co.,Ltd
No.69 TongYun Road, GouZhuang, Yu Hang
District, Hangzhou, China

Sample received date : 2010-11-17

Date of test : 2010-11-26

1.2 Identification of the EUT

Equipment : Wireless Hand Held Transmitter

Type/model : 1050203

FCC ID : Y3M1050203

1.3 Technical specification

Operation Frequency Band	:	434.00MHz
Modulation	:	ASK
Antenna Designation	:	Internal antenna, non-user removable.
Rating	:	Built-in Battery: DC 12V Working frequency: 434.00MHz
Description of EUT	:	There is one model only. The EUT is a transmitter to transmit wireless signal so as to control the on/off condition of receiver.
Channel Description	:	There is one channel only and working at the central frequency of 434.00MHz.

1.4 Mode of operation during the test / Test peripherals used

Within this test report, EUT was tested with modulation and tested under its rating voltage and frequency.

The EUT is a portable device, so three axes were observed while the test receiver worked as "max hold" continuously and the highest reading among the whole test procedure was recorded.

2. Test Specification

2.1 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESIB 26	R&S	EC 3045	2010-4-10	2011-4-9
Semi-anechoic chamber	-	Albatross project	EC 3048	2010-10—30	2011-10-31
A.M.N.	ESH2-Z5	R&S	EC 3119	2010-1-11	2011-1-10
Test Receiver	ESCS 30	R&S	EC 2107	2010-4-10	2011-4-9
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2010-6-2	2011-6-1
Horn antenna	HF 906	R&S	EC 3049	2010-4-10	2011-4-9
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2010-9-18	2011-9-17
High Pass Filter	WHKX 1.0/15G-10SS	Wainwright	EC4297-1	2010-2-8	2011-2-7
High Pass Filter	WHKX 2.8/18G-12SS	Wainwright	EC4297-2	2010-2-8	2011-2-7
High Pass Filter	WHKX 7.0/1.8G-8SS	Wainwright	EC4297-3	2010-2-8	2011-2-7
Band Reject Filter	WRCGV 2400/2483-2390/2493-35/10SS	Wainwright	EC4297-4	2010-2-8	2011-2-7

2.2 Test Standard

47CFR Part 15 (2009)
ANSI C63.4: 2003

2.3 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai

TEST ITEM	FCC REFERANCE	RESULT
Fundamental & spurious emission	15.231(b)	Pass
Restrict band radiated emission	15.205	Pass
Power line conducted emission	15.207	NA
Emission bandwidth	15.231(c)	Pass
Deactivating time	15.231(a)(1)	Pass

3. Fundamental & Spurious Emission & Restrict band radiated emission

Test result: **PASS**

3.1 Test limit

3.1.1 The emission shall test through the 10th harmonic or to 40GHz, whichever is lower. It must comply with the limits below:

Fundamental Frequency (MHz)	Fundamental limit (uV/m)	Spurious limit (uV/m)
<input type="checkbox"/> 40.66 – 40.70	2250	225
<input type="checkbox"/> 70 – 130	1250	125
<input type="checkbox"/> 130 - 174	1250 to 3750	125 to 375
<input type="checkbox"/> 174 - 260	3750	375
<input checked="" type="checkbox"/> 260 – 470	3750 to 12500	375 to 1250
<input type="checkbox"/> Above 470	12500	1250

The formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = $56.81818(\text{Frequency}) - 6136.3636$; for the band 260-470 MHz, uV/m at 3 meters = $41.6667(\text{Frequency}) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

|||||
|||

For that the EUT use fundamental frequency of 434MHz, after calculation, the limit is:


Fundamental limit = $41.6667 * 434 - 7083.3333 = 11000.0145\text{uV/m} = 80.83\text{dBuV/m}$
Spurious limit = $80.83 - 20 = 60.83\text{dBuV/m}$

|||||
|||

3.1.2 The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

3.2 Test Configuration

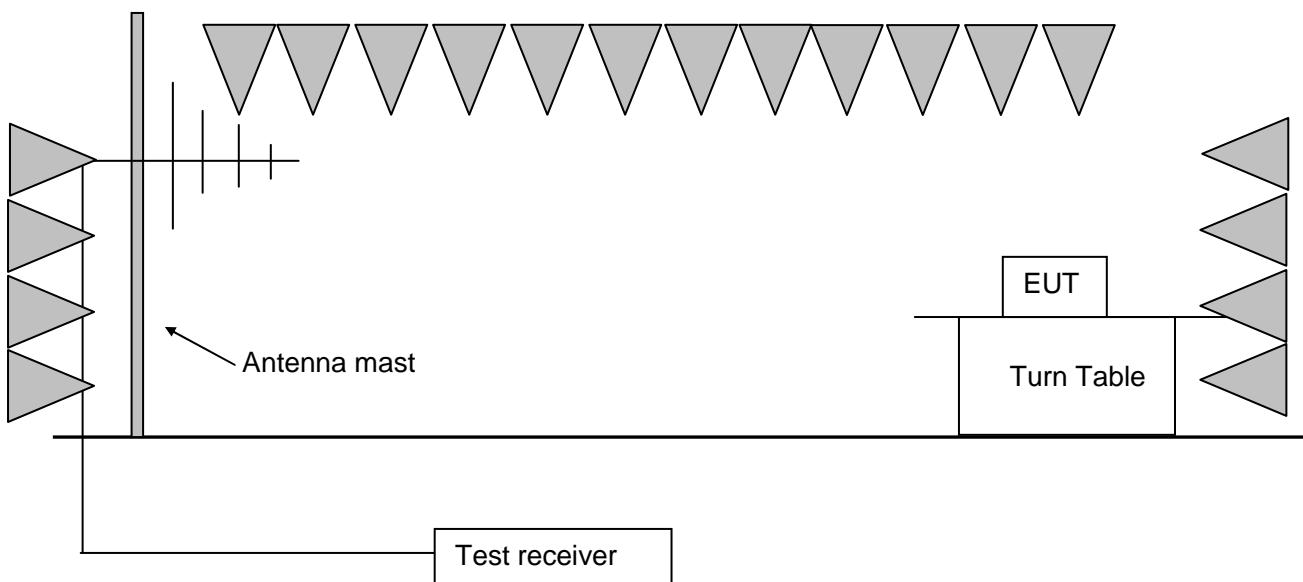

3.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, the pre-amplifier and high pass filter is equipped just at the output terminal of the antenna.

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the test receiver with the resolutions bandwidth set as:

RBW = 100kHz, VBW = 300kHz (30MHz~1GHz)

RBW = 1MHz, VBW = 3MHz (>1GHz for PK)

3.4 Test protocol

Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Emission Type	Limit (dBuV/m)	Margin	Detector
H	434.0	18.4	67.22	Fundamental	100.83	33.61	PK
H	868.0	23.8	45.71	Harmonics	80.83	35.12	PK
H	1736.0	-4.81	54.15	Harmonics	80.83	26.68	PK
H	*1302.0	-7.78	48.23	Harmonics	74.00	25.77	PK
H	2170.0	-2.83	56.21	Harmonics	80.83	24.64	PK
V	434.0	18.4	68.97	Fundamental	100.83	31.86	PK
V	868.0	23.8	45.53	Harmonics	80.83	35.30	PK
V	*1302.0	-7.78	45.31	Harmonics	74.00	28.69	PK
V	1736.0	-4.81	51.00	Harmonics	80.83	29.43	PK
V	2170.0	-2.83	56.40	Harmonics	80.83	24.43	PK

Note : '*' means the frequency is located in restricted band definded in section 15.205

Remark:

1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz)
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = limit - Corrected Reading
4. If PK reading is less than QP limit, the QP test can be elided.

Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, limit = 40.00dBuV/m.

Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20$ dB/m; Corrected Reading = $10.00 + 0.20 = 10.20$ dBuV/m; Margin = $40.00 - 10.20 = 29.80$ dB.

Calculating the AV value according to the duty cycle

Antenna	Frequency (MHz)	Corrected PK Reading (dBuV/m)	Duty Cycle Factor (dB)	Corrected AV Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
H	434.0	67.22	-5.35	61.87	80.83	18.96
H	*1302.0	48.23	-5.35	42.88	54.00	11.12
H	2170.0	56.21	-5.35	50.86	60.83	9.97
V	434.0	68.97	-5.35	63.62	80.83	17.21
V	*1302.0	45.31	-5.35	39.96	54.00	14.04
V	2170.0	56.40	-5.35	51.05	60.83	9.78

Note : '*' means the frequency is located in restricted band definded in section 15.205

Remark: 1.Duty Cycle Factor = $20\lg(\text{duty cycle}) = 20\lg(0.54) = -5.35$ dB

2. Corrected AV Reading = Corrected PK Reading + Duty Cycle Factor

3. Margin = limit – Corrected AV Reading


4. Deactivating time

Test result: PASS

4.1 Test limit

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.
- (5) Transmission of set-up information for security systems may exceed the transmission duration limits in (1) and (2) above, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

4.2 Test Configuration

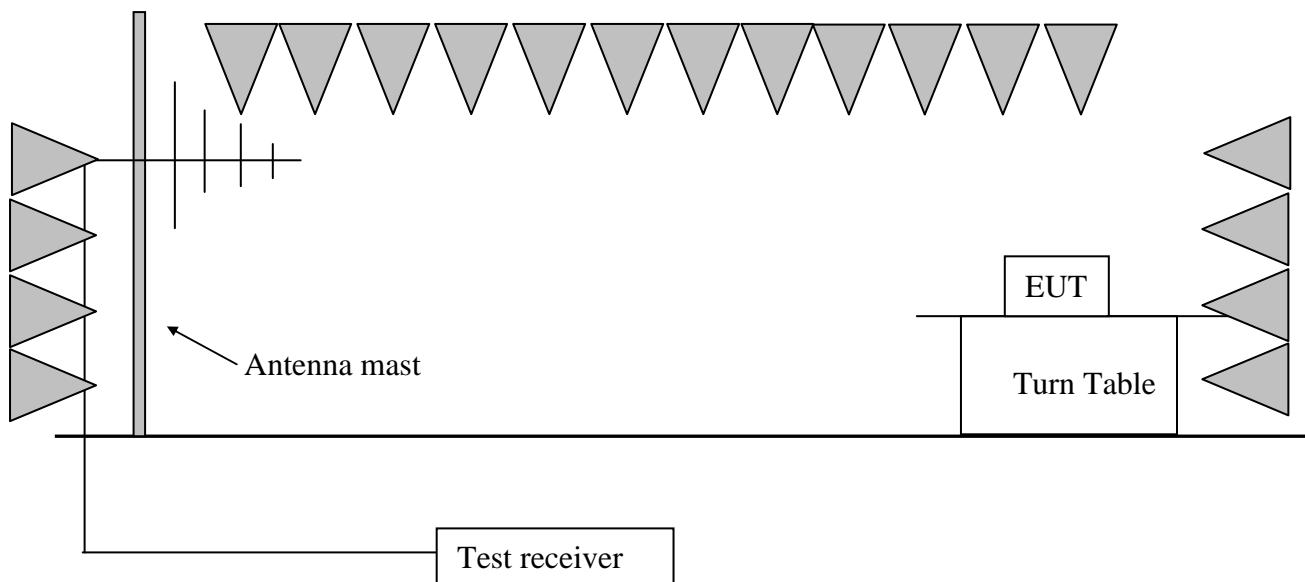

4.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber.

The central frequency of test receiver was set as the operating frequency of EUT and the Span was set as 0.

The EUT was switched once. The test receiver recorded the whole time from the triggered moment to the time of stopping radiating. For manual switching, to avoid uncertainty, the operating above would be repeated five times and the worst data is recorded.

4.4 Test protocol

Whole time from the triggered moment to the time of stopping radiating: 160.32ms.
As a result, the EUT complies with the limit of 5s' deactivating time.

5. Emission Bandwidth


Test Status: Pass

5.1 Test limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

The limit for the EUT = $0.25\% * 434.00\text{MHz} = 1.085\text{MHz}$

5.2 Test Configuration

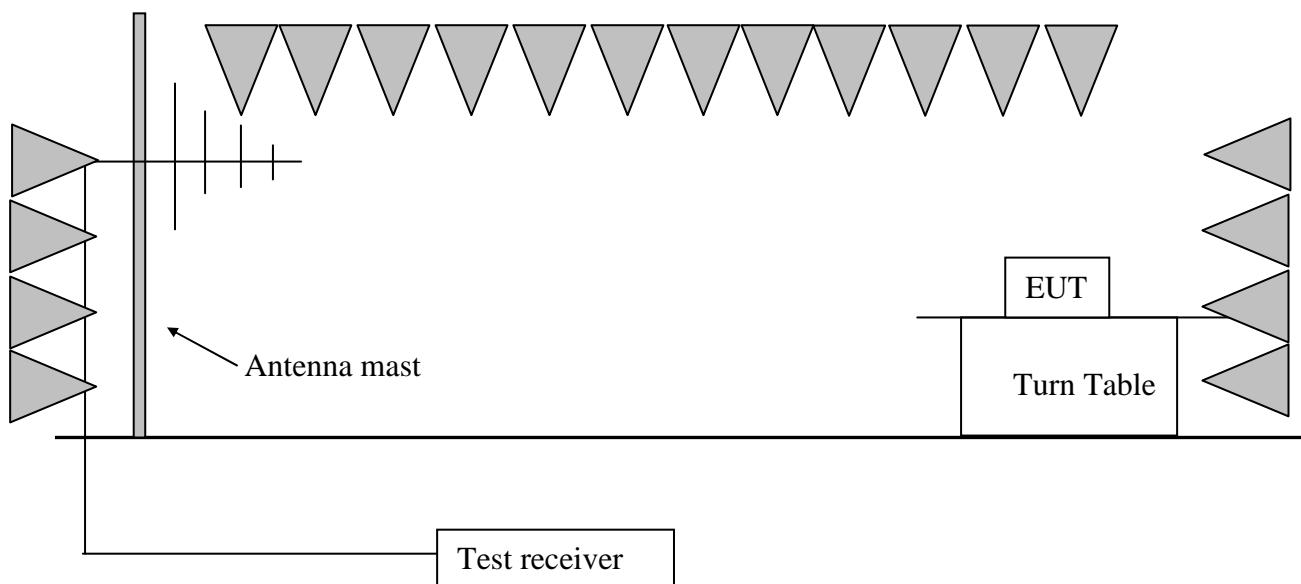

5.3 Test procedure and test setup

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The central frequency of test receiver was set near the operating frequency of EUT. The test was conducted using the Spectrum Analyzer with the resolutions bandwidth set at 10kHz, the video bandwidth set at 10kHz.

5.4 Test protocol

Temperature : 24 °C


Relative Humidity : 42 %

Channel	Emission Bandwidth (kHz)	Limit (MHz)
1	52.10	1.085


Annex I. Photo of Test Setup

Radiated Emission


X Direction

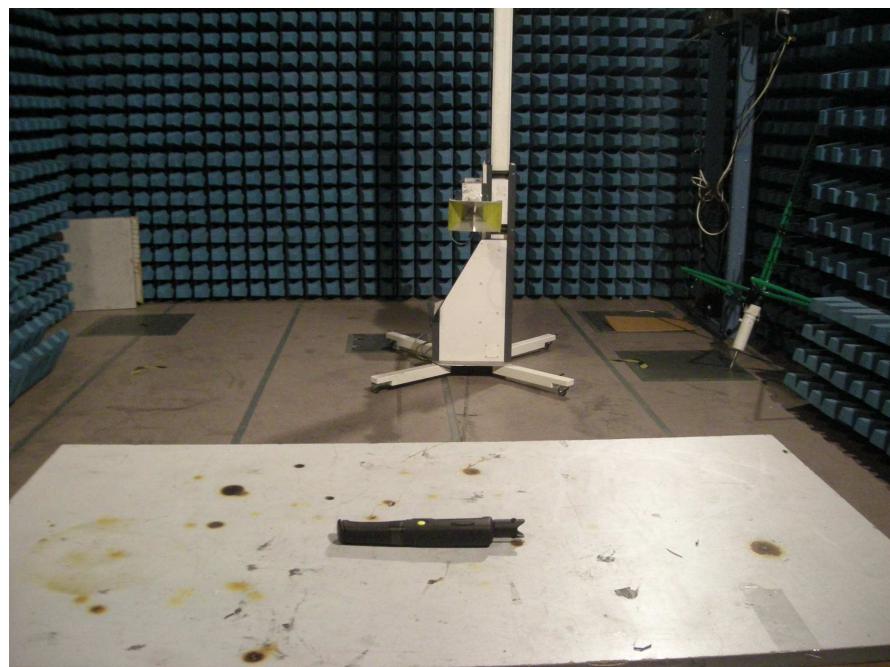


Y Direction

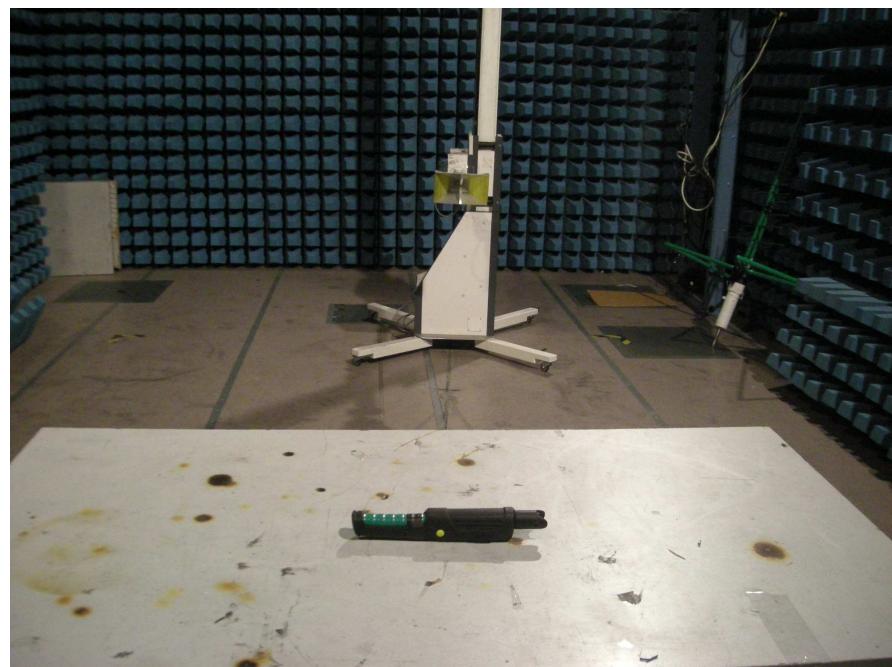

Z Direction

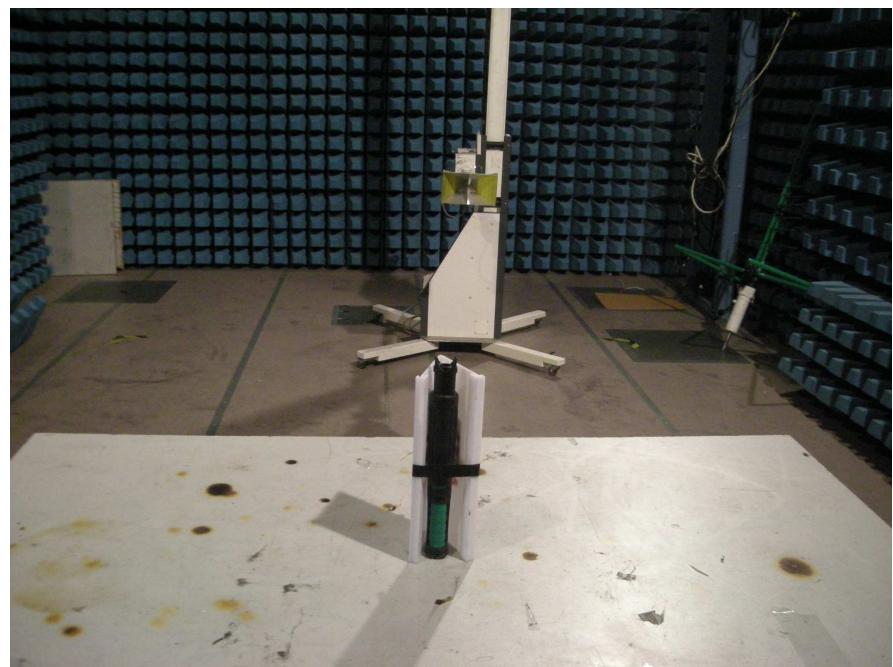

Appendix II: Photograph of EUT

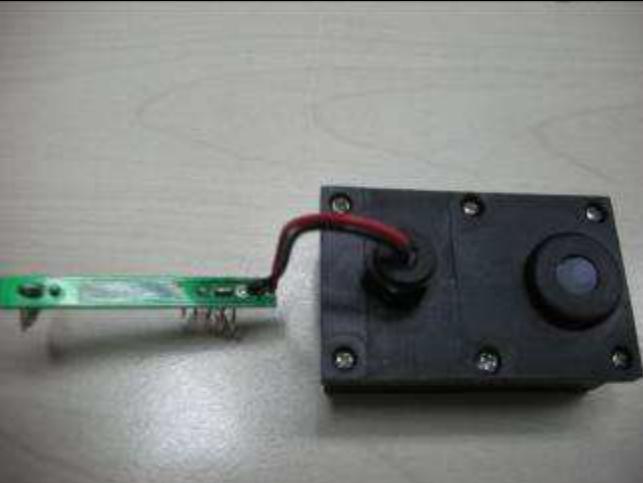Overview	Inner View
	
Transmit	Inner View
	
PCB Board	PCB Board
