

RF TEST REPORT



Report No.: FCC_RF_SL18061302-SPC-005-0246

Supersede Report No.:

Applicant	:	SpiderCloud Wireless, Inc.
Product Name	:	SpiderCloud Radio Node
Model No.	:	SCRN-320-0246
Test Standard	:	47 CFR 15.407
Test Method	:	ANSI C63.4: 2014 789033 D02 General UNII Test Procedures New Rules v02
FCC ID	:	Y47RN320B246
Dates of test	:	01/18/2017 - 07/02/2018
Issue Date	:	07/03/2018
Test Result	:	☒ Pass ☐ Fail
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		

This Test Report is Issued Under the Authority of:	
	
Gary Chou	Chen Ge
Test Engineer	Engineer Reviewer
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only	

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & Radio Equipment Directive (RED)
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY	4
2	EXECUTIVE SUMMARY	5
3	CUSTOMER INFORMATION	5
4	TEST SITE INFORMATION	5
5	MODIFICATION	5
6	EUT INFORMATION	6
6.1	EUT Description	6
6.2	Radio Description	6
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION	8
7.1	Supporting Equipment	8
7.2	Cabling Description	8
7.3	Test Software Description	8
8	TEST SUMMARY	9
9	MEASUREMENT UNCERTAINTY	10
9.1	Conducted Emissions	10
9.2	Radiated Emissions (30MHz to 1GHz)	10
9.3	Radiated Emissions (1GHz to 40GHz)	11
9.4	RF conducted measurement	11
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	12
10.1	Conducted Emissions	12
10.2	26 dB Bandwidth & 6 dB Bandwidth	15
10.3	Output Power	25
10.4	Peak Spectral Density	45
10.5	Band Edge and Emission Mask Measurement	63
10.6	Radiated Emissions below 1GHz	76
10.7	Radiated Spurious Emissions above 1GHz	78
	ANNEX A. TEST INSTRUMENT	85
	ANNEX B. SIEMIC ACCREDITATION	86

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_RF_SL18061302-SPC-005-0246	None	Original	07/03/2018

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: SpiderCloud Wireless, Inc.
Product: SpiderCloud Radio Node
Model: SCRN-320-0246

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	:	SpiderCloud Wireless
Applicant Address	:	475 Sycamore Dr, Milpitas, CA, 95035, USA
Manufacturer Name	:	Sanmina-SCI Systems de Mexico SA de CV
Manufacturer Address	:	Carretera Chapala-Guadalajara 45640 Tlajomulco de Zuniga, Jalisco, Mexico

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	SpiderCloud Radio Node
Model No.	SCRN-320-0246
Trade Name	SpiderCloud
Serial No.	16298X25436
Input Power	56VDC (PoE)
Power Adapter Manu/Model	PHIHONG/POE36U-1AT-R
Power Adapter SN	N/A
Date of EUT received	01/13/2017
Equipment Class/ Category	UNII
Port/Connectors	PoE, Ethernet

6.2 Radio Description

Radio Type	LAA/LTE-U	LAA/LTE-U
Operating Frequency	5160-5240MHz 5735-5825MHz	5190-5230MHz 5755-5795MHz
Modulation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Channel Spacing	20MHz	40MHz
Number of Channels	10	4
Antenna Type	Internal Omni PCB Antenna	Internal Omni PCB Antenna
Antenna Gain (Peak)	2dBi	2dBi
Antenna Connector Type	U.FL	U.FL
Note	N/A	N/A

EUT Power level setting
20MHz

Mode	Frequency	Power Setting
QPSK	5160	26
	5200	26
	5240	26
64QAM	5160	26
	5200	26
	5240	26
QPSK	5735	26
	5785	26
	5825	26
64QAM	5735	26
	5785	26
	5825	26

40MHz

Mode	Frequency	Power Setting
64QAM	5190	23
	5230	23
64QAM	5755	23
	5795	23

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	10MHz Clock	OX200-SC	141871594391	Metric Test	-
2	POE	POE36U-1AT-R	N/A	PHIHONG	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
RJ45	EUT	RJ45	POE	RJ45	2	Unshielded	-
RJ45	POE	RJ45	Laptop	RJ45	3	Unshielded	-

7.3 Test Software Description

Test Item	Software	Description
RF testing	TMciDvtClient	Enable EUT continuous TX mode and change to different channel

8 Test Summary

Test Item	Test standard		Test Method/Procedure	Pass / Fail
Restricted Band of Operation	FCC	15.205	ANSI C63.4 – 2014 789033 D02 General UNII Test Procedures New Rules v02	☒ Pass ☐ N/A
AC Conducted Emissions Voltage	FCC	15.207(a)	ANSI C63.4 – 2014	☒ Pass ☐ N/A

Test Item	Test standard		Test Method/Procedure	Pass / Fail
26 & 6 dB Emission Bandwidth	FCC	15.407 (a) (1) 15.407 (a) (3)	789033 D02 General UNII Test Procedures New Rules v02	☒ Pass ☐ N/A
Maximum conducted Output Power	FCC	15.407 (a) (1) 15.407 (a) (3)	789033 D02 General UNII Test Procedures New Rules v02	☒ Pass ☐ N/A
Power reduction (Antenna Gain > 6 dBi)	FCC	15.407 (a) (1) 15.407 (a) (3)	662911 D01 Multiple Transmitter Output v02r01	☐ Pass ☒ N/A
Band Edge and Radiated Spurious Emissions	FCC	15.407(b)(1), 15.407(b)(6)	789033 D02 General UNII Test Procedures New Rules v02	☒ Pass ☐ N/A
Emission Mask	FCC	15.407(b)(4) 15.407(b)(6)	789033 D02 General UNII Test Procedures New Rules v02	
Power Spectral Density	FCC	15.407 (a) (1) 15.407 (a) (3)	789033 D02 General UNII Test Procedures New Rules v02	☒ Pass ☐ N/A
Frequency Stability	FCC	15.407 (g)	789033 D02 General UNII Test Procedures New Rules v02	☐ Pass ☒ N/A
Transmit Power Control (TPC)	FCC	15.407 (h)(1)	789033 D02 General UNII Test Procedures New Rules v02	☐ Pass ☒ N/A
User Manual	FCC	-	-	☒ Pass ☐ N/A

Remark	- All measurement uncertainties are not taken into consideration for all presented test result. - The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.
--------	---

9 Measurement Uncertainty

9.1 Conducted Emissions

The test is to measure the conducted emissions to the mains port of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the LISN
- Uncertainty of cables
- Uncertainty due to the mismatches
- Etc, see the below table for details

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
LISN Insertion Loss	0.40	Normal	2	1	0.20
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch LISN - Receiver	0.25	U-Shape	1.414	1	0.1768033
LISN Impedance	2.5	Triangular	2.449	1	1.0208248
Combined Standard Uncertainty					1.928133
Expanded Uncertainty (K=2)					3.856266

The total derived measurement uncertainty is +/- 3.86 dB.

9.2 Radiated Emissions (30MHz to 1GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
Antenna Factor	0.65	Normal	2	1	0.325
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
NSA Calibration	4.0	U-Shape	1.414	1	2.8288543
Combined Standard Uncertainty					3.0059131
Expanded Uncertainty (K=2)					6.0118262

The total derived measurement uncertainty is +/- 6.00 dB.

9.3 Radiated Emissions (1GHz to 40GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- VSWR Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.0692840
Cable Insertion Loss	0.21	Normal	2	1	0.1050000
Filter Insertion Loss	0.25	Normal	2	1	0.1250000
Antenna Factor	0.65	Normal	2	1	0.3250000
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.8660508
PRF Response	1.5	Rectangular	1.732	1	0.8660508
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
VSWR Calibration	2.0	U-Shape	1.414	1	1.4144272
Combined Standard Uncertainty					4.2363
Expanded Uncertainty (K=2)					8.4726

The total derived measurement uncertainty is +/- 8.47 dB.

9.4 RF conducted measurement

The test is to measure the RF output power from the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the Reference Level Uncertainty
- Uncertainty of variable attenuators
- Uncertainty of cables
- Uncertainty due to the mismatches

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Reference Level	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Attenuator	0.25	Normal	2	1	0.125
Mismatch	0.25	U-Shape	1.414	1	0.1768033
Combined Standard Uncertainty					0.476087
Expanded Uncertainty (K=2)					0.952174


The total derived measurement uncertainty is +/- 0.95 dB.

10 Measurements, Examination and Derived Results

10.1 Conducted Emissions

Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBuV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

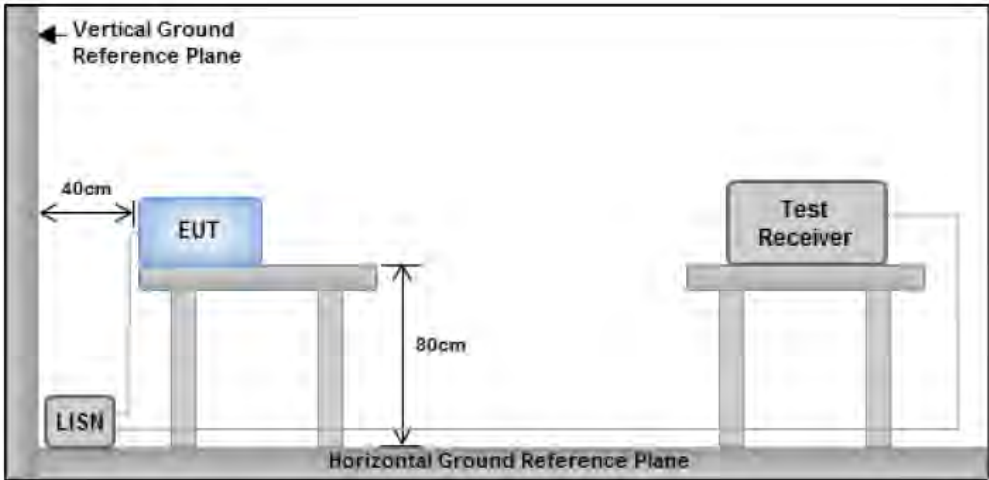Spec	Item	Requirement	Applicable
15.207 RSS247(A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	☒
Test Setup		 Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes	
Procedure		- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. - The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment was powered separately from another main supply.	
Remark		EUT was tested at 120VAC, 60Hz	
Result		☒ Pass ☐ Fail	


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Gary Chou at Conducted Emission test site.

Conducted Emission Test Results

Test specification:	Conducted Emissions			
Environmental Conditions:	Temp(°C):	21	Result:	☒ Pass ☐ Fail
	Humidity (%):	42		
	Atmospheric(mbar):	1021		
Mains Power:	120Vac, 60Hz			
Tested by:	Gary Chou			
Test Date:	01/25/2017			
Remarks	POE, Line			

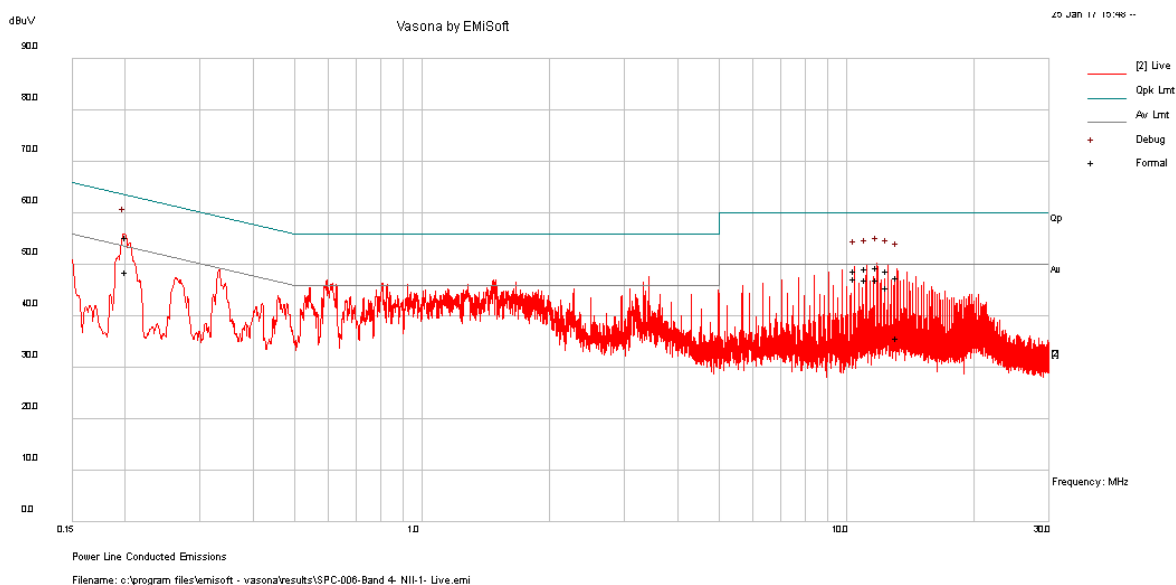


Line Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
11.81	38.92	10.05	0.53	49.51	Quasi Peak	Live	60	-10.49	Pass
0.20	44.03	10	1.25	55.28	Quasi Peak	Live	63.59	-8.31	Pass
11.13	38.65	10.05	0.52	49.22	Quasi Peak	Live	60	-10.78	Pass
12.50	38.36	10.05	0.54	48.95	Quasi Peak	Live	60	-11.05	Pass
10.45	38.32	10.05	0.52	48.89	Quasi Peak	Live	60	-11.11	Pass
13.18	37.01	10.06	0.54	47.61	Quasi Peak	Live	60	-12.39	Pass
11.81	36.44	10.05	0.53	47.03	Average	Live	50	-2.97	Pass
0.20	37.37	10	1.25	48.62	Average	Live	53.59	-4.97	Pass
11.13	36.56	10.05	0.52	47.13	Average	Live	50	-2.87	Pass
12.50	35.06	10.05	0.54	45.65	Average	Live	50	-4.35	Pass
10.45	36.85	10.05	0.52	47.42	Average	Live	50	-2.58	Pass
13.18	25.19	10.06	0.54	35.79	Average	Live	50	-14.21	Pass

Conducted Emission Test Results

Test specification:	Conducted Emissions			
Environmental Conditions:	Temp(°C):	21	Result:	☒ Pass ☐ Fail
	Humidity (%):	42		
	Atmospheric(mbar):	1021		
Mains Power:	120Vac, 60Hz			
Tested by:	Gary Chou			
Test Date:	01/25/2017			
Remarks	POE, Neutral			

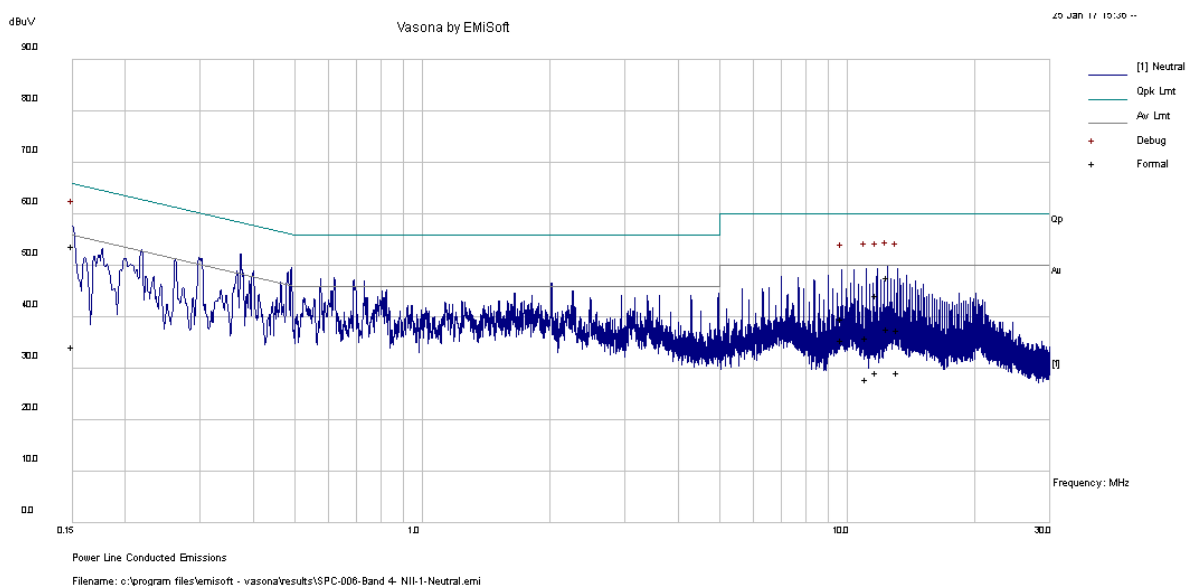

Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
0.15	42.18	10	1.74	53.93	Quasi Peak	Neutral	66	-12.07	Pass
12.44	37.17	10.05	0.54	47.76	Quasi Peak	Neutral	60	-12.24	Pass
11.76	33.65	10.05	0.53	44.23	Quasi Peak	Neutral	60	-15.77	Pass
13.12	26.95	10.06	0.54	37.55	Quasi Peak	Neutral	60	-22.45	Pass
11.07	25.39	10.05	0.52	35.96	Quasi Peak	Neutral	60	-24.04	Pass
9.69	29.23	10.05	0.51	39.79	Quasi Peak	Neutral	60	-20.21	Pass
0.15	22.65	10	1.74	34.4	Average	Neutral	56	-21.6	Pass
12.44	27.22	10.05	0.54	37.81	Average	Neutral	50	-12.19	Pass
11.76	18.63	10.05	0.53	29.21	Average	Neutral	50	-20.79	Pass
13.12	18.69	10.06	0.54	29.29	Average	Neutral	50	-20.71	Pass
11.07	17.39	10.05	0.52	27.97	Average	Neutral	50	-22.03	Pass
9.69	25.09	10.05	0.51	35.65	Average	Neutral	50	-14.35	Pass

10.2 26 dB Bandwidth & 6 dB Bandwidth

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.407	-	26 dB Emission BW: Report only for reference.	☒
	a) (2)	26 dB Emission BW: Report only for power limit calculation.	☐
	e)	Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.	☒
Test Setup			
Test Procedure	789033 D02 General UNII Test Procedures New Rules v02 <u>26dB Emission bandwidth measurement procedure (Other than 5.725-5.85 GHz)</u> - Allow the trace to stabilize. - Use the spectrum analyzer built-in measurement function to determine the 26dB BW. - o Set RBW = around 1% of emission bandwidth - o Set VBW > RBW - o Detector = Peak - o Trace mode = max hold - Capture the plot. - Repeat above steps for different test channel and other modulation type. <u>6 dB Minimum emission bandwidth measurement procedure (for 5.725-5.85 GHz)</u> - Allow the trace to stabilize. - Use the spectrum analyzer built-in measurement function to determine the 6dB BW. - o Set RBW = 100 KHz - o Set VBW ≥ 3 x RBW - o Detector = Peak - o Trace mode = max hold - o Sweep = auto couple - Capture the plot. - Repeat above steps for different test channel and other modulation type.		
Test Date	01/18/2017 – 02/10/2017	Environmental condition	Temperature 22°C Relative Humidity 38% Atmospheric Pressure 1020mbar
Remark	N/A		
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A
Test Plot ☒ Yes ☐ N/A

Test was done by Chen Ge at RF test site.

26dB Bandwidth measurement result for 5.2GHz

20MHz:

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)
26dB BW	QPSK	5160	Low	18.47	-
		5200	Mid	18.45	-
		5240	High	18.43	-
	64QAM	5160	Low	18.71	-
		5200	Mid	18.40	-
		5240	High	18.46	-

40MHz:

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)
26dB BW	64QAM	5190	Low	38.79	-
		5230	Mid	38.73	-

6dB Bandwidth measurement result for 5.8GHz


20MHz:

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)	Result
6dB BW	QPSK	5745	Low	17.96	≥0.5	Pass
		5785	Mid	17.97	≥0.5	Pass
		5825	High	17.99	≥0.5	Pass
	64QAM	5745	Low	17.98	≥0.5	Pass
		5785	Mid	18.00	≥0.5	Pass
		5825	High	17.94	≥0.5	Pass


40MHz:

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)
6dB BW	64QAM	5755	Low	37.63	-
		5795	High	37.82	-


26dB Bandwidth Test Plots
W52 20MHz:

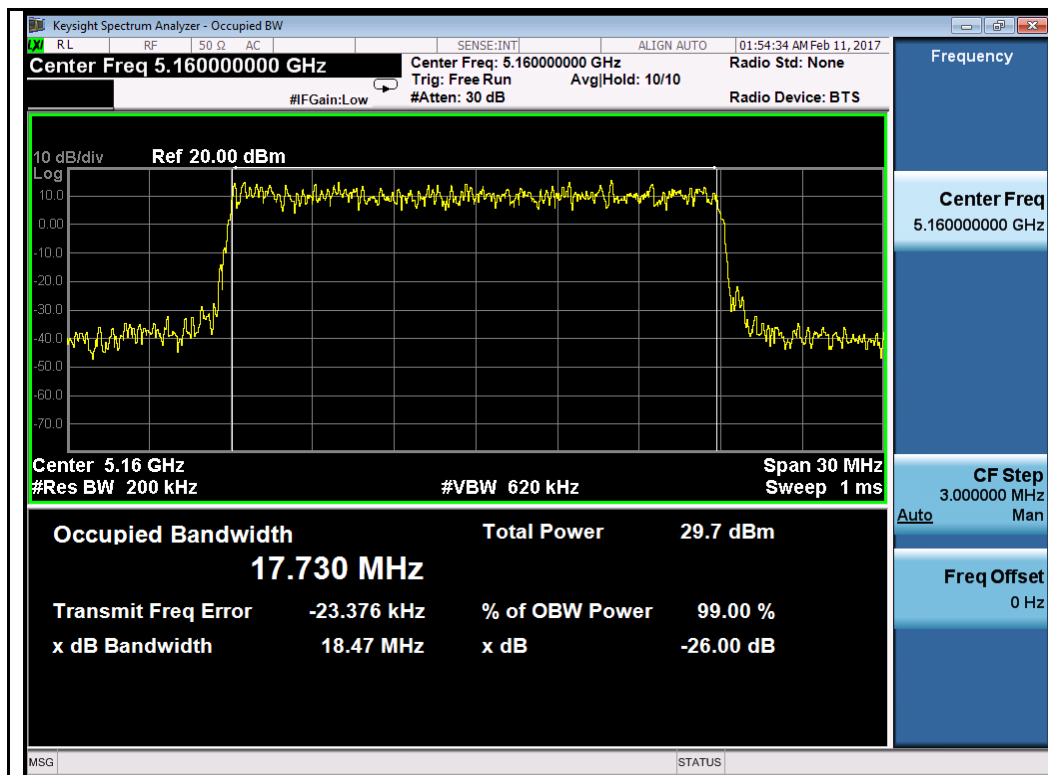


QPSK-5160MHz

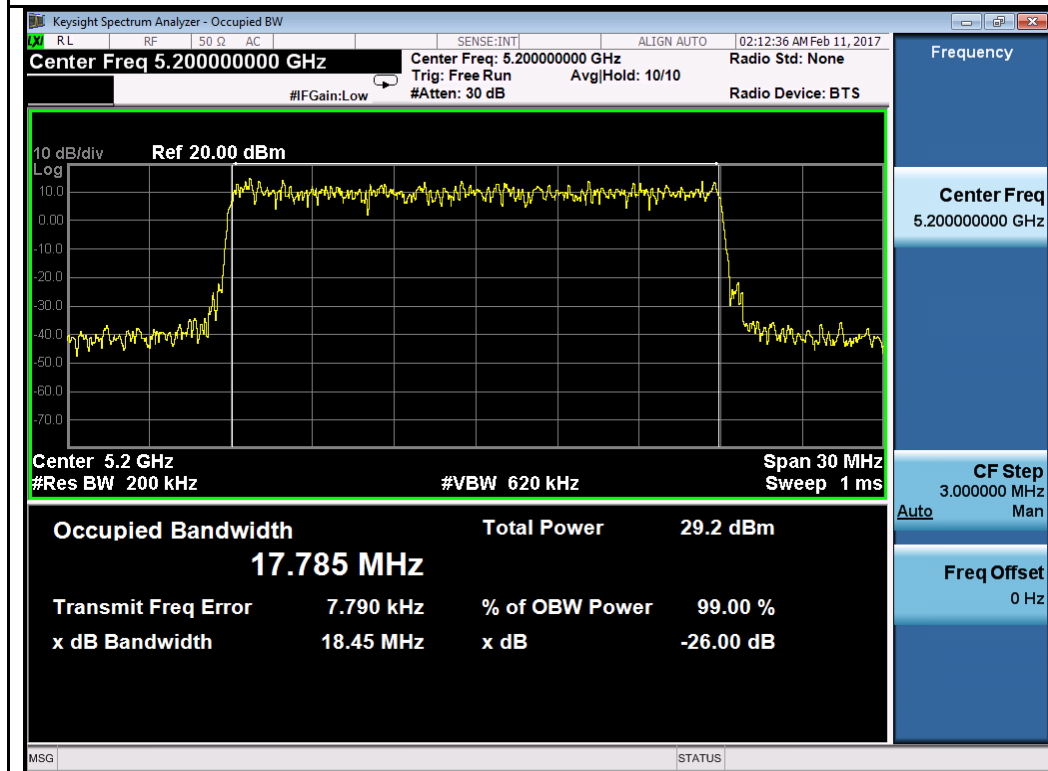


QPSK-5200MHz

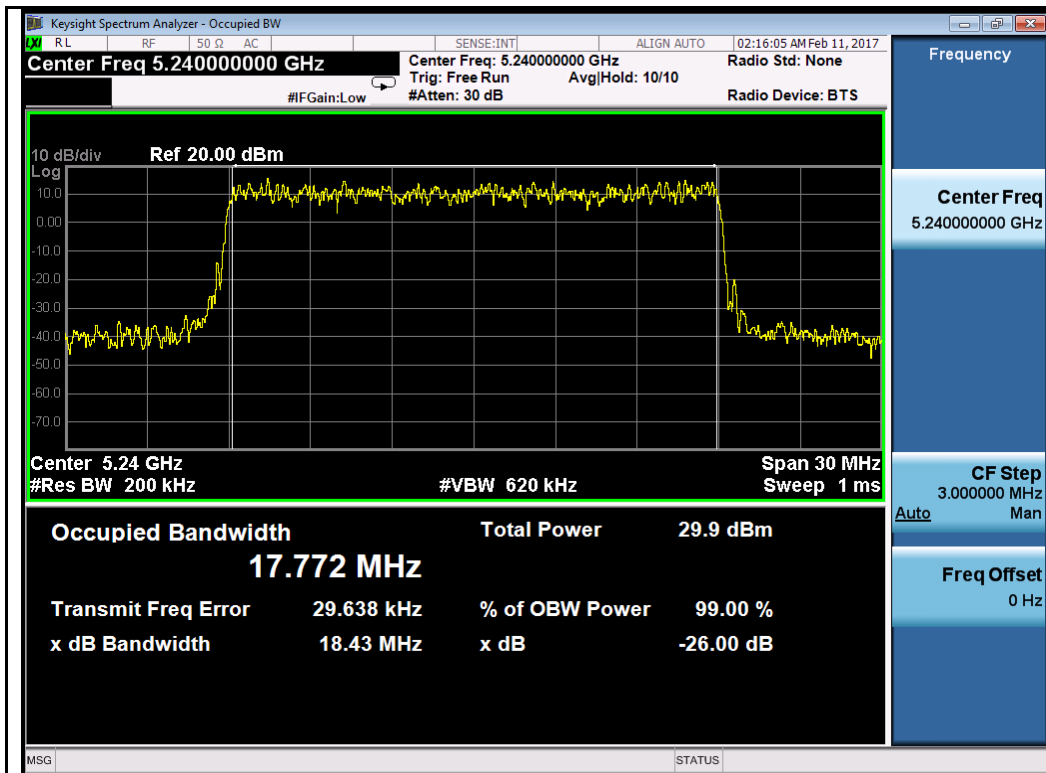


QPSK-5240MHz

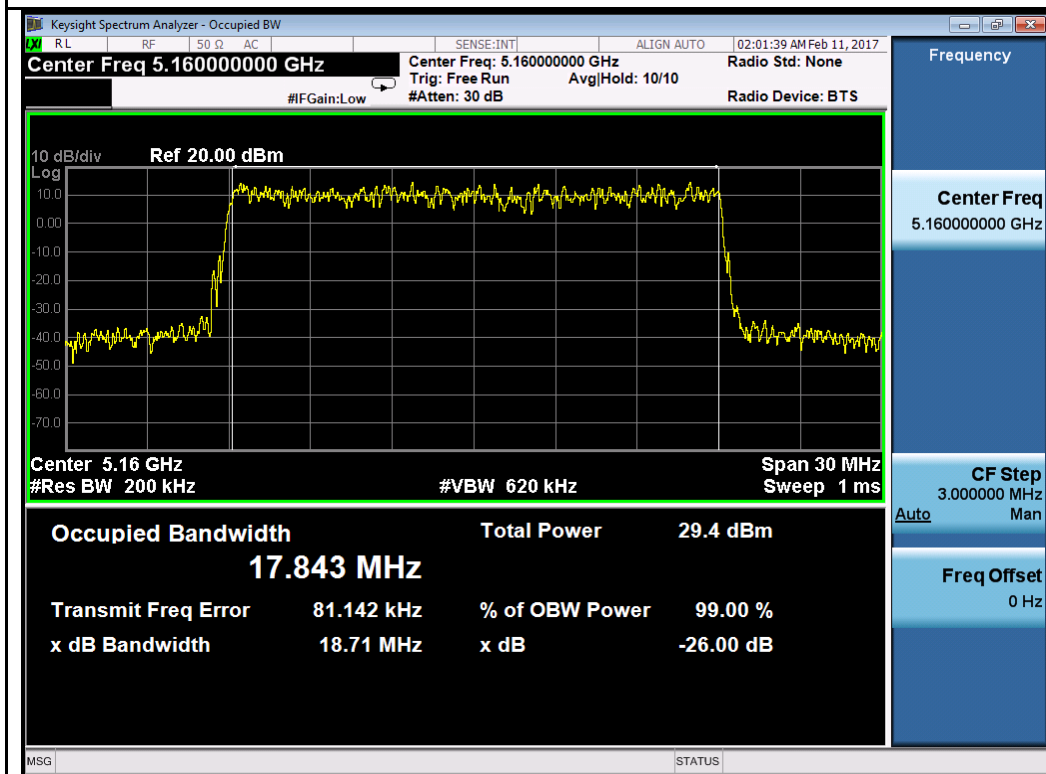

64QAM-5160MHz

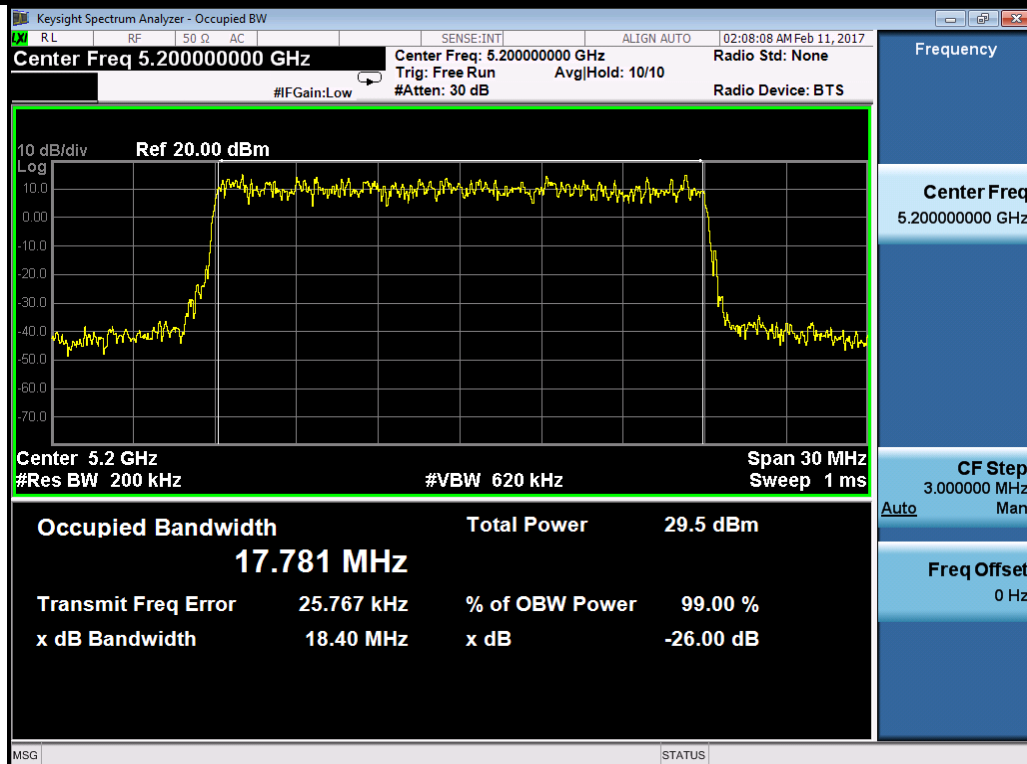


64QAM-5200MHz

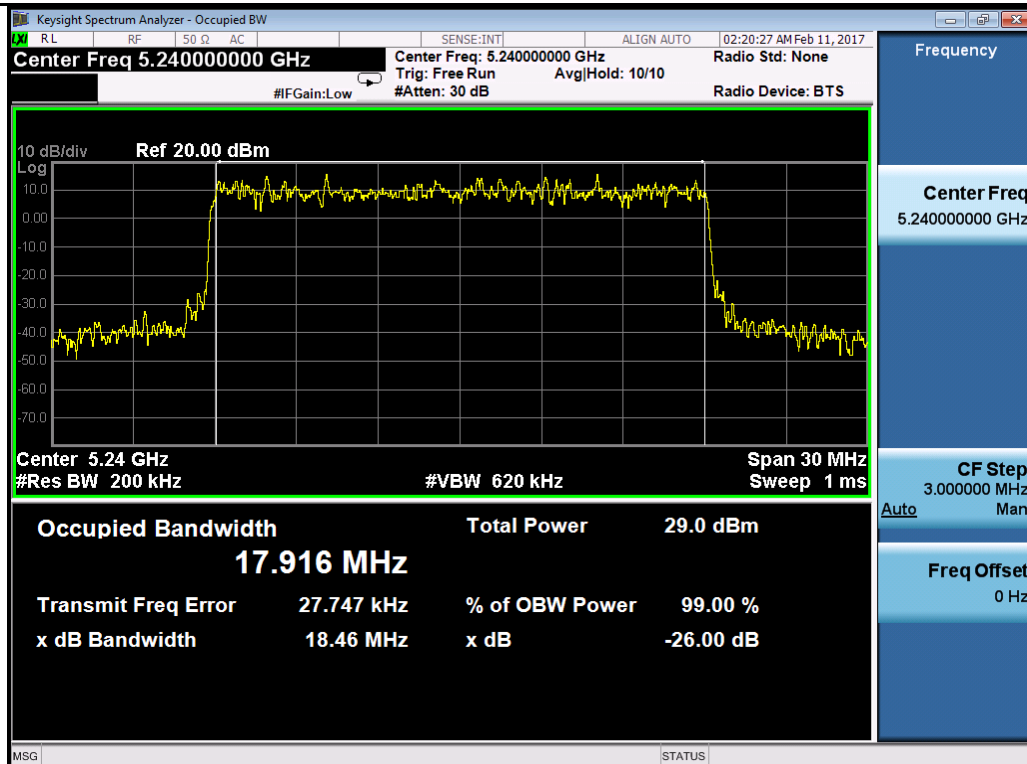


64QAM-5240MHz

W52 40MHz:

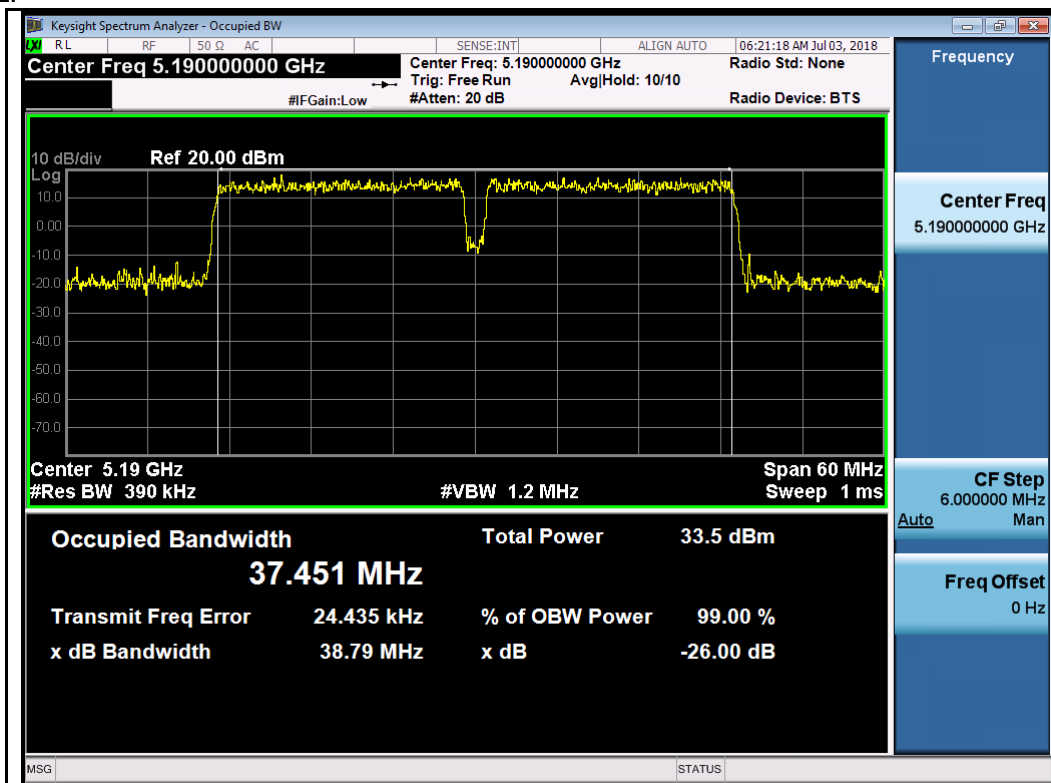


64QAM-5190MHz

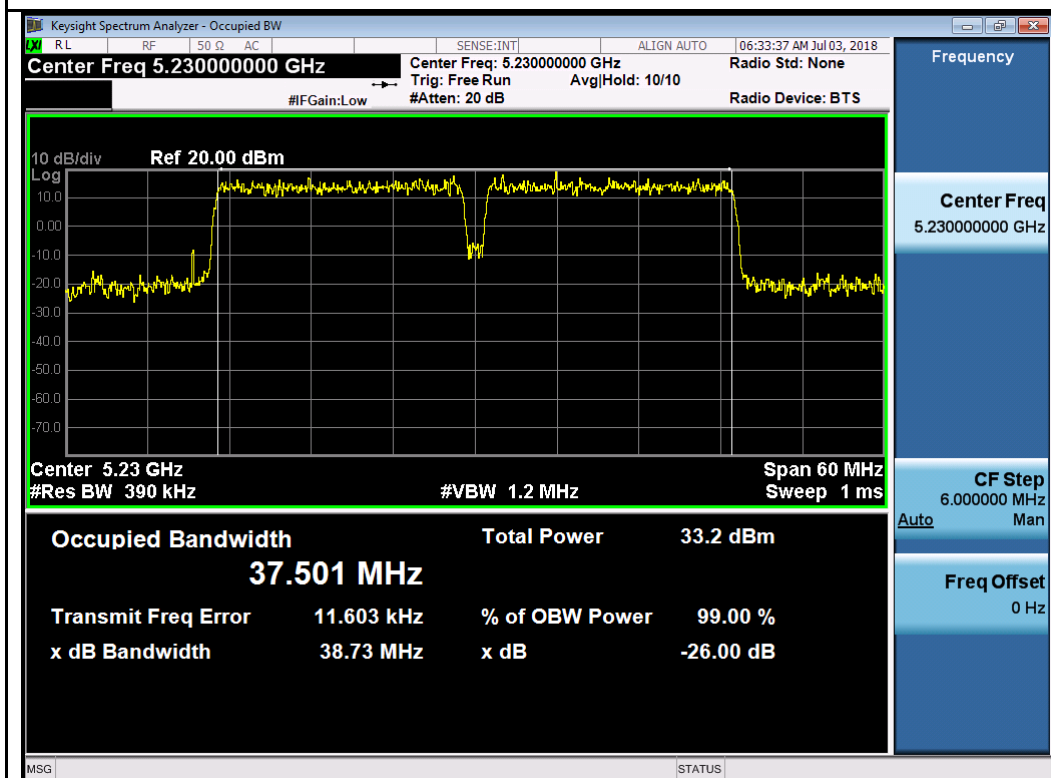


64QAM-5230MHz

6dB Bandwidth Test Plots


W58 20MHz:

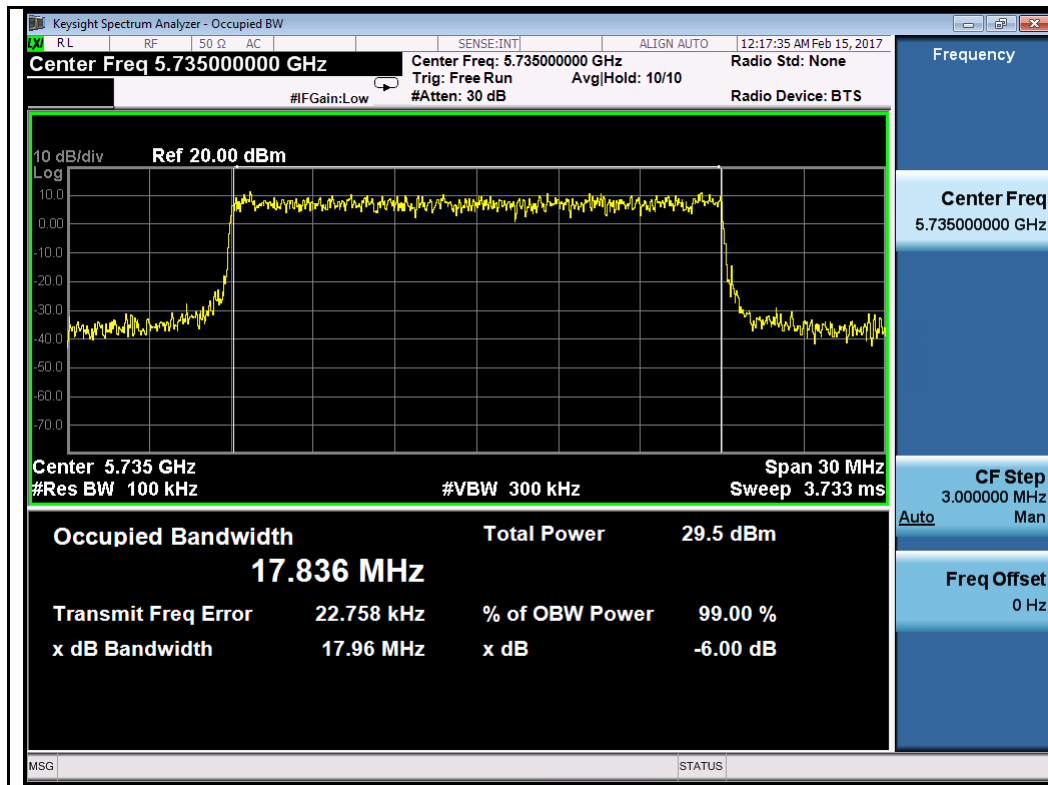


QPSK-5735MHz

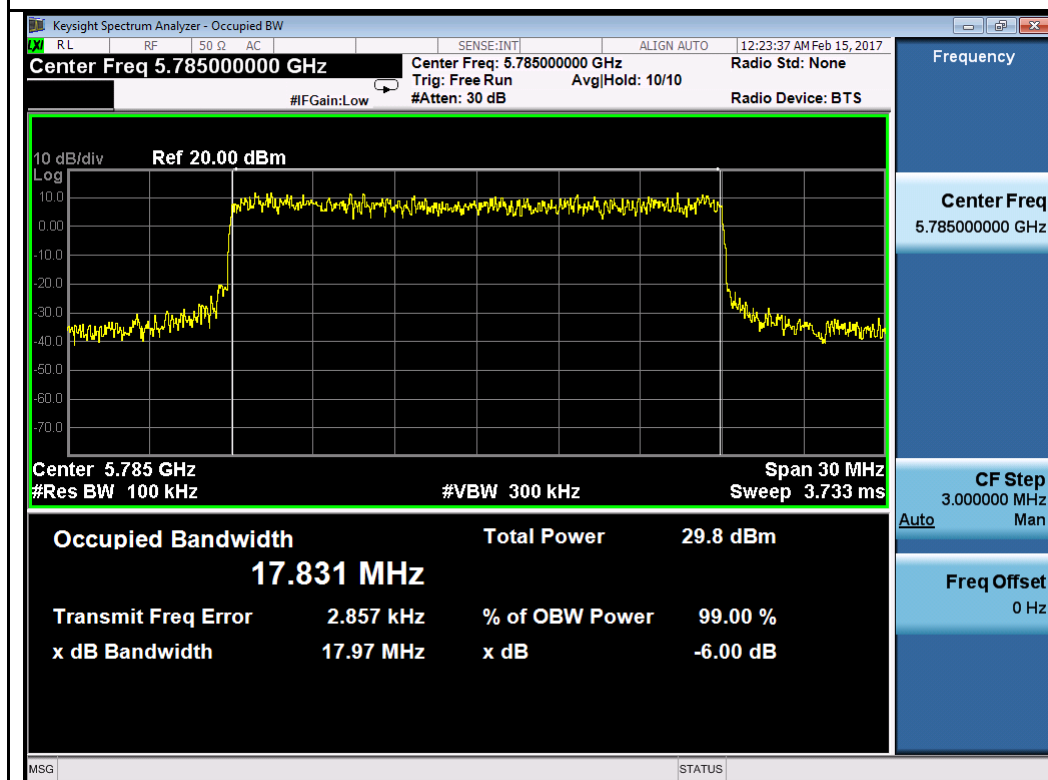


QPSK-5785MHz

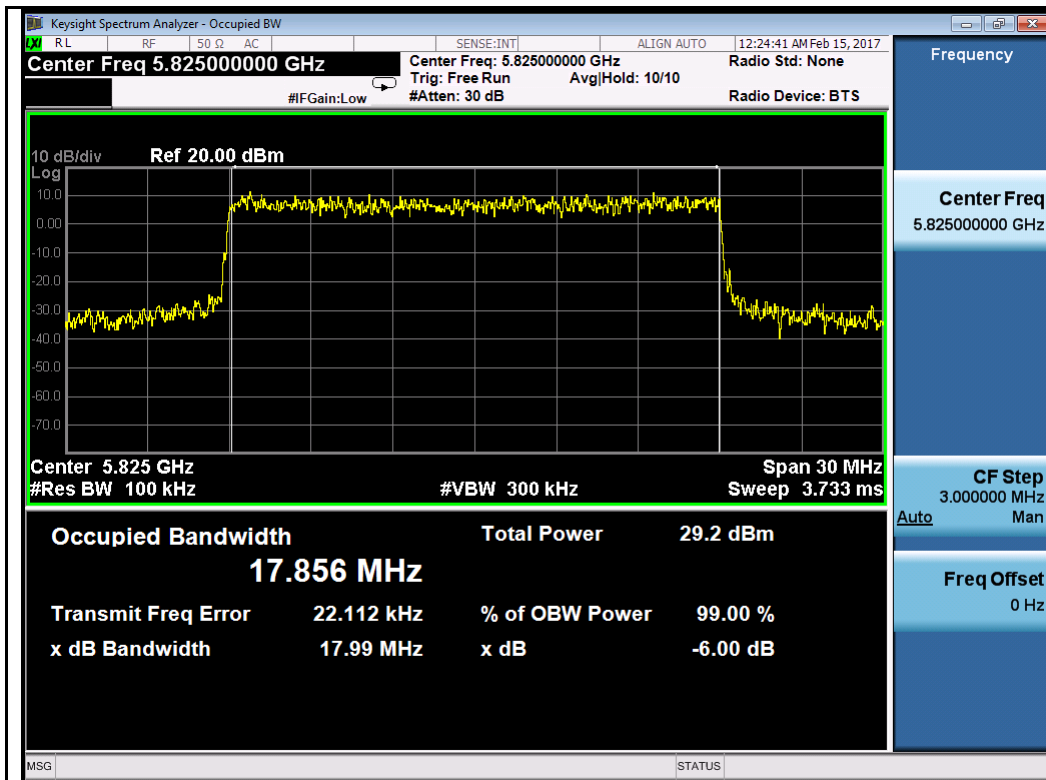


QPSK-5825MHz

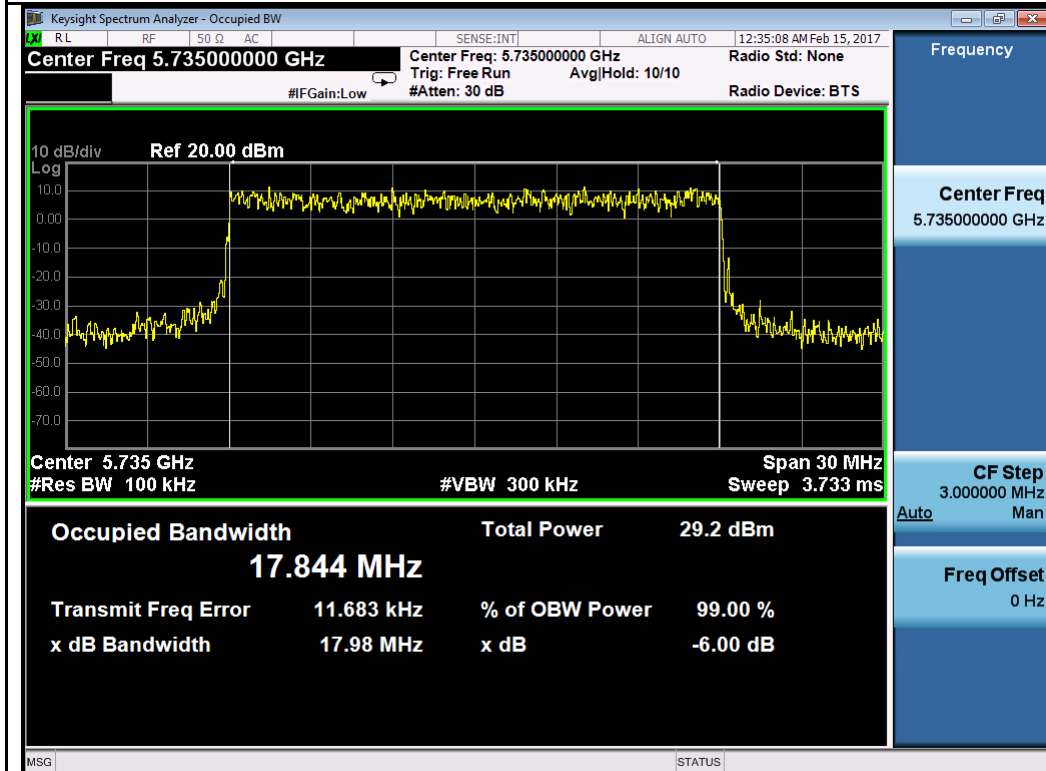

64QAM-5735MHz

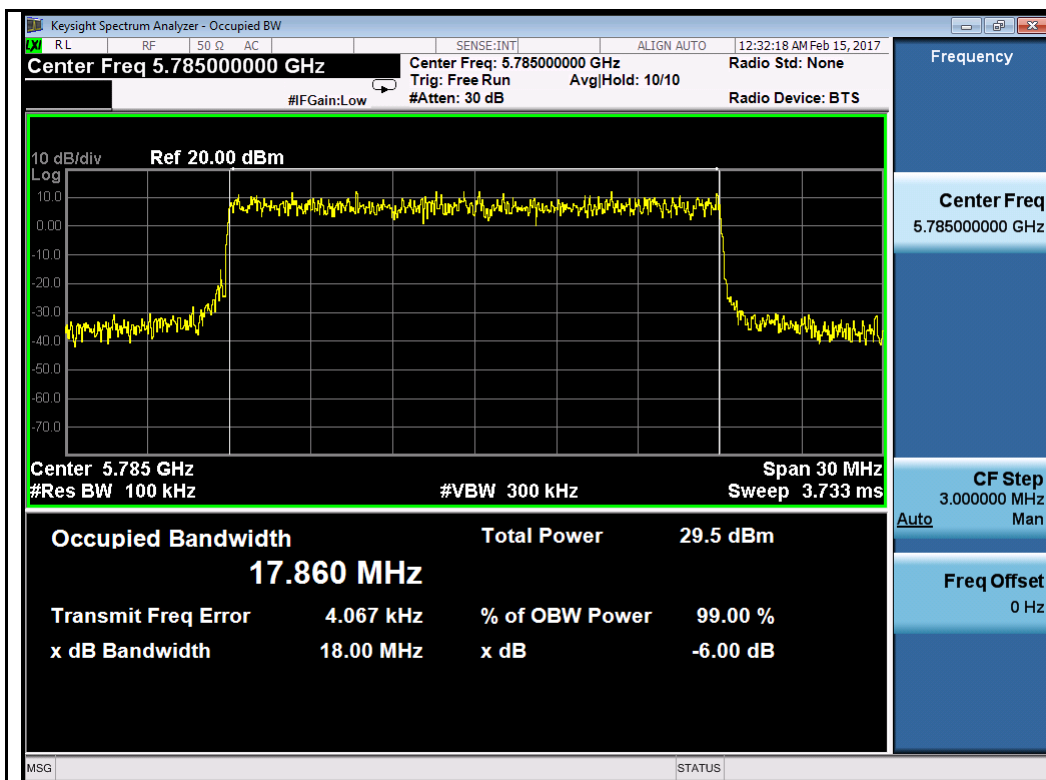


64QAM-5785MHz

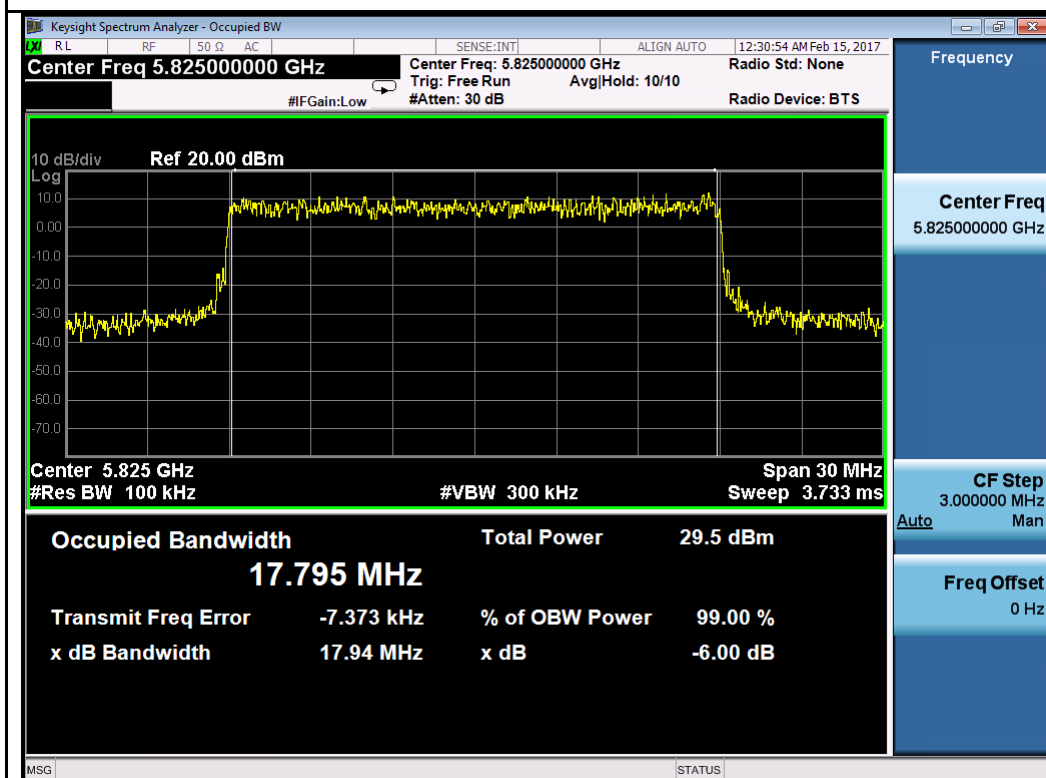


64QAM-5825MHz

W58 40MHz:

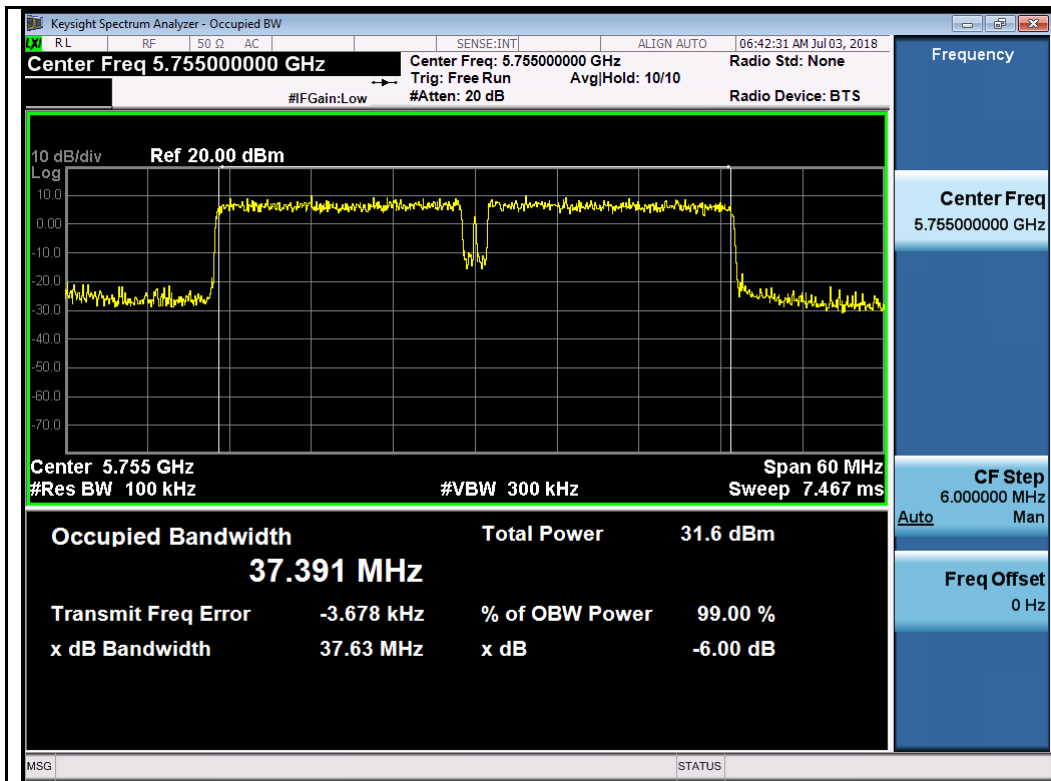

64QAM-5755MHz

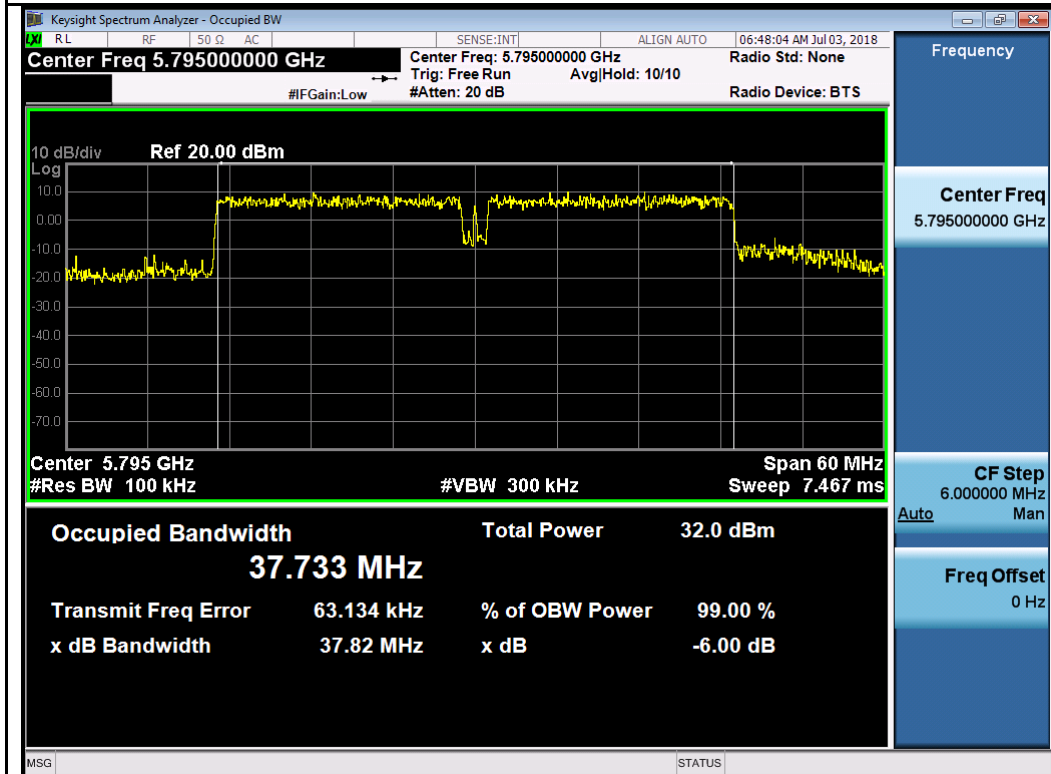

64QAM-5795MHz

10.3 Output Power

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.407	a)(1)(ii)	For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.	☒
	a)(3)	For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.	☒
	a)(1)(i)	The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).	☒

Test Setup



Test Procedure

789033 D02 General UNII Test Procedures New Rules v02

Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep):

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz
- (iii) Set VBW = 3 MHz
- (iv) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle $< 98\%$, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- (viii) Trace average at least 100 traces in power averaging (rms) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

Test Date	01/18/2017 – 02/10/2017	Environmental condition	Temperature 21°C Relative Humidity 40% Atmospheric Pressure 1019mbar
Remark	Two antennas are used for this band. The highest directional gain of the antenna is 6dBi, no limit adjust is required.		
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Chen Ge at RF test site.

Output Power measurement result for 5.2GHz 20MHz:

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)			Limit (dBm)	Result
				Chain 1	Chain 2	Combined Power		
Output power	QPSK	5160	Low	25.68	25.64	28.67	30	Pass
		5200	Mid	25.42	25.40	28.42	30	Pass
		5240	High	25.54	25.46	28.51	30	Pass
	64QAM	5160	Low	25.74	25.81	28.79	30	Pass
		5200	Mid	25.38	25.36	28.38	30	Pass
		5240	High	25.57	25.59	28.59	30	Pass

40MHz:

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)			Limit (dBm)	Result
				Chain 1	Chain 2	Combined Power		
Output power	64QAM	5190	Mid	23.57	23.79	26.69	30	Pass
		5230	High	23.59	23.90	26.76	30	Pass

Output Power Measurement Results for 5.8GHz 20MHz:

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)			Limit (dBm)	Result
				Chain 1	Chain 2	Combined Power		
Output power	QPSK	5735	Low	25.52	25.51	28.53	30	Pass
		5785	Mid	25.66	25.67	28.68	30	Pass
		5825	High	25.29	25.26	28.29	30	Pass
	64QAM	5735	Low	25.74	25.68	28.72	30	Pass
		5785	Mid	25.74	25.71	28.74	30	Pass
		5825	High	25.30	25.36	28.34	30	Pass


40MHz:

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)			Limit (dBm)	Result
				Chain 1	Chain 2	Combined Power		
Output power	64QAM	5755	Mid	23.04	23.14	26.10	30	Pass
		5795	High	23.72	23.93	26.84	30	Pass


Test Plot for W52:

20MHz


Chain 1:

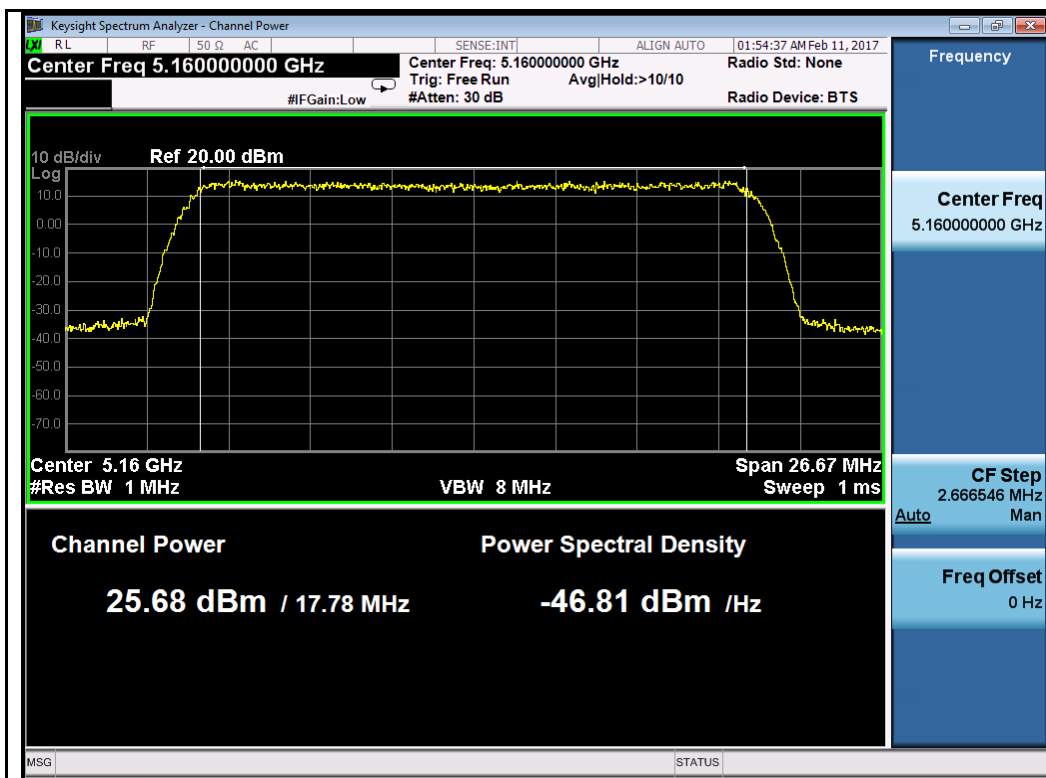


QPSK-5160MHz

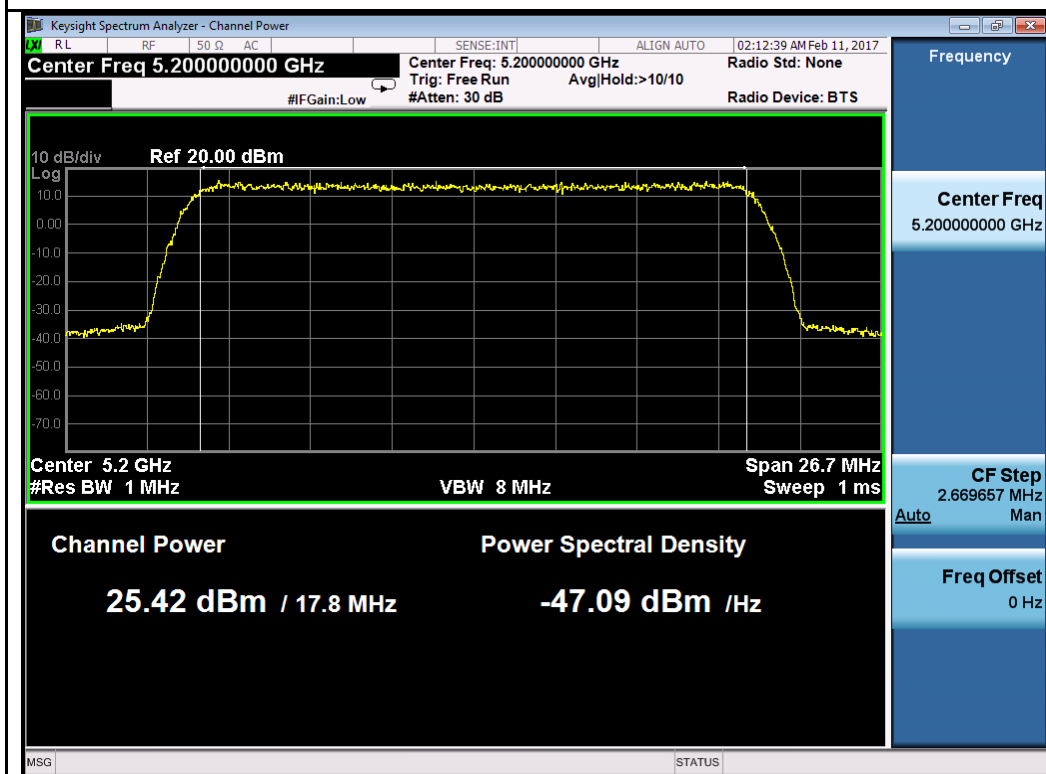


QPSK-5200MHz

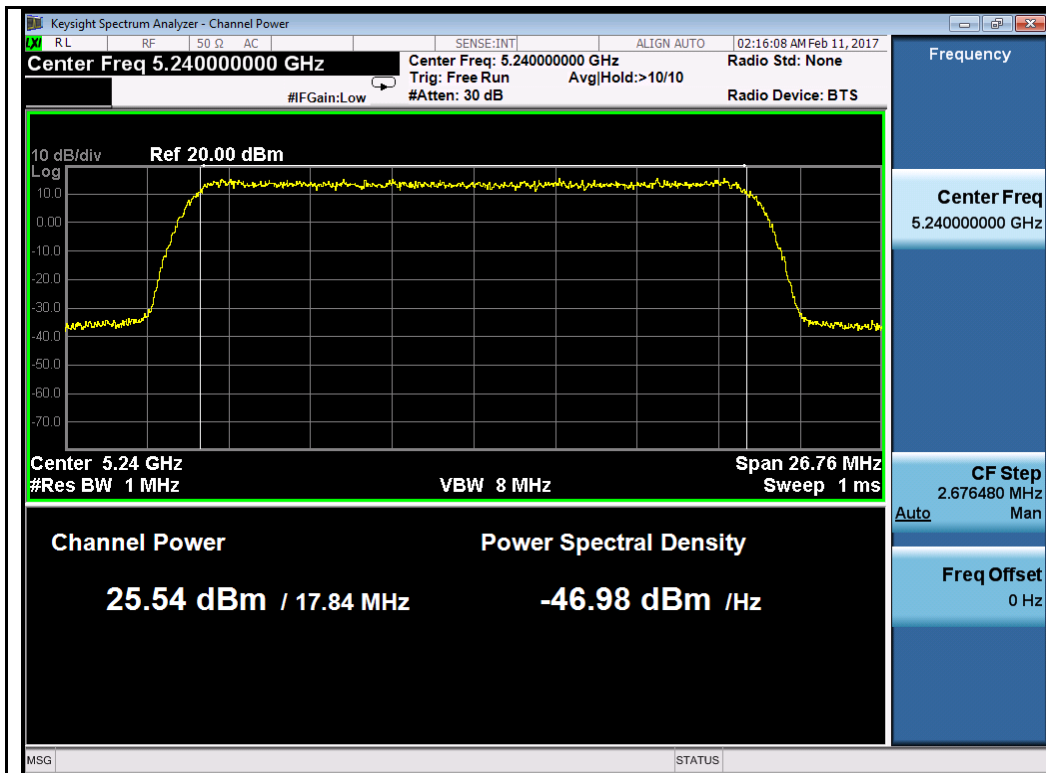


QPSK-5240MHz

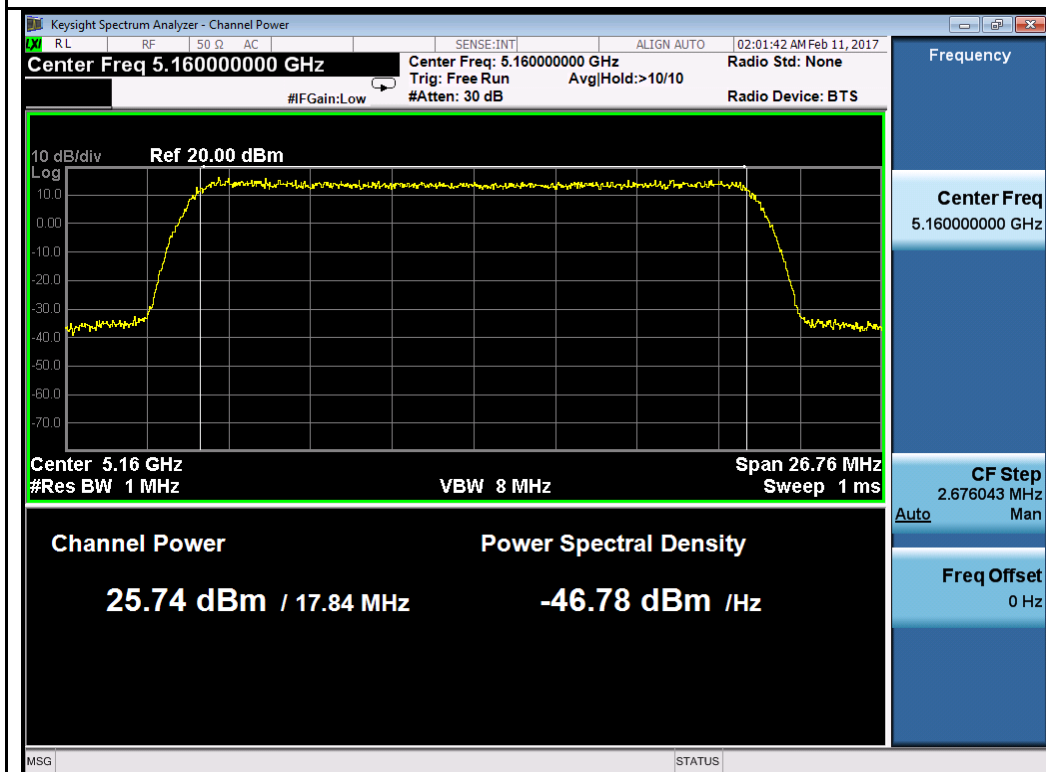

64QAM-5160MHz

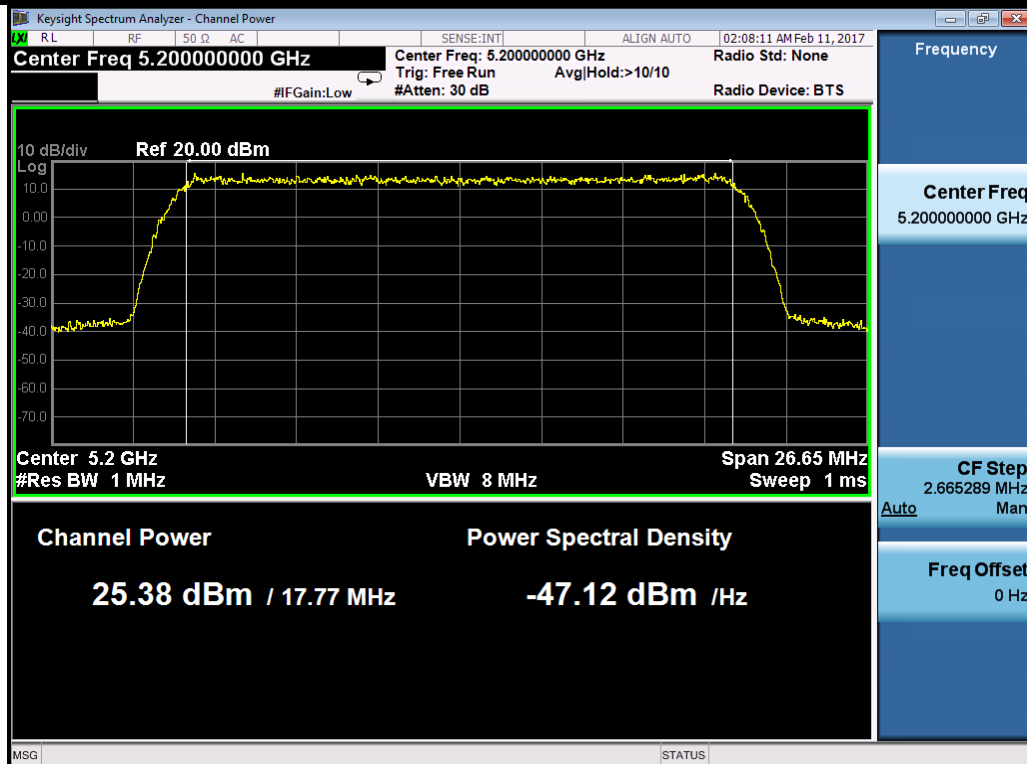


64QAM-5200MHz

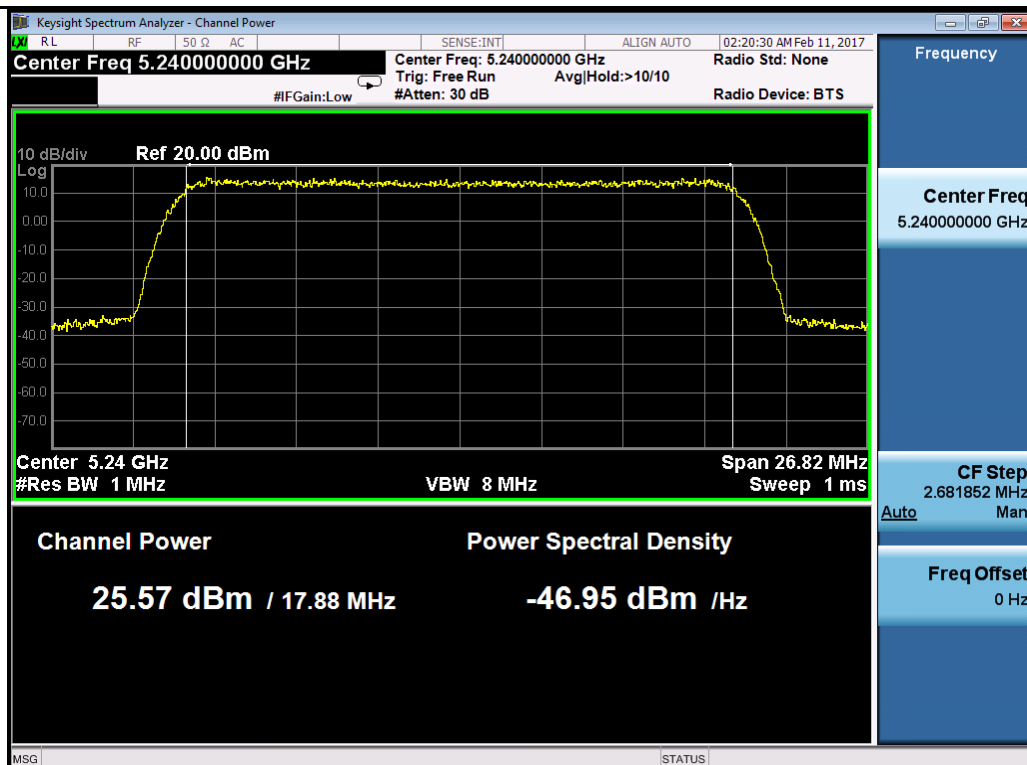


64QAM-5240MHz


Chain 2:

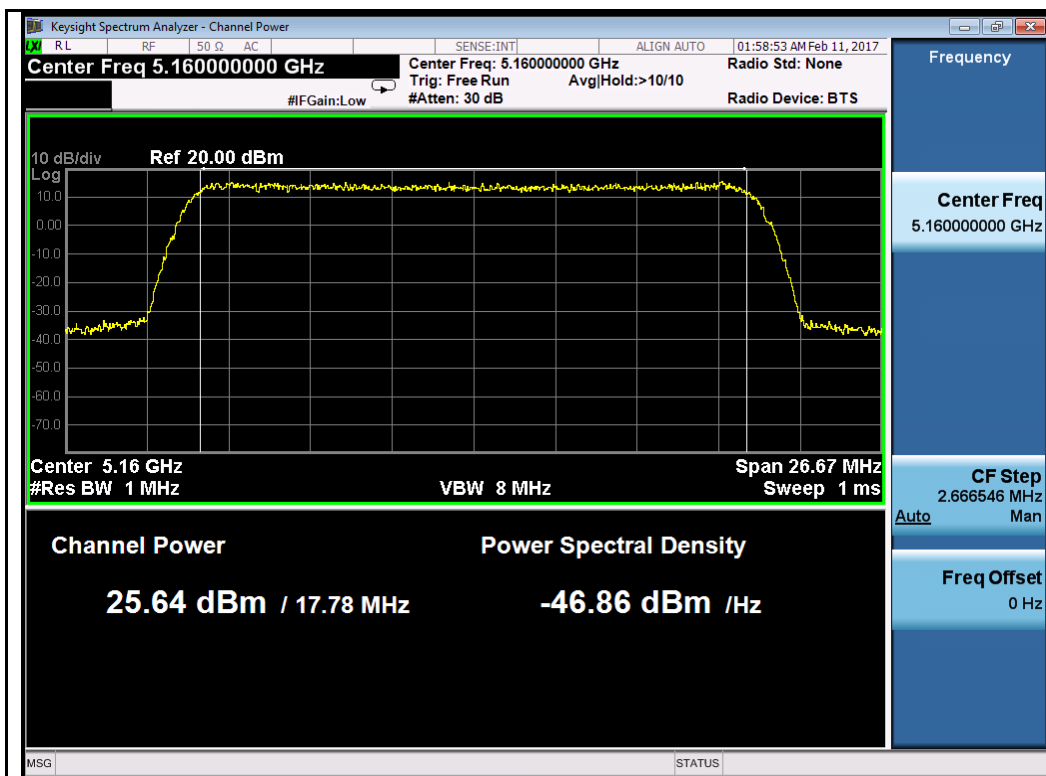


QPSK-5160MHz

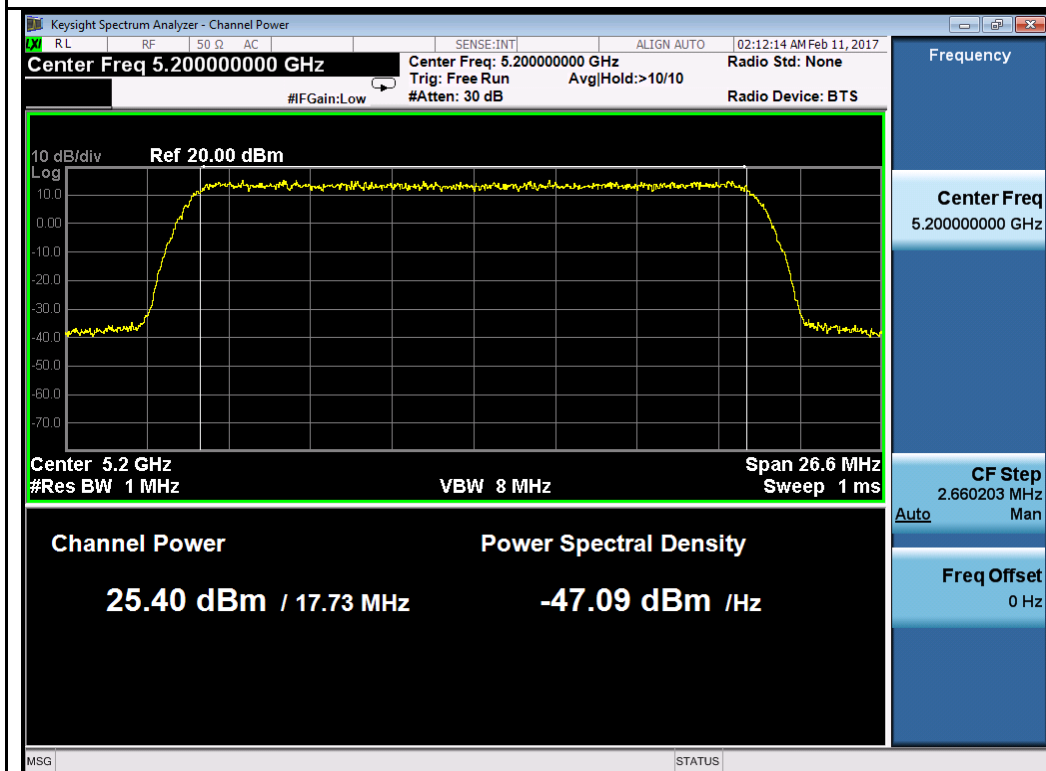


QPSK-5200MHz

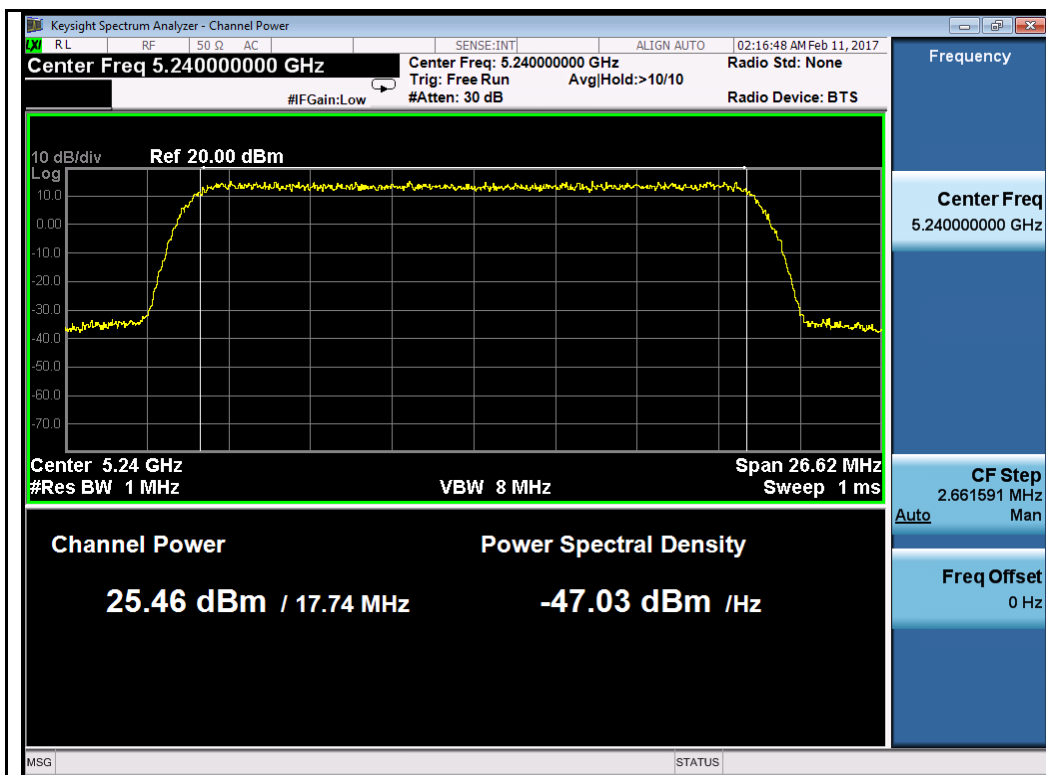


QPSK-5240MHz

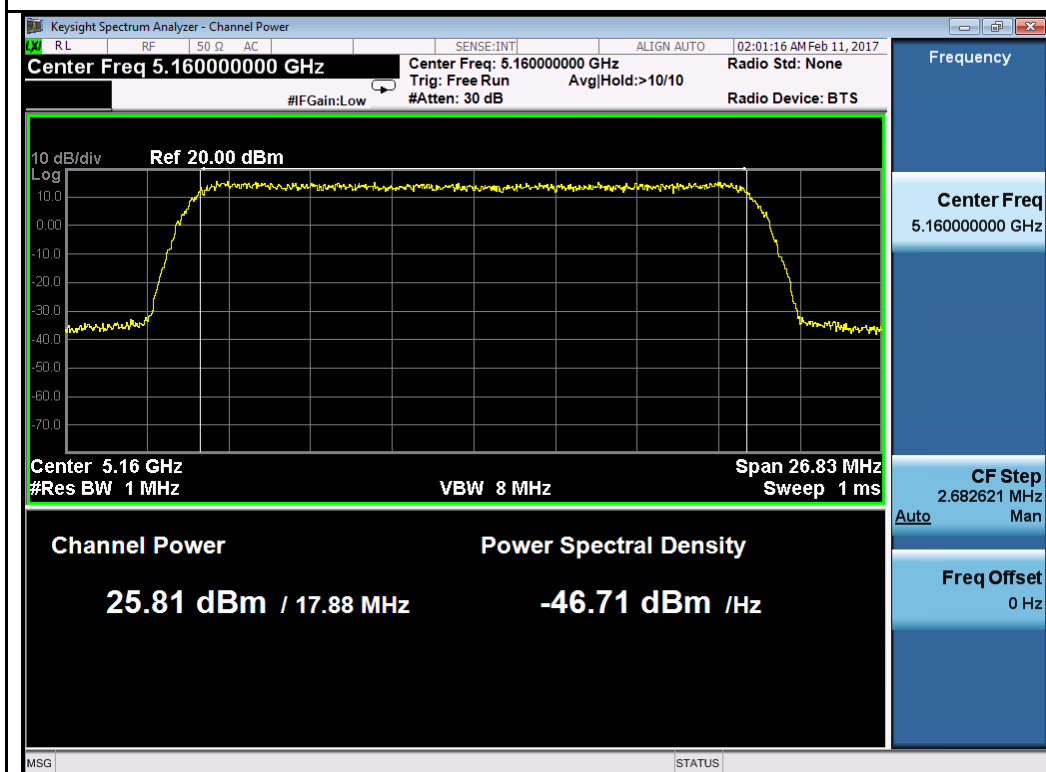

64QAM-5160MHz

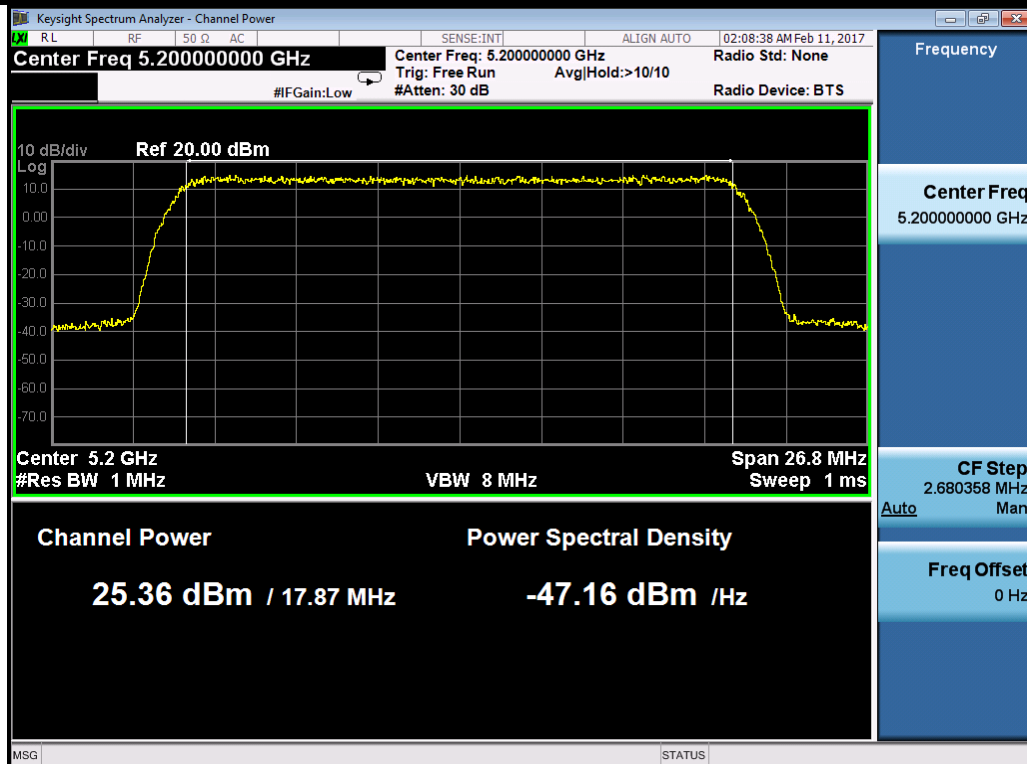


64QAM-5200MHz

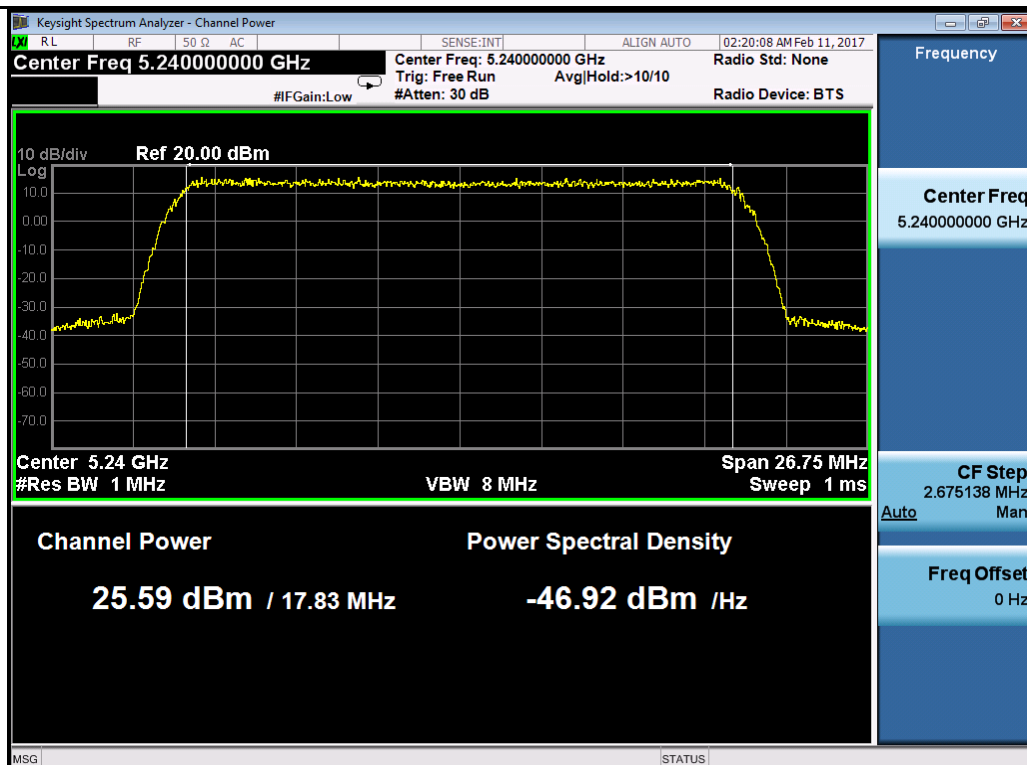


64QAM-5240MHz

40MHz
Chain 1:

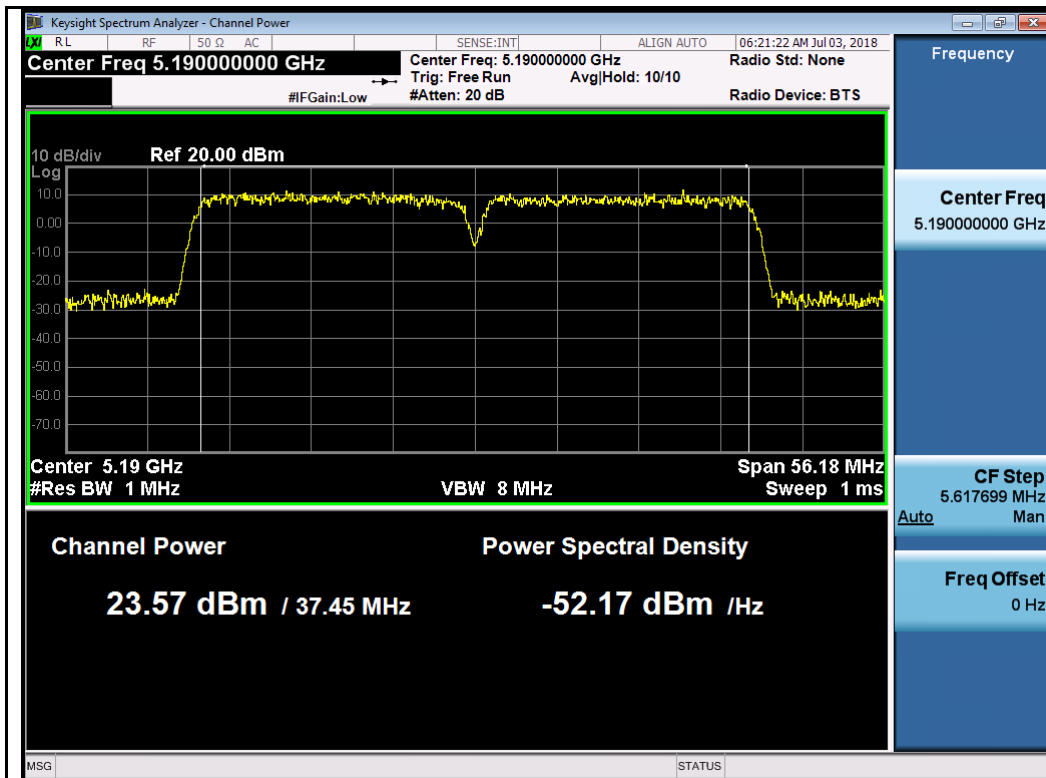


64QAM-5190MHz

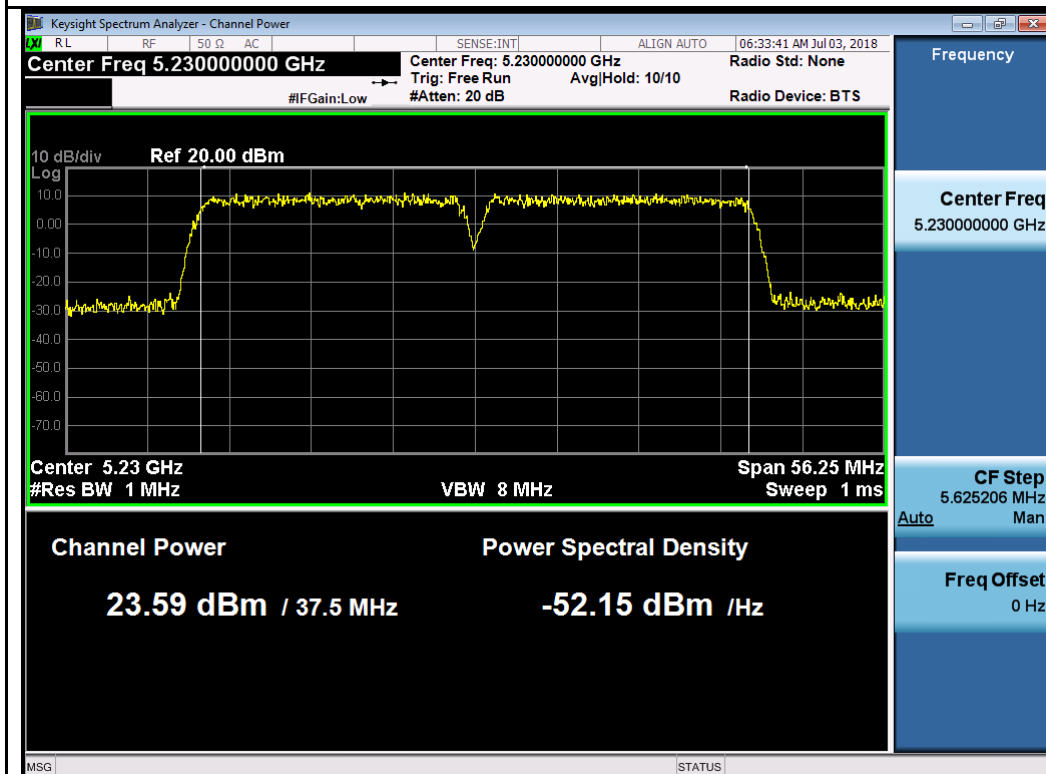


64QAM-5230MHz

Chain 2:

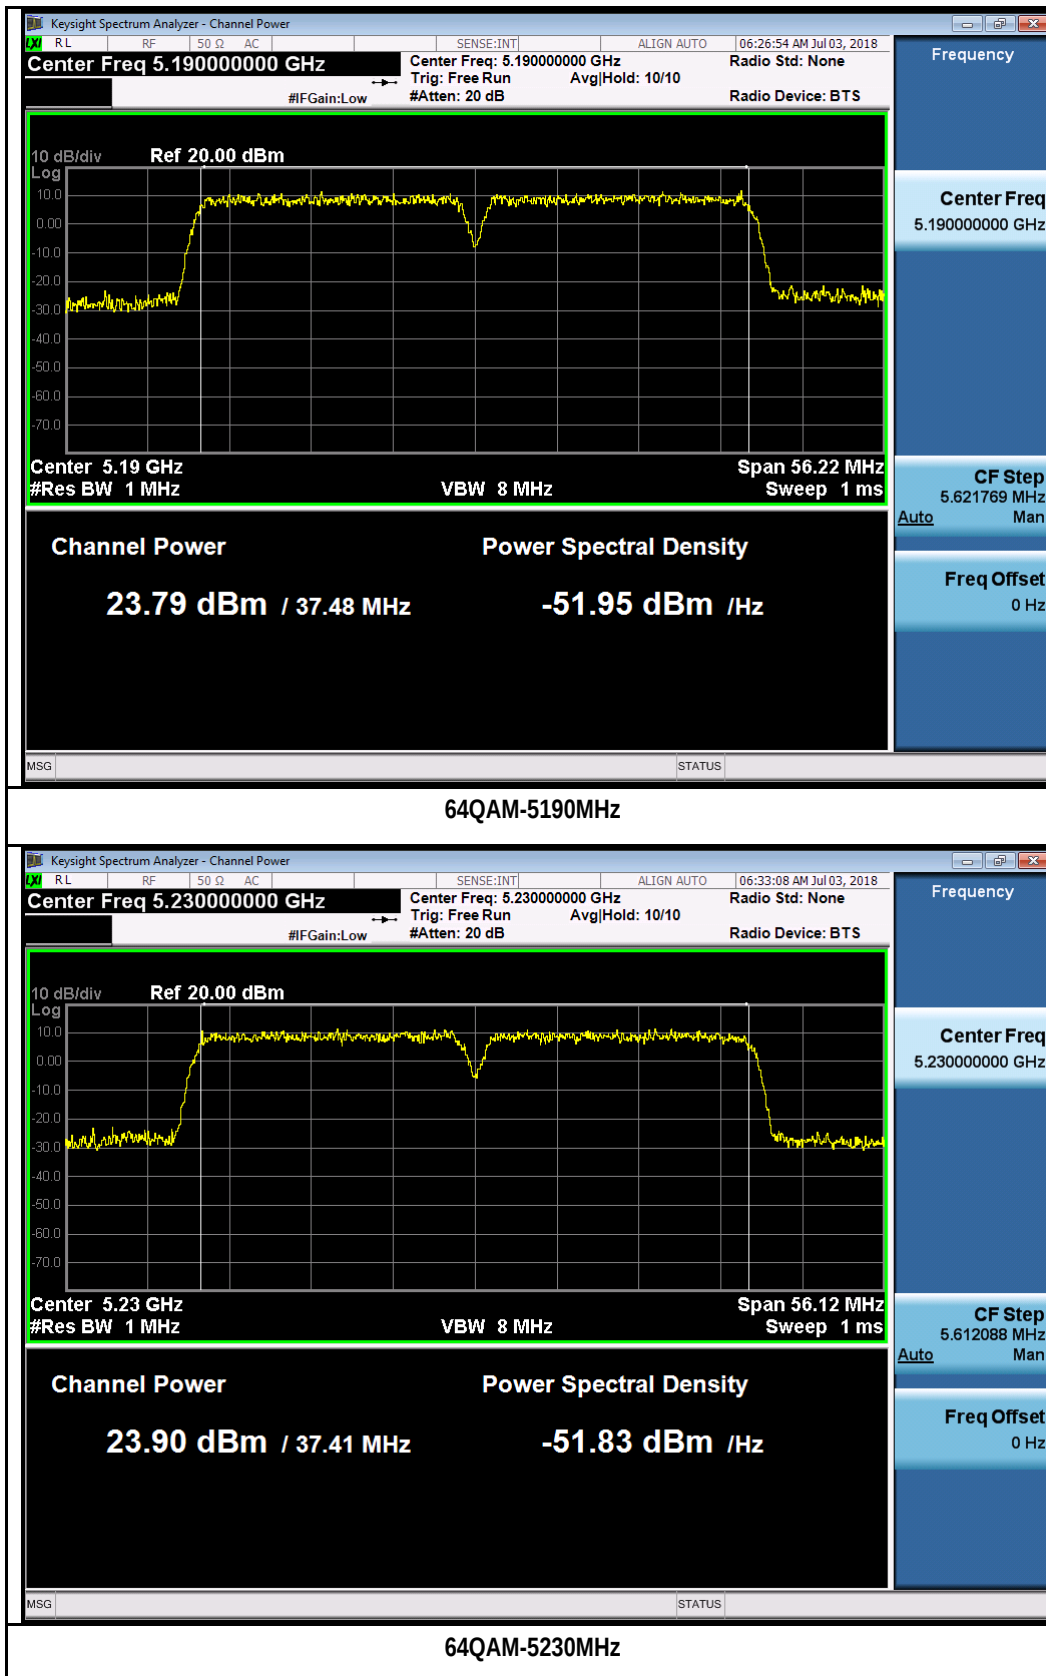


Test Plot for W58 20MHz:


Chain 1:

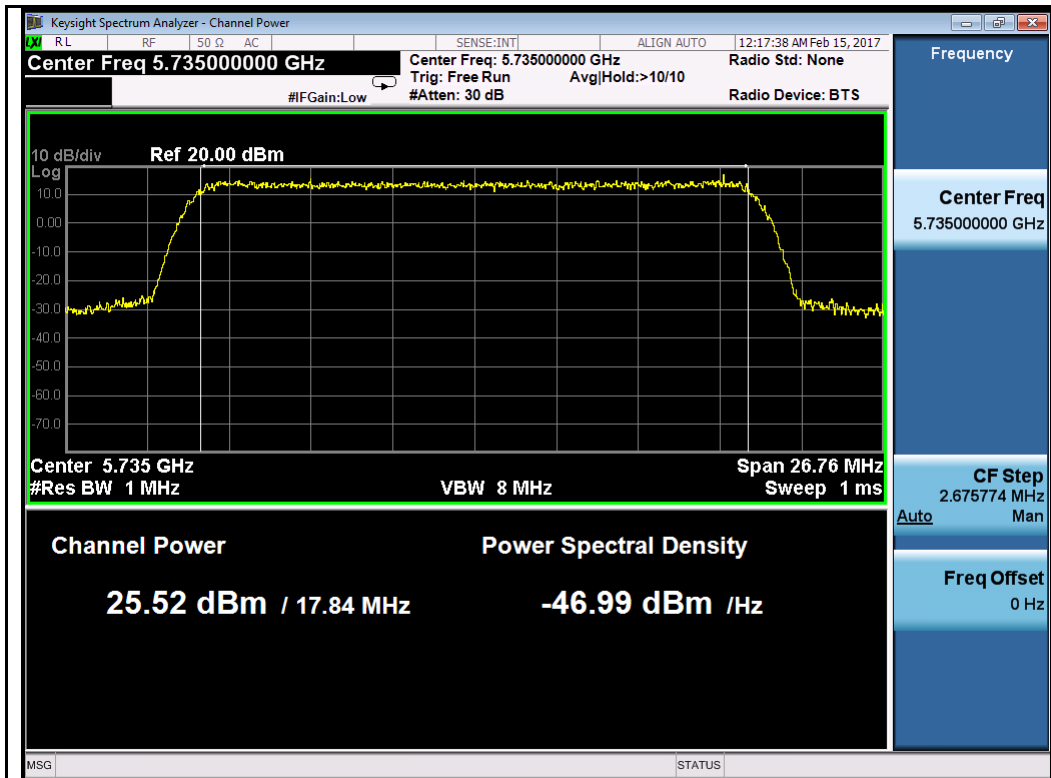


QPSK-5735MHz

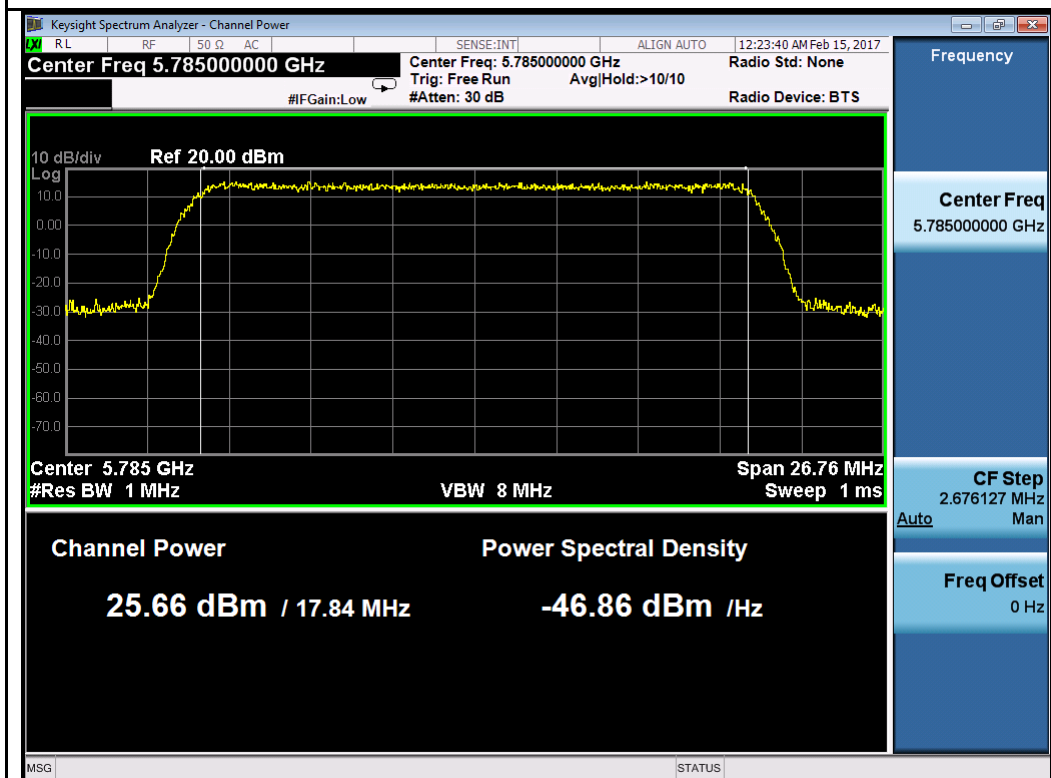


QPSK-5785MHz

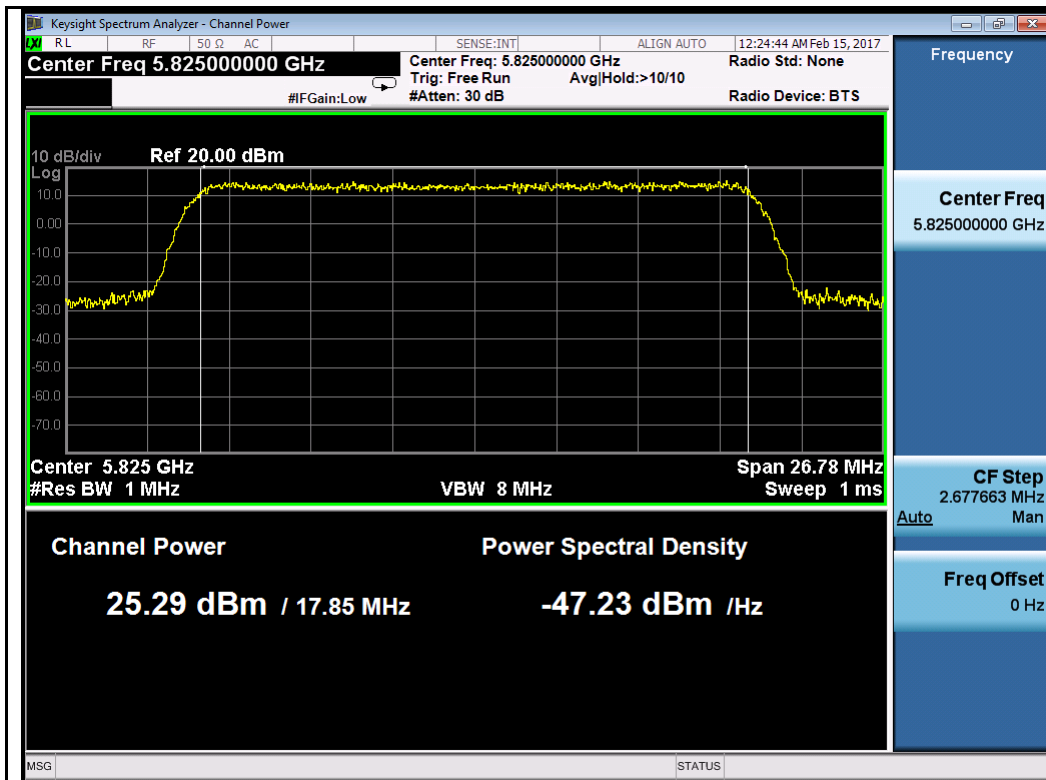


QPSK-5825MHz

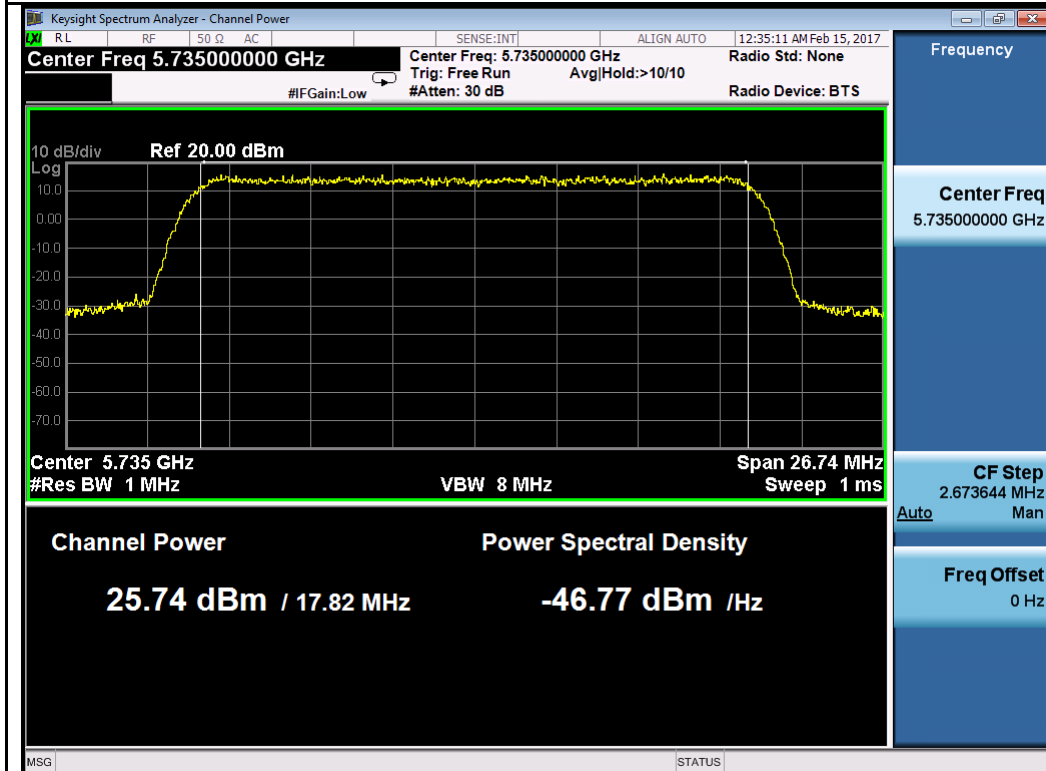

64QAM-5735MHz

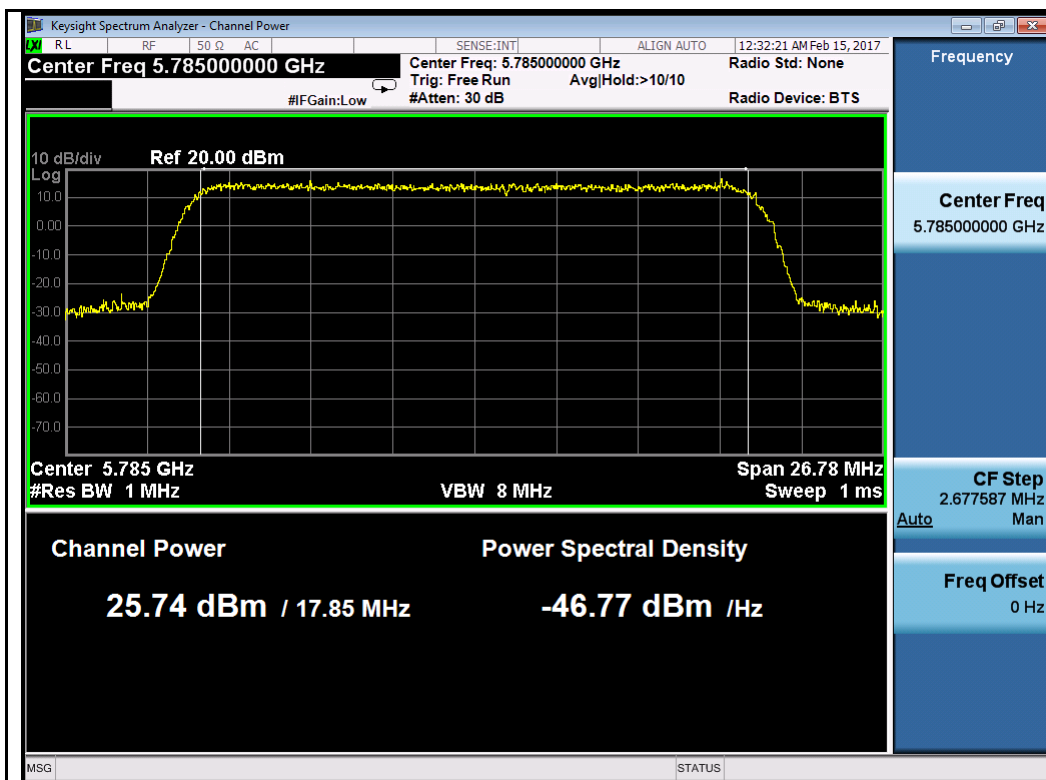


64QAM-5785MHz

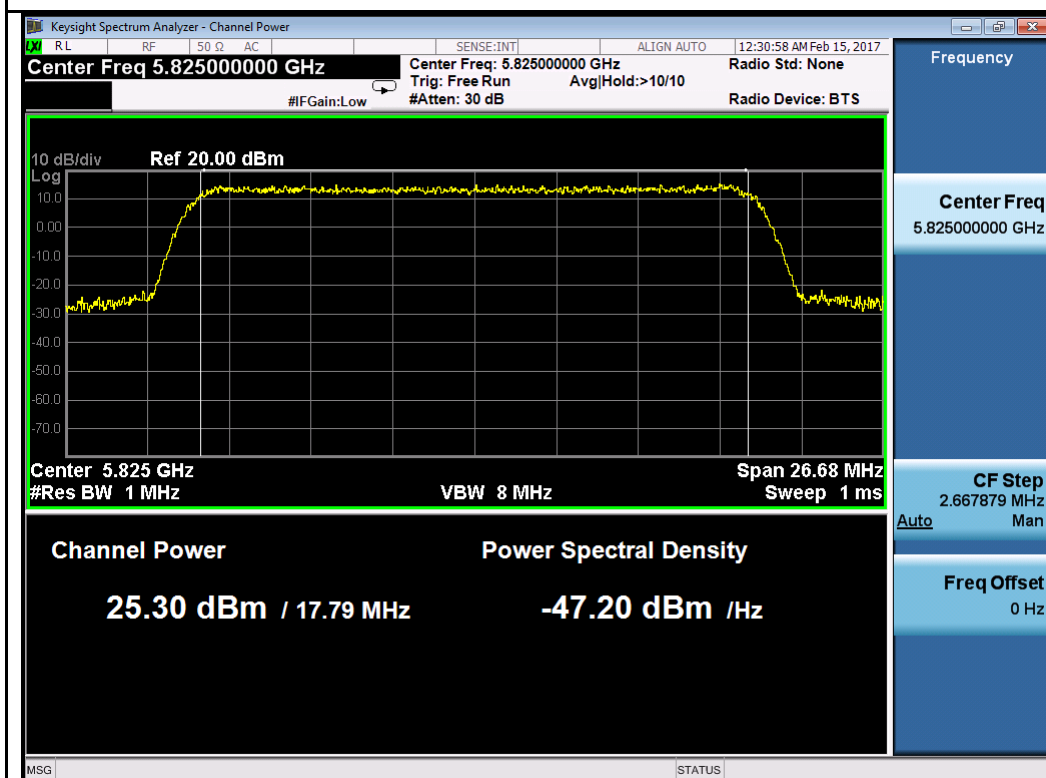


64QAM-5825MHz


Chain 2:

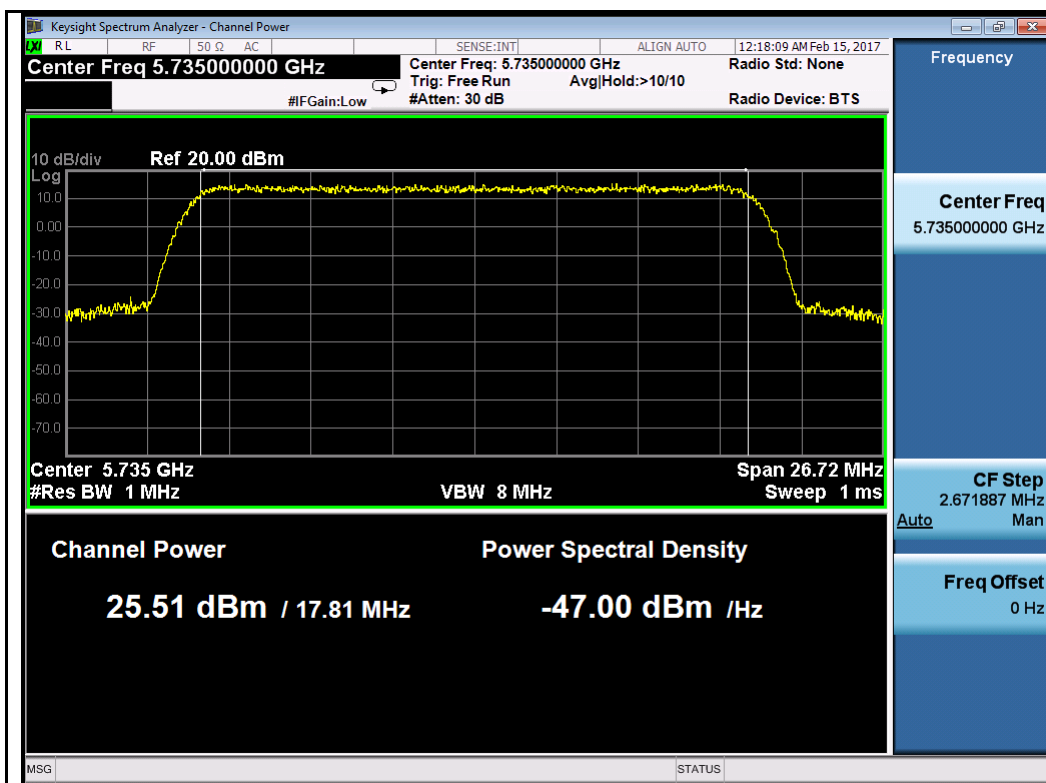


QPSK-5735MHz

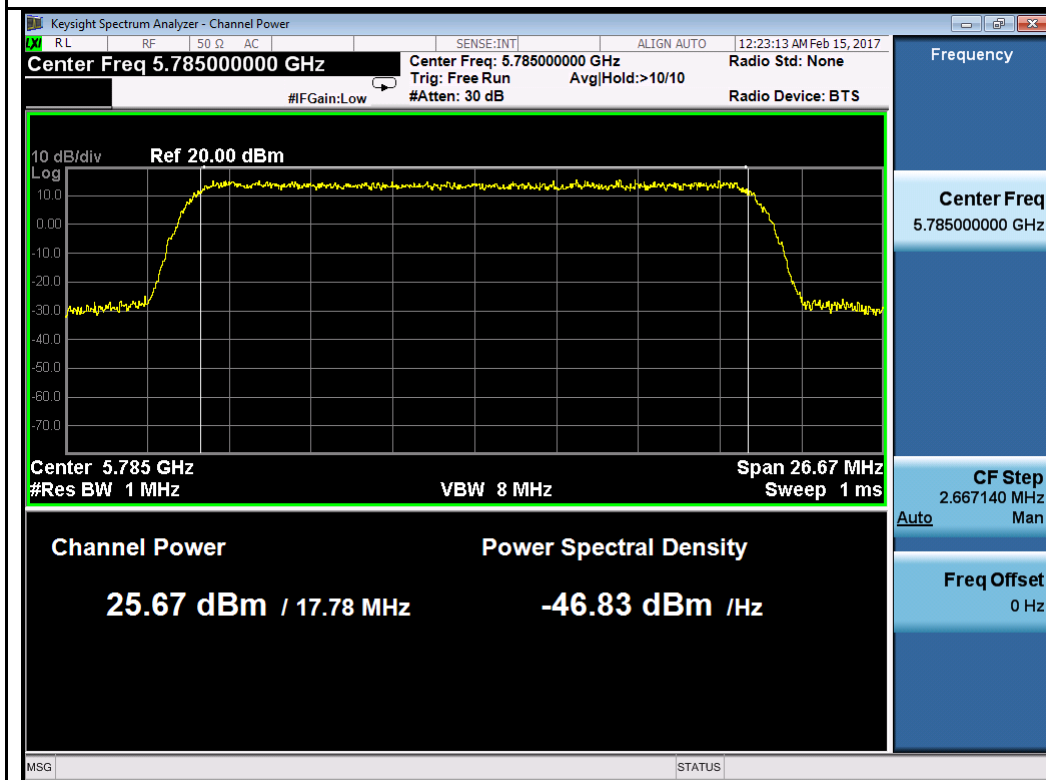


QPSK-5785MHz

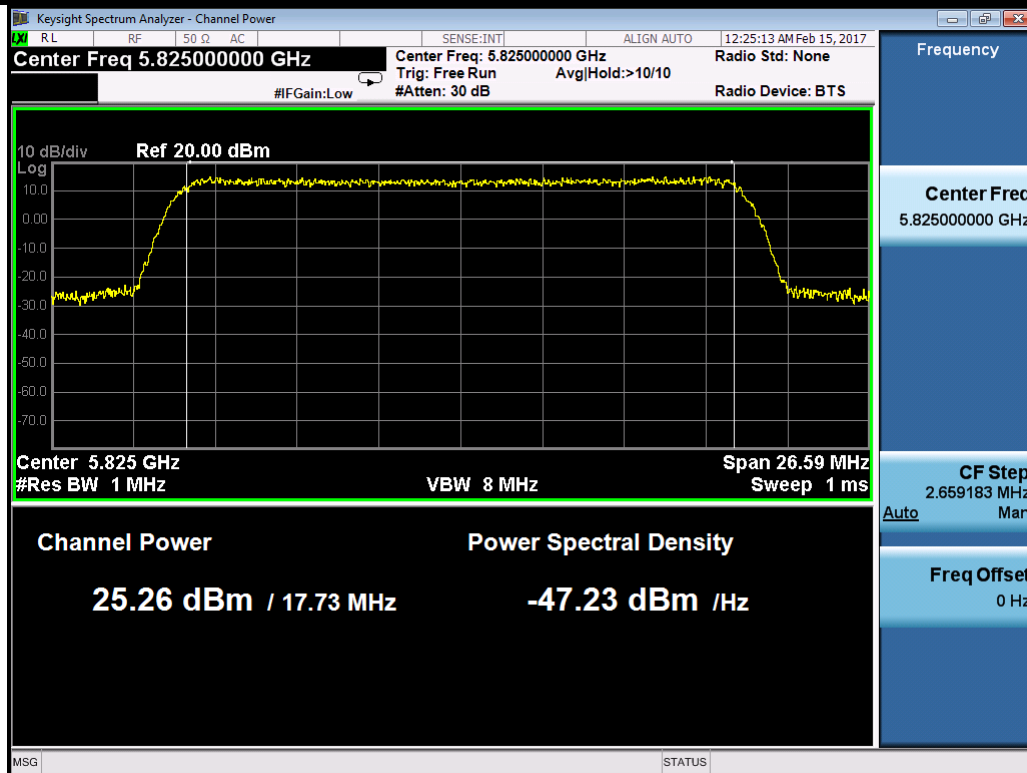


QPSK-5825MHz

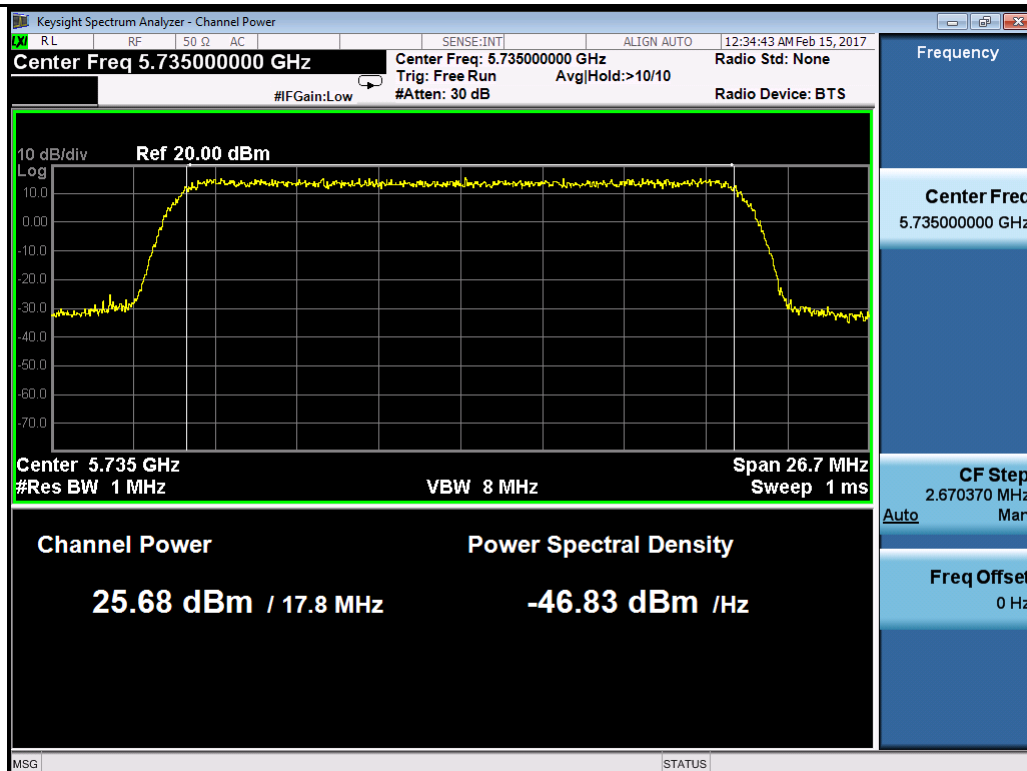

64QAM-5735MHz

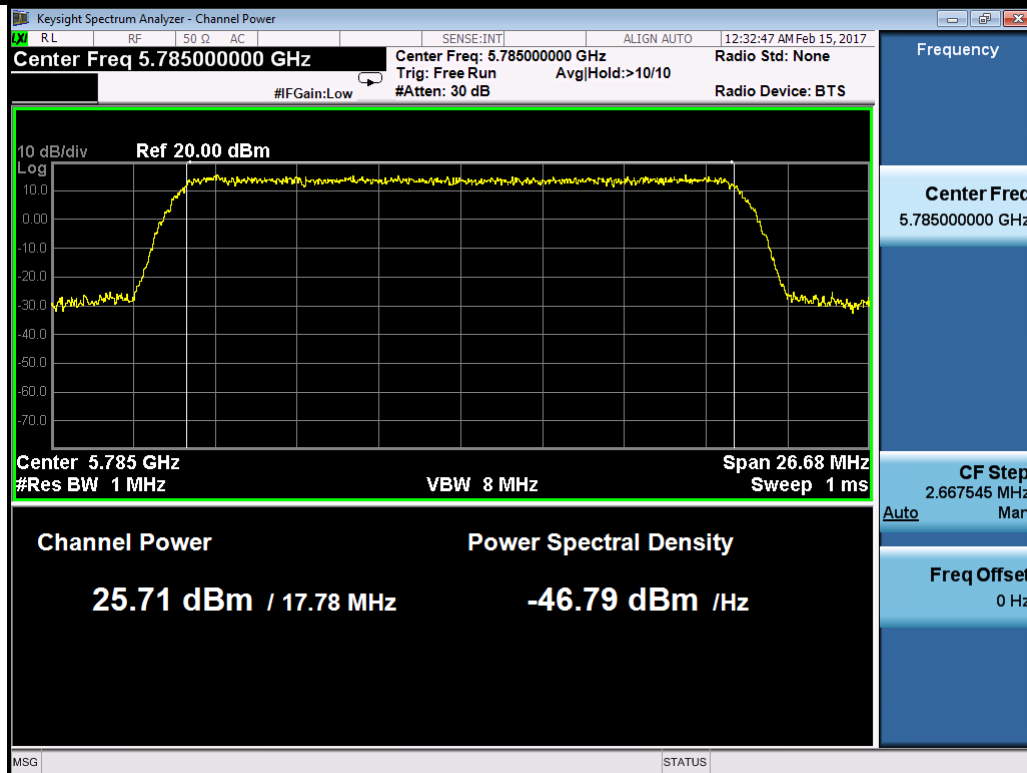


64QAM-5785MHz

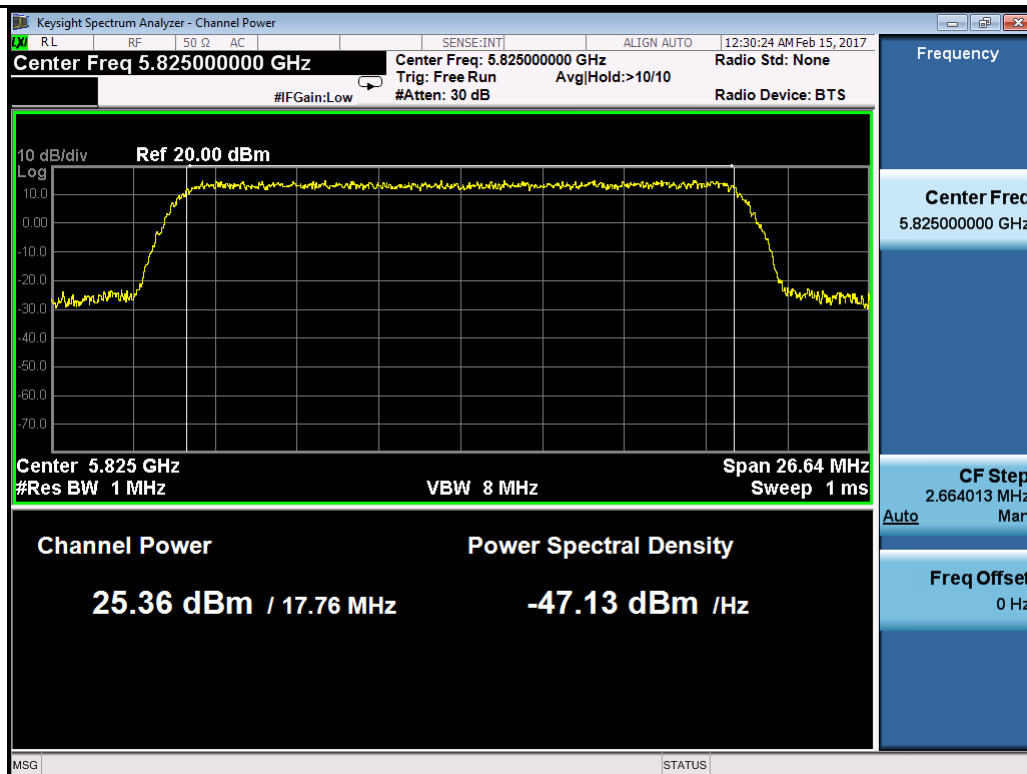


64QAM-5825MHz

Test Plot for W58 40MHz:

Chain 1:

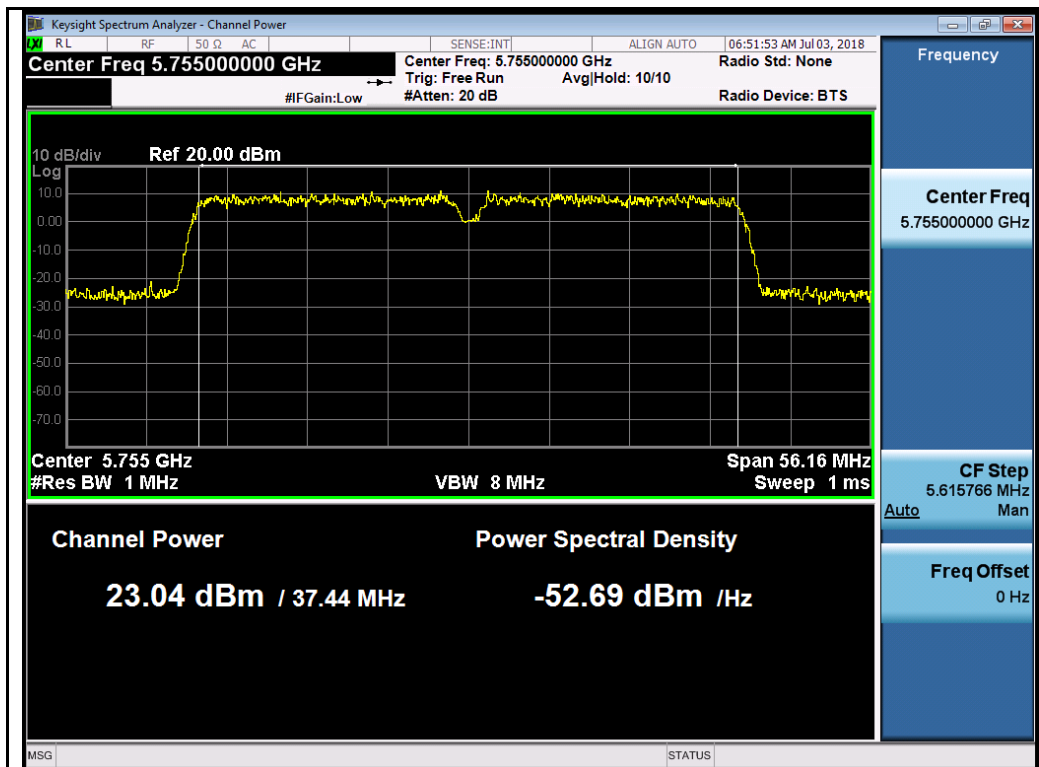


64QAM-5755MHz

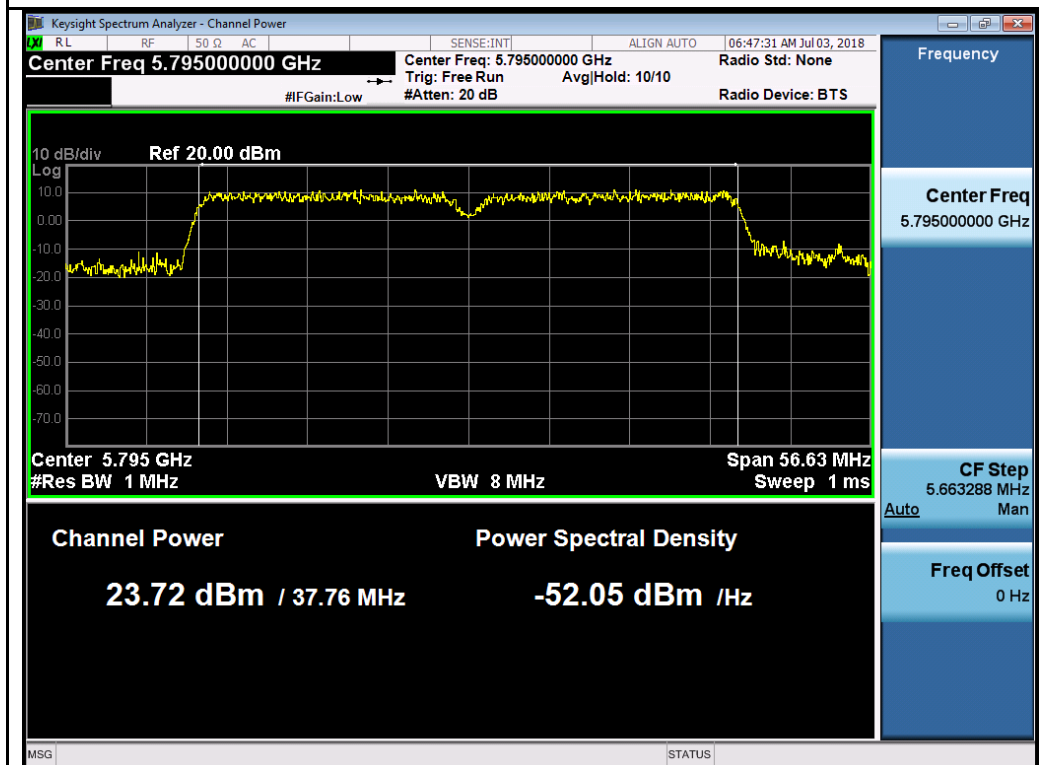


64QAM-5795MHz

Chain 2:

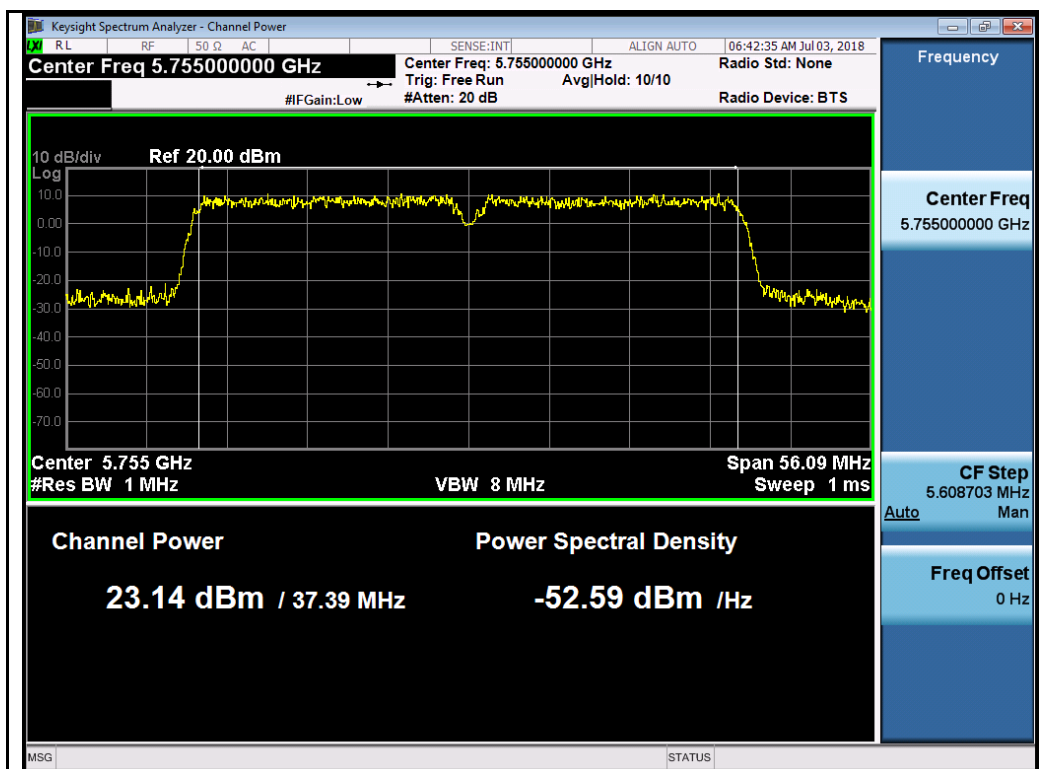


64QAM-5755MHz

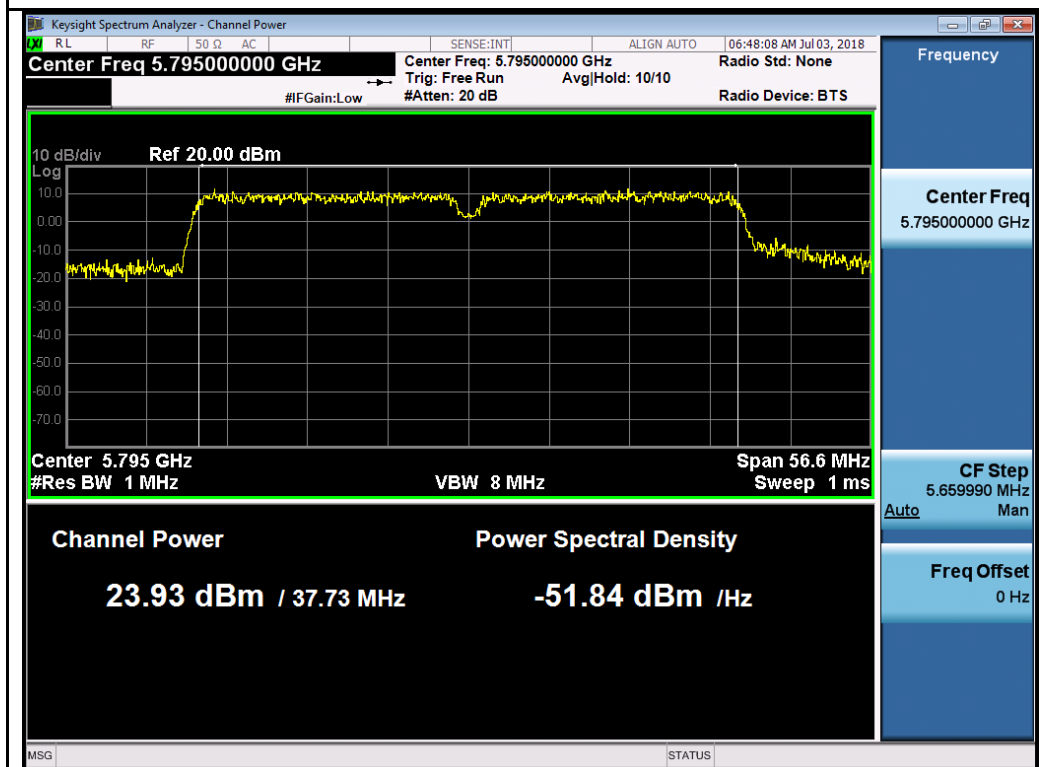


64QAM-5795MHz

Test Plot for W58 40MHz:

Chain 1:

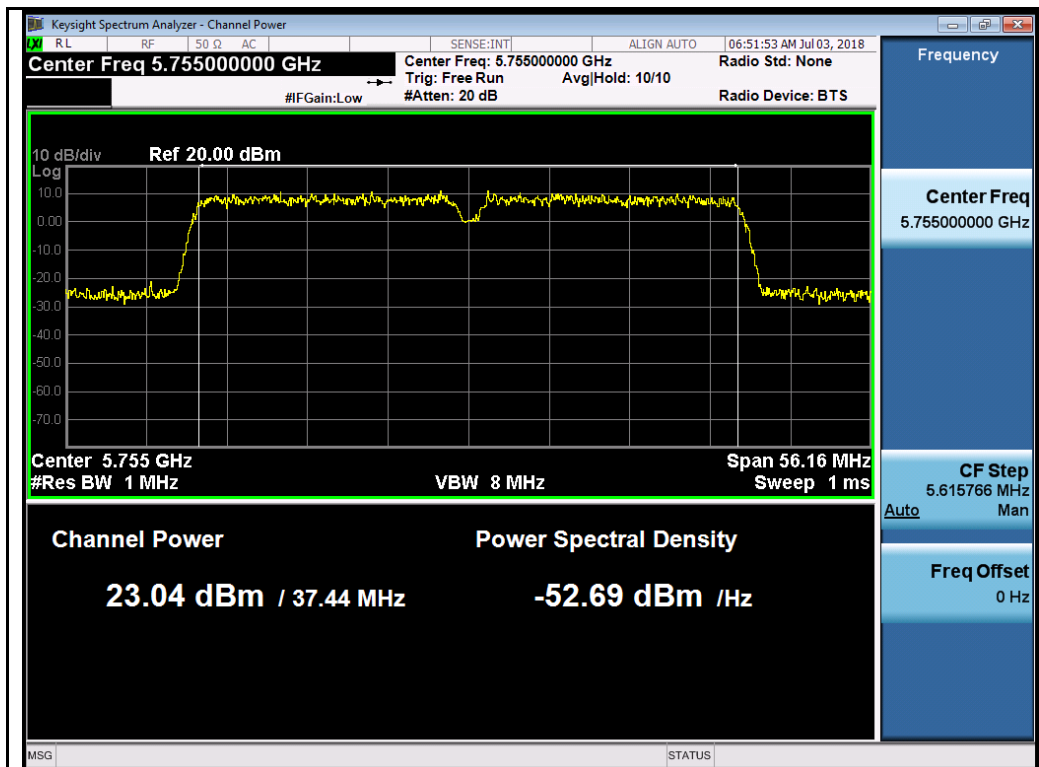


64QAM-5755MHz

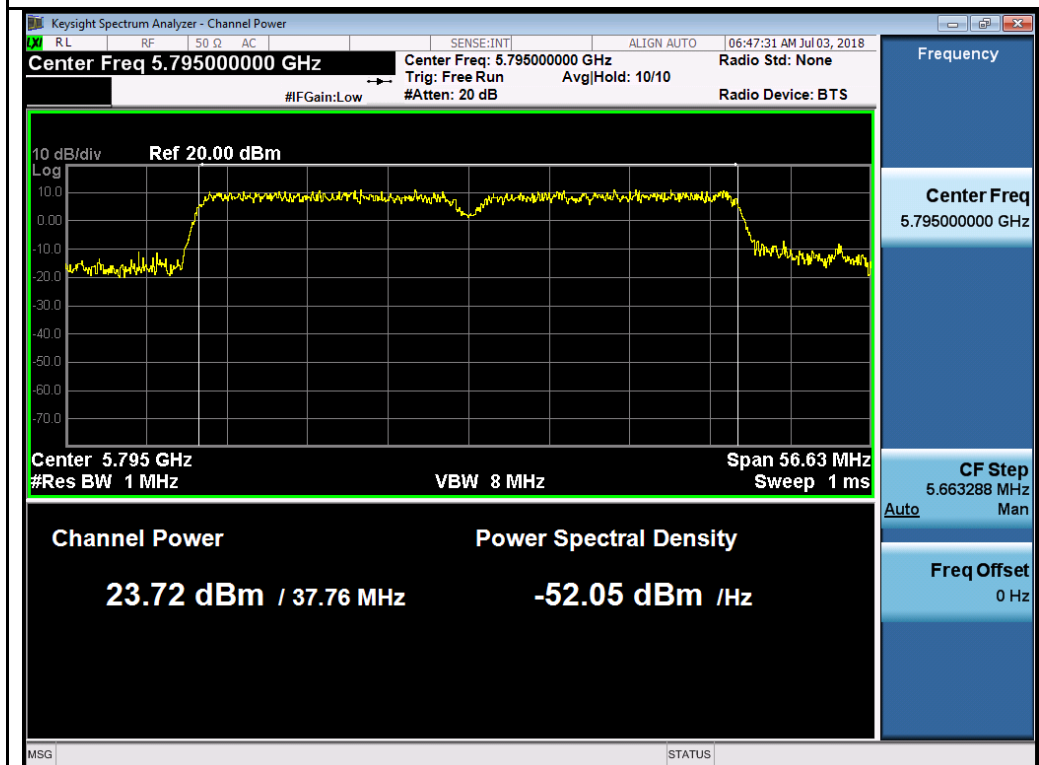


64QAM-5795MHz

Chain 2:

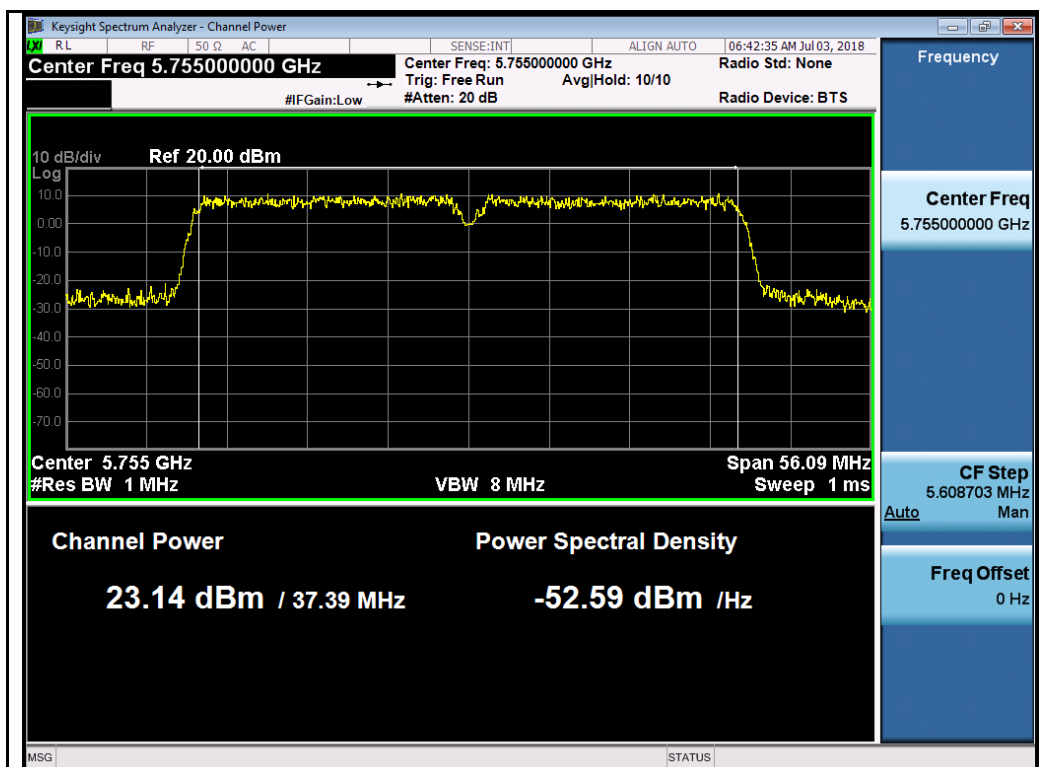

64QAM-5755MHz

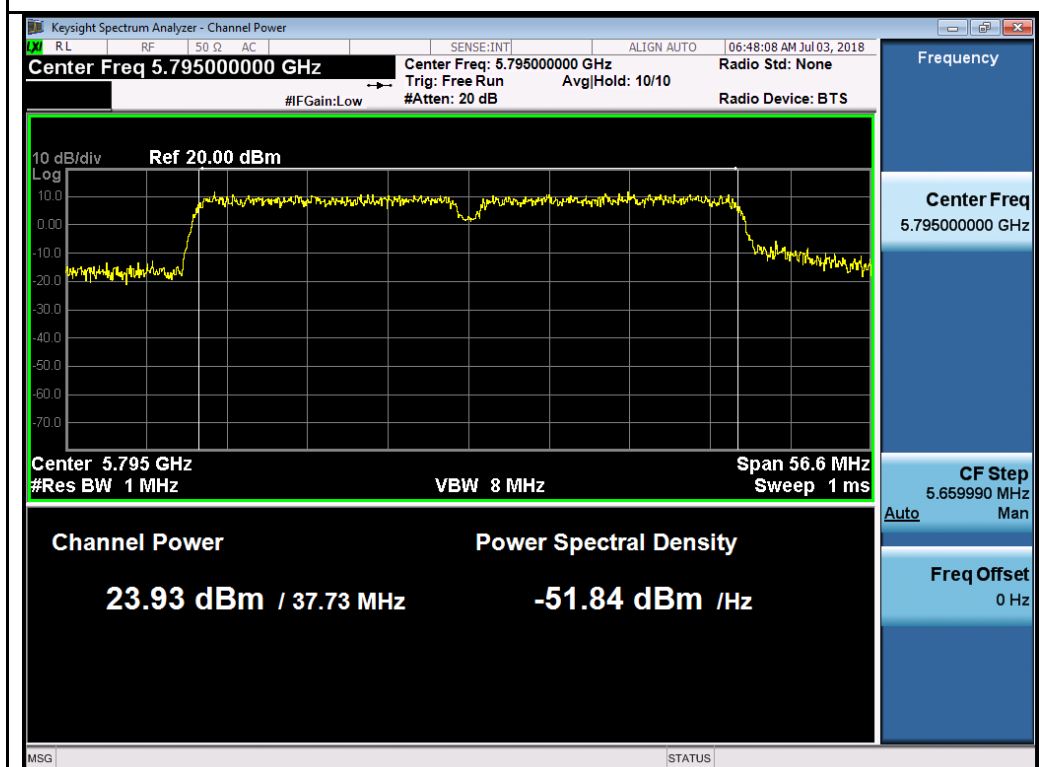

64QAM-5795MHz

10.4 Peak Spectral Density

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.407	a)(1)(i)	For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.	☒
	a)(3)	For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.	☒
Test Setup			
Test Procedure	789033 D02 General UNII Test Procedures New Rules v02, II.F. Method SA-1 <u>Maximum spectral density measurement procedure</u> - Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal. - Set RBW = 1 MHz - Set VBW ≥ 3 MHz - Detector = RMS. - Sweep time = auto couple. - Trace mode = max hold. - Trace average at least 100 traces in power averaging - Use the peak marker function to determine the maximum amplitude level within the RBW. Apply correction to the result if different RBW is used.		
Test Date	01/18/2017 – 02/10/2017	Environmental condition	Temperature 22°C Relative Humidity 42% Atmospheric Pressure 1020mbar
Remark	Two antennas are used for this band. The highest directional gain of the antenna is 6dBi, no limit adjust is required.		
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Chen Ge at RF test site.

PSD measurement result

20MHz:

Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/MHz)			Limit (dBm/MHz)	Result
				Chain 1	Chain 2	Combined PSD		
PSD	QPSK	5160	Low	13.14	13.60	16.39	17	Pass
		5200	Mid	12.86	12.87	15.88	17	Pass
		5240	High	12.85	12.87	15.87	17	Pass
	64QAM	5160	Low	13.11	13.32	16.23	17	Pass
		5200	Mid	12.85	12.93	15.90	17	Pass
		5240	High	13.10	13.31	16.22	17	Pass


Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/100kHz)			Combined PSD(dBm/500kHz)	Limit (dBm/500kHz)	Result
				Chain 1	Chain 2	correction factor (dB)			
PSD	QPSK	5735	Low	4.38	4.83	6.99	14.61	30	Pass
		5785	Mid	4.64	5.09	6.99	14.87	30	Pass
		5825	High	4.65	4.24	6.99	14.45	30	Pass
	64QAM	5735	Low	4.93	4.64	6.99	14.79	30	Pass
		5785	Mid	4.61	5.02	6.99	14.82	30	Pass
		5825	High	4.40	4.73	6.99	14.57	30	Pass
Note	BW correction factor = 10log(500kHz/RBW), RBW was set to 100kHz during test.								


40MHz:

Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/MHz)			Limit (dBm/MHz)	Result
				Chain 1	Chain 2	Combined PSD		
PSD	64QAM	5190	Low	9.20	8.61	11.93	17	Pass
		5230	High	8.93	8.64	11.80	17	Pass


Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/100kHz)			Combined PSD(dBm/500kHz)	Limit (dBm/500kHz)	Result
				Chain 1	Chain 2	correction factor (dB)			
PSD	64QAM	5755	Low	-0.11	0.08	6.99	9.99	30	Pass
		5795	High	0.16	-0.30	6.99	9.94	30	Pass
Note	BW correction factor = 10log(500kHz/RBW), RBW was set to 100kHz during test.								

Test Plot for W52 20MHz:
Chain 1:

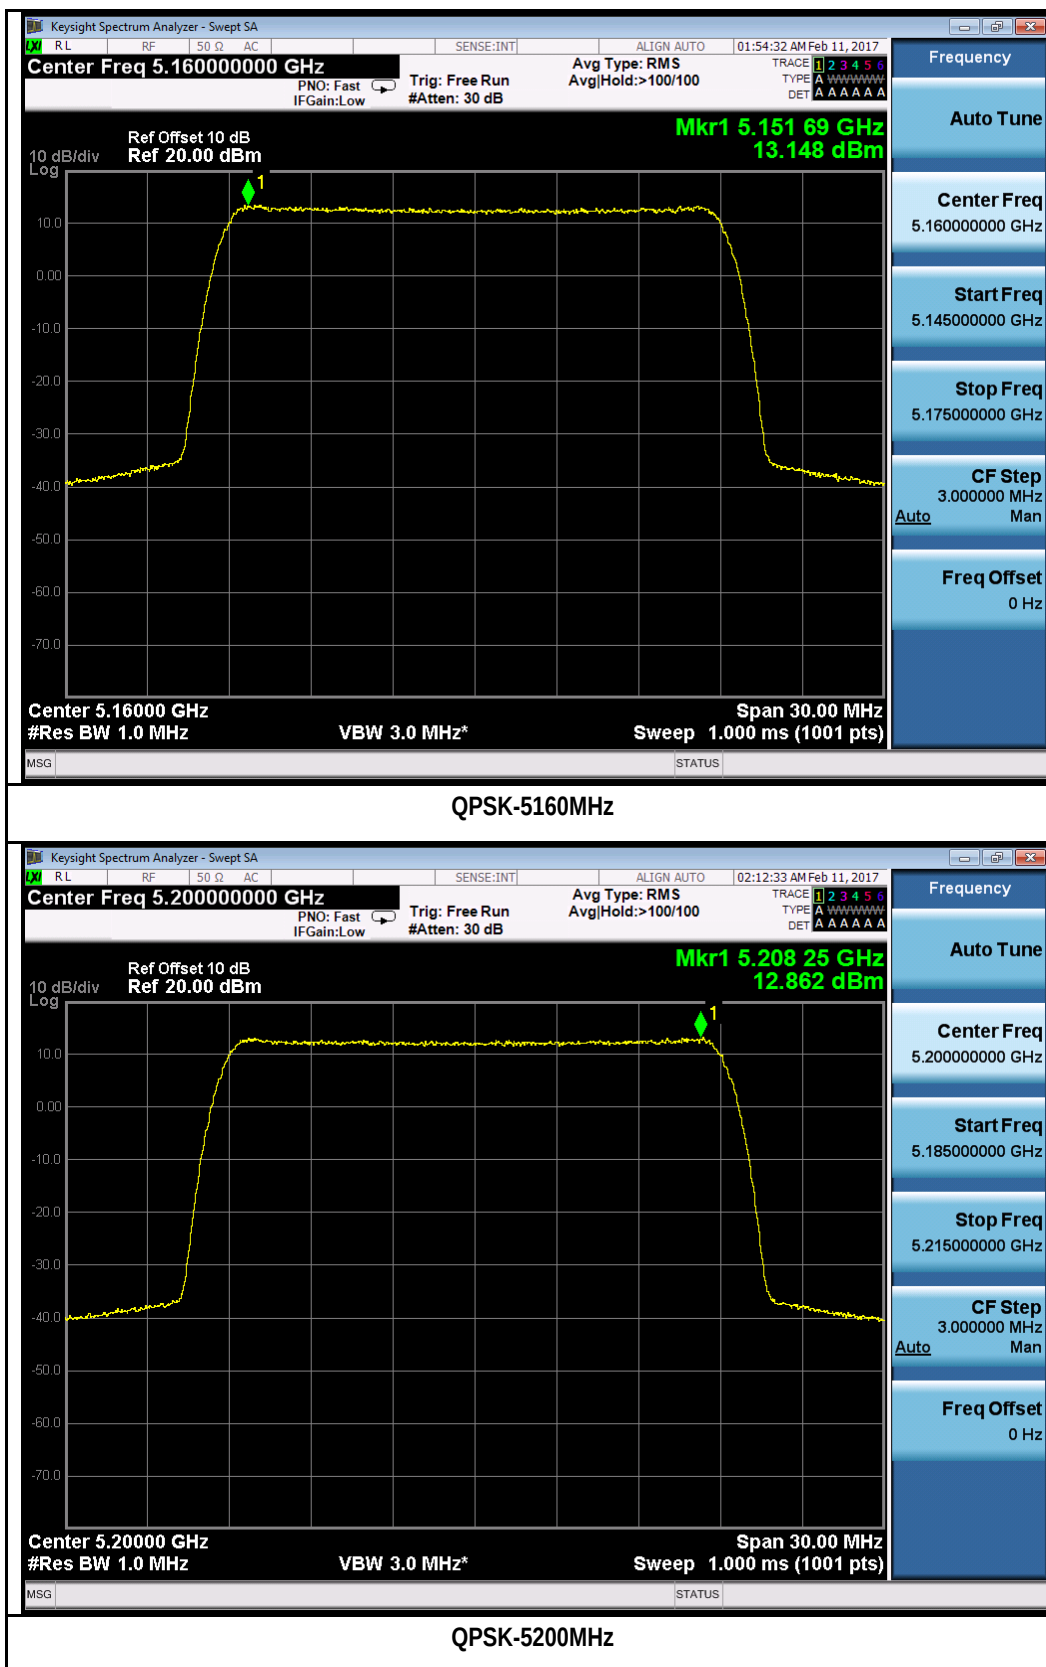


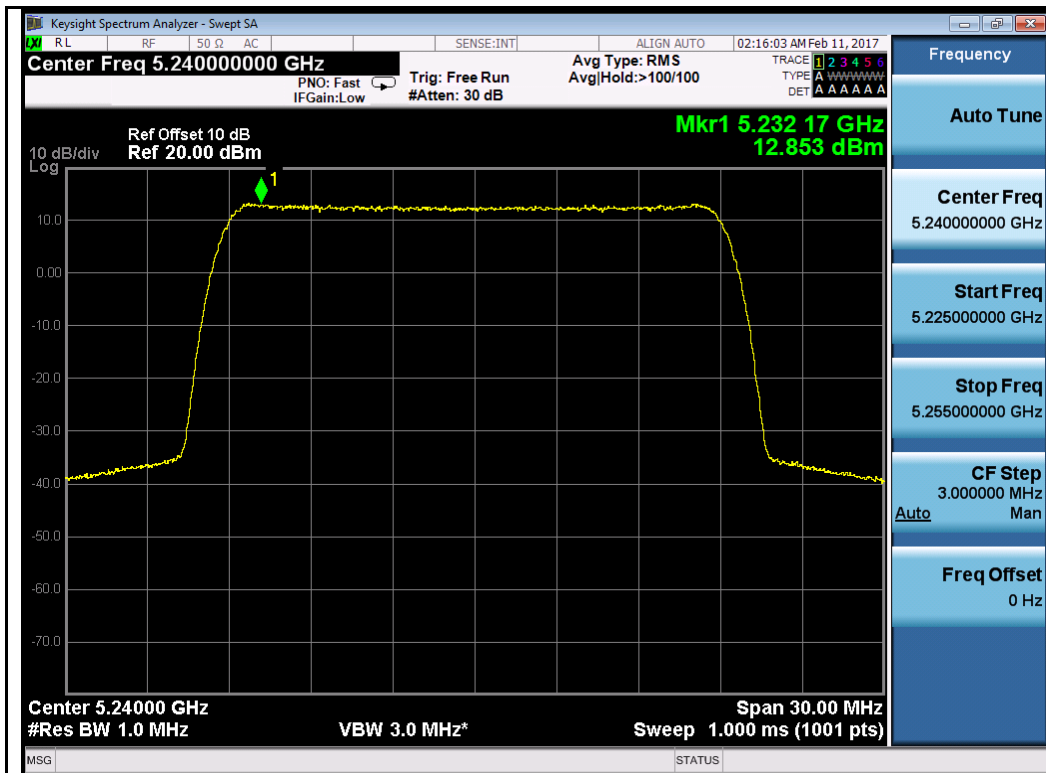


QPSK-5240MHz

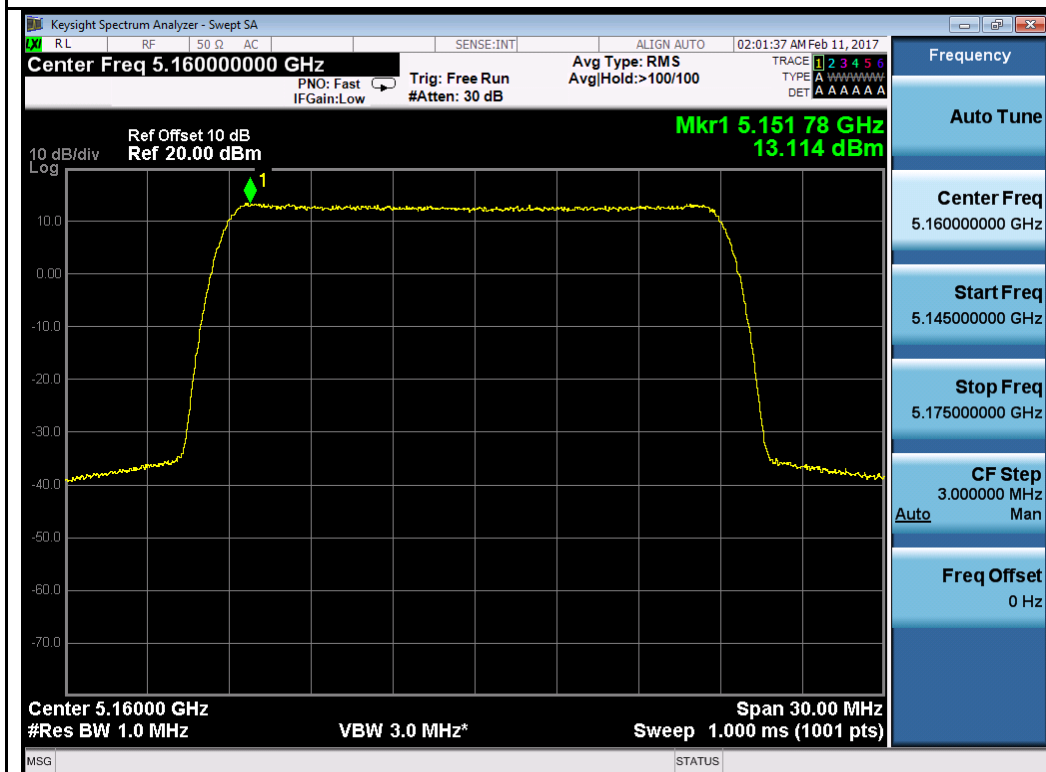

64QAM-5160MHz

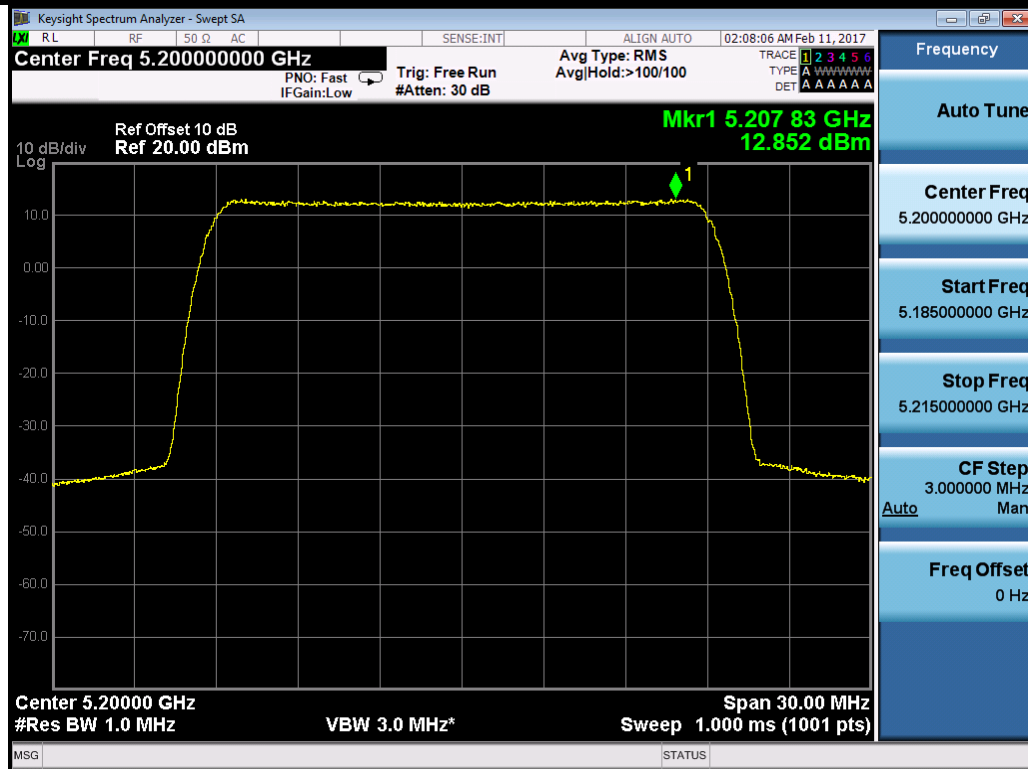


64QAM-5200MHz

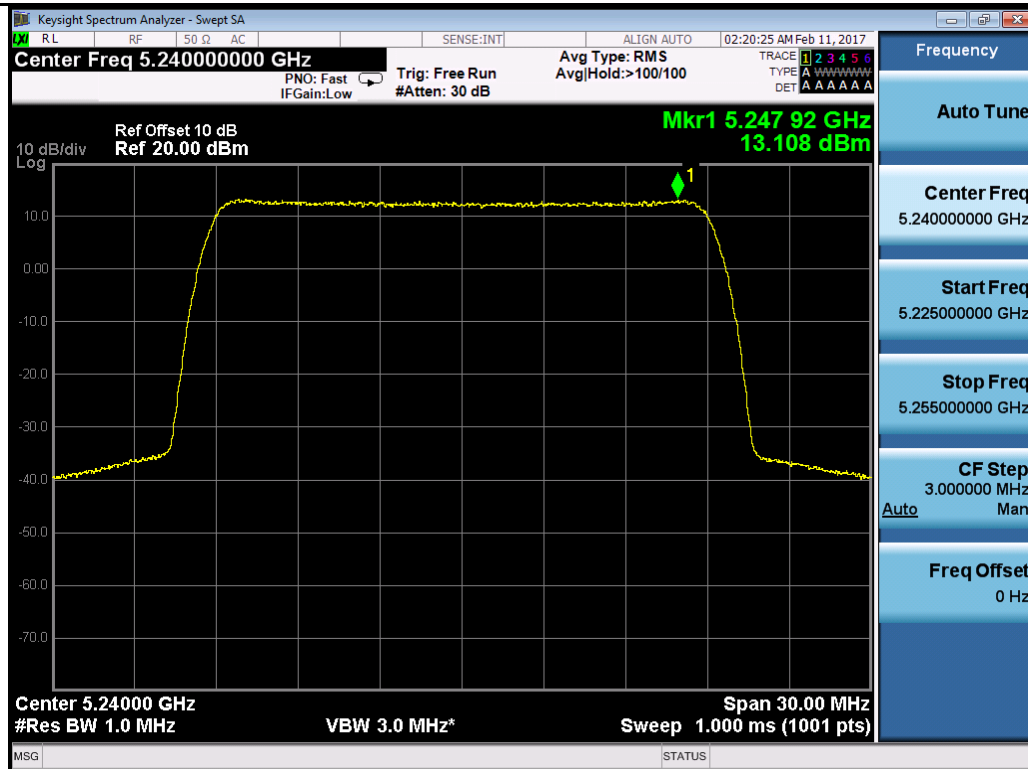


64QAM-5240MHz


Chain 2:

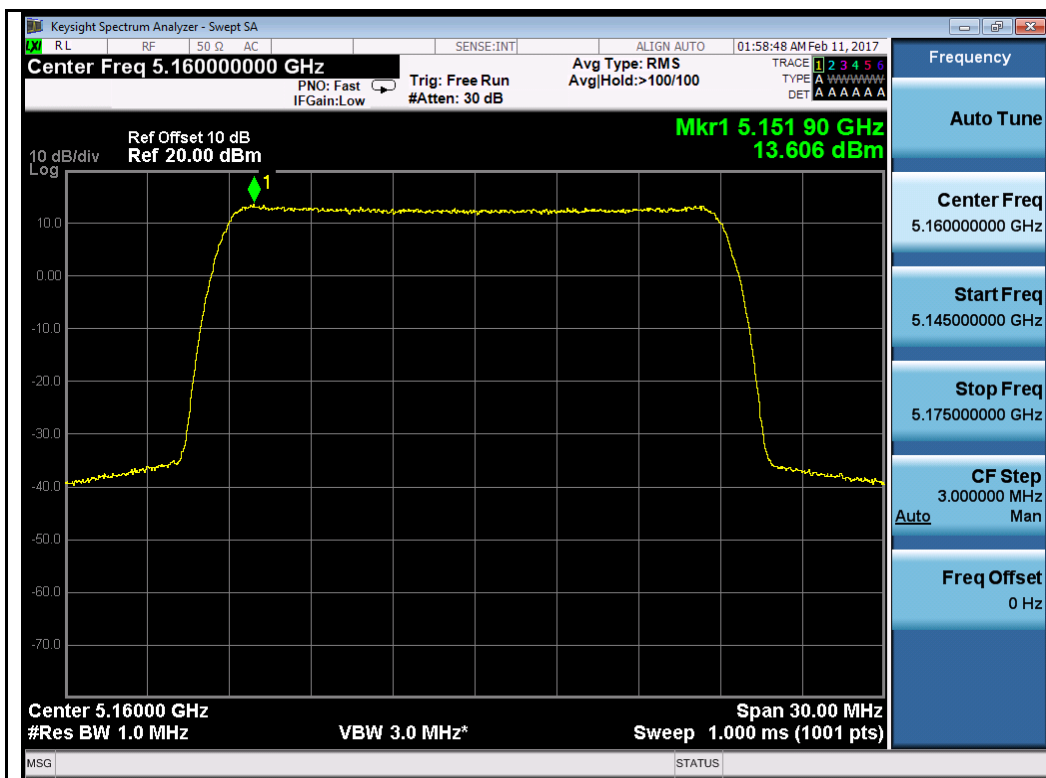


QPSK-5160MHz

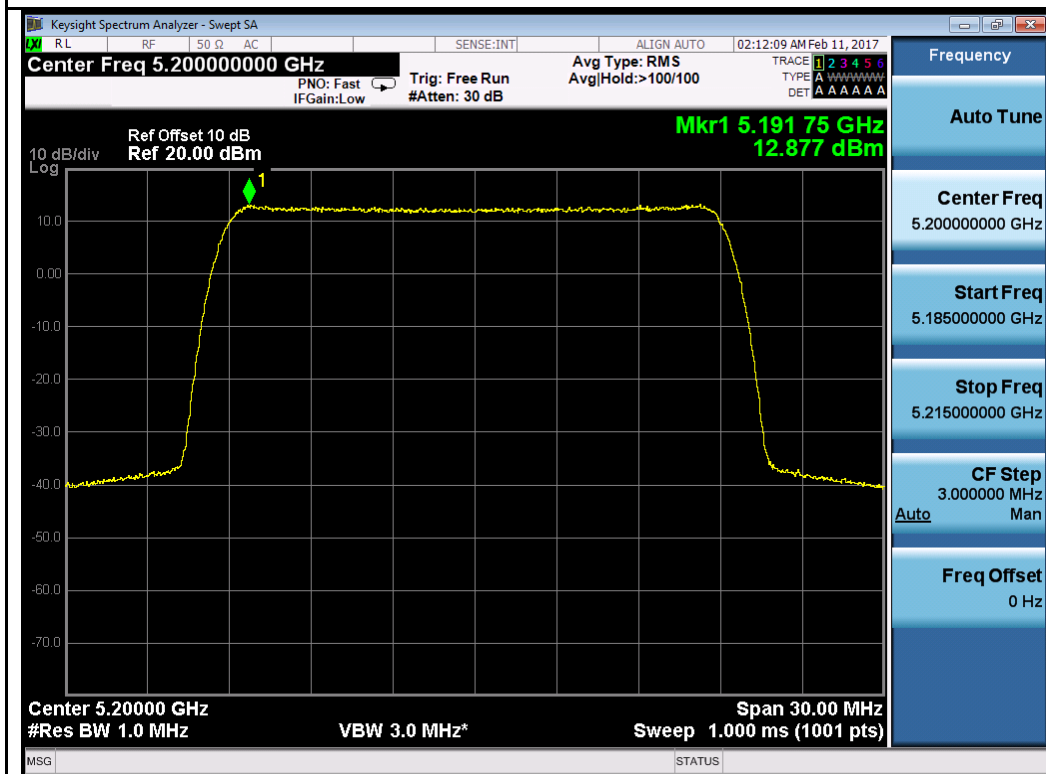


QPSK-5200MHz

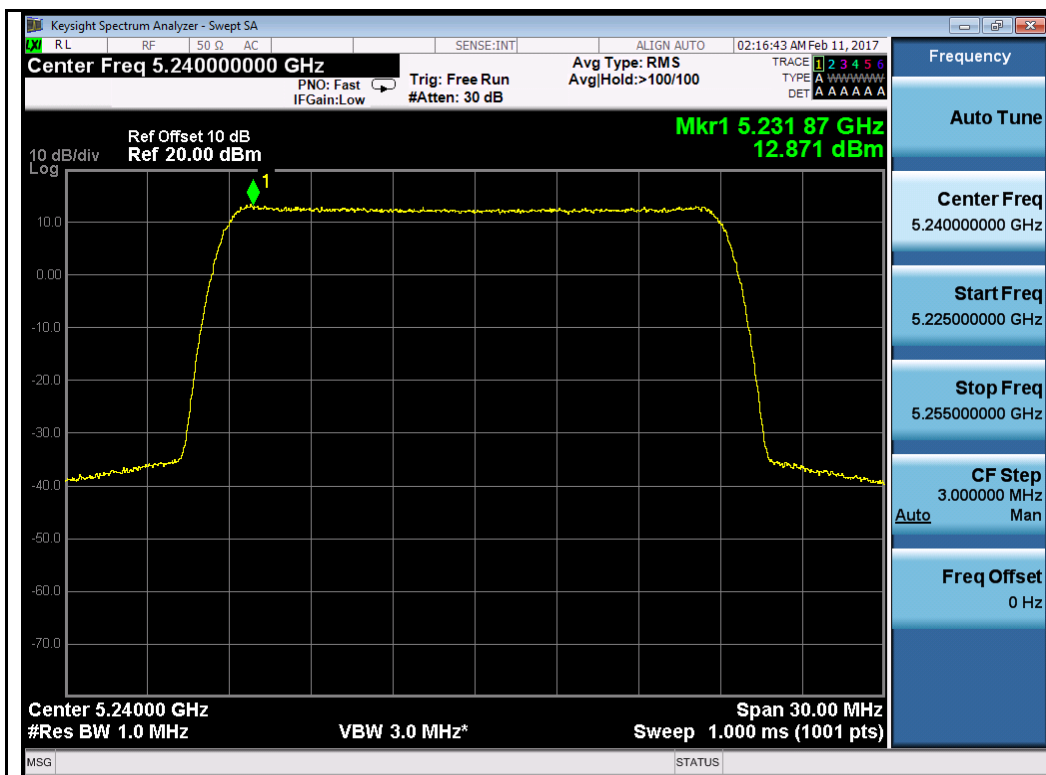


QPSK-5240MHz

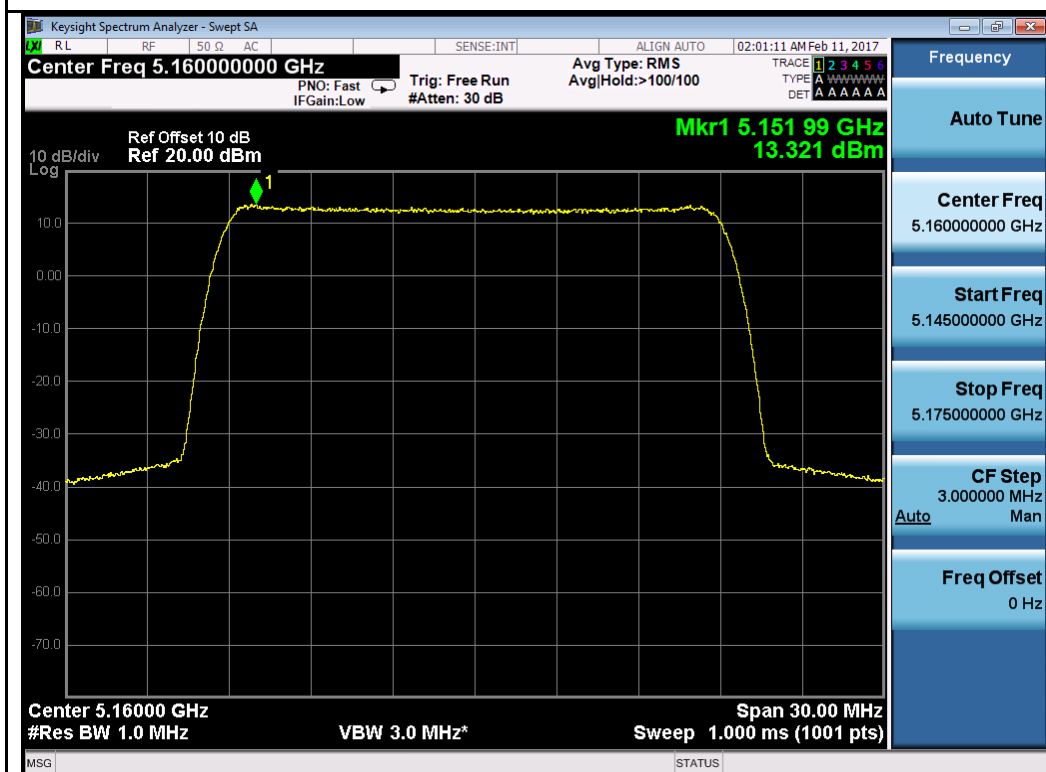

64QAM-5160MHz

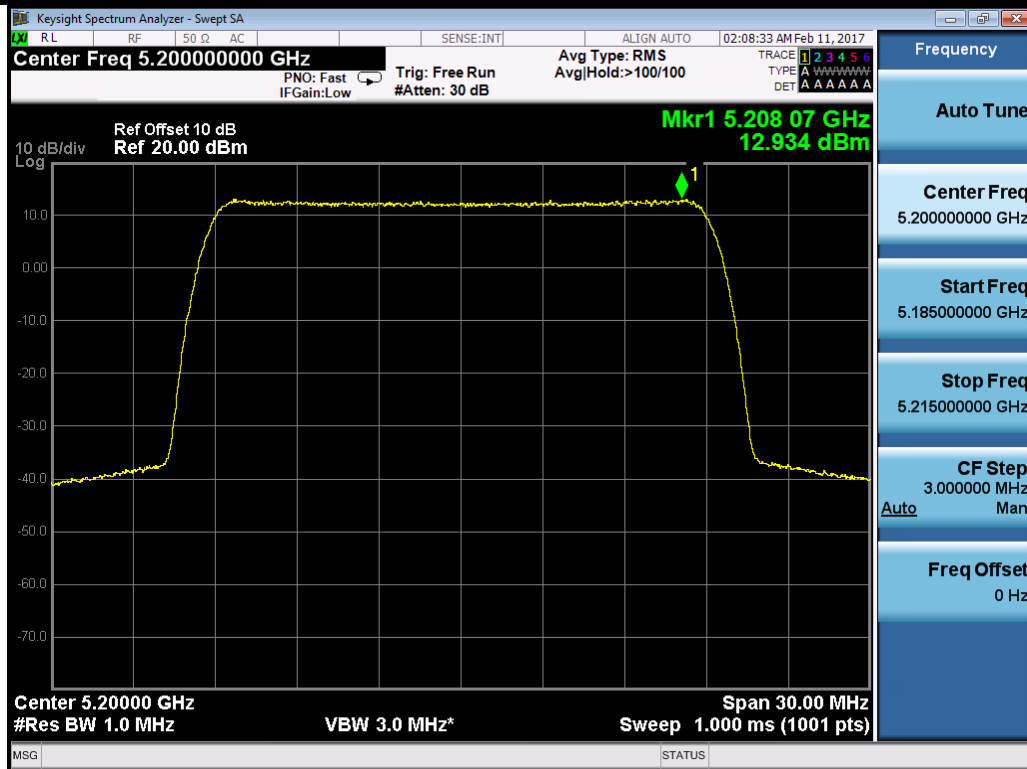


64QAM-5200MHz

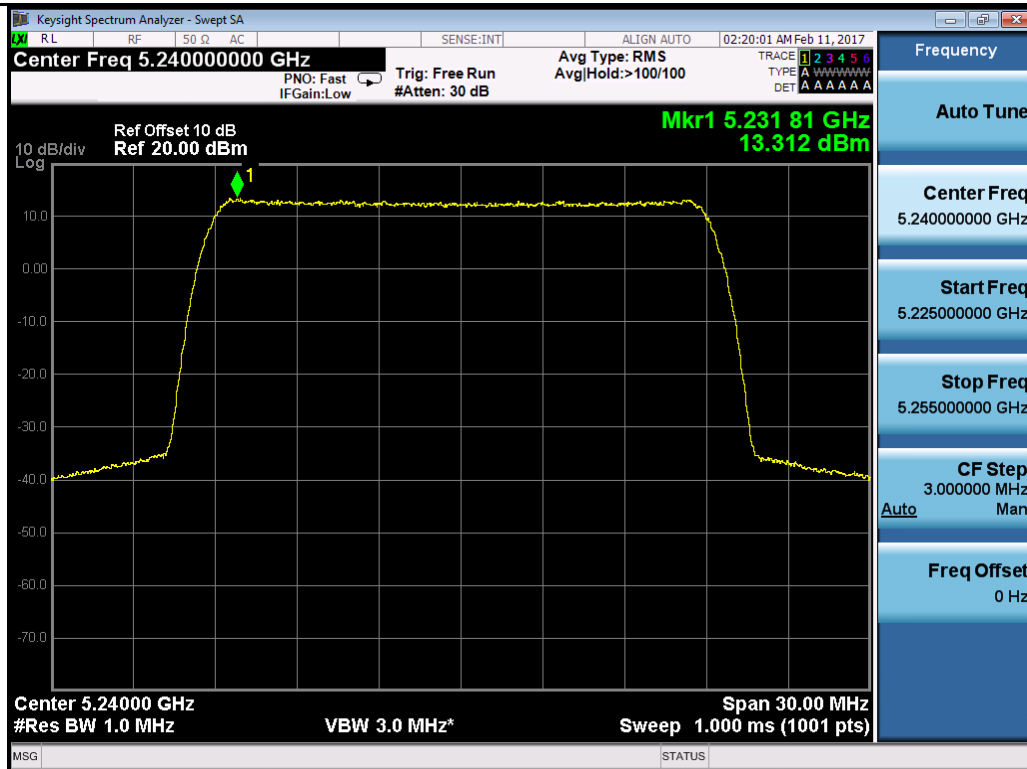


64QAM-5240MHz

Test Plot for W52 40MHz:
Chain 1:

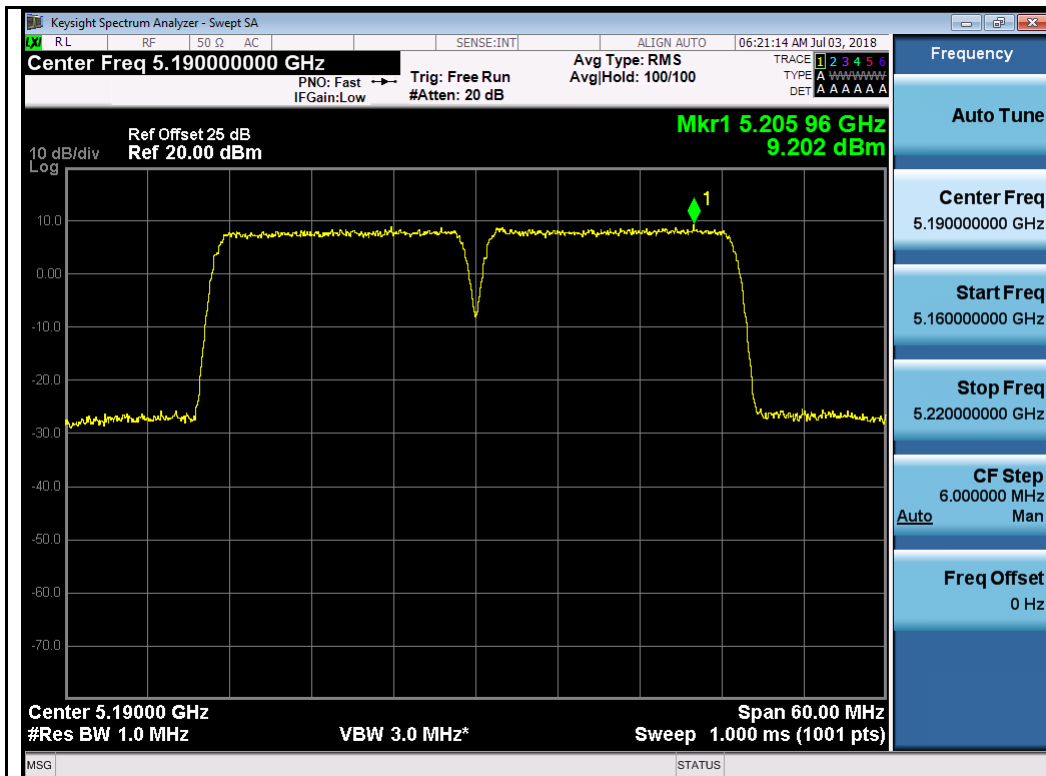


64QAM-5190MHz

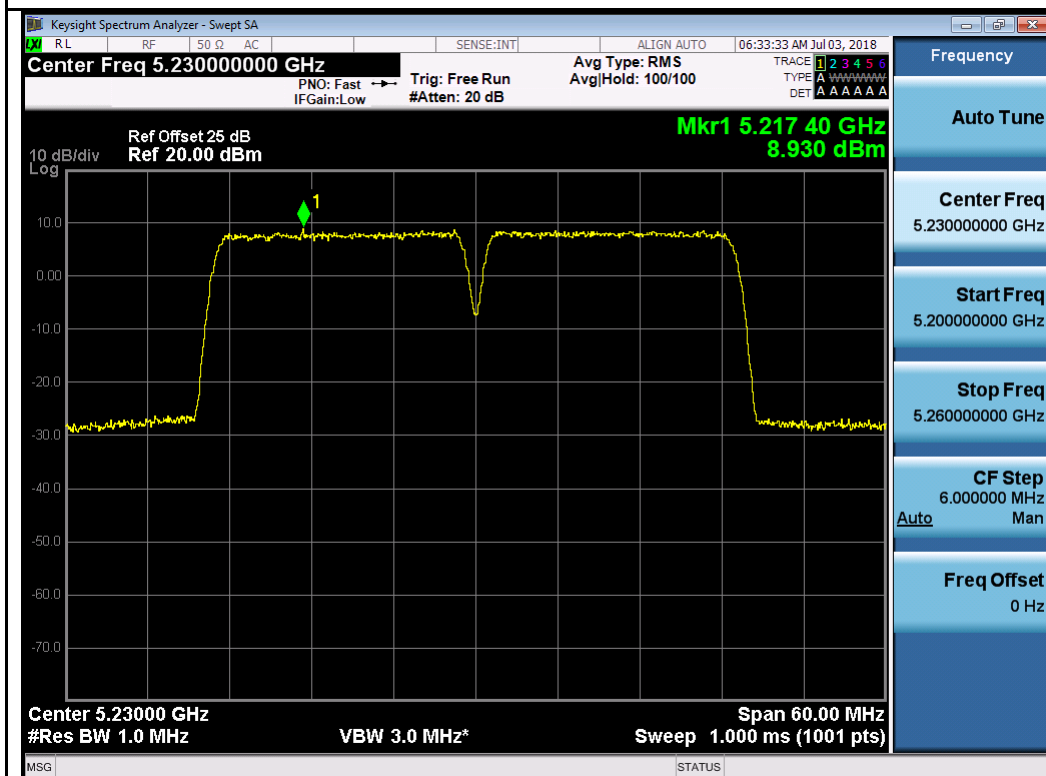


64QAM-5230MHz

Chain 2:

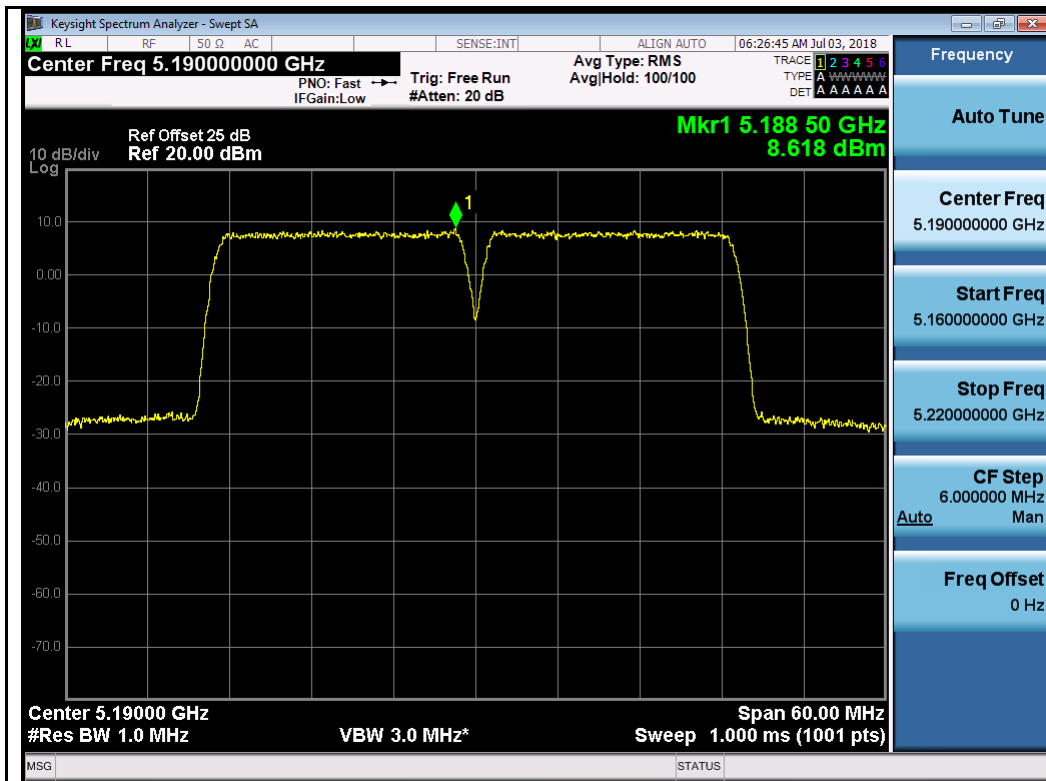


64QAM-5190MHz

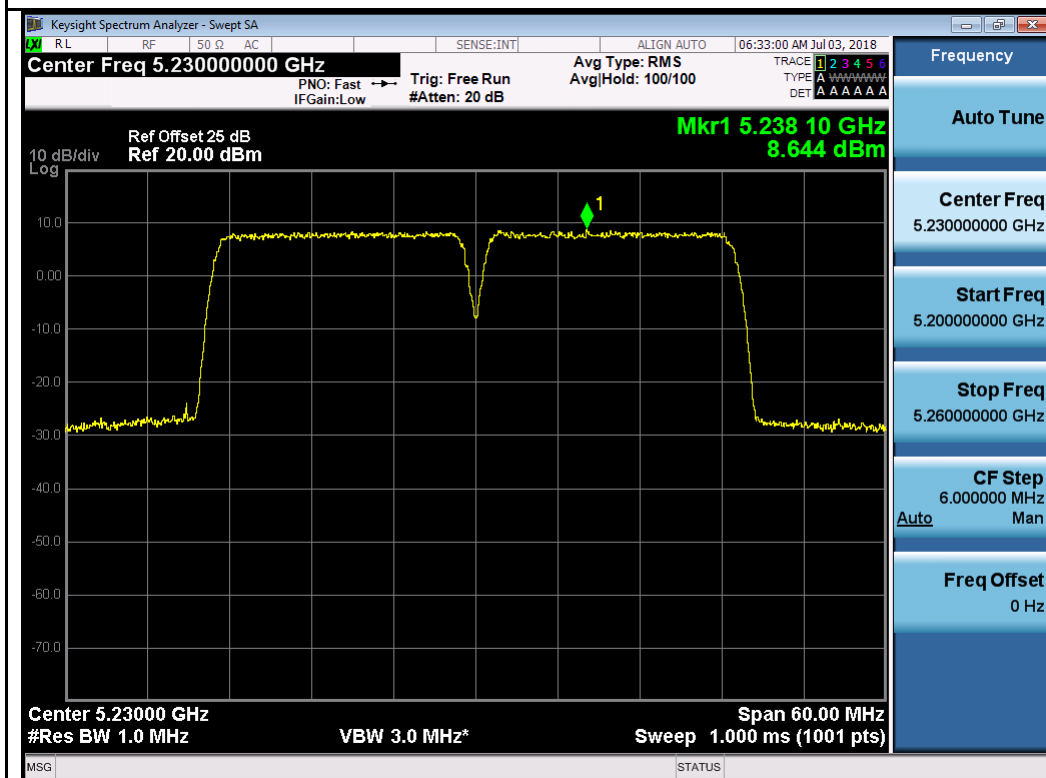


64QAM-5230MHz

Test Plot for W58 20MHz:


Chain 1:

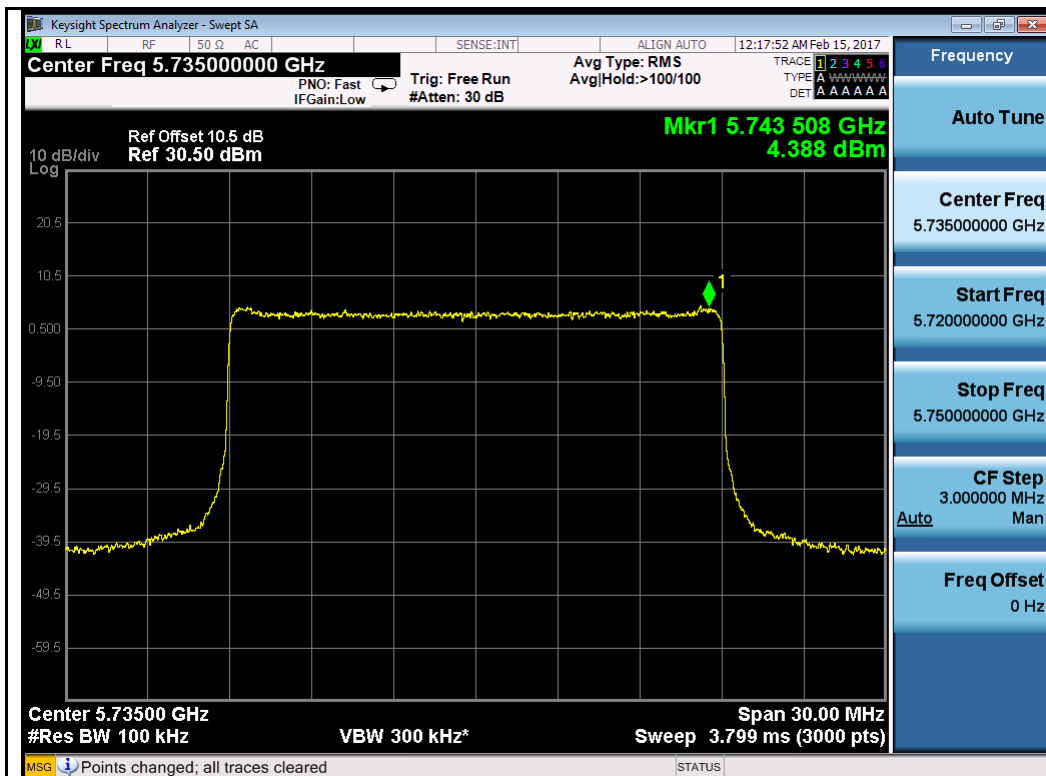


QPSK-5735MHz

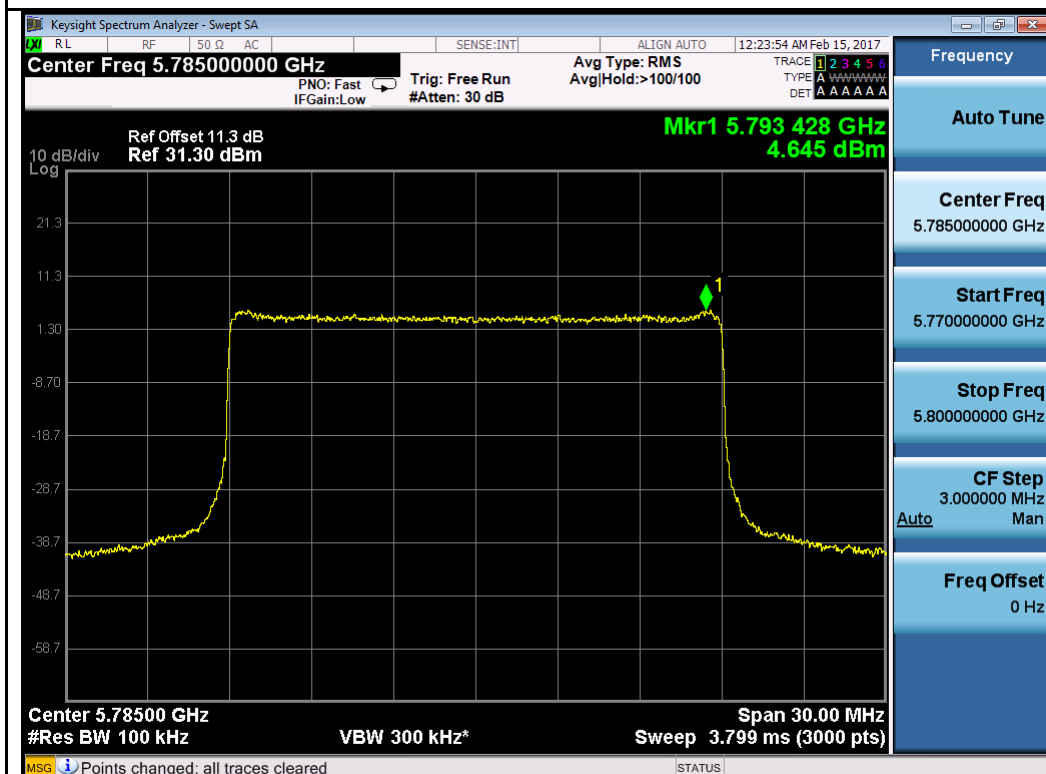


QPSK-5785MHz

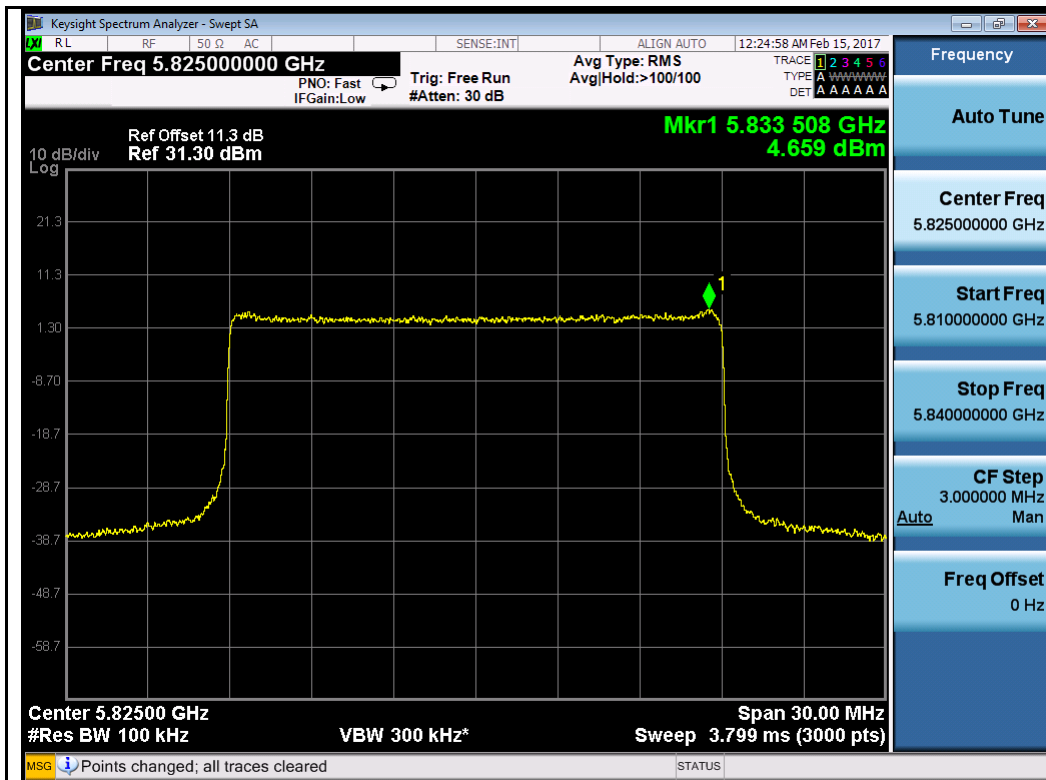


QPSK-5825MHz

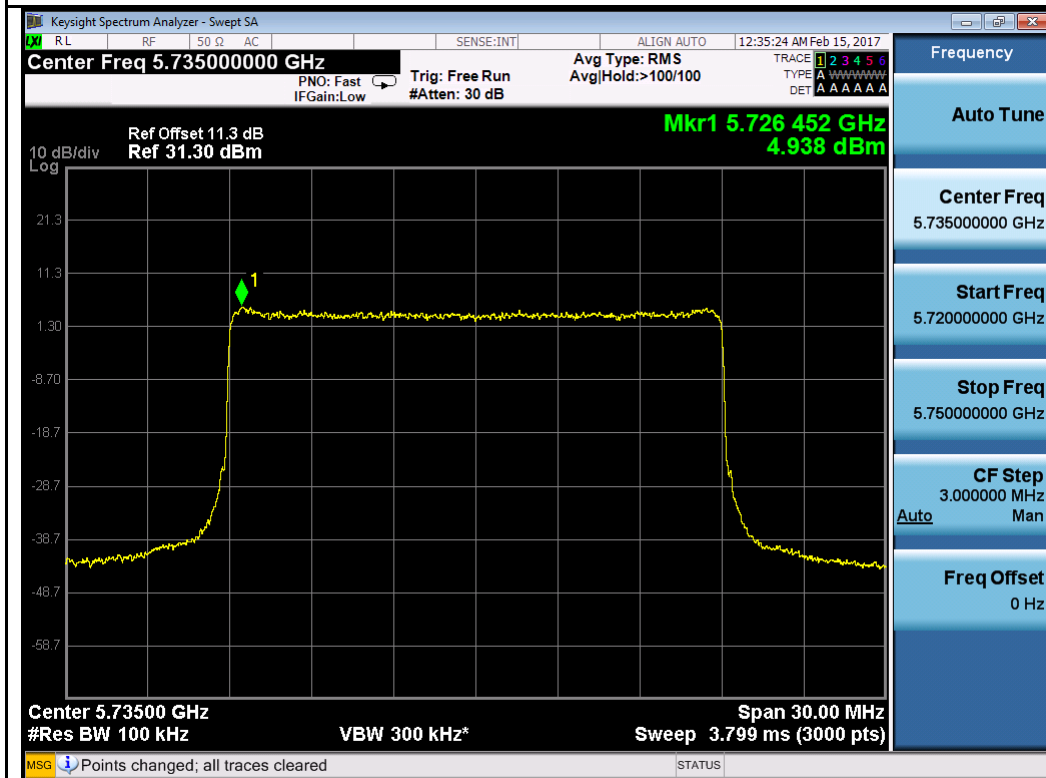

64QAM-5735MHz

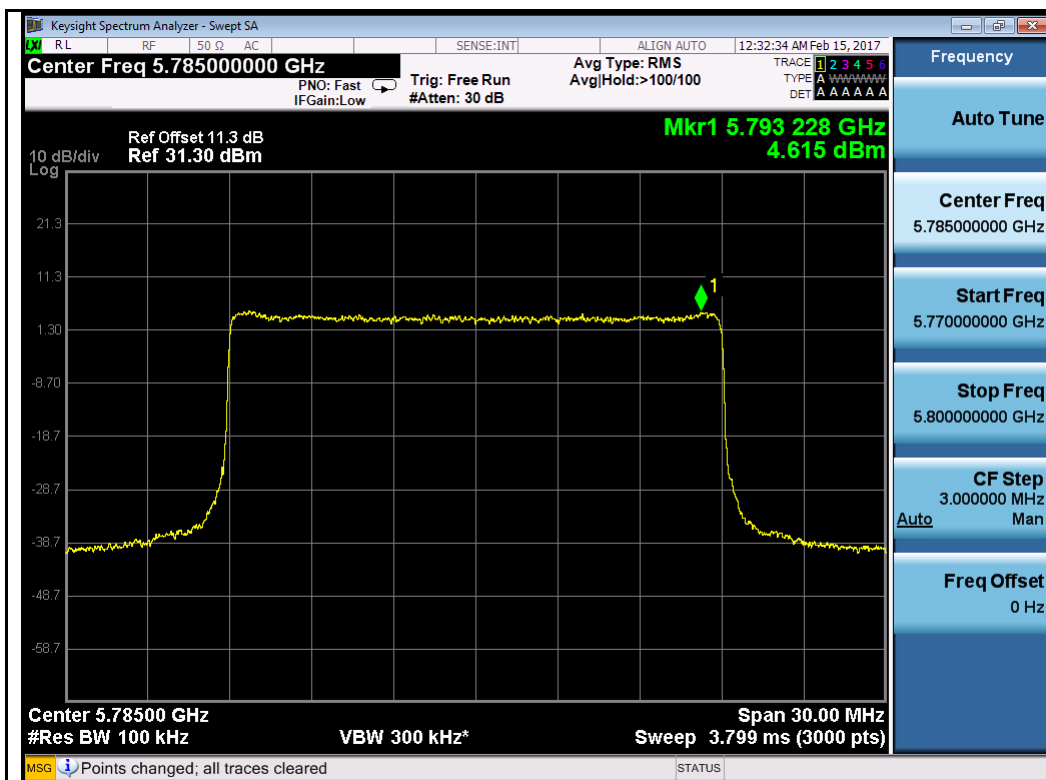



64QAM-5785MHz

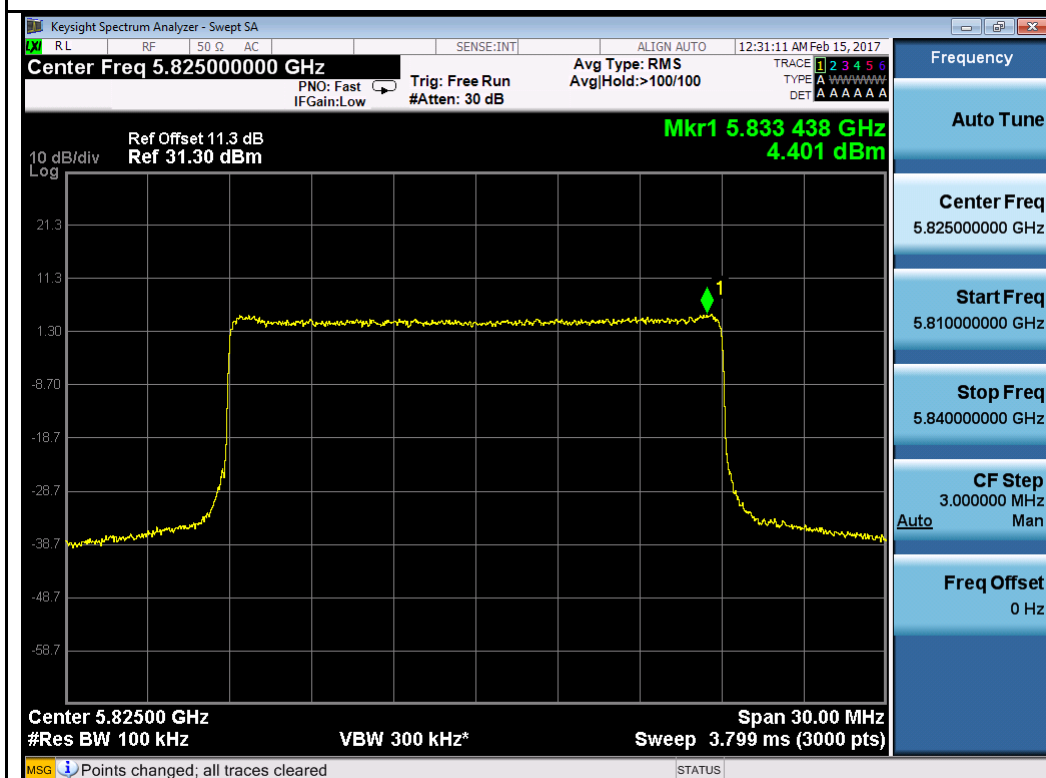


64QAM-5825MHz

Chain 2:

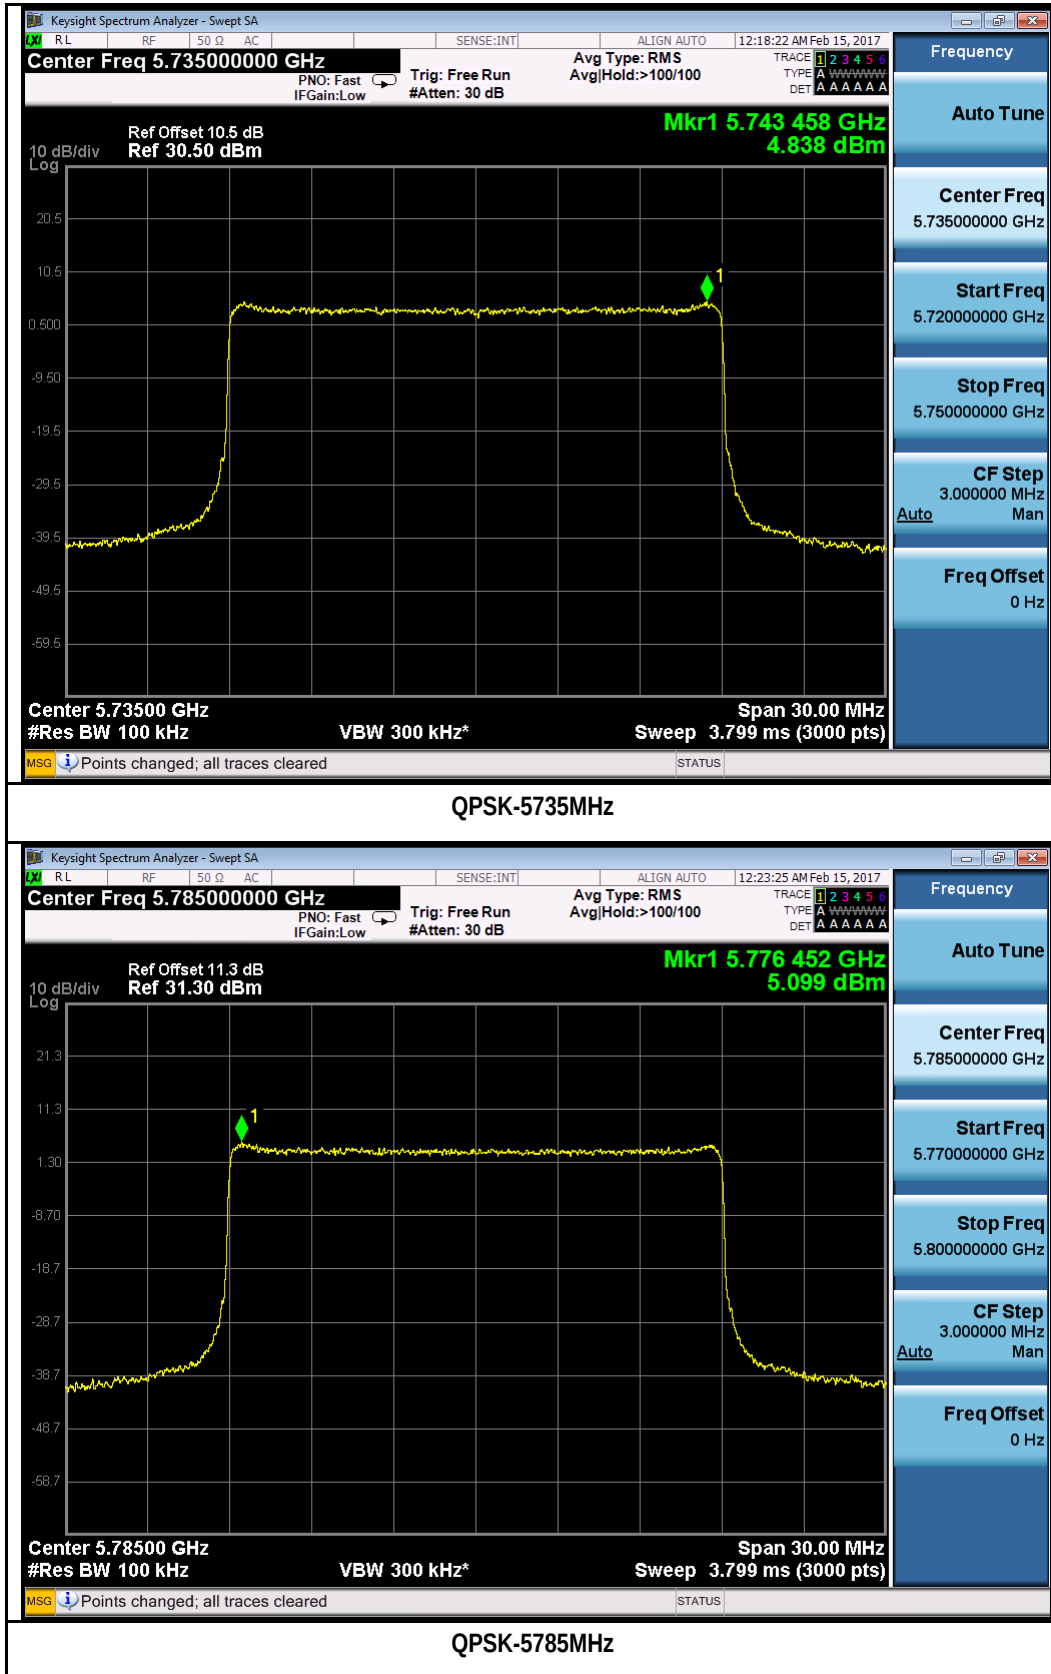


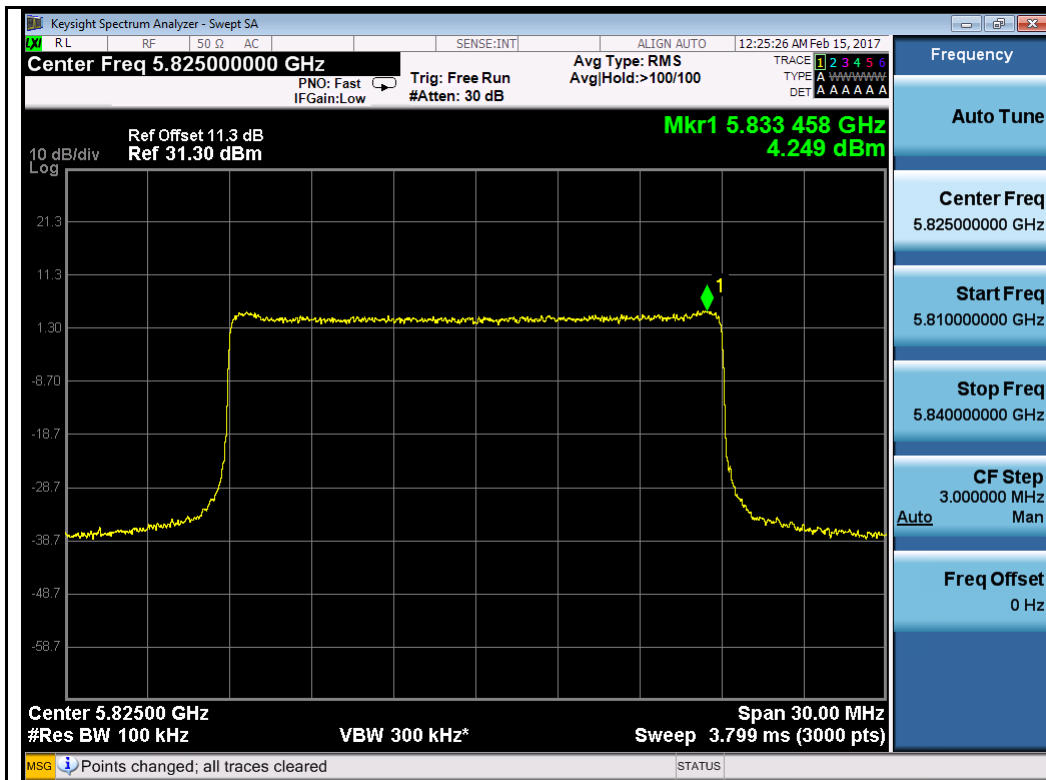


QPSK-5825MHz

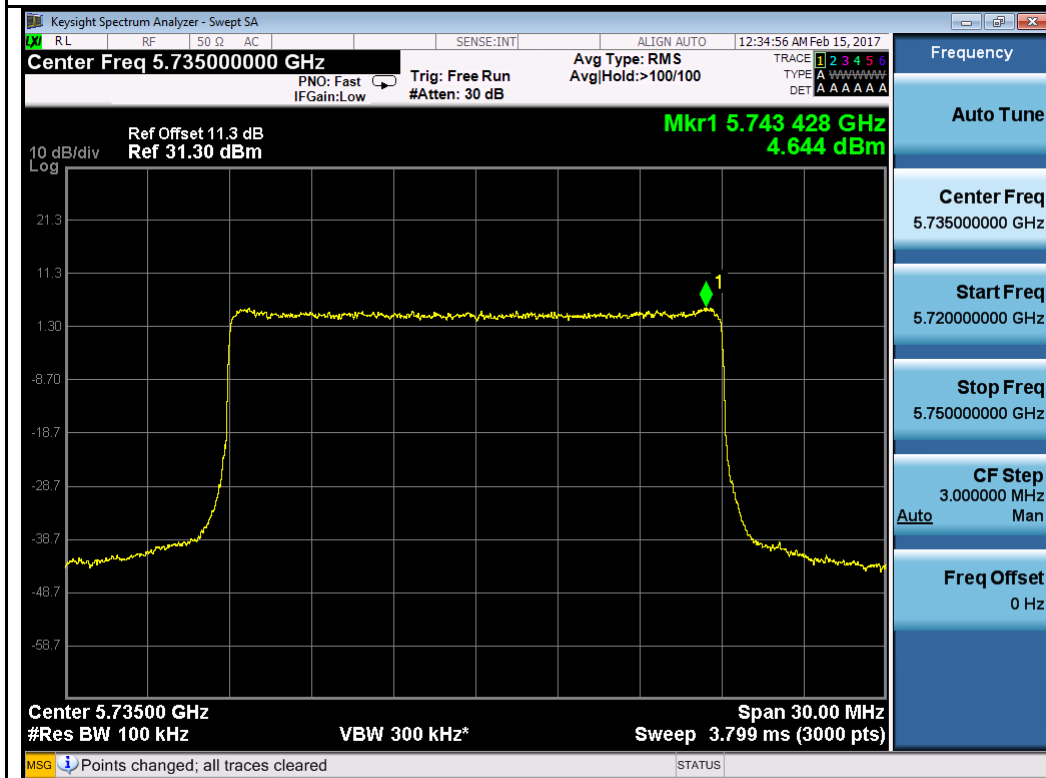

64QAM-5735MHz

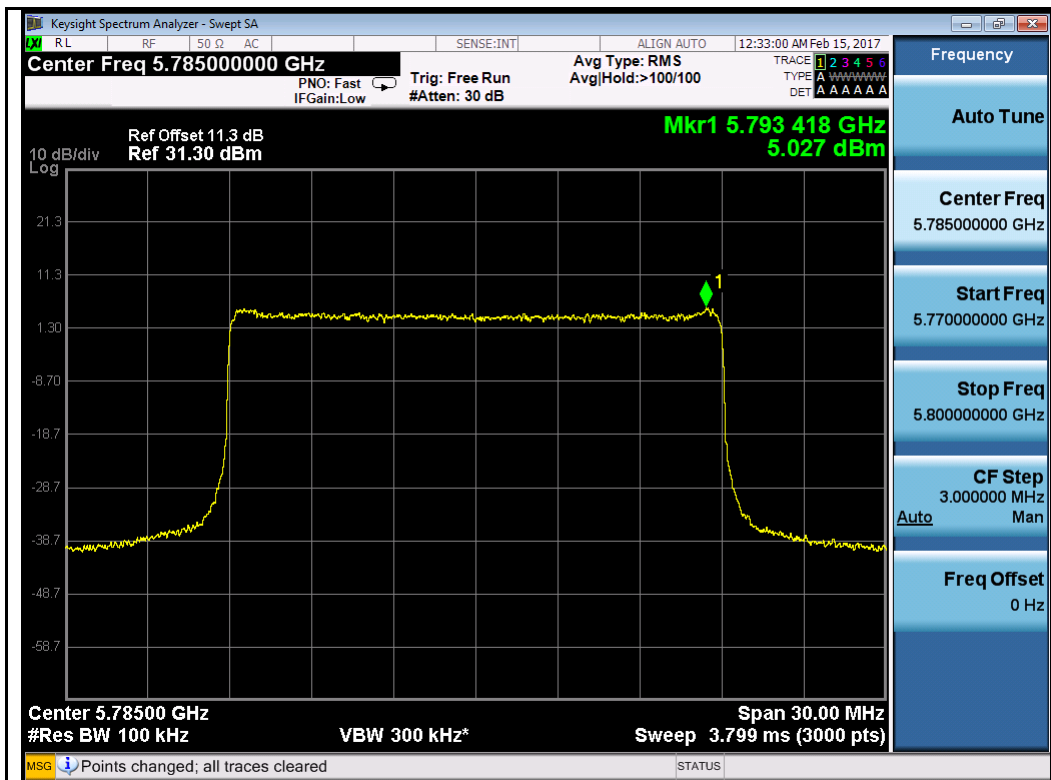


64QAM-5785MHz

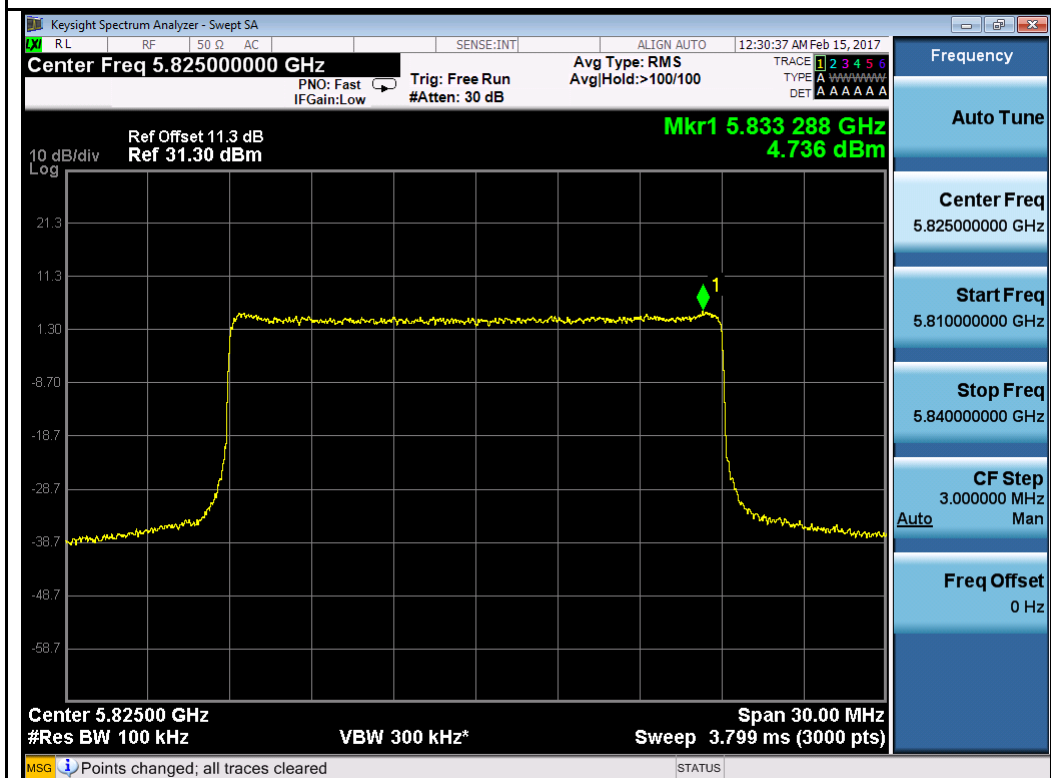


64QAM-5825MHz

Test Plot for W58 40MHz:

Chain 1:

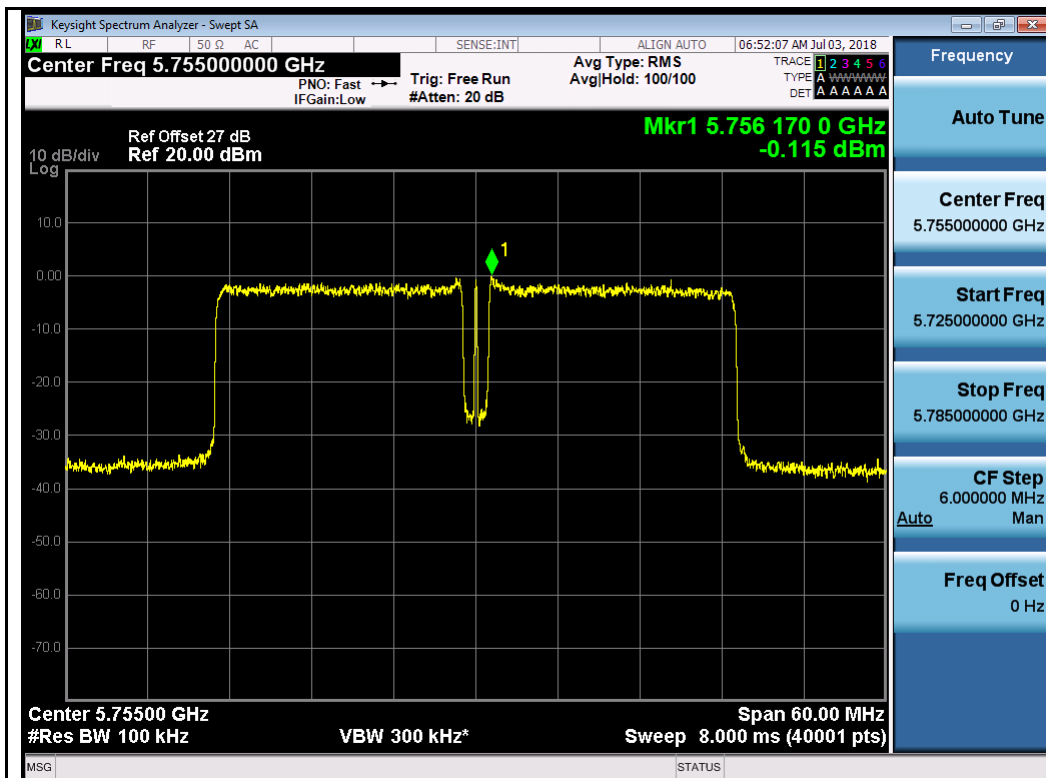


64QAM-5755MHz

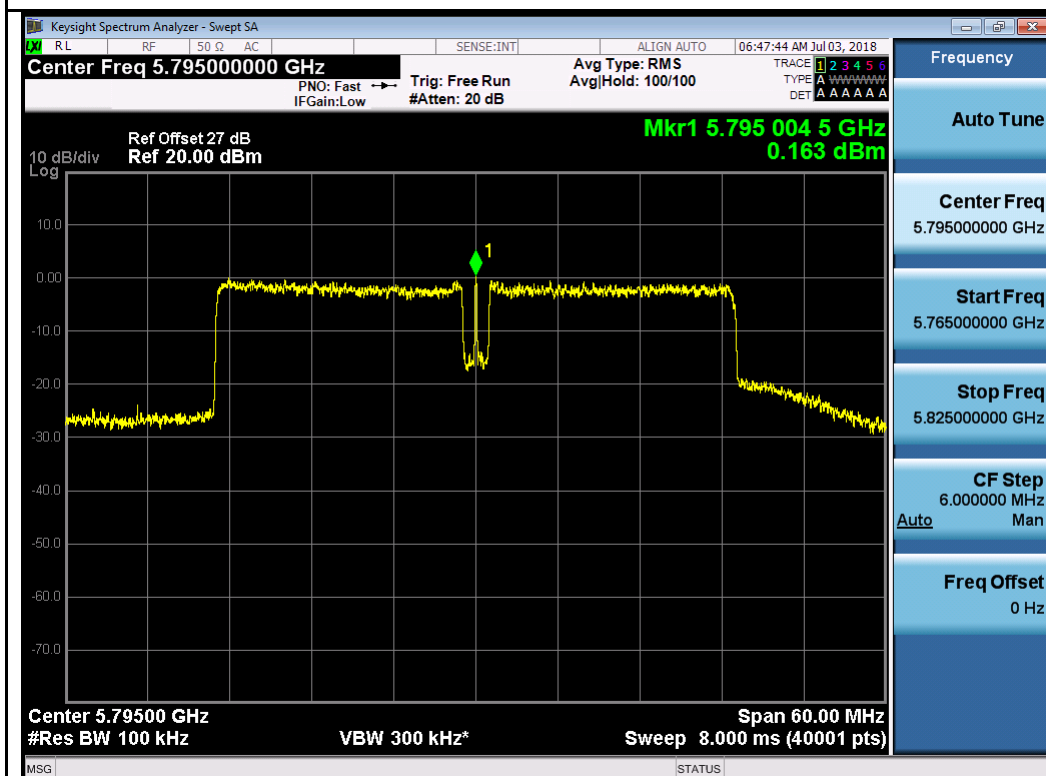


QPSK-5795MHz

Chain 2:

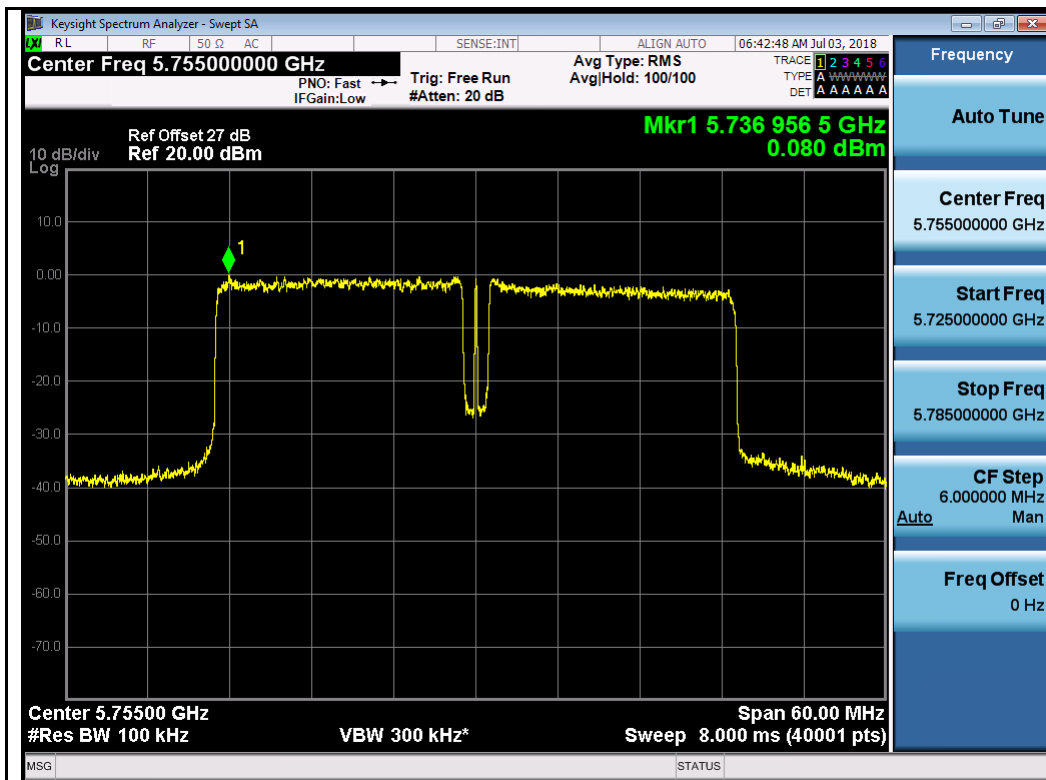


64QAM-5755MHz

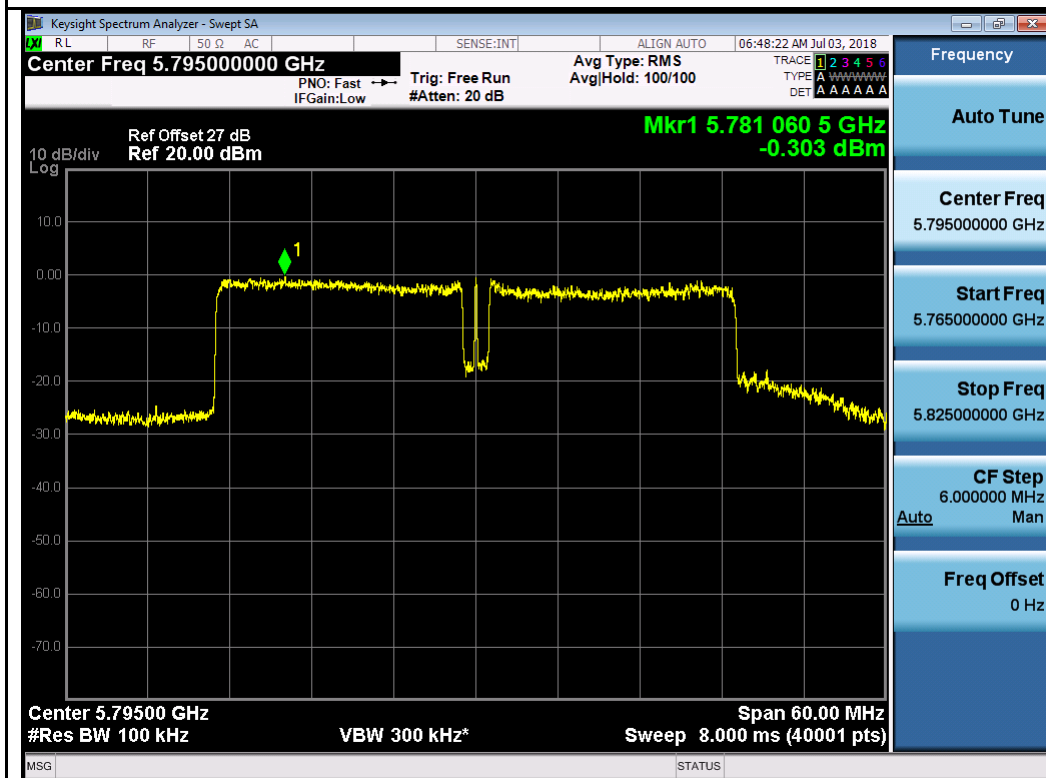

QPSK-5795MHz

10.5 Band Edge and Emission Mask Measurement

Requirement(s):

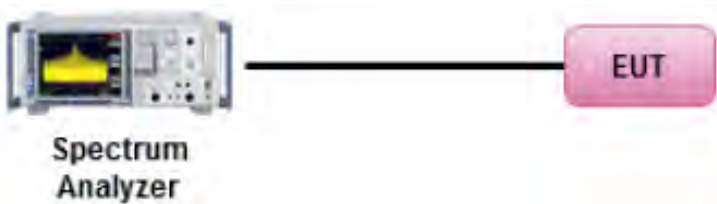
Spec	Item	Requirement	Applicable
47CFR§ 15.407(b)(2), 15.407(b)(6)	(1)	For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.	☒
	(4)	For transmitters operating in the 5.725-5.825 GHz band: all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	☒
Test Setup			
Procedure	789033 D02 General UNII Test Procedures New Rules v02, II.F. Method SA-1 <u>Band Edge measurement:</u> - For average emissions measurements, follow the procedures described in section II.G.6., "Procedures for Average Unwanted Emissions Measurements above 1000 MHz", except for the following changes: - Set RBW=100kHz - Set VBW=300kHz - Perform a band-power integration across the 1 MHz bandwidth in which the band-edge emission level is to be measured.		
Remark	Antenna gain was added to the offset.		
Result	☒ Pass ☐ Fail		

Test Data ☐ Yes (See below) ☒ N/A


Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Chen Ge at RF test site.


Test Plot for W52 20MHz:
Chain 1:

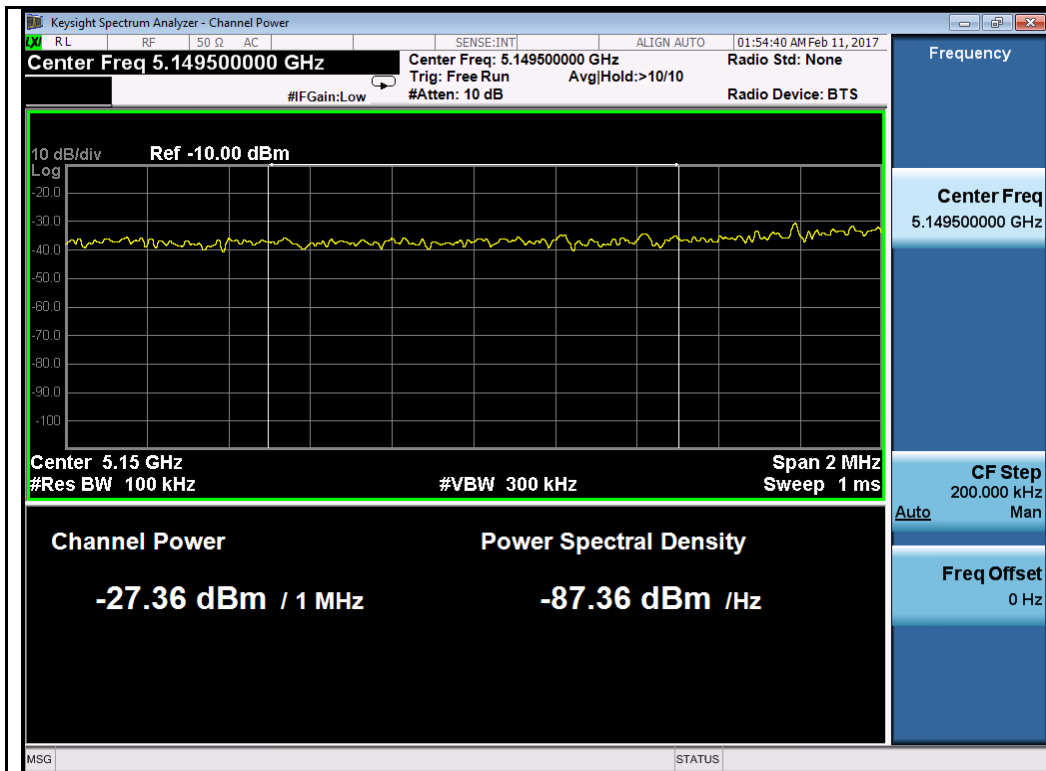


QPSK-5160MHz

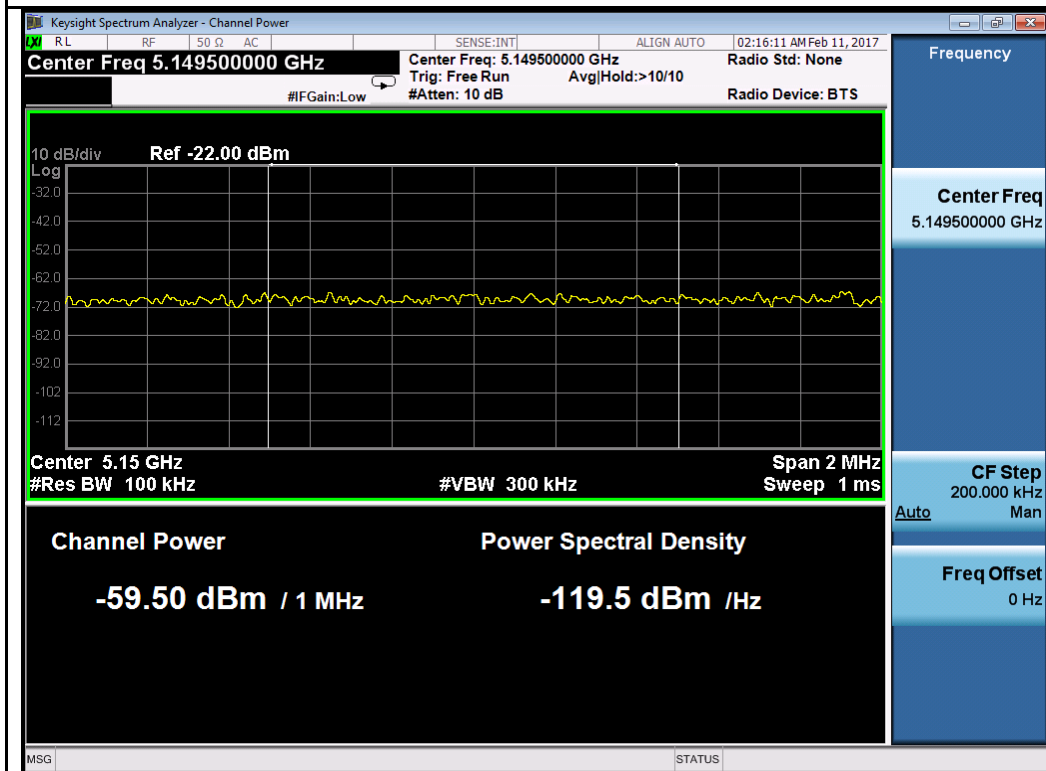

QPSK-5240MHz

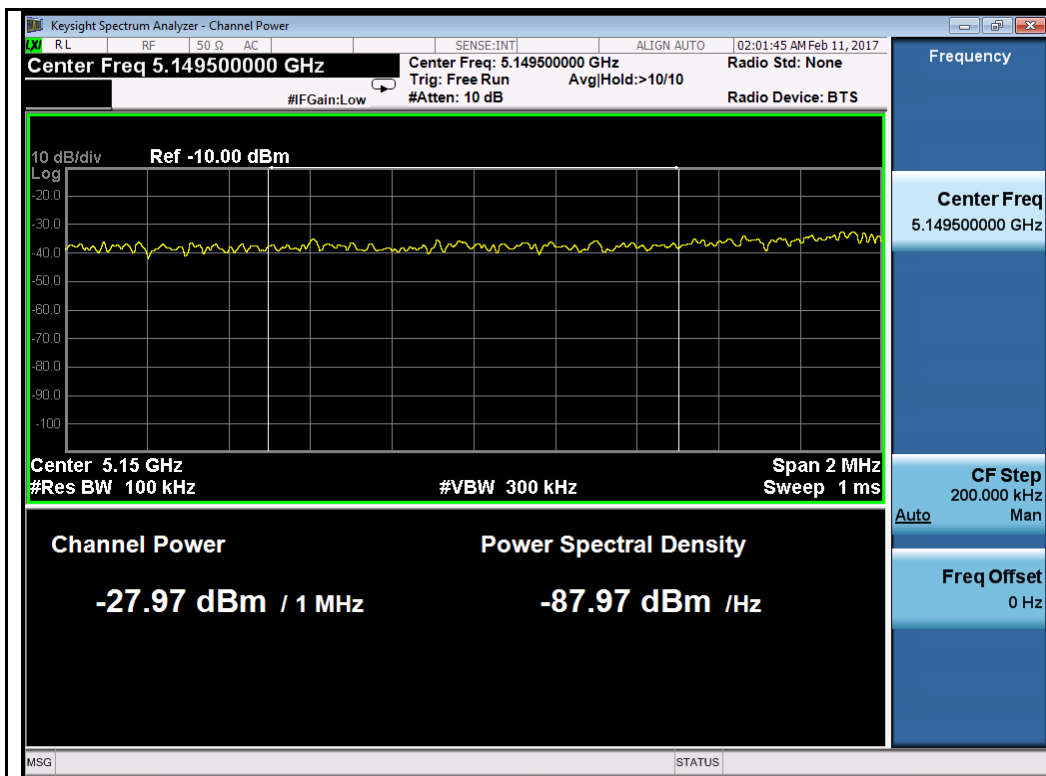


64QAM-5160MHz

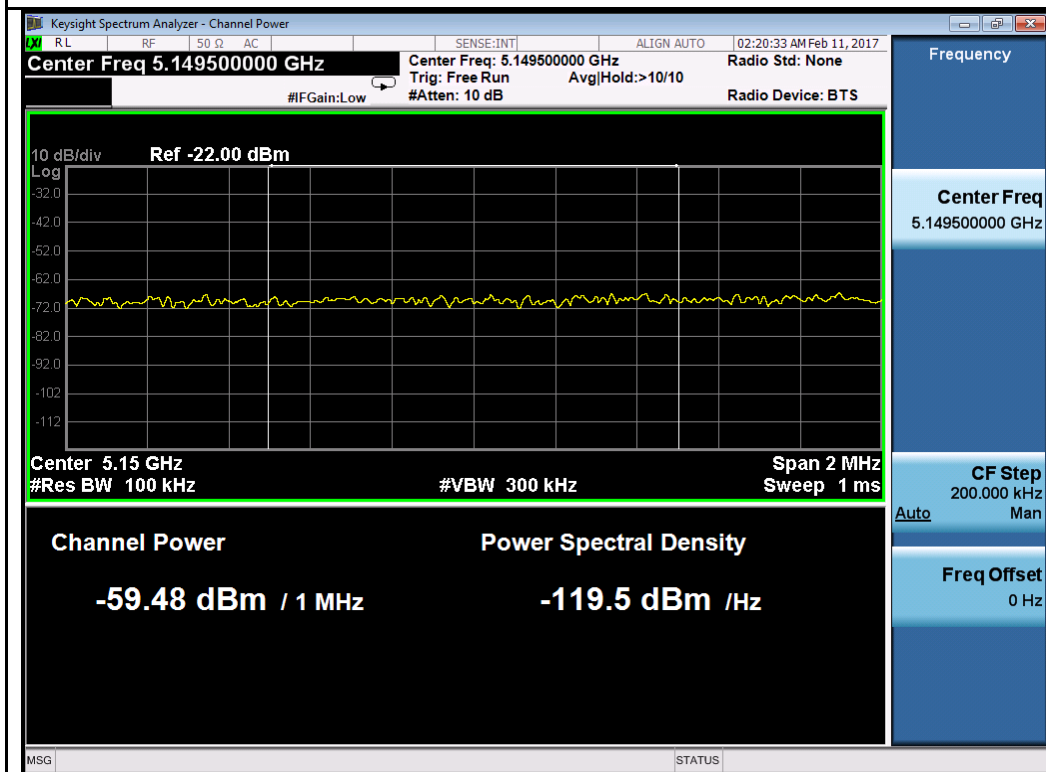


64QAM-5240MHz


Chain 2:

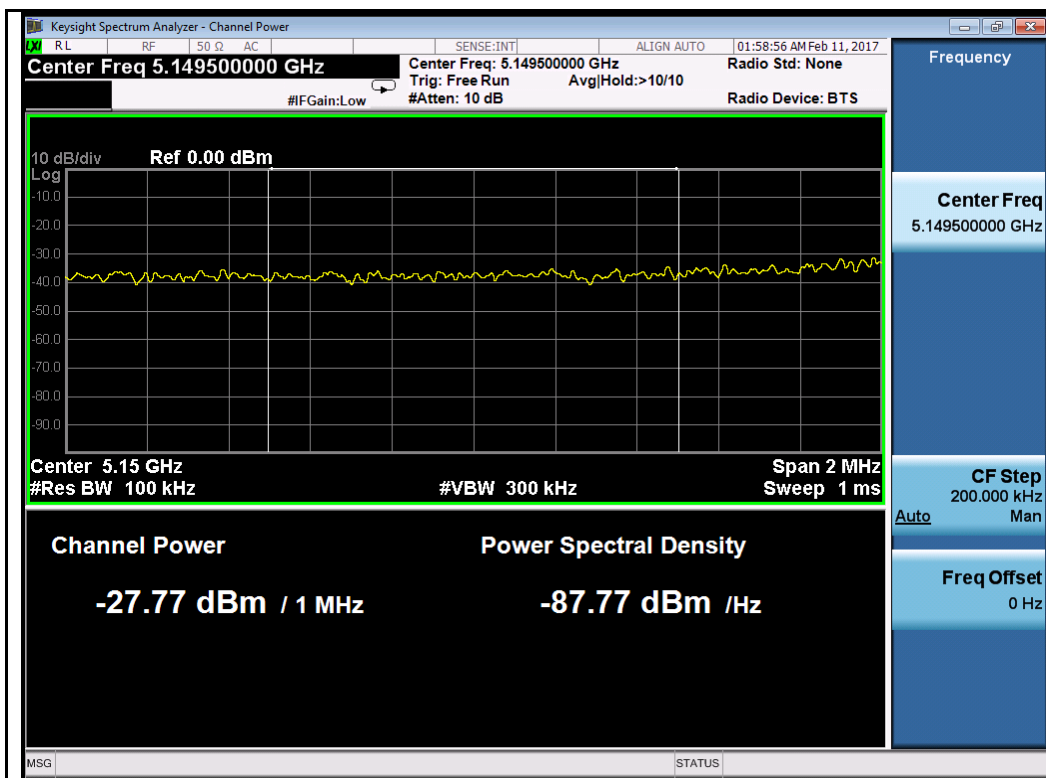


QPSK-5160MHz

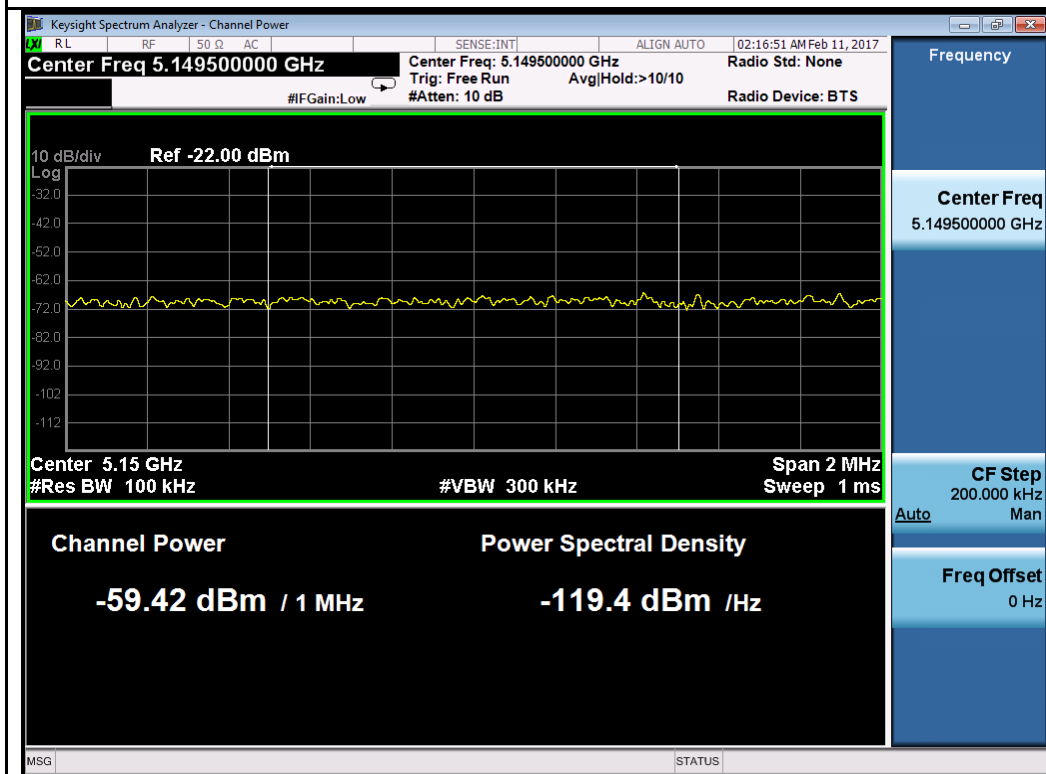

QPSK-5240MHz

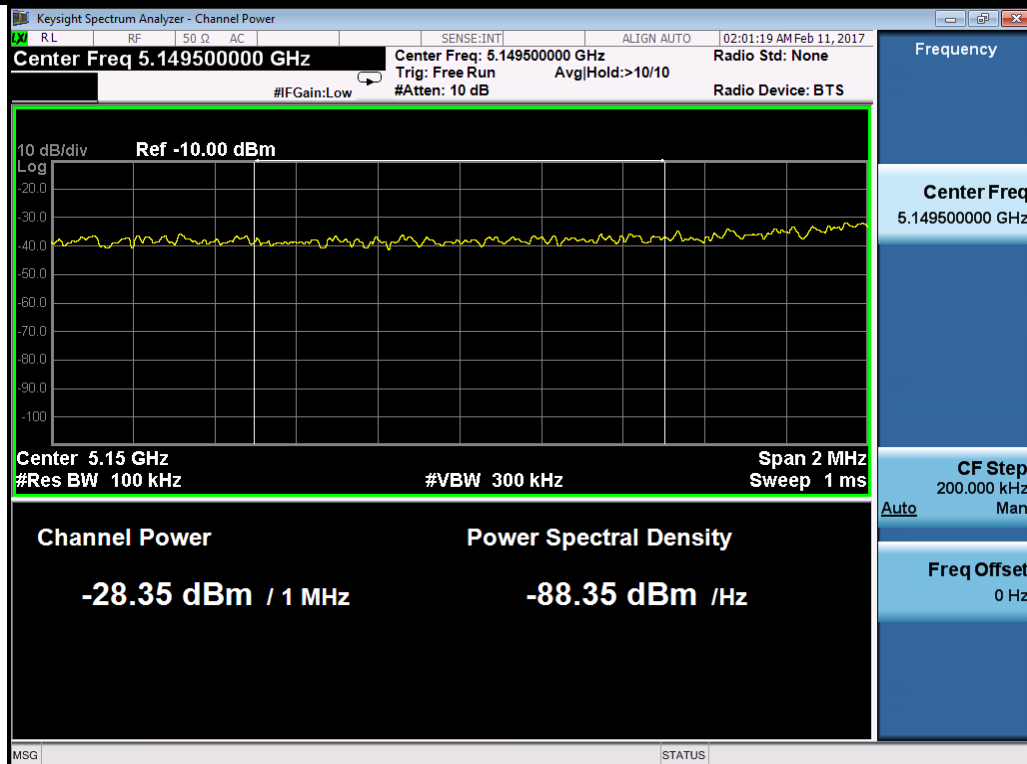


64QAM-5160MHz

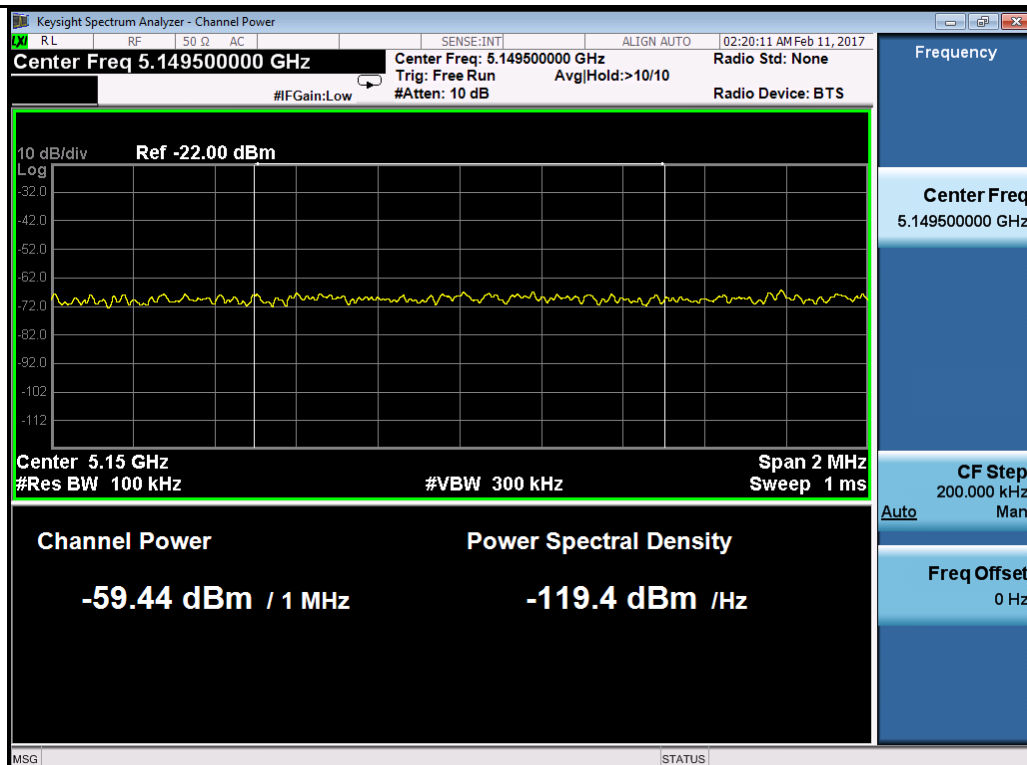


64QAM-5240MHz

Test Plot for W52 40MHz:
Chain 1:

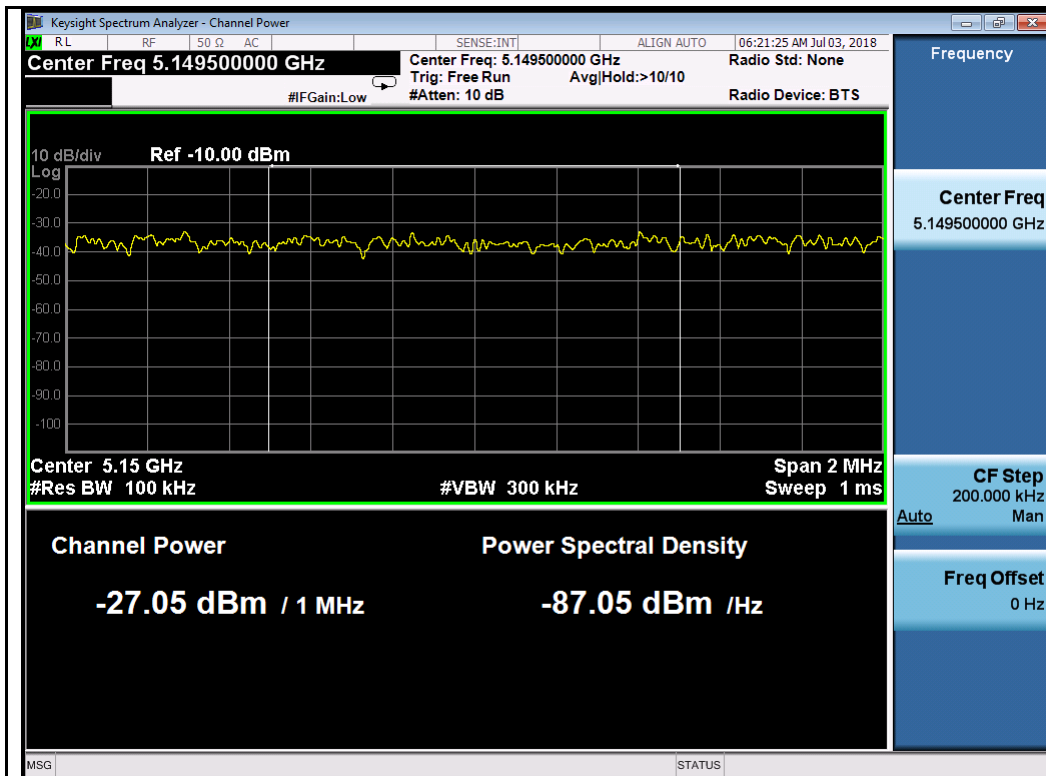


64QAM-5190MHz

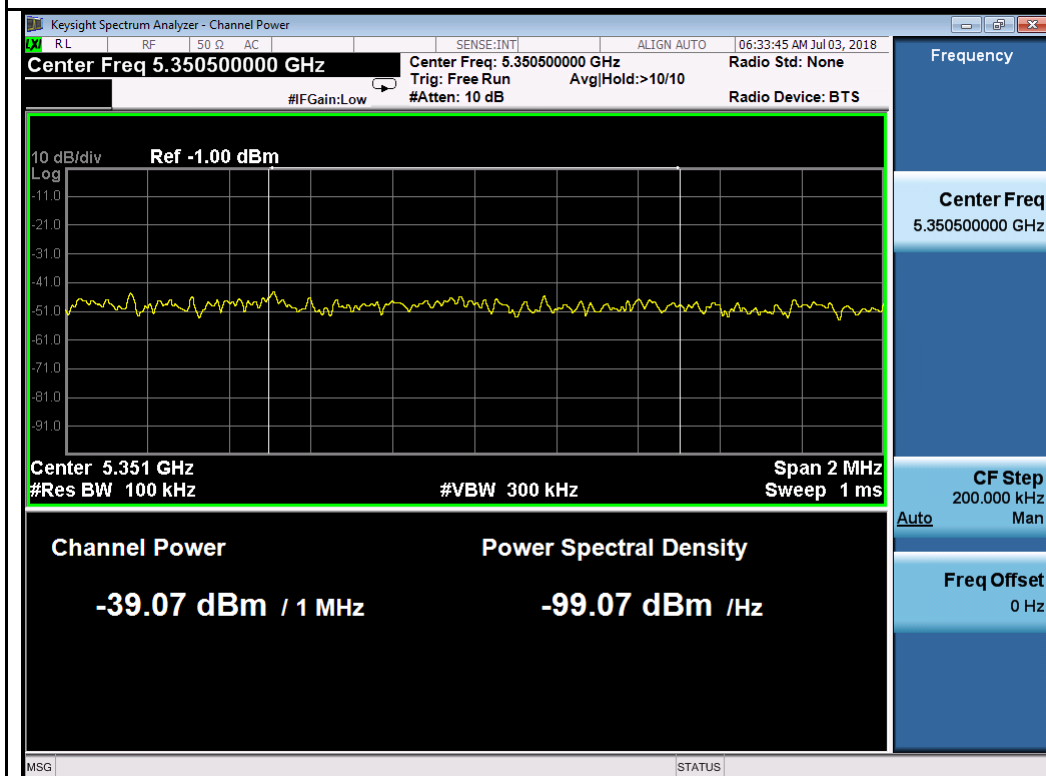


64QAM-5230MHz

Chain 2:

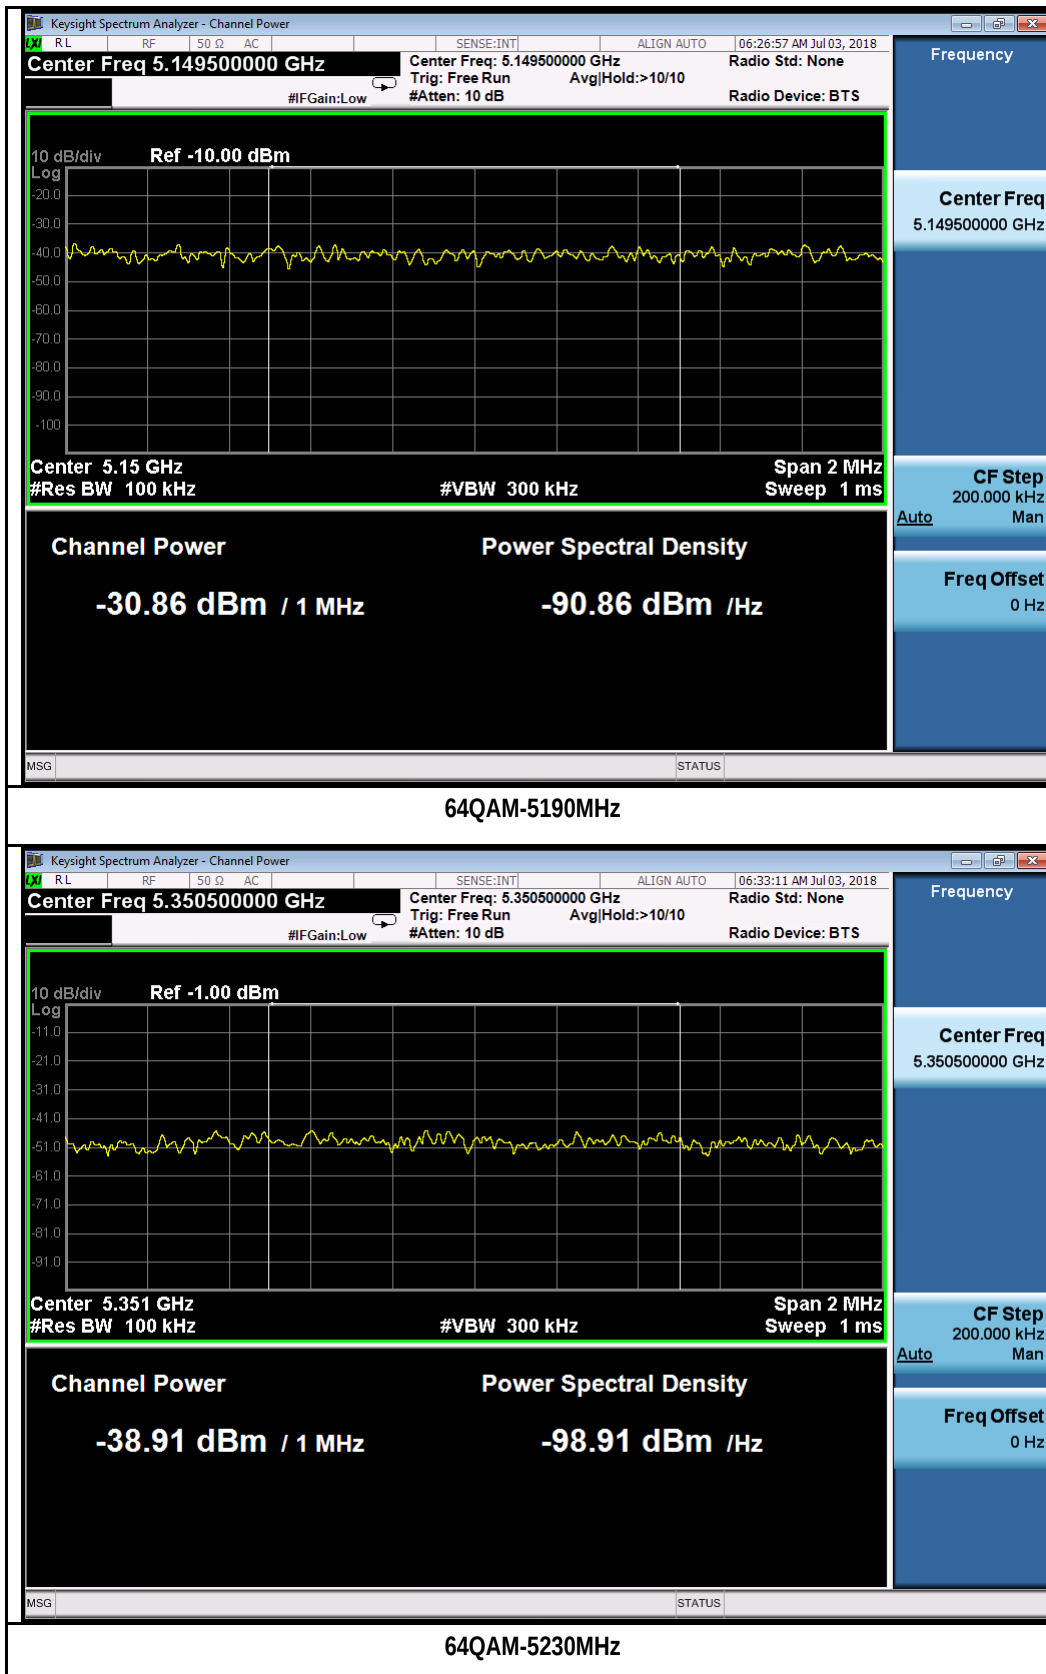


Test Plot for W58 20MHz:


Chain 1:

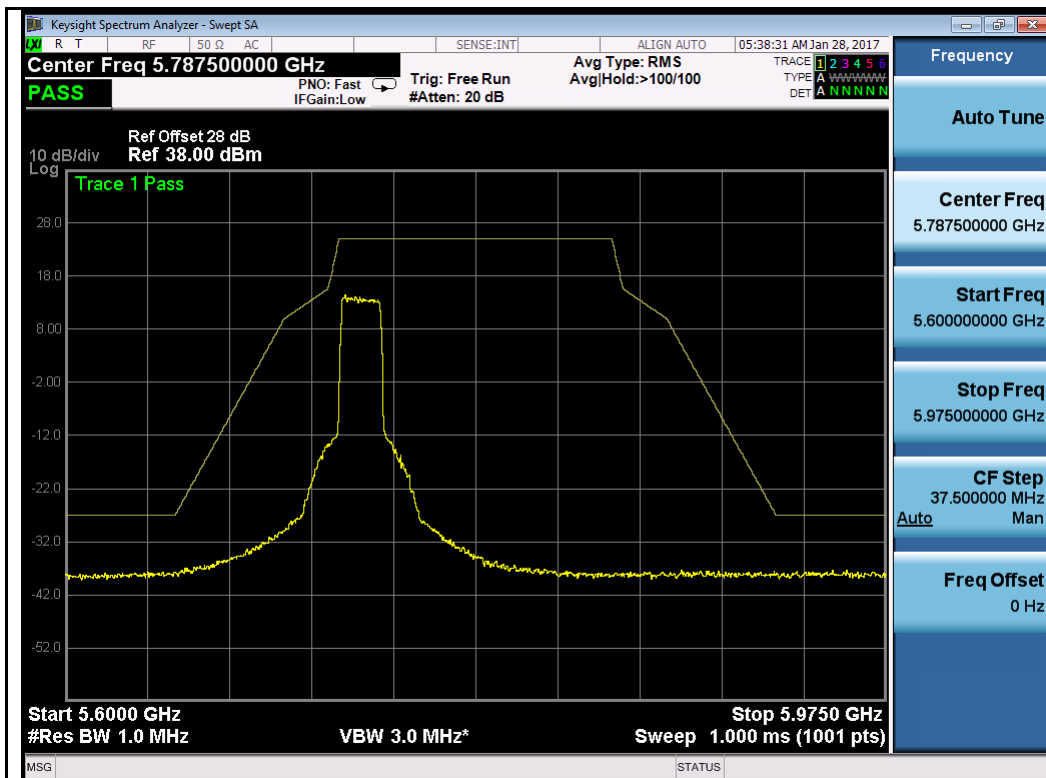


QPSK-5735MHz

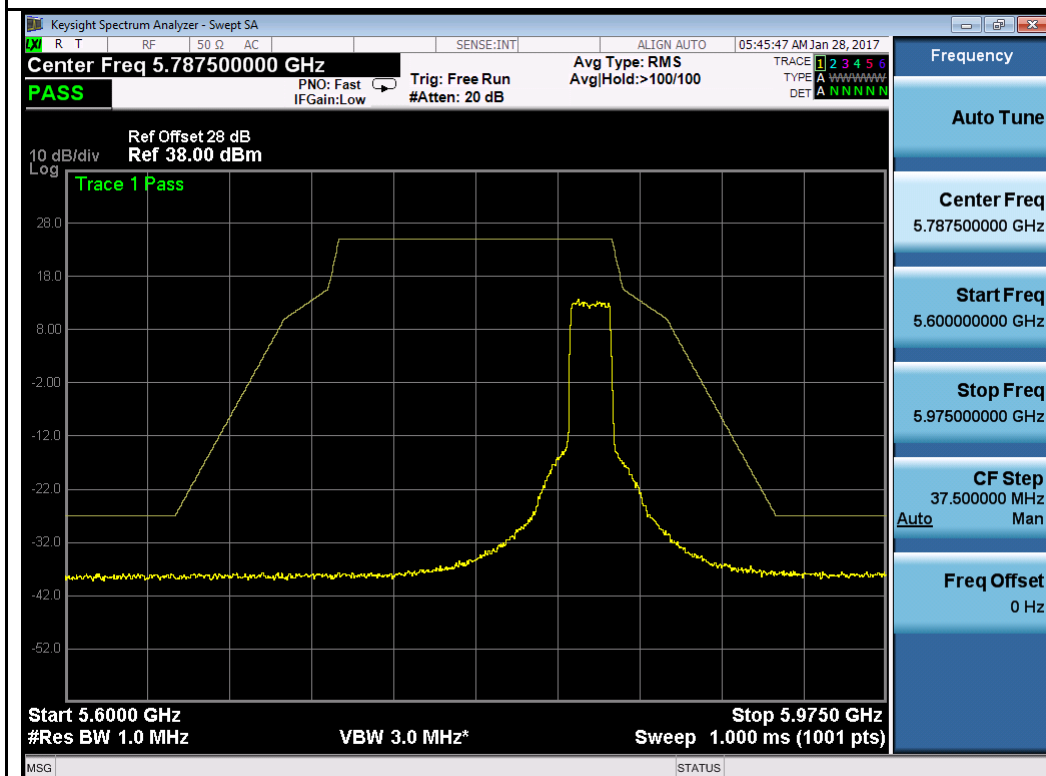

QPSK-5825MHz

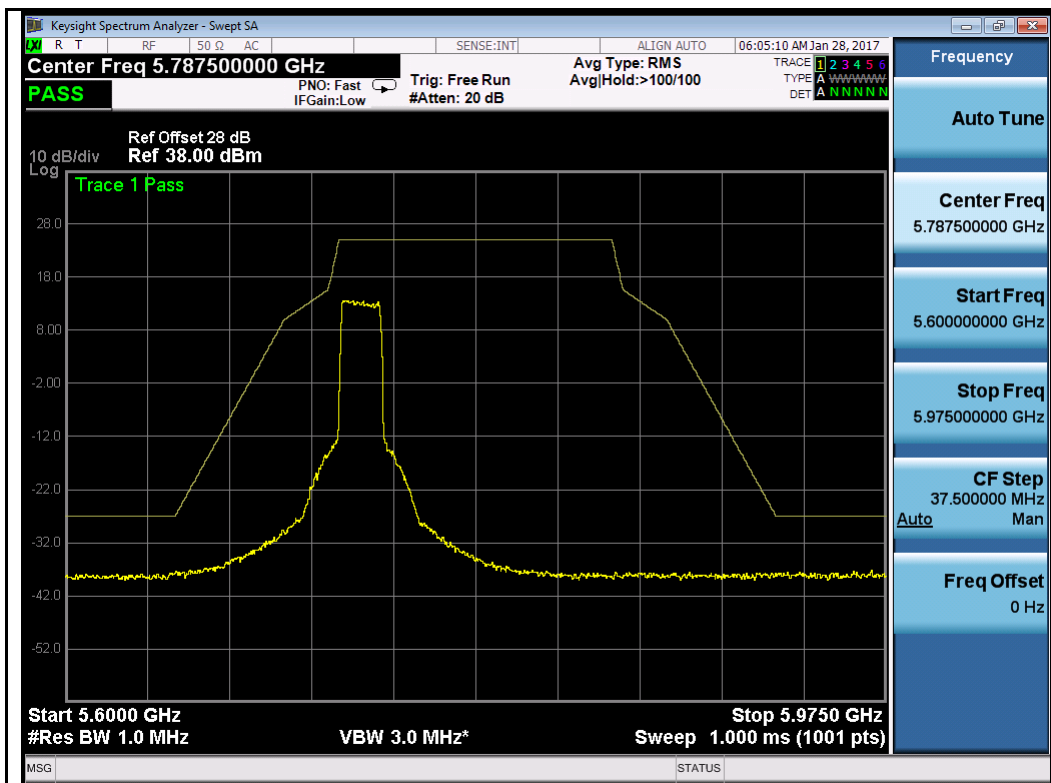


64QAM-5735MHz

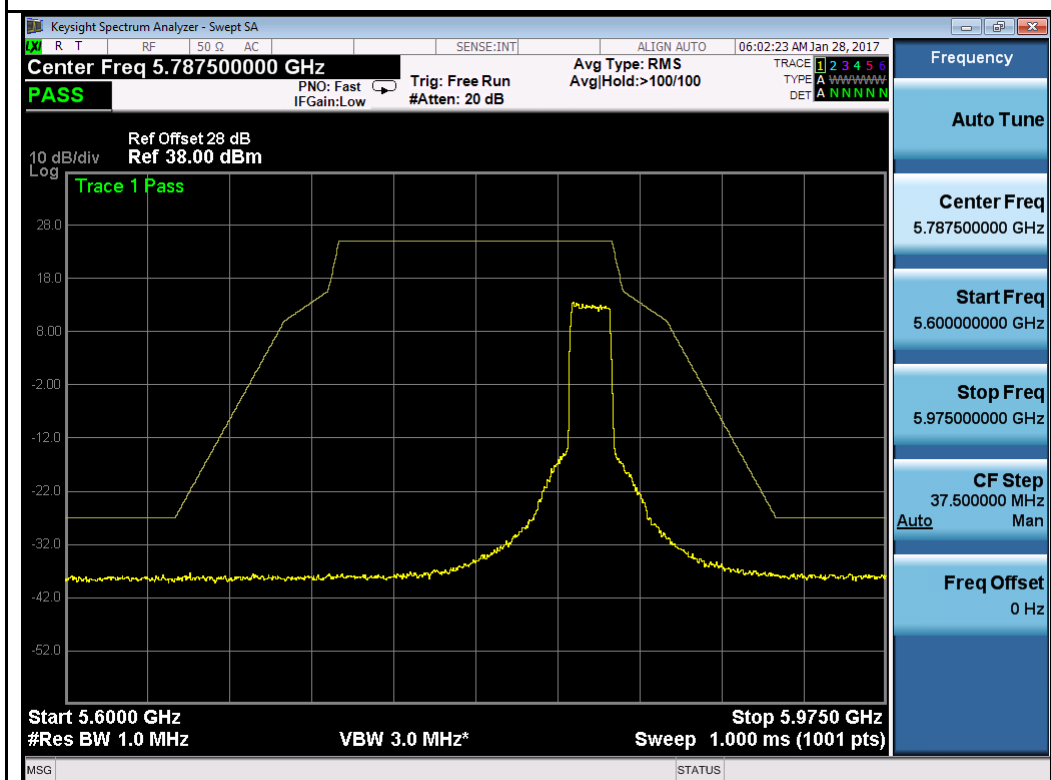


64QAM-5825MHz


Chain 2:

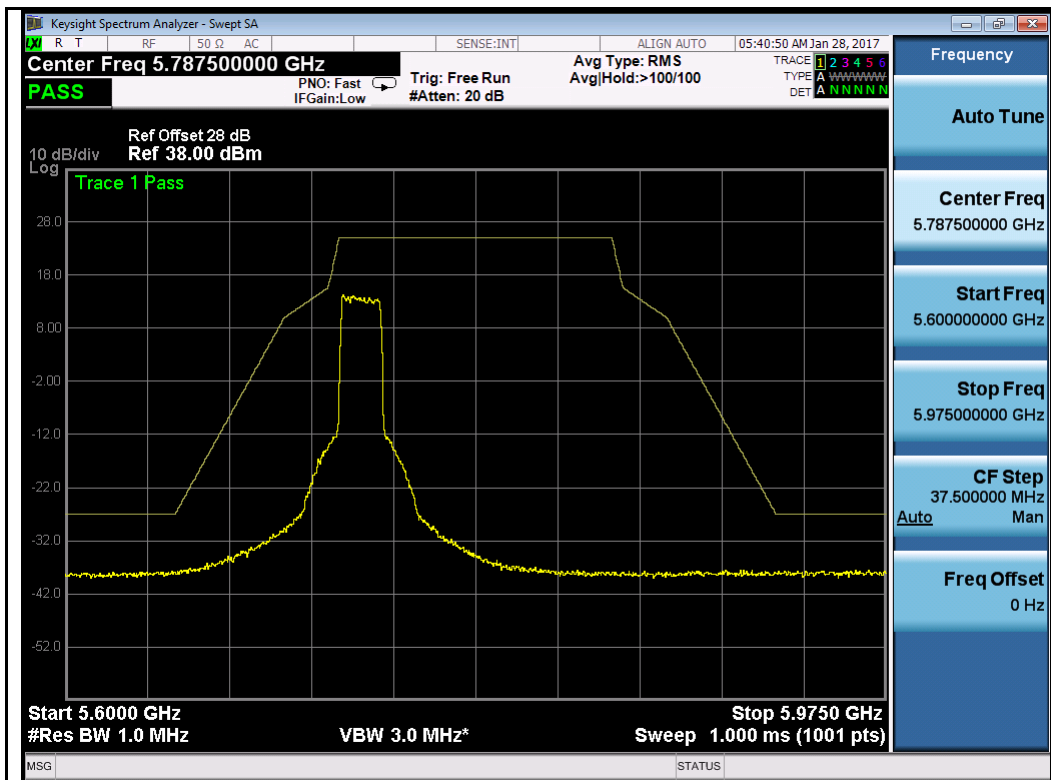


QPSK-5735MHz

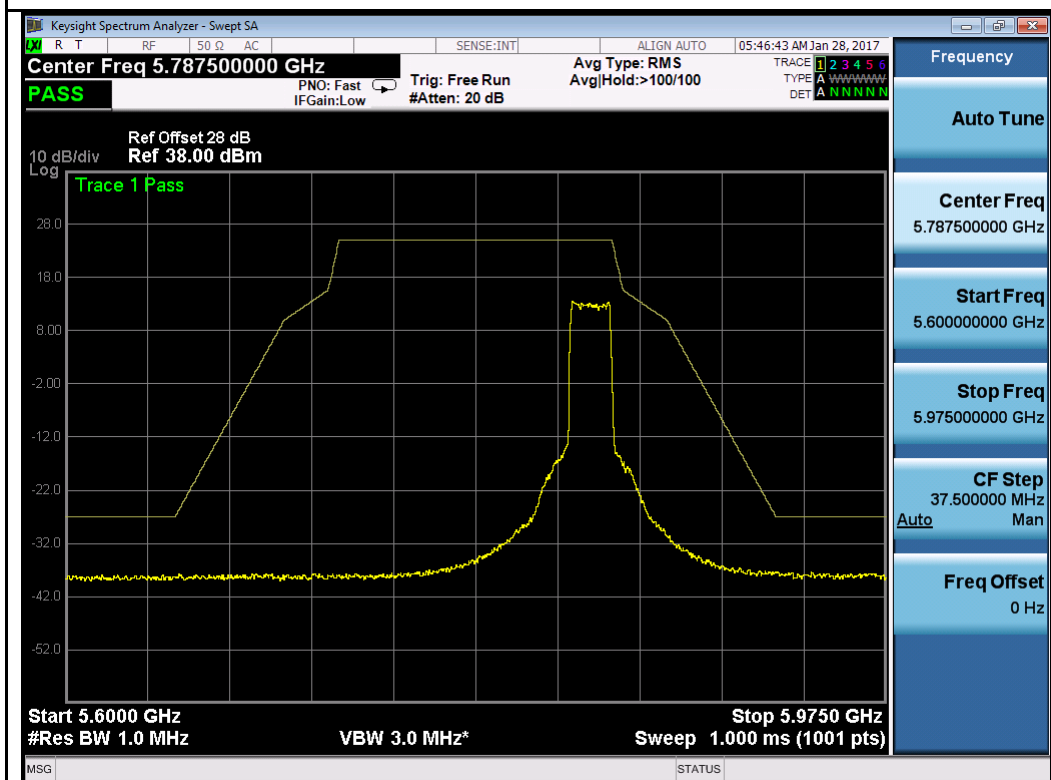

QPSK-5825MHz

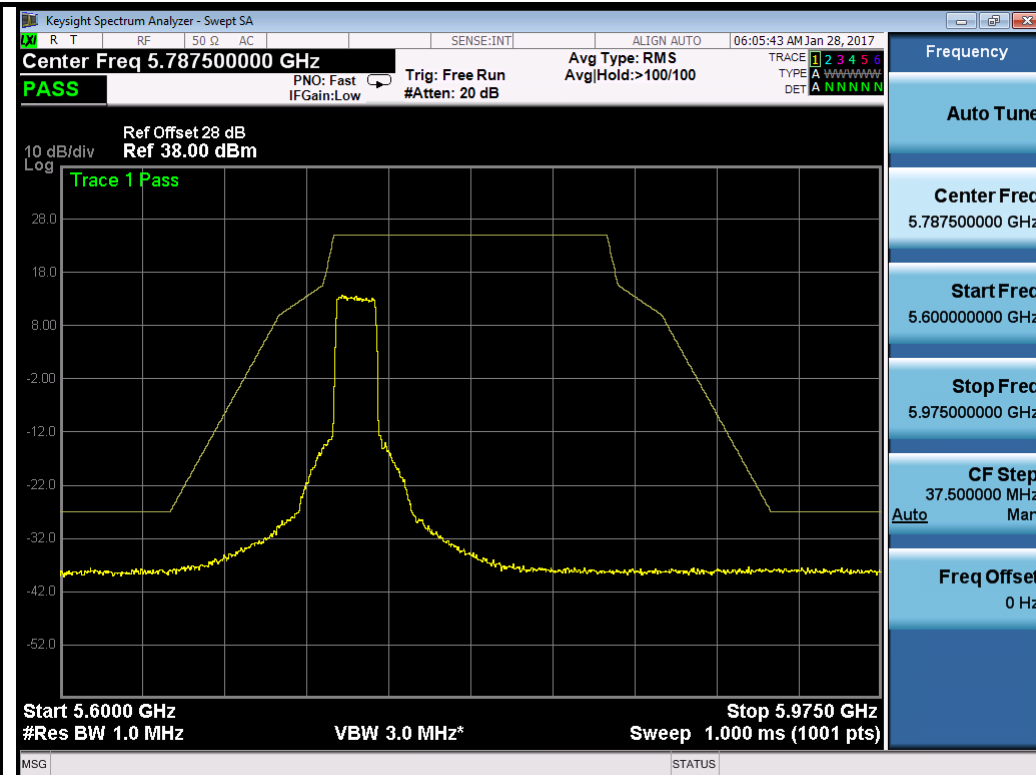


64QAM-5735MHz

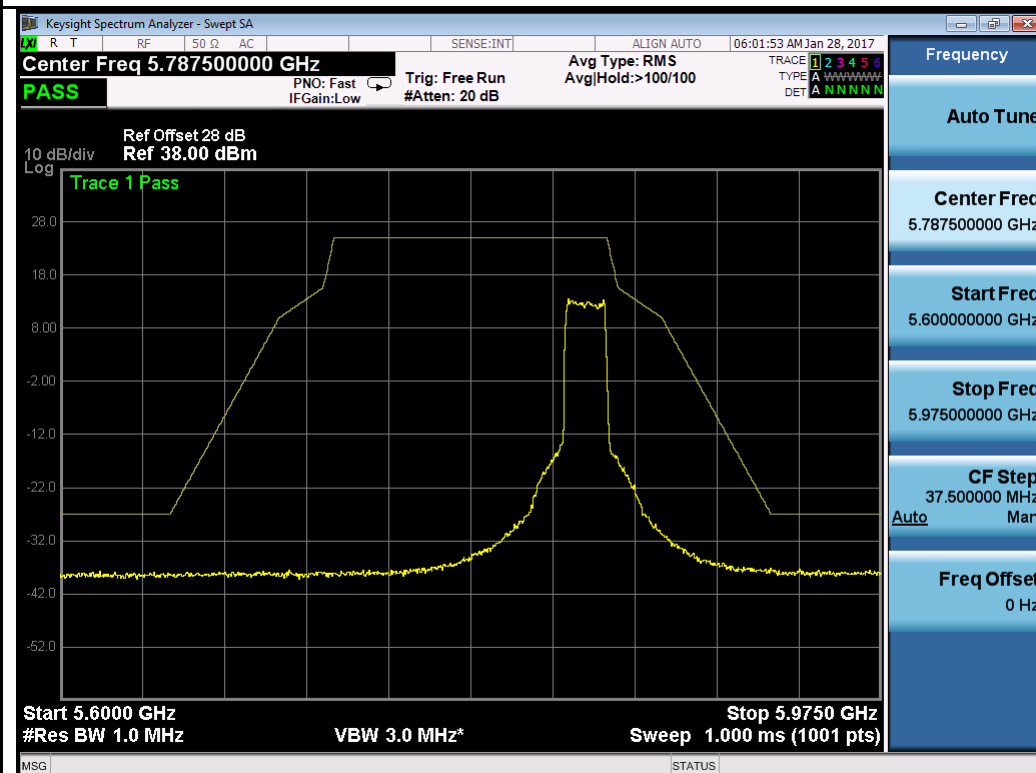


64QAM-5825MHz

Test Plot for W58 40MHz:

Chain 1:

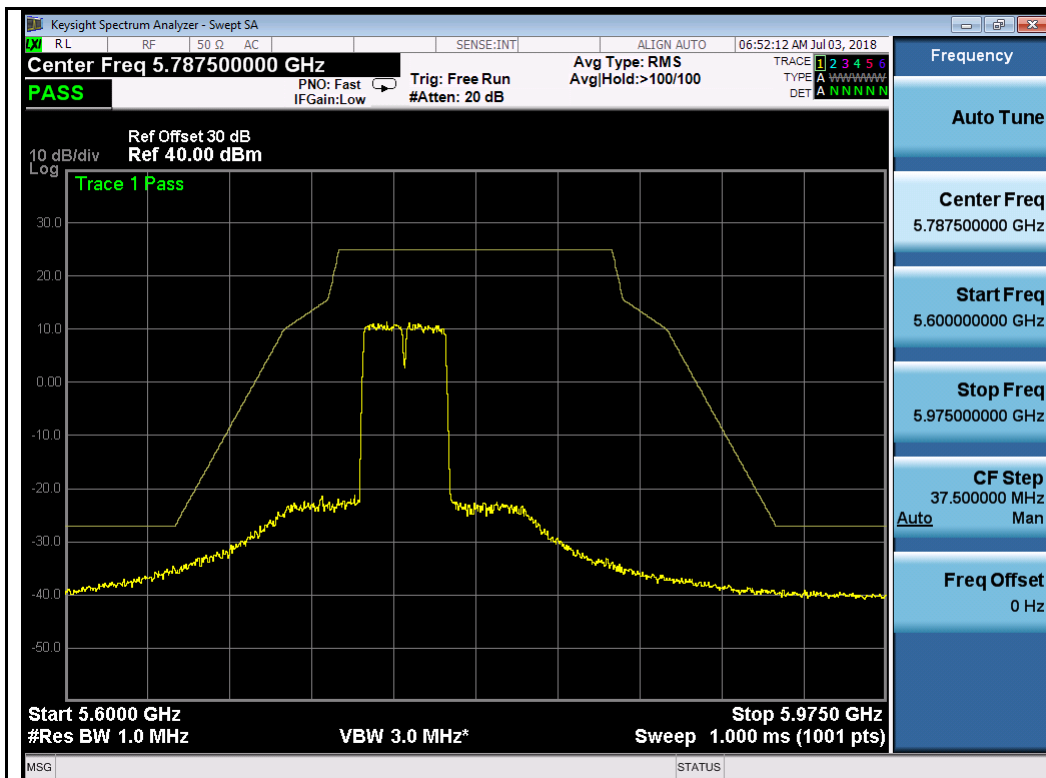


64QAM-5755MHz

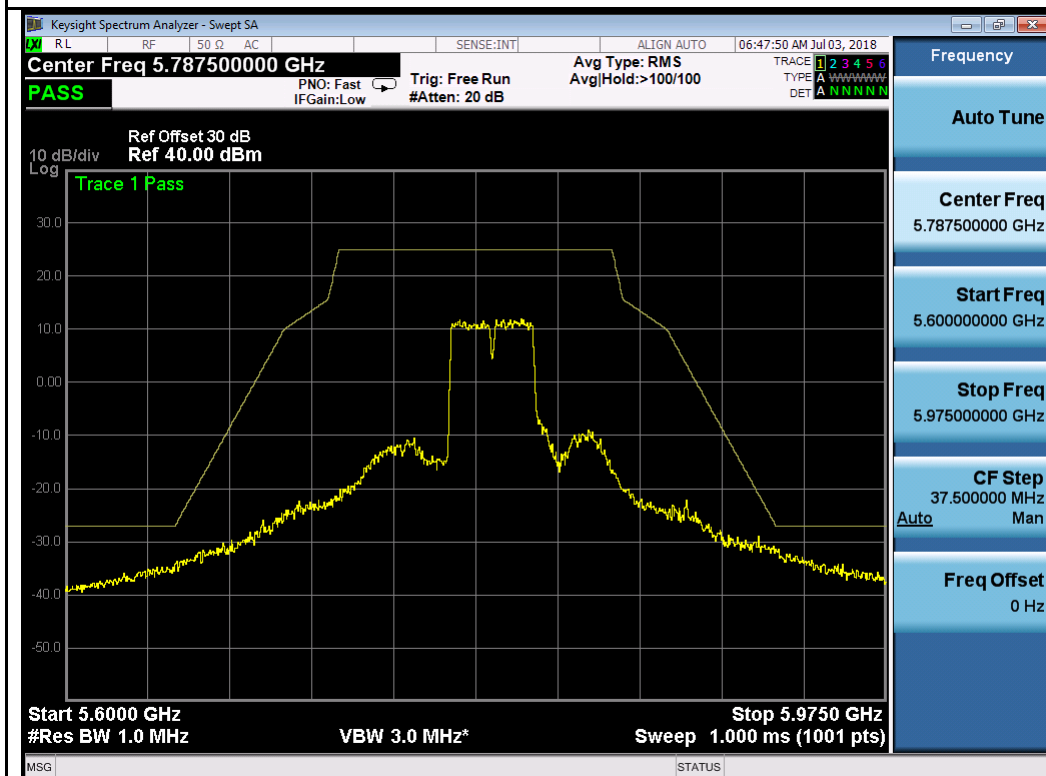


64QAM-5795MHz

Chain 1:

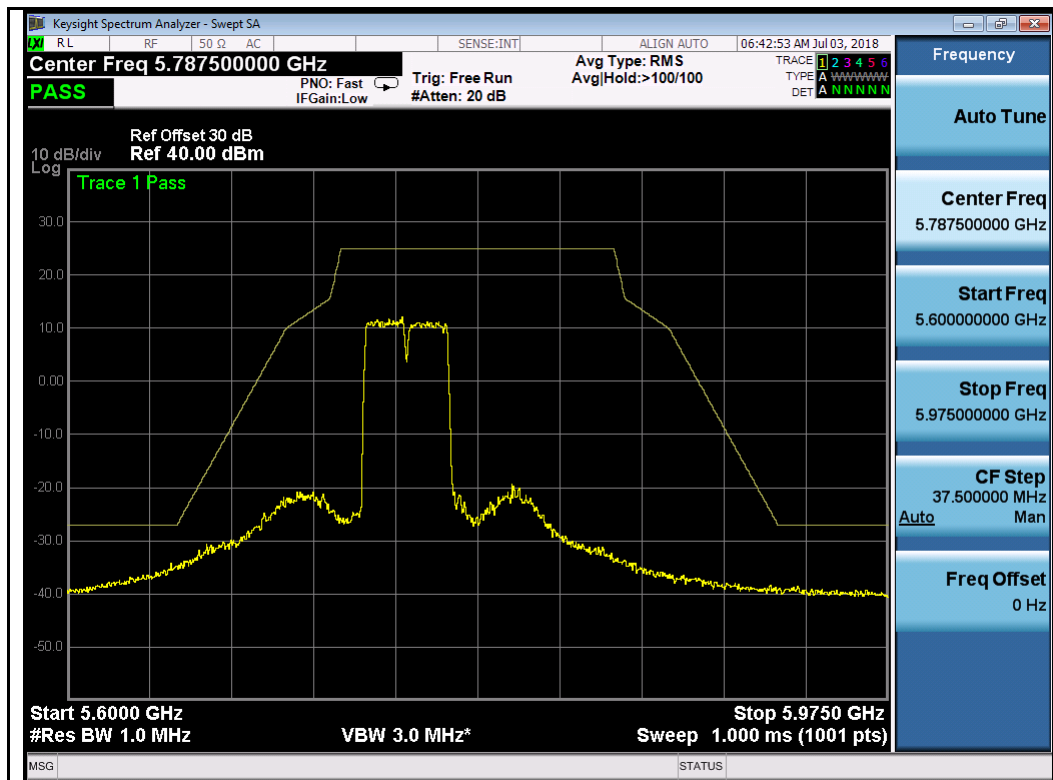


64QAM-5755MHz

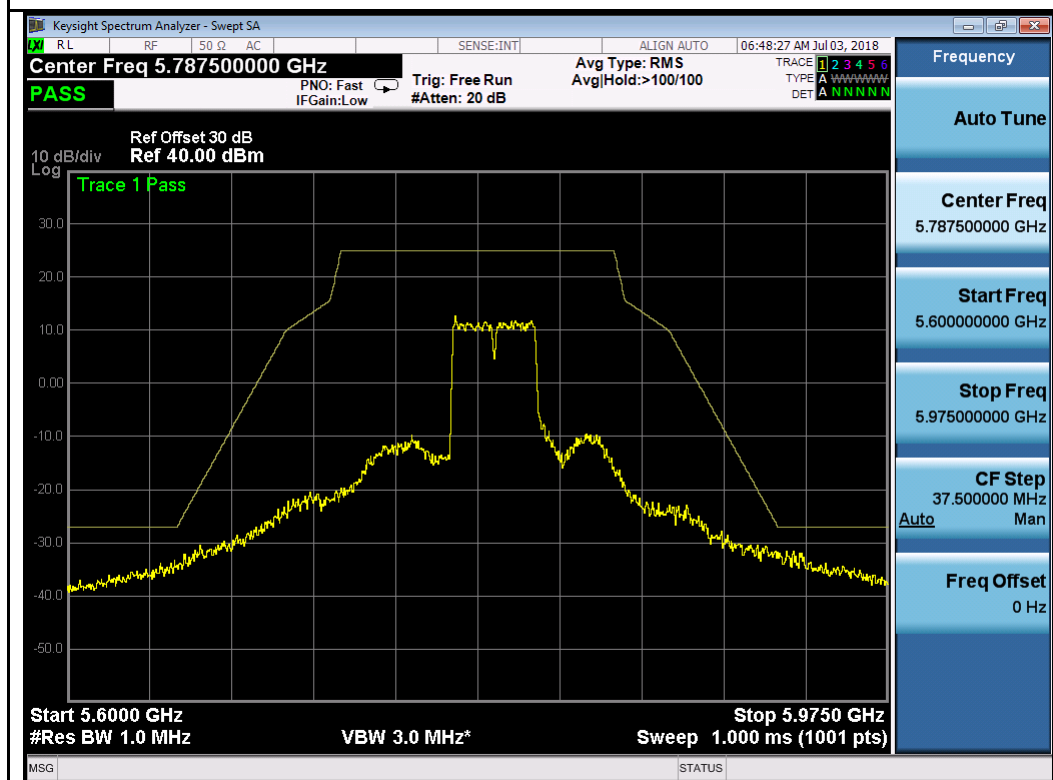

64QAM-5795MHz

10.6 Radiated Emissions below 1GHz

Requirement(s):

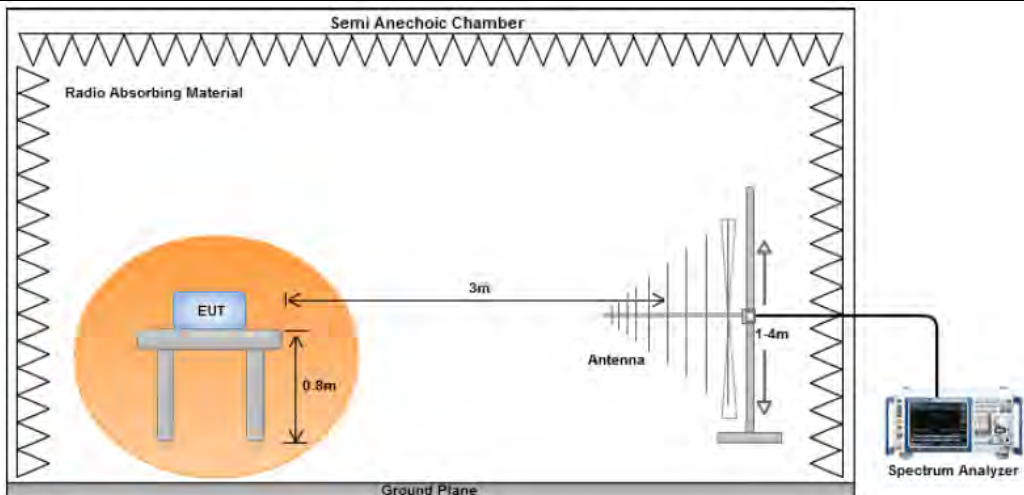Spec	Requirement	Applicable										
47CFR§ 15.407(b) 15.209 (a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges <table><tr><th>Frequency range (MHz)</th><th>Field Strength (uV/m)</th></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)											
30 – 88	100											
88 – 216	150											
216 960	200											
Above 960	500											
Test Setup												
Procedure	1. 2. 3. 4. The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: a. b. c. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. A Quasi-peak measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.											
Remark	The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.											
Result	☒ Pass ☐ Fail											


Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Gary Chou at 10m chamber.

Radiated Emission Test Results (Below 1GHz)

Test specification	below 1GHz			
Environmental Conditions:	Temp (°C):	26	Result	Pass
	Humidity (%)	47		
	Atmospheric (mbar):	1020		
Mains Power:	120VAC, 60Hz			
Tested by:	Gary Chou			
Test Date:	01/31/2017			
Remarks:	20MHz BW, 5200MHz			

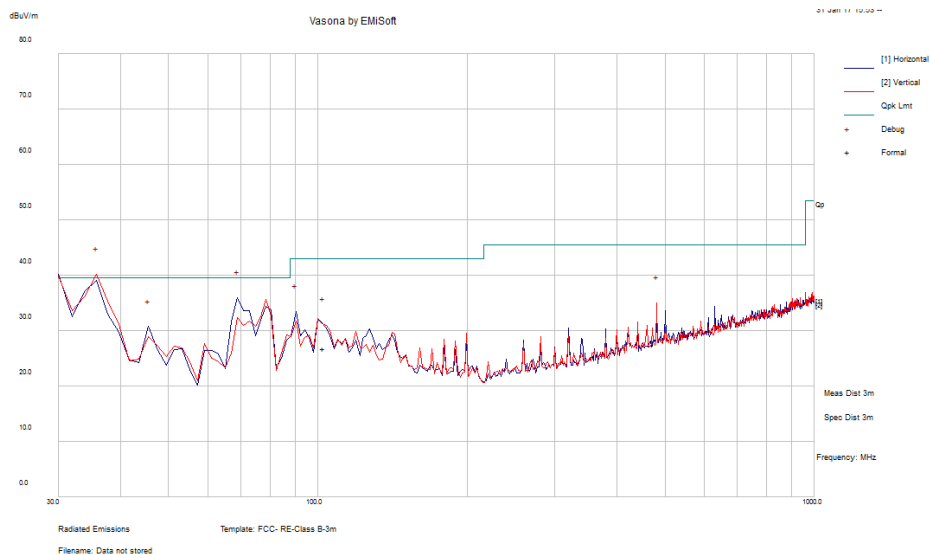


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
102.40	36.46	1.68	-11.35	26.78	Quasi Max	V	116	337	43	-16.22	Pass
35.67	31.99	1.1	-4.56	28.53	Quasi Max	V	391	258	39.5	-10.97	Pass
69.10	39.47	1.47	-14.04	26.9	Quasi Max	H	99	276	39.5	-12.6	Pass
45.34	29.37	1.25	-11.26	19.36	Quasi Max	H	99	118	39.5	-20.14	Pass
90.01	49.39	1.59	-13.99	36.98	Quasi Max	H	301	357	43	-6.02	Pass
481.14	24.37	3.54	-4.49	23.41	Quasi Max	V	253	119	45.5	-22.09	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

10.7 Radiated Spurious Emissions above 1GHz

Requirement(s):

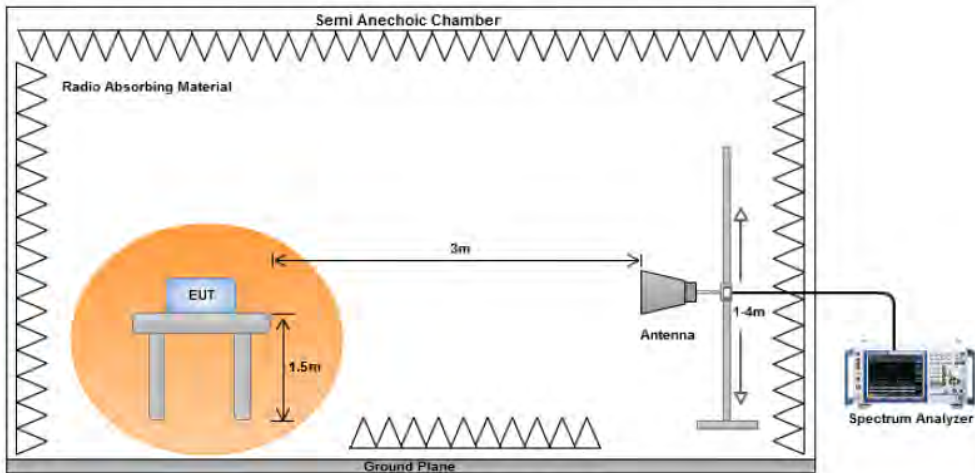
Spec	Item	Requirement	Applicable
47CFR§ 15.407(b)(2), 15.407(b)(6)	(1)	For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.	☒
	(2)	For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.	☐
	(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.	☐
	(4)	For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.	☒
	(5)	Restricted band, emission must also comply with the radiated emission limits specified in 15.209	☒
Test Setup			
Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. - The EUT was then rotated to the direction that gave the maximum emission. - Finally, the antenna height was adjusted to the height that gave the maximum emission. - An average measurement was then made for that frequency point. - Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.		
Remark	The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.		
Result	☒ Pass ☐ Fail		

Test Data ☐ Yes (See below) ☒ N/A


Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Gary Chou at 3m and 10m chamber.

Restricted Band Measurement Plots: 20MHz

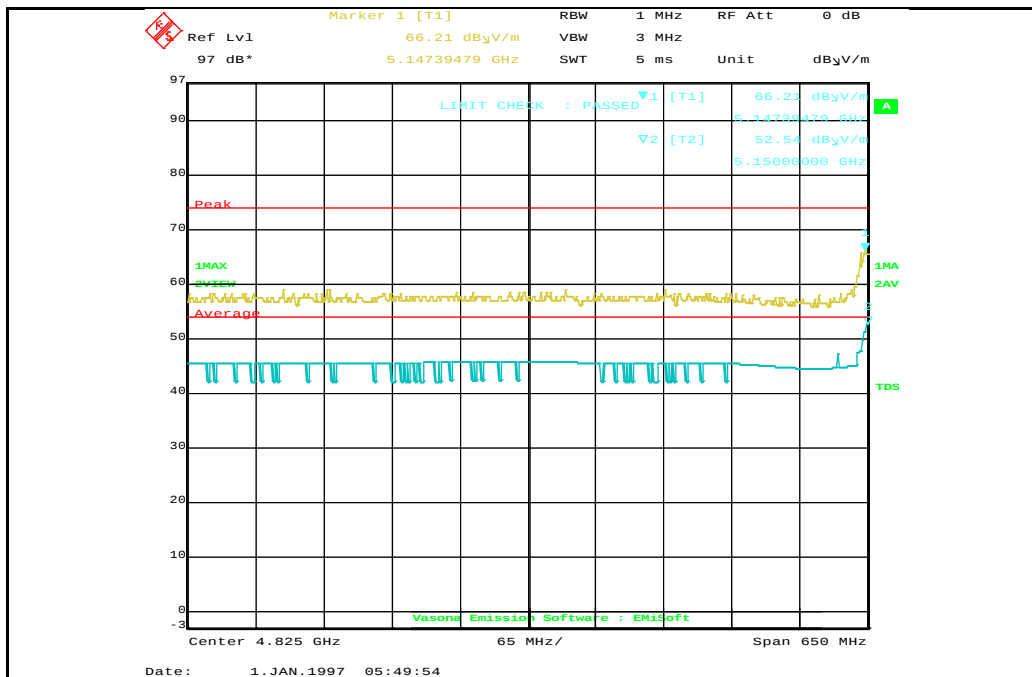


QPSK - 5180MHz

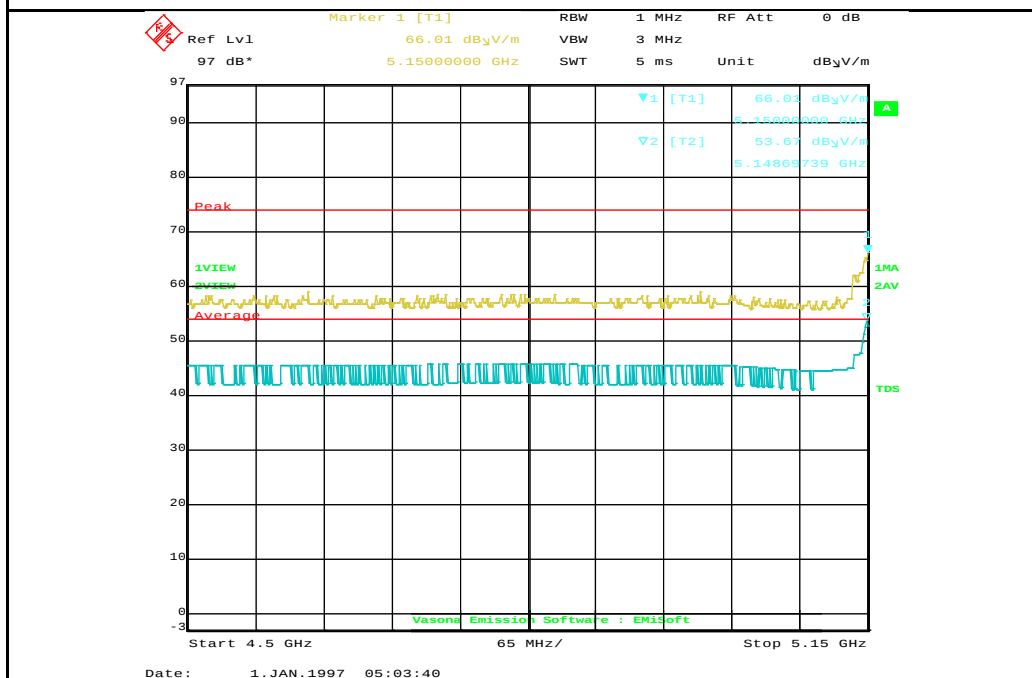

64QAM - 5180MHz

40MHz

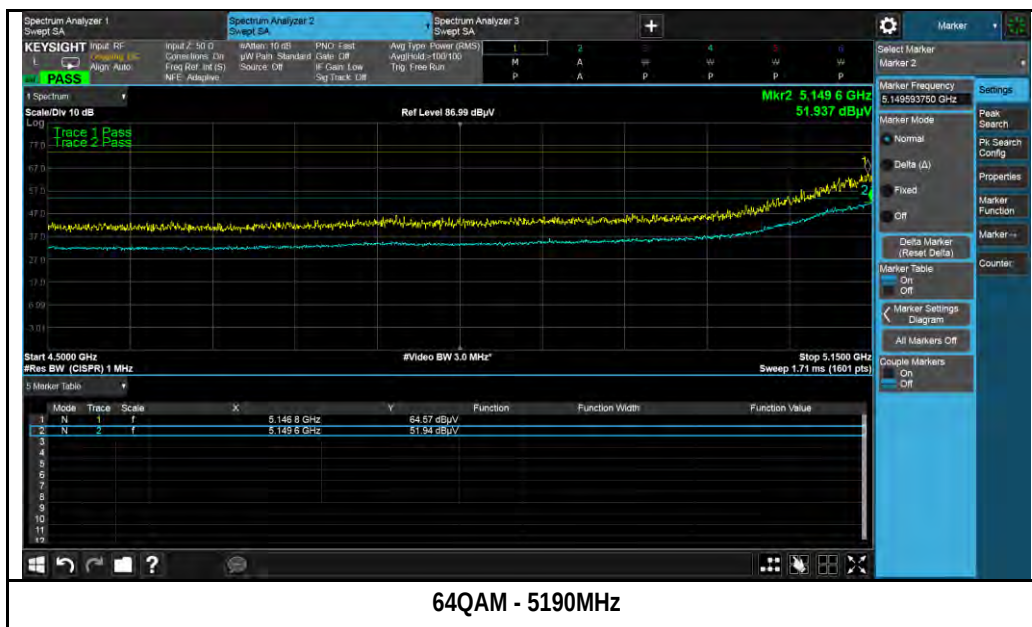

Radiated Emission Test Results (Above 1GHz)

20MHz:

1GHz-40GHz – 5160MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1885.25	44.99	3.15	-12.38	35.75	Peak Max	V	164	338	74	-38.25	Pass
3550.57	43.35	4.31	-7.2	40.47	Peak Max	V	180	72	74	-33.53	Pass
10320.20	39.84	7.88	2.1	49.83	Peak Max	V	120	72	74	-24.17	Pass
1885.25	33.48	3.15	-12.38	24.24	Average Max	V	164	338	54	-29.76	Pass
3550.57	31.54	4.31	-7.2	28.66	Average Max	V	180	72	54	-25.35	Pass
10320.20	28.29	7.88	2.1	38.28	Average Max	V	120	72	54	-15.72	Pass

1GHz-40GHz – 5200MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1884.03	45.45	3.15	-12.39	36.21	Peak Max	V	194	283	74	-37.79	Pass
3552.64	43.26	4.31	-7.19	40.38	Peak Max	V	190	42	74	-33.62	Pass
10400.53	40.57	7.68	2.36	50.61	Peak Max	V	107	19	74	-23.39	Pass
1884.03	33.52	3.15	-12.39	24.27	Average Max	V	194	283	54	-29.73	Pass
3552.64	31.84	4.31	-7.19	28.96	Average Max	V	190	42	54	-25.04	Pass
10400.53	29.03	7.68	2.36	39.07	Average Max	V	107	19	54	-14.93	Pass

1GHz-40GHz – 5240MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1869.92	45.17	3.13	-12.49	35.81	Peak Max	V	137	132	74	-38.19	Pass
3552.99	43.67	4.31	-7.19	40.79	Peak Max	V	126	326	74	-33.21	Pass
10480.61	41.24	7.61	1.86	50.71	Peak Max	V	171	290	74	-23.29	Pass
1869.92	33.18	3.13	-12.49	23.82	Average Max	V	137	132	54	-30.18	Pass
3552.99	31.62	4.31	-7.19	28.74	Average Max	V	126	326	54	-25.26	Pass
10480.61	28.86	7.61	1.86	38.34	Average Max	V	171	290	54	-15.67	Pass

40MHz:

1GHz-40GHz – 5190MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17586.85	38.66	8.03	11.47	58.15	Peak Max	V	241	31	74	-15.85	Pass
10393.66	46.63	6.71	2.07	55.41	Peak Max	V	197	127	74	-18.60	Pass
6916.63	38.83	5.21	0.69	44.73	Peak Max	V	165	65	74	-29.27	Pass
17586.85	26.65	8.03	11.47	46.14	Average Max	V	241	31	54	-7.86	Pass
10393.66	34.24	6.71	2.07	43.01	Average Max	V	197	127	54	-10.99	Pass
6916.63	26.31	5.21	0.69	32.21	Average Max	V	165	65	54	-21.80	Pass

1GHz-40GHz – 5230MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17990.91	39.83	8.19	11.77	59.78	Peak Max	V	379	50	74	-14.22	Pass
10456.74	48.85	6.74	2.13	57.72	Peak Max	V	199	133	74	-16.28	Pass
6966.73	38.28	5.22	0.80	44.30	Peak Max	V	375	229	74	-29.70	Pass
17990.91	27.00	8.19	11.77	46.96	Average Max	V	379	50	54	-7.04	Pass
10456.74	36.05	6.74	2.13	44.92	Average Max	V	199	133	54	-9.08	Pass
6966.73	26.17	5.22	0.80	32.20	Average Max	V	375	229	54	-21.80	Pass

1GHz-40GHz – 5735MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1869.92	45.17	3.13	-12.49	35.81	Peak Max	V	137	132	74	-38.19	Pass
3550.51	43.2	4.31	-7.2	40.32	Peak Max	V	145	187	74	-33.69	Pass
11470.65	40.06	7.56	1.98	49.6	Peak Max	V	182	276	74	-24.4	Pass
1869.92	33.18	3.13	-12.49	23.82	Average Max	V	137	132	54	-30.18	Pass
3550.51	31.46	4.31	-7.2	28.58	Average Max	V	145	187	54	-25.42	Pass
11470.65	28.44	7.56	1.98	37.98	Average Max	V	182	276	54	-16.02	Pass

1GHz-40GHz – 5785MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1915.66	45.09	3.18	-12.2	36.07	Peak Max	V	175	356	74	-37.93	Pass
3551.22	44.08	4.31	-7.2	41.19	Peak Max	V	198	296	74	-32.81	Pass
11575.66	39.22	7.52	1.88	48.62	Peak Max	V	110	126	74	-25.39	Pass
1915.66	33.17	3.18	-12.2	24.15	Average Max	V	175	356	54	-29.85	Pass
3551.22	31.92	4.31	-7.2	29.03	Average Max	V	198	296	54	-24.97	Pass
11575.66	27.79	7.52	1.88	37.18	Average Max	V	110	126	54	-16.82	Pass

1GHz-40GHz – 5825MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1918.23	44.16	3.18	-12.19	35.15	Peak Max	V	115	213	74	-38.85	Pass
3533.48	43.76	4.3	-7.25	40.8	Peak Max	V	172	271	74	-33.2	Pass
11680.98	39.99	7.24	0.17	47.4	Peak Max	V	150	336	74	-26.6	Pass
1918.23	33	3.18	-12.19	24	Average Max	V	115	213	54	-30.01	Pass
3533.48	31.88	4.3	-7.25	28.92	Average Max	V	172	271	54	-25.08	Pass
11680.98	28.23	7.24	0.17	35.63	Average Max	V	150	336	54	-18.37	Pass

40MHz:

1GHz-40GHz – 5755MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17337.37	38.36	8.07	10.06	56.49	Peak Max	V	108	164	74	-17.51	Pass
12413.97	38.85	6.73	4.44	50.01	Peak Max	V	304	326	74	-23.99	Pass
7223.01	38.46	5.32	0.83	44.60	Peak Max	V	102	289	74	-29.40	Pass
17337.37	26.44	8.07	10.06	44.57	Average Max	V	108	164	54	-9.43	Pass
12413.97	26.28	6.73	4.44	37.44	Average Max	V	304	326	54	-16.56	Pass
7223.01	26.10	5.32	0.83	32.25	Average Max	V	102	289	54	-21.75	Pass

1GHz-40GHz – 5795MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17938.07	38.79	8.17	12.03	58.99	Peak Max	V	104	219	74	-15.01	Pass
11700.67	38.08	7.85	2.44	48.37	Peak Max	V	307	88	74	-25.63	Pass
7262.10	37.97	5.33	0.84	44.14	Peak Max	V	208	316	74	-29.86	Pass
17938.07	26.95	8.17	12.03	47.15	Average Max	V	104	219	54	-6.85	Pass
11700.67	26.06	7.85	2.44	36.35	Average Max	V	307	88	54	-17.65	Pass
7262.10	25.99	5.33	0.84	32.16	Average Max	V	208	316	54	-21.84	Pass

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Conducted Emissions						
R & S Receiver	ESIB 40	100179	06/08/2018	1 Year	06/08/2019	☒
CHASE LISN	MN2050B	1018	08/07/2017	1 Year	08/07/2018	☒
Radiated Emissions						
Spectrum Analyzer	N9010A	10SL0219	08/20/2017	1 Year	08/20/2018	☒
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/12/2017	1 Year	08/12/2018	☒
Horn Antenna (1GHz~26GHz)	3115	100059	08/25/2017	1 Year	08/25/2018	☒
Horn Antenna (26GHz~40GHz)	AH-840	101013	08/28/2017	1 Year	08/28/2018	☒
Pre-Amp (30MHz~40GHz)	LPA-6-30	11140711	02/10/2018	1 Year	02/10/2019	☒
RF Conducted Measurement						
Spectrum Analyzer	N9010A	10SL0219	08/20/2017	1 Year	08/20/2018	☒

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)		Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		Radio: A1. Terminal equipment for purpose of calling Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law
Korea CAB Accreditation		EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68 Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site C-3421: Main Ports Conducted Interference Measurement T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4 Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771 Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06, AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2