



FCC PART 15.247

TEST REPORT

For

Mobi Technologies, Inc.

5913 Blackwelder St, Culver City, CA 90232, United States

FCC ID: Y4N70295T

Report Type: Original Report	Product Type: MobiCam Clear & Secure Digital Audio/Video Monitor
Test Engineer: <u>Brown Lu</u>	<i>Brown Lu</i>
Report Number: <u>RSZ111214001-00</u>	
Report Date: <u>2012-04-13</u>	
Reviewed By: <u>EMC Engineer</u>	<i>Merry Zhao</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP* or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk “★” (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
STANDARD APPLICABLE	9
TEST DATA	9
FCC §15.203 – ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) - CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	17
APPLICABLE STANDARD	17
MEASUREMENT UNCERTAINTY	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	19
TEST DATA	19
CFR47 §15.247(a) (1)-CHANNEL SEPARATION TEST	23
APPLICABLE STANDARD	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST PROCEDURE	23
TEST DATA	23
CFR47 §15.247(a) (1) – 20 dB BANDWIDTH TESTING	26

APPLICABLE STANDARD	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST PROCEDURE	26
TEST DATA	26
CFR47 §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	29
APPLICABLE STANDARD	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST PROCEDURE	29
TEST DATA	29
CFR47 §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....	31
APPLICABLE STANDARD	31
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST PROCEDURE	31
TEST DATA	31
CFR47 §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....	34
APPLICABLE STANDARD	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST PROCEDURE	34
TEST DATA	34
CFR47 §15.247(d) - BAND EDGES TESTING	37
APPLICABLE STANDARD	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST PROCEDURE	37
TEST DATA	38

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Mobi Technologies, Inc.*'s product, model number: 70295T (FCC ID: Y4N70295T) (the "EUT") in this report is a baby unit of *MobiCam Clear & Secure Digital Audio/Video Monitor*, which was measured approximately: 9.5 cm (L) x 7.2 cm (W) x 3.0 cm (H), rated input voltage: DC 6V from adapter.

Adapter 1 Information:

AC-DC Adapter

Model: CTR04-060-0400U;

Input: 100-240V~50/60Hz 150mA;

Output: 6V DC 400mA

Adapter 2 Information:

POWER SUPPLY

Model: LFS060400D-A8S;

Input: 100-240V AC 50/60Hz 0.15A (MAX);

Output: 6V DC 0.4A

** All measurement and test data in this report was gathered from production sample serial number: 1112026 (Assigned by BACL, Shenzhen). The EUT was received on 2011-12-14.*

Objective

This Type approval report is prepared on behalf of *Mobi Technologies, Inc.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Submitted with the part of a system with FCC ID: Y4N70294R.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode which was selected by manufacturer.

EUT Exercise Software

No Exercise Software.

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Mobi	MobiCam Clear & Secure Digital Audio/Video Monitor	70294R (Parent Unit)	N/A

External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded Detachable DC Power Cable	1.8	EUT	Adapter

Block Diagram of Test Setup

Conducted Emission:

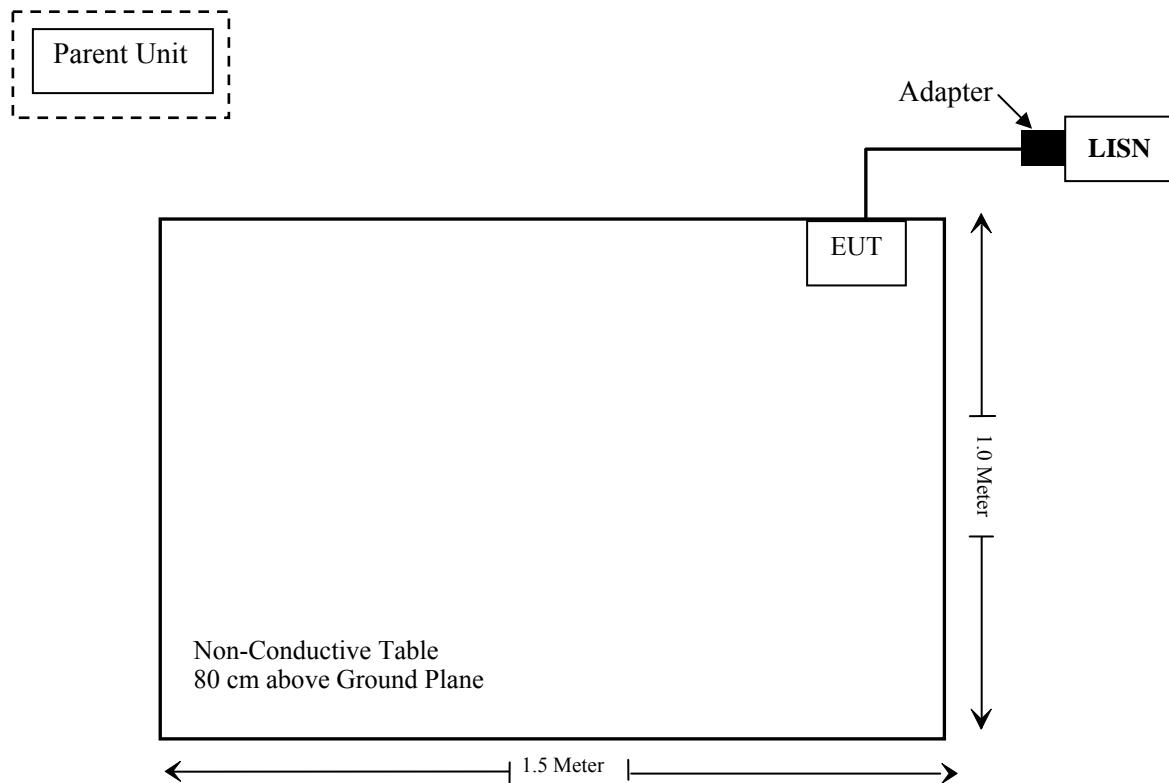

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Standard Applicable

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mw/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Test Data

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where:

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally **numeric** gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Maximum peak output power at antenna input terminal: 19.09 (dBm)

Maximum peak output power at antenna input terminal: 81.10(mW)

Predication distance: >20 (cm)

Predication frequency: 2471.625 (MHz)

Antenna Gain (typical): 1.6 (dBi)

Maximum Antenna Gain: 1.45 (numeric)

The worst case is power density at predication frequency at 20 cm: 0.0234 (mW/cm²)

MPE limit for general population exposure at predication frequency: 1.0 (mW/cm²)

Result: The device meets the MPE at 20 cm distance.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

This product has an integrated antenna arrangement and the gain is 0 dBi, which was soldered on PCB, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) - CONDUCTED EMISSIONS

Applicable Standard


CFR47 §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence).

EUT Setup

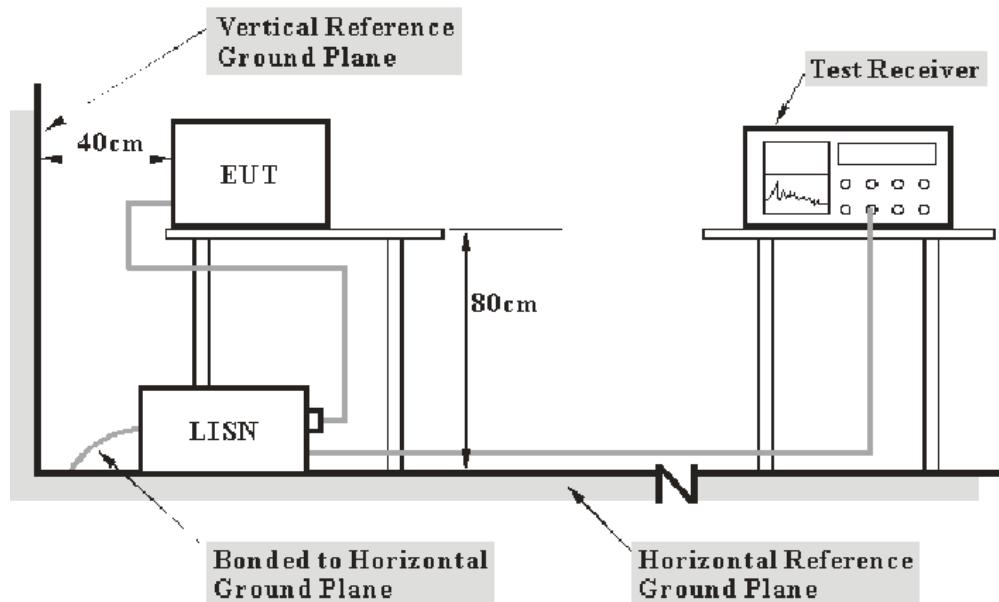

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08
Rohde & Schwarz	Pulse limiter	ESH3Z2	DE25985	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the [FCC Part 15.207](#), with the worst margin reading of:

Powered by adapter 1:

19.30 dB at 0.375 MHz in the **Neutral** conducted mode

Powered by adapter 2:

17.05 dB at 0.465 MHz in the **Line** conducted mode

Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Brown Lu on 2011-12-26.


Test Mode: Operating (Powered by adapter 1)

AC 120 V, 60 Hz, Line:

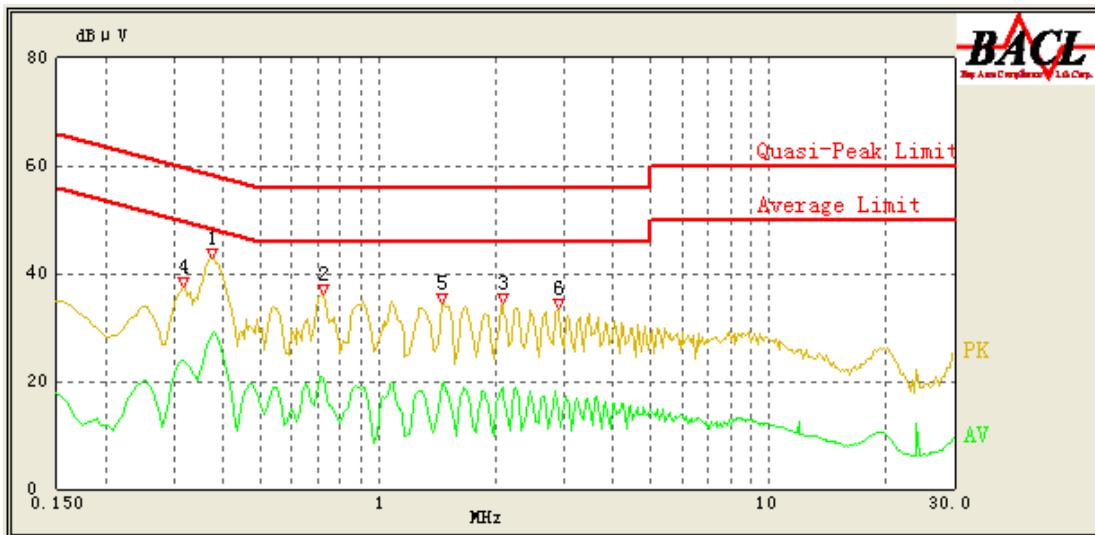

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Amplitude (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (PK/QP/Ave.)
0.375	28.87	10.10	49.57	20.70	Ave.
0.375	35.32	10.10	59.57	24.25	QP
0.720	20.60	10.10	46.00	25.40	Ave.
1.455	19.30	10.10	46.00	26.70	Ave.
2.080	18.72	10.10	46.00	27.28	Ave.
0.315	23.75	10.10	51.29	27.54	Ave.
0.720	27.52	10.10	56.00	28.48	QP
2.880	16.50	10.10	46.00	29.50	Ave.
1.460	26.26	10.10	56.00	29.74	QP
2.080	25.78	10.10	56.00	30.22	QP
0.315	30.06	10.10	61.29	31.23	QP
2.885	23.75	10.10	56.00	32.25	QP


AC 120V, 60 Hz, Neutral:

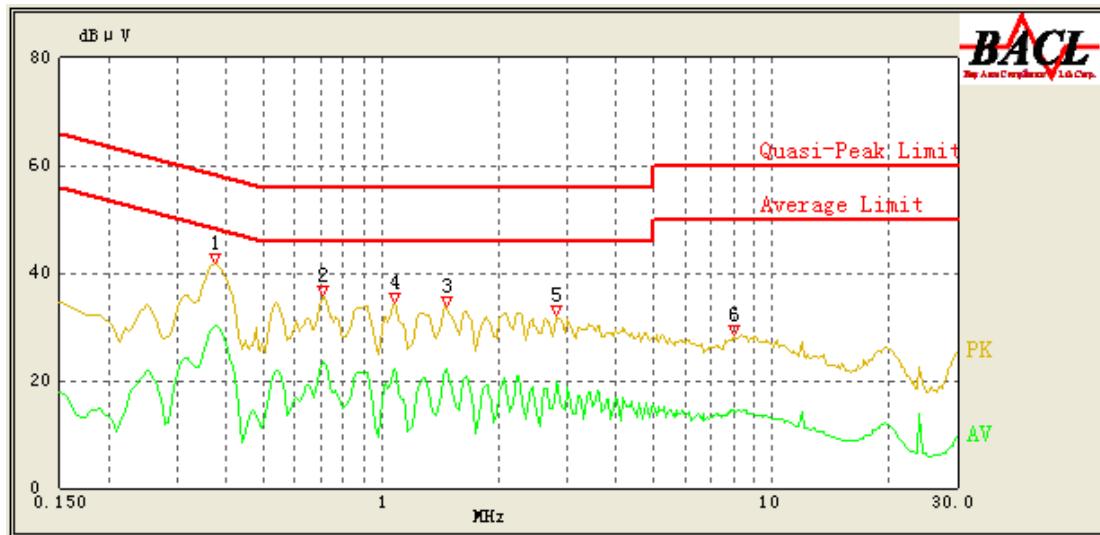

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Amplitude (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (PK/QP/Ave.)
0.375	30.27	10.10	49.57	19.30	Ave.
0.375	38.29	10.10	59.57	21.28	QP
0.710	23.55	10.10	46.00	22.45	Ave.
0.710	32.46	10.10	56.00	23.54	QP
1.465	22.17	10.10	46.00	23.83	Ave.
1.085	22.04	10.10	46.00	23.96	Ave.
1.085	30.10	10.10	56.00	25.90	QP
2.820	19.90	10.10	46.00	26.10	Ave.
1.465	29.58	10.10	56.00	26.42	QP
2.815	25.87	10.10	56.00	30.13	QP
8.015	14.34	10.10	50.00	35.66	Ave.
8.015	22.88	10.10	60.00	37.12	QP


Test Mode: Operating (Powered by adapter 2)

AC 120 V, 60 Hz, Line:

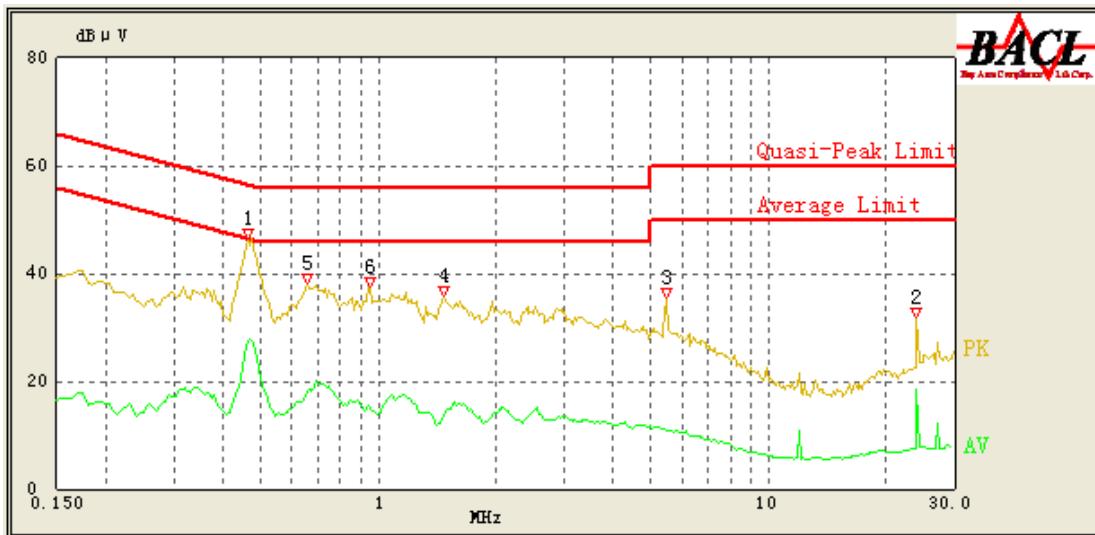

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Amplitude (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (QP/Ave.)
0.465	39.95	10.10	57.00	17.05	QP
0.465	27.49	10.10	47.00	19.51	Ave.
0.660	31.77	10.10	56.00	24.23	QP
0.655	18.29	10.10	46.00	27.71	Ave.
1.475	27.85	10.10	56.00	28.15	QP
0.955	26.92	10.10	56.00	29.08	QP
0.950	15.06	10.10	46.00	30.94	Ave.
23.995	28.87	10.10	60.00	31.13	QP
23.995	18.47	10.10	50.00	31.53	Ave.
1.475	13.96	10.10	46.00	32.04	Ave.
5.455	21.38	10.10	60.00	38.62	QP
5.455	10.93	10.10	50.00	39.07	Ave.

AC 120V, 60 Hz, Neutral:

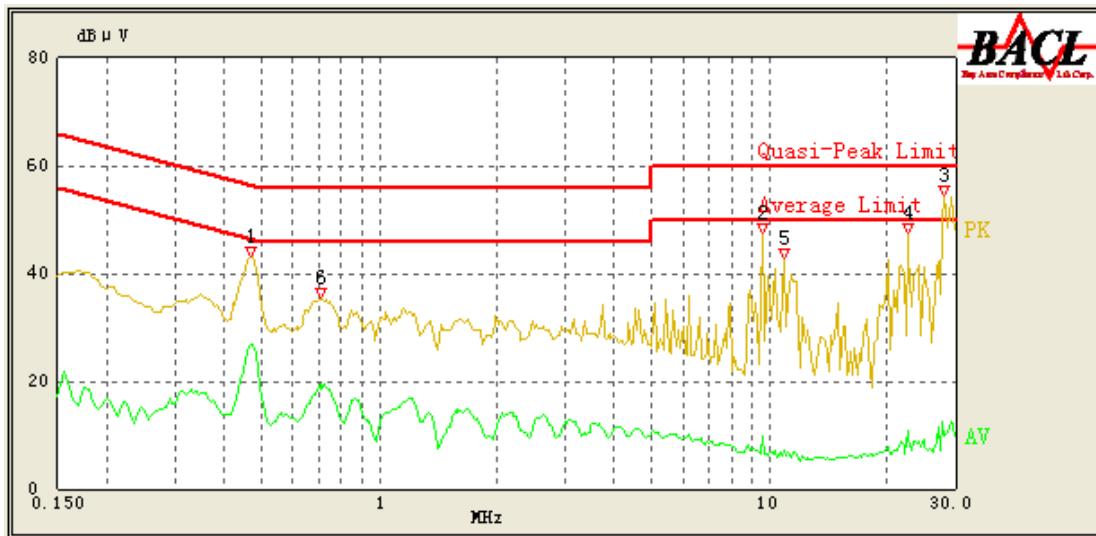

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Amplitude (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (PK/QP/Ave.)
0.470	39.57	10.10	56.86	17.29	QP
0.470	26.88	10.10	46.86	19.98	Ave.
0.705	31.44	10.10	56.00	24.56	QP
0.705	19.36	10.10	46.00	26.64	Ave.
22.710	10.77	10.10	50.00	39.23	Ave.
9.580	9.98	10.10	50.00	40.02	Ave.
28.125	9.88	10.10	50.00	40.12	Ave.
10.935	7.10	10.10	50.00	42.90	Ave.
10.935	12.95	10.10	60.00	47.05	QP
22.710	12.33	10.10	60.00	47.67	QP
28.125	11.71	10.10	60.00	48.29	QP
9.590	11.04	10.10	60.00	48.96	QP

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB (k=2, 95% level of confidence).

EUT Setup

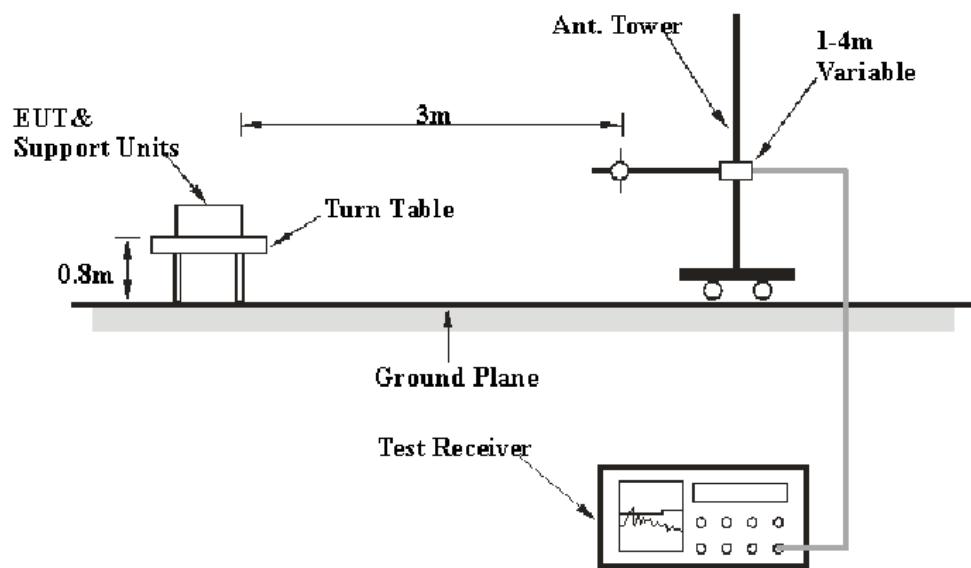

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	PK

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2011-07-05	2012-07-04
Mini-circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-07
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
Electro-Mechanics	Horn Antenna	3116	9510-2270	2011-10-11	2012-10-10
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz and peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

7.06 dB at 4876 MHz in the **Horizontal** polarization at **middle** channel

Test Data



Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Brown Lu on 2011-12-22.

30 MHz - 25GHz:

Indicated		Detector (PK/Ave.)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	Receiver Reading (dB μ V)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Comment
Low Channel (2410.875 MHz)												
2410.875	103.26	PK	250	1.3	H	30.5	3.03	26.83	109.96	/	/	Fund.
2410.875	88.61	Ave.	250	1.3	H	30.5	3.03	26.83	95.31	/	/	Fund.
2410.875	100.07	PK	150	1.8	V	30.2	3.03	26.83	106.47	/	/	Fund.
2410.875	86.52	Ave.	150	1.8	V	30.2	3.03	26.83	92.92	/	/	Fund.
4822	30.54	Ave.	0	1.4	H	36.3	4.30	26.75	44.39	54	9.61	harmonic
4822	28.87	Ave.	0	2.3	V	35.0	4.30	26.75	41.42	54	12.58	harmonic
4822	44.52	PK	0	1.4	H	36.3	4.30	26.75	58.37	74	15.63	harmonic
4822	42.42	PK	0	2.3	V	35.0	4.30	26.75	54.97	74	19.03	harmonic
2386.12	22.42	Ave.	21	1.0	V	30.8	3.03	26.83	29.42	54	24.58	spurious
2386.12	20.40	Ave.	21	1.0	H	30.8	3.03	26.83	27.40	54	26.60	spurious
2386.12	36.42	PK	21	1.0	V	30.8	3.03	26.83	43.42	74	30.58	spurious
2386.12	34.61	PK	21	1.0	H	30.8	3.03	26.83	41.61	74	32.39	spurious
Middle Channel (2437.875 MHz)												
2437.875	104.28	PK	310	1.4	H	30.6	3.08	26.83	111.13	/	/	Fund.
2437.875	90.04	Ave.	310	1.4	H	30.6	3.08	26.83	96.89	/	/	Fund.
2437.875	101.38	PK	150	1.6	V	30.5	3.08	26.83	108.13	/	/	Fund.
2437.875	87.22	Ave.	150	1.6	V	30.5	3.08	26.83	93.97	/	/	Fund.
4876	32.72	Ave.	0	2.0	H	36.6	4.37	26.75	46.94	54	7.06	harmonic
4876	31.10	Ave.	0	2.3	V	35.4	4.37	26.75	44.12	54	9.88	harmonic
4876	48.25	PK	0	2.0	H	36.6	4.37	26.75	62.47	74	11.53	harmonic
4876	45.34	PK	0	2.3	V	35.4	4.37	26.75	58.36	74	15.64	harmonic
High Channel (2471.625 MHz)												
2471.625	106.35	PK	160	1.1	H	30.8	3.11	26.83	113.43	/	/	Fund.
2471.625	91.71	Ave.	160	1.1	H	30.8	3.11	26.83	98.79	/	/	Fund.
2471.625	102.84	PK	250	1.3	V	30.6	3.11	26.83	109.72	/	/	Fund.
2471.625	87.17	Ave.	250	1.3	V	30.6	3.11	26.83	94.05	/	/	Fund.
4943	32.24	Ave.	360	2.2	H	36.6	4.37	26.75	46.46	54	7.54	harmonic
4943	33.24	Ave.	0	2.4	V	35.4	4.37	26.75	46.26	54	7.74	harmonic
4943	50.42	PK	360	2.2	H	36.6	4.37	26.75	64.64	74	9.36	harmonic
4943	49.67	PK	0	2.4	V	35.4	4.37	26.75	62.69	74	11.31	harmonic
2484.56	22.74	Ave.	0	1.0	V	31.0	3.04	26.83	29.95	54	24.05	spurious
2484.56	21.65	Ave.	0	1.0	H	31.0	3.04	26.83	28.86	54	25.14	spurious
2484.56	36.78	PK	0	1.0	V	31.0	3.04	26.83	43.99	74	30.01	spurious
2484.56	35.85	PK	0	1.0	H	31.0	3.04	26.83	43.06	74	30.94	spurious

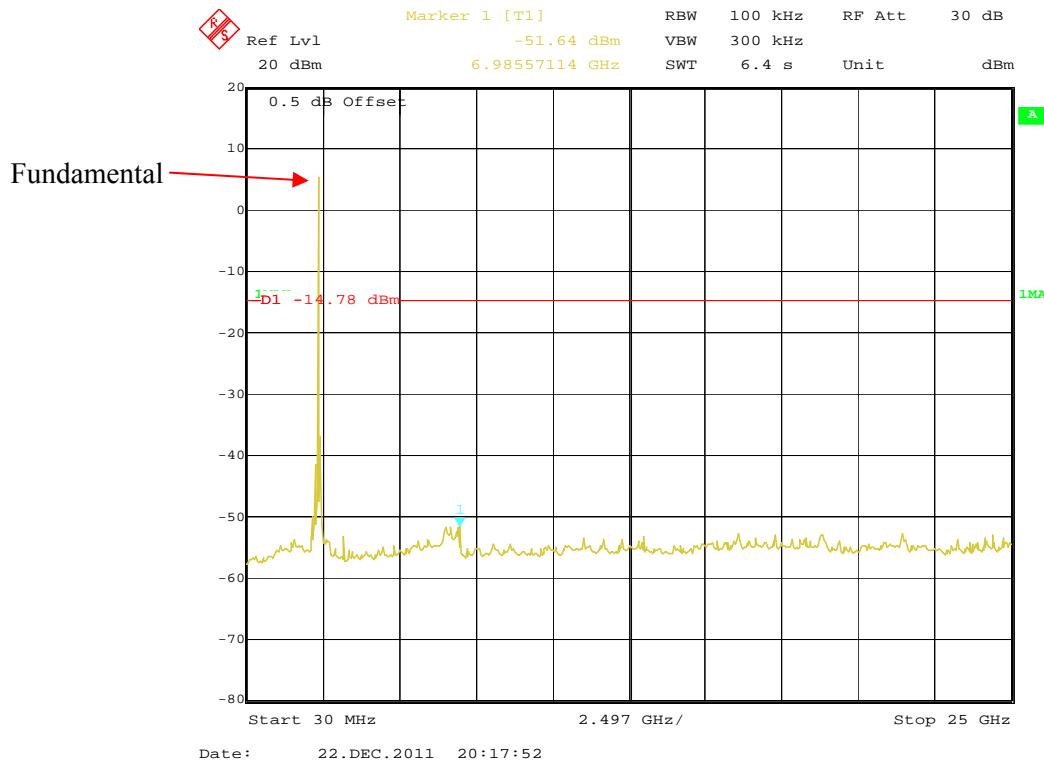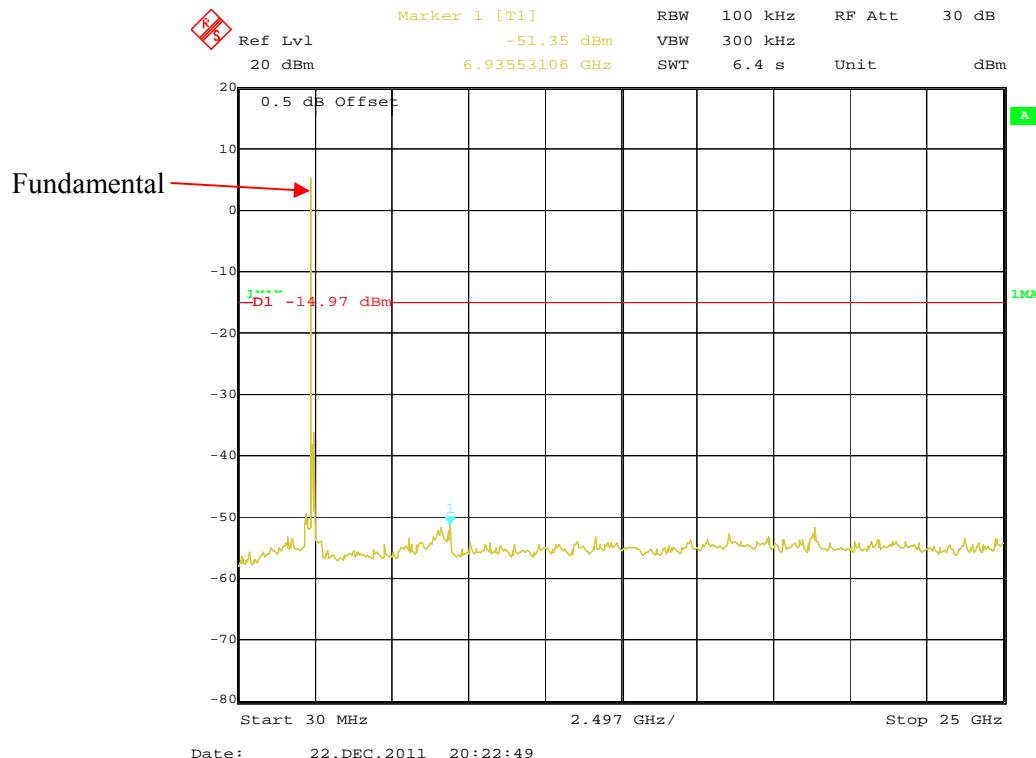Spurious Emissions at Antenna Terminal:**Please refer to the following plots:****Low Channel****Middle Channel**

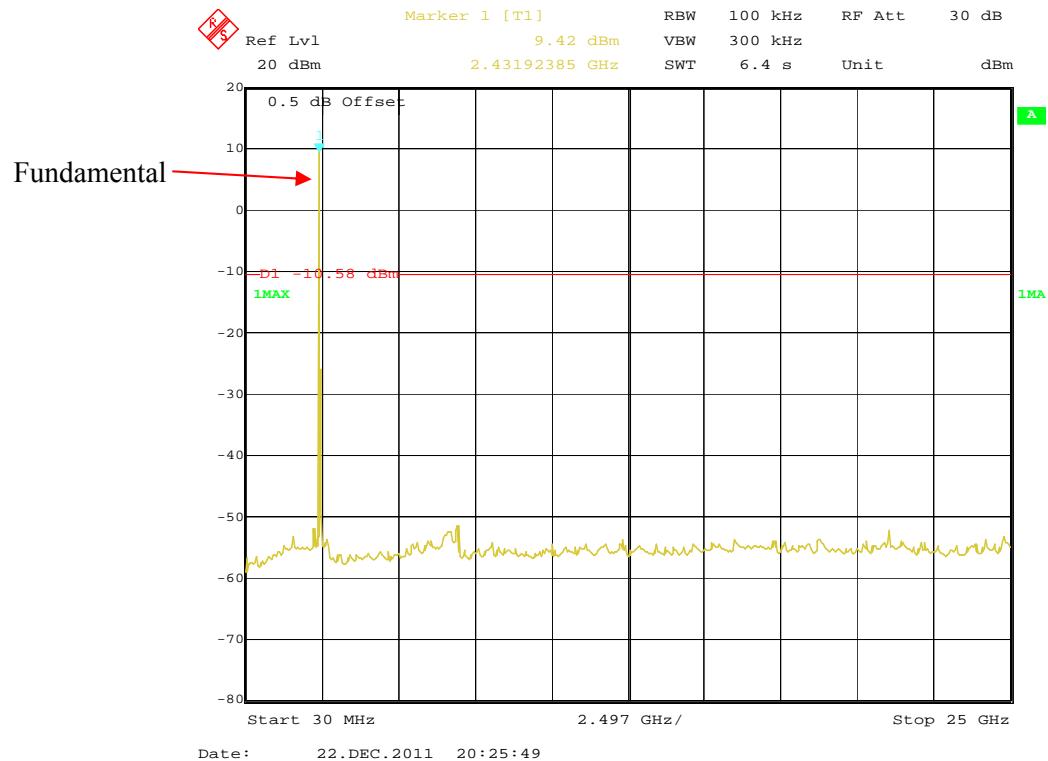High Channel

CFR47 §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in Operating mode, RBW of spectrum Bandwidth was set at 100 kHz, $VBW \geq 3RBW$, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa


* The testing was performed by Brown Lu on 2011-12-19.

Test Mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result	
Low Channel	2410.875	3.374	2.55	Pass	
Adjacency Channel	2414.250				
Mid Channel	2437.875		2.56		
Adjacency Channel	2441.250				
High Channel	2471.625	3.388	2.51		
Adjacency Channel	2468.250				


Low Channel

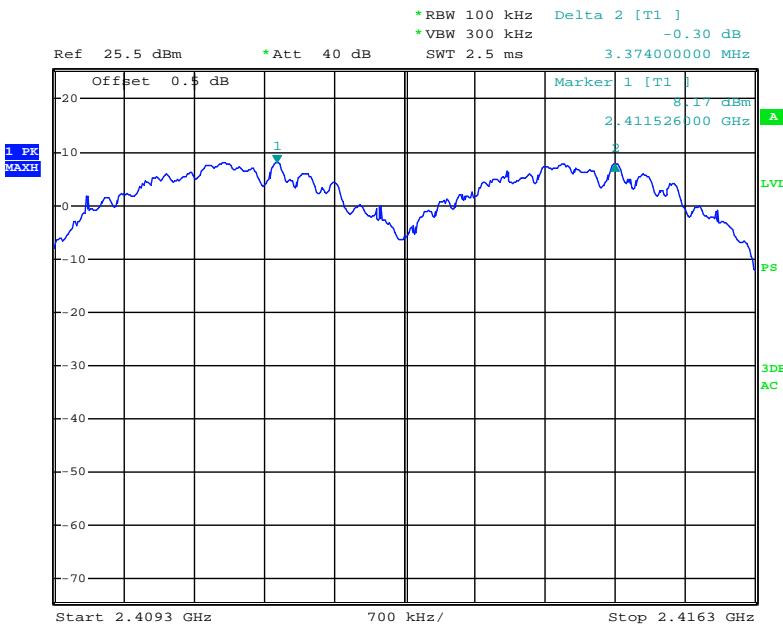

Date: 19.DEC.2011 22:27:18

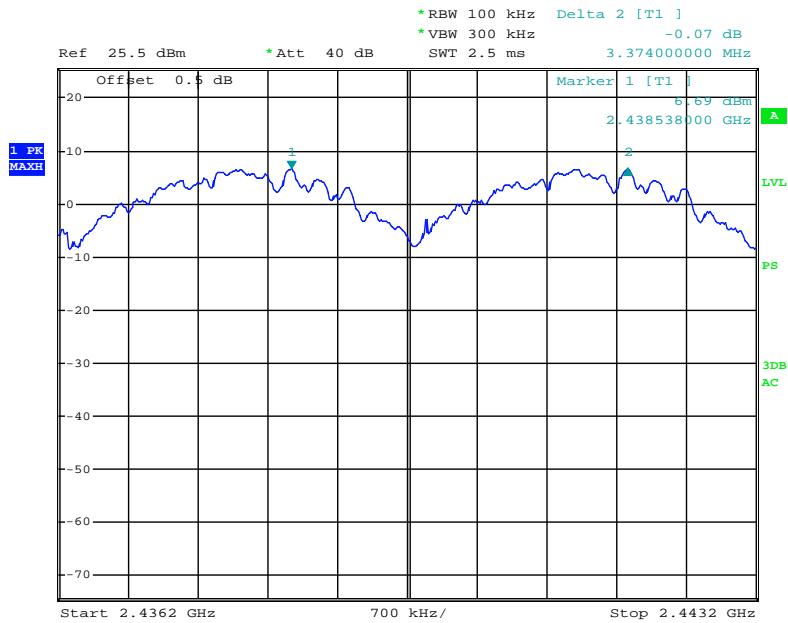Middle Channel

Date: 19.DEC.2011 22:29:21

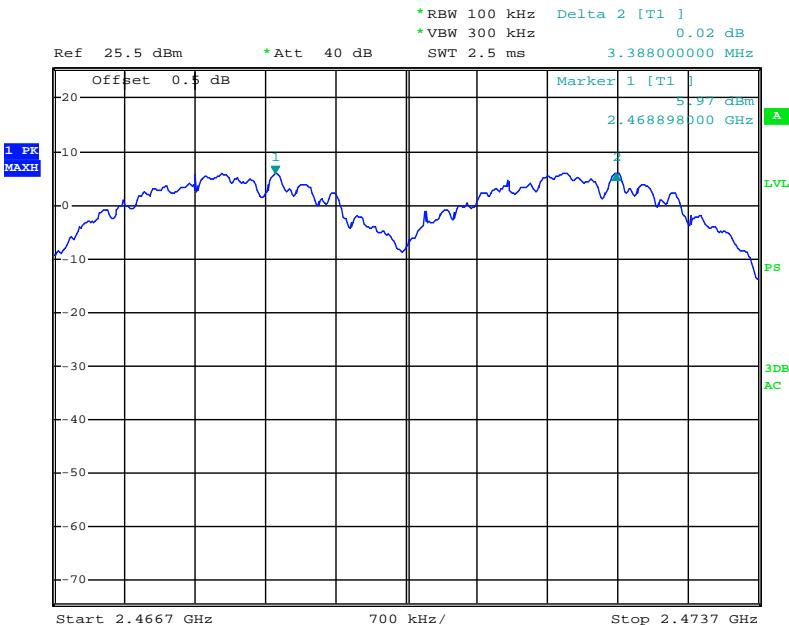High Channel

Date: 19.DEC.2011 22:31:01

CFR47 §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa


* The testing was performed by Brown Lu on 2011-12-19.

Test Mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2410.875	3.82
Middle	2437.875	3.84
High	2471.625	3.76


Low Channel

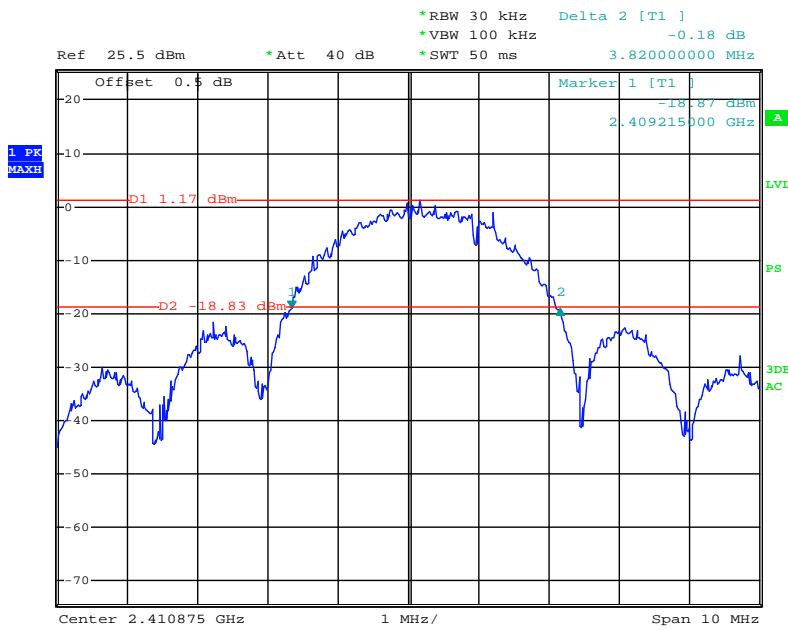

Date: 19.DEC.2011 19:43:45

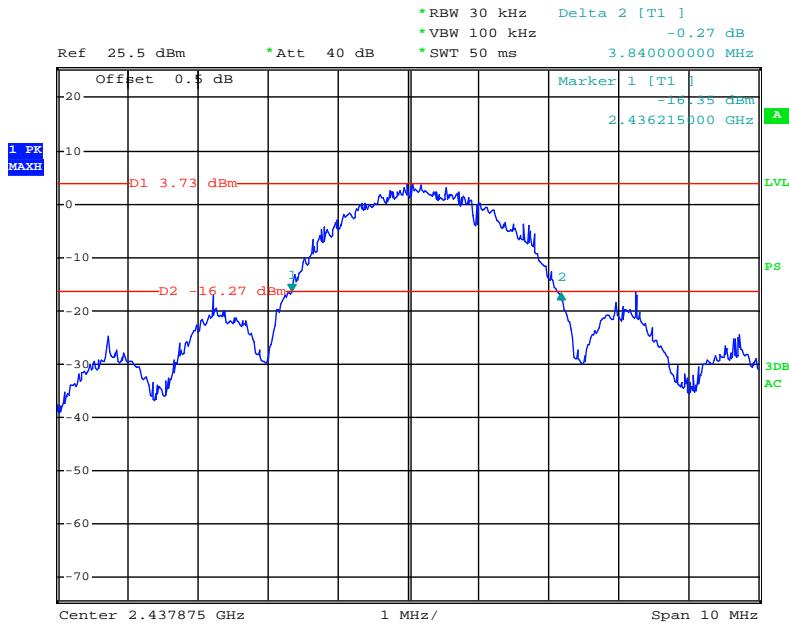Middle Channel

Date: 19.DEC.2011 19:33:50

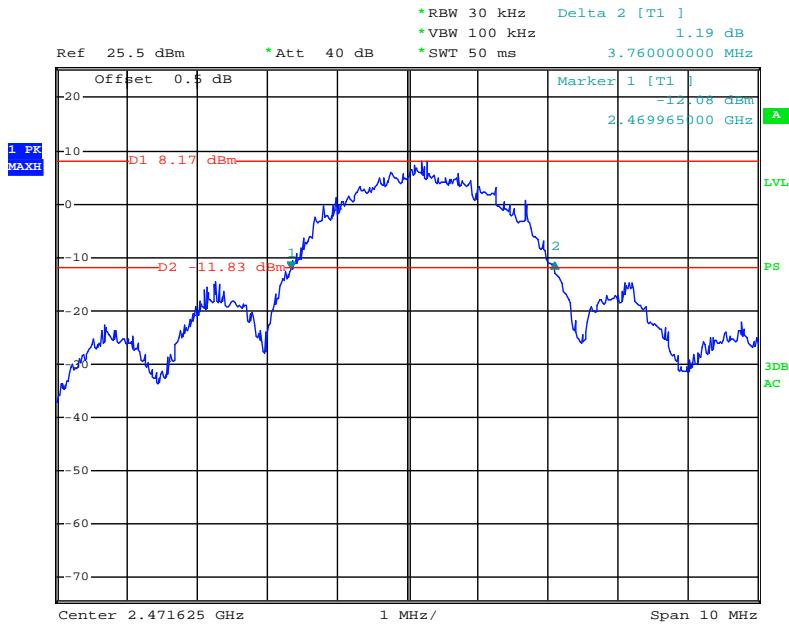High Channel

Date: 19.DEC.2011 19:38:41

CFR47 §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa


The testing was performed by Brown Lu on 2011-12-19.

Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.50	19	≥ 15

Number of Hopping Channels

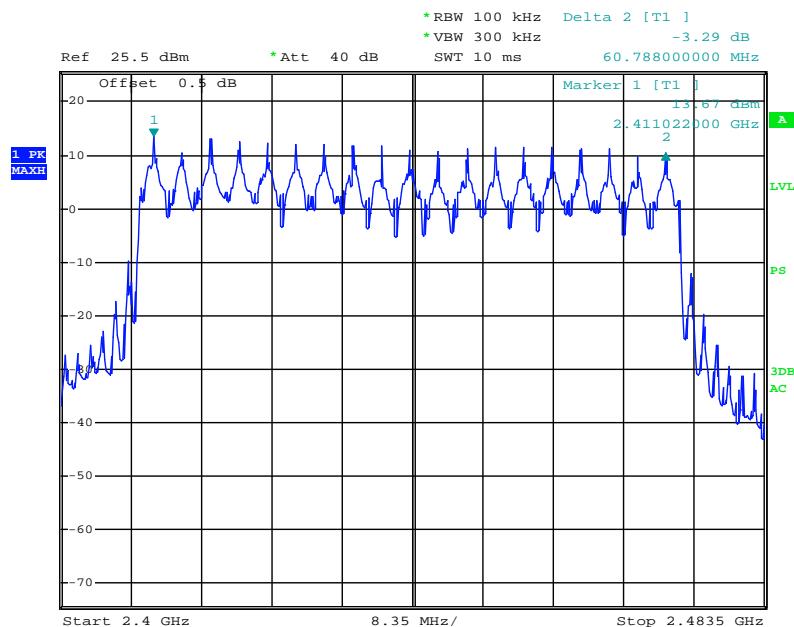

Date: 19.DEC.2011 22:21:03

CFR47 §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= Time slot length * hope rate/ number of hopping channels * hopping NO.*0.4 s

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Brown Lu on 2011-12-19.


Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
Low	1.032	0.095	0.4	Pass
Middle	1.008	0.092	0.4	Pass
High	1.044	0.096	0.4	Pass


Note: Dwell time=Pulse time (ms) \times (458/2/19) \times 19 \times 0.4 S

Low Channel

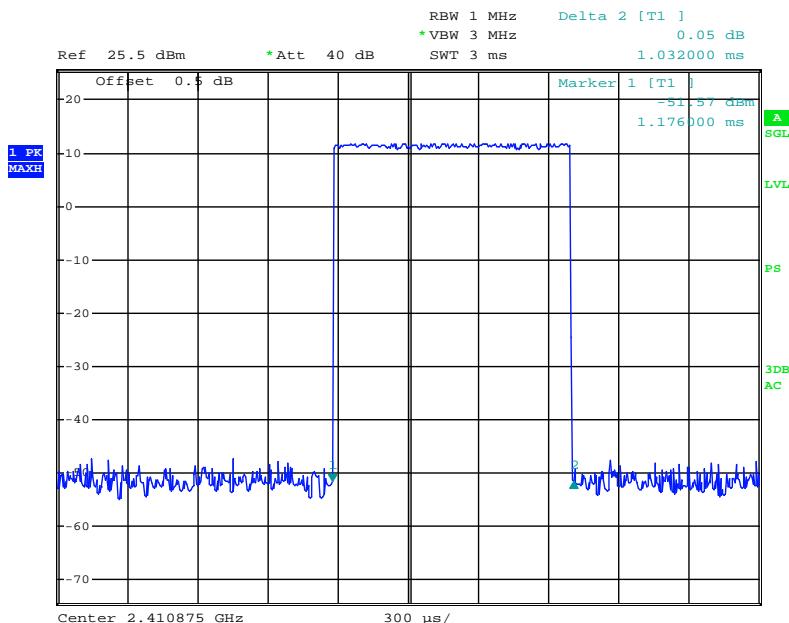


Date: 19.DEC.2011 20:32:21

Middle Channel

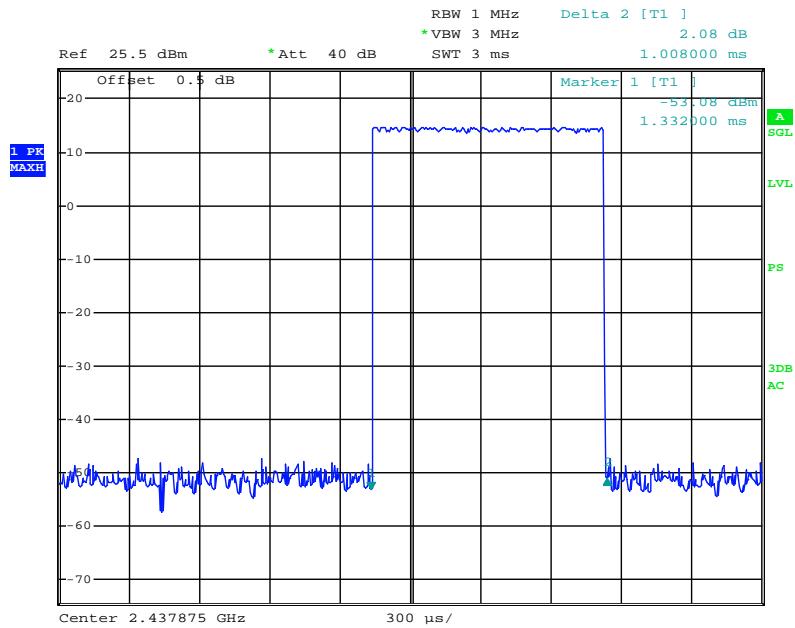

Date: 19.DEC.2011 20:33:20

High Channel

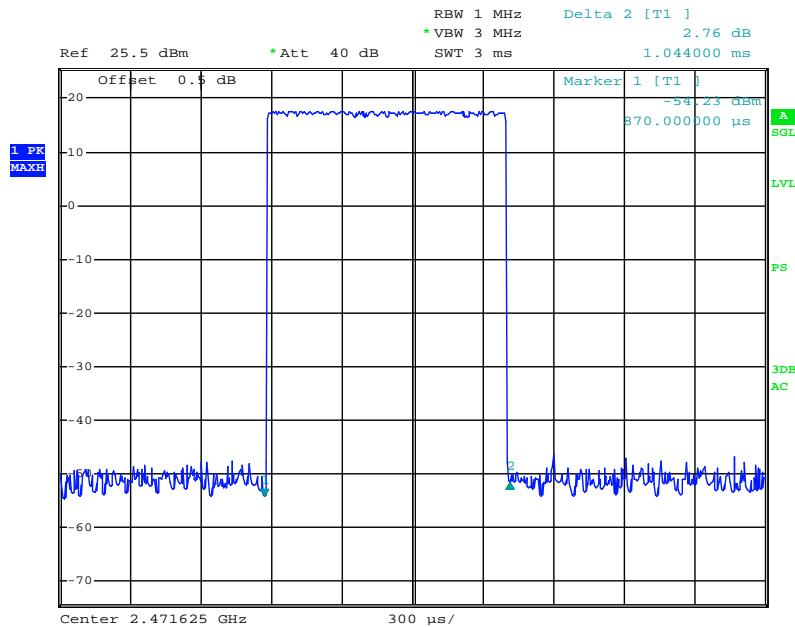

Date: 19.DEC.2011 20:34:29

CFR47 §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

* The testing was performed by Brown Lu on 2011-12-19.


Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Frequency (MHz)	Conducted Output Power		Part 15.247 Limit (mW)
	(dBm)	(mW)	
2410.875	15.09	32.29	125
2437.875	17.14	51.76	125
2471.625	19.09	81.10	125


Note: The data above was tested in conducted mode.

Low Channel

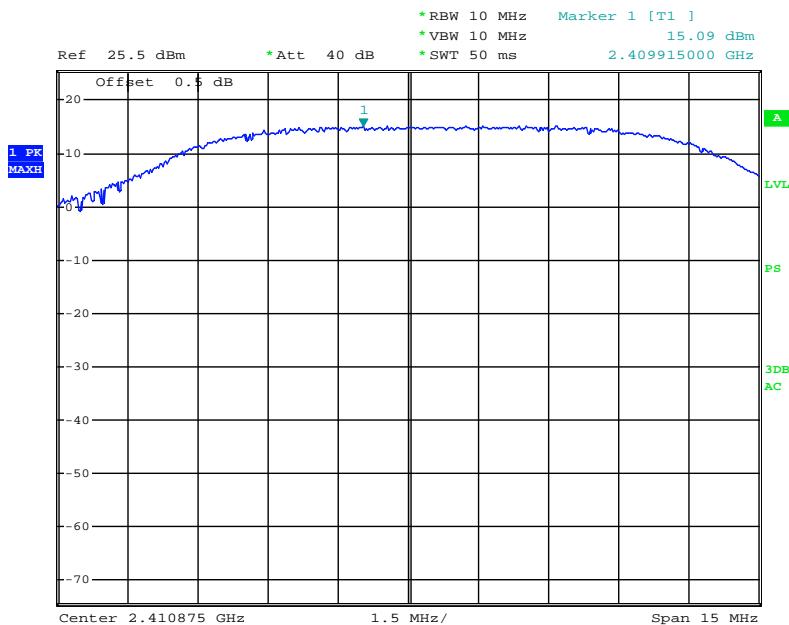


Date: 19.DEC.2011 19:53:03

Middle Channel

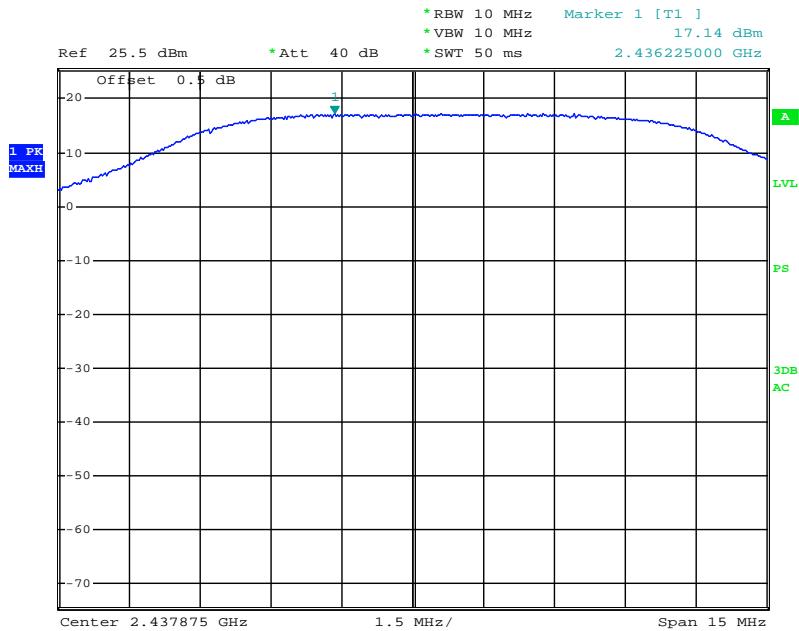

Date: 19.DEC.2011 19:55:51

High Channel

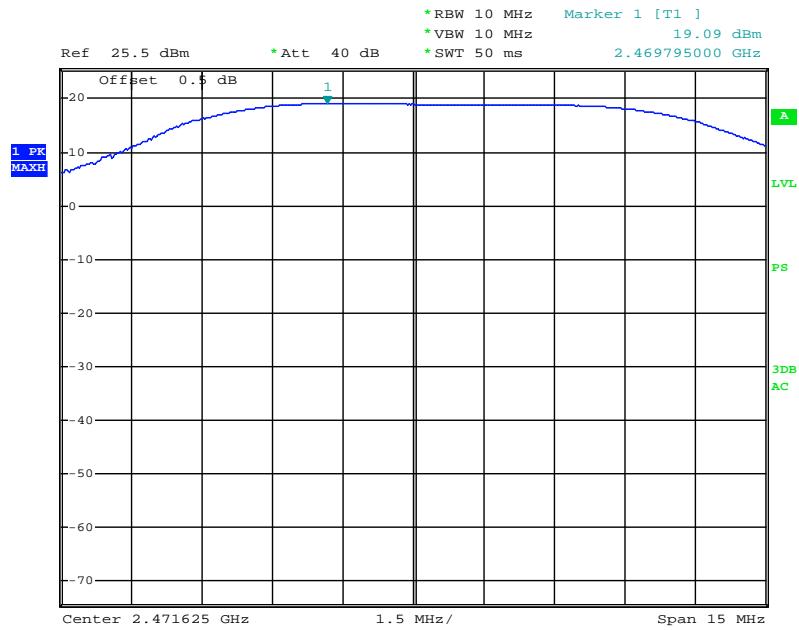

Date: 19.DEC.2011 19:59:21

CFR47 §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in Operating mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa


*The testing was performed by Brown Lu on 2011-12-19.

Test Mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Frequency (MHz)	Delta Peak to Band Emission (dBc)	Delta Limit (dBc)
2399.452	46.92	20
2483.850	46.24	20

Band Edge: Left Side

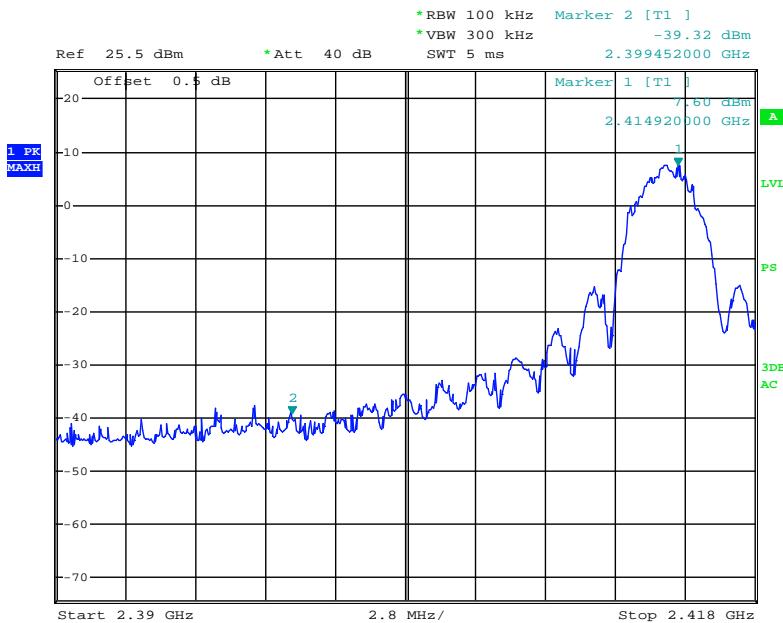

Date: 19.DEC.2011 20:52:59

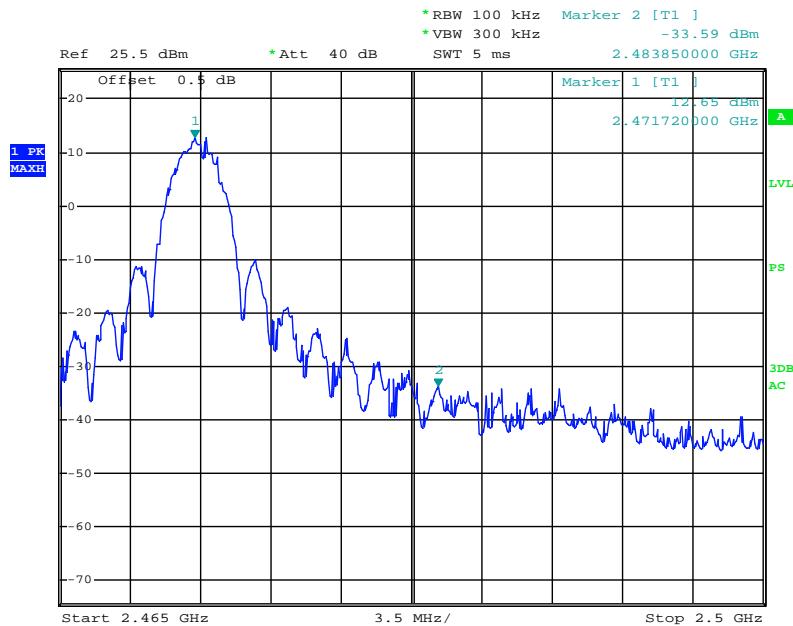Band Edge: Right Side

Date: 19.DEC.2011 20:50:18

******* END OF REPORT *******