EU

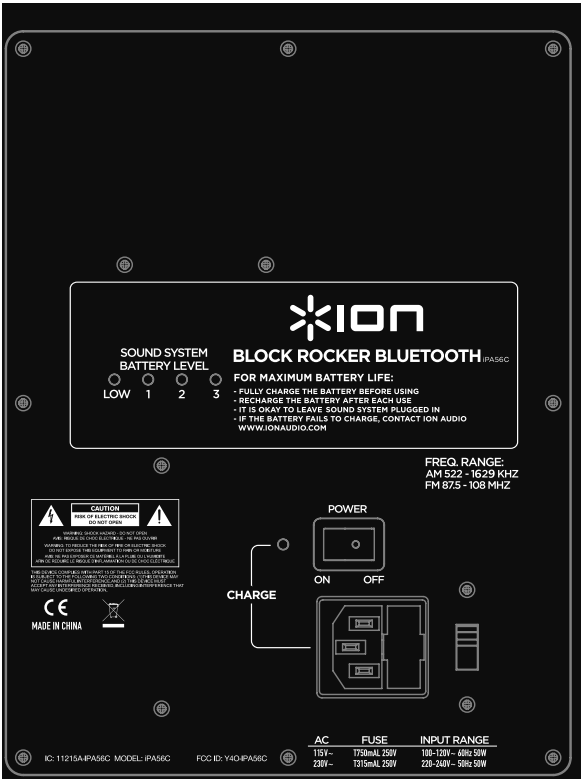
ION
SOUND SYSTEM
BATTERY LEVEL
LOW 1 2 3
BLOCK ROCKER BLUETOOTH iPA56C
FOR MAXIMUM BATTERY LIFE:
- FULLY CHARGE THE BATTERY BEFORE USING
- RECHARGE THE BATTERY AFTER EACH USE
- IT IS OKAY TO LEAVE SOUND SYSTEM PLUGGED IN
- IF THE BATTERY FAILS TO CHARGE, CONTACT ION AUDIO
WWW.IONAUDIO.COM
FREQ. RANGE:
AM 522 - 1629 KHZ
FM 87.5 - 108 MHZ
CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN
POWER
ON OFF
CHARGE
MADE IN CHINA
IC: 11215A-IPA56C MODEL: iPA56C
FCC ID: Y4O-IPA56C
AC FUSE INPUT RANGE
115V~ T750mAL 250V 100-120V~ 60Hz 50W
230V~ T315mAL 250V 220-240V~ 50Hz 50W

US

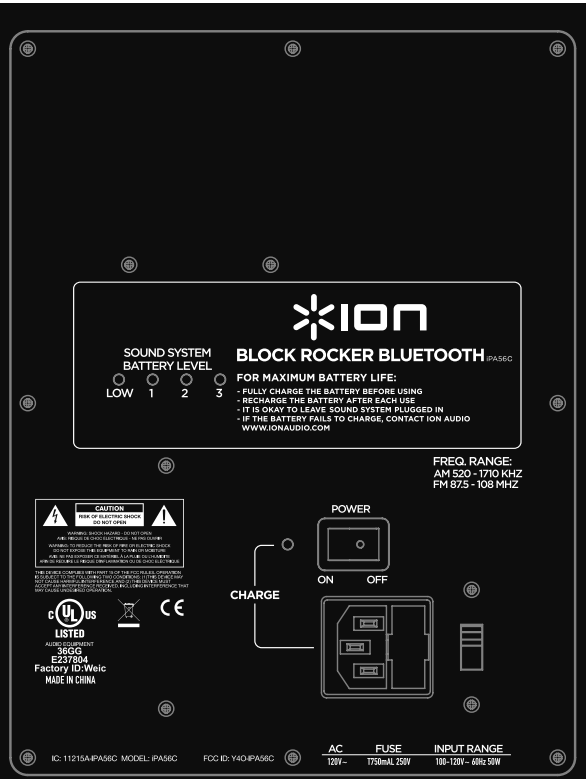
ION
SOUND SYSTEM
BATTERY LEVEL
LOW 1 2 3
BLOCK ROCKER BLUETOOTH iPA56C
FOR MAXIMUM BATTERY LIFE:
- FULLY CHARGE THE BATTERY BEFORE USING
- RECHARGE THE BATTERY AFTER EACH USE
- IT IS OKAY TO LEAVE SOUND SYSTEM PLUGGED IN
- IF THE BATTERY FAILS TO CHARGE, CONTACT ION AUDIO
WWW.IONAUDIO.COM
FREQ. RANGE:
AM 520 - 1710 KHZ
FM 87.5 - 108 MHZ
CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN
POWER
ON OFF
CHARGE
LISTED
AUDIO EQUIPMENT
36GG
E237694
Factory ID:Weic
MADE IN CHINA
IC: 11215A-IPA56C MODEL: iPA56C
FCC ID: Y4O-IPA56C
AC FUSE INPUT RANGE
120V~ T750mAL 250V 100-120V~ 60Hz 50W

JP

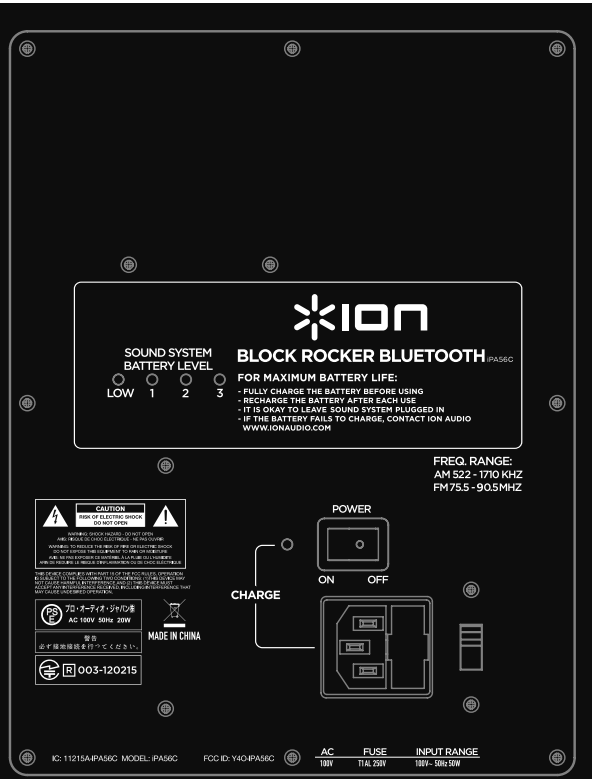
ION
SOUND SYSTEM
BATTERY LEVEL
LOW 1 2 3
BLOCK ROCKER BLUETOOTH iPA56C
FOR MAXIMUM BATTERY LIFE:
- FULLY CHARGE THE BATTERY BEFORE USING
- RECHARGE THE BATTERY AFTER EACH USE
- IT IS OKAY TO LEAVE SOUND SYSTEM PLUGGED IN
- IF THE BATTERY FAILS TO CHARGE, CONTACT ION AUDIO
WWW.IONAUDIO.COM
FREQ. RANGE:
AM 522 - 1710 KHZ
FM 75.5 - 90.5MHZ
CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN
POWER
ON OFF
CHARGE
プロ・オーディオ・ジャパン会
AC 100V 50Hz 20W
警告
必ず接地線を付けてください。
MADE IN CHINA
003-120215
IC: 11215A-IPA56C MODEL: iPA56C
FCC ID: Y4O-IPA56C
AC FUSE INPUT RANGE
100V T1AL 250V 100V~ 50Hz 50W


Layer 3 = Pantone Process White C
Layer 2 = Mech = DO NOT PRINT
Layer 1 = Reference/Images
Rock
SPuckett
12.06.2013
RevB
iPA56C side panel silkscreen
Block Rocker Bluetooth
iPA56C
Product Development
Product Scale
REFERENCE CORRESPONDING 3D FILES
FOR EXACT PART LOCATIONS AND DIMENSIONS