

ALESIS TransActive AIR

PORTABLE PA SYSTEM

SOUND SYSTEM BATTERY LEVEL

LOW 1 2 3

FOR MAXIMUM BATTERY LIFE

- RECHARGE THE BATTERY AFTER EACH USE
- USE AND RECHARGE THE BATTERY AT LEAST ONCE A MONTH
- AVOID COMPLETELY DRAINING THE BATTERY
- DO NOT SERVICE, MODIFY, OR REPLACE THE BATTERY YOURSELF
- IF BATTERY FAILS TO CHARGE, CONTACT ALESIS: WWW.ALESIS.COM




WARNING: SHOCK HAZARD - DO NOT OPEN
AVIS: RISQUE DE CHOC ELECTRIQUE - NE PAS OUVRIR
DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE
AVIS: NE PAS EXPOSER CE MATERIEL À LA PLUIE OU À L'HUMIDITÉ
AFIN DE REDUIRE LE RISQUE D'INFLAMMATION OU DE CHOC ELECTRIQUE

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.



CONFORMS TO
UL STD. 60065
C-ETL US CERTIFIED TO
CSA STD.
C22.2 NO. 60065
3043205

FCC ID: Y4O-LGAC-1
This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received,
including interference that may cause undesired
operation.

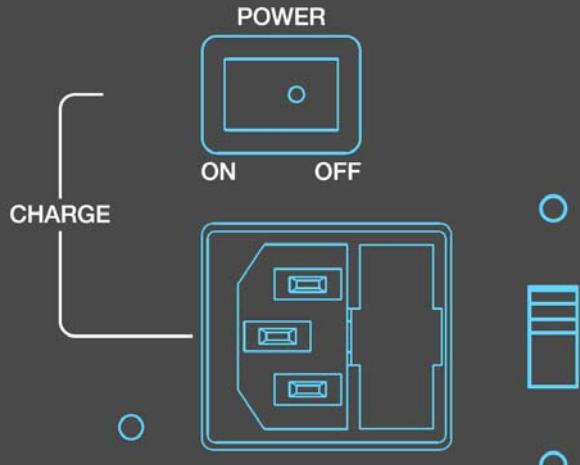

AC 120V~	FUSE T750mA 250V	INPUT RANGE 100-120V~ 60Hz 50W
-------------	---------------------	-----------------------------------

220 × 167 mm