



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Product Name: USB/MIDI WIRELESS KEYTAR CONTROLLER

Brand Name: ALESIS

Model No.: VORTEX WIRELESS (Dongle)

Series Model: N/A

FCC ID:Y4O-LQPJRX

**Test Report Number:
C131225R01-RPW**

Issued for

inMusic Brands, Inc.

200 Scenic View Drive, Suite 201 Cumberland, RI02864, U.S.A.

Issued by

Compliance Certification Services Inc.

Kun shan Laboratory

**No.10 Weiye Rd., Innovation park, Eco&Tec,
Development Zone, Kunshan City, Jiangsu, China**

TEL: 86-512-57355888

FAX: 86-512-57370818



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES.....	8
4. INSTRUMENT CALIBRATION.....	9
4.1 MEASURING INSTRUMENT CALIBRATION	9
5. FACILITIES AND ACCREDITATIONS	11
5.1 FACILITIES	11
5.2 EQUIPMENT	11
5.3 LABORATORY ACCREDITATIONS AND LISTING	11
5.4 TABLE OF ACCREDITATIONS AND LISTINGS	12
6. SETUP OF EQUIPMENT UNDER TEST	13
6.1 SETUP CONFIGURATION OF EUT	13
6.2 SUPPORT EQUIPMENT	13
7. FCC PART 15.247 REQUIREMENTS.....	14
7.1 6 DB EMISSION BANDWIDTH.....	14
7.2 PEAK POWER	17
7.3 AVERAGE POWER	18
7.4 PEAK POWER SPECTRAL DENSITY	19
7.5 SPURIOUS EMISSIONS	22
7.6 RADIATED EMISSIONS	26
7.7 POWERLINE CONDUCTED EMISSIONS	33



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass
3.2	15.247(b)	Peak Output Power	$\leq 30\text{dBm}$	Pass
3.5	15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass
3.6	15.207	AC Conducted Emission	15.207(a)	Pass
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass



Compliance Certification Services Inc.

Report No: C131225R01-RPW

FCC ID: Y4O-LQPJRX

Date of Issue :January 15, 2014

1. TEST RESULT CERTIFICATION

Product Name:	USB/MIDI WIRELESS KEYTAR CONTROLLER
Trade Name:	ALESIS
Model Name.:	VORTEX WIRELESS (Dongle)
Series Model:	N/A
Applicant Discrepancy:	Initial
Device Category:	Mobile DEVICES
Date of Test:	December 19, 2013
Applicant:	inMusic Brands, Inc. 200 Scenic View Drive, Suite 201 Cumberland, RI 02864, U.S.A.
Manufacturer:	Shanghai Huaxin Musical Instrument Co., Ltd. 35 Lao Shan Yi Cun, Shanghai 200120, China
Application Type:	Certification

APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Jeff.Fang
RF Manager
Compliance Certification Service Inc.

Tested by:

Blent.Wang
Test Engineer
Compliance Certification Service Inc.



Compliance Certification Services Inc.

Report No: C131225R01-RPW

FCC ID: Y4O-LQPJRX

Date of Issue :January 15, 2014

2. EUT DESCRIPTION

Product Name:	USB/MIDI WIRELESS KEYTAR CONTROLLER
Brand Name:	ALESIS
Model Name:	VORTEX WIRELESS (Dongle)
Series Model:	N/A
Model Discrepancy:	N/A
Frequency Range:	2402~2478MHz
Transmit Power:	5.08dBm(0.0032W)
Modulation Technique:	OPQSK(offset quadrature phase shift keyed)
Number of Channels:	6 Channels
Antenna Specification:	PCB antenna:3.3 dBi gain (Max)

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: Y4O-LQPJRX filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 2003 and FCC CFR 47 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4 2009.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT had been tested under the operating condition.

The model was scanned during the preliminary test. After the preliminary scan, the following test mode was found to produce the worst case.

Zigbee: 6 Channels (2402MHz, 2408MHz, 2419MHz, 2444MHz, 2464MHz, 2478MHz)

These channels have been tested as following:

Test Items	Frequency (MHz)
6dB Bandwidth	2402,2444,2478
Peak Output Power	2402,2444,2478
Average Out Power	2402,2444,2478
Power Spectral Density	2402,2444,2478
Spurious Emissions	2402,2444,2478
Radiated Emissions	2402, 2478
Powerline Conducted Emissions	-

Remark: For radiated test cases below 1GHz, the worst mode data rate channel 39 was reported only, because this data rate has the highest RF output power at preliminary tests.

The field strength of spurious emission was measured in the following position:EUT stand-up position (Z axis),lie-down position(X,Y axis).The worst emission was found in stand-up position(X axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Equipment Used for Emissions Measurement

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2014-5-12
DETECTOR NEGATIVE	Agilent	8473B	MY42240176	2014-5-12
OSCILLOSCOPE	Agilent	DSO6104A	MY44002585	2014-3-24
Peak and Avg Power Sensor	Agilent	E9327A	US40441788	2014-3-24
EPM-P Series Power Meter	Agilent	E4416A	GB41292714	2014-5-12
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	2014-5-12
DC POWER SUPPLY	GW instek	GPS-3303C	E903131	2014-5-12
Temp. / Humidity Chamber	Kingson	THS-M1	242	2014-3-12
Test Software	EZ-EMC			

977 Chamber

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2014-5-12
EMI Test Receiver	R&S	ESPI3	101026	2014-3-15
Pre-Amplifier	MINI	ZFL-1000VH2	d041703	2014-5-12
Pre-Amplifier	Miteq	NSP4000-NF	870629	2014-5-12
Bilog Antenna	Sunol	JB1	A110204-2	2014-5-12
Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	2014-6-7
Turn Table	CT	CT123	4165	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R
Controller	CT	CT1OO	95637	N.C.R
Test Software	EZ-EMC			



Compliance Certification Services Inc.

Report No: C131225R01-RPW

FCC ID: Y4O-LQPJRX

Date of Issue :January 15, 2014

Conducted Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER	R&S	ESCI3	100781	2014-3-15
V (V-LISN)	Schwarzbeck	NNLK 8129	8129-143	2014-3-15
LISN (EUT)	FCC	FCC-LISN-50/250-50-2-02	SN:05012	2014-3-15
TRANSIENT LIMITER	SCHAFFNER	CFL9206	1710	2014-4-7
Test Software		EZ-EMC		

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 2009 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC5743 for 10m chamber 10m, IC5743 for 10m chamber 3m.



5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.4 :2003); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	 TESTING CERT #2541.01
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	 R-1600 C-1707 G-216

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID
1.	Notebook	DELL	E5430	CN8YYW1	N/A

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6 DB EMISSION BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

KDB 558074 D01 DTS Measurement Guidance v03r01 dated 04-09-2013.

TEST RESULTS

No non-compliance noted


Test Data

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2402	0.596	>500	PASS
Mid	2444	0.577		PASS
High	2478	0.572		PASS




Test Plot

CH Low

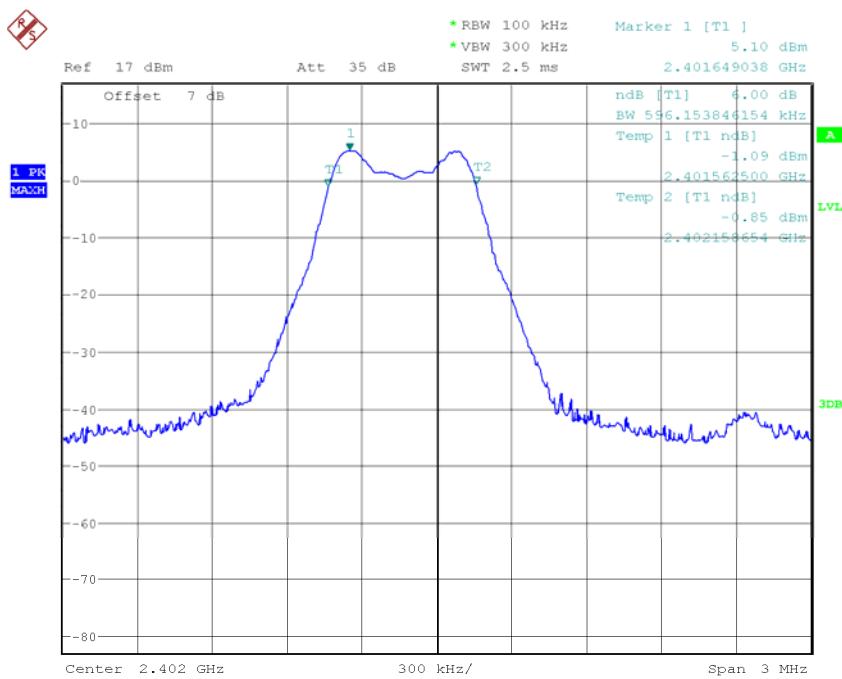

Date: 9.JAN.2014 12:25:38


CH Mid

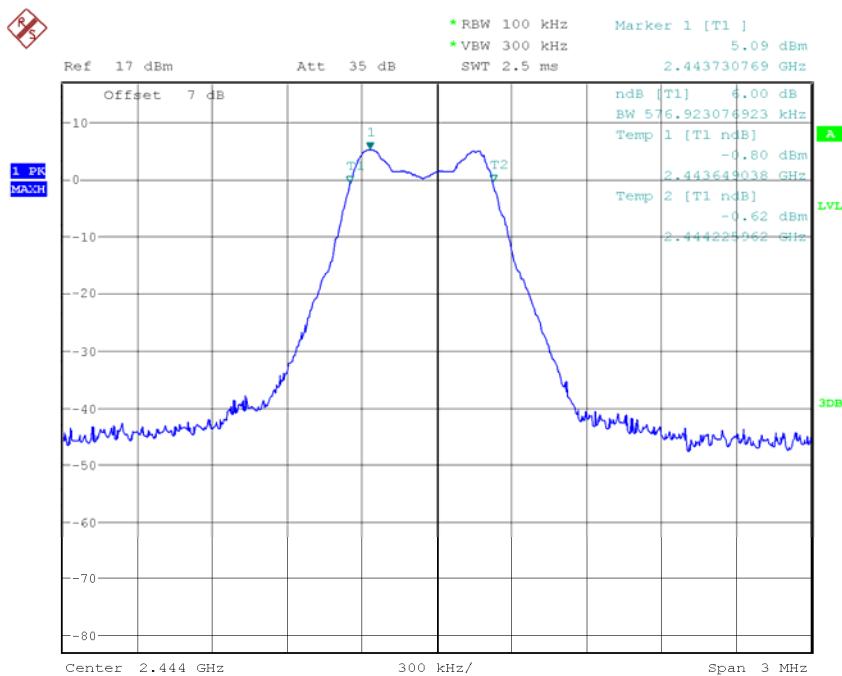

Date: 9.JAN.2014 12:29:36



CH High

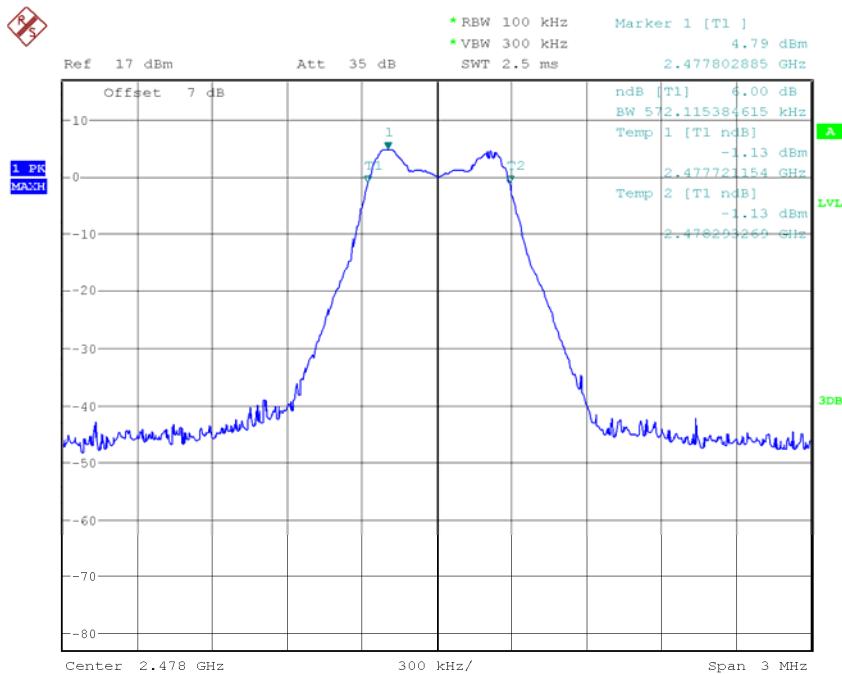

Date: 9.JAN.2014 12:28:38




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

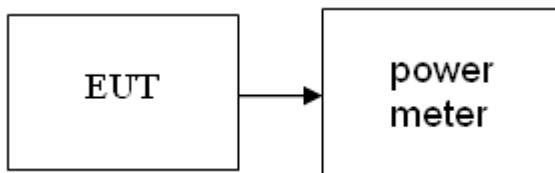

TEST PROCEDURE

Per KDB 558074 V02

The transmitter output is connected to the power meter. The power meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

Peak Power

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Limit (dBm)	Result
Low	2402	4.97	3.141	30.00	PASS
Mid	2444	5.08	3.221	30.00	PASS
High	2478	4.84	3.048	30.00	PASS




7.3 AVERAGE POWER

LIMIT

None;for reporting purposes only.

TEST CONFIGURATION

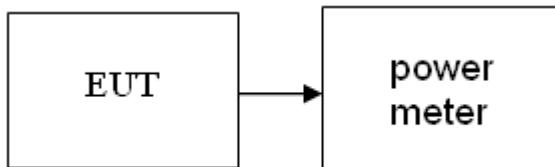

TEST PROCEDURE

Per KDB 558074 V02

The transmitter output is connected to the power meter.The power meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

Average Power

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
Low	2402	4.84	3.048
Mid	2444	4.96	3.133
High	2478	4.75	2.985




7.4 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

KDB 558074 V02

1. Place the EUT on the table and set it in transmitting mode.remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW=3kHz,VBW=10 kHz,span=1.5*bandwidth,sweep=auto.
3. Record the max.reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted


Test Data

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2402	0.30	8.00	PASS
Mid	2444	0.61	8.00	PASS
High	2478	0.20	8.00	PASS




Test Plot

PPSD (CH Low)

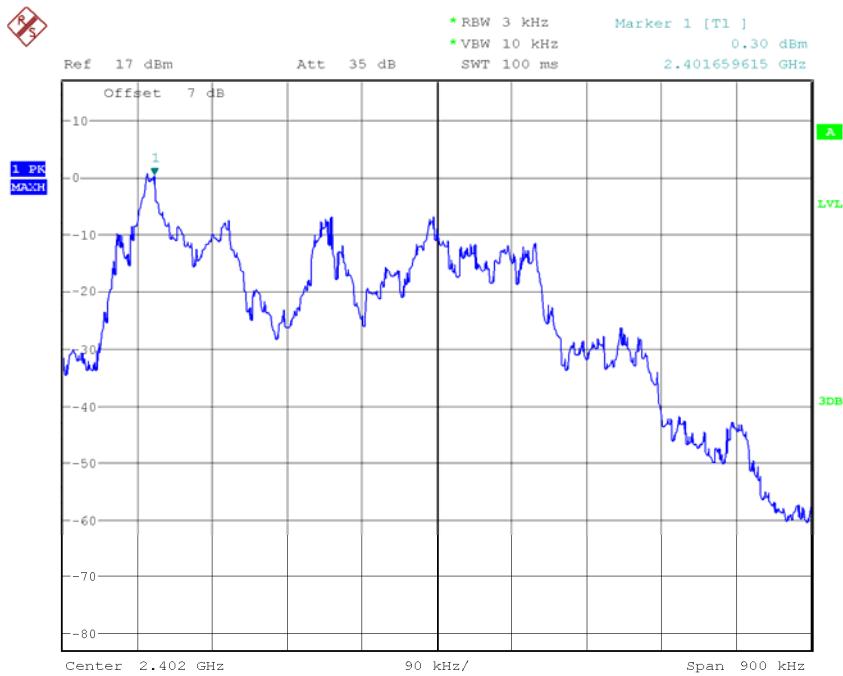

Date: 9.JAN.2014 12:33:38


PPSD (CH Mid)

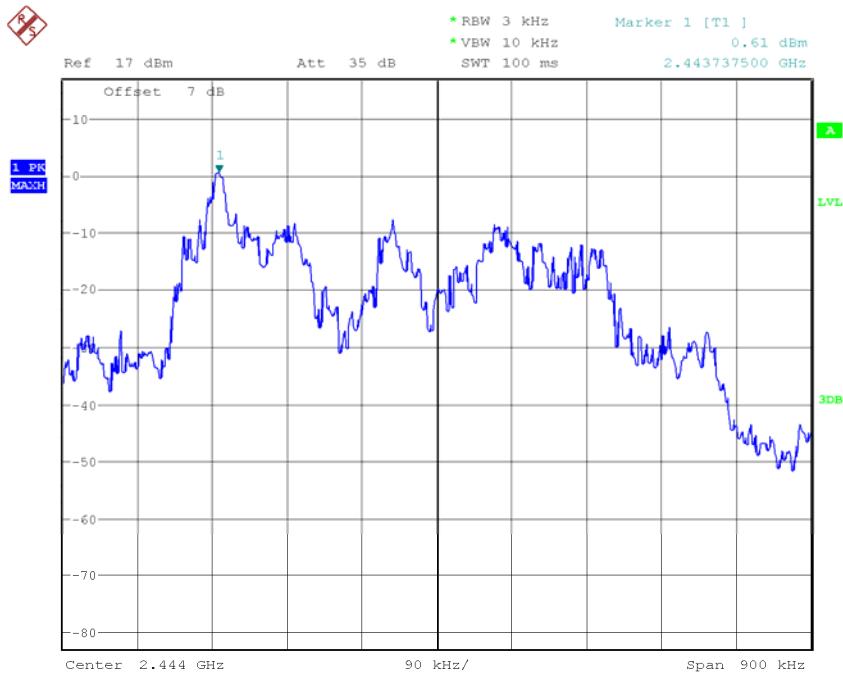

Date: 9.JAN.2014 12:33:00



PPSD (CH High)

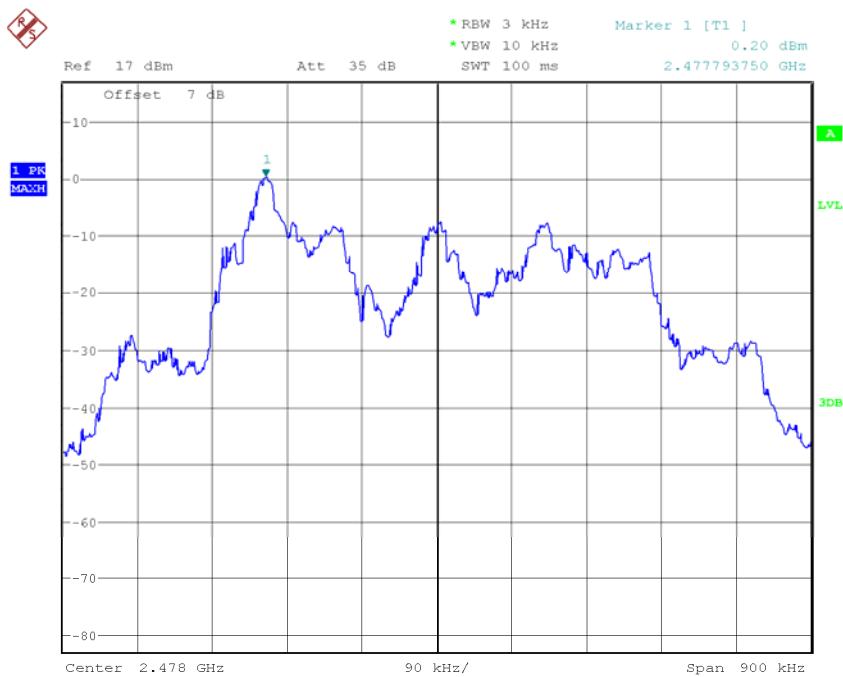

Date: 9.JAN.2014 12:31:29




7.5 SPURIOUS EMISSIONS Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS


No non-compliance noted




Test Plot

Spurious Emissions

CH Low

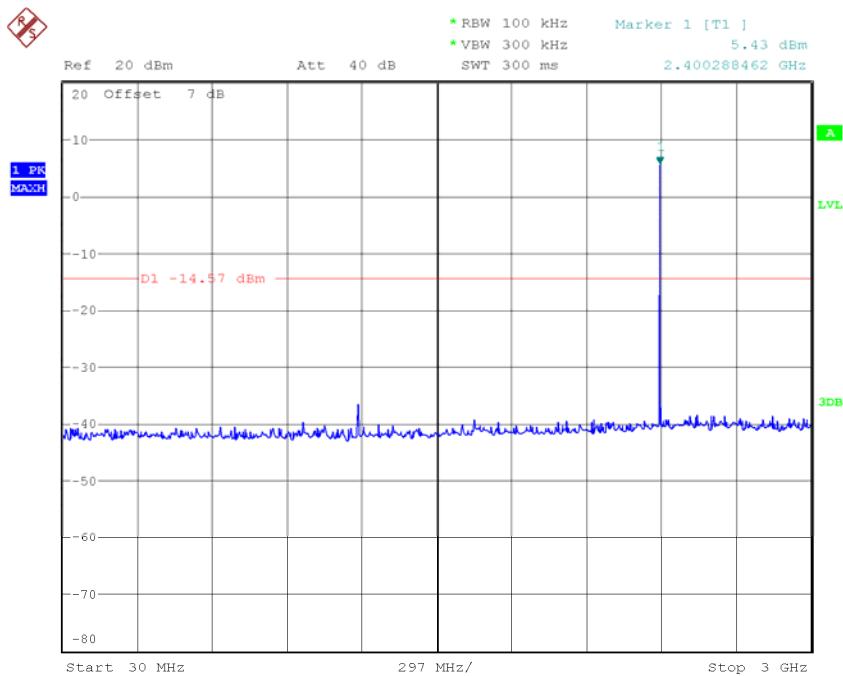


Date: 10.JAN.2014 16:42:22

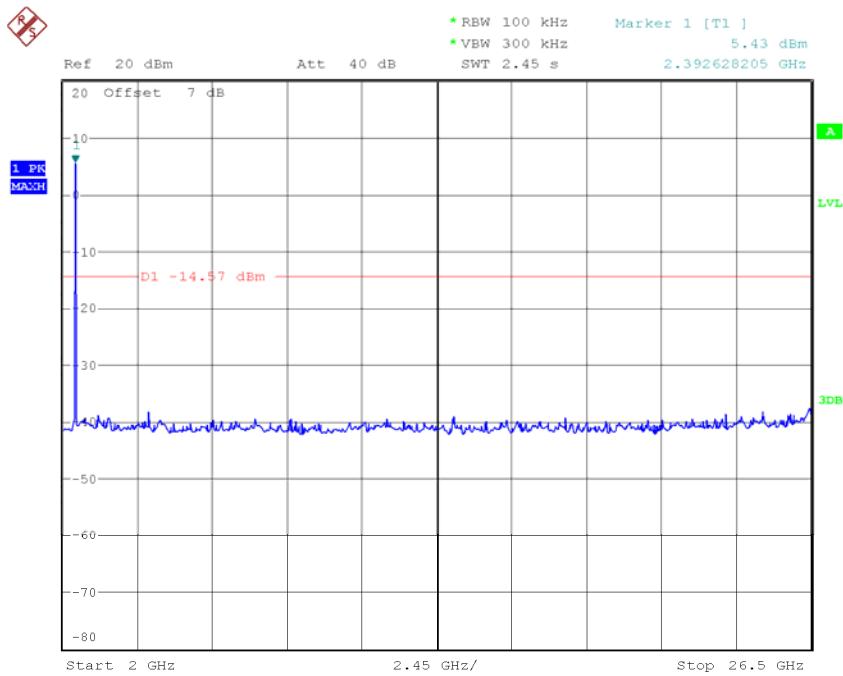


Date: 10.JAN.2014 16:42:55



CH Mid

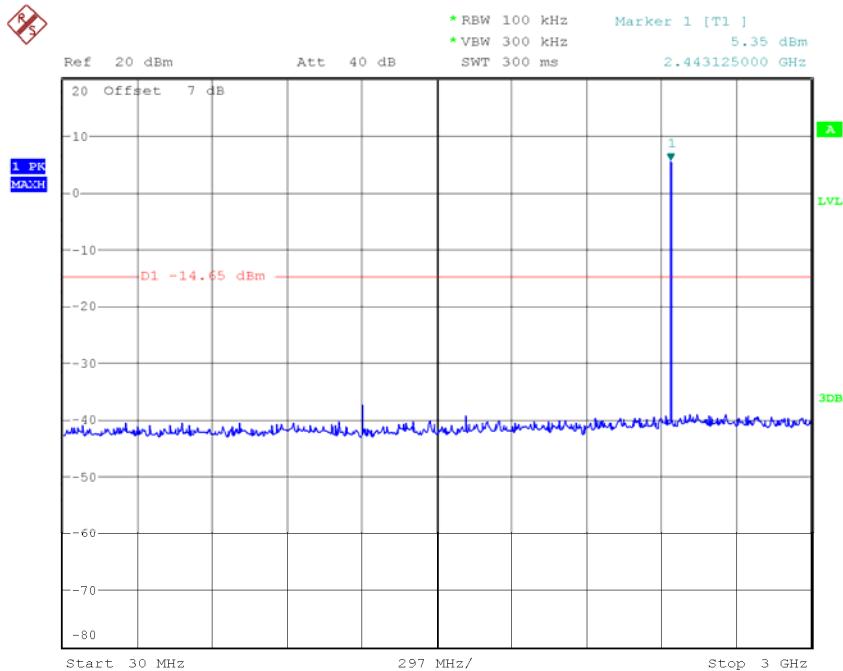

Date: 10.JAN.2014 16:45:13

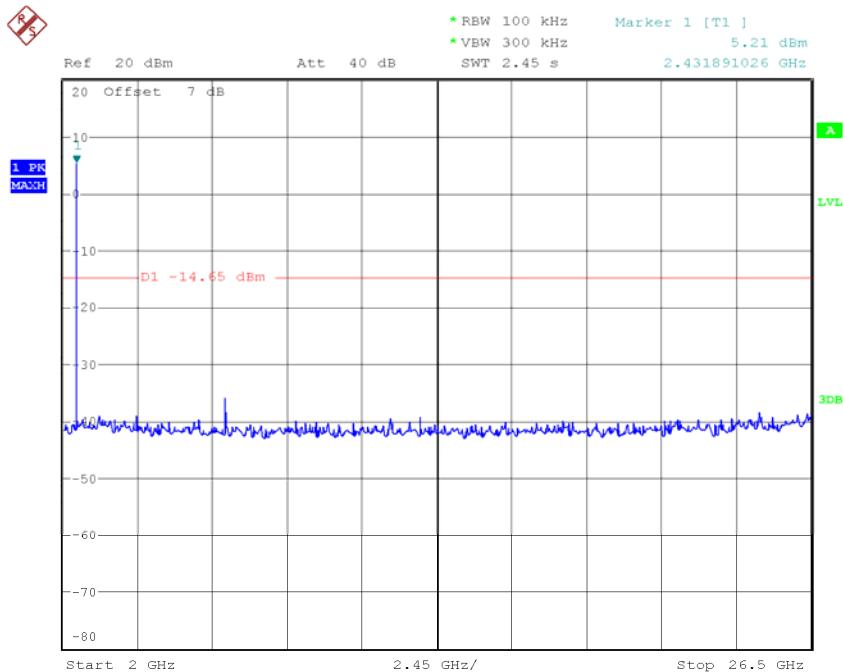

Date: 10.JAN.2014 16:45:31




Compliance Certification Services Inc.

Report No: C131225R01-RPW


FCC ID: Y4O-LQPJRX

Date of Issue :January 15, 2014

CH High

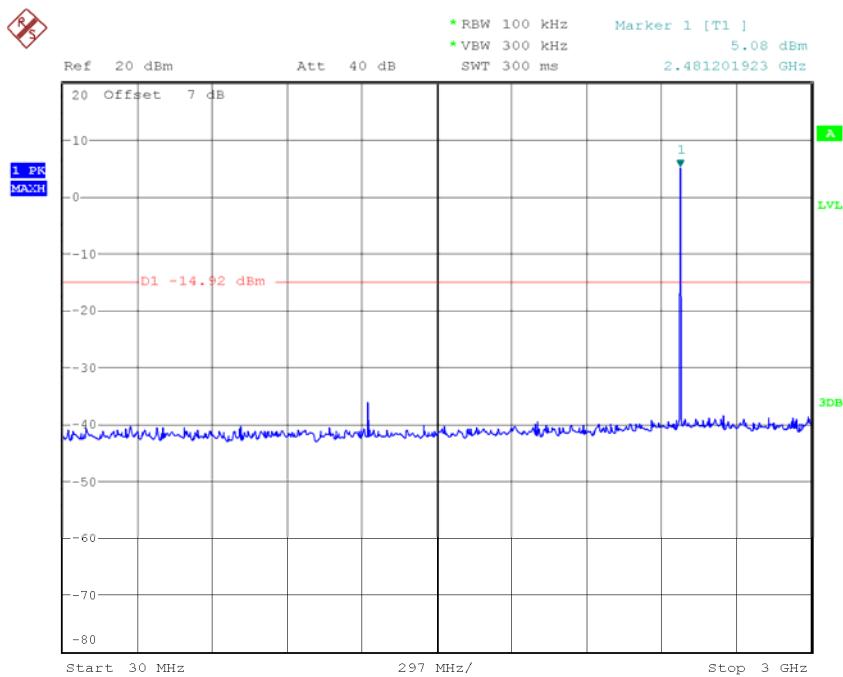

Date: 10.JAN.2014 16:48:24

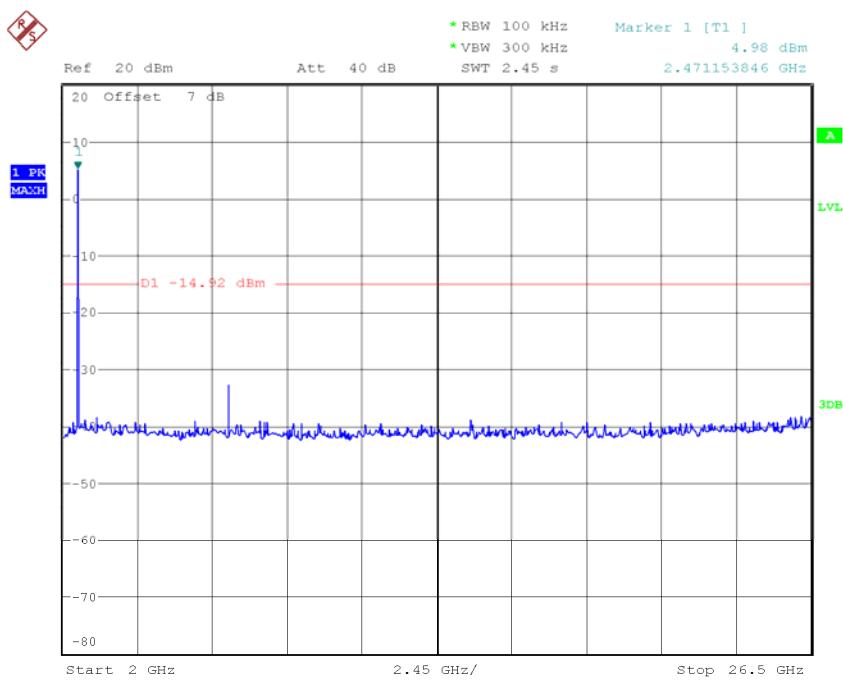

Date: 10.JAN.2014 16:48:56



7.6 RADIATED EMISSIONS

LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2009. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


Test Configuration



Below 30MHz

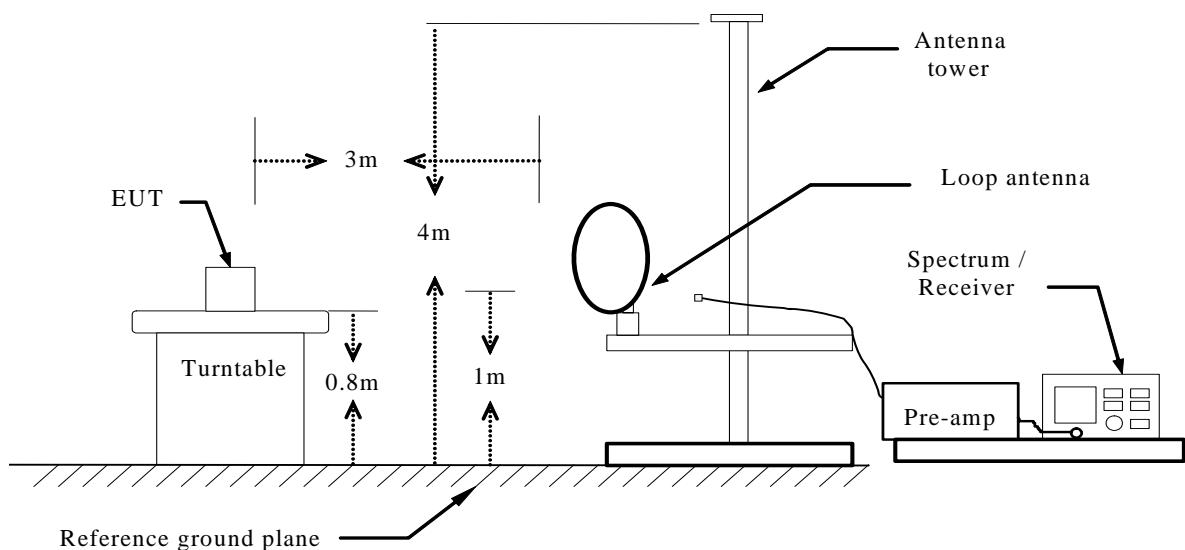


Below 1 GHz

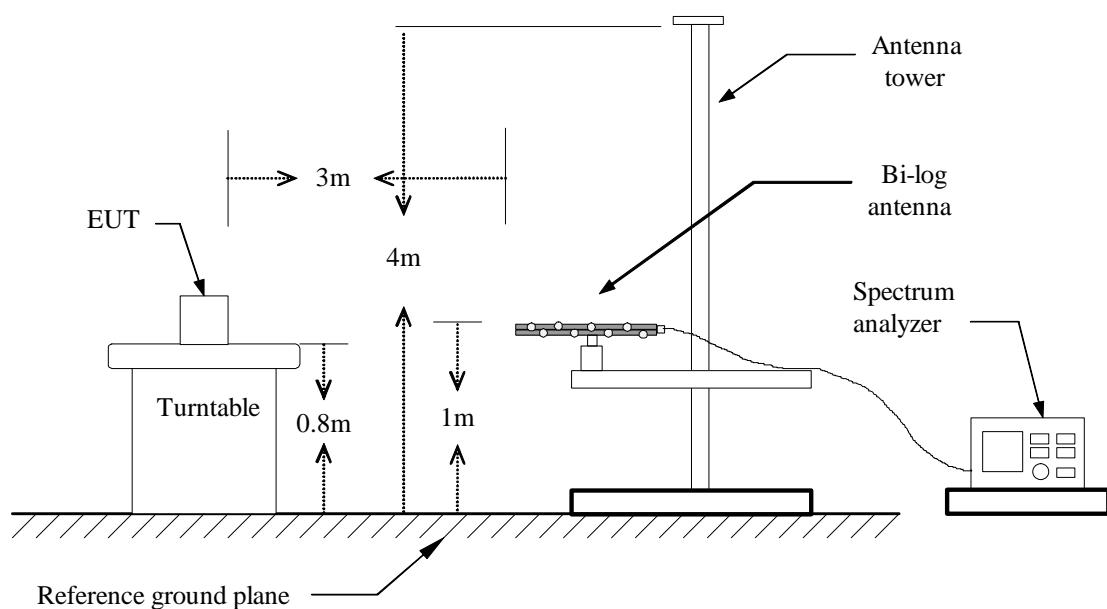



Above 1 GHz

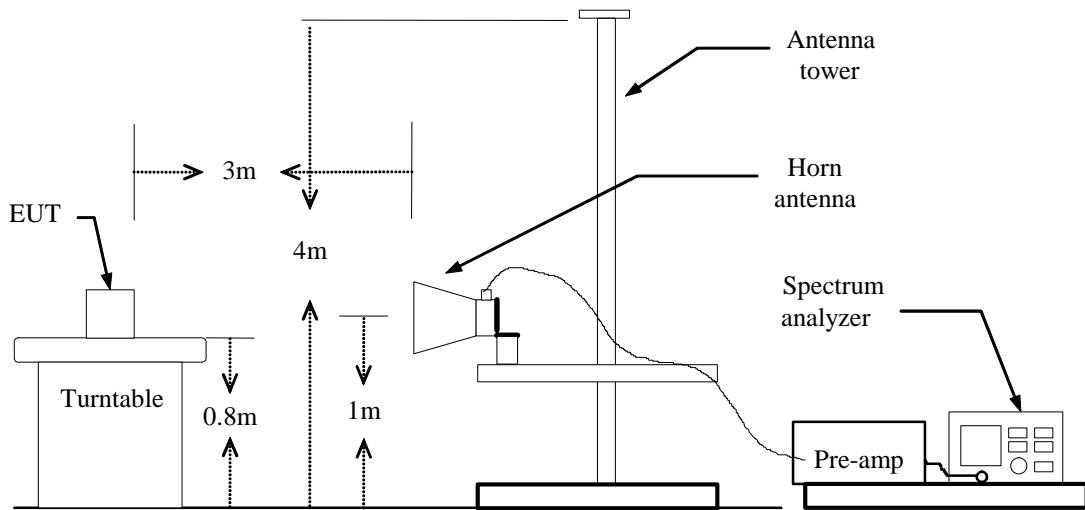

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS




Compliance Certification Services Inc.

Report No: C131225R01-RPW

FCC ID: Y4O-LQPJRX

Date of Issue :January 15, 2014

RESTRICTED BANDEDGE (Low Channel, Horizontal)

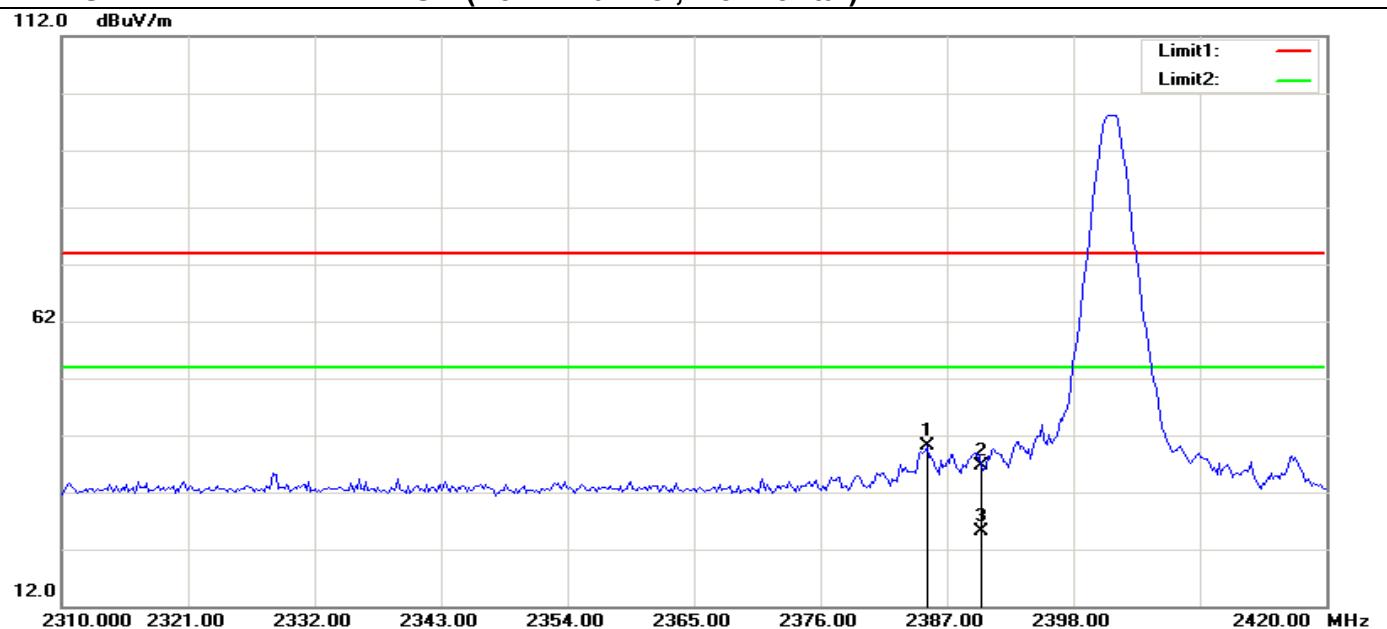

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2385.272	54.36	-14.28	40.08	74.00	-33.92	100	142	peak
2	2390.000	50.98	-14.28	36.70	74.00	-37.30	100	142	peak
3	2390.000	39.41	-14.28	25.13	54.00	-28.87	100	141	AVG

RESTRICTED BANDEDGE (Low Channel, Vertical)



No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2362.532	53.59	-14.27	39.32	74.00	-34.68	100	360	peak
2	2390.000	51.98	-14.28	37.70	74.00	-36.30	100	198	peak
3	2390.000	38.89	-14.28	24.61	54.00	-29.39	100	197	AVG




Compliance Certification Services Inc.

Report No: C131225R01-RPW

FCC ID: Y4O-LQPJRX


Date of Issue :January 15, 2014

RESTRICTED BANDEDGE (High Channel, Horizontal)

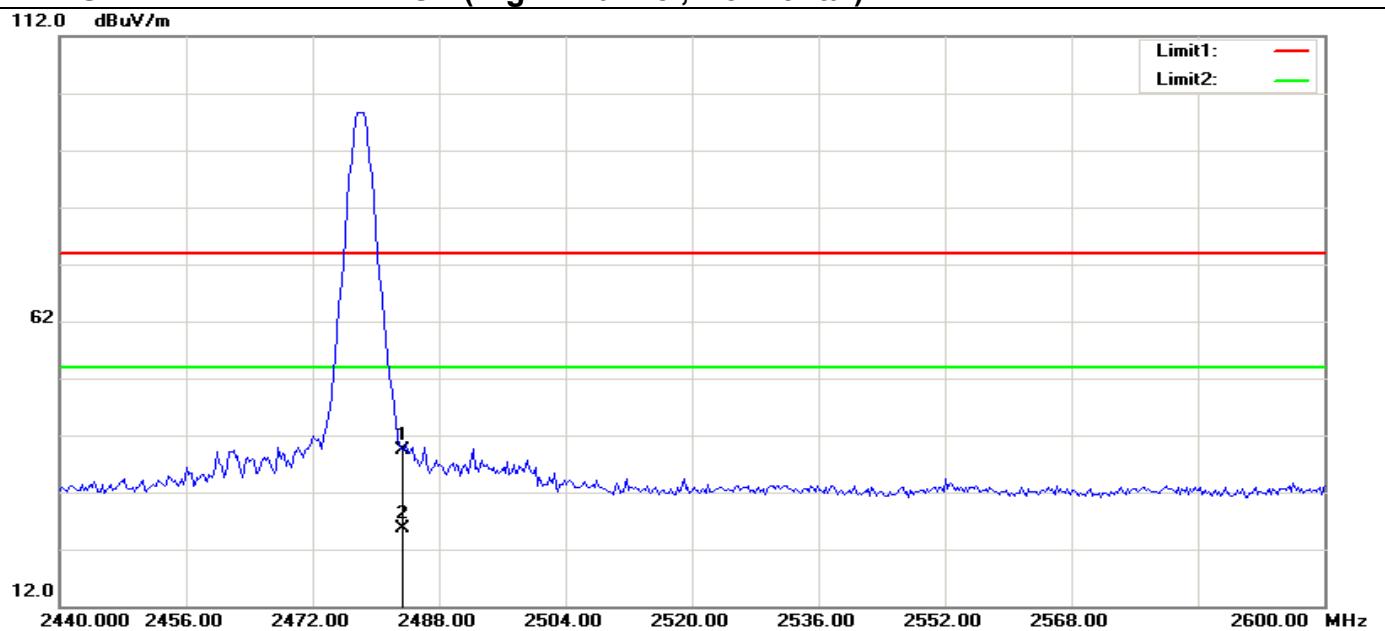

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	53.06	-13.65	39.41	74.00	-34.59	100	137	peak
2	2483.500	39.24	-13.65	25.59	54.00	-28.41	100	135	AVG

RESTRICTED BANDEDGE (High Channel, Vertical)

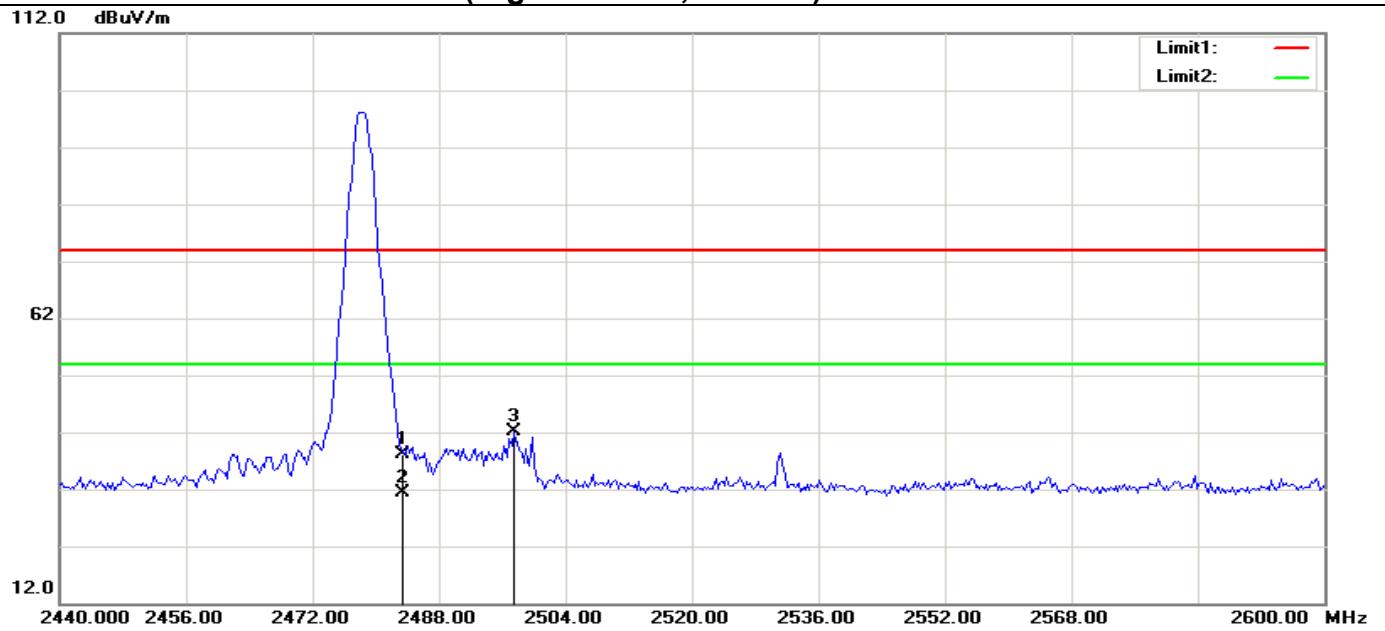

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	51.72	-13.65	38.07	74.00	-35.93	100	192	peak
2	2483.500	45.00	-13.65	31.35	54.00	-22.65	100	191	AVG
3	2497.436	55.71	-13.54	42.17	74.00	-31.83	100	337	peak



Compliance Certification Services Inc.

Report No: C131225R01-RPW

FCC ID: Y4O-LQPJRX

Date of Issue :January 15, 2014

Below 1GHz

Operation Mode: Normal Link **Test Date:** 2013-12-19

Temperature: 22°C **Tested by:** Blent.Wang

Humidity: 48% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.0000	H	12.66	22.71	35.37	40.00	-4.63	peak
231.7600	H	25.38	13.51	38.89	46.00	-7.11	peak
419.9400	H	13.89	18.50	32.39	46.00	-13.61	peak
636.2500	H	13.60	21.78	35.38	46.00	-10.62	peak
826.3700	H	12.60	24.63	37.23	46.00	-8.77	peak
888.4500	H	14.43	24.83	39.26	46.00	-6.74	peak
<hr/>							
30.9700	V	13.32	22.03	35.35	40.00	-4.65	peak
143.4900	V	15.15	14.76	29.91	43.50	-13.59	peak
165.8000	V	16.96	12.99	29.95	43.50	-13.55	peak
231.7600	V	22.12	13.51	35.63	46.00	-10.37	peak
665.3500	V	18.69	22.34	41.03	46.00	-4.97	peak
899.1200	V	14.64	25.30	39.94	46.00	-6.06	peak

Remark:

1. Measurements above show only up to maximum emissions noted, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
2. Radiated emissions measured in frequency range from 9 KHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Compliance Certification Services Inc.

Report No: C131225R01-RPW

FCC ID: Y4O-LQPJRX

Date of Issue :January 15, 2014

Above 1 GHz

Operation Mode: TX /CH Low **Test Date:** 2013-12-19

Temperature: 22°C **Tested by:** Blent.Wang

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4786.859	58.01	-8.07	49.94	74.00	-24.06	201	263	peak
2	7211.538	49.62	-0.59	49.03	74.00	-24.97	201	228	peak

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4786.859	55.45	-8.07	47.38	74.00	-26.62	100	276	peak
2	7211.538	50.28	-0.59	49.69	74.00	-24.31	202	171	peak

Operation Mode: TX /CH Mid **Test Date:** 2013-12-19

Temperature: 22°C **Tested by:** Blent.Wang

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4868.590	57.41	-7.72	49.69	74.00	-24.31	100	267	peak
2	7320.513	49.62	-0.83	48.79	74.00	-25.21	200	230	peak

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4868.590	53.62	-7.72	45.90	74.00	-28.10	200	258	peak
2	7320.513	53.02	-0.83	52.19	74.00	-21.81	200	229	peak

Operation Mode: TX /CH High **Test Date:** 2013-12-19

Temperature: 22°C **Tested by:** Blent.Wang

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4950.320	55.07	-7.58	47.49	74.00	-26.51	100	260	peak
2	7429.487	56.88	-0.55	56.33	74.00	-17.67	200	146	peak

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4950.320	53.86	-7.58	46.28	74.00	-27.72	200	206	peak
2	7429.487	60.14	-0.55	59.59	74.00	-14.41	200	271	peak



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data




Compliance Certification Services Inc.

Report No: C131225R01-RPW

FCC ID: Y4O-LQPJRX

Date of Issue :January 15, 2014

Job No.:	C131225R01-RPW	Date:	2013-12-31
Standard:	FCC Class B	Time:	15:32:29
Test item:	Conduction test	Temp.(C)/Hum.(%):	22(C)/48%
Line:	L1	Test By:	Blent.Wang
Model:	VORTEX WIRELESS (Dongle)	Test Voltage:	AC 120V/60Hz

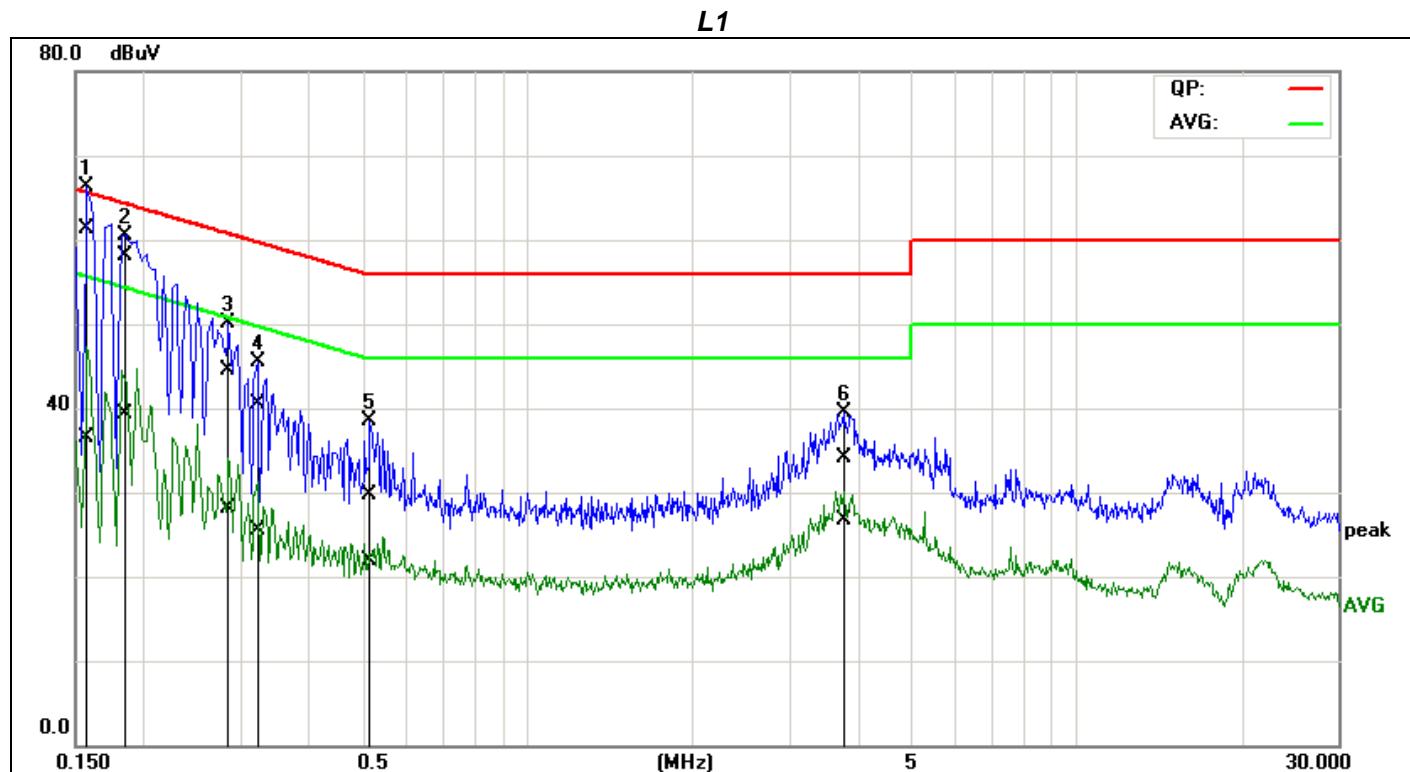

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1577	41.55	16.77	19.78	61.33	36.55	65.58	55.58	-4.25	-19.03	Pass
2	0.1817	38.49	19.68	19.68	58.17	39.36	64.41	54.41	-6.24	-15.05	Pass
3	0.2833	24.89	8.39	19.66	44.55	28.05	60.72	50.72	-16.17	-22.67	Pass
4	0.3220	20.80	5.88	19.69	40.49	25.57	59.66	49.66	-19.17	-24.09	Pass
5	0.5108	9.92	2.02	19.83	29.75	21.85	56.00	46.00	-26.25	-24.15	Pass
6	3.7682	13.93	6.47	20.15	34.08	26.62	56.00	46.00	-21.92	-19.38	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).




Compliance Certification Services Inc.

Report No: C131225R01-RPW

FCC ID: Y4O-LQPJRX

Date of Issue :January 15, 2014

Job No.:	C131225R01-RPW	Date:	2013-12-31
Standard:	FCC Class B	Time:	15:36:59
Test item:	Conduction test	Temp.(C)/Hum.(%):	22(C)/48%
Line:	L2	Test By:	Blent.Wang
Model:	VORTEX (Dongle)	WIRELESS	Test Voltage: AC 120V/60Hz

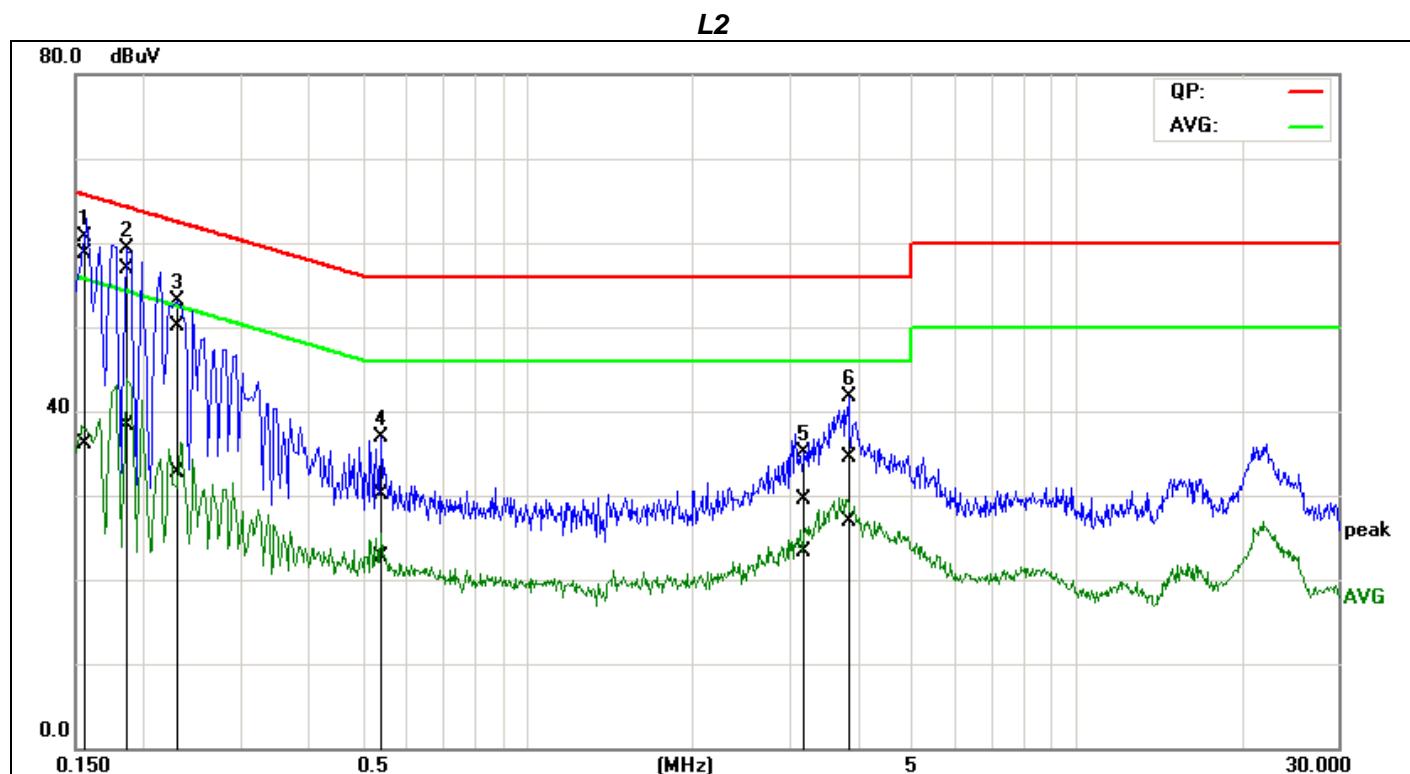

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1537	39.06	16.46	19.72	58.78	36.18	65.80	55.80	-7.02	-19.62	Pass
2	0.1828	37.26	18.69	19.67	56.93	38.36	64.36	54.36	-7.43	-16.00	Pass
3	0.2266	30.45	12.96	19.66	50.11	32.62	62.57	52.57	-12.46	-19.95	Pass
4	0.5382	10.32	2.82	19.85	30.17	22.67	56.00	46.00	-25.83	-23.33	Pass
5	3.1444	9.40	3.17	20.10	29.50	23.27	56.00	46.00	-26.50	-22.73	Pass
6	3.8373	14.28	6.69	20.17	34.45	26.86	56.00	46.00	-21.55	-19.14	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

END OF REPORT