



## FCC PART 18

# MEASUREMENT AND TEST REPORT

For

## Sichuan Topluck Lighting Co., Ltd.

No.1 Electrical Industry Zone, Taiji Road, Suining Development Area,  
Suining, Sichuan, China

**FCC ID: Y4WYPZ120S23W**

**Model Number: YPZ120/23-T3S RD**

<b>This Report Concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Equipment Type:</b> Energy Saving Lamp
<b>Test Engineer:</b> Fisher He <b>Report Number:</b> RSC101111003	
<b>Report Date:</b> 2010-12-05	
<b>Reviewed By:</b> Sally Ni <b>Prepared By:</b> David Li	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Chengdu) 5040, HuiLongWan Plaza, No. 1, ShaWan Road, JinNiu District, Chengdu, China www.baclcorp.com	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, NIST, or any agency of the Federal Government. \* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk “\*” (Rev.2)

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
TEST FACILITY .....	3
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>4</b>
DESCRIPTION OF TEST CONFIGURATION .....	4
EUT EXERCISE SOFTWARE .....	4
SPECIAL ACCESSORIES .....	4
EQUIPMENT MODIFICATIONS .....	4
EXTERNAL I/O CABLE.....	4
CONFIGURATION OF TEST SYSTEM .....	4
TEST SETUP BLOCK DIAGRAM.....	5
<b>SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>FCC §18.307 – AC LINE CONDUCTED EMISSIONS.....</b>	<b>7</b>
MEASUREMENT UNCERTAINTY .....	7
EUT SETUP .....	7
EMI TEST RECEIVER SETUP.....	8
TEST EQUIPMENT LIST AND DETAILS.....	8
TEST PROCEDURE .....	8
SUMMARY OF TEST RESULTS .....	8
CONDUCTED EMISSIONS TEST DATA & PLOTS.....	9
<b>FCC §18.305 – FIELD STRENGTH.....</b>	<b>12</b>
MEASUREMENT UNCERTAINTY .....	12
EUT SETUP .....	12
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE .....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	13

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

The **Sichuan Topluck Lighting Co., Ltd.**'s product, model number: **YPZ120/23-T3S RD (FCC ID: Y4WYPZ120S23W)** or the "EUT" as referred to in this report is the **Energy Saving Lamp**, which has plastic enclosure. It is measures approximately: 130 mm L x 60 mm D.  
Rated input voltage: AC 120V/60Hz

*Note: All measurement and test data in this report was gathered from production sample, serial number: 101110003, (Assigned by BACL), the item was received on 2010-11-10.*

### Objective

The following test report is prepared on behalf of **Sichuan Topluck Lighting Co., Ltd.**, in accordance with Part 2, Subpart J, and Part 18, Subparts A, B and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to determine compliance with FCC Part 18 limits.

### Related Submittal(s)/Grant(s)

No related submittal(s).

### Test Methodology

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurements were performed at Bay Area Compliance Laboratory Corporation.

### Test Facility

The test site used by BACL to collect test data is located in the Room 5040, HuiLongWan Plaza, No. 1, ShaWan Road, JinNiu District, ChengDu, China

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on July 31, 2009. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 560332. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The EUT was provided for tests as a stand-alone device. The system is configured for testing in a typical fashion (as a normally used by a typical user).

### EUT Exercise Software

N/A.

### Special Accessories

No special accessories were supplied by BACL.


### Equipment Modifications


No modification to the EUT was made by BACL to make sure the EUT comply with applicable limits.

### External I/O Cable

Cable Description	Length (M)	From/Port	To
AC Power Cable	1.2	L.I.S.N.	EUT

### Configuration of Test System

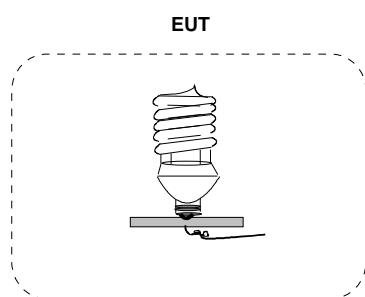

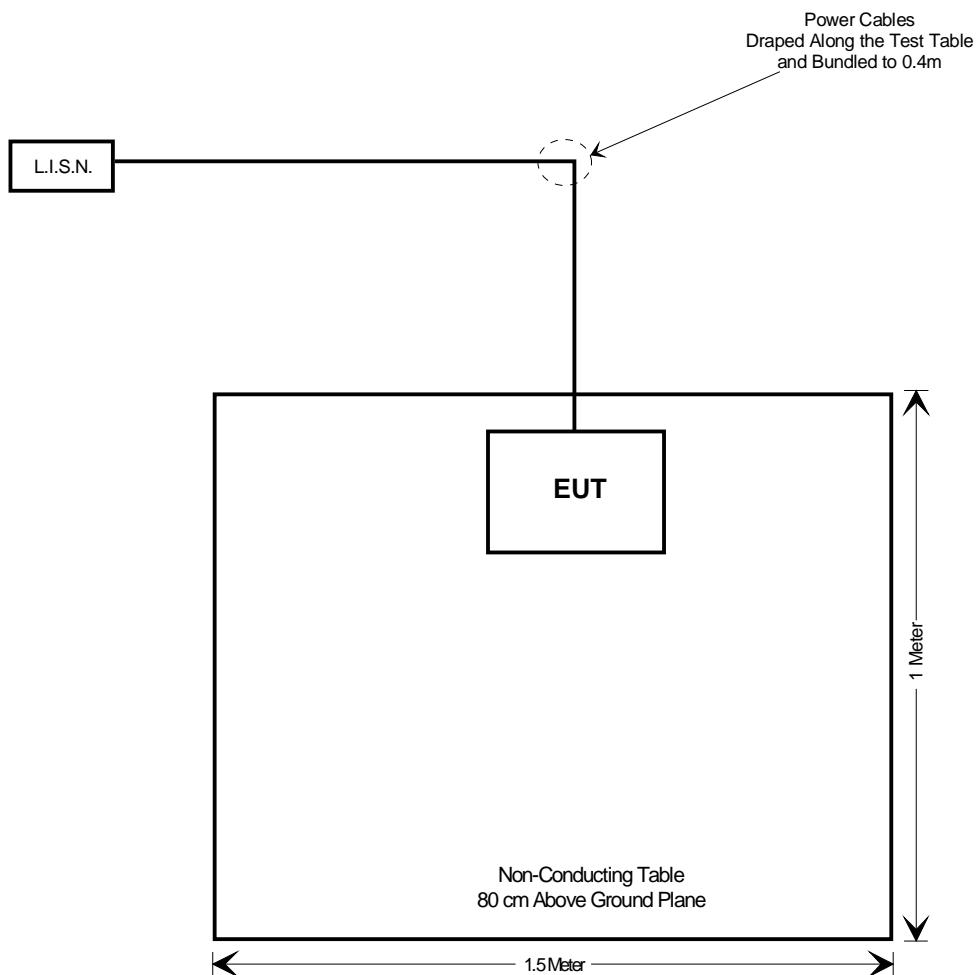**Test Setup Block Diagram**

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Results
§ 18.307	AC Line Conduction Emission	Compliant
§ 18.305	Field Strength	Compliant


## FCC §18.307 – AC LINE CONDUCTED EMISSIONS

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMI. The factors contributing to uncertainties are EMI Test Receiver, cable loss, and L.I.S.N.

Based on NIS 81, The Treatment of Uncertainty in EMI Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is  $\pm 2.4$  dB.

### EUT Setup

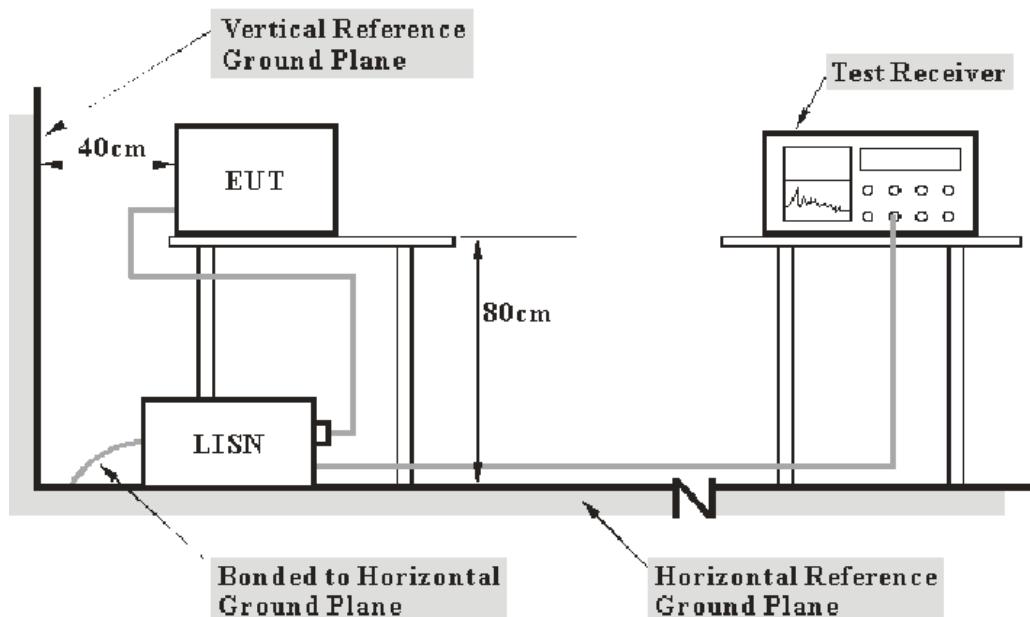

**Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per MP-5 measurement procedure. Specification used was with the FCC Part 18.307.

The power cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

A 120VAC/60Hz power source was provided to the EUT through the L.I.S.N.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 450 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<b>Frequency Range</b>	<b>IF B/W</b>
450 kHz – 30 MHz	9 kHz

## Test Equipment List and Details

Manufacturer	Description	Model Number	Serial Number	Cal. Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	10028	2011-09-27
SOLAR	L.I.S.N.	9252-50-R-24-BNC	984412	2010-12-20
Rohde & Schwarz	L.I.S.N.	ENV216	100081	2010-11-12
Rohde & Schwarz	Pulse Limiter	ESH3Z2	DE25985	2011-10-12

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Chengdu) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Test Procedure

During the conducted emission test, the power cord of the EUT is connected to the outlet of the L.I.S.N.(Line Impedance Stabilization Network).

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Peak detection and Quasi-peak detection mode.

## Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Part 18.307, with the worst margin reading of:

**11.4 dB at 0.50 MHz** at the **Neutral** mode with the power cord extension, 0.45 – 30 MHz

**Test Result:** Compliant, please see the following tables and plots.

## Conducted Emissions Test Data & Plots


### Environmental Conditions

<b>Temperature:</b>	25 ° C
<b>Relative Humidity:</b>	56%
<b>ATM Pressure:</b>	100.0 KPa

*The testing was performed by Sally Ni and Fisher He.*


*Test mode: operating mode*

Line Conducted Emissions				FCC Part 18.307	
Frequency (MHz)	Cord. Amplitude (dB $\mu$ V)	Detector (QP/Ave/PK)	(Line/Neutral)	Limit (dB $\mu$ V)	Margin (dB)
0.50	36.7	PK	Neutral	48	11.4
0.57	33.6	PK	Neutral	48	14.4
0.46	33.1	PK	Neutral	48	15.0
0.63	30.1	PK	Neutral	48	17.9
0.54	29.9	PK	Line	48	18.1
0.46	29.5	PK	Line	48	18.5
0.48	26.4	QP	Neutral	48	21.6
0.51	26.2	QP	Line	48	21.8
0.67	24.9	PK	Line	48	23.1
1.21	24.8	PK	Neutral	48	23.3
0.59	24.4	PK	Line	48	23.6
1.07	23.1	PK	Neutral	48	24.9
0.81	21.9	PK	Line	48	26.2
1.15	21.6	PK	Line	48	26.4
0.64	20.5	QP	Line	48	27.5
0.61	19.8	QP	Neutral	48	28.2
0.45	19.2	QP	Line	48	28.8
0.58	17.8	QP	Line	48	30.2
1.50	14.7	QP	Neutral	48	33.3
0.84	13.6	QP	Neutral	48	34.4
1.07	13.2	QP	Neutral	48	34.8
1.63	13.1	QP	Neutral	48	34.9
1.11	11.4	QP	Line	48	36.6
0.95	8.2	QP	Line	48	39.9

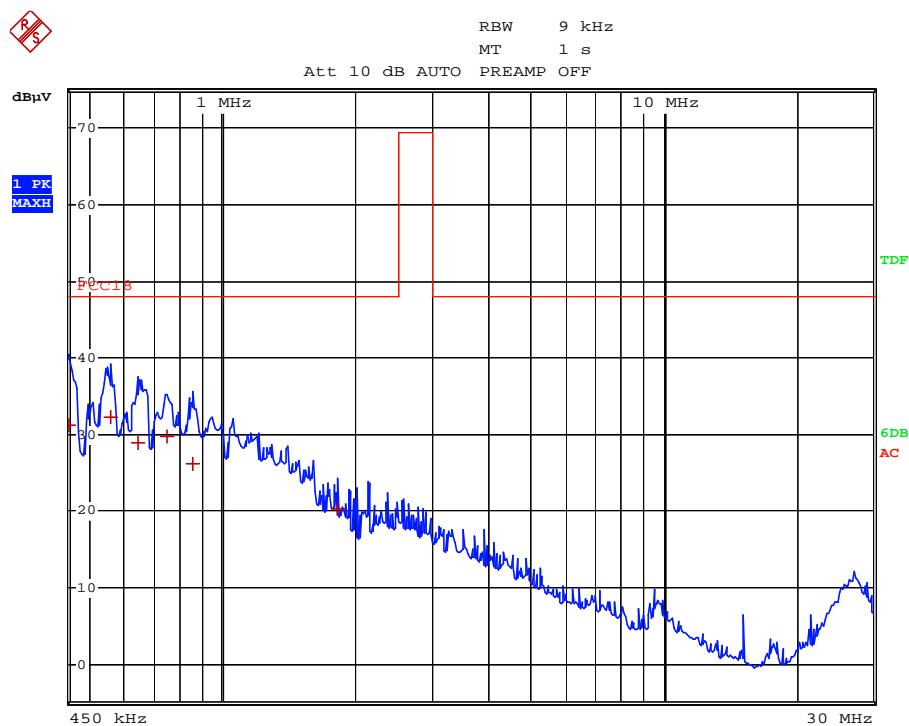**Plot(s) of Test Data****120 V/60 Hz, Line**

Date: 3.DEC.2010 13:49:07

## 120 V/60 Hz, Neutral

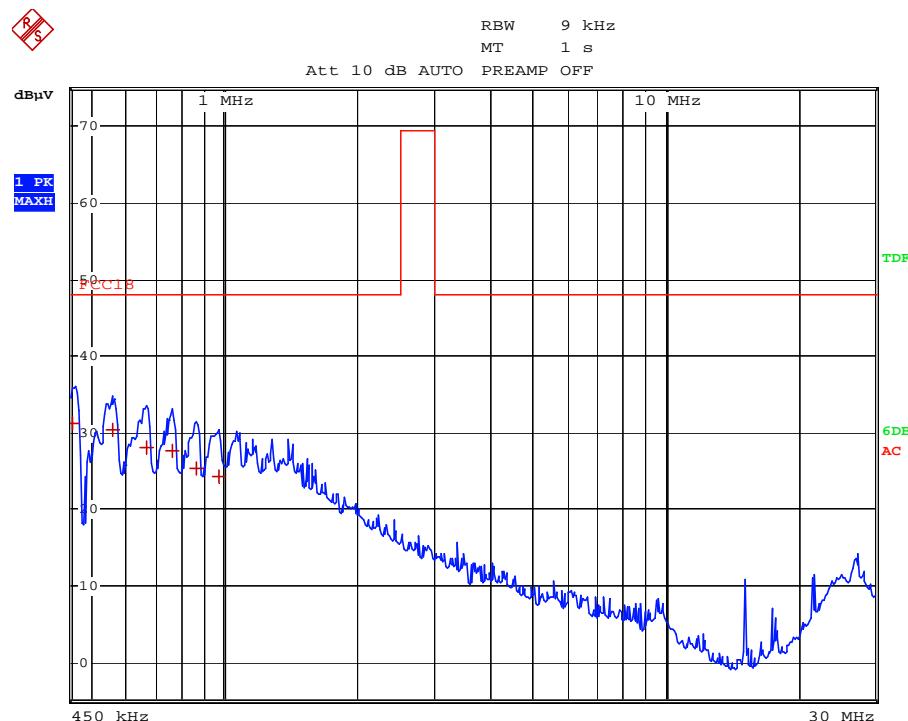

Date: 3.DEC.2010 13:53:29

## FCC §18.305 – FIELD STRENGTH

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are EMI Test Receiver, cable loss, antenna factor calibration antenna factor frequency interpolation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, the Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Chengdu) is  $\pm 4.0$  dB.

### EUT Setup

The radiated emission tests were performed in the 3 meters chamber test site, the EUT was placed on the test table and the distant from the receiver antenna 3m using the setup accordance with MP-5.

The specification used was FCC Part 18.305.

The power source which EUT used was AC 120V, 60Hz.

### EMI Test Receiver Setup

The system was investigated from 9 kHz to 30 MHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency	R B/W	V B/W	IF B/W
9 kHz – 150 kHz	3 kHz	3 kHz	200 Hz
150 kHz-30 MHz	100 kHz	100 kHz	9 kHz

### Test Equipment List and Details

Manufacturer	Description	Model Number	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2010-10-16	2011-10-16
Rohde & Schwarz	Loop Antenna	HFH2-Z2	040904	2010-08-14	2011-08-14

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Chengdu) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Procedure

During the field strength test, the power cord of the EUT is connected to the auxiliary outlet of the AC power.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Peak detection mode.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss from the Meter Reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl}$$

## Test Results

### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.2 kPa

*The testing was performed by Fisher He and Sally Ni.*

*Test mode: operating mode*

Frequency (MHz)	Cord. Amp. (dB $\mu$ V/m)	Detector (QP/Ave/PK)	Limit (dB $\mu$ V/m)	Margin (dB)
35.24	12.3	PK	63.5	51.21
46.84	2.8	PK	63.5	60.66
530.00	1.0	PK	63.5	62.55
8350.00	0.7	PK	63.5	62.85
47.24	0.6	PK	63.5	62.89
50.13	0.0	PK	63.5	63.50

\*\*\*\*\* END OF REPORT \*\*\*\*\*