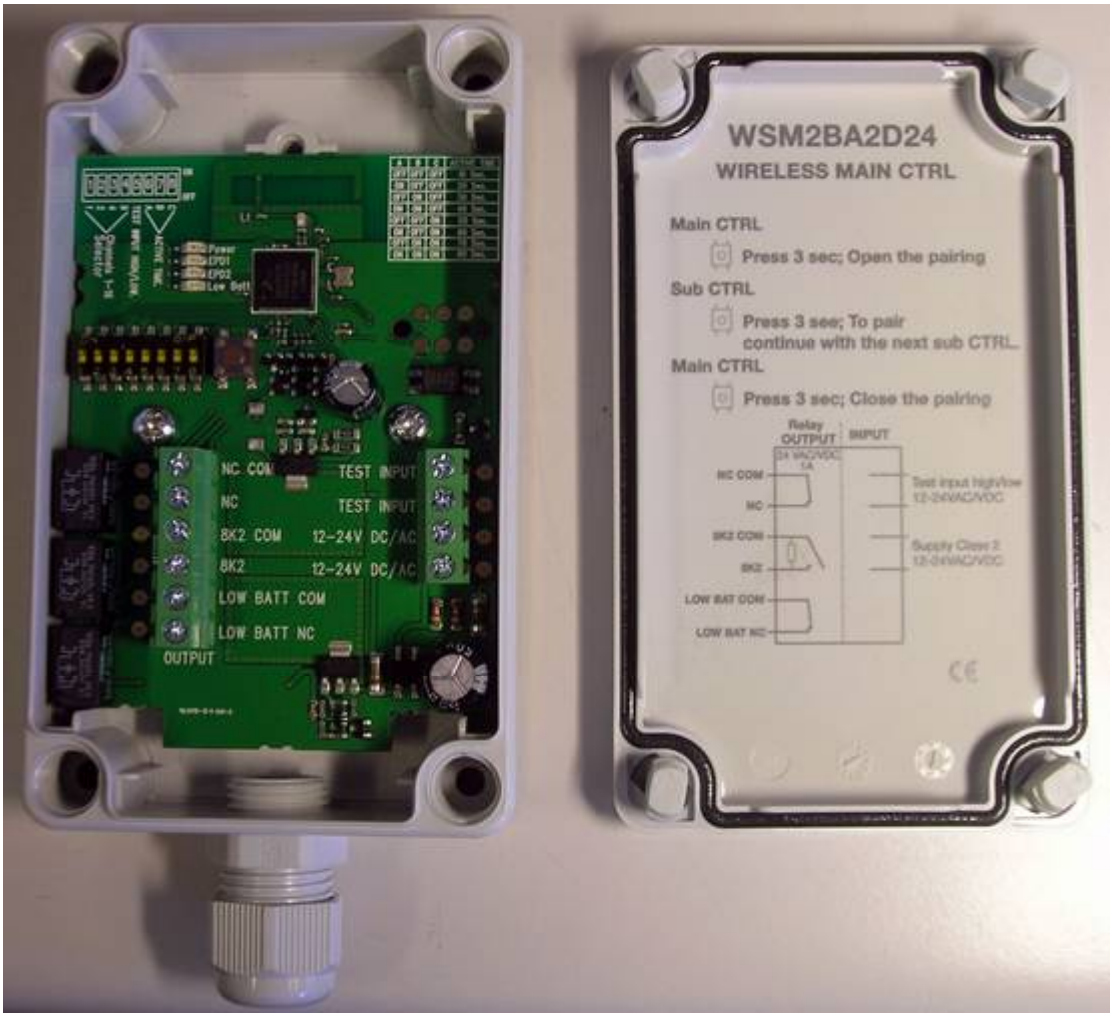
NC COM
TEST INPUT
NC
TEST INPUT
8K2 COM
12-24V DC/AC
8K2
12-24V DC/AC
LOW BATT COM
LOW BATT NC
OUTPUT
WSM2BA2D24
WIRELESS MAIN CTRL
Main CTRL
Press 3 sec; Open the pairing
Sub CTRL
Press 3 sec; To pair
continue with the next sub CTRL.
Main CTRL
Press 3 sec; Close the pairing
Relay
OUTPUT
INPUT
NC COM
NC
8K2 COM
8K2
LOW BAT COM
LOW BAT NC

NC COM
NC
BK2 COM
BK2
LOW BATT COM
LOW BATT NC
OUTPUT
TEST INPUT
TEST INPUT
12~24V DC/AC
12~24V DC/AC
WIRELESS MAIN CONTROL

NC COM
TEST INPUT
NC
TEST INPUT
8K2 COM
12-24V DC/AC
8K2
12-24V DC/AC
LOW BATT COM
LOW BATT NC
OUTPUT