



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Portable Bluetooth Stereo Speaker

Model: FH-55, DC-932-C

Brand: N/A

Test Report Number:

C141010Z07-RP1

Prepared for

SHENZHEN QI SHENGLONG INDUSTRIALIST CO.,LTD.

5F., Blk 6A, Jing Nan Industry, Bai Ge long, Buji, Shenzhen, China

Prepared by

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.

No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen China

TEL: 86-755-28055000

FAX: 86-755-28055221

Issued Date: October 28, 2014



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	October 28, 2014	Initial Issue	ALL	Nancy Fu

**TABLE OF CONTENTS**

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY.....	6
3.1 DESCRIPTION OF TEST MODES.....	6
4. FACILITIES AND ACCREDITATIONS	7
4.1 FACILITIES.....	7
4.2 ACCREDITATIONS	7
4.3 MEASUREMENT UNCERTAINTY	7
5. SETUP OF EQUIPMENT UNDER TEST	8
5.1 SETUP CONFIGURATION OF EUT	8
5.2 SUPPORT EQUIPMENT	8
6. FCC PART 15.247 REQUIREMENTS	9
6.1 20dB BANDWIDTH.....	9
6.2 PEAK POWER.....	13
6.3 PEAK POWER SPECTRAL DENSITY	15
6.4 BAND EDGES MEASUREMENT	16
6.5 FREQUENCY SEPARATION	26
6.6 NUMBER OF HOPPING FREQUENCY	29
6.7 TIME OF OCCUPANCY (DWELL TIME).....	32
6.8 SPURIOUS EMISSIONS	39
6.9 POWERLINE CONDUCTED EMISSIONS	57



1. TEST RESULT CERTIFICATION

Product	Portable Bluetooth Stereo Speaker
Model	FH-55, DC-932-C
Brand	N/A
Tested	October 10~ 28, 2014
Applicant	SHENZHEN QI SHENGLONG INDUSTRIALIST CO.,LTD. 5F.,Blk 6A, Jing Nan Industry, Bai Ge long,Buji, Shenzhen, China
Manufacturer	DONGGUAN FEIHAO INDUSTRIALIST CO.,LTD No.8,Fengyi Road, Dakan Village, Huangjiang, DongGuan, China

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Sunday Hu
Supervisor of EMC Dept.
Compliance Certification Service Inc.

Reviewed by:

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Service Inc.



2. EUT DESCRIPTION

Product	Portable Bluetooth Stereo Speaker
Model Number	FH-55, DC-932-C
Brand	N/A
Model Discrepancy	All models are identical to each other except their model names.
Identify Number	C141010Z07-RP1
Power Supply	DC3.7V supplied by the battery or DC5V supplied by PC
Received Date	October 10, 2014
Frequency Range	2402 ~ 2480 MHz
Transmit Power	GFSK : -3.54dBm 8DPSK : -4.27dBm
Modulation Technique	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
Number of Channels	79 Channels
Antenna Specification	PCB Antenna with 0 dBi gain(Max)
Temperature Range	0°C ~ +40°C

Note: This submittal(s) (test report) is intended for FCC ID: Y56QSLDC932C filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Charge + Aux In + BT TX	<input checked="" type="checkbox"/>
Radiated Emission	Mode 1: TX	<input checked="" type="checkbox"/>

Channel Low (2402MHz) 、 Mid (2441MHz) and High (2480MHz) were chosen for pre-testing for GFSK 、 $\pi/4$ -DQPSK and 8DPSK, GFSK and 8DPSK were the worse case and print in the report.



4. FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4:2009, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652, G-624)
Canada	INDUSTRY CANADA
Taiwan	BSMI
Norway	Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



5. SETUP OF EQUIPMENT UNDER TEST

5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC	Brand	Data Cable	Power Cord
1	PC	D11M	CNOT8JM8701633 14O2B3A00	DOC	DELL	Shielded 1.50m (USB Cable) Shielded 1.50m (AUX Cable)	Unshielded 1.80m
2	Monitor	ST240LB	CNOVTTD2742611 102DJU	DOC	DELL	Shielded 1.50m	Unshielded 1.80m
3	Mouse	KB212-B	CN09RRC4475116 80996	DOC	DELL	Shielded 1.50m	N/A
4	Keyboard	SK-8115	CN-0DJ313-71616- 82P-0YTB	DOC	DELL	Shielded 1.50m	N/A
5	Modem	DU-562M	ES1X268007883	DOC	D-LINK	Shielded 1.50m	N/A
6	Printer	D1668	CN9CKCB2RG	DOC	HP	Shielded 1.50m	Unshielded 1.80m
7	Notebook	B475	WB04861612	DOC	LENOVO	N/A	Unshielded 2.50m

Notes:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



6. FCC PART 15.247 REQUIREMENTS

6.1 20dB BANDWIDTH


None; for reporting purpose only.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	10/25/2013	10/24/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION

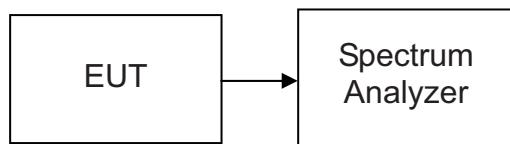

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW=100kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.

TEST RESULTS

No non-compliance noted




Test plot GFSK

20dB Bandwidth(CH Low)




20dB Bandwidth (CH Mid)

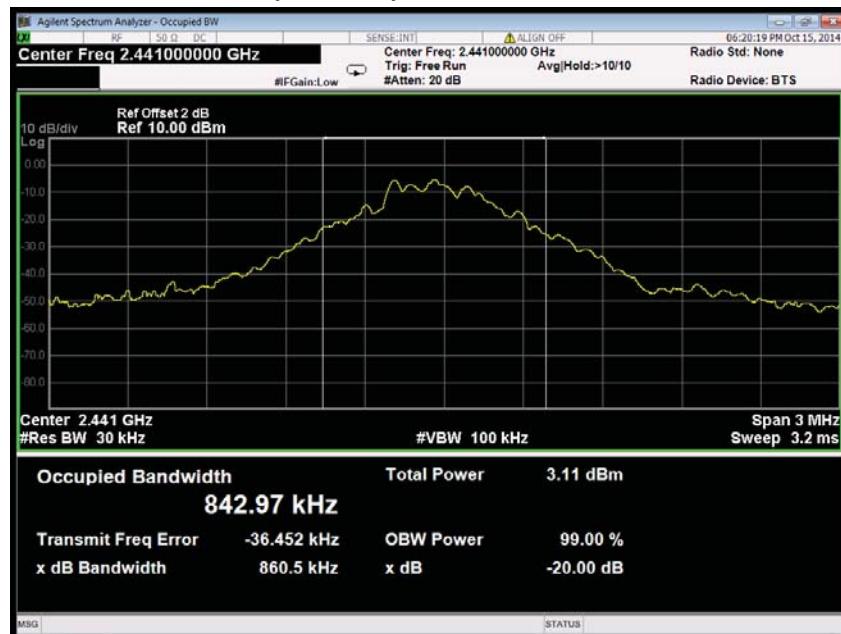




20dB Bandwidth (CH High)

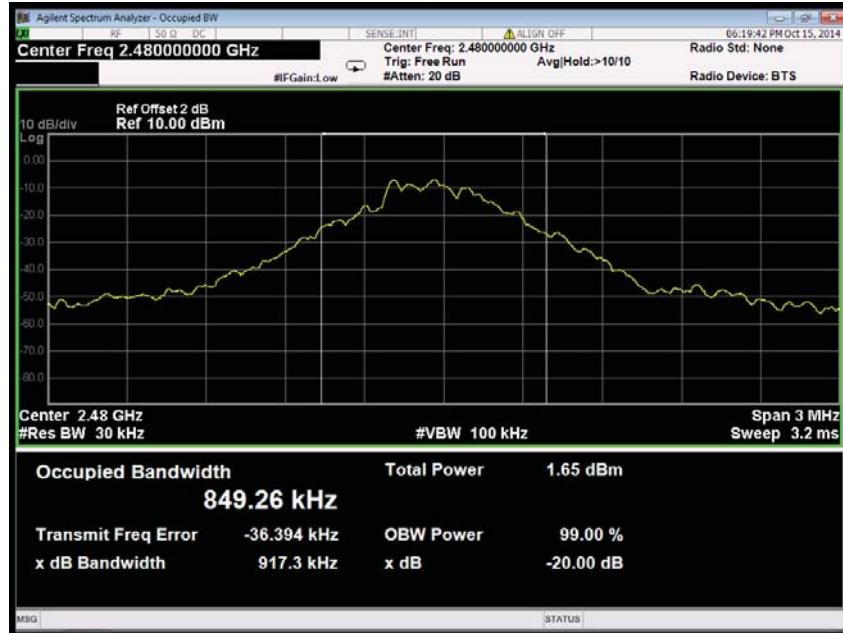


8DPSK

20dB Bandwidth (CH Low)

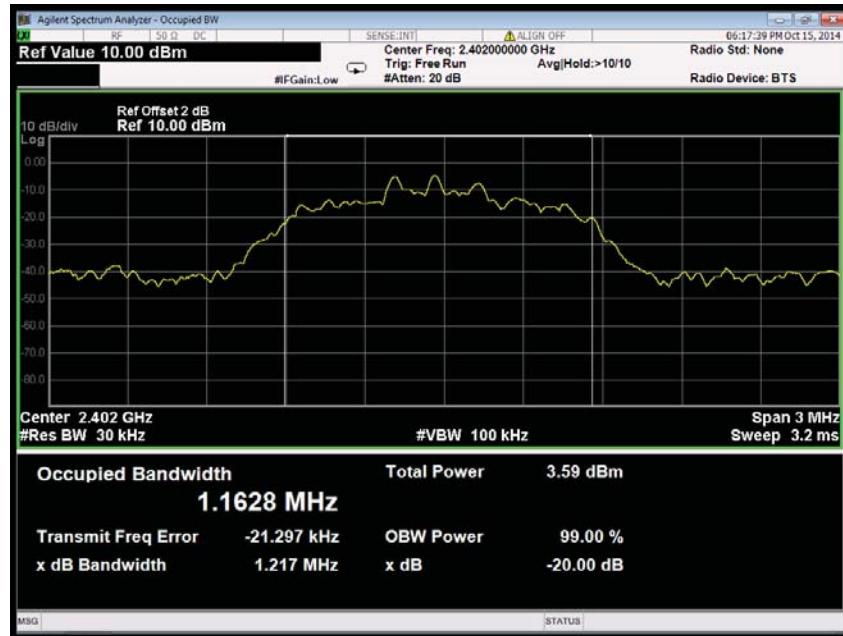




20dB Bandwidth (CH Mid)

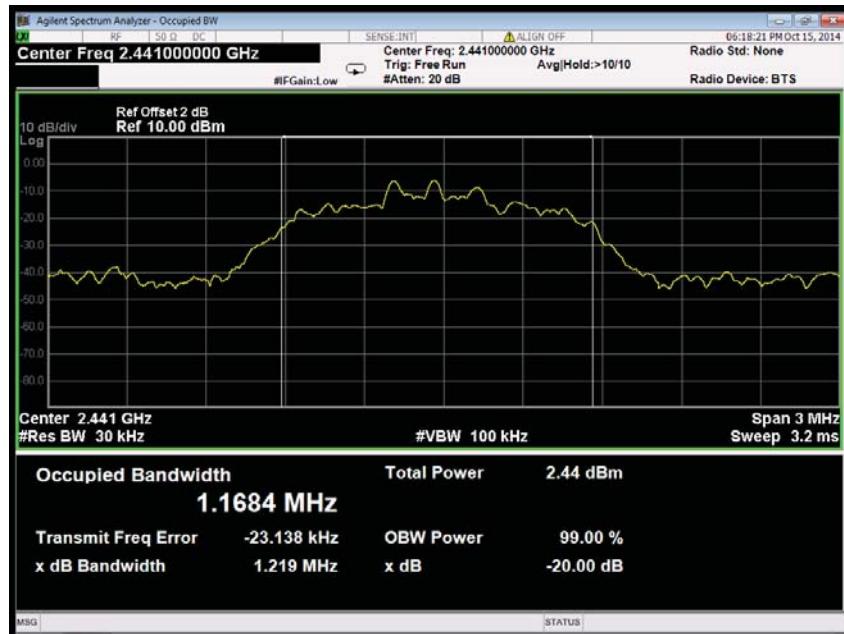

20dB Bandwidth (CH High)

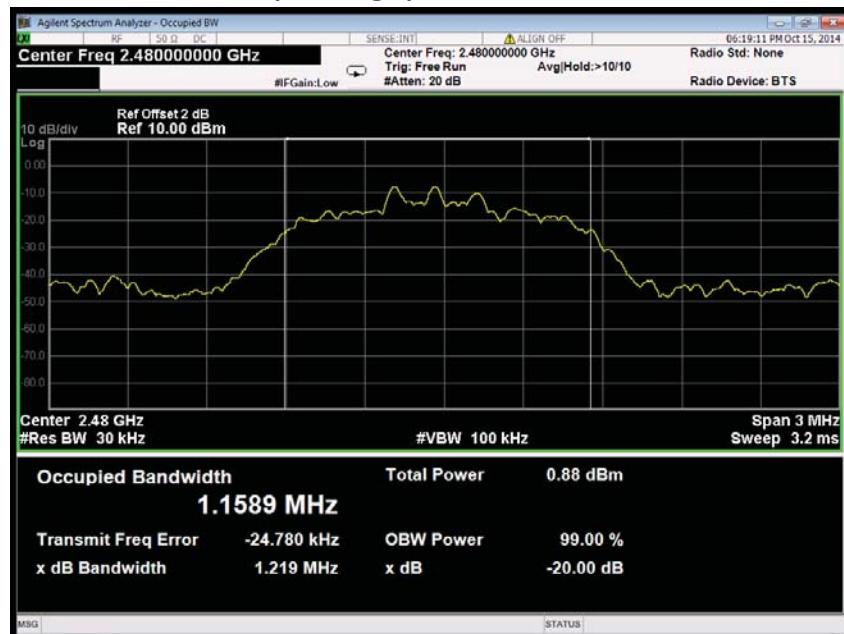



6.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2495A	1204003	03/09/2014	03/08/2015
Power Sensor	Anritsu	MA2411B	1126150	03/09/2014	03/08/2015
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

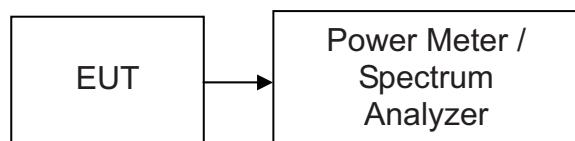

TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-7.04	3.50	-3.54	0.00044	1	PASS
Mid	2441	-7.59	3.50	-4.09	0.00039		PASS
High	2480	-8.18	3.50	-4.68	0.00034		PASS

8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-7.77	3.50	-4.27	0.00037	1	PASS
Mid	2441	-8.36	3.50	-4.86	0.00033		PASS
High	2480	-9.02	3.50	-5.52	0.00028		PASS



6.3 PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	10/25/2014	10/24/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

Not applicable. Since EUT is the Bluetooth device.



6.4 BAND EDGES MEASUREMENT


LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2014	03/18/2015
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2014	03/18/2015
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2014	07/09/2015
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2014	03/01/2015
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2014	03/01/2015
Loop Antenna	A, R, A	PLA-1030/B	1029	09/27/2014	09/26/2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2014	02/28/2015
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Test Configuration

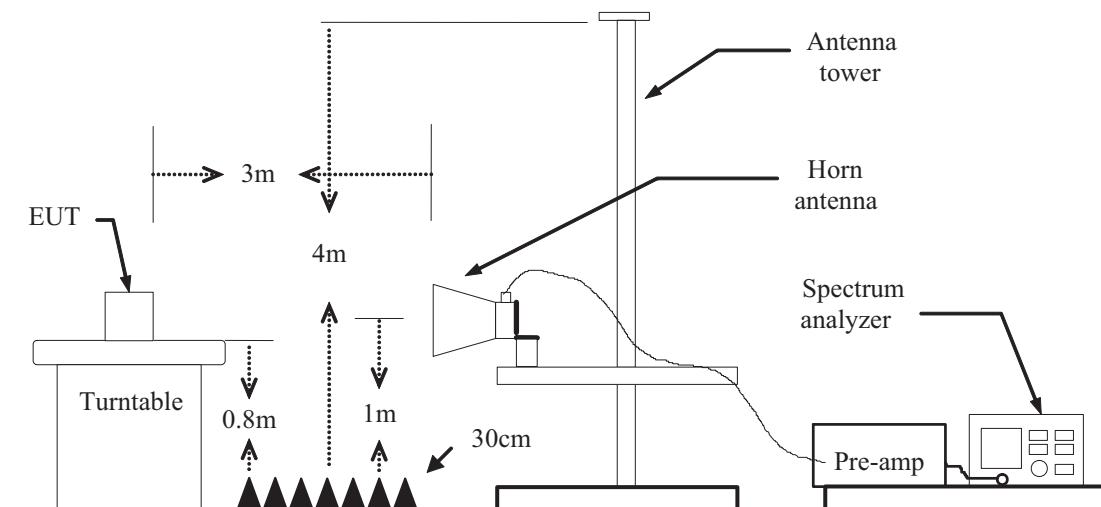



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=2.4kHz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.

**Test Data (GFSK)****Band Edges (CH-Low)****Detector mode: Peak**

Agilent

Ref 117 dB μ V

#Atten 20 dB

Polarity: Vertical

R T

Mkr1 2.402 0 GHz

92.25 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.310 0 GHz

Stop 2.410 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Marker Trace Type X Axis Amplitude

1 (1) Freq 2.402 0 GHz 92.25 dB μ V2 (1) Freq 2.390 0 GHz 45.44 dB μ V**Detector mode: Average**

Agilent

Ref 117 dB μ V

#Atten 20 dB

Polarity: Vertical

R T

Mkr1 2.402 0 GHz

91.45 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.310 0 GHz

Stop 2.410 0 GHz

#Res BW 1 MHz

#VBW 2.4 kHz

Sweep 32.52 ms (601 pts)

Marker Trace Type X Axis Amplitude

1 (1) Freq 2.402 0 GHz 91.45 dB μ V2 (1) Freq 2.390 0 GHz 35.74 dB μ V

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	38.84	-6.60	45.44	74.00	-28.56	Peak	Vertical
2	2390.0000	29.14	-6.60	35.74	54.00	-18.26	Average	Vertical

**Detector mode: Peak**

Agilent

Ref 117 dB μ V

#Atten 20 dB

Polarity: Horizontal

R T

Mkr1 2,402 0 GHz
97.07 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.310 0 GHz

1

#Res BW 1 MHz

2

#VBW 1 MHz

Stop 2.410 0 GHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.402 0 GHz	97.07 dB μ V
2	(1)	Freq	2.390 0 GHz	47.39 dB μ V

Detector mode: Average

Agilent

Ref 117 dB μ V

#Atten 20 dB

Polarity: Horizontal

R T

Mkr1 2,402 0 GHz
96.27 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

1

Start 2.310 0 GHz

2

#Res BW 1 MHz


#VBW 2.4 kHz

Stop 2.410 0 GHz

Sweep 32.52 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.402 0 GHz	96.27 dB μ V
2	(1)	Freq	2.390 0 GHz	35.76 dB μ V

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	40.79	-6.60	47.39	74.00	-26.61	Peak	Horizontal
2	2390.0000	29.16	-6.60	35.76	54.00	-18.24	Average	Horizontal

**Band Edges (CH-High)****Detector mode: Peak**Ref 117 dB μ V

#Peak

Log
10
dB/

#Atten 20 dB

Polarity: Vertical

R T

Mkr1 2.479 96 GHz

91.99 dB μ VM1 S2
Start 2.475 00 GHz
Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 96 GHz	91.99 dB μ V
2	(1)	Freq	2.483 50 GHz	48.89 dB μ V

Detector mode: AverageRef 117 dB μ V

#Peak

Log
10
dB/

#Atten 20 dB

Polarity: Vertical

R T

Mkr1 2.479 96 GHz

91.22 dB μ VM1 S2
Start 2.475 00 GHz
Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 2.4 kHz

Sweep 8.16 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 96 GHz	91.22 dB μ V
2	(1)	Freq	2.483 50 GHz	36.84 dB μ V

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	42.65	-6.24	48.89	74.00	-25.11	Peak	Vertical
2	2483.5000	30.60	-6.24	36.84	54.00	-17.16	Average	Vertical

**Detector mode: Peak****Polarity: Horizontal**Ref 117 dB μ V

#Atten 20 dB

R T

Mkr1 2.479 75 GHz

95.47 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.475 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 75 GHz	95.47 dB μ V
2	(1)	Freq	2.483 50 GHz	58.84 dB μ V

Detector mode: Average**Polarity: Horizontal**Ref 117 dB μ V

#Atten 20 dB

R T

Mkr1 2.479 96 GHz

94.19 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.475 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 2.4 kHz

Sweep 8.16 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 96 GHz	94.19 dB μ V
2	(1)	Freq	2.483 50 GHz	37.36 dB μ V

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	44.60	-6.24	50.84	74.00	-23.16	Peak	Horizontal
2	2483.5000	31.12	-6.24	37.36	54.00	-16.64	Average	Horizontal

**8DPSK****Band Edges (CH-Low)****Detector mode: Peak**

Agilent

Ref 117 dB μ V #Atten 20 dB#Peak
Log
10
dB/**Polarity: Vertical**

R T

Mkr1 2,402 2 GHz
91.16 dB μ VLgAv
M1 S2Start 2.310 0 GHz Stop 2.410 0 GHz
#Res BW 1 MHz #VBW 1 MHz
Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.402 2 GHz	91.16 dB μ V
2	(1)	Freq	2.390 0 GHz	47.25 dB μ V

Detector mode: Average

Agilent

Ref 117 dB μ V #Atten 20 dB#Peak
Log
10
dB/**Polarity: Vertical**

R T

Mkr1 2,402 2 GHz
87.30 dB μ VLgAv
M1 S2Start 2.310 0 GHz Stop 2.410 0 GHz
#Res BW 1 MHz #VBW 2.4 kHz
Sweep 32.52 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.402 2 GHz	87.30 dB μ V
2	(1)	Freq	2.390 0 GHz	35.81 dB μ V

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	40.65	-6.60	47.25	74.00	-26.75	Peak	Vertical
2	2390.0000	29.21	-6.60	35.81	54.00	-18.19	Average	Vertical

**Detector mode: Peak**

Agilent

Ref 117 dB μ V

#Atten 20 dB

Polarity: Horizontal

R T

Mkr1 2.402 2 GHz
94.98 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.310 0 GHz

Stop 2.410 0 GHz

#Res BW 1 MHz #VBW 1 MHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.402 2 GHz	94.98 dB μ V
2	(1)	Freq	2.390 0 GHz	45.91 dB μ V

Detector mode: Average

Agilent

Ref 117 dB μ V

#Atten 20 dB

Polarity: Horizontal

R T

Mkr1 2.402 2 GHz
91.24 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.310 0 GHz

Stop 2.410 0 GHz

#Res BW 1 MHz #VBW 2.4 kHz

Sweep 32.52 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.402 2 GHz	91.24 dB μ V
2	(1)	Freq	2.390 0 GHz	35.71 dB μ V

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	39.31	-6.60	45.91	74.00	-28.09	Peak	Horizontal
2	2390.0000	29.11	-6.60	35.71	54.00	-18.29	Average	Horizontal

**Band Edges (CH-High)****Detector mode: Peak**Ref 117 dB μ V

#Atten 20 dB

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.475 00 GHz

#Res BW 1 MHz

Polarity: Vertical

R T

Mkr1 2.479 96 GHz

90.25 dB μ V

#VBW 1 MHz

Sweep 1 ms (601 pts)

Marker Trace Type X Axis Amplitude

1 (1) Freq 2.479 96 GHz 90.25 dB μ V2 (1) Freq 2.483 50 GHz 46.68 dB μ V**Detector mode: Average**Ref 117 dB μ V

#Atten 20 dB

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.475 00 GHz

#Res BW 1 MHz

Polarity: Vertical

R T

Mkr1 2.479 96 GHz

86.46 dB μ V

#VBW 2.4 kHz

Sweep 8.16 ms (601 pts)

Marker Trace Type X Axis Amplitude

1 (1) Freq 2.479 96 GHz 86.46 dB μ V2 (1) Freq 2.483 50 GHz 36.42 dB μ V

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	40.44	-6.24	46.68	74.00	-27.32	Peak	Vertical
2	2483.5000	30.18	-6.24	36.42	54.00	-17.58	Average	Vertical



Detector mode: Peak

Polarity: Horizontal



Agilent

Ref 117 dB μ V

#Atten 20 dB

R T

Mkr1 2.479 96 GHz

93.40 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.475 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 96 GHz	93.40 dB μ V
2	(1)	Freq	2.483 50 GHz	46.22 dB μ V

Detector mode: Average

Polarity: Horizontal



Agilent

R T

Mkr1 2.479 96 GHz

89.79 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.475 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 2.4 kHz

Sweep 8.16 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 96 GHz	89.79 dB μ V
2	(1)	Freq	2.483 50 GHz	36.85 dB μ V

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	39.98	-6.24	46.22	74.00	-27.78	Peak	Horizontal
2	2483.5000	30.61	-6.24	36.85	54.00	-17.15	Average	Horizontal



6.5 FREQUENCY SEPARATION

LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	10/25/2013	10/24/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	611.533	> Two-thirds of the 20 dB Bandwidth	Pass

8DPSK


Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	812.667	> Two-thirds of the 20 dB Bandwidth	Pass




GFSK

Test Plot

Measurement of Channel Separation

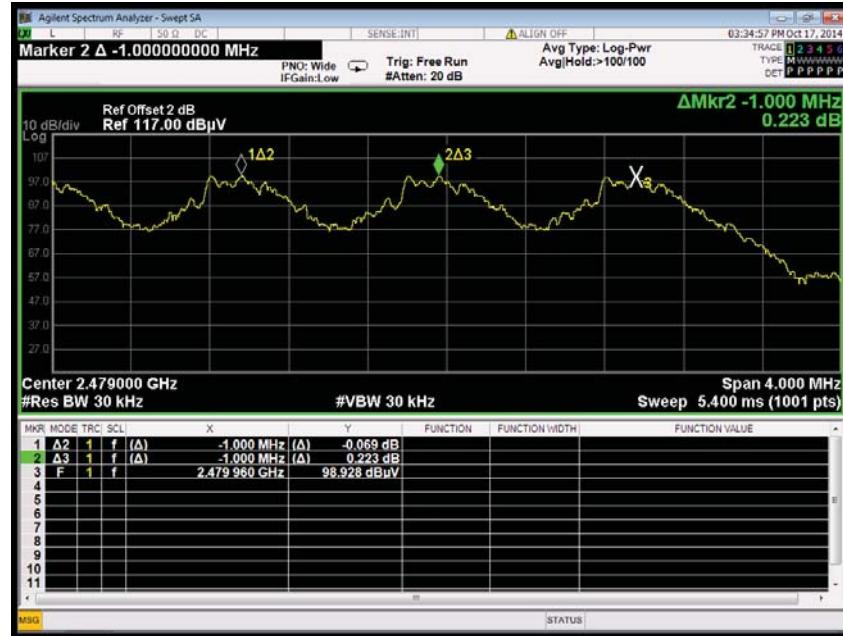

20 dB bandwidth(CH High)

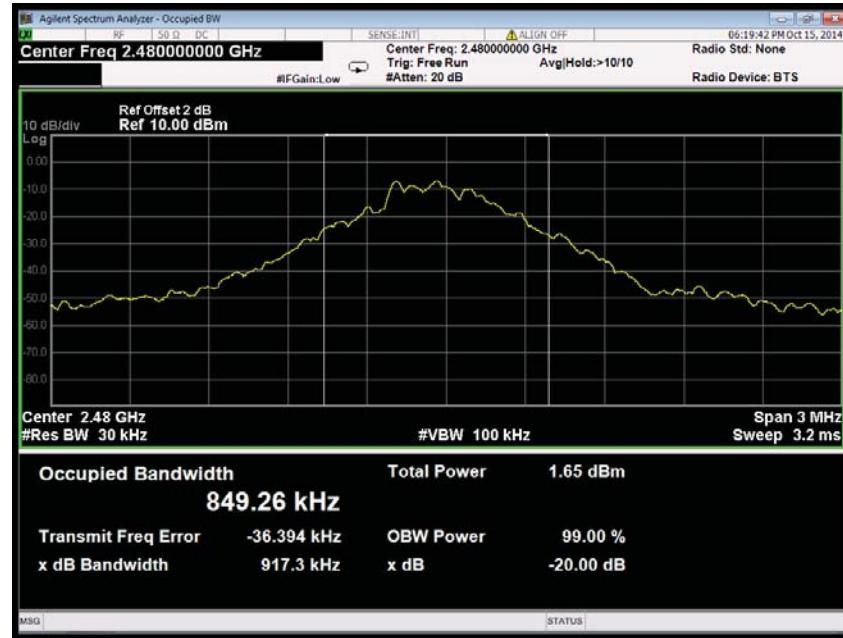





8DPSK

Test Plot

Measurement of Channel Separation

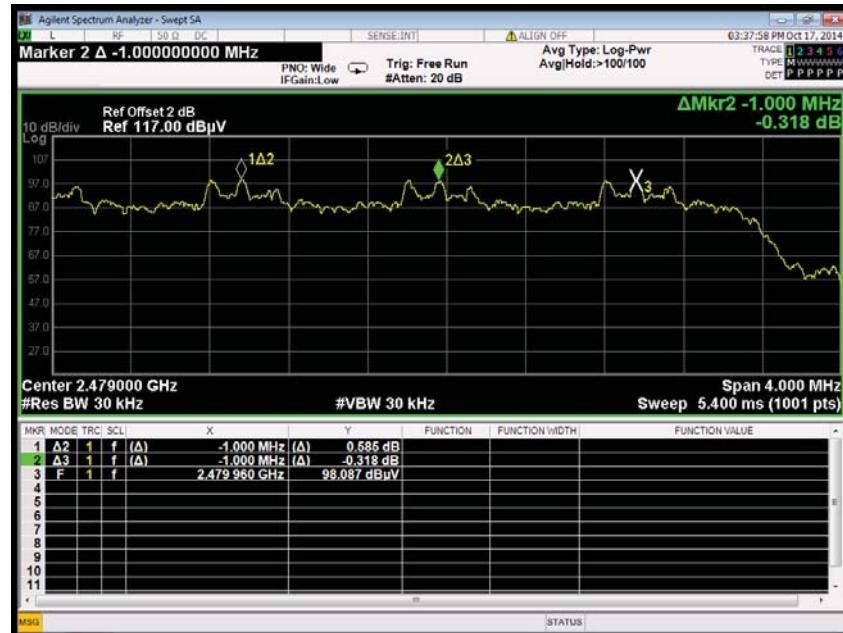

20 dB bandwidth(CH High)

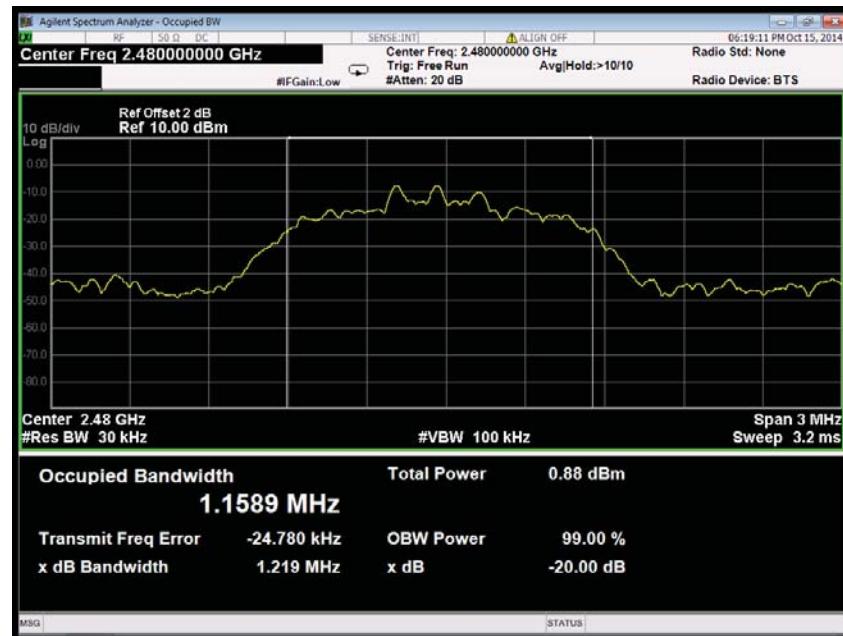



6.6 NUMBER OF HOPPING FREQUENCY

LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	10/25/2013	10/24/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE



1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = 1ms and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

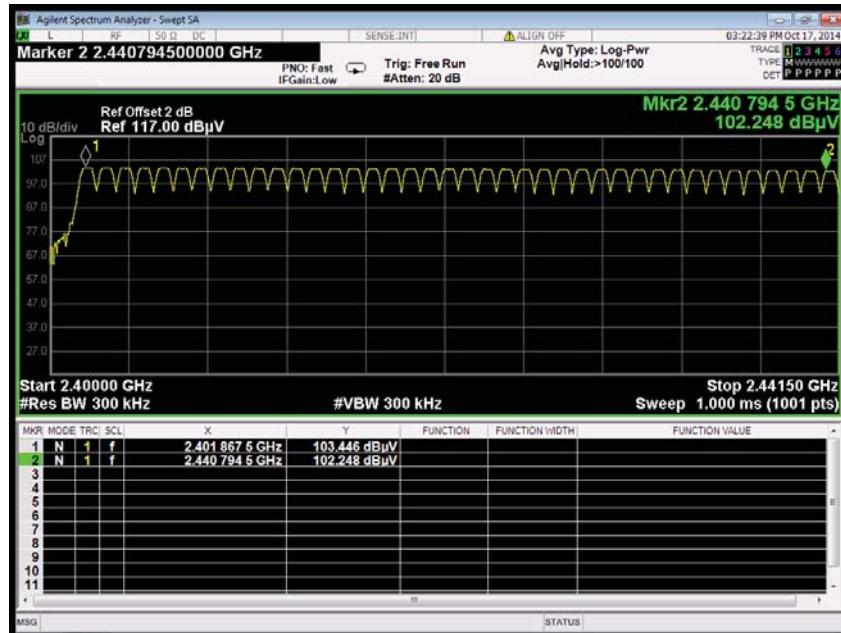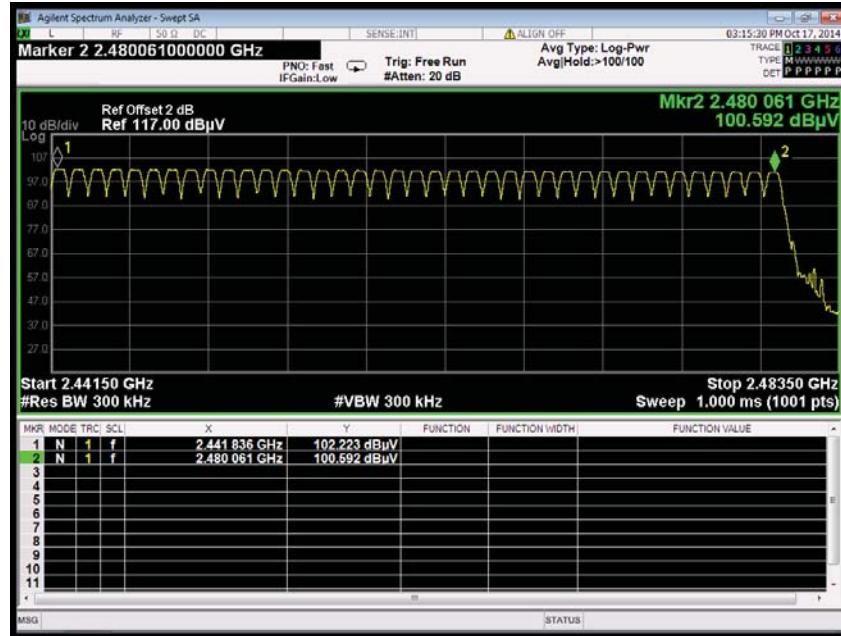
Test Plot (GFSK)Channel Number**2.400 GHz – 2.4415 GHz****2.4415 GHz – 2.4835 GHz**




Test Plot (8DPSK)

Channel Number

2.400 GHz – 2.4415 GHz

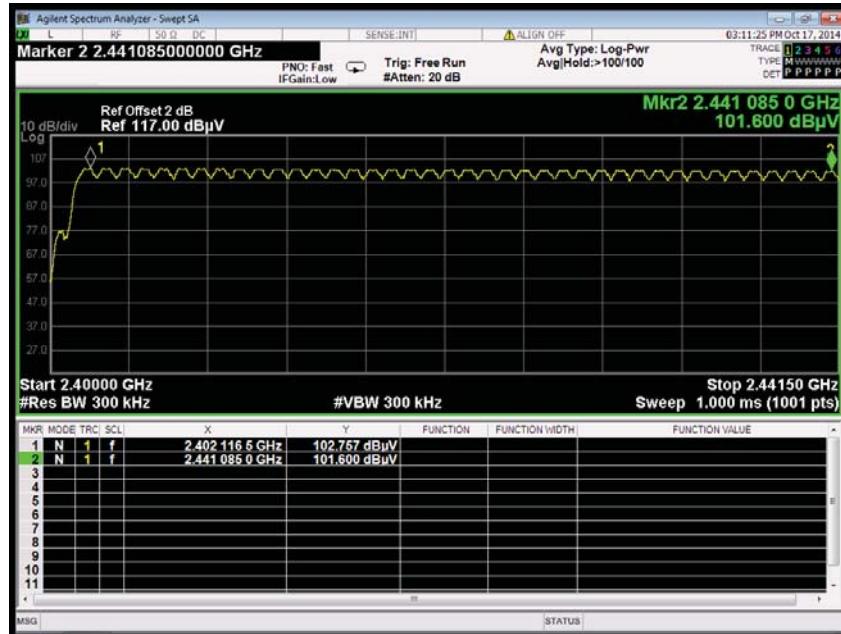

2.4415 GHz –2.4835 GHz

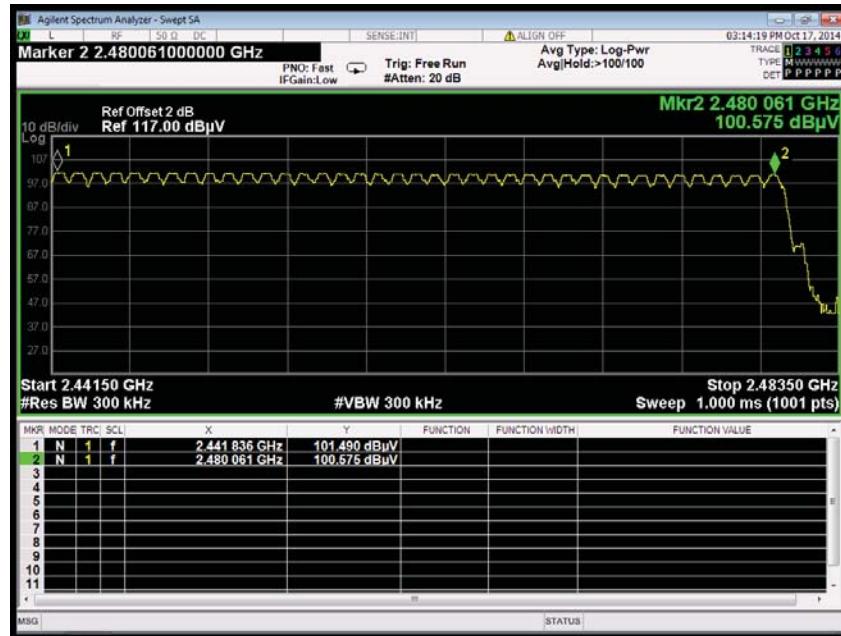



6.7 TIME OF OCCUPANCY (DWELL TIME)

LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	10/25/2013	10/24/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

DH 1

CH Low: $0.415 * (1600/2)/79 * 31.6 = 132.800$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.415	132.800	31.60	400.00	PASS

DH 3

CH Low: $1.668 * (1600/4)/79 * 31.6 = 266.880$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.668	266.880	31.60	400.00	PASS

DH 5

CH Low: $2.940 * (1600/6)/79 * 31.6 = 313.600$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.940	313.600	31.60	400.00	PASS



Test Data

8DPSK

DH 1

CH Low: $0.424 * (1600/2)/79 * 31.6 = 135.680$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.424	135.680	31.60	400.00	PASS

DH 3

CH Low: $1.680 * (1600/4)/79 * 31.6 = 268.800$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.680	268.800	31.60	400.00	PASS

DH 5

CH Low: $2.928 * (1600/6)/79 * 31.6 = 312.320$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.928	312.320	31.60	400.00	PASS

Test Plot

GFSK

DH 1

(CH Low)



DH 3

(CH Low)





DH 5

(CH Low)





Test Plot

8DPSK

DH 1

(CH Low)



DH 3

(CH Low)





DH 5

(CH Low)





6.8 SPURIOUS EMISSIONS

6.8.1. CONDUCTED MEASUREMENT

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	10/25/2013	10/24/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS


No non-compliance noted

Remark: The hopping on mode and hopping off mode were chosen for pre-test and the hopping off mode was the worse case and print in the report.




Test Plot (GFSK)

CH Low (30MHz ~26.5GHz)

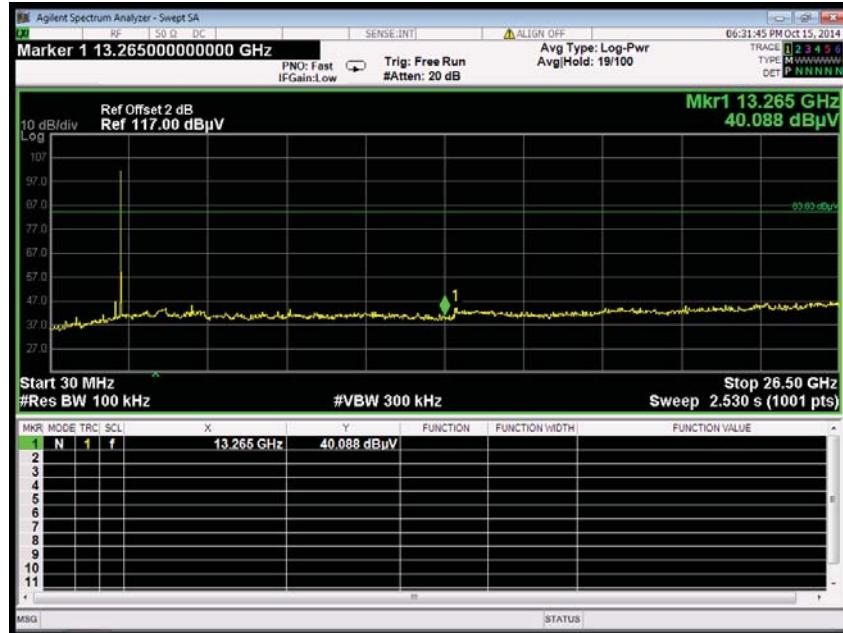


CH Low (2.31GHz ~2.41GHz)

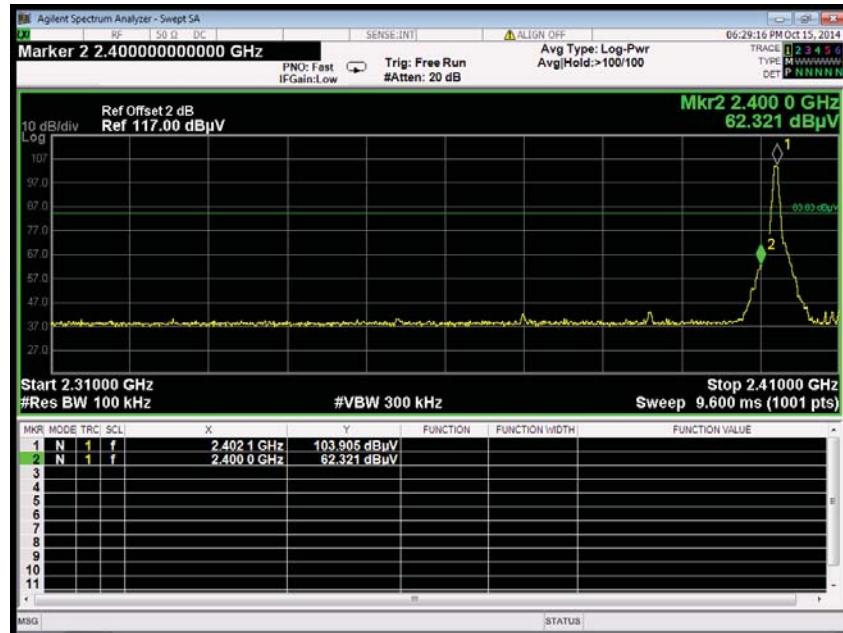




CH Mid (30MHz ~ 26.5GHz)

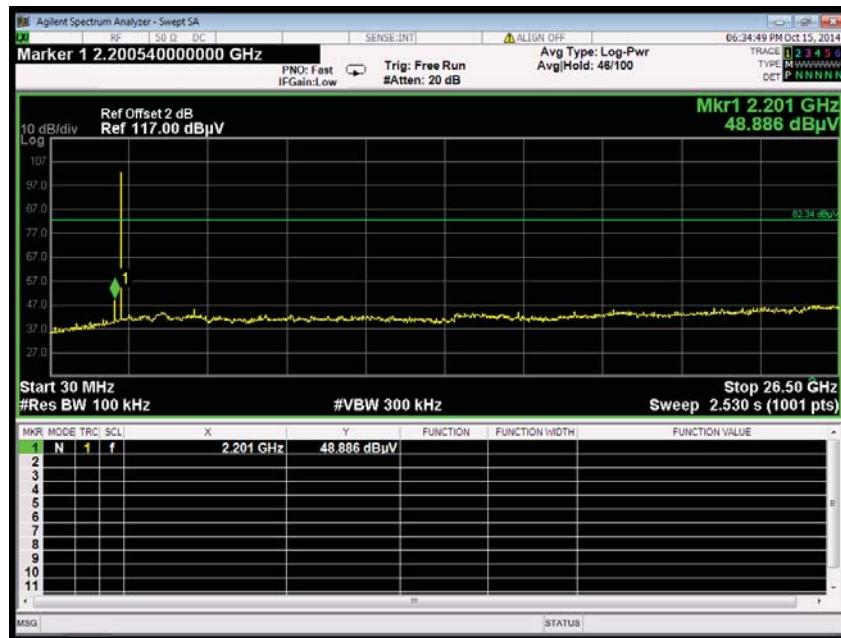




CH High (30MHz ~ 26.5GHz)

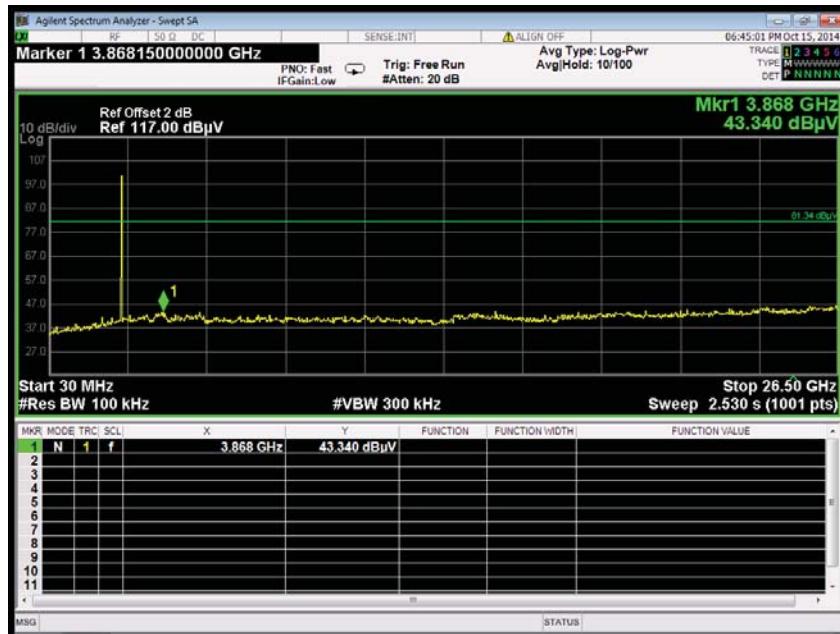


CH High (2.475GHz ~ 2.5GHz)

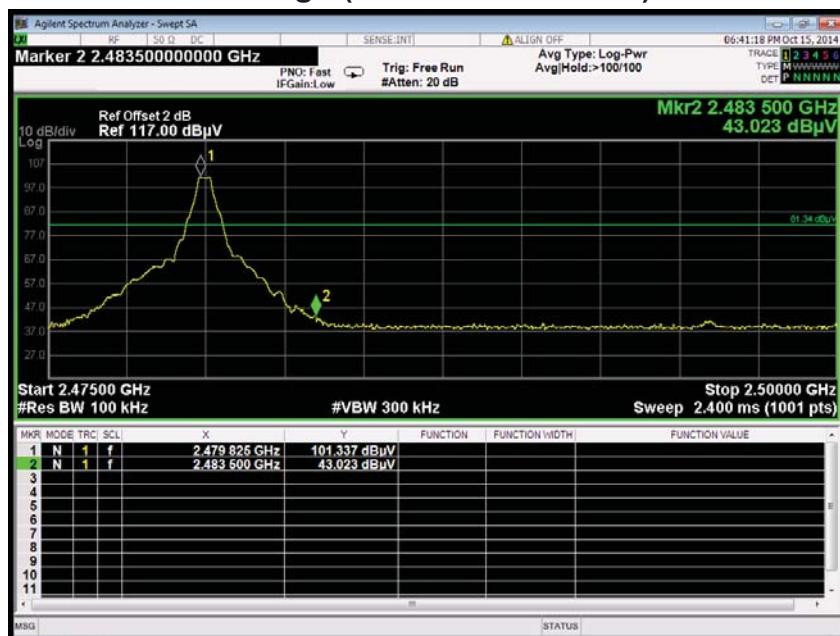




Test Plot (8DPSK)

CH Low (30MHz ~26.5GHz)

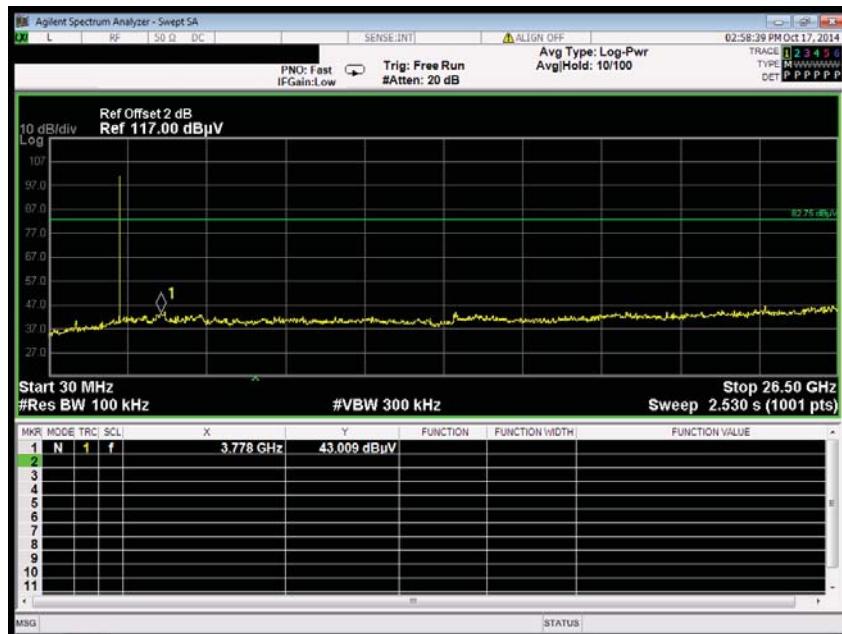


CH Low (2.31GHz ~2.41GHz)

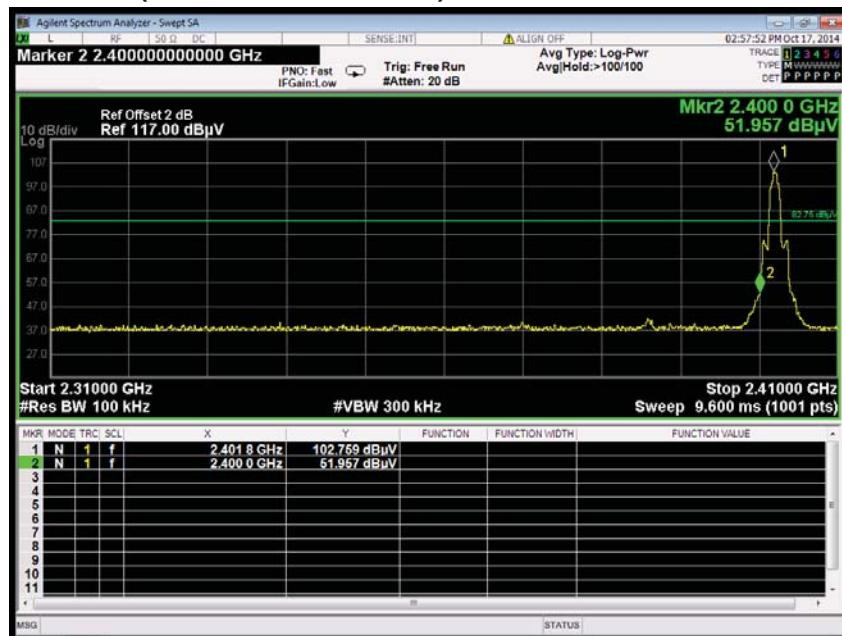




CH Mid (30MHz ~ 26.5GHz)

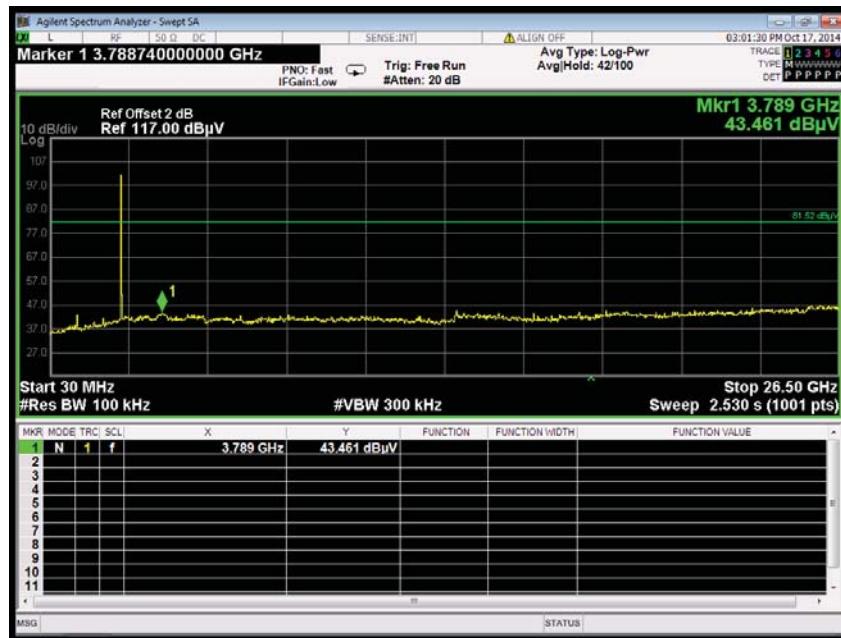




CH High (30MHz ~ 26.5GHz)

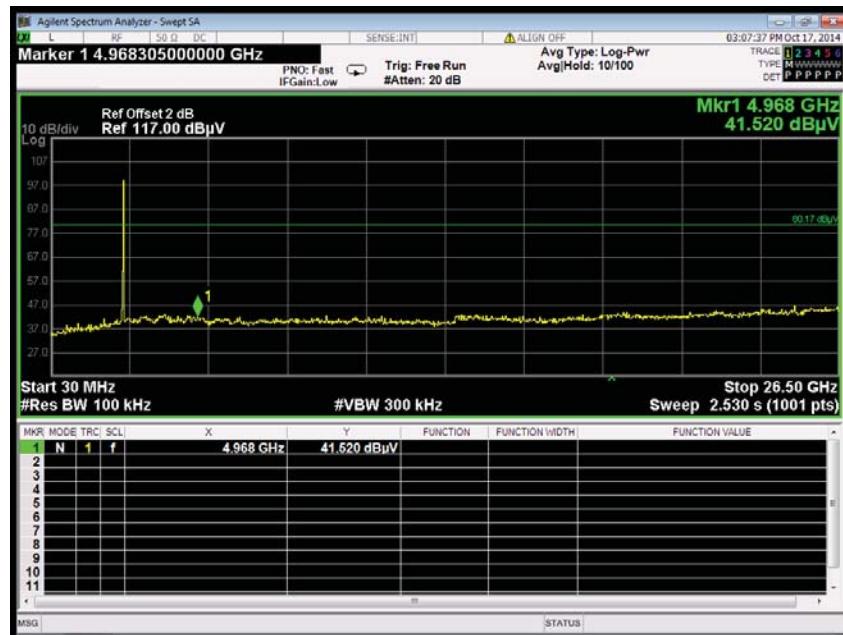

CH High (2.475GHz ~ 2.5GHz)

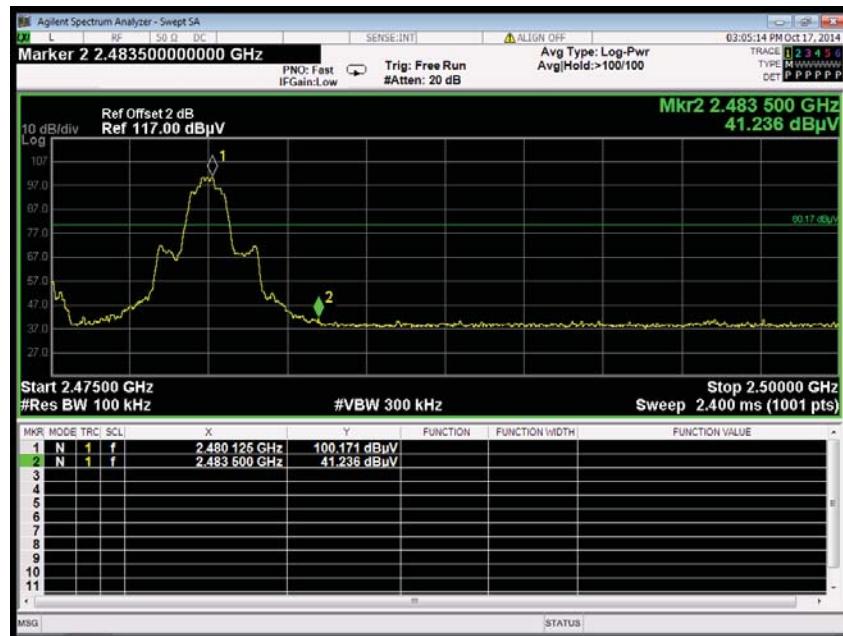



6.8.2. RADIATED EMISSIONS

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


**MEASUREMENT EQUIPMENT USED**

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2014	03/18/2015
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2014	03/18/2015
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2014	07/09/2015
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2014	03/01/2015
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2014	03/01/2015
Loop Antenna	A, R, A	PLA-1030/B	1029	09/27/2014	09/26/2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2014	02/28/2015
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			


Remark: Each piece of equipment is scheduled for calibration once a year.


TEST CONFIGURATION

Below 30MHz

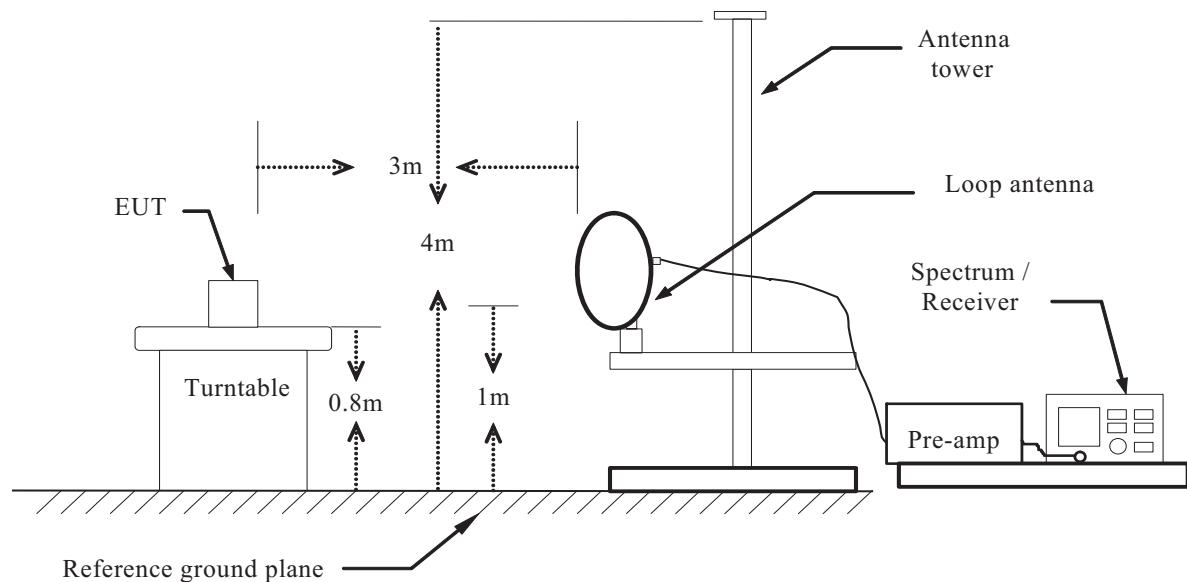

Below 1 GHz

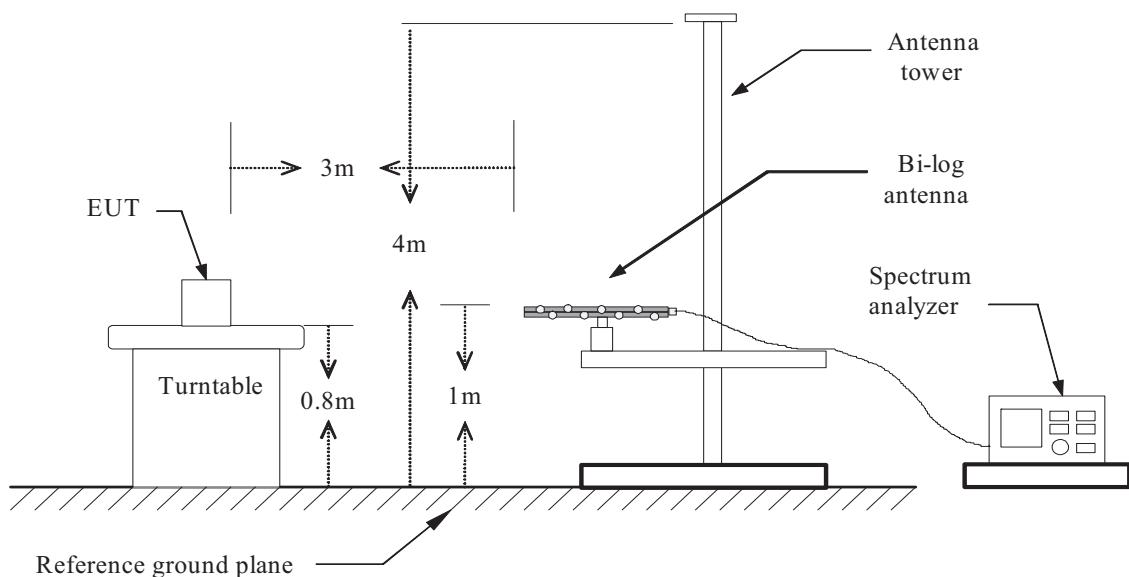

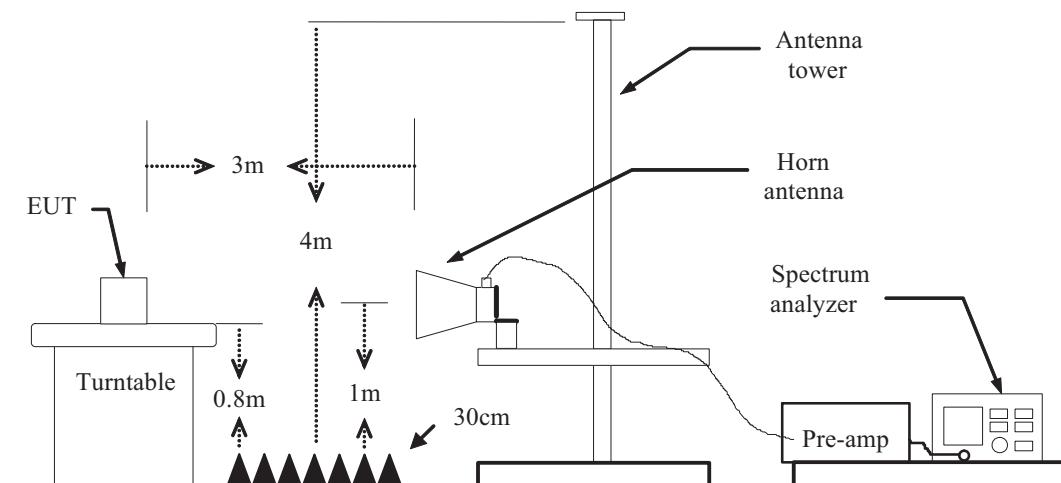Above 1 GHz**TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: TX

Test Date: October 24, 2014

Temperature: 24°C

Tested by: Viking Yuan

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
321.9700	41.78	-17.53	24.25	46.00	-21.75	V	QP
433.5200	38.09	-14.84	23.25	46.00	-22.75	V	QP
600.3600	40.35	-12.94	27.41	46.00	-18.59	V	QP
666.3200	48.61	-11.44	37.17	46.00	-8.83	V	QP
833.1600	43.68	-10.30	33.38	46.00	-12.62	V	QP
963.1400	37.68	-8.28	29.40	54.00	-24.60	V	QP
<hr/>							
199.7500	45.27	-18.72	26.55	43.50	-16.95	H	QP
362.7100	40.25	-16.76	23.49	46.00	-22.51	H	QP
597.4500	37.06	-12.88	24.18	46.00	-21.82	H	QP
666.3200	41.76	-11.44	30.32	46.00	-15.68	H	QP
830.2500	36.79	-10.39	26.40	46.00	-19.60	H	QP
966.0500	36.11	-8.34	27.77	54.00	-26.23	H	QP

****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

Notes:

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5. Frequency (MHz). = Emission frequency in MHz
Reading (dB μ V) = Receiver reading
Correction Factor(dB/m) = Antenna factor + Cable loss – Amplifier gain
Actual FS (dB μ V/m) = Reading (dB μ V) + Corr. Factor (dB/m)
Limit (dB μ V/m) = Limit stated in standard
Margin(dB) = Measured (dB μ V/m) – Limits (dB μ V/m)
Antenna Pole(V/H) = Current carrying line of reading

Above 1 GHzGFSK**Operation Mode:** TX(CH Low)**Test Date:** October 27, 2014**Temperature:** 24°C**Tested by:** Viking Yuan**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1995.625	49.09	-3.54	45.55	74.00	-28.45	V	peak
2548.000	41.01	0.23	41.24	74.00	-32.76	V	peak
3332.125	42.66	2.06	44.72	74.00	-29.28	V	peak
3545.875	42.61	3.06	45.67	74.00	-28.33	V	peak
3844.000	41.64	4.48	46.12	74.00	-27.88	V	peak
4803.625	39.90	10.05	49.95	74.00	-24.05	V	peak
1994.500	49.92	-3.54	46.38	74.00	-27.62	H	peak
2551.375	44.69	0.23	44.92	74.00	-29.08	H	peak
3545.875	44.09	3.06	47.15	74.00	-26.85	H	peak
3846.250	42.35	4.50	46.85	74.00	-27.15	H	peak
4250.125	42.12	6.02	48.14	74.00	-25.86	H	peak
5321.125	37.27	10.59	47.86	74.00	-26.14	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

5. Frequency (MHz) = Emission frequency in MHz
 Reading (dB μ V/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dB μ V/m) = Limit stated in standard
 Margin (dB) = Result (dB μ V/m)- Limit (dB μ V/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH Mid)**Test Date:** October 27, 2014**Temperature:** 24°C**Tested by:** Viking Yuan**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1994.500	49.45	-3.54	45.91	74.00	-28.09	V	peak
2570.500	42.16	0.25	42.41	74.00	-31.59	V	peak
3328.750	41.03	2.05	43.08	74.00	-30.92	V	peak
3545.875	40.18	3.06	43.24	74.00	-30.76	V	peak
4781.125	37.03	9.81	46.84	74.00	-27.16	V	peak
4881.250	36.32	10.88	47.20	74.00	-26.80	V	peak
<hr/>							
1994.500	48.08	-3.54	44.54	74.00	-29.46	H	peak
2533.375	42.28	0.22	42.50	74.00	-31.50	H	peak
2834.875	42.76	0.41	43.17	74.00	-30.83	H	peak
3615.625	42.23	3.39	45.62	74.00	-28.38	H	peak
4657.375	38.81	8.48	47.29	74.00	-26.71	H	peak
5710.375	37.16	10.92	48.08	74.00	-25.92	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dB μ V/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
Limit (dB μ V/m) = Limit stated in standard
Margin (dB) = Result (dB μ V/m) - Limit (dB μ V/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH High)**Test Date:** October 27, 2014**Temperature:** 24 °C**Tested by:** Viking Yuan**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1993.375	50.39	-3.54	46.85	74.00	-27.15	V	peak
2554.750	44.65	0.24	44.89	74.00	-29.11	V	peak
3329.875	44.05	2.05	46.10	74.00	-27.90	V	peak
3757.375	40.92	4.07	44.99	74.00	-29.01	V	peak
4666.375	38.57	8.58	47.15	74.00	-26.85	V	peak
5069.125	36.43	11.81	48.24	74.00	-25.76	V	peak
1994.500	45.80	-3.54	42.26	74.00	-31.74	H	peak
2537.875	43.54	0.22	43.76	74.00	-30.24	H	peak
2837.125	42.46	0.42	42.88	74.00	-31.12	H	peak
3868.750	39.48	4.60	44.08	74.00	-29.92	H	peak
4652.875	38.22	8.44	46.66	74.00	-27.34	H	peak
5096.125	35.00	11.68	46.68	74.00	-27.32	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dB μ V/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
Limit (dB μ V/m) = Limit stated in standard
Margin (dB) = Result (dB μ V/m) - Limit (dB μ V/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading

**8DPSK****Operation Mode:** TX(CH Low)**Test Date:** October 27, 2014**Temperature:** 24°C**Tested by:** Viking Yuan**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1997.875	49.22	-3.54	45.68	74.00	-28.32	V	peak
2546.875	42.42	0.23	42.65	74.00	-31.35	V	peak
3331.000	40.63	2.06	42.69	74.00	-31.31	V	peak
4136.500	39.30	5.66	44.96	74.00	-29.04	V	peak
4659.625	39.29	8.51	47.80	74.00	-26.20	V	peak
5043.250	35.28	11.94	47.22	74.00	-26.78	V	peak
1718.875	42.10	-4.17	37.93	74.00	-36.07	H	peak
1993.375	46.49	-3.54	42.95	74.00	-31.05	H	peak
2809.000	40.93	0.40	41.33	74.00	-32.67	H	peak
3748.375	40.42	4.03	44.45	74.00	-29.55	H	peak
3873.250	40.35	4.62	44.97	74.00	-29.03	H	peak
4785.625	35.84	9.86	45.70	74.00	-28.30	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dB μ V/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dB μ V/m) = Limit stated in standard
 Margin (dB) = Result (dB μ V/m) - Limit (dB μ V/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH Mid)**Test Date:** October 27, 2014**Temperature:** 24°C**Tested by:** Viking Yuan**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1992.250	46.06	-3.54	42.52	74.00	-31.48	V	peak
2542.375	41.07	0.23	41.30	74.00	-32.70	V	peak
3331.000	41.76	2.06	43.82	74.00	-30.18	V	peak
4108.375	38.10	5.57	43.67	74.00	-30.33	V	peak
4659.625	37.27	8.51	45.78	74.00	-28.22	V	peak
4982.500	34.14	11.96	46.10	74.00	-27.90	V	peak
1994.500	45.99	-3.54	42.45	74.00	-31.55	H	peak
2557.000	42.19	0.24	42.43	74.00	-31.57	H	peak
3545.875	38.78	3.06	41.84	74.00	-32.16	H	peak
4246.750	36.66	6.00	42.66	74.00	-31.34	H	peak
4818.250	35.51	10.21	45.72	74.00	-28.28	H	peak
5349.250	36.61	10.45	47.06	74.00	-26.94	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dB μ V/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
Limit (dB μ V/m) = Limit stated in standard
Margin (dB) = Result (dB μ V/m) - Limit (dB μ V/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH High)**Test Date:** October 27, 2014**Temperature:** 24 °C**Tested by:** Viking Yuan**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1992.250	46.42	-3.54	42.88	74.00	-31.12	V	peak
2571.625	43.17	0.25	43.42	74.00	-30.58	V	peak
2825.875	42.18	0.41	42.59	74.00	-31.41	V	peak
3331.000	43.81	2.06	45.87	74.00	-28.13	V	peak
4652.875	38.54	8.44	46.98	74.00	-27.02	V	peak
4999.375	37.22	12.14	49.36	74.00	-24.64	V	peak
1722.250	42.65	-4.14	38.51	74.00	-35.49	H	peak
1992.250	47.43	-3.54	43.89	74.00	-30.11	H	peak
2536.750	42.38	0.22	42.60	74.00	-31.40	H	peak
3221.875	40.61	1.55	42.16	74.00	-31.84	H	peak
3545.875	41.76	3.06	44.82	74.00	-29.18	H	peak
5027.500	35.35	12.02	47.37	74.00	-26.63	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dB μ V/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
Limit (dB μ V/m) = Limit stated in standard
Margin (dB) = Result (dB μ V/m) - Limit (dB μ V/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading



6.9 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	04/20/2014	04/19/2015
LISN	EMCO	3825/2	8901-1459	03/09/2014	03/08/2015
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2014	03/03/2015
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION

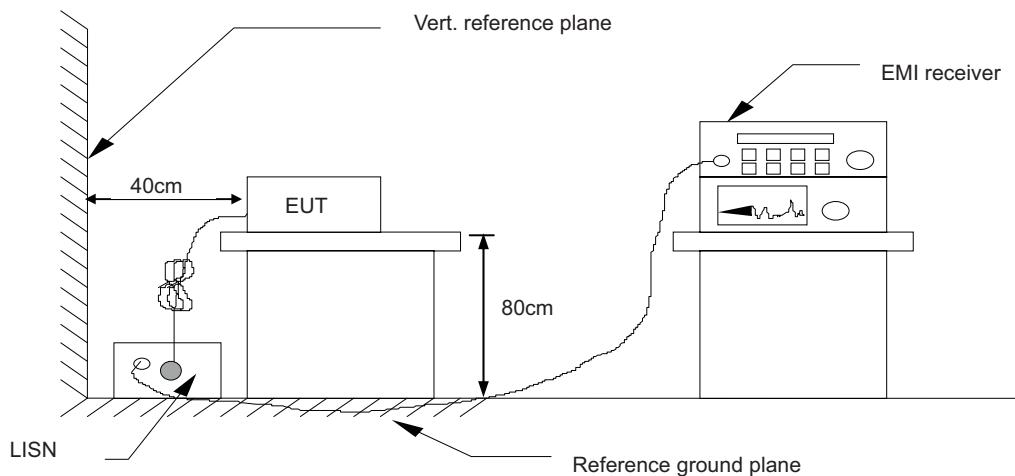

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Test Data****Operation Mode:** Mode 1**Test Date:**

October 20, 2014

Temperature: 26°C**Humidity:**

60% RH

Tested by: Viking Yuan

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Line (L1/L2)
0.1500	27.53	17.83	9.58	37.11	27.41	65.99	56.00	-28.88	-28.59	L1
0.1980	25.89	19.37	9.69	35.58	29.06	63.69	53.69	-28.11	-24.63	L1
0.2620	24.61	20.42	9.69	34.30	30.11	61.36	51.37	-27.06	-21.26	L1
4.0500	33.97	24.44	9.69	43.66	34.13	56.00	46.00	-12.34	-11.87	L1
14.7340	32.15	21.95	9.91	42.06	31.86	60.00	50.00	-17.94	-18.14	L1
0.7620	23.29	17.05	9.77	33.06	26.82	56.00	46.00	-22.94	-19.18	L1
0.1500	29.15	17.87	9.78	38.93	27.65	65.99	56.00	-27.06	-28.35	L2
0.7620	23.10	16.85	9.71	32.81	26.56	56.00	46.00	-23.19	-19.44	L2
2.1060	23.05	15.45	9.73	32.78	25.18	56.00	46.00	-23.22	-20.82	L2
4.2740	34.22	25.38	9.77	43.99	35.15	56.00	46.00	-12.01	-10.85	L2
6.4500	31.52	19.67	9.78	41.30	29.45	60.00	50.00	-18.70	-20.55	L2
14.8500	27.24	18.10	9.72	36.96	27.82	60.00	50.00	-23.04	-22.18	L2

Note:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Peak detector, Quasi-peak detector and average detector.
3. “--” denotes the emission level was or more than 2dB below the Average limit.
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1= Line One (Live Line)/ L2= Line Two (Neutral Line)