

FCC PART 15.247
EMI MEASUREMENT AND TEST REPORT
For

Fuzhou Smart Digital Science & Technology Co., Ltd.
No.8 Building, Hongshan Science & Technology Zone, Gulou District, Fuzhou, Fujian, China

FCC ID: Y5VMW0812

May 7, 2011

This Report Concerns: Original Report	Equipment Type: AOC TABLET
Test Engineer:	Jack Liu
Report No.:	BST11040231Y-1ER-3
Receive EUT Date/Test Date:	April 29, 2011/ May 4-7, 2011
Reviewed By:	Christina <i>Christina</i>
Prepared By:	 <p>Shenzhen BST Technology Co.,Ltd. 3F,Weames Technology Building, No. 10 Kefa Road,Science Park, Nanshan District,Shenzhen,Guangdong,China Tel: 0755-26747751 ~ 3 Fax: 0755-26747751 ~ 3 ext.826</p>

Note: The test report is specially limited to the above company and this particular sample only.
It may not be duplicated without prior written consent of Shenzhen BST Technology Co.,Ltd.
This report must not be used by the client to claim product certification,approval,or
endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1. Report information.....	4
1.2. Measurement Uncertainty	4
2. PRODUCT DESCRIPTION	5
2.1. EUT Description	5
2.2. Block Diagram of EUT Configuration.....	5
2.3. Support Equipment List	6
2.4. Test Conditions	6
3. FCC ID LABEL.....	7
4. TEST RESULTS SUMMARY	8
Modifications	8
5. TEST EQUIPMENT USED	9
6. SECTIONS 15.247 (I), 1.1307 (B) (1) - MAXIMUM PERMISSIBLE EXPOSURE (MPE)错误！未定义书签。	
6.1. Standard Applicable.....	错误！未定义书签。
6.2. Test Data	错误！未定义书签。
6.3. Test Result	错误！未定义书签。
7. SECTION 15.203 - ANTENNA REQUIREMENT	10
7.1. Standard Applicable.....	11
7.2. Antenna Connector Construction.....	11
8. SECTION 15.207 - CONDUCTED EMISSIONS.....	12
8.1. Applicable Standard.....	12
8.2. Test Procedure	12
8.3. Conducted Power line Emission Limits.....	12
8.4. Block Diagram of Test Setup.....	12
8.5. Test Result	13
9. SECTIONS 15.209, 15.205, 15.247(D) - RADIATED EMISSIONS	15
9.1. Test Equipment	15
9.2. Test Procedure	15
9.3. Radiated Test Setup	15
9.4. Radiated Emission Limit.....	15
9.5. Radiated Emission Test Result	16
10. SECTION 15.247(A) (1) – CHANNEL SEPARATION TEST	19
10.1. Test Equipment	19
10.2. Test Procedure	19
10.3. Applicable Standard.....	19
10.4. Test Result:	19
11. SECTION 15.247(A) (1) –20DB BANWIDTH TESTING.....	22
11.1. Test Equipment	22
11.2. Test Procedure	22
11.3. Applicable Standard.....	22
11.4. Test Result:	22

12.	SECTION 15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST	25
12.1.	Test Equipment	25
12.2.	Test Procedure	25
12.3.	Applicable Standard.....	25
12.4.	Test Result:	25
13.	SECTION 15.247(A) (1) (III)- TIME OF OCCUPANCY (DWELL TIME).....	28
13.1.	Test Equipment	28
13.2.	Test Procedure	28
13.3.	Applicable Standard.....	28
13.4.	Test Result:	28
14.	SECTION 15.247(B) (1) - MAXIMUM PEAK OUTPUT POWER	32
14.1.	Test Equipment	32
14.2.	Test Procedure	32
14.3.	Applicable Standard.....	32
14.4.	Test Result	32
15.	SECTION 15.247(D) –BAND EDGE.....	35
15.1.	Test Equipment	35
15.2.	Test Procedure	35
15.3.	Applicable Standard.....	35
15.4.	Test Result	36

1. GENERAL INFORMATION

1.1. Report information

1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BST approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BST in any way guarantees the later performance of the product/equipment.

1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BST therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BST, unless the applicant has authorized BST in writing to do so.

Test Facility -

The test site used to collect the radiated data is located on the address of
emitel (Shenzhen) Limited

(FCC Registered Test Site Number: 746887) on
Building 2, 171 Meihua Road, Futian District, Shenzhen, 518049 China
The Test Site is constructed and calibrated to meet the FCC requirements.

1.2. Measurement Uncertainty

Available upon request.

2. PRODUCT DESCRIPTION

2.1. EUT Description

Applicant : Fuzhou Smart Digital Science & Technology Co., Ltd.
Address : No.8 Building, Hongshan Science & Technology Zone, Gulou District, Fuzhou, Fujian, China
Manufacturer : Fuzhou Smart Digital Science & Technology Co., Ltd.
Address : No.8 Building, Hongshan Science & Technology Zone, Gulou District, Fuzhou, Fujian, China
EUT Description : AOC TABLET
Trade Name : AOC
Modulation : GFSK
Model Number : MW0812
Power Supply : DC 5V (Powered by Adapter) or DC 3.7V (Li-ion battery)
Antenna connected : Unique Antenna
Antenna gain : 0dBi(2.4GHz)

2.2. Block Diagram of EUT Configuration




Figure 1 EUT Setup

2.3. Support Equipment List

Table 2 Ancillary Equipment

Name	Model No	S/N	Manufacturer	Used “ ”
Adapter Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 5V, 2.5A	DSA-15P-05	--	DVE	

2.4. Test Conditions

Temperature: 23~25

Relative Humidity: 50~63 %

3. FCC ID LABEL

FCC ID: Y5VMW0812

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and**
- 2. This device must accept any interference received, including interference that may cause undesired operation.**

Label Location on EUT

EUT Bottom View/ FCC ID Label Location



4. TEST RESULTS SUMMARY

FCC 15 Subpart C,Paragraph 15.247

FCC Rules	Description of Test	Result
§15.247 (i) , §1.1307 (b) (1), §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliant
§15.247 (a)(1)	20 dB Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band Edges	Compliant

Modifications

No modification was made.

5. TEST EQUIPMENT USED

Equipment/Facilities	Manufacturer	Model #	Serial no.	Date of Cal.	Cal. Interval
Cable	Resenberger	N/A	NO.1	Mar 10 , 2011	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Mar 10 , 2011	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Mar 10 , 2011	1 Year
LISN	Rohde & Schwarz	ESH3-Z5	100305	Mar 10 , 2011	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Mar 10 , 2011	1 Year
EMI Test Receiver	Rohde & Schwarz	ESP13	100180	Oct.11,2010	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSP40	100273	Sep.10,2010	1 Year
3m Semi-Anechoic Chamber	Albatross Projects	9mx6mx6m	N/A	Feb.20,2011	1 Year
Signal Generator	FLUKE	PM5418 + Y/C	LO747012	Feb.20,2011	1 Year
Signal Generator	FLUKE	PM5418TX	LO738007	Feb.20,2011	1 Year
Loop Antenna	SCHWARZBECK	FMZB1516	113	Jan.30,2011	1 Year
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	9161-4079	Sep.22,2010	1 Year
Broad-Band Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-564	Sep.22,2010	1 Year
Ultra Broadband Antenna	Rohde & Schwarz	HL-562	100110	June.15,2010	1 Year
AMN	Rohde & Schwarz	ESH3-Z5	100196	Oct.11,2010	1 Year
AMN	Rohde & Schwarz	ESH3-Z5	100197	Oct.11,2010	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	N/A	N/A	N/A
Power Meter	Rohde & Schwarz	NRVD	100041	Feb.20,2011	1 Year
EMI Test Receiver	Rohde & Schwarz	ESCS30	100003	Feb.20,2011	1 Year
Coaxial Cable with N-connectors	SCHWARZBECK	AK9515H	95549	Sep.22,2010	1 Year
Radio Communication Test Set	Rohde & Schwarz	CMS 54	846621/024	Feb.20,2011	1 Year
Modulation Analyzer	Hewlett-Packard	8901B	2303A00362	Feb.20,2011	1 Year
Absorbing clamp	Rohde & Schwarz	MDS-21	N/A	Oct.11,2010	1 Year

6. §15.247 (I) AND §1.1307 (B) (1), §2.1093 – RF EXPOSURE

6.1. Standard Applicable

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

According to FCC Exclusion list, In the following table, f_{GHz} is mid-band frequency in GHz, and d is the distance to a person's body, excluding hands, wrists, feet, and ankles.

Exposure category	<u>low threshold</u>	<u>high threshold</u>
general population	$(60/f_{\text{GHz}})$ mW, $d < 2.5$ cm $(120/f_{\text{GHz}})$ mW, $d \geq 2.5$ cm	$(900/f_{\text{GHz}})$ mW, $d < 20$ cm
occupational	$(375/f_{\text{GHz}})$ mW, $d < 2.5$ cm $(900/f_{\text{GHz}})$ mW, $d \geq 2.5$ cm	$(2250/f_{\text{GHz}})$ mW, $d < 20$ cm

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

6.2. Test Result

Measurement Result:

The Max peak output power is $0.499\text{mW} < 24.9\text{mW}$.

The SAR measurement is not required.

7. SECTION 15.203 - ANTENNA REQUIREMENT

7.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.2. Antenna Connector Construction

The antenna used in this product is a unique antenna. The antenna is permanently attached. Refer to the product photo.

8. SECTION 15.207 - CONDUCTED EMISSIONS

8.1. Applicable Standard

The specification used was with the FCC Part 15.207 limits.


8.2. Test Procedure

During the conducted emission test, the EUT was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

8.3. Conducted Power line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency Range (MHZ)	Class A QP/AV	Class B QP/AV
0.15-0.5	79/66	65-56/56-46
0.5-5.0	73/60	56-46
5.0-3.0	73/60	60-50


8.4. Block Diagram of Test Setup

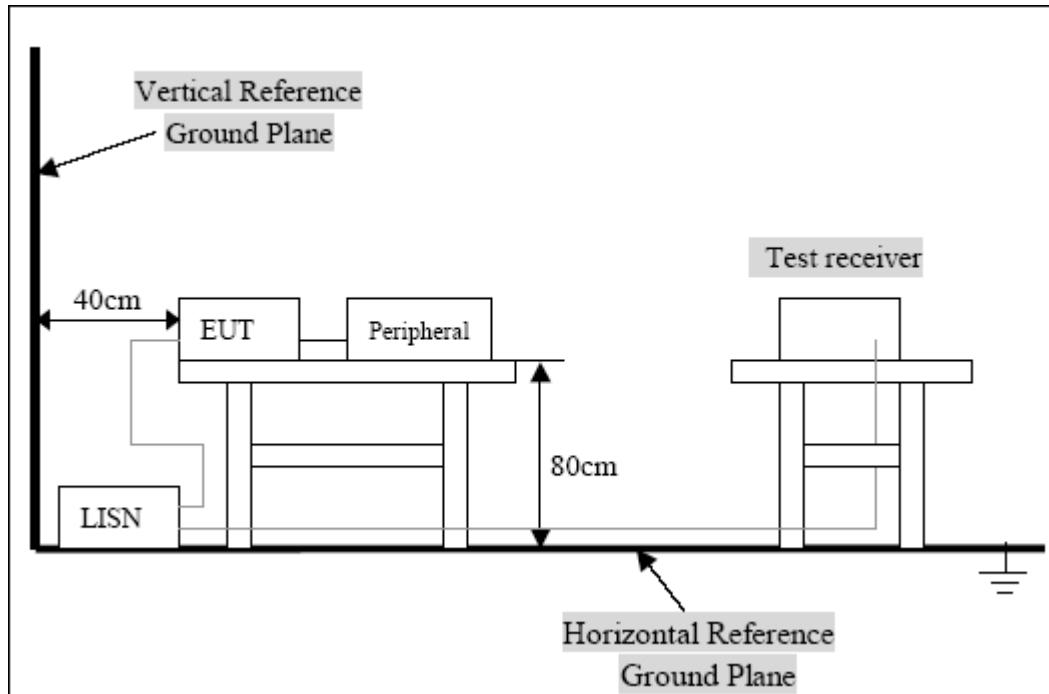

8.5. Test Result

Pass

The worst test mode: Bluetooth TX 2441MHz

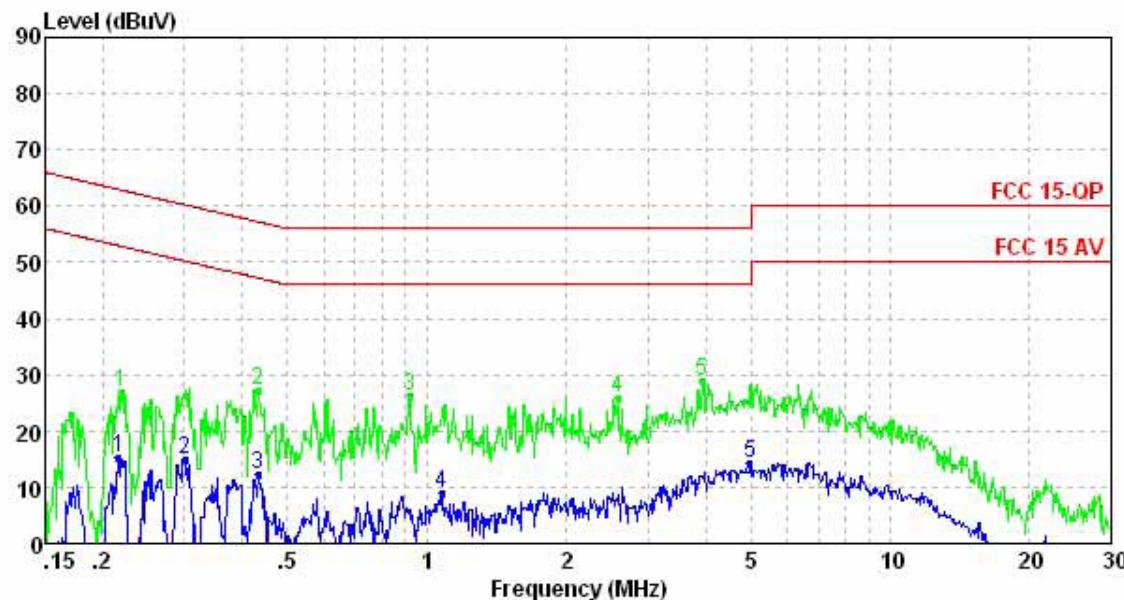

Condition:


: RBW:9.000KHz VBW:30.000KHz

Freq	Level	Limit		Remark	Pol/Phase
		Line	Over		
MHz	dBuV	dBuV	dB		
1	0.22	15.18	52.96	-37.78 Average	LINE
2	0.30	15.04	50.24	-35.20 Average	LINE
3	0.43	12.27	47.20	-34.93 Average	LINE
4	1.08	9.12	46.00	-36.88 Average	LINE
5 Max	4.98	14.24	46.00	-31.76 Average	LINE

Condition:

: RBW:9.000KHz VBW:30.000KHz

Freq	Level	Limit		Remark	Pol/Phase
		Line	Over		
MHz	dBuV	dBuV	dB		
1	0.22	26.88	62.83	-35.95 Peak	LINE
2	0.43	27.34	57.20	-29.86 Peak	LINE
3	0.92	26.33	56.00	-29.67 Peak	LINE
4	2.58	25.92	56.00	-30.08 Peak	LINE
5 Max	3.92	28.94	56.00	-27.06 Peak	LINE

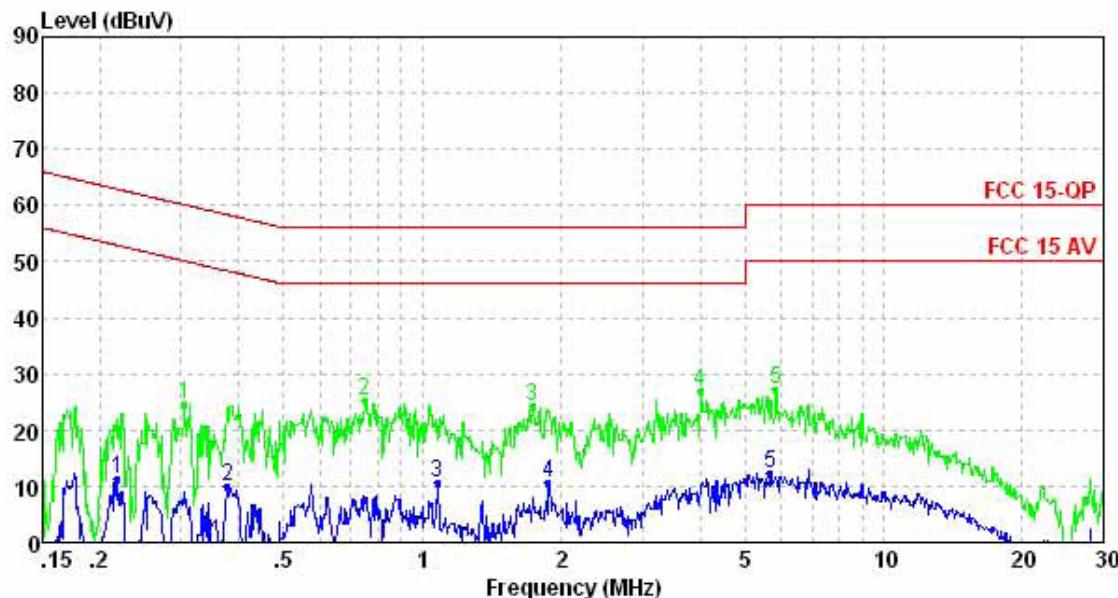

Condition:

: RBW:9.000KHz VBW:30.000KHz

Freq	Level	Limit		Remark	Pol/Phase
		Line	Over		
MHz	dBuV	dBuV	dB		
1	0.22	11.19	52.88	-41.69 Average	NEUTRAL
2	0.38	9.90	48.34	-38.44 Average	NEUTRAL
3	1.08	10.78	46.00	-35.22 Average	NEUTRAL
4 Max	1.88	10.75	46.00	-35.25 Average	NEUTRAL
5	5.68	12.39	50.00	-37.61 Average	NEUTRAL

Condition:

: RBW:9.000KHz VBW:30.000KHz

Freq	Level	Limit		Remark	Pol/Phase
		Line	Over		
MHz	dBuV	dBuV	dB		
1	0.31	24.54	60.10	-35.56 Peak	NEUTRAL
2	0.75	25.14	56.00	-30.86 Peak	NEUTRAL
3	1.73	24.34	56.00	-31.66 Peak	NEUTRAL
4 Max	4.01	26.81	56.00	-29.19 Peak	NEUTRAL
5	5.84	27.36	60.00	-32.64 Peak	NEUTRAL

9. SECTIONS 15.209, 15.205, 15.247(D) - RADIATED EMISSIONS


9.1. Test Equipment

Please refer to section 2 this report.

9.2. Test Procedure

The out of band emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part Subpart C limits. The EUT was tested in 3 orthogonal planes.

9.3. Radiated Test Setup

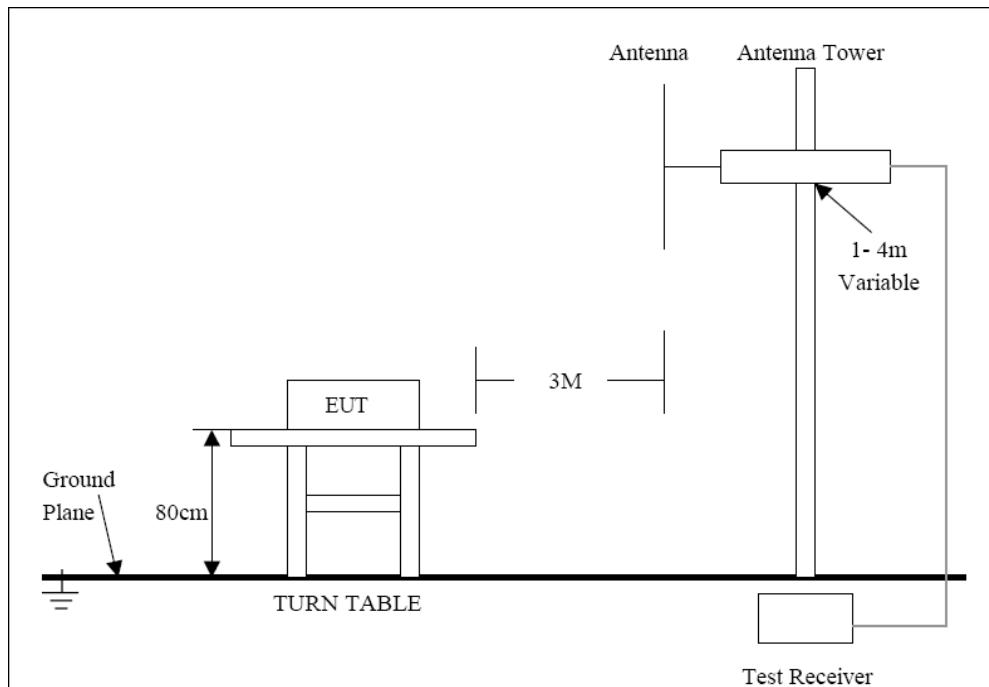

For the accrual test configuration, please refer to the related items-photos of Testing.

9.4. Radiated Emission Limit

Frequency (MHz)	Distance (m)	Field Strength (dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
ABOVE 960	3	54.0

9.5. Radiated Emission Test Result

Pass

Date of Test: May 4, 2011
 EUT: AOC TABLET
 Model No.: MW0812
 Test Mode: Bluetooth TX 2402MHz

Temperature: 25°C
 Humidity: 52%
 Power Supply: AC 120V/60Hz
 Test Engineer: Jack Liu

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dB μ V/m)	Factor Corr. (dB)	Result	Limit	Margin	Polarization
			QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2400.00	38.22	43.98	-7.46	30.76	36.52	54	74	-23.24	-37.48	Vertical
2402.012	103.3	109.09	-7.45	95.85	101.64	-	-	-	-	Vertical
*4804.020	49.16	54.92	-0.30	48.86	54.62	54	74	-5.14	-19.38	Vertical
2400.00	37.47	43.20	-7.46	30.00	35.74	54	74	-23.99	-38.26	Horizontal
2402.012	102.33	108.13	-7.45	94.88	100.68	-	-	-	-	Horizontal
*4804.020	48.69	54.48	-0.30	48.39	54.18	54	74	-45.61	-19.82	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

Date of Test: May 4, 2011
 EUT: AOC TABLET
 Model No.: MW0812
 Test Mode: Bluetooth TX 2441MHz

Temperature: 25°C
 Humidity: 52%
 Power Supply: AC 120V/60Hz
 Test Engineer: Jack Liu

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dB μ V/m)	Factor Corr. (dB)	Result	Limit	Margin	Polarization
			(dB μ V/m)	(dB μ V/m)	(dB)	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2441.010	103.01	108.801	-7.35	95.66	101.45	-	-	-	-	Vertical
*4882.018	47.96	53.74	0.14	48.10	53.88	54	74	-5.90	-20.12	Vertical
2441.010	101.65	107.43	-7.35	94.30	100.08	-	-	-	-	Horizontal
*4882.018	47.20	52.97	0.14	47.34	53.11	54	74	-6.66	-20.89	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

Date of Test: April 23, 2011
 EUT: Bluetooth keyboard
 Model No.: CR001
 Test Mode: Bluetooth TX 2480MHz

Temperature: 25°C
 Humidity: 52%
 Power Supply: DC 3.7V
 Test Engineer: Jack Liu

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dB μ V/m)	Factor Corr. (dB)	Result	Limit	Margin	Polarization
			(dB μ V/m)	(dB μ V/m)	(dB)	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2480.010	103.15	108.94	-7.37	95.78	101.57	-	-	-	-	Vertical
2483.500	37.86	43.65	-7.37	30.49	36.28	54	74	-23.51	-37.72	Vertical
*4960.020	47.28	53.09	0.52	47.80	53.61	54	74	-6.20	-20.39	Vertical
2480.010	102.27	108.08	-7.37	94.90	100.71	-	-	-	-	Horizontal
2483.500	37.74	43.50	-7.37	30.37	36.13	54	74	-23.63	-37.87	Horizontal
*4960.020	46.34	52.12	0.52	46.86	52.64	54	74	-7.14	-21.36	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

10. SECTION 15.247(A) (1) – CHANNEL SEPARATION TEST

10.1. Test Equipment

Please refer to section 2 this report.

10.2. Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

10.3. Applicable Standard



Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.


10.4. Test Result:

Pass.

Channel	Channel Frequency (MHz)	Channel separation (MHz)	Limit
Low	2402	1.002	> the 20dB Bandwidth or 25kHz (whichever is greater)
Middle	2441	1.002	> the 20dB Bandwidth or 25kHz (whichever is greater)
High	2480	1.002	> the 20dB Bandwidth or 25kHz (whichever is greater)

The spectrum analyzer plots are attached as below.

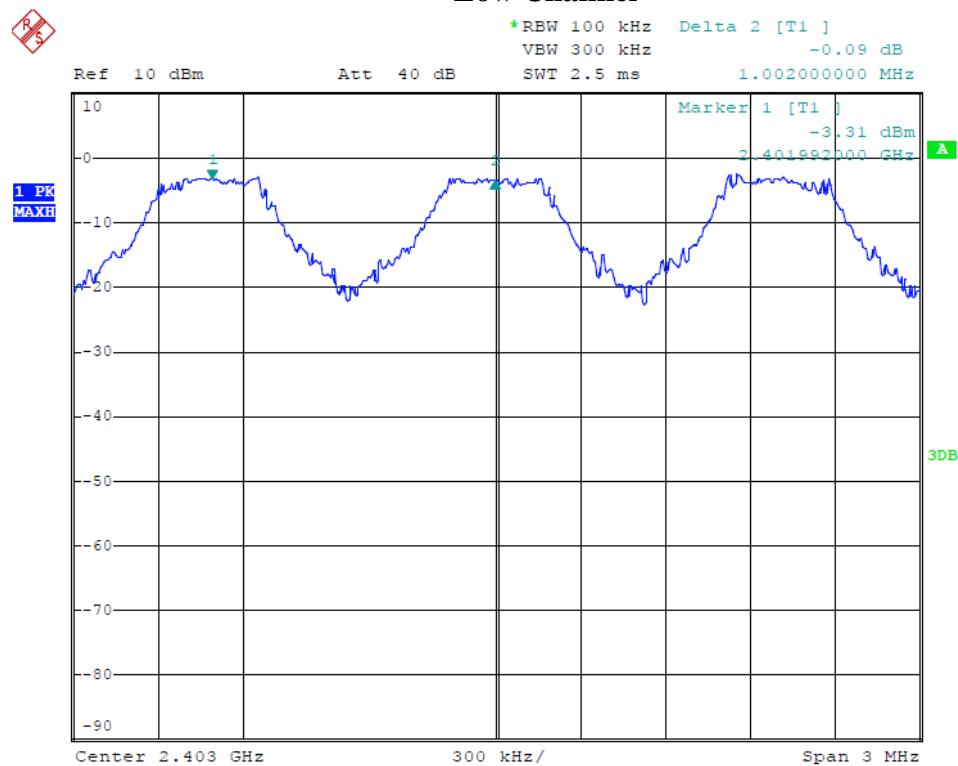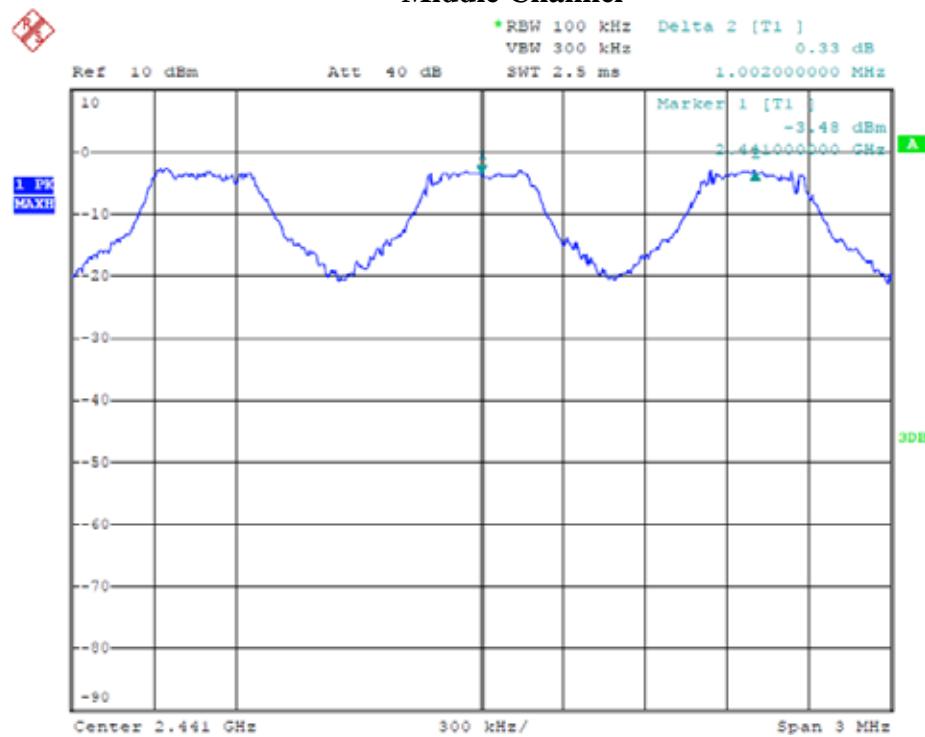Low Channel**Middle Channel**

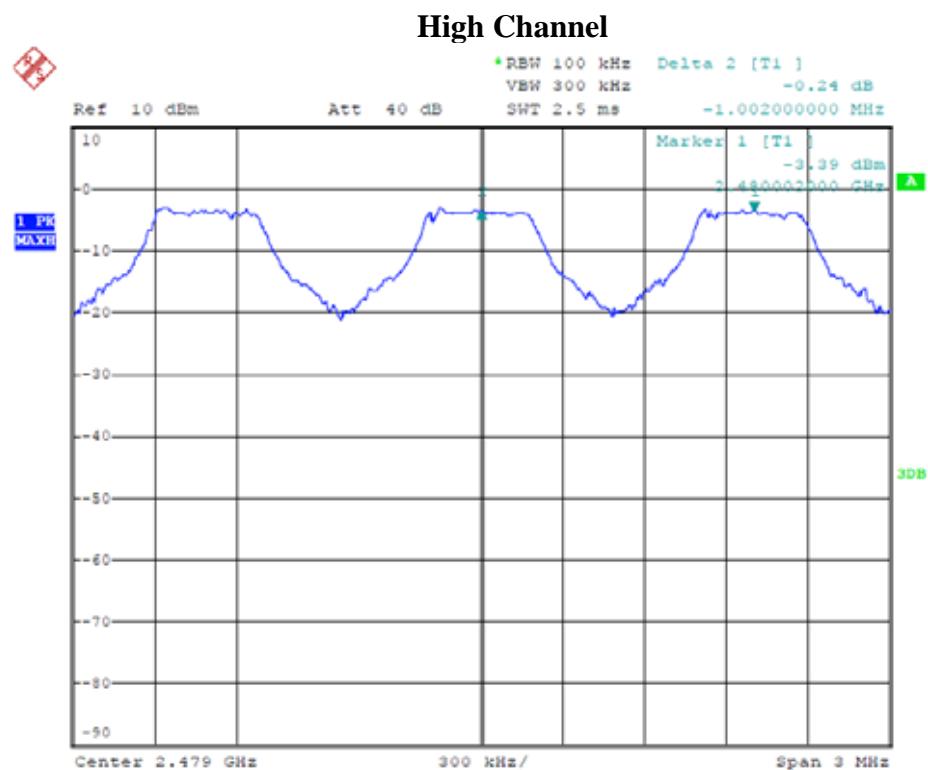

11. SECTION 15.247(A) (1) –20DB BANDWIDTH TESTING

11.1. Test Equipment

Please refer to Section 2 this report.

11.2. Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

11.3. Applicable Standard



Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.


11.4. Test Result:

Pass.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
Low	2402	0.978	---
Middle	2441	0.960	---
High	2480	0.972	---

The spectrum analyzer plots are attached as below.

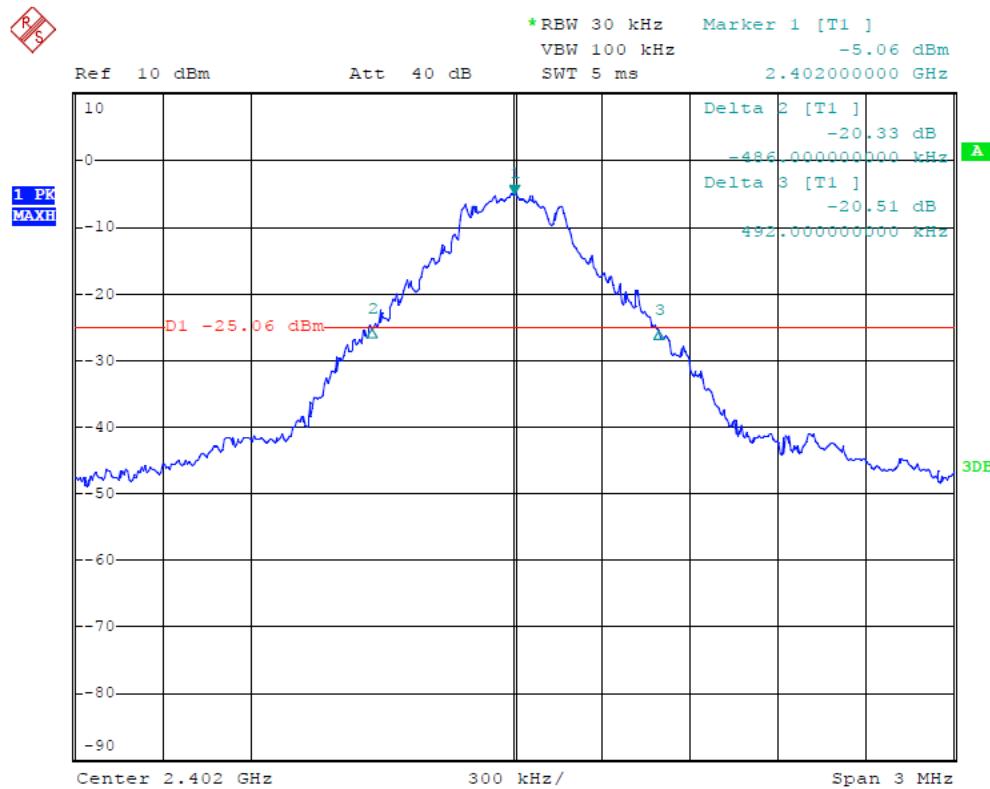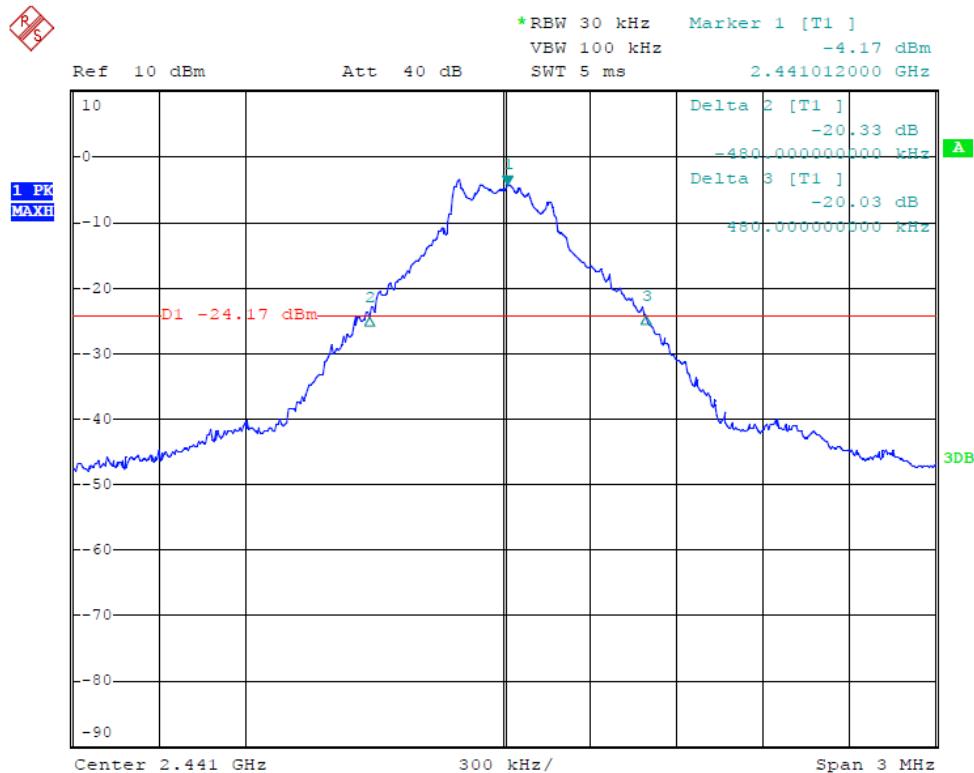Low Channel**Middle Channel**

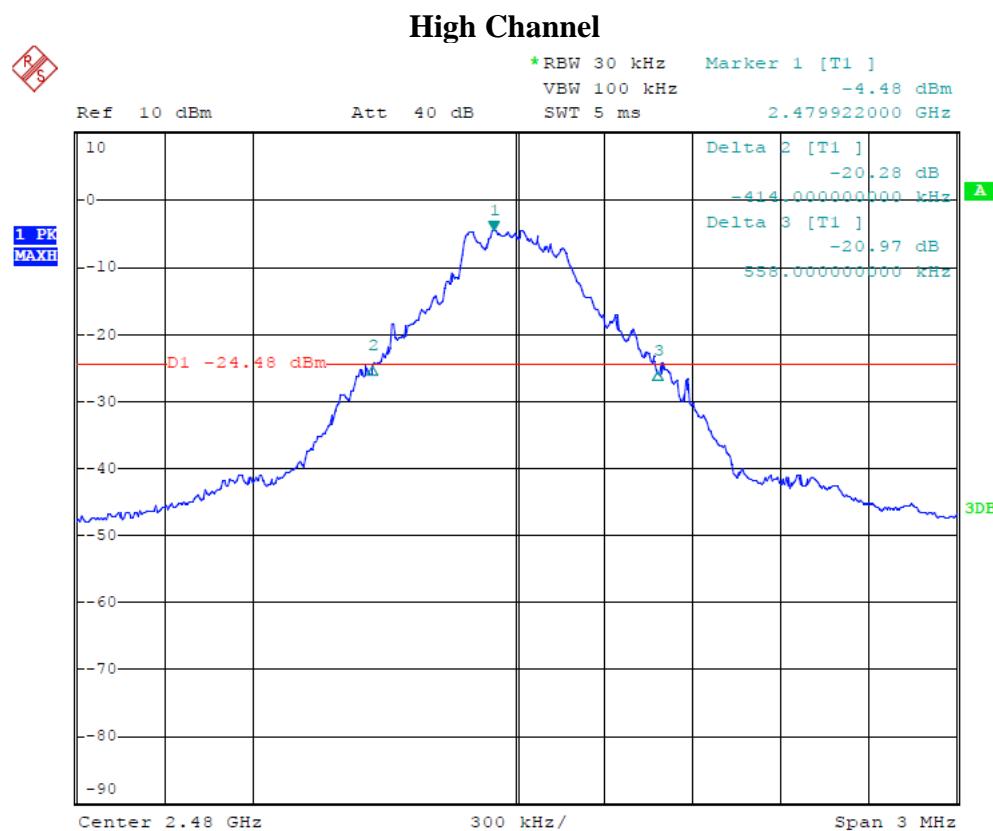

12. SECTION 15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST

12.1. Test Equipment

Please refer to Section 2 this report.

12.2. Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

12.3. Applicable Standard



Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


12.4. Test Result:

Pass.

Total number of hopping channel	Measurement result (CH)	Limit (CH)
	79	>15

The spectrum analyzer plots are attached as below.

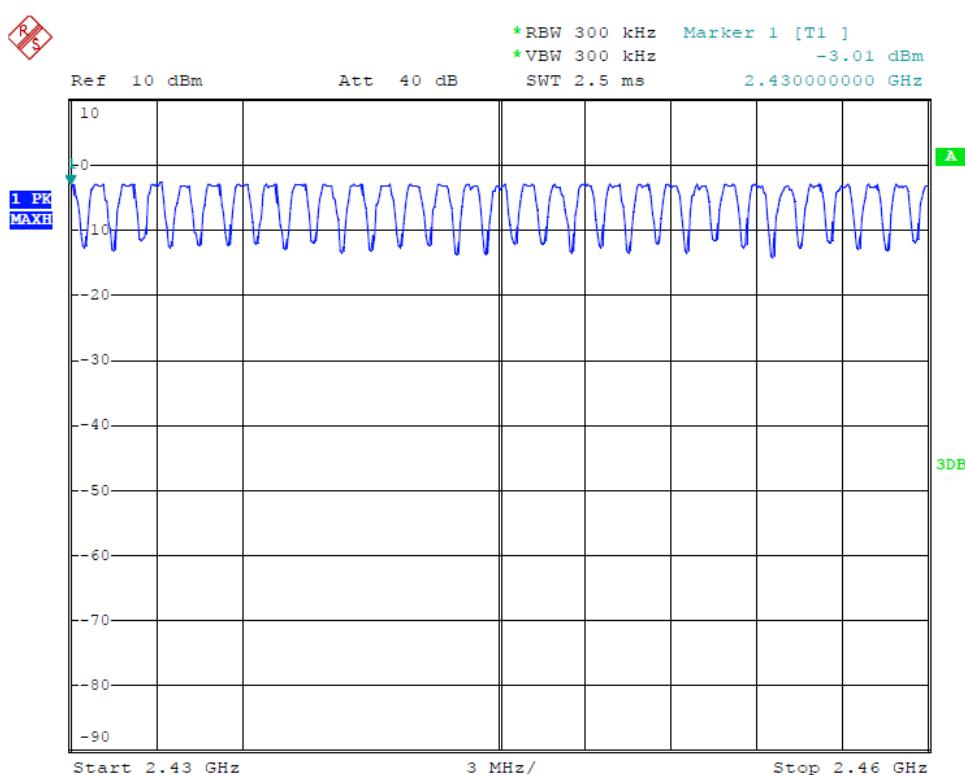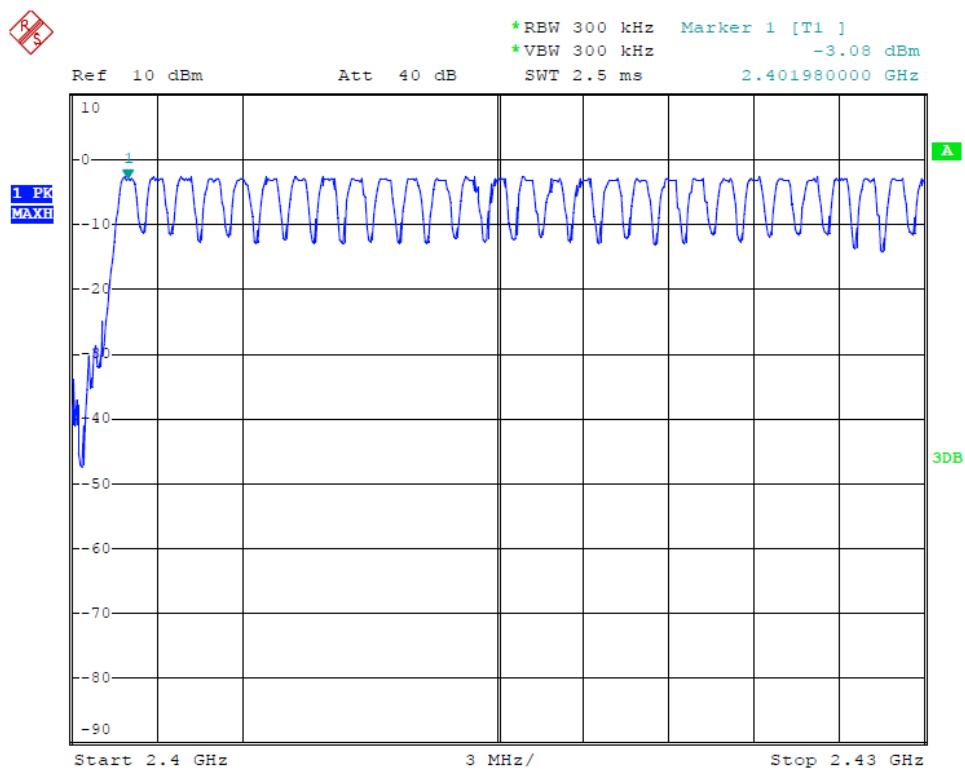

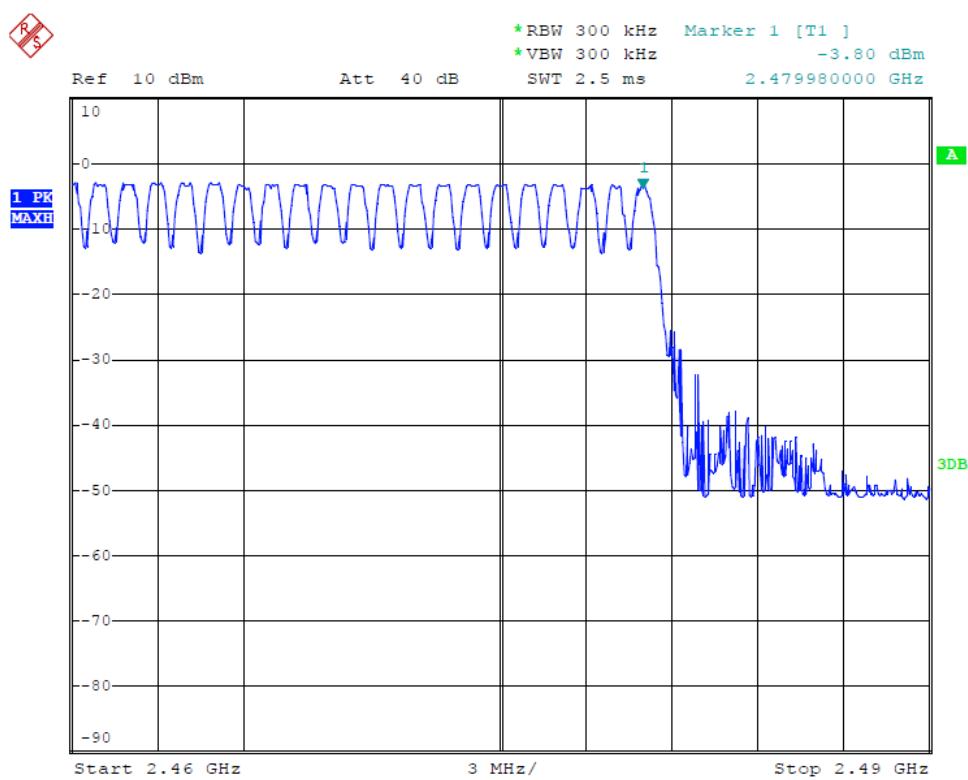

13. SECTION 15.247(A) (1) (III)- TIME OF OCCUPANCY (DWELL TIME)

13.1. Test Equipment

Please refer to Section 2 this report.

13.2. Test Procedure

1. The transmitter output was connected to the spectrum analyzer through a low loss cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=100kHz, VBW=300kHz, Span=0Hz, Adjust Sweep=1s. Get the burst (in 1 sec.).
4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span=0Hz, Adjust Sweep=2ms. Get the pulse time.
5. Repeat above procedures until all frequency measured were complete.

13.3. Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.4. Test Result:



Pass.



A period transmit time = $0.4 \times 79 = 31.6$



Dwell time = pulse time \times burst (in 1 sec.) \times 31.6

Channel	Channel Frequency (MHz)	Pulse Time (ms)	Burst (in 1 sec.)	Dwell Time (ms)	Limit (ms)
Low	2402	0.384	10	121.3	400
Middle	2441	0.384	10	121.3	400
High	2480	0.384	10	121.3	400

The spectrum analyzer plots are attached as below.

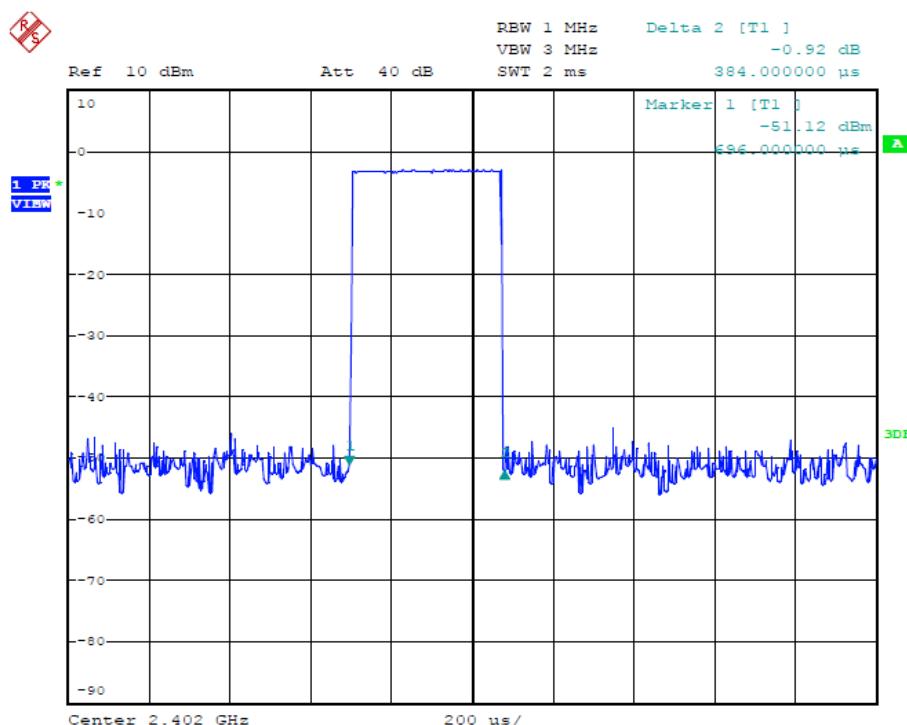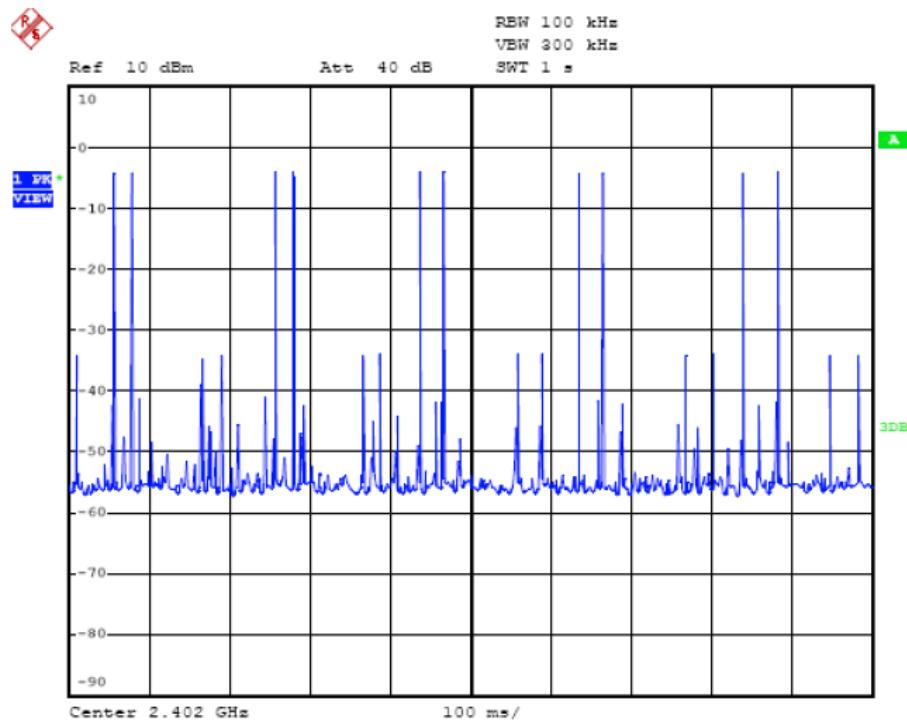Low Channel

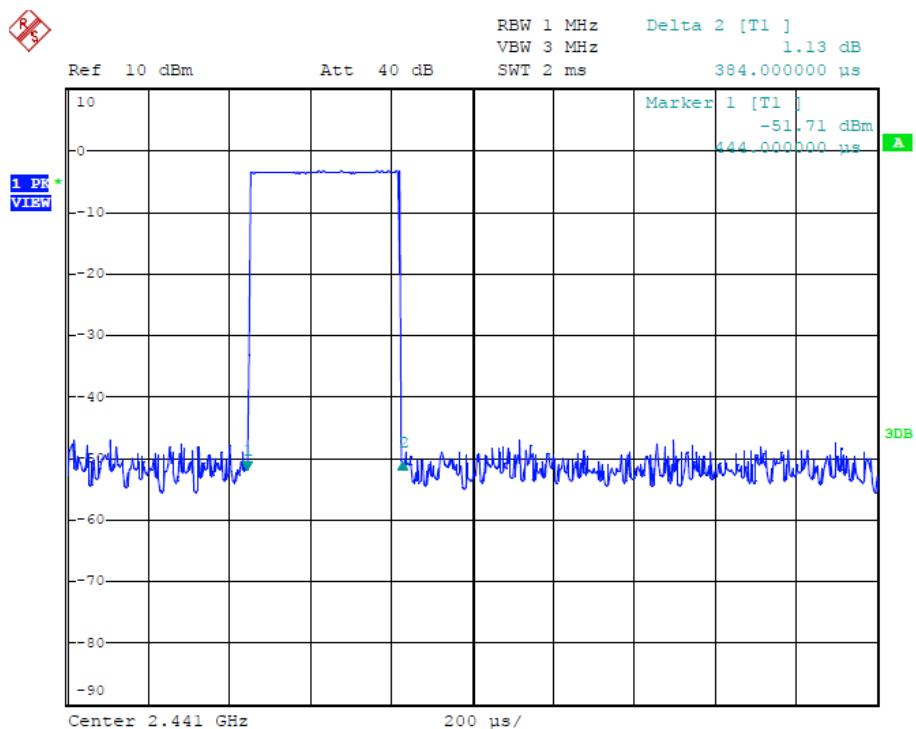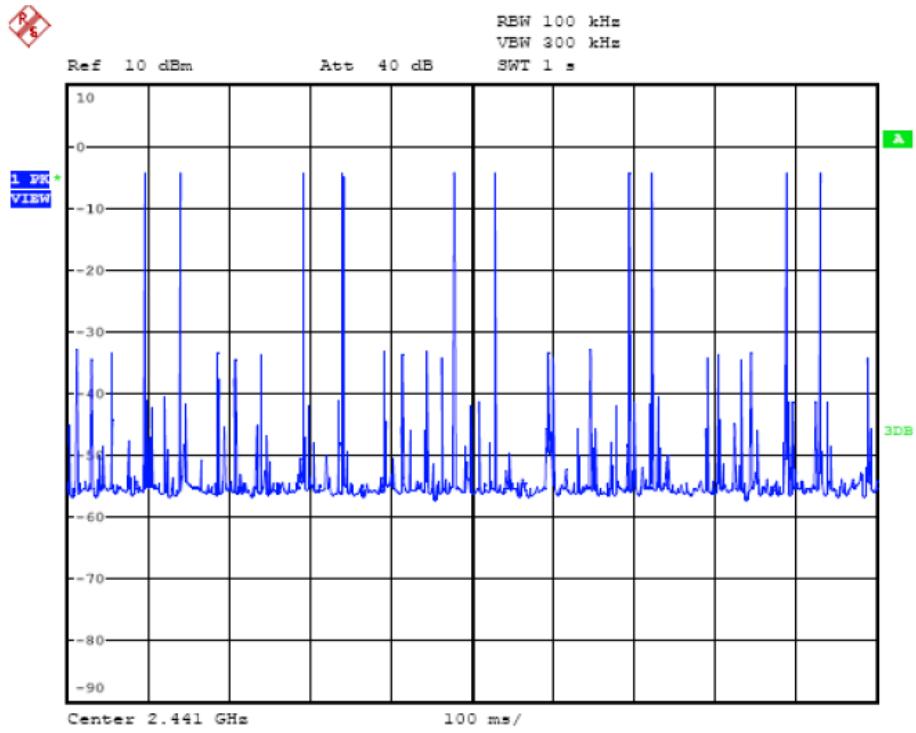Middle Channel

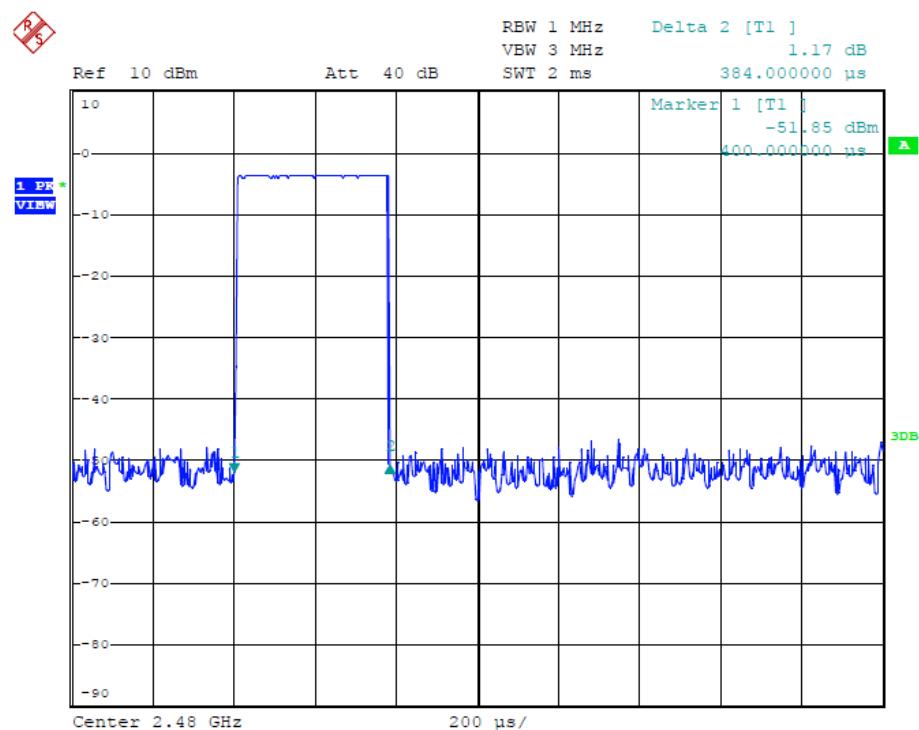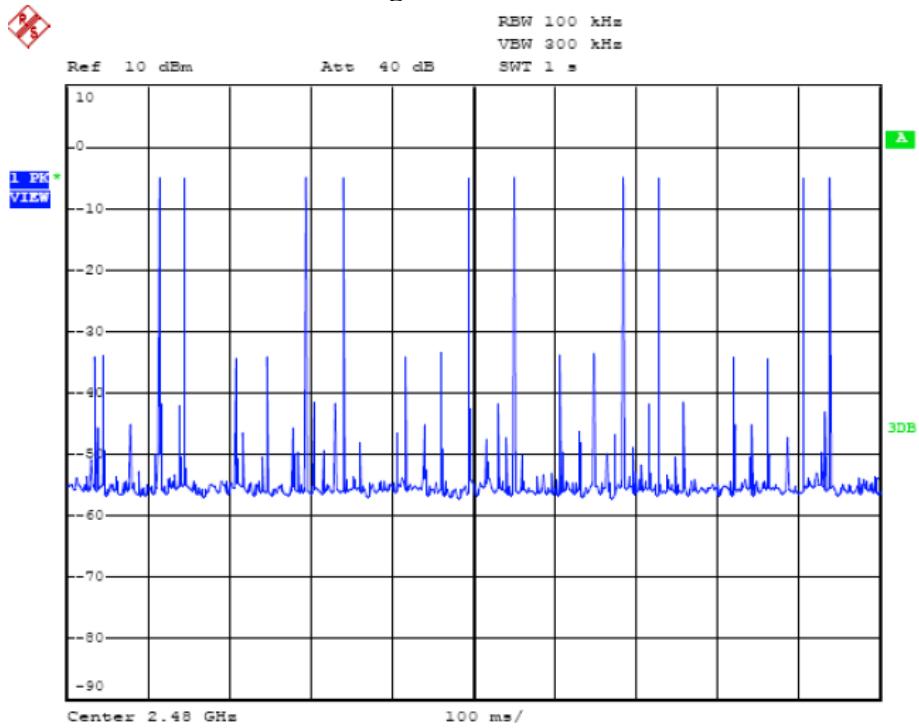High Channel

14. SECTION 15.247(B) (1) - Maximum Peak Output Power

14.1. Test Equipment

Please refer to Section 2 this report.

14.2. Test Procedure

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz.
3. Set VBW = 3 MHz.
4. Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode.
5. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”.
6. Trace average 100 traces in power averaging mode.
7. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

14.3. Applicable Standard



Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


14.4. Test Result

Pass

Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2402	-3.02	0.499	30 dBm / 1 W
Middle	2441	-3.21	0.478	30 dBm / 1 W
High	2480	-3.47	0.450	30 dBm / 1 W

The spectrum analyzer plots are attached as below.

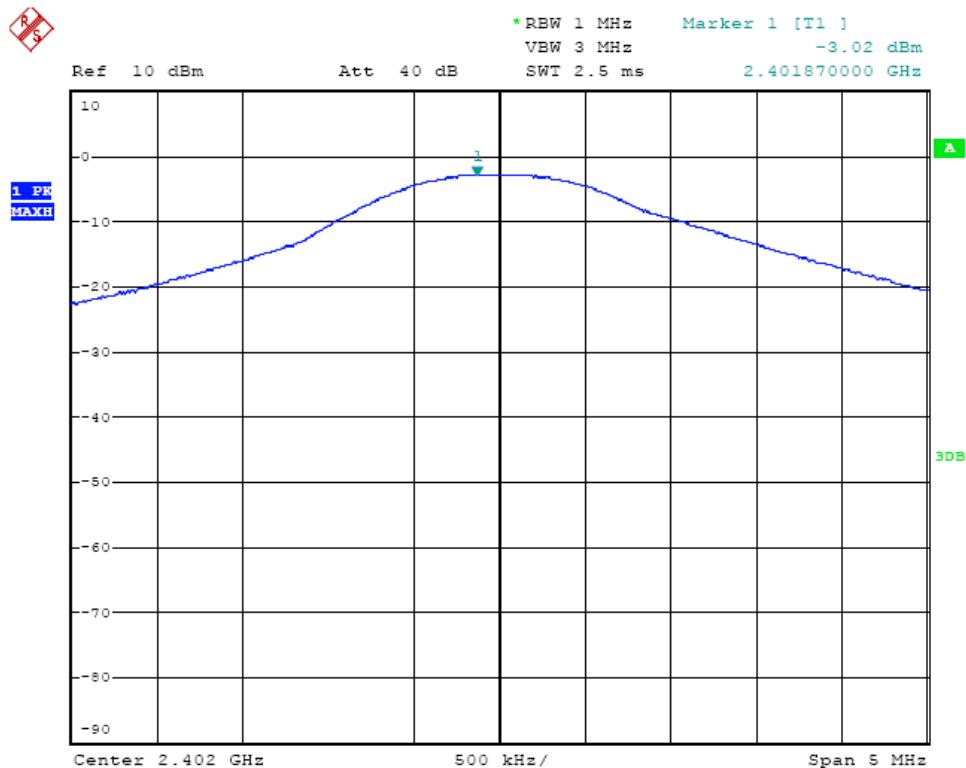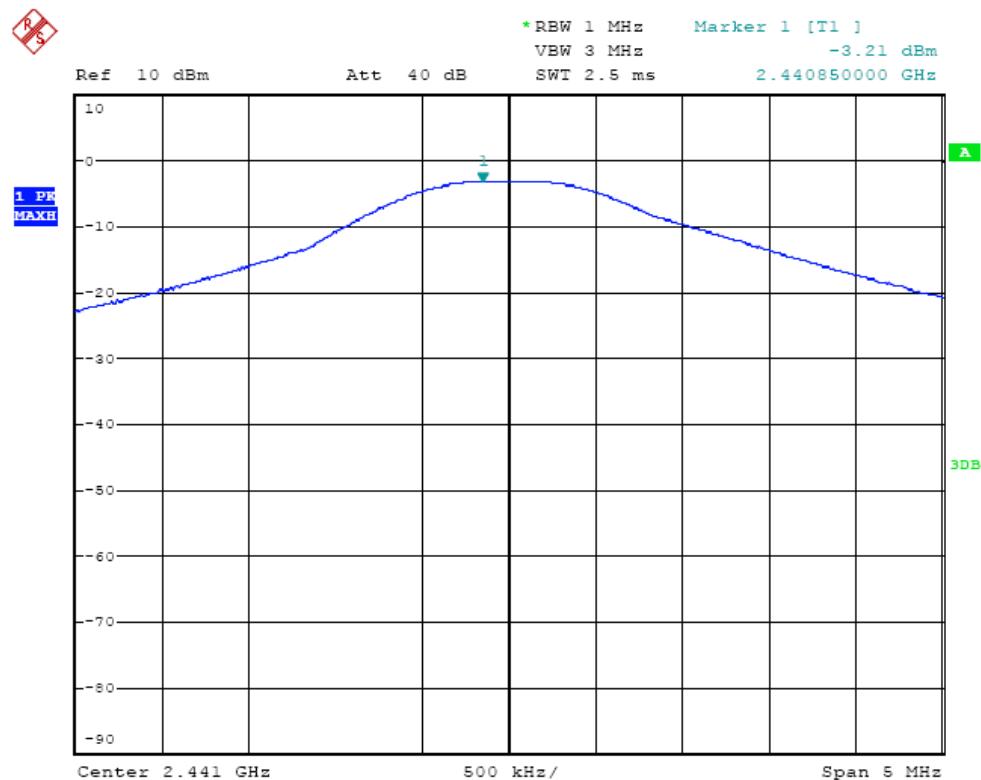Low Channel**Middle Channel**

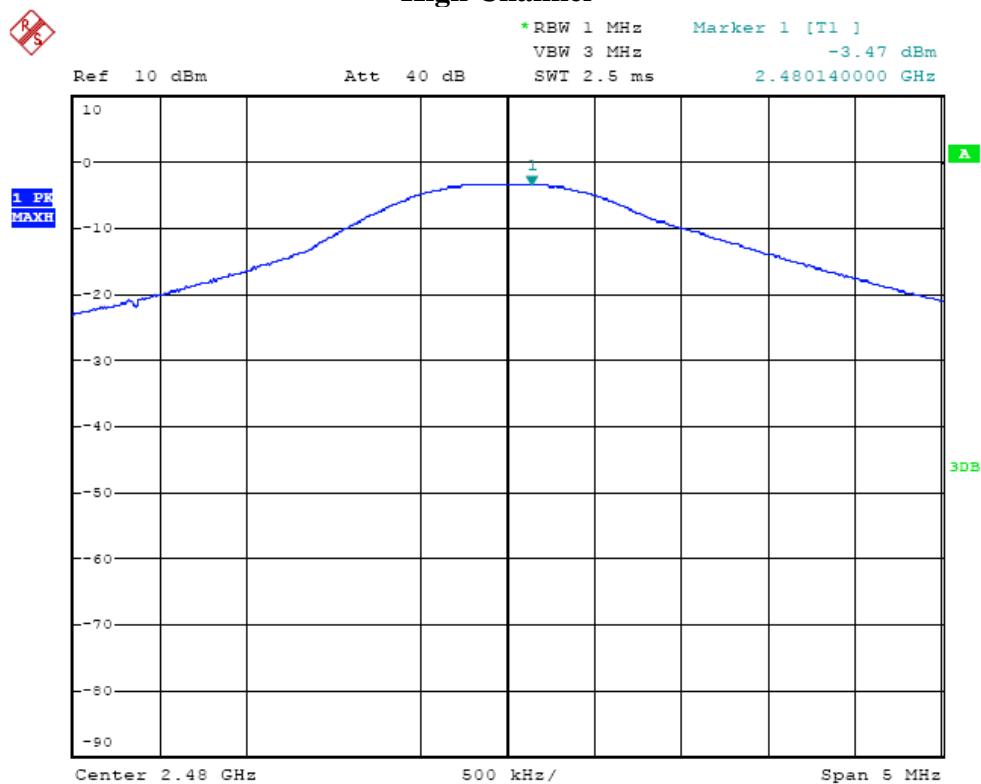High Channel

15. SECTION 15.247(D) –Band Edge

15.1. Test Equipment

Please refer to Section 2 this report.

15.2. Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Note: For Restricted Band

RBW=1MHz

VBW=1 MHz

4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

5. Repeat above procedures until all measured frequencies were complete.

15.3. Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

15.4. Test Result

Pass

Conducted test

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2402	37.41	> 20dBc
2480	42.53	> 20dBc

The spectrum analyzer plots are attached as below.



Radiated test

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

TX 2402MHz										
Frequency (MHz)	Reading(dB μ V/m)		Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

TX 2480MHz										
Frequency (MHz)	Reading(dB μ V/m)		Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Emissions attenuated more than 20 dB below the permissible value are not reported.

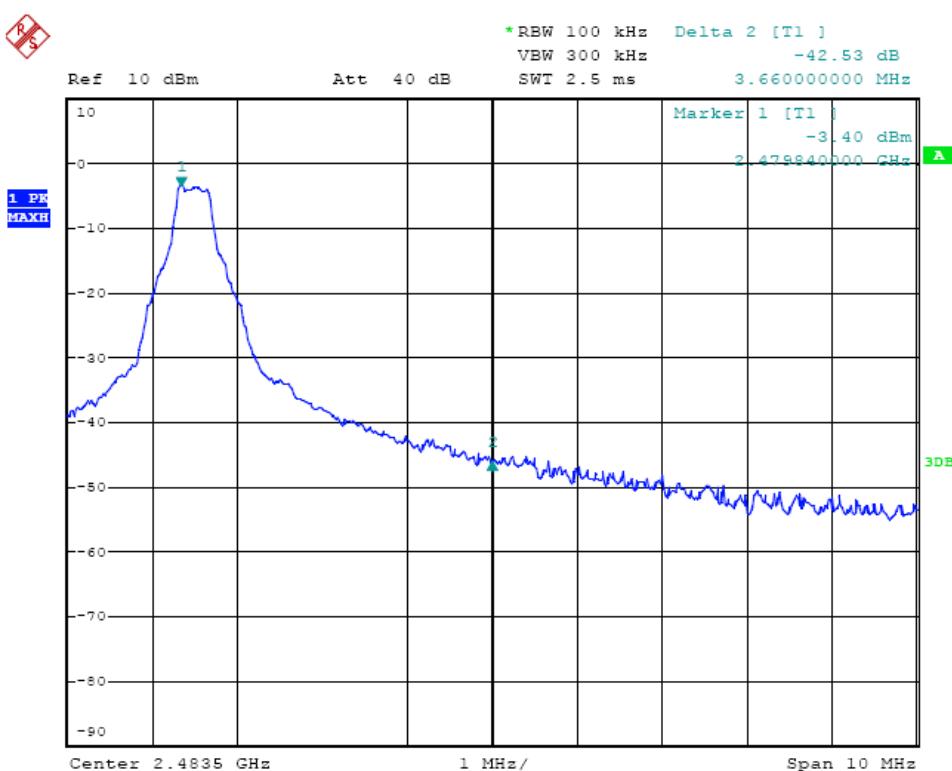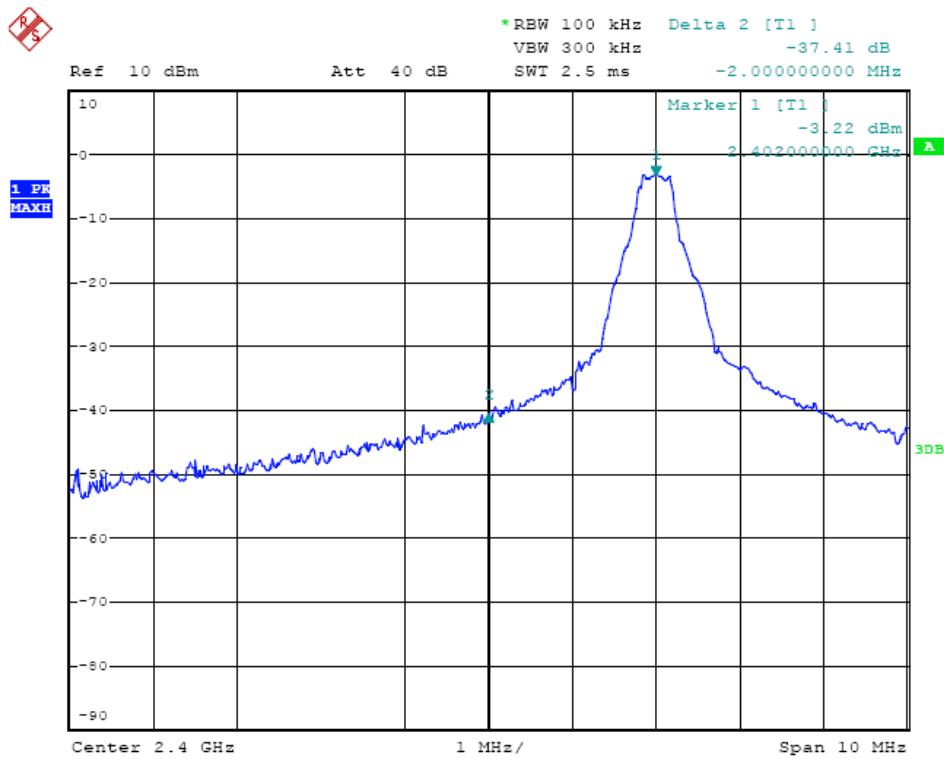


RADIATED EMISSION

EUT: CR001

Manufacturer:


Operating Condition: TX 2402MHz

Test Specification: Horizontal

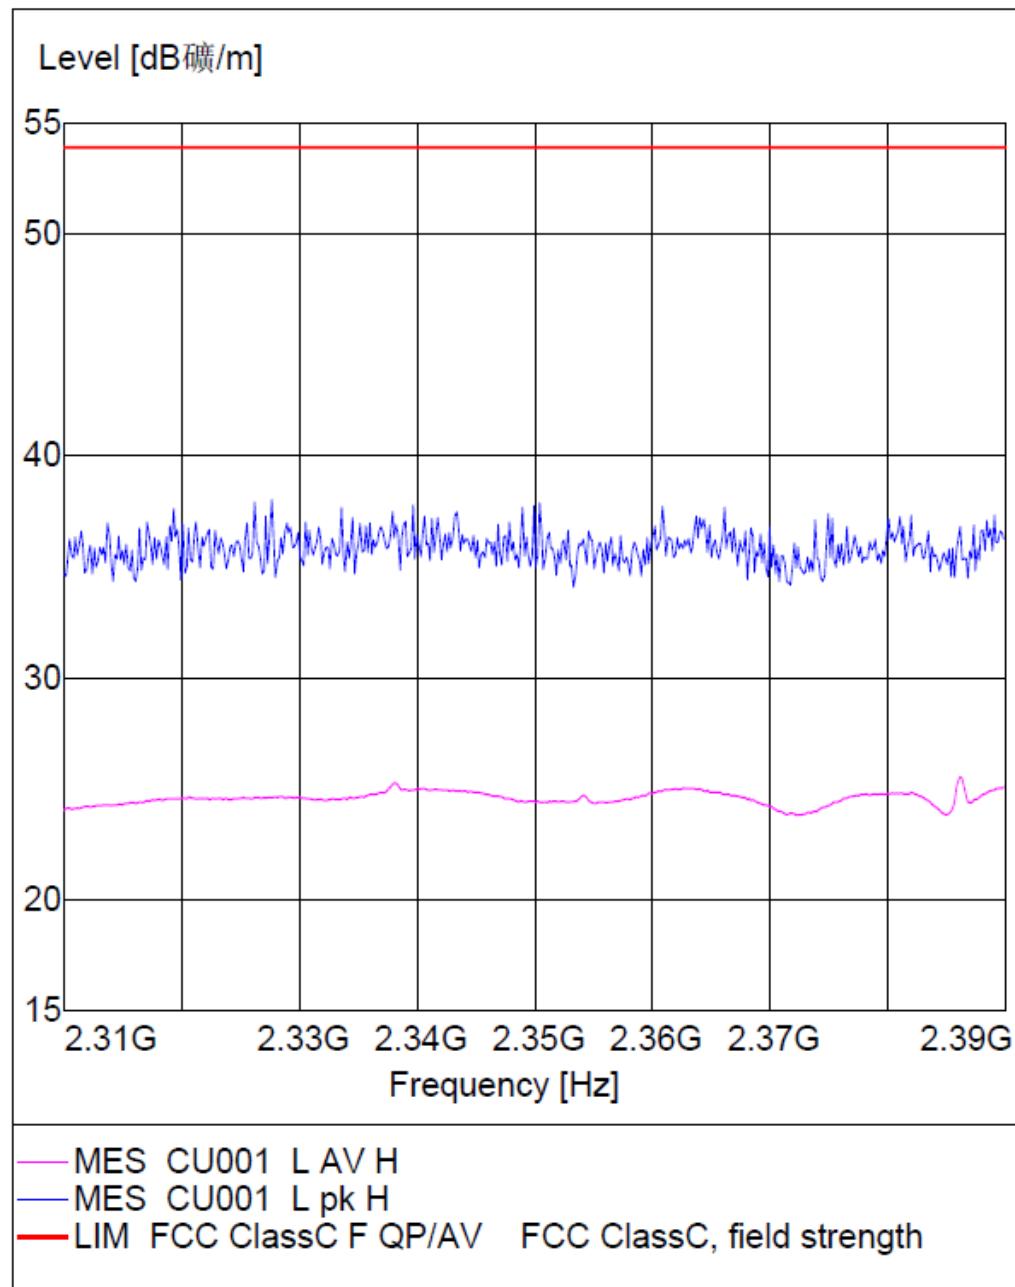

RADIATED EMISSION

EUT: CR001
Manufacturer:
Operating Condition: TX 2402MHz
Test Specification: Vertical

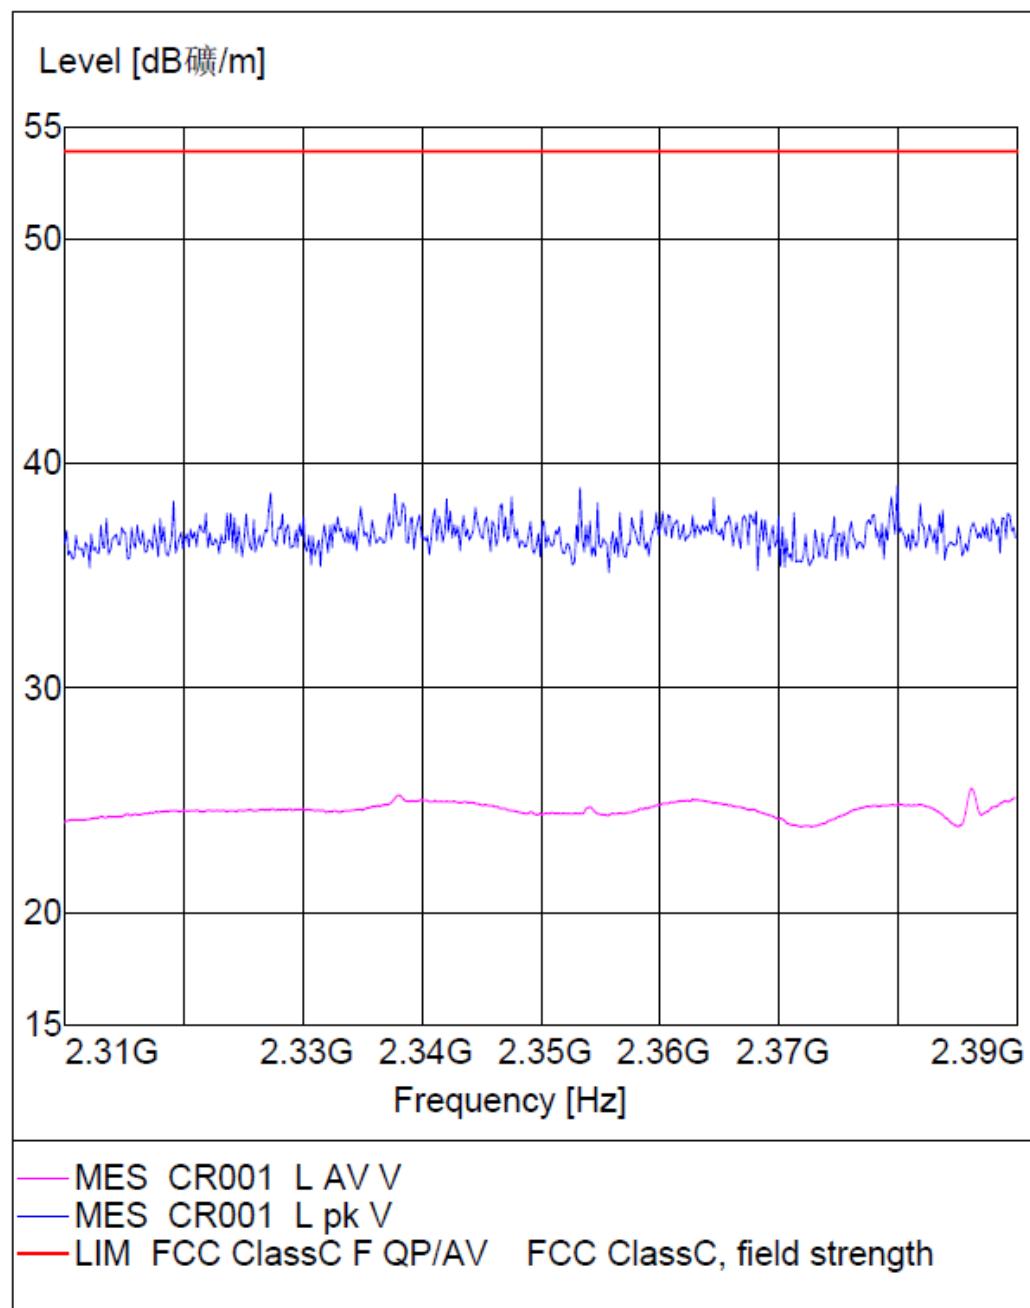


RADIATED EMISSION

EUT: CR001

Manufacturer:

Operating Condition: TX 2480MHz

Test Specification: HORIZONTAL

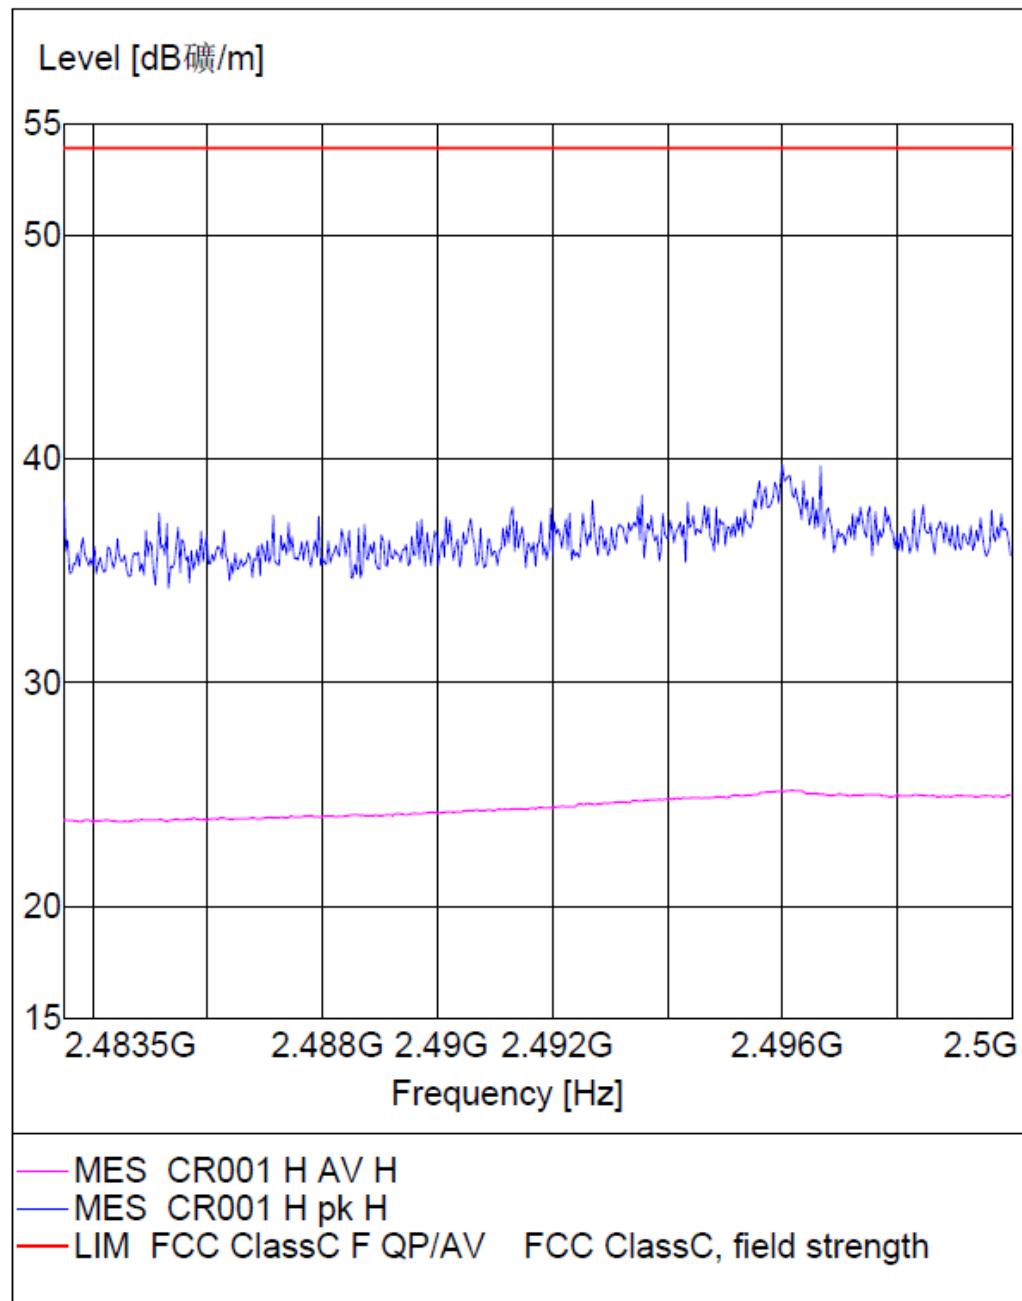

RADIATED EMISSION

EUT: CR001

Manufacturer:

Operating Condition: TX 2480MHz

Test Specification: Vertical

