

Test Report

Product	Aperio Communication Hub		
Name and address of the applicant	ASSA ABLOY AB Förmansvägen 11, 117 43 Stockholm, Sweden		
Name and address of the manufacturer	ASSA ABLOY AB Förmansvägen 11, 117 43 Stockholm, Sweden		
Model	AH40		
Rating	3.5W, 8 – 24Vdc or PoE		
Trademark	Aperio		
Serial number	00124B001E19F615		
Additional information	This tested device contains IEEE802.15.4 based radio module.		
Tested according to	FCC Part 15.247 Frequency Hopping Transmitters / Digital Transmission Systems Industry Canada RSS-247, Issue 2 Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices		
Order number	371121		
Tested in period	2019.09.24 – 2019.09.25		
Issue date	2019.10.22		
Name and address of the testing laboratory	 Institutveien 6 Kjeller, Norway CAB Number: FCC: NO0001 ISED: NO0470 TEL: +47 22 96 03 30 FAX: +47 22 96 05 50   An accredited technical test executed under the Norwegian accreditation scheme		
	 Prepared by [G.Suhanthakumar]  Approved by [Frode Sveinsen]		
This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.			

CONTENTS

1	INFORMATION	3
1.1	Test Item.....	3
1.2	Normal test condition.....	4
1.3	Test Engineer(s)	4
1.4	Description of modification for Modification Filing	4
1.5	Family List Rational	4
1.6	Antenna Requirement.....	4
1.7	Worst-Case Configuration and Mode	4
1.8	Comments	4
2	TEST REPORT SUMMARY	5
2.1	General.....	5
2.2	Test Summary	6
3	TEST RESULTS.....	7
3.1	Number of Frequencies	7
3.2	Power Line Conducted Emissions	8
3.3	Occupied Bandwidth.....	9
3.4	DTS Bandwidth.....	13
3.5	Peak Power Output	17
3.6	Conducted Emissions at Antenna Connector	33
3.7	Restricted Bands of operation	37
3.8	Spurious Emissions (Radiated)	38
3.9	Power Spectral Density (PSD).....	93
4	Measurement Uncertainty.....	97
5	LIST OF TEST EQUIPMENT	98
6	BLOCK DIAGRAM.....	99
6.1	Power Line Conducted Emission.....	99
6.2	Test Site Radiated Emission	99

1 INFORMATION

1.1 Test Item

Name	ASSA ABLOY
FCC ID	Y88-AH40R03
ISED ID	9504A-AH40R03
Model/version	AH40
Serial number	00124B001E19F615
Hardware identity and/or version	P001035257-000 Rev: A
Software identity and/or version	FW: 0.1.11
Frequency Range	2400 – 2483.5 MHz
Tunable Bands	None
Number of Channels	16
Operating Modes	TX and RX
Measured BW (99%)	2.57 MHz
Emission classification	F2D
Transmitter spurious, dBμV/m@3m	PK: 72.39; AV: 53.22 ((2.4835GHz)
Type of Modulation	O-QPSK modulation with half sine shaped pulses
User Frequency Adjustment	None
Conducted Output Power, Max	0.00372 W (5.71dBm)
Type of Power Supply	12Vdc
Antenna Connector	Yes, RP-SMA for external antenna
Number of Antennas	1 at a time (either internal antenna or external antenna) Internally, two crossed polarized dipoles. The two dipoles are never used simultaneously. An external antenna as an alternative.
Diversity or Smart Antennas	No
Desktop Charger	N/A

Description of Test Item

The Aperio Hub is a Communication Hub between one or more Aperio Online Locks and an Electronic Access Control System (EAC). Towards the Aperio locks all hubs communicate wirelessly over a proprietary IEEE802.15.4 (2.4GHz) radio protocol. Towards the EAC system it communicates over wire using Ethernet.

1.2 Normal test condition

Temperature:	20 - 24 °C
Relative humidity:	20 - 50 %
Normal test voltage:	12Vdc or PoE

The values are the limit registered during the test period.

1.3 Test Engineer(s)

G.Suwanthakumar

1.4 Description of modification for Modification Filing

Not applicable.

1.5 Family List Rational

None

1.6 Antenna Requirement

Is the antenna detachable?

☒ Yes ☐ No

If detachable, is the antenna connector non-standard?

☒ Yes ☐ No

Type of antenna connector: RP-SMA

Ref. FCC §15.203

1.7 Worst-Case Configuration and Mode

Radiated Emissions were performed with the EUT set to transmit at the channel with the highest output power as worst-case scenario.

1.8 Comments

All measurements were done with the EUT powered with 12VDC voltage. It was checked that power variations between 85% and 115% did not have any influence on the measurements. As well 8Vdc and 24Vdc.

Following ports were populated during spurious emission measurements:

- DC, PoE or Ethernet

2 TEST REPORT SUMMARY

2.1 General

All measurements are traceable to national standards.

The tests were conducted for demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.247 and ISED Canada RSS-247 Issue 2 and RSS-GEN Issue 5.

Tests were performed in accordance with ANSI C63.4-2014 and ANSI C63.10-2013.

Radiated tests were made in a semi-anechoic chamber at measuring distances of 1m, 3m and 10m.

A description of the test facility is on file with FCC and ISED.

☒ New Submission

☒ Production Unit

☐ Class II Permissive Change

☐ Pre-production Unit

DTS Equipment Code

☐ Family Listing



THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".

Nemko Group authorizes the above named entity to reproduce this report provided it is reproduced in its entirety and for use by the entity's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use that a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party caused by decisions made or actions based on this report.

2.2 Test Summary

Name of test	FCC Part 15 reference	RSS-247 Issue 2, RSS-GEN Issue 5 reference	Result
Supply Voltage Variations	15.31(e)	6.11 (RSS-GEN)	Complies ¹
Number of frequencies	15.31(m)	6.8 (RSS-GEN)	Complies
Antenna Requirement	15.203	6.8 (RSS-GEN)	Complies ²
Power Line Conducted Emission	15.107(a) 15.207(a)	7.2 / 8.8 (RSS-GEN)	Complies ¹
99% Occupied Bandwidth	N/A	6.7 (RSS-GEN)	Complies
Minimum 6 dB Bandwidth	15.247(a)(2)	5.2 (1) (RSS-247)	Complies
Peak Power Output	15.247(b)	5.4 (RSS-247)	Complies
Power Spectral Density	15.247(e)	5.2 (2) (RSS-247)	Complies
Spurious Emissions (Antenna Conducted)	15.247(c)(d)	5.5 (RSS-247)	Complies
Spurious Emissions (Radiated)	15.247(c)(d) 15.109(a) 15.209(a)	5.5 (RSS-247) 7.3 (RSS-GEN) 8.9 (RSS-GEN)	Complies

¹ The tested equipment only operates with external DC power

² External antenna and internal Integral antenna

3 TEST RESULTS

3.1 Number of Frequencies

FCC Part 15.31 (m)

RSS-Gen 6.8

Authorized Band:	2400 - 2483.5 MHz
Frequency band width:	83.5MHz
Low Channel:	2405MHz
Mid channel:	2440MHz
High Channel:	2480MHz

3.2 Power Line Conducted Emissions

FCC Part 15.207

ISED RSS-GEN Issue 5, Clause 7.2 / 8.8

Measurement procedure: ANSI C63.4-2014 using 50 μ H/50 ohms LISN


Test Results: Complies

Measurement Data: See attached plots

Highest measured value (L1 and N): 120Vac, 60Hz with external DC power supply, model no: CPX400S

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter
1.148	---	38.85	46.00	7.15	1000	9	L1	OFF
1.452	---	42.91	46.00	3.09	1000	9	L1	OFF
2.600	---	38.57	46.00	7.43	1000	9	L1	OFF
2.752	---	40.01	46.00	5.99	1000	9	L1	OFF
2.908	---	39.87	46.00	6.13	1000	9	L1	OFF
4.436	---	40.46	46.00	5.54	1000	9	N	OFF
4.512	---	40.48	46.00	5.52	1000	9	N	OFF
12.544	---	40.48	50.00	9.52	1000	9	L1	OFF

Full Spectrum

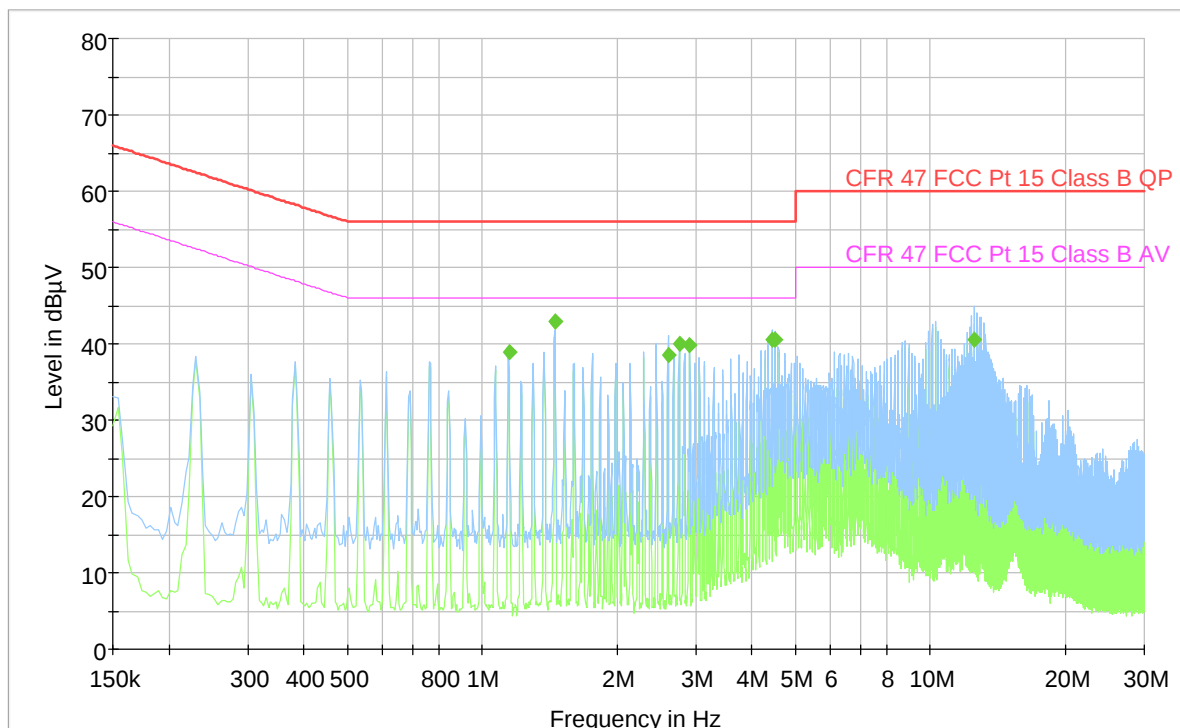

3.3 Occupied Bandwidth

RSS-Gen, 6.7

ISED Canada RSS-247 Issue 2, Clause 5.1

ISED Canada RSS-GEN Issue 5, Clause 6.7

Measurement procedure: ANSI C63.10-2013 Clause 6.9.2 / 7.8.3

Test Results: Complies

Measurement Data:

Channel Frequency (MHz)	Measured 99% BW (MHz)
2405	2.56
2440	2.56
2480	2.56


See attached plots.

Requirements:

Frequency hopping systems in the 2400 - 2483.5 MHz band shall use at least 15 non-overlapping channels. No requirements for bandwidth for this frequency band.

No requirements for Digital Transmission Systems.

No requirement for 99% BW, reported for information only.

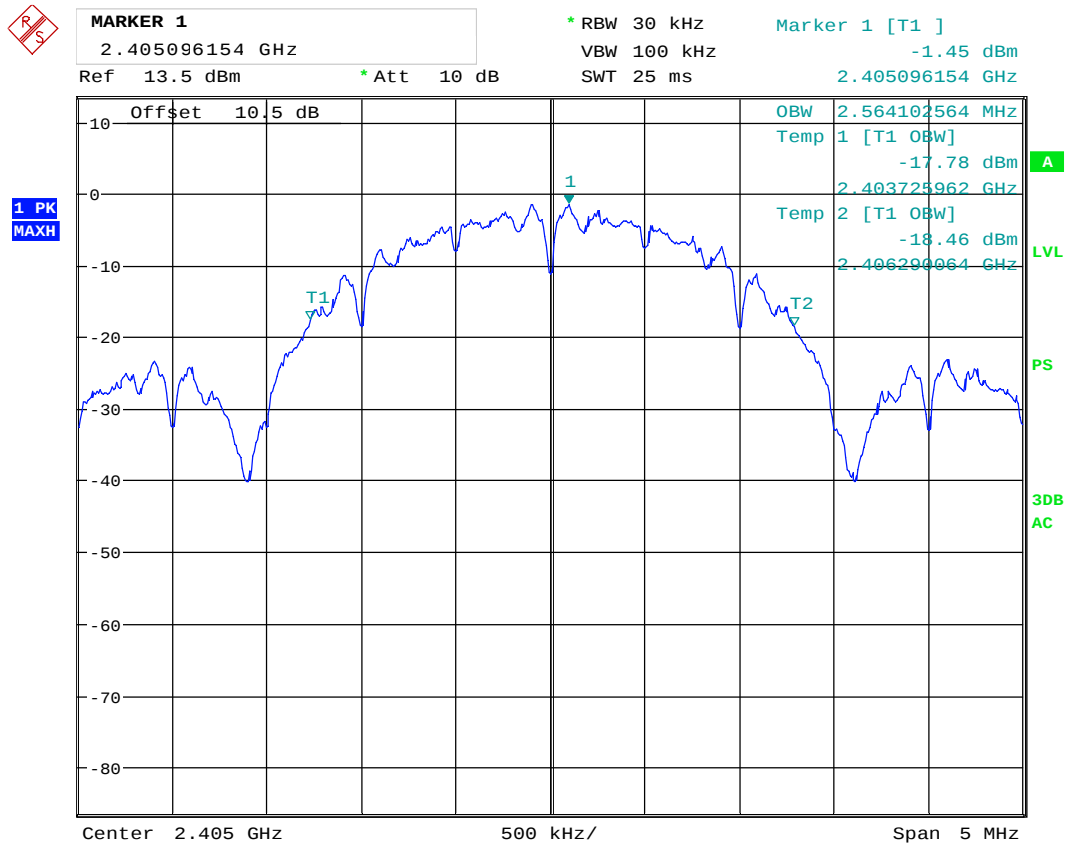

Date: 24.SEP.2019 13:36:57

99% Bandwidth , ch2405MHz



99% Bandwidth , ch2440MHz



MARKER 1

2.479903846 GHz

Ref 20.5 dBm

* Att 10 dB

* RBW 30 kHz

VBW 100 kHz


SWT 25 ms

Marker 1 [T1]

-3.91 dBm

2.479903846 GHz

1 PK
MAXH

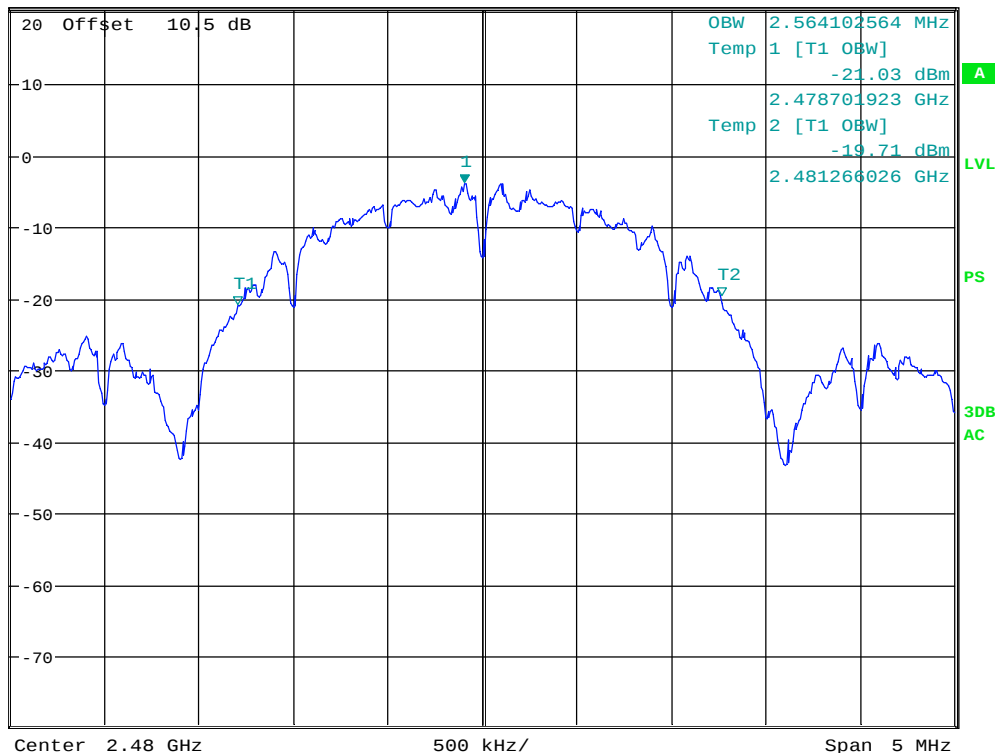

Date: 24.SEP.2019 13:47:03

99% Bandwidth , ch2480MHz

3.4 DTS Bandwidth

FCC Part 15.247 (a)(2)

ISED Canada RSS-247 Issue 2, Clause 5.2 (a)

Measurement procedure: ANSI C63.10-2013 Clause 11.8

Test Results: **Complies**


Measurement Data:

Channel Frequency (MHz)	Measured DTS BW (MHz)
2405	1.67
2440	1.60
2480	1.60

Requirements:


For Digital Transmission Systems in the 2400-2483.5 MHz band the minimum 6 dB bandwidth shall be at least 500 KHz.

No requirements for Frequency Hopping Systems.

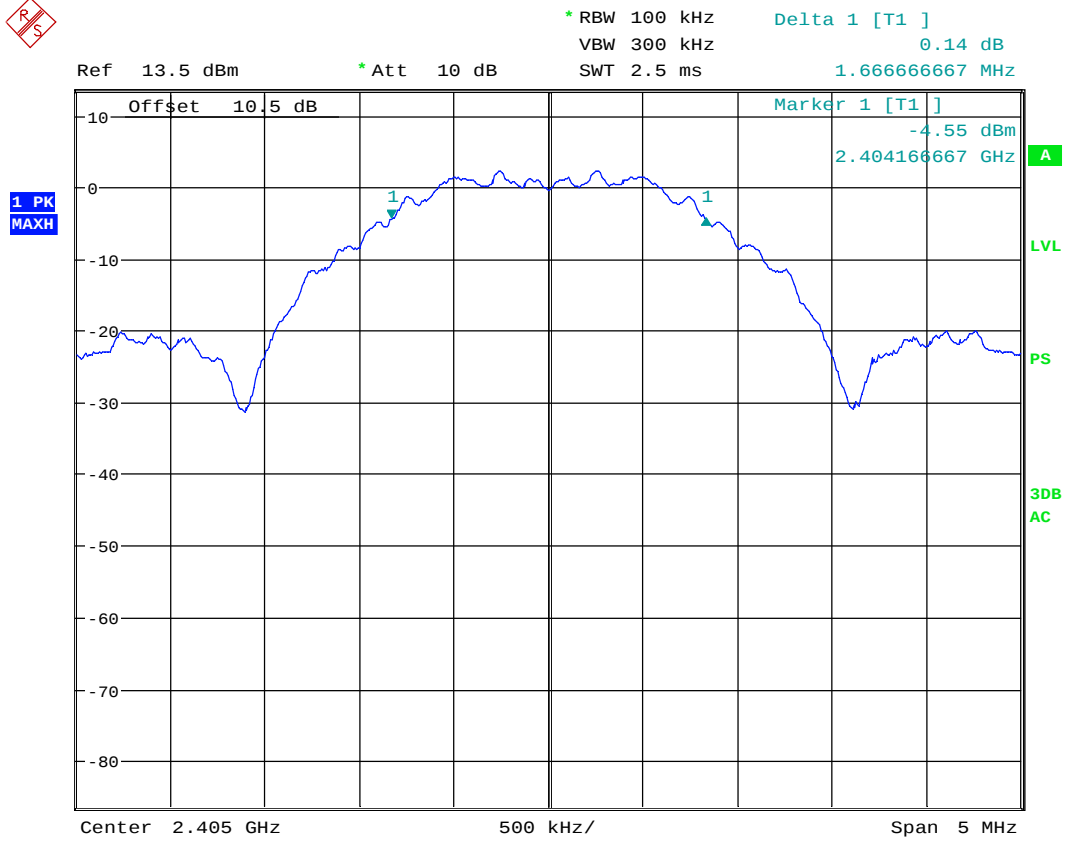


Date: 24.SEP.2019 13:38:08

DTS Bandwidth, ch2405MHz

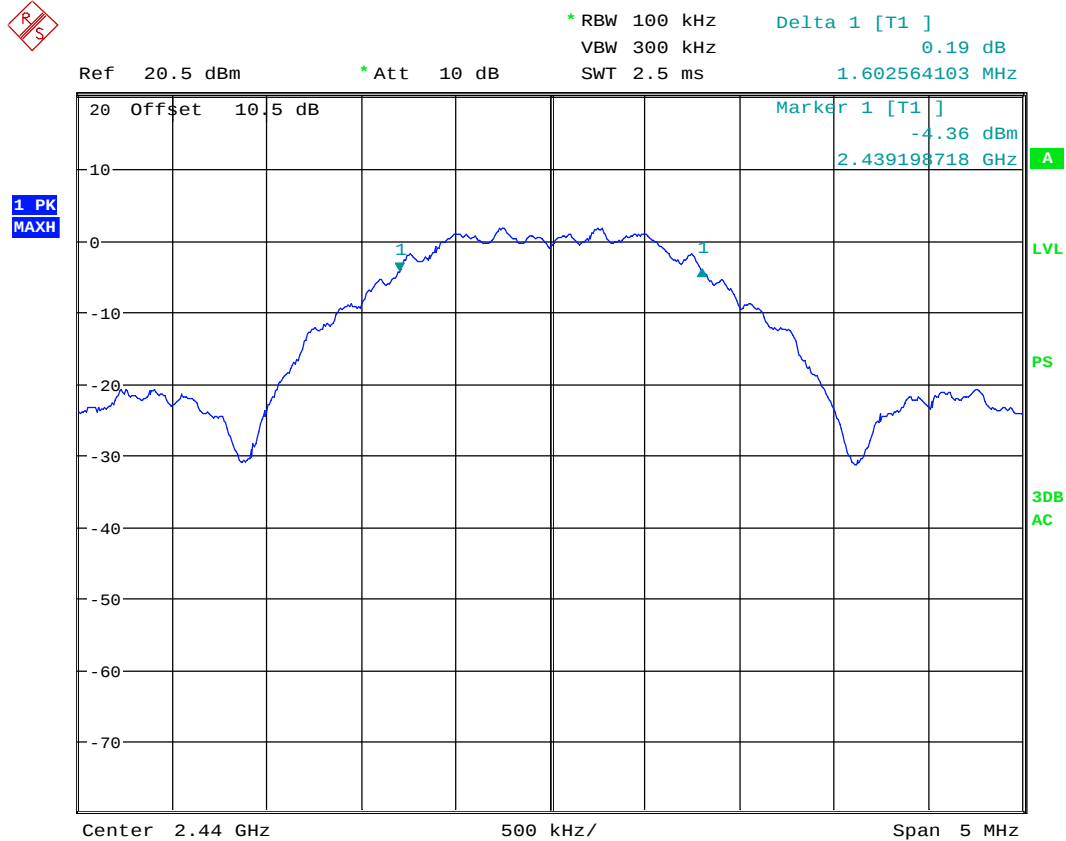

Date: 24.SEP.2019 13:44:21

DTS Bandwidth, ch2440MHz

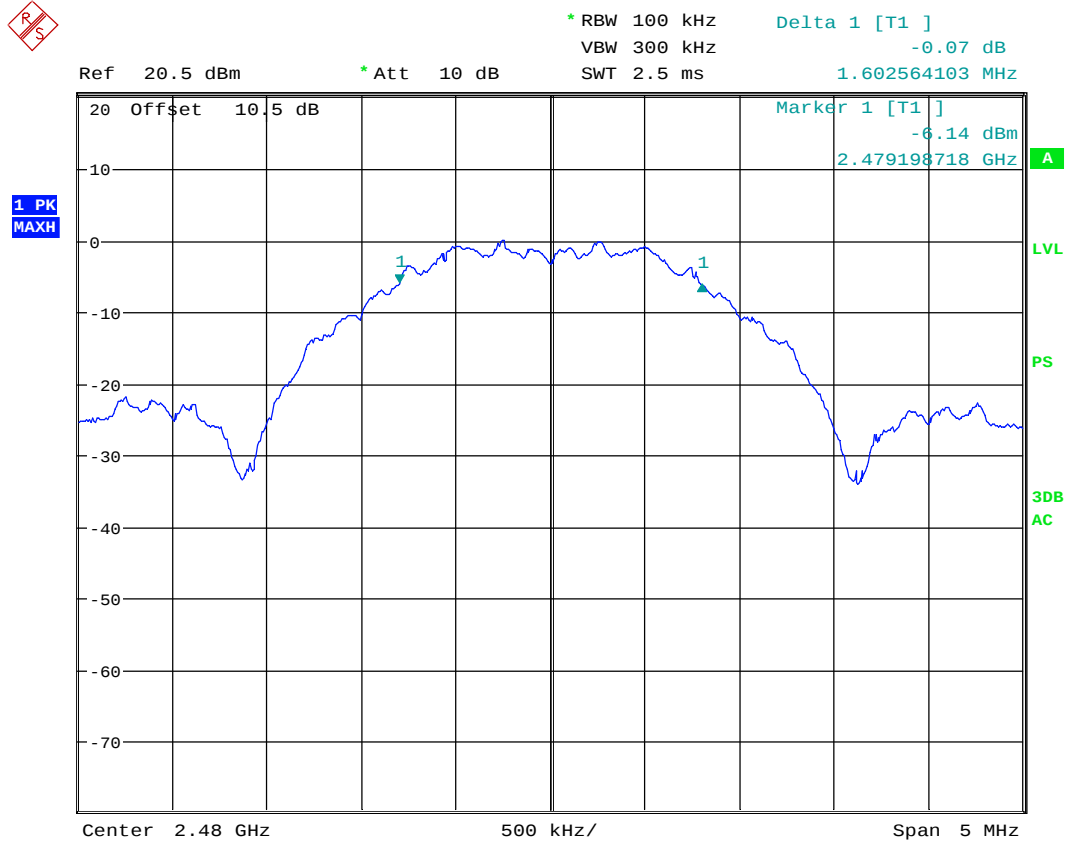

Date: 24.SEP.2019 13:45:48

DTS Bandwidth, ch2480MHz

3.5 Peak Power Output

FCC part 15.247 (b)

ISED Canada RSS-247 Issue 2, Clause 5.4

Measurement procedure: ANSI C63.10-2013 Clause 11.9.1.2

Test Results: Complies

Measurement Data:

	2405 MHz	2440 MHz	2480 MHz
Conducted Power (dBm)	5.71	5.09	3.50
Conducted Power (Watts)	0.00372	0.00323	0.00224
Internal antenna: Field Strength (dBμV/m), HP	102.9	103.8	102.5
Internal antenna EIRP, Calculated (mW)	5.78	7.13	5.29
Internal antenna: Antenna gain (dBi)	1.9	3.4	3.7
External antenna: Field Strength (dBμV/m), VP	101.1	98.5	98.7
External antenna EIRP, Calculated (mW)	3.86	2.11	2.20
External antenna: Antenna gain (dBi)	0.2	-1.8	-0.1

Antenna gain = $10 \cdot \log(\text{EIRP} / \text{Conducted power})$ dBi

EIRP is calculated from measured field strength by the formulas in KDB 412172 D01 Determining ERP and EIRP v01.

See attached plots.

Requirements:

The maximum peak output power shall not exceed the following limits:

For frequency hopping systems employing at least 75 hopping channels: 1 Watt

For all other frequency hopping systems in the 2400 - 2483.5 MHz band: 0.125 Watts

For Digital Transmission Systems in the 2400 - 2483.5 MHz band: 1 Watt

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



MARKER 1

2.405192308 GHz

Ref 13.5 dBm

* Att 10 dB

* RBW 5 MHz


VBW 10 MHz

SWT 2.5 ms

Marker 1 [T1]

5.71 dBm

2.405192308 GHz

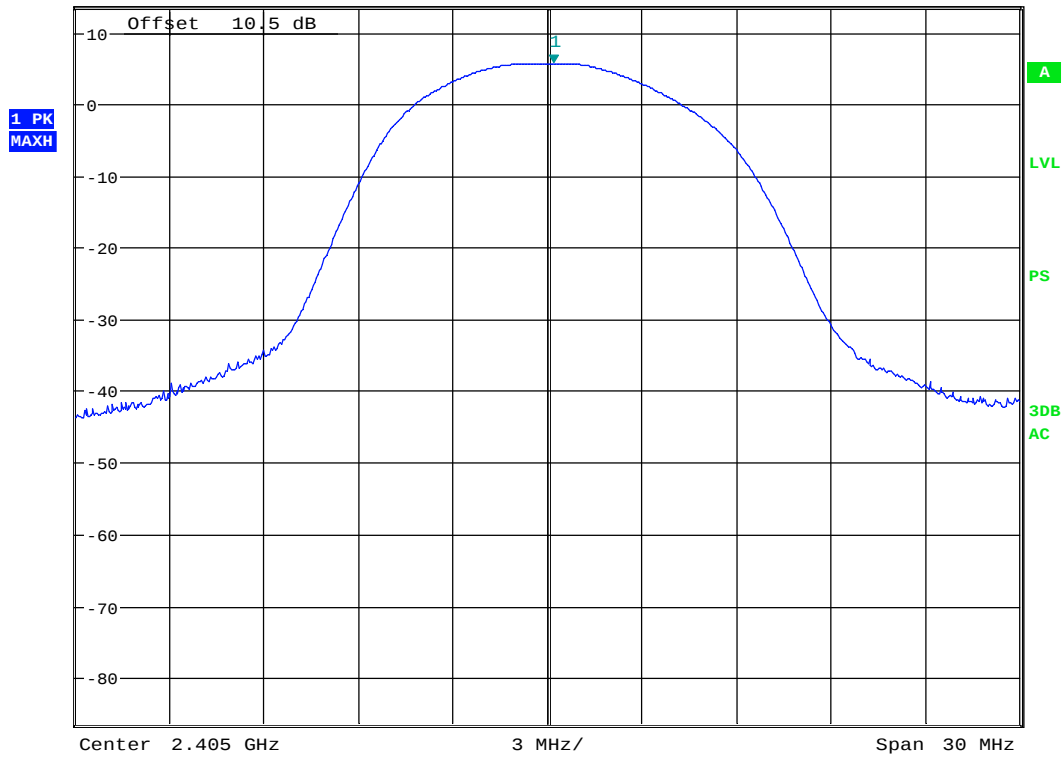

Date: 24.SEP.2019 13:34:23

Conducted Power , Ch2405MHz



MARKER 1

2.439759615 GHz

* RBW 5 MHz

VBW 10 MHz

SWT 2.5 ms


Marker 1 [T1]

5.09 dBm

2.439759615 GHz

Ref 20.5 dBm * Att 10 dB

1 PK
MAXH

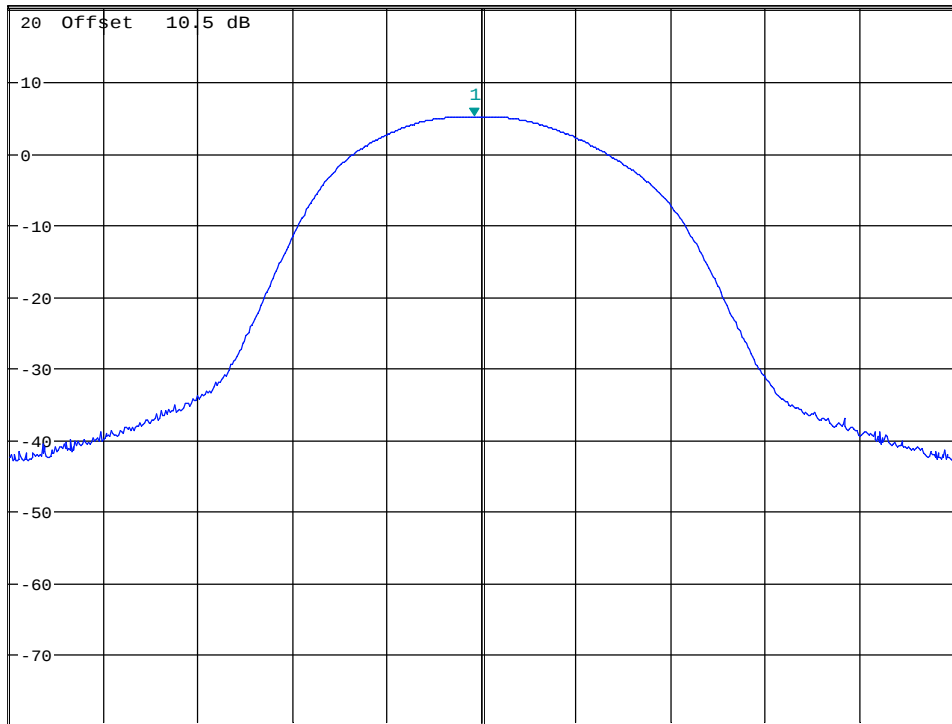

Center 2.44 GHz 3 MHz/ Span 30 MHz

Date: 24.SEP.2019 13:41:22

Conducted Power , Ch2440MHz



MARKER 1

2.479182692 GHz

Ref 20.5 dBm

* Att 10 dB

* RBW 5 MHz

VBW 10 MHz


SWT 2.5 ms

Marker 1 [T1]

3.50 dBm

2.479182692 GHz

1 PK
MAXH

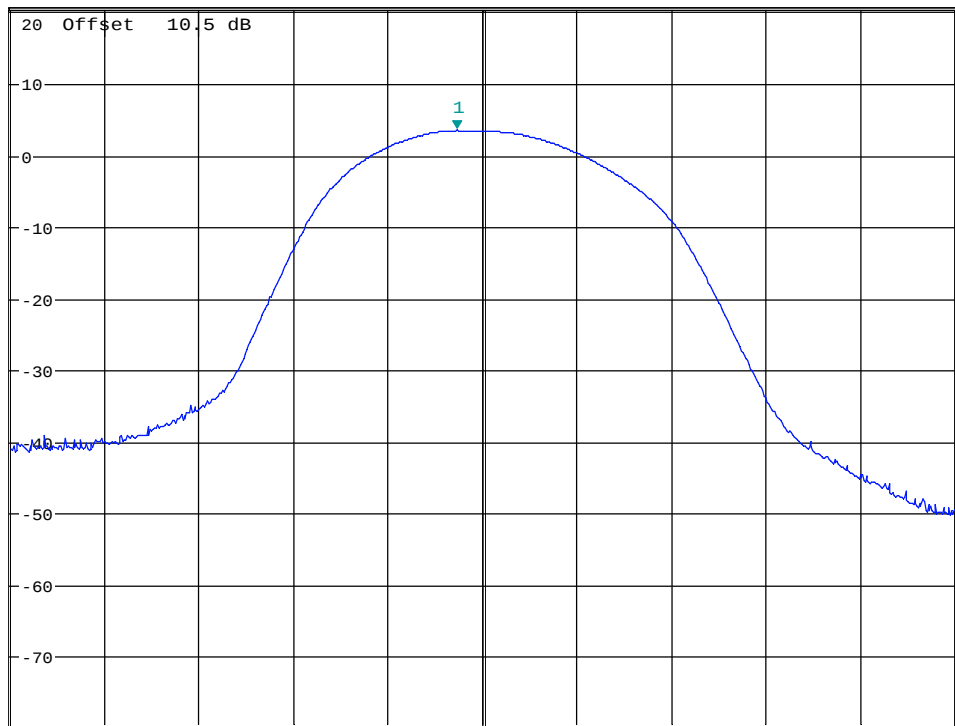

Center 2.48 GHz

3 MHz/

Span 30 MHz

Date: 24.SEP.2019 13:48:59

Conducted Power, Ch2480MHz



MARKER 1

2.405336538 GHz

Ref 117 dBμV/m

* Att 10 dB

* RBW 5 MHz


VBW 10 MHz

SWT 2.5 ms

Marker 1 [T1]

102.81 dBμV/m

2.405336538 GHz

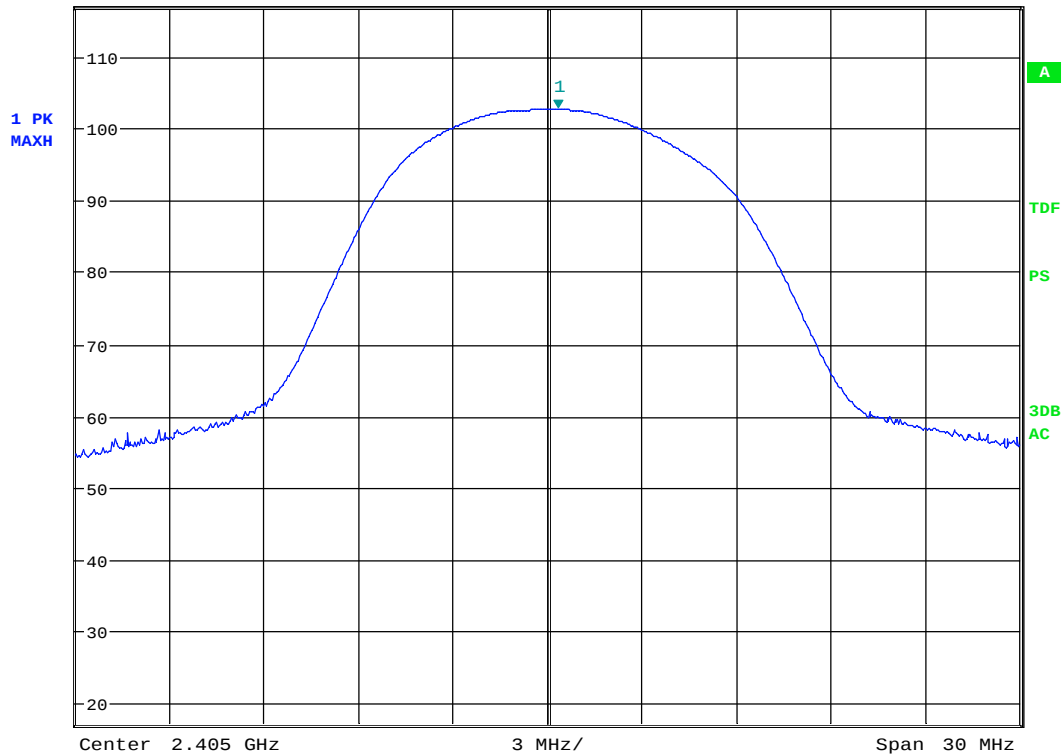

Date: 24.SEP.2019 09:16:06

Internal antenna, Measured Field Strength, HP, ch2405MHz



MARKER 1

2.440144231 GHz

Ref 110 dBμV/m

* Att 10 dB

* RBW 5 MHz

VBW 10 MHz


SWT 2.5 ms

Marker 1 [T1]

103.76 dBμV/m

2.440144231 GHz

1 PK
MAXH

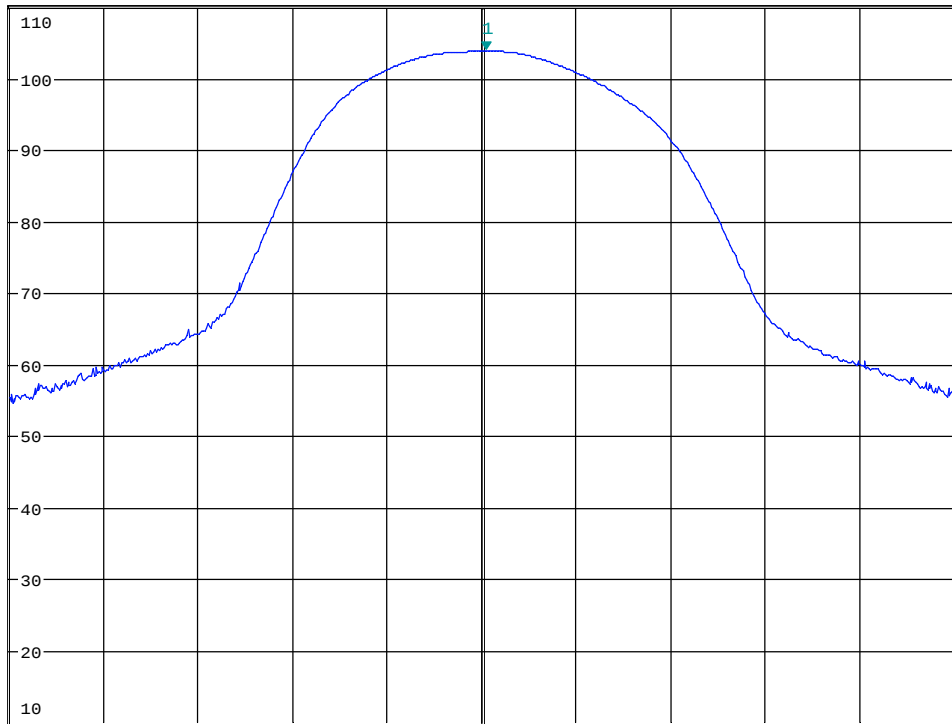

Date: 24.SEP.2019 09:52:20

Internal antenna: Measured Field Strength, HP, ch2440MHz



MARKER 1

2.479423077 GHz

* RBW 5 MHz

VBW 10 MHz

SWT 2.5 ms

Marker 1 [T1]


102.46 dBμV/m

2.479423077 GHz

Ref 110 dBμV/m

* Att 10 dB

1 PK
MAXH

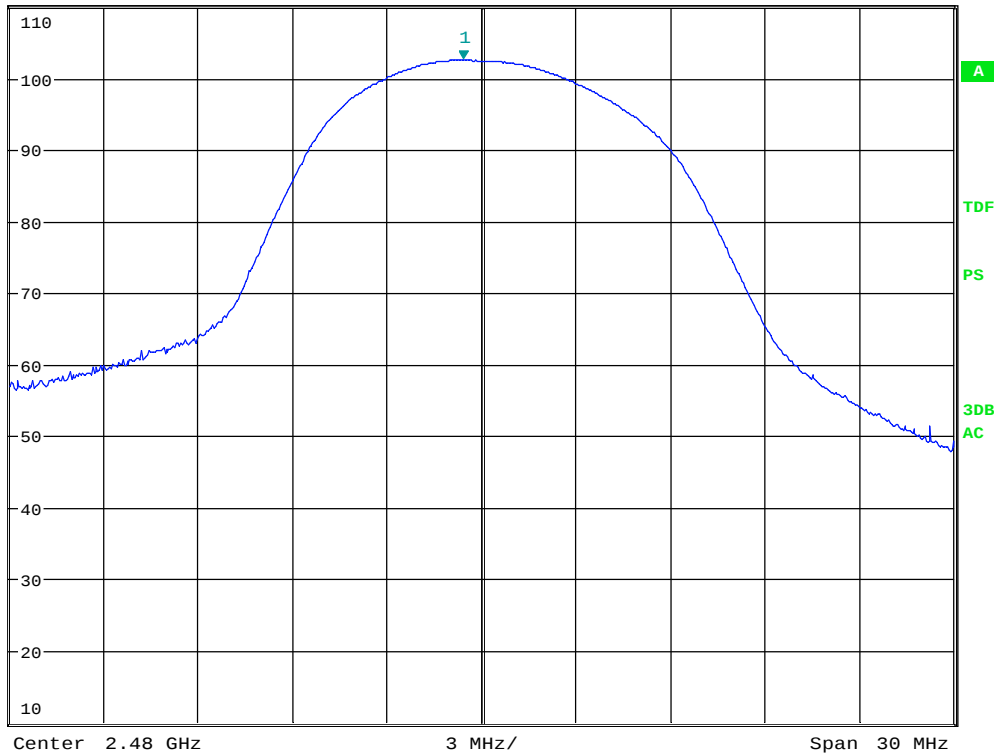

Date: 24.SEP.2019 10:35:36

Internal antenna: Measured Field Strength, HP, ch2480MHz



MARKER 1

2.405 GHz

Ref 117 dB μ V/m

* Att 10 dB

* RBW 5 MHz

VBW 10 MHz


SWT 2.5 ms

Marker 1 [T1]

102.85 dB μ V/m

2.405000000 GHz

1 PK
MAXH

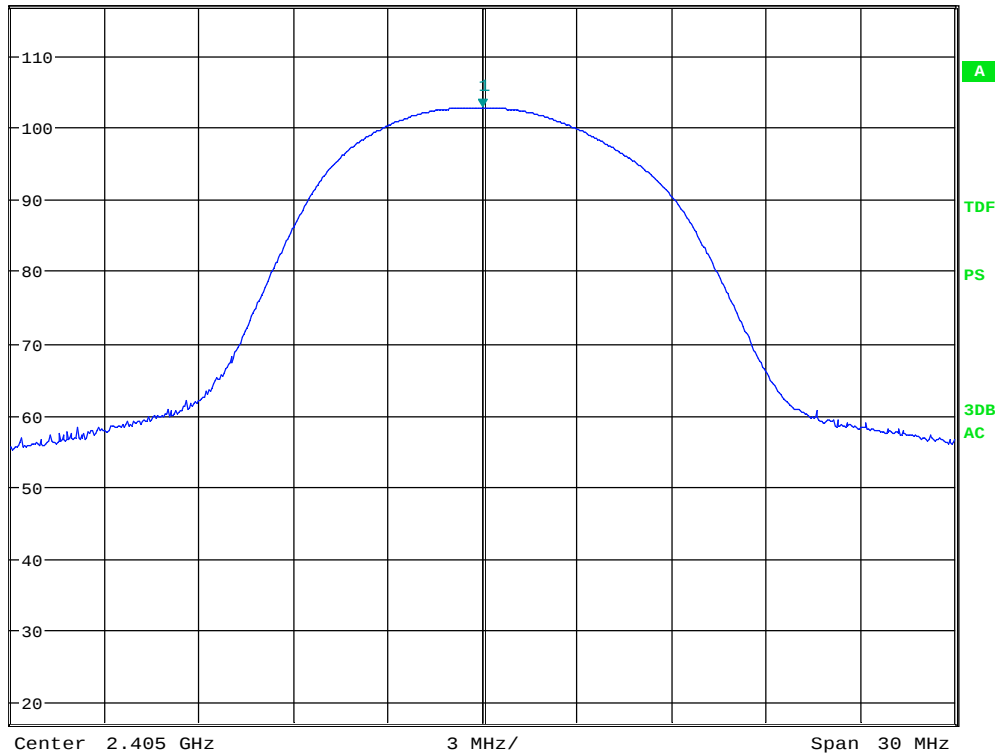

Date: 24.SEP.2019 09:12:44

Internal antenna: Measured Field Strength, VP, ch2405MHz




MARKER 1
2.440048077 GHz
Ref 110 dBμV/m * Att 10 dB

* RBW 5 MHz
VBW 10 MHz
SWT 2.5 ms

Marker 1 [T1]
102.31 dBμV/m
2.440048077 GHz

1 PK
MAXH

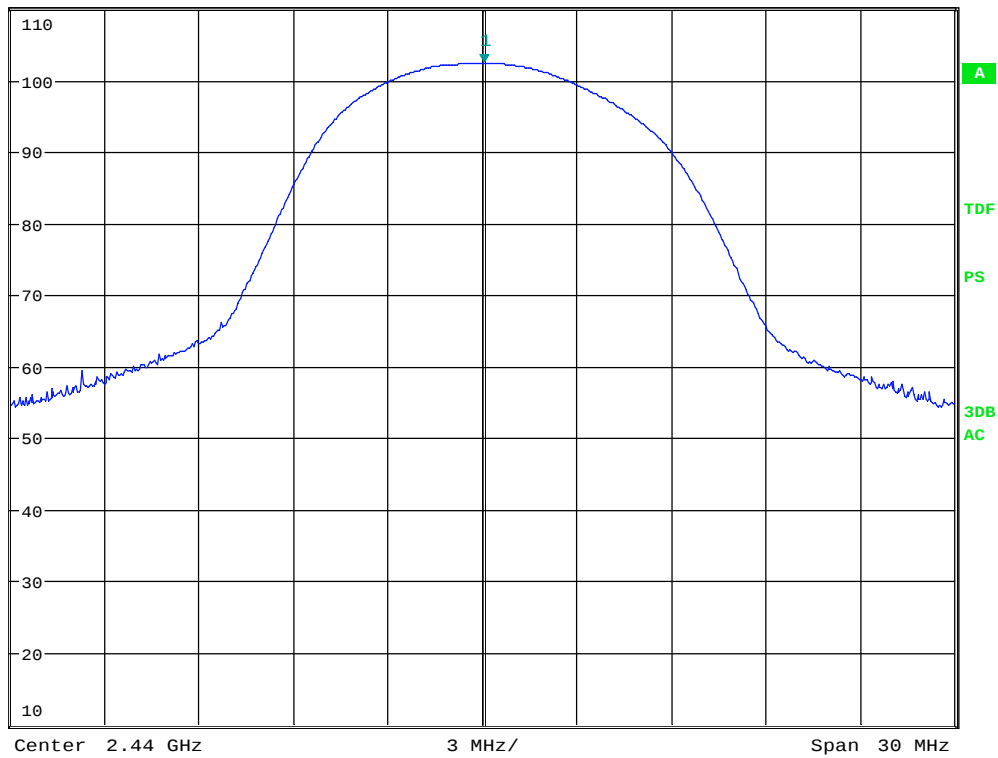

Date: 24.SEP.2019 09:50:56

Internal antenna: Measured Field Strength, VP, ch2440MHz



MARKER 1

2.479278846 GHz

Ref 110 dB μ V/m

* Att 10 dB

* RBW 5 MHz

VBW 10 MHz


SWT 2.5 ms

Marker 1 [T1]

100.26 dB μ V/m

2.479278846 GHz

1 PK
MAXH

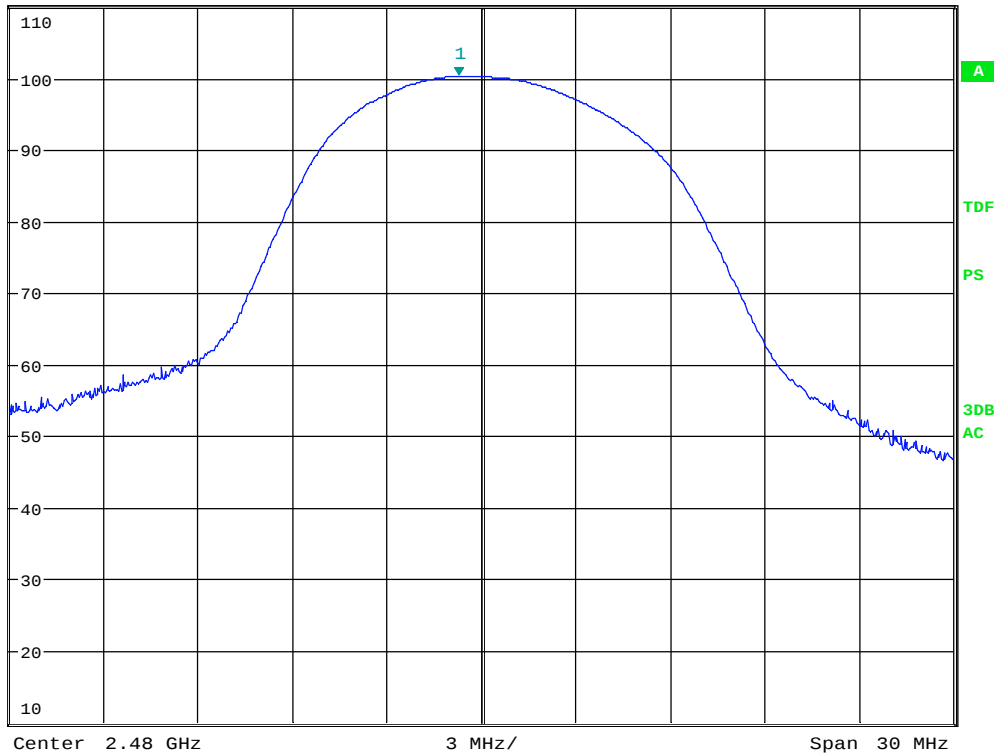

Date: 24.SEP.2019 10:36:48

Internal antenna: Measured Field Strength, VP, ch2480MHz



MARKER 1

2.405432692 GHz

Ref 110 dB μ V/m

* Att 10 dB

* RBW 5 MHz

VBW 10 MHz


SWT 2.5 ms

Marker 1 [T1]

95.66 dB μ V/m

2.405432692 GHz

1 PK
MAXH

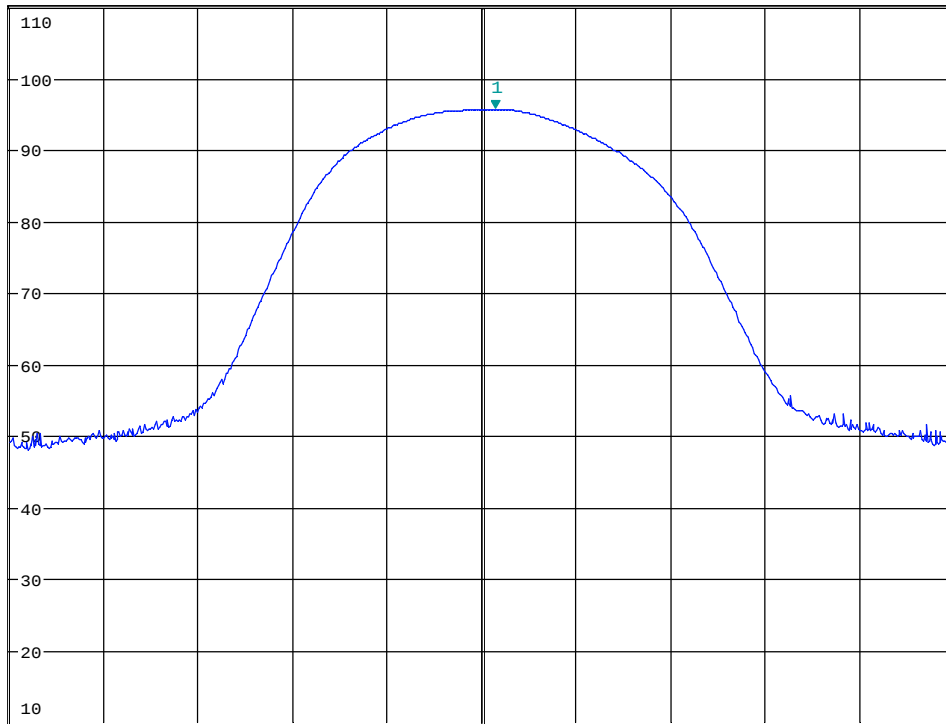

Date: 24.SEP.2019 12:19:15

External antenna: Measured Field Strength, HP, ch2405MHz



MARKER 1

2.440384615 GHz

Ref 110 dB μ V/m

* Att 10 dB

* RBW 5 MHz

VBW 10 MHz


SWT 2.5 ms

Marker 1 [T1]

89.94 dB μ V/m

2.440384615 GHz

1 PK
MAXH

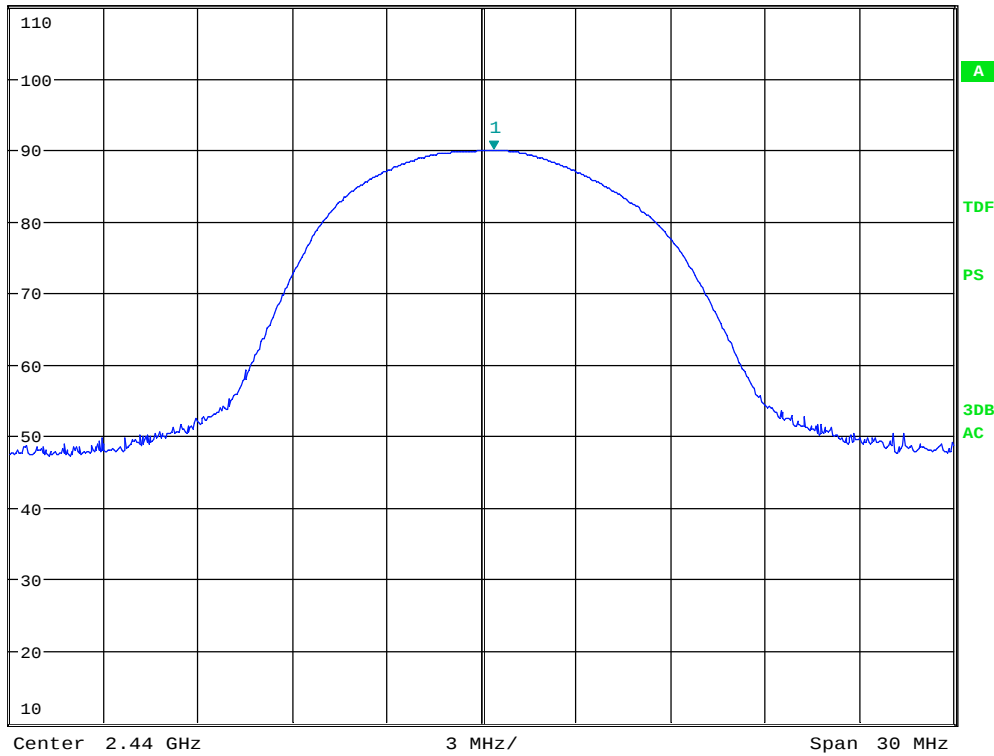

Date: 24.SEP.2019 11:19:49

External antenna: Measured Field Strength, HP, ch2440MHz



MARKER 1

2.479423077 GHz

Ref 110 dBμV/m

* Att 10 dB

* RBW 5 MHz

VBW 10 MHz


SWT 2.5 ms

Marker 1 [T1]

87.96 dBμV/m

2.479423077 GHz

1 PK
MAXH

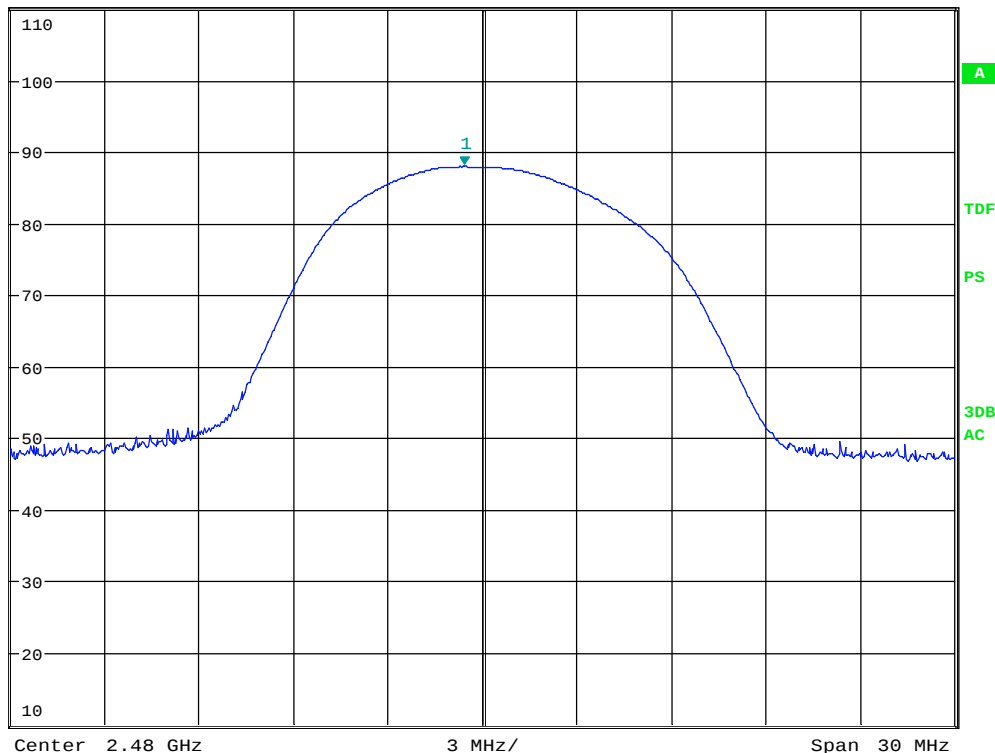

Date: 24.SEP.2019 11:14:46

External antenna: Measured Field Strength, HP, ch2480MHz



MARKER 1

2.405384615 GHz

Ref 110 dBμV/m

* Att 10 dB

* RBW 5 MHz

VBW 10 MHz


SWT 2.5 ms

Marker 1 [T1]

101.01 dBμV/m

2.405384615 GHz

1 PK
MAXH

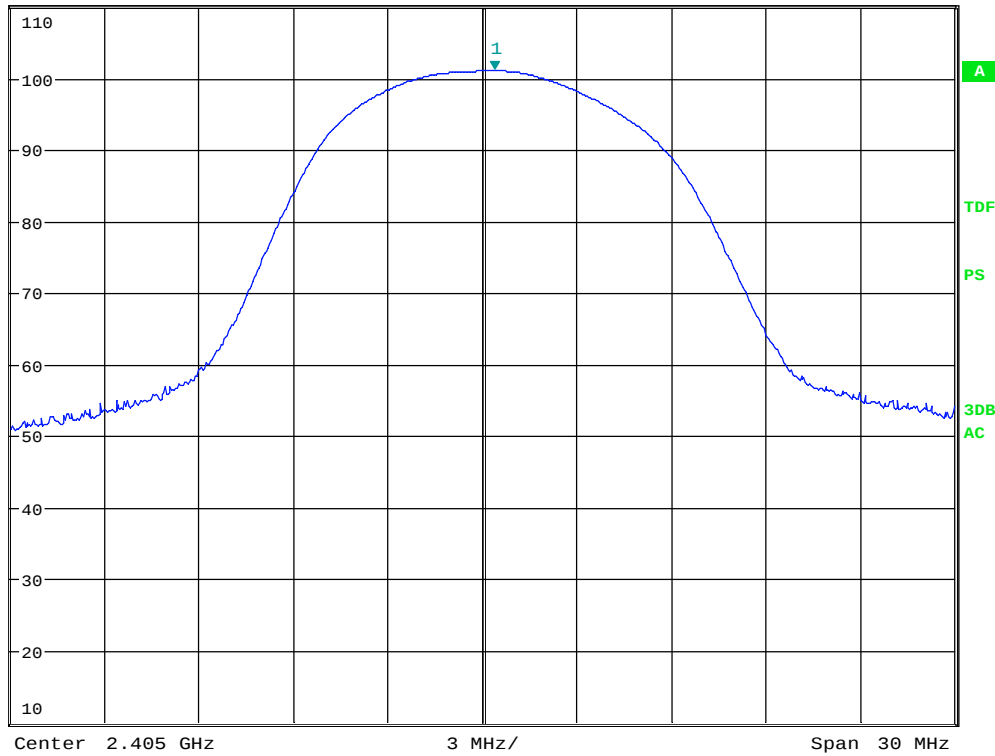

Date: 24.SEP.2019 12:15:59

External antenna: Measured Field Strength, VP, ch2405MHz



MARKER 1

2.440336538 GHz

* RBW 5 MHz

VBW 10 MHz

SWT 2.5 ms

Marker 1 [T1]


98.48 dBμV/m

2.440336538 GHz

Ref 110 dBμV/m

* Att 10 dB

1 PK
MAXH

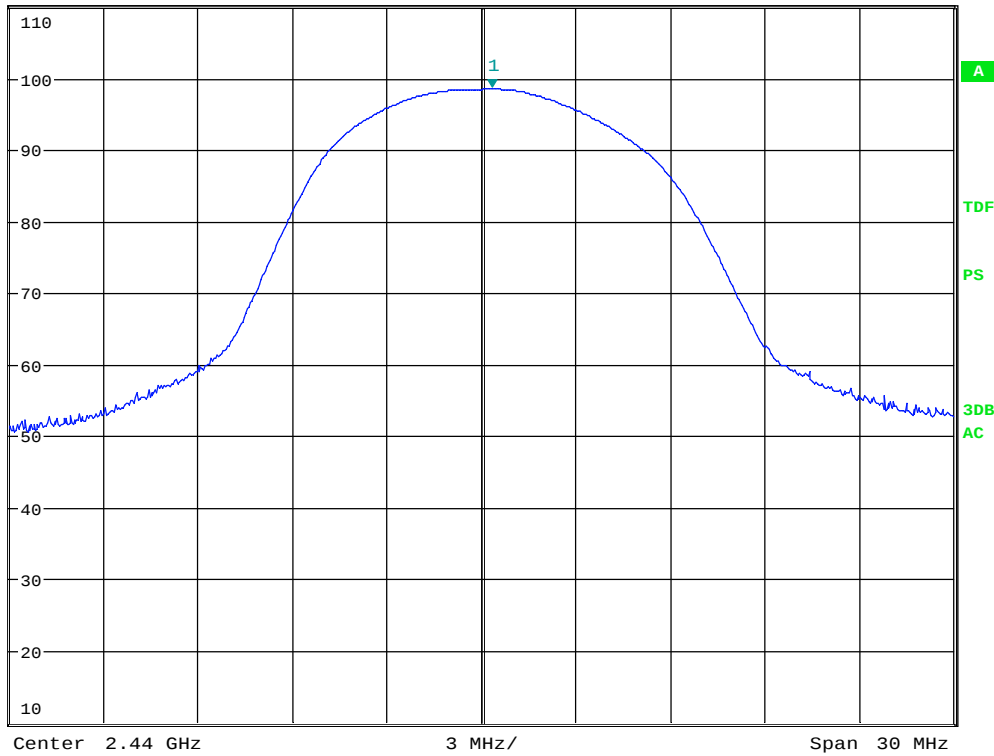

Date: 24.SEP.2019 11:18:58

External antenna: Measured Field Strength, VP, ch2440MHz



MARKER 1

2.479134615 GHz

Ref 110 dBμV/m

* Att 10 dB

* RBW 5 MHz

VBW 10 MHz


SWT 2.5 ms

Marker 1 [T1]

98.65 dBμV/m

2.479134615 GHz

1 PK
MAXH

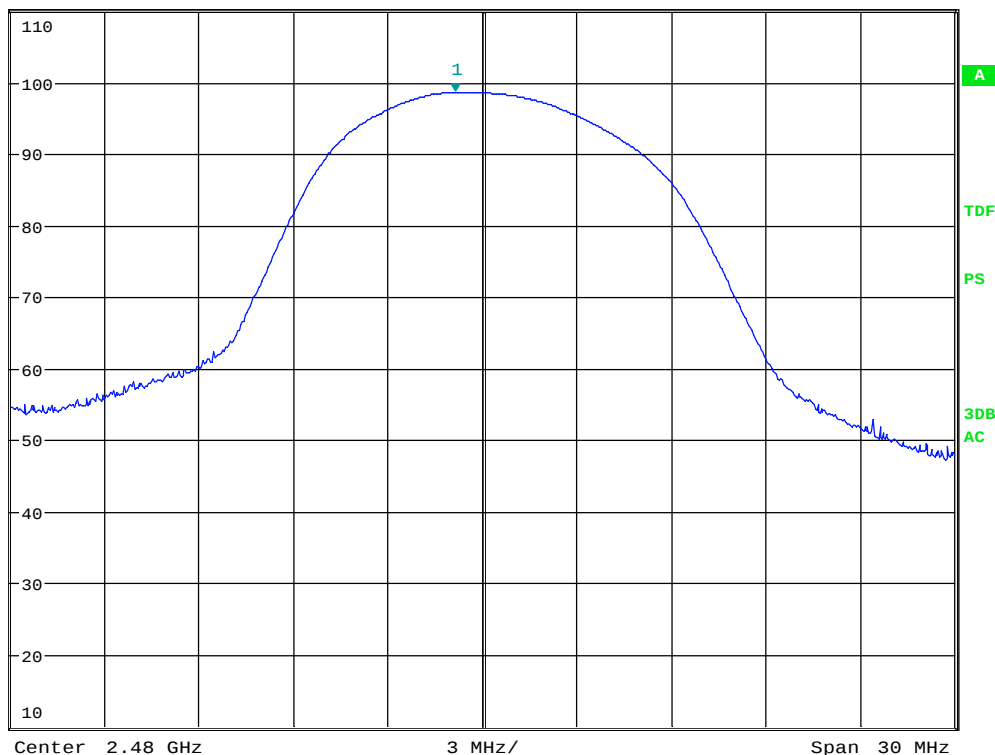

Date: 24.SEP.2019 11:15:40

External antenna: Measured Field Strength, VP, ch2480MHz

3.6 Conducted Emissions at Antenna Connector

Para. No.: 15.247 (d)

ISED Canada RSS-247 Issue 2, Clause 5.5

Measurement procedure: ANSI C63.10-2013 Clause 11.11

Test Results: Complies

Carrier Frequency	Highest Value (dBc)	Margin (dB)	Verdict
2405 MHz	58	>30	Pass
2440 MHz	57	>30	Pass
2480 MHz	56	>30	Pass

Measured with Peak Detector


RF conducted power to 25 GHz: see attached plots.

Limit

Peak measurement	RMS averaging
20 dBc or more in 100 kHz bandwidth	30 dBc or more in 100 kHz bandwidth


Detector type shall be the same as used for measuring Output Power.

Attenuation below the general limits specified in part 15.209(a) is not required.

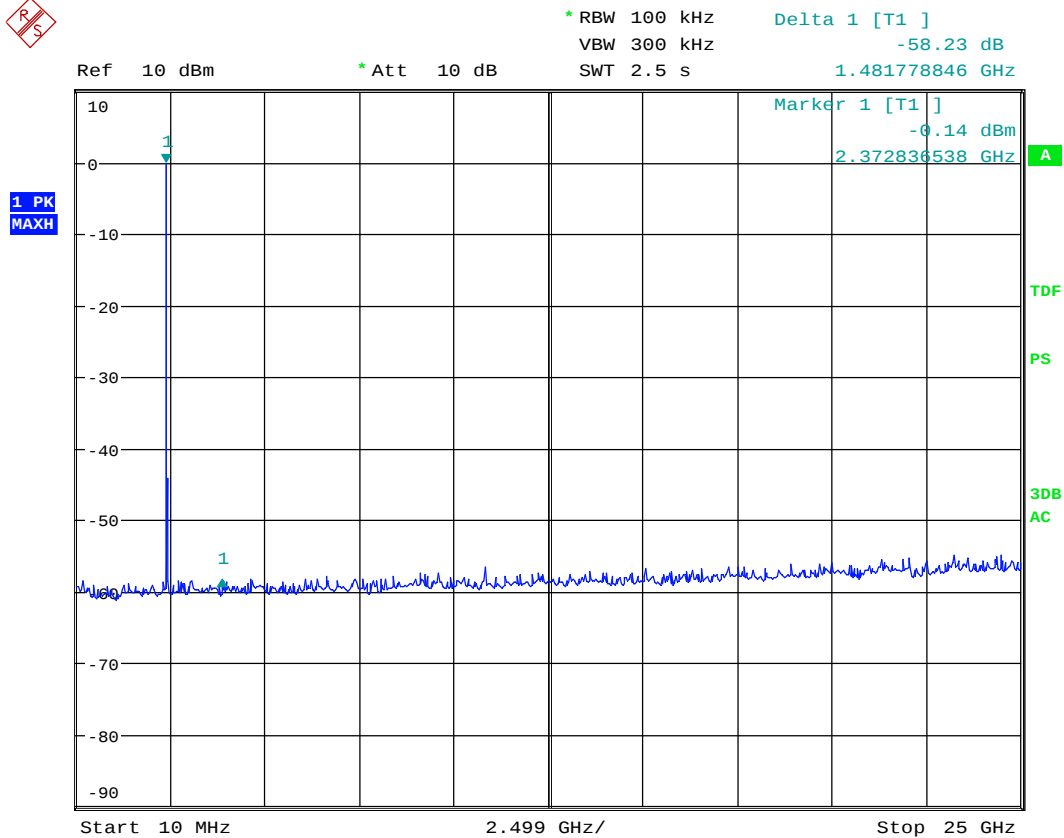


Date: 24.SEP.2019 13:39:45

Conducted spurious emissions, 10MHz - 25GHz, ch2405MHz

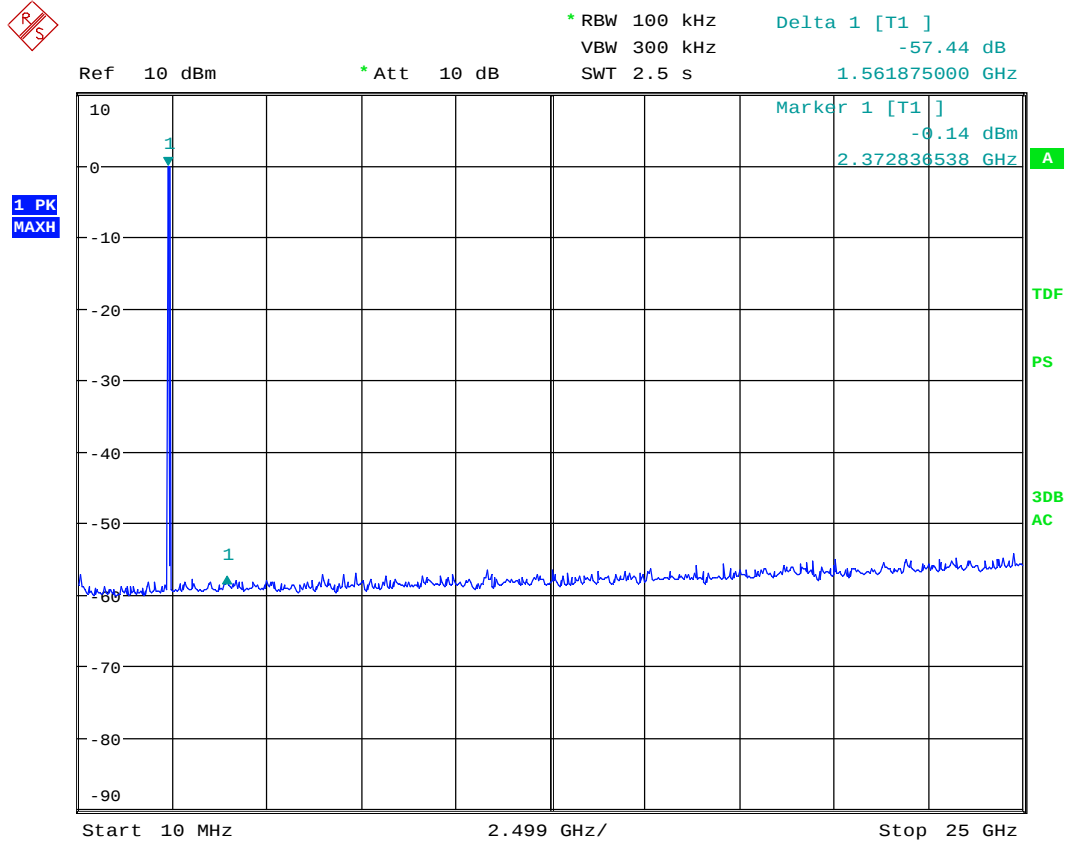

Date: 24.SEP.2019 13:40:33

Conducted spurious emissions, 10MHz - 5GHz, ch2440MHz

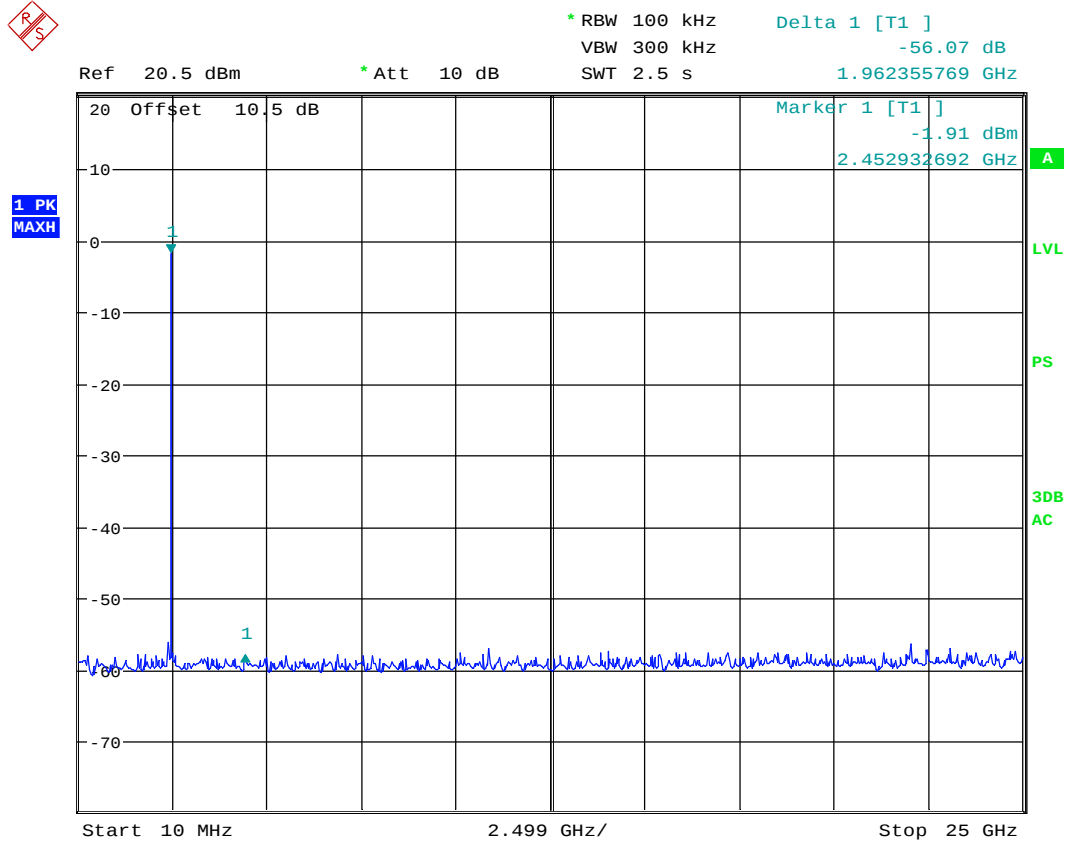

Date: 24.SEP.2019 13:50:18

Conducted spurious emissions, 10MHz - 25GHz, ch2480MHz

3.7 Restricted Bands of operation

Restricted Bands of operation for FCC and ISSED are defined in FCC Part 15.205 and ISSED RSS-GEN, Issue 4 clause 8.10.

Generally, no fundamentals are allowed in the restricted bands and all emissions must comply with the limits in FCC 15.209 or RSS-GEN, Issue 5, clause 8.9.

FCC (MHz)	ISED (MHz)	FCC (GHz)	ISED (GHz)
0.090-0.110		0.96-1.24 1.3-1.427	0.96-1.427
0.495-0.505		1.435-1.6265	
2.1735-2.1905		1.6455-1.6465	
	3.020-3.026	1.660-1.710	
4.125-4.128		1.7188-1.7222	
4.17725-4.17775		2.2-2.3	
4.20725-4.20775		2.31-2.39	
	5.677-5.683	2.4835-2.5	
6.215-6.218		2.69-2.9	2.655-2.9
6.26775-6.26825		3.26-3.267	
6.31175-6.31225		3.332-3.339	
8.291-8.294		3.3458-3.358	
8.362-8.366		3.6-4.4	3.5-4.4
8.37625-8.38675		4.5-5.15	
8.41425-8.41475		5.35-5.46	
12.29-12.293		7.25-7.75	
12.51975-12.52025		8.025-8.5	
12.57675-12.57725		9.0-9.2	
13.36-13.41		9.3-9.5	
16.42-16.423		10.6-12.7	
16.69475-16.69525		13.25-13.4	
16.80425-16.80475		14.47-14.5	
25.5-25.67		15.35-16.2	
37.5-38.25		17.7-21.4	
73-74.6		22.01-23.12	
74.8-75.2		23.6-24.0	
108-121.94 123-138	108-138	31.2-31.8	
149.9-150.05		36.43-36.5	
156.52475-156.52525		Above 38.6	
156.7-156.9			
162.0125-167.17			
167.72-173.2			
240-285			
322-335.4			
399.9-410			
608-614			

Frequencies in **Bold** text are specific for FCC or ISSED, all other frequencies are common.

3.8 Spurious Emissions (Radiated)

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3 / 8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Measurement Data:

Band-Edge: Internal antenna

	Measured field strength (dB μ V/m)		Limit	Margin	
	2390 MHz	2483.5 MHz	dB μ V/m	dB	
Peak Detector	46.87	72.39	74	27.13	1.61
Average Detector	/	/	54	/	/
Average with Duty Cycle correction	/	53.22	54	/	0.78

Band-Edge: External antenna


	Measured field strength (dB μ V/m)		Limit	Margin	
	2390 MHz	2483.5 MHz	dB μ V/m	dB	
Peak Detector	44.26	67.98	74	29.74	6.02
Average Detector	/	/	54	/	/
Average with Duty Cycle correction	/	48.81	54	/	5.19

See attached plots.

Duty Cycle Correction Factor Calculation:

The maximum duty cycle calculation is given by manufacturer in the operational description is 11%

Duty Cycle Correction factor = $-20 \times \log(\text{Duty Cycle}) = -19.17 \text{ dB}$

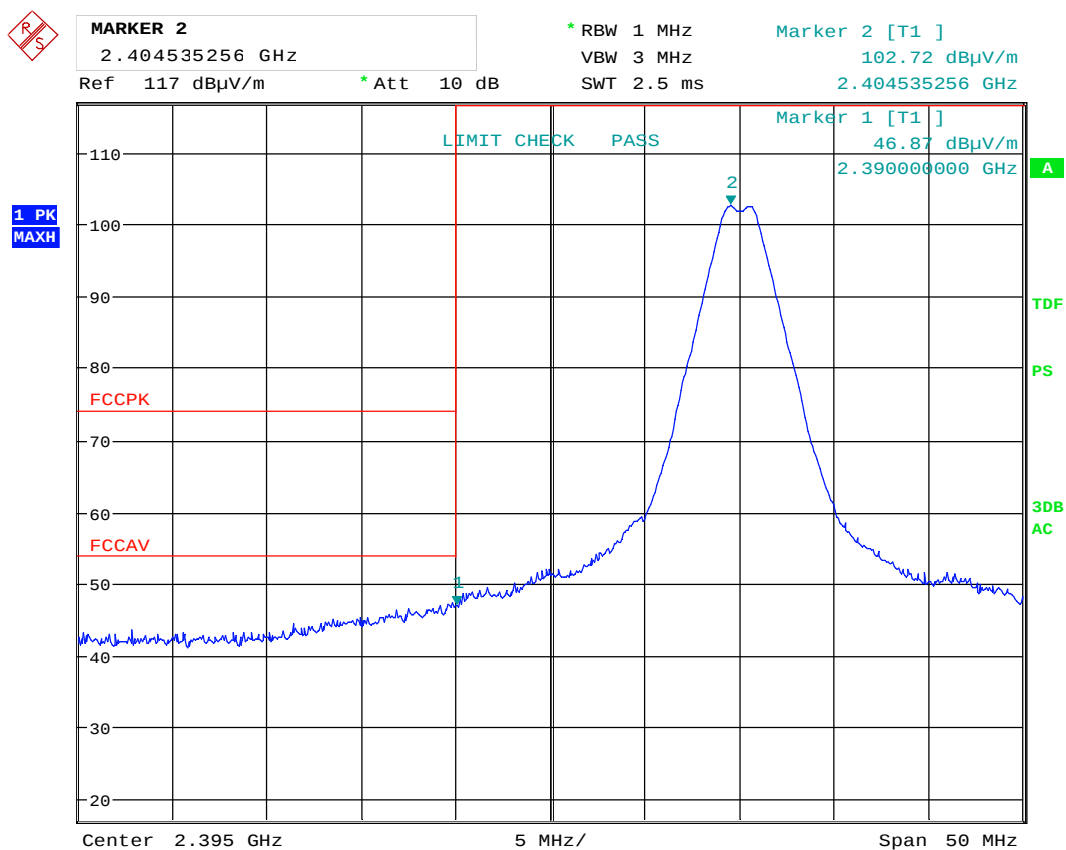

Date: 24.SEP.2019 09:25:19

Internal antenna: Lower Band Edge, PK , ch2405MHz



MARKER 2

2.4835 GHz

Ref 110 dBμV/m

* Att 10 dB

* RBW 1 MHz

VBW 3 MHz


SWT 2.5 ms

Marker 2 [T1]

72.39 dBμV/m

2.483500000 GHz

1 PK
MAXH

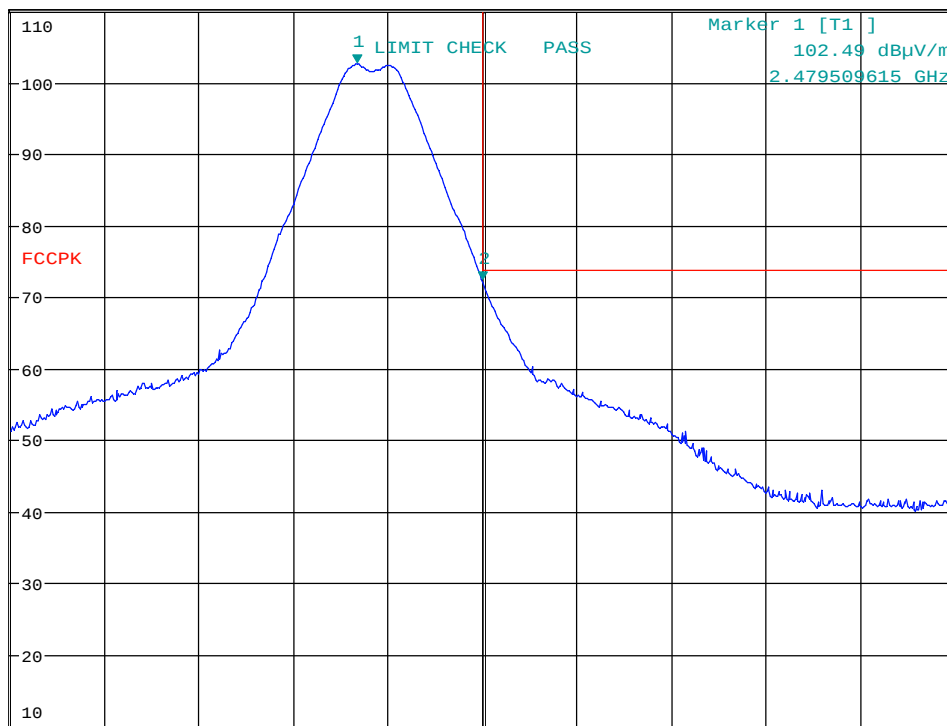


Center 2.4835 GHz

3 MHz/

Span 30 MHz


Date: 24.SEP.2019 10:34:17

Internal antenna: Upper band Edge, PK, ch2480MHz

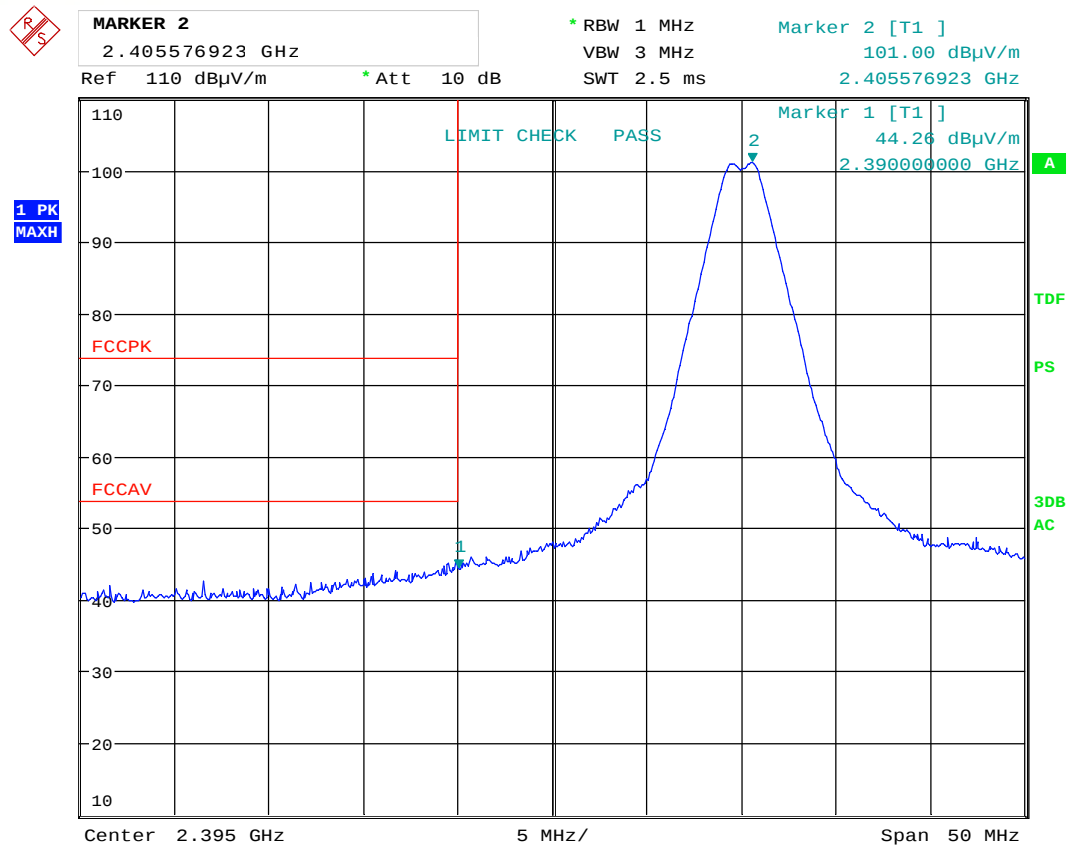

Date: 24.SEP.2019 12:14:54

External antenna: Lower Band Edge, PK , ch2405MHz

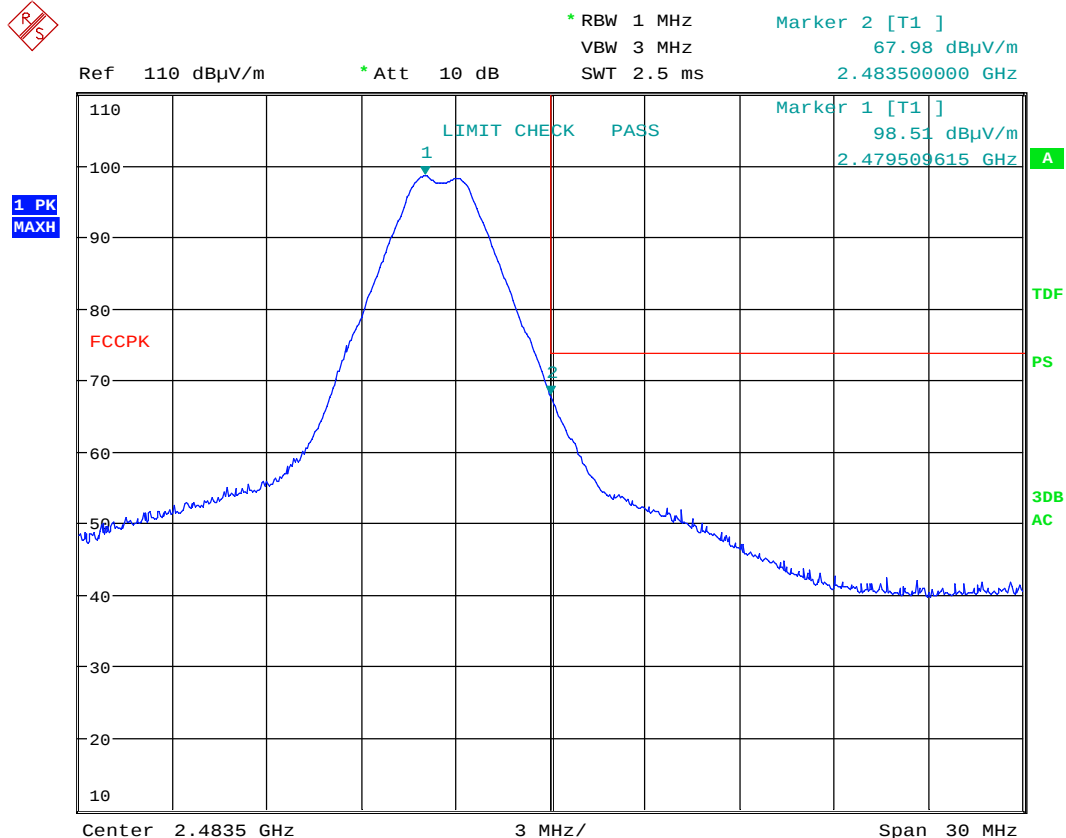

Date: 24.SEP.2019 12:25:57

External antenna: Upper Band Edge, PK, ch2480MHz

Radiated emission 30 – 1000 MHz.

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Detector: Quasi-Peak

Measuring distance 3 m

Tested in TX mode with PoE

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
58.426950	30.82	40.00	9.18	1000.0	120.000	100.0	V	151.0
875.105750	40.28	46.00	5.72	1000.0	120.000	100.0	H	153.0

Tested in TX mode with 12Vdc and ethernet

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
875.105900	40.11	46.00	5.89	1000.0	120.000	100.0	H	154.0
1000.000000	51.77	54.00	3.33	1000.0	120.000	206.0	V	230.0


See attached plots

Requirements/Limit


FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, Clause 8.9 @ frequencies defined in clause 8.10	
	Radiated emission limit @3 meters	
Frequency (MHz)	Quasi Peak (µV/m)	Quasi Peak (dBµV/m)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

The limit above 1000 MHz is specified for Average Detector, when the measurement is performed with a Peak Detector a Duty-Cycle Correction Factor has to be calculated to find the corresponding Average Detector value.

Full Spectrum

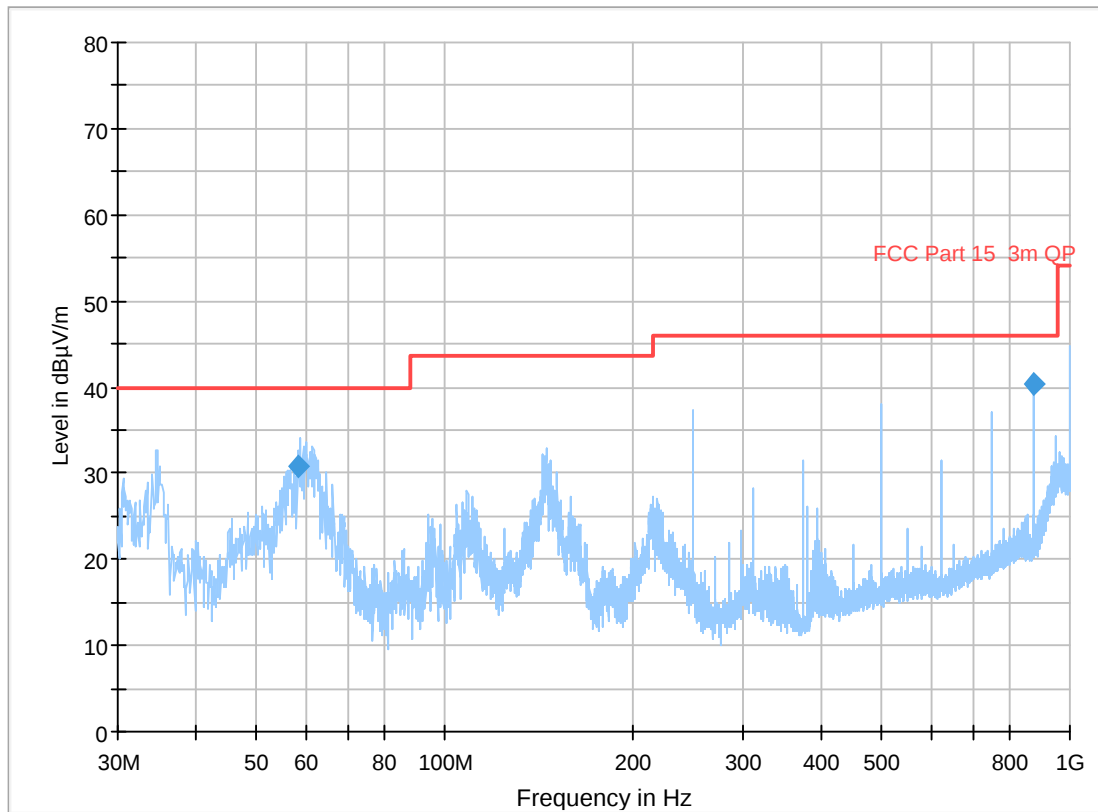

PoE

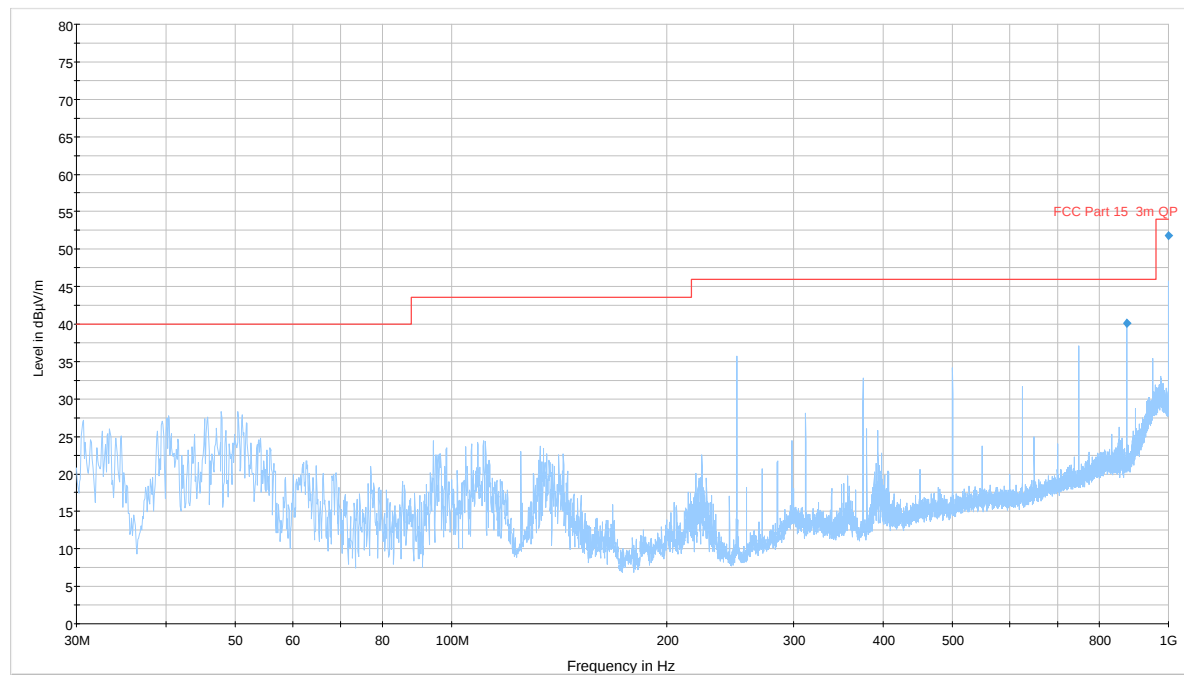

12Vdc and Ethernet

Internal Antenna:

Radiated Emissions, 1-25 GHz

FCC Part 15.209 (a), ISCED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Measuring distance: 3m (1 – 18 GHz), 1m (18 – 25 GHz)

Peak Detector: (Restricted band frequencies)

Frequency	RF channel	Dist. corr. factor	Field strength, Peak Detector, 3m	Limit	Margin
GHz	L,M,H	dB	dBμV/m	dBμV/m	dB
7.32	M	0	57.89	74	16.11
7.44	H	0	54.21	74	19.79
9.62	L	0	48.36	74	25.64
9.76	M	0	53.79	74	20.21
9.92	H	0	51.43	74	22.57
Other freqs	L,M,H	0	None detected	74	>20

Average Detector: (Restricted band frequencies)

Frequency	RF channel	Dist. corr. factor	Field strength, Average Detector, 3m	Duty cycle corr. factor	Limit	Margin
GHz	L,M,H	dB	dBμV/m	dB	dBμV/m	dB
7.32	M	0	38.72	19.17	54	15.28
7.44	H	0	35.04	19.17	54	18.96
9.62	L	0	/	19.17	54	/
9.76	M	0	/	19.17	54	/
9.92	H	0	/	19.17	54	/
Other freqs	L,M,H	/	None detected	/	54	>20

Peak Detector: (Non Restricted band frequencies)

Frequency	RF channel	Dist. corr. factor	Field strength, Peak Detector, 3m	#Limit	Margin
GHz	L,M,H	dB	dBμV/m	dBμV/m	dB
7.215	L	0	59.26	103.8	44.54
Other freqs	L,M,H	0	None detected		>20

20 dB below the highest power level of the fundamental frequency (PK).

*distance correction is included on the plot.

Maximum is obtained in HP


Duty Cycle Correction factor = $-20 \times \log(0.11) = -19.17$ dB (Duty cycle: 11%)

Maximum allowed Duty Cycle Correction: 20 dB

Antenna factor, amplifier gain and cable loss are included in spectrum analyzer "Transducer factor"., See plots.


Requirements/Limit

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, Clause 8.9 @ frequencies defined in clause 8.10	
	Radiated emission limit @3 meters	
Frequency (MHz)	AV (dBμV/m)	Peak (dBμV/m)
Above 1 GHz	54.0	74.0

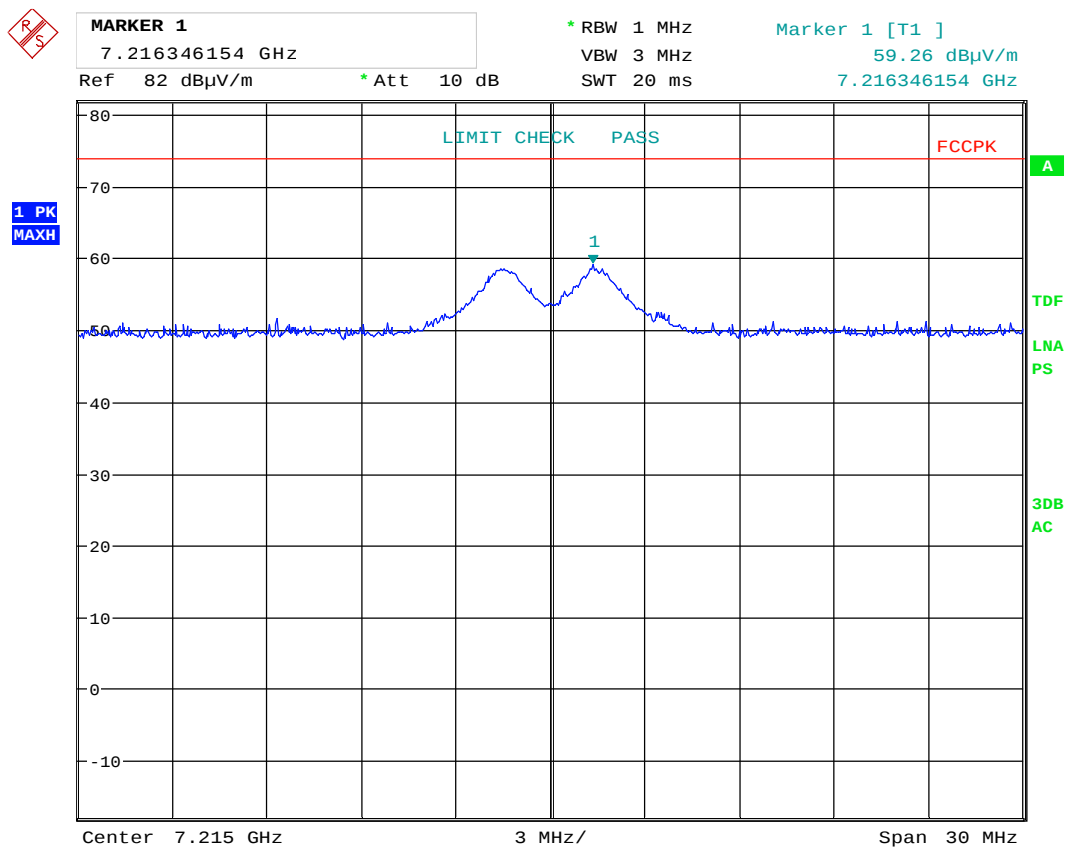

Date: 24.SEP.2019 09:40:26

Internal antenna: Radiated spurious emissions, 7,215GHz, HP, ch2405MHz

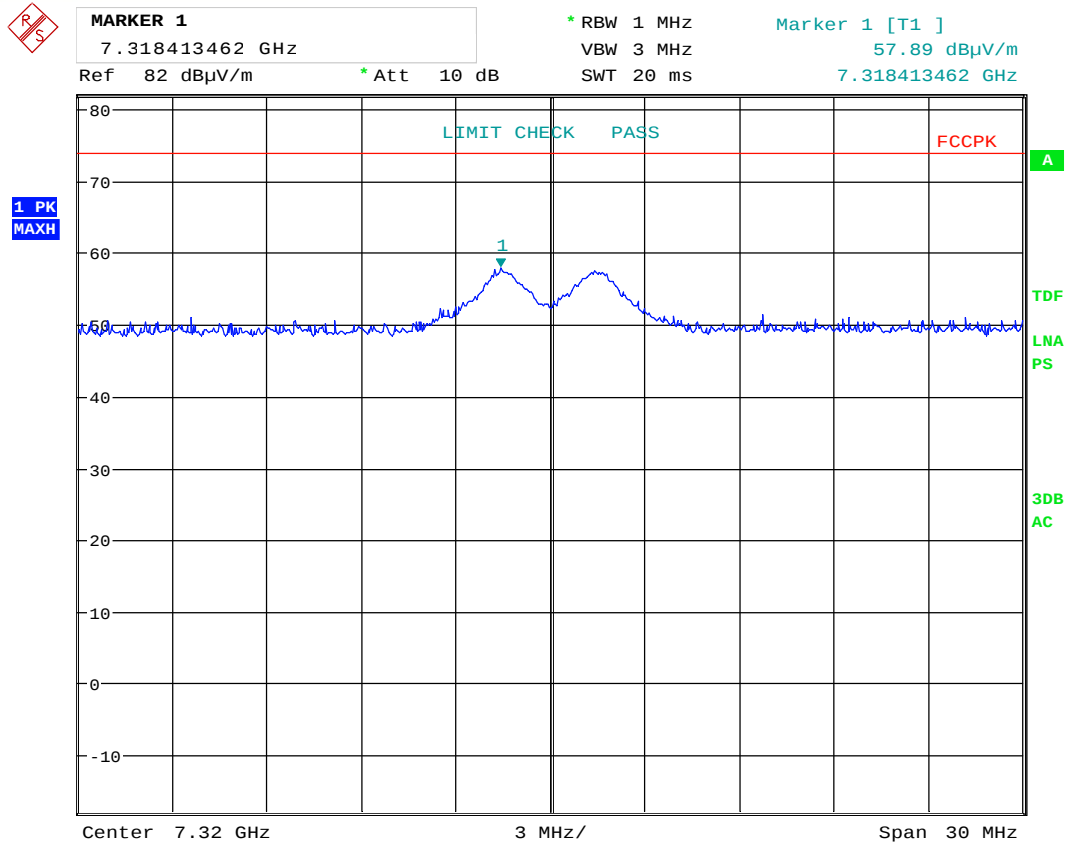

Date: 24.SEP.2019 09:46:21

Internal antenna: Radiated spurious emissions, 7,32GHz, HP, ch2440MHz



MARKER 1

7.441442308 GHz

Ref 82 dBμV/m

* Att 10 dB

* RBW 1 MHz


VBW 3 MHz

SWT 20 ms

Marker 1 [T1]


54.21 dBμV/m

7.441442308 GHz

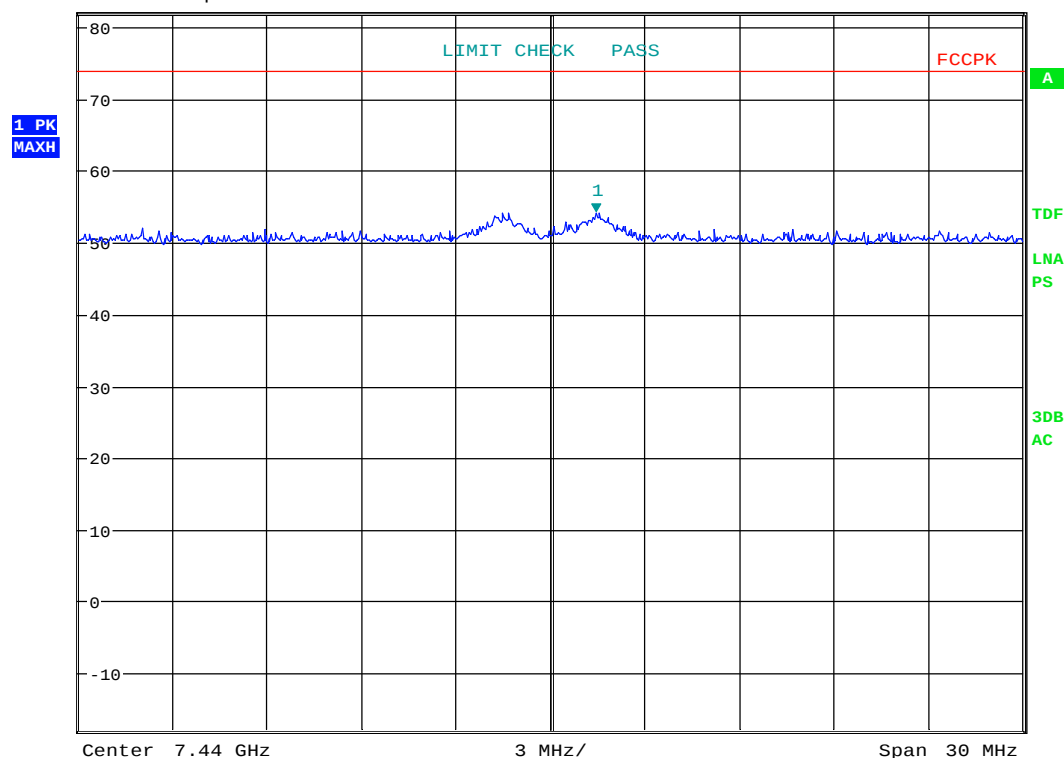


Date: 24.SEP.2019 10:47:53

Internal antenna: Radiated spurious emissions, 7,44GHz, HP, ch2480MHz

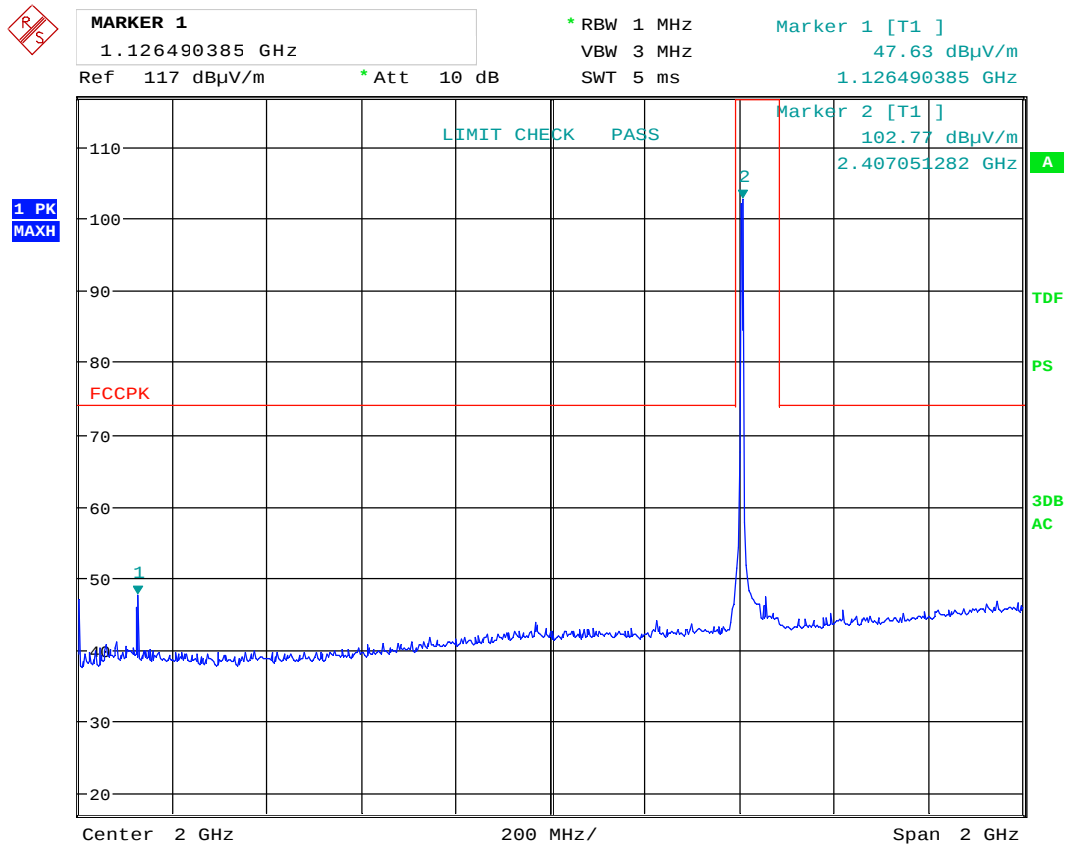


Date: 24.SEP.2019 09:23:09

Internal antenna: Radiated spurious emissions, VP, 1 - 3GHz, ch2405MHz, PK scan

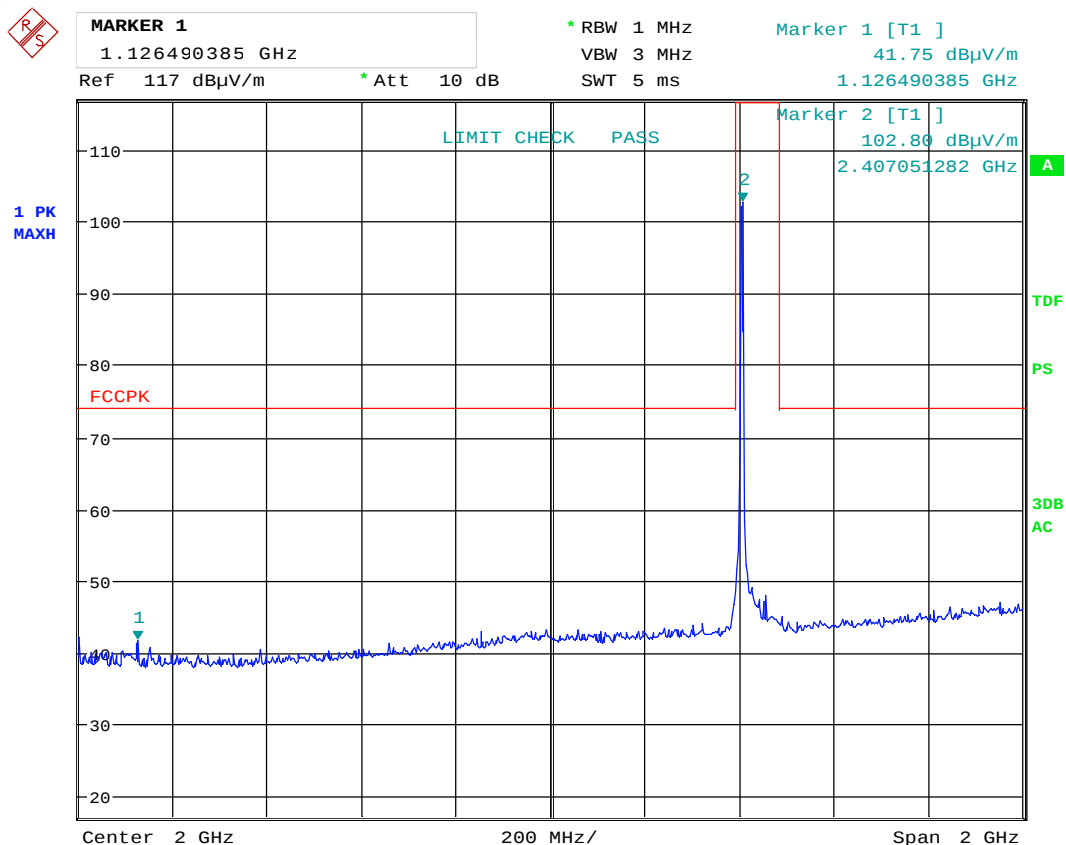


Date: 24.SEP.2019 09:19:39

Internal antenna: Radiated spurious emissions, HP, 1 - 3GHz, ch2405MHz, PK scan

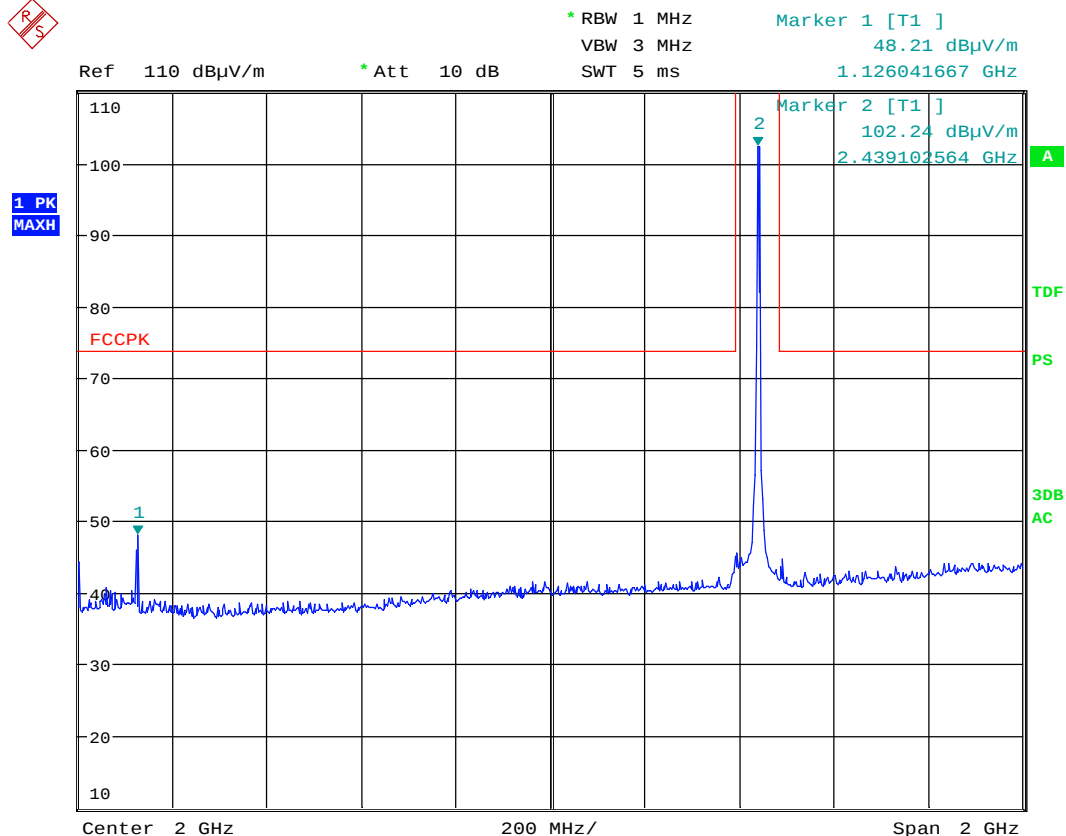

Date: 24.SEP.2019 09:58:42

Internal antenna: Radiated spurious emissions, VP, 1 - 3GHz, ch2440MHz, PK scan

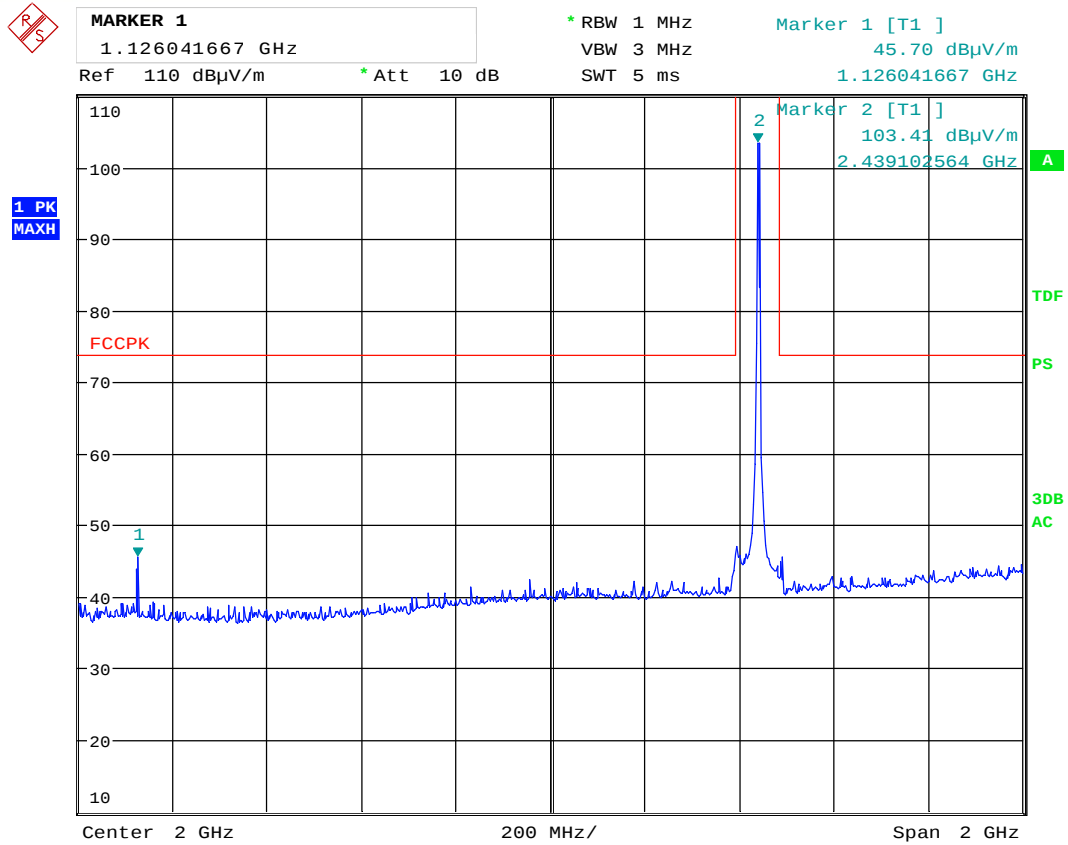


Date: 24.SEP.2019 09:57:10

Internal antenna: Radiated spurious emissions, HP, 1 - 3GHz, ch2440MHz, PK scan




Date: 24.SEP.2019 10:03:24

Internal antenna: Radiated spurious emissions, VP, 1 - 3GHz, ch2480MHz, PK scan

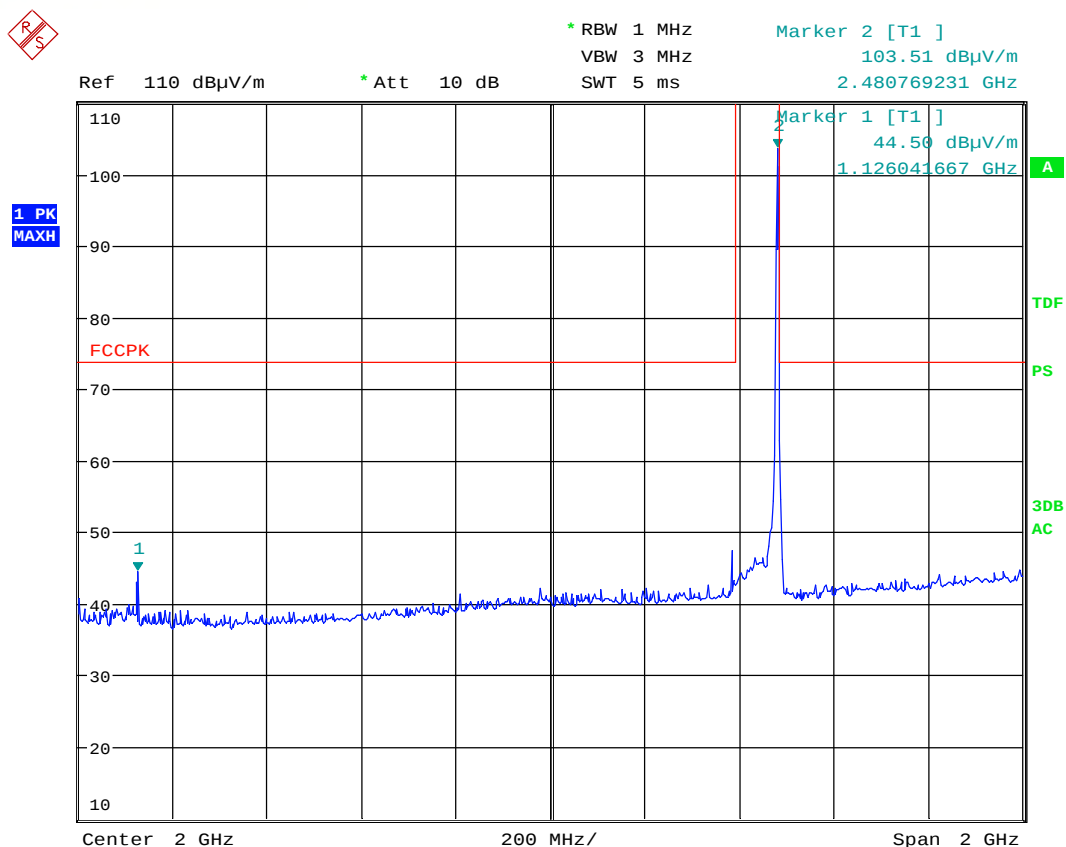

Date: 24.SEP.2019 10:04:22

Internal antenna: Radiated spurious emissions, HP, 1 - 3GHz, ch2480MHz, PK scan

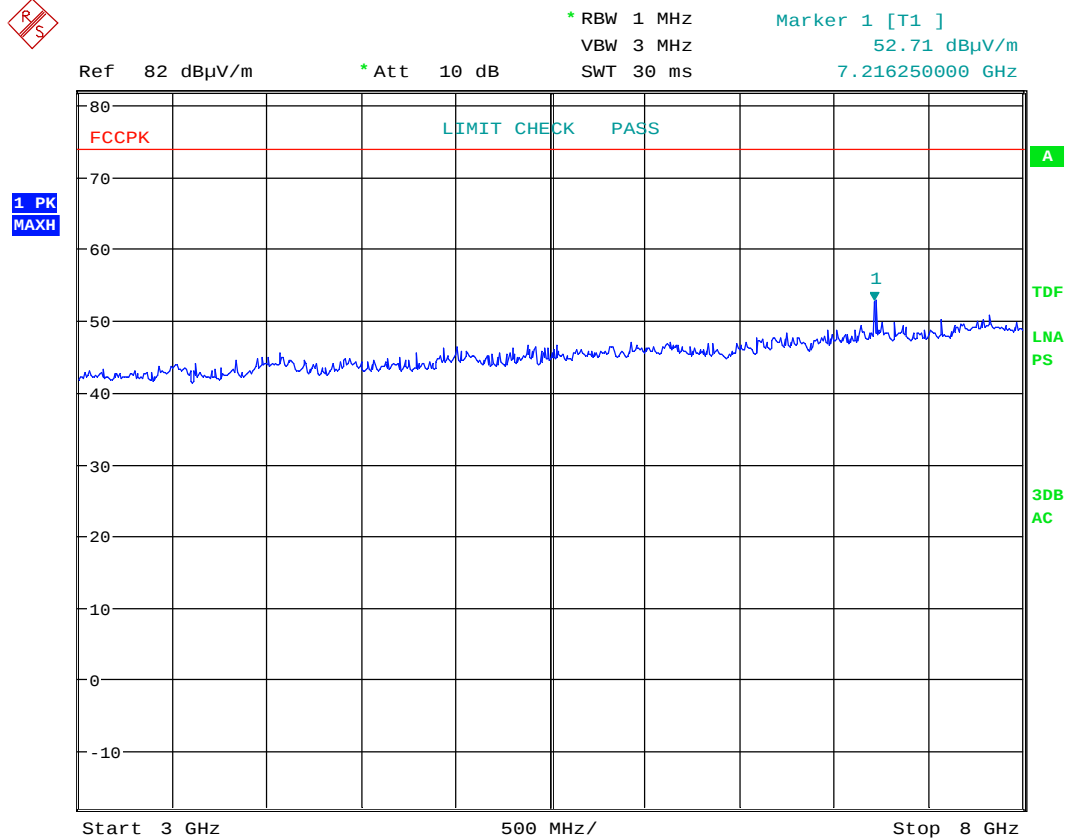

Date: 24.SEP.2019 09:37:14

Internal antenna: Radiated spurious emissions, VP, 3 - 8GHz, ch2405MHz, PK scan



MARKER 1

7.22275641 GHz

Ref 82 dBμV/m

* Att 10 dB

* RBW 1 MHz

VBW 3 MHz


SWT 30 ms

Marker 1 [T1]

58.41 dBμV/m


7.222756410 GHz

1 PK
MAXH

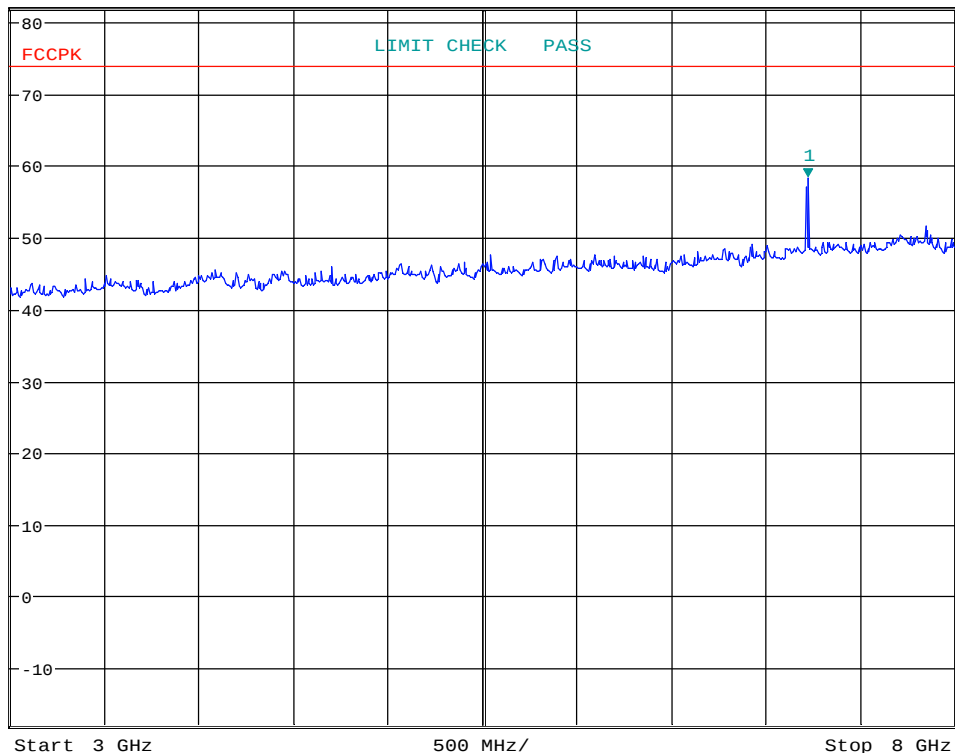

Date: 24.SEP.2019 09:38:59

Internal antenna: Radiated spurious emissions, HP, 3 - 8GHz, ch2405MHz, PK scan

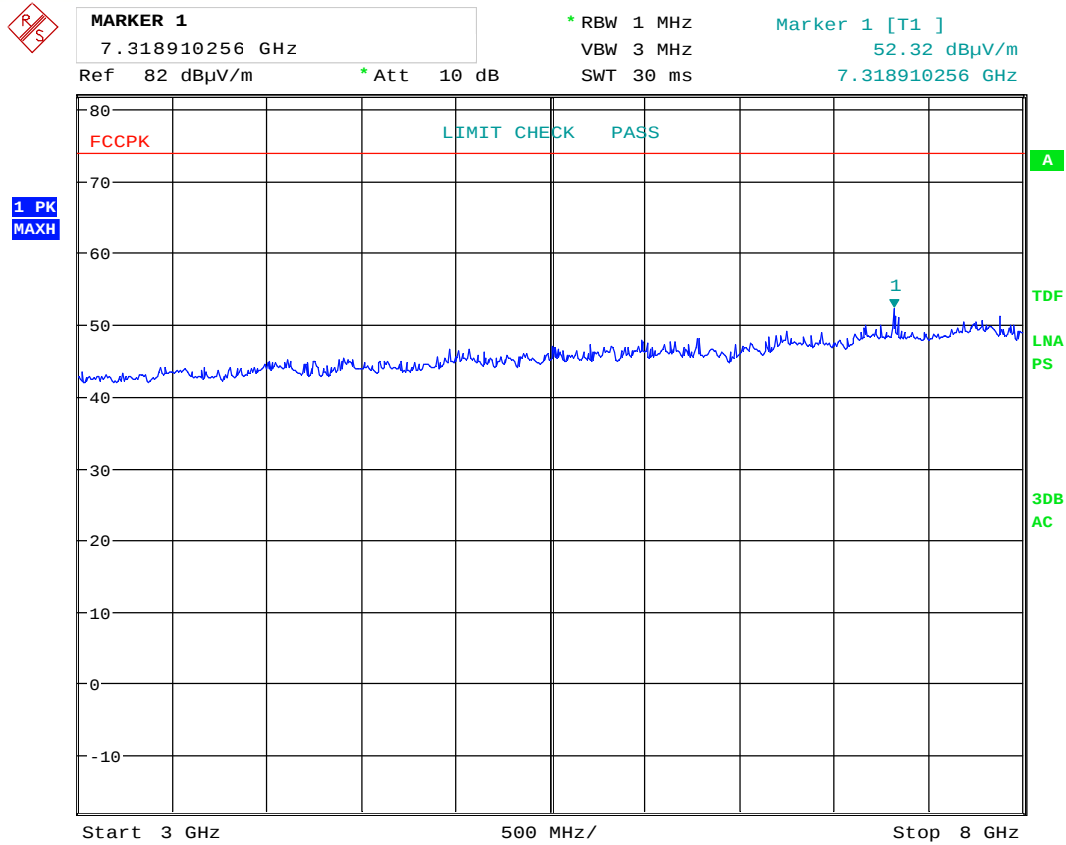

Date: 24.SEP.2019 09:48:40

Internal antenna: Radiated spurious emissions, VP, 3 - 8GHz, ch2440MHz, PK scan



MARKER 1

7.318910256 GHz

Ref 82 dBμV/m

* Att 10 dB

* RBW 1 MHz

VBW 3 MHz


SWT 30 ms

Marker 1 [T1]

55.60 dBμV/m

7.318910256 GHz

1 PK
MAXH

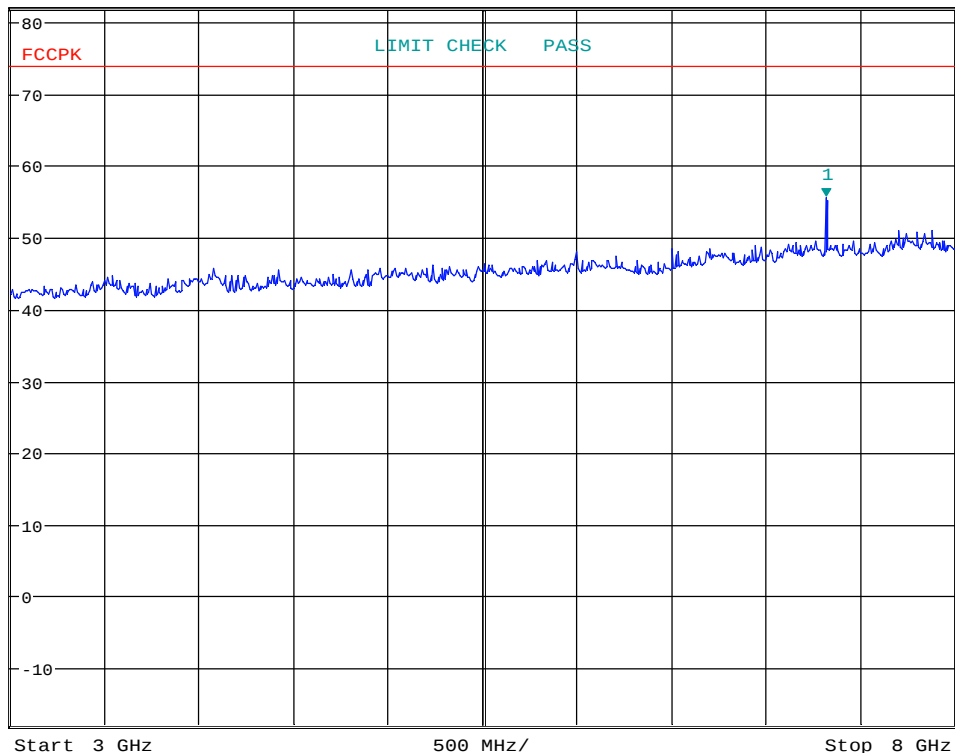

Date: 24.SEP.2019 09:47:08

Internal antenna: Radiated spurious emissions, HP, 3 - 8GHz, ch2440MHz, PK scan



MARKER 1

7.439102564 GHz

Ref 82 dB μ V/m

* Att 10 dB

* RBW 1 MHz

VBW 3 MHz


SWT 30 ms

Marker 1 [T1]

51.81 dB μ V/m

7.439102564 GHz

1 PK
MAXH

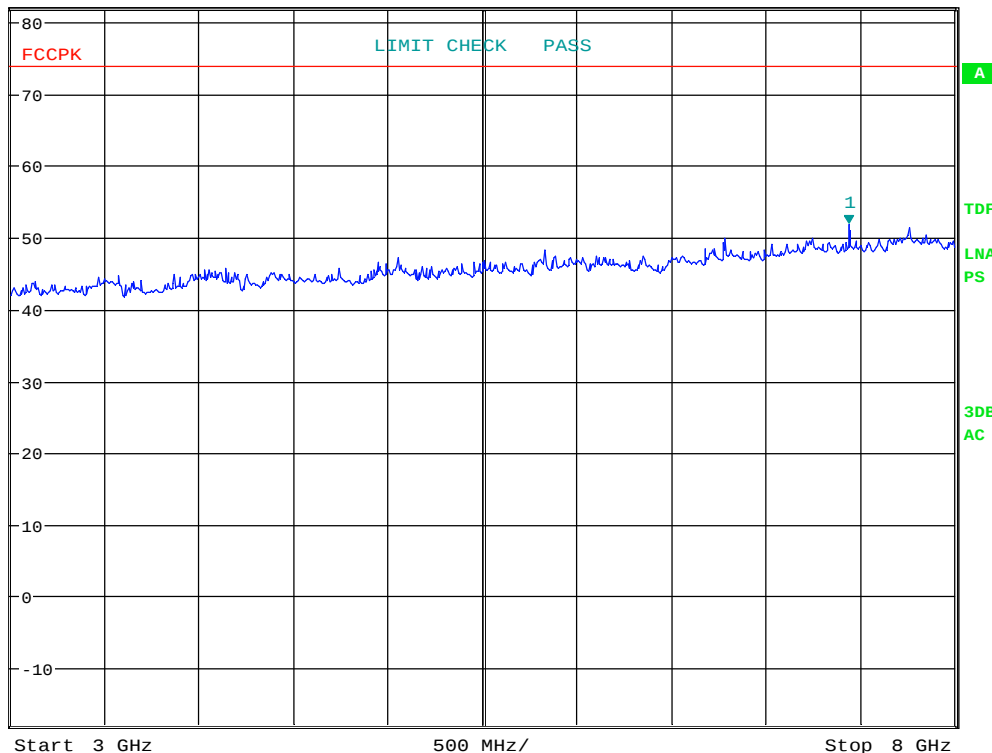

Date: 24.SEP.2019 10:42:06

Internal antenna: Radiated spurious emissions, VP, 3 - 8GHz, ch2480MHz, PK scan



MARKER 1

7.439102564 GHz

Ref 82 dB μ V/m

* Att 10 dB

* RBW 1 MHz

VBW 3 MHz


SWT 30 ms

Marker 1 [T1]

51.69 dB μ V/m

7.439102564 GHz

1 PK
MAXH

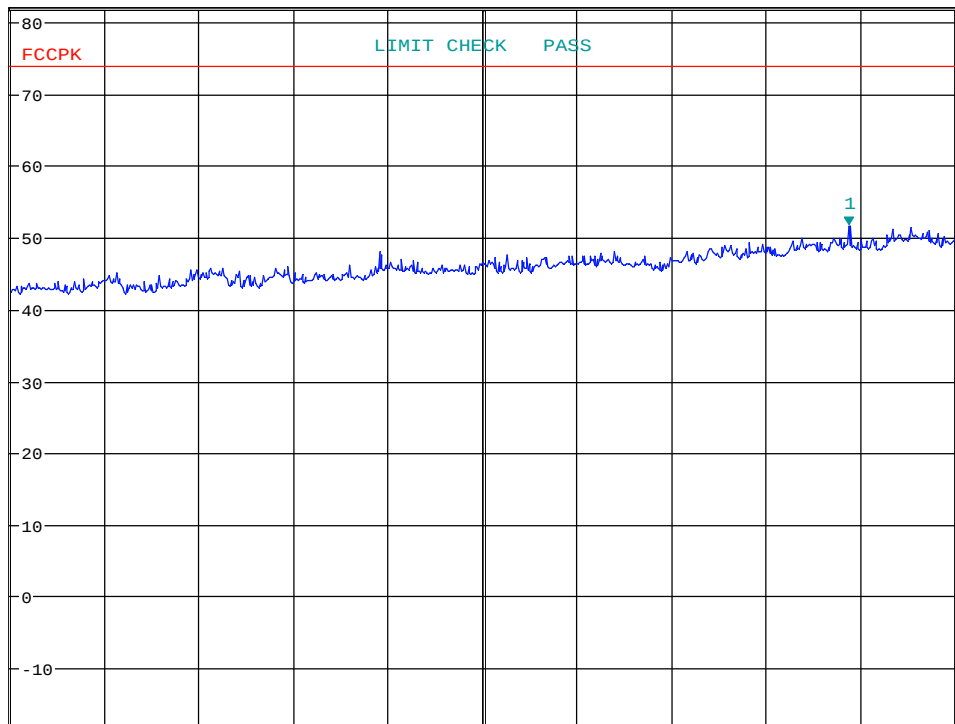


Start 3 GHz

500 MHz/

Stop 8 GHz


Date: 24.SEP.2019 10:44:16

Internal antenna: Radiated spurious emissions, HP, 3 - 8GHz, ch2480MHz, PK scan

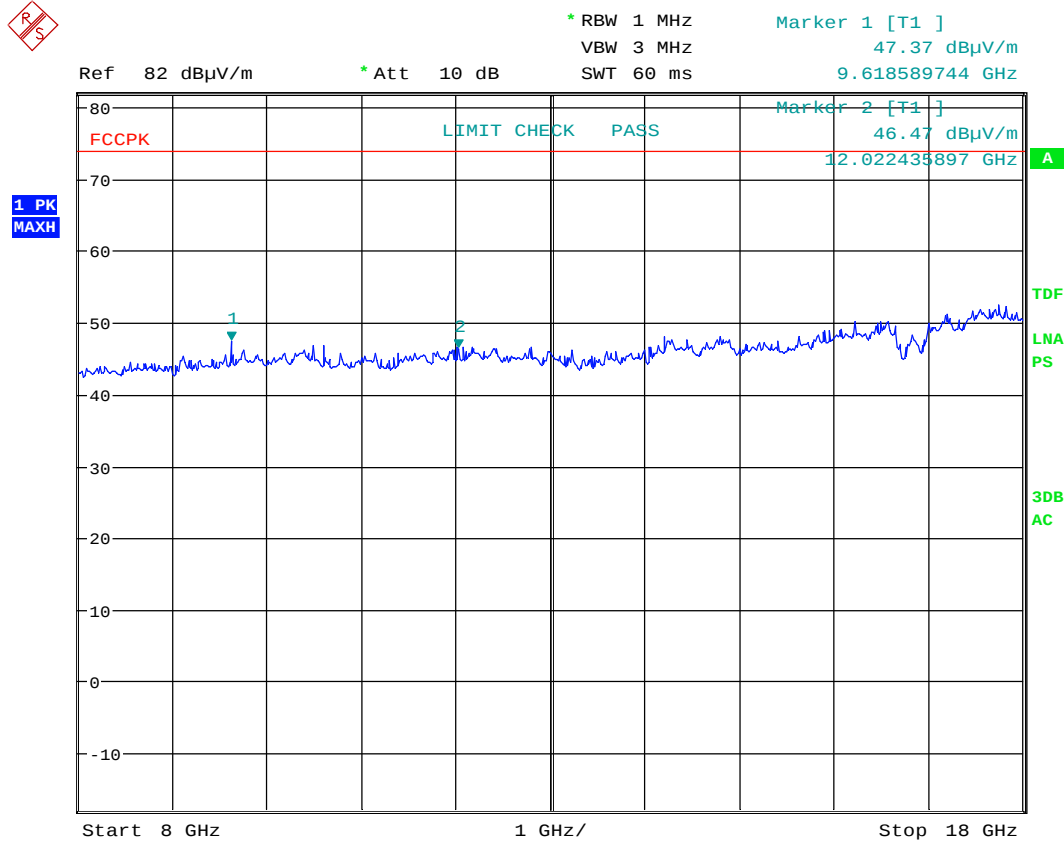

Date: 24.SEP.2019 13:03:42

Internal antenna: Radiated spurious emissions, VP, 8 - 18GHz, ch2405MHz, PK scan

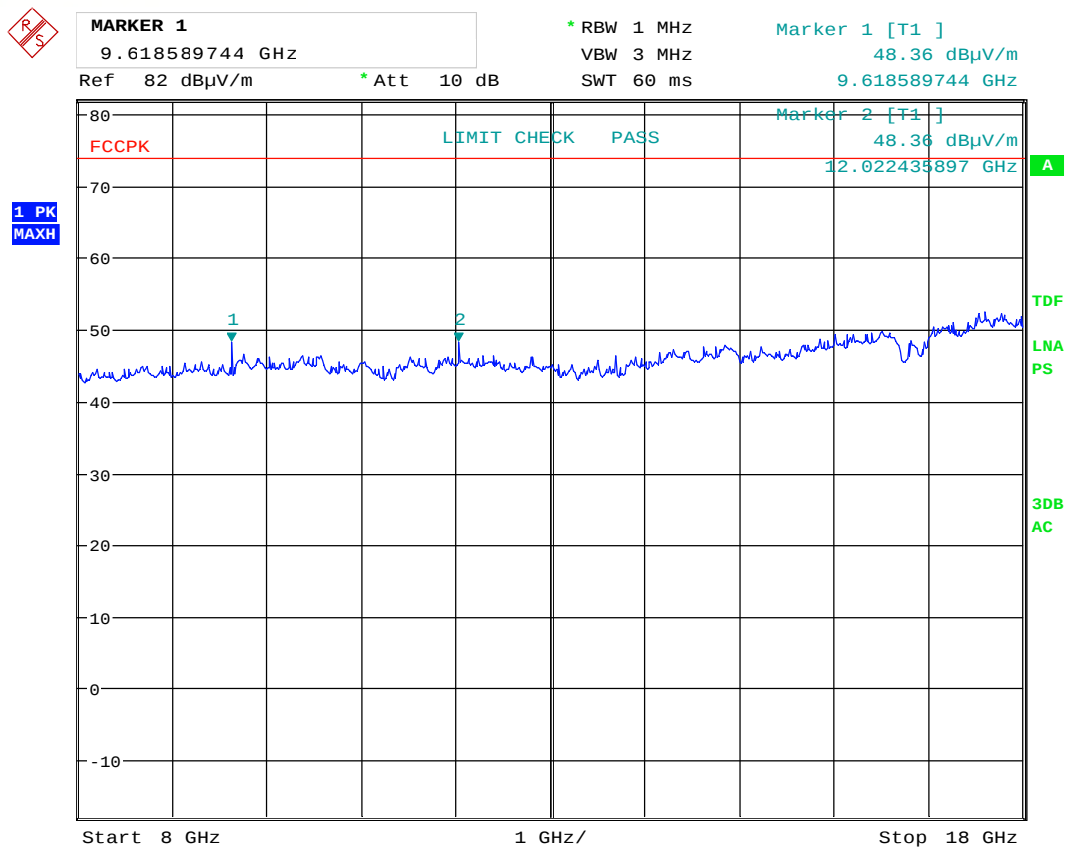

Date: 24.SEP.2019 13:02:28

Internal antenna: Radiated spurious emissions, HP, 8 - 18GHz, ch2405MHz, PK scan



MARKER 1

9.746794872 GHz

Ref 82 dBμV/m

* Att 10 dB

* RBW 1 MHz

VBW 3 MHz


SWT 60 ms

Marker 1 [T1]

48.15 dBμV/m

9.746794872 GHz

1 PK
MAXH

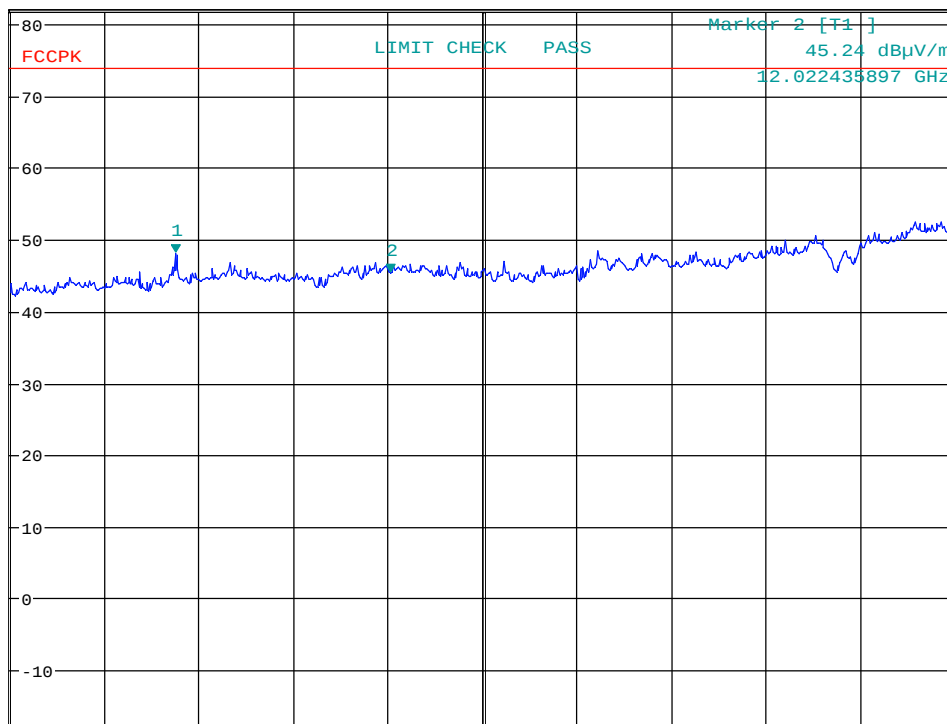


Start 8 GHz

1 GHz/

Stop 18 GHz


Date: 24.SEP.2019 13:09:01

Internal antenna: Radiated spurious emissions, VP, 8 - 18GHz, ch2440MHz, PK scan

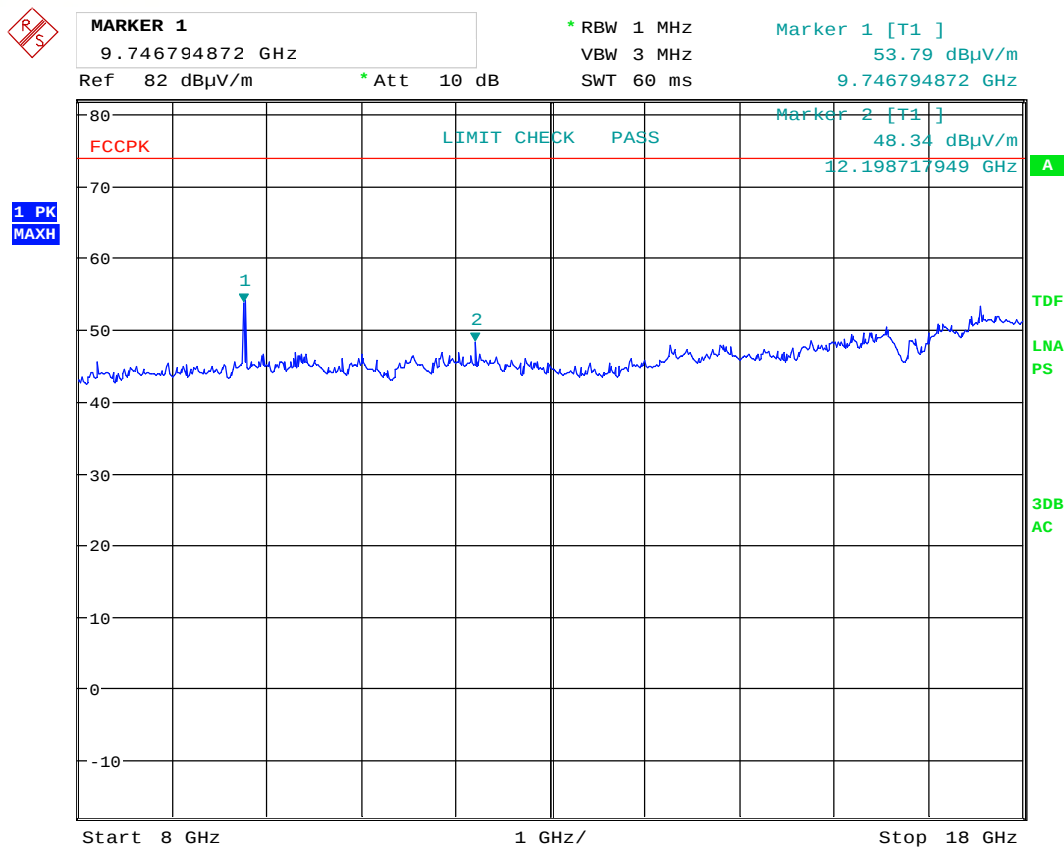


Date: 24.SEP.2019 13:10:31

Internal antenna: Radiated spurious emissions, HP, 8 - 18GHz, ch2440MHz, PK scan

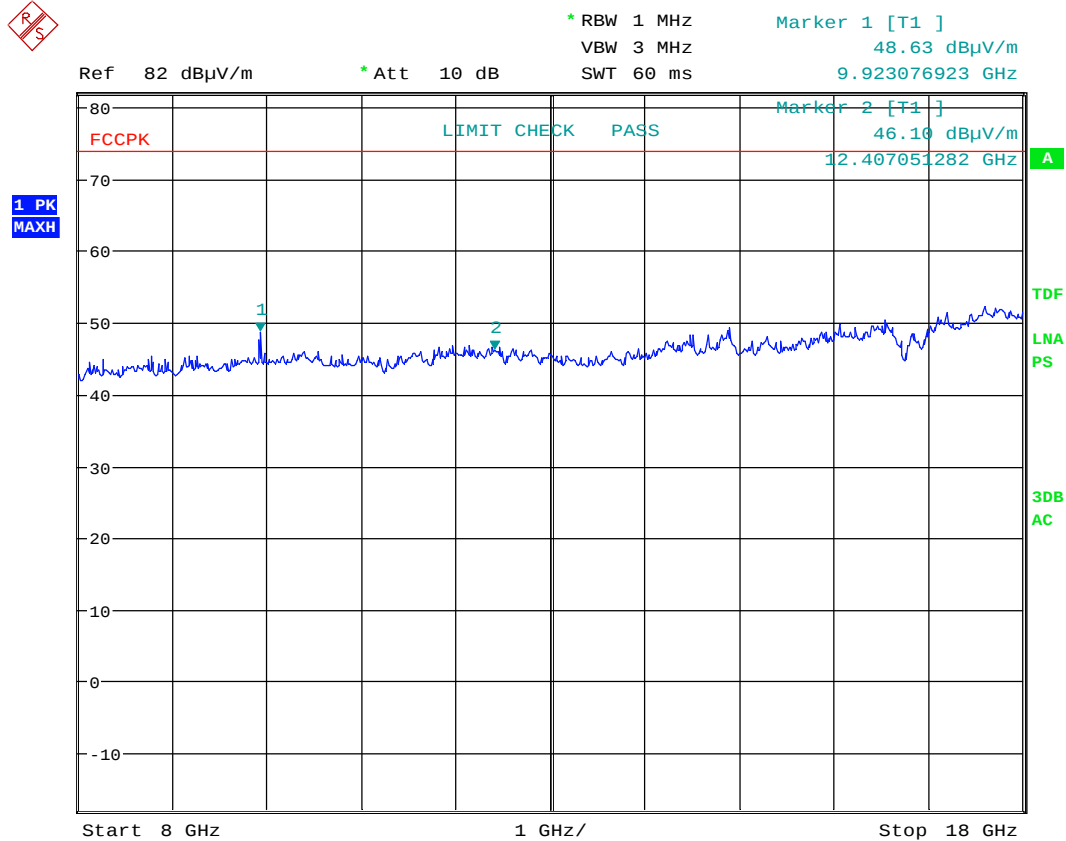


Date: 24.SEP.2019 13:16:02

Internal antenna: Radiated spurious emissions, VP, 8 - 18GHz, ch2480MHz, PK scan

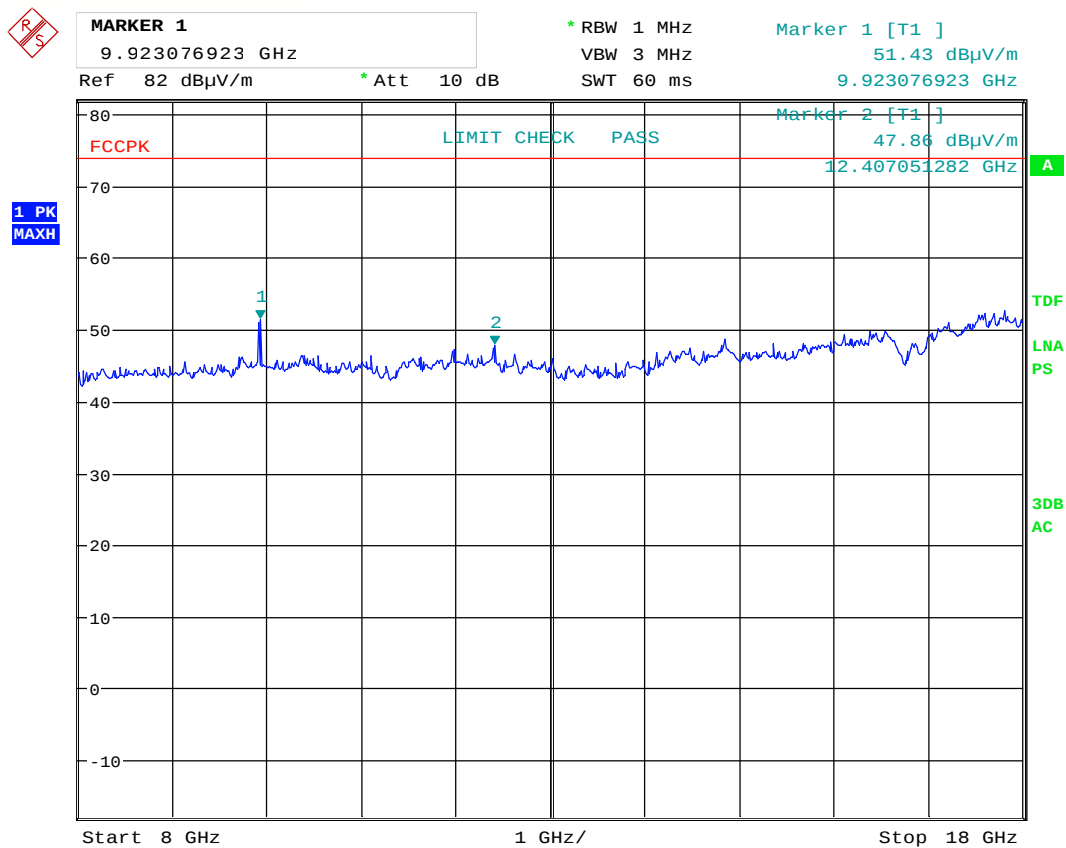

Date: 24.SEP.2019 13:14:43

Internal antenna: Radiated spurious emissions, HP, 8 - 18GHz, ch2480MHz, PK scan

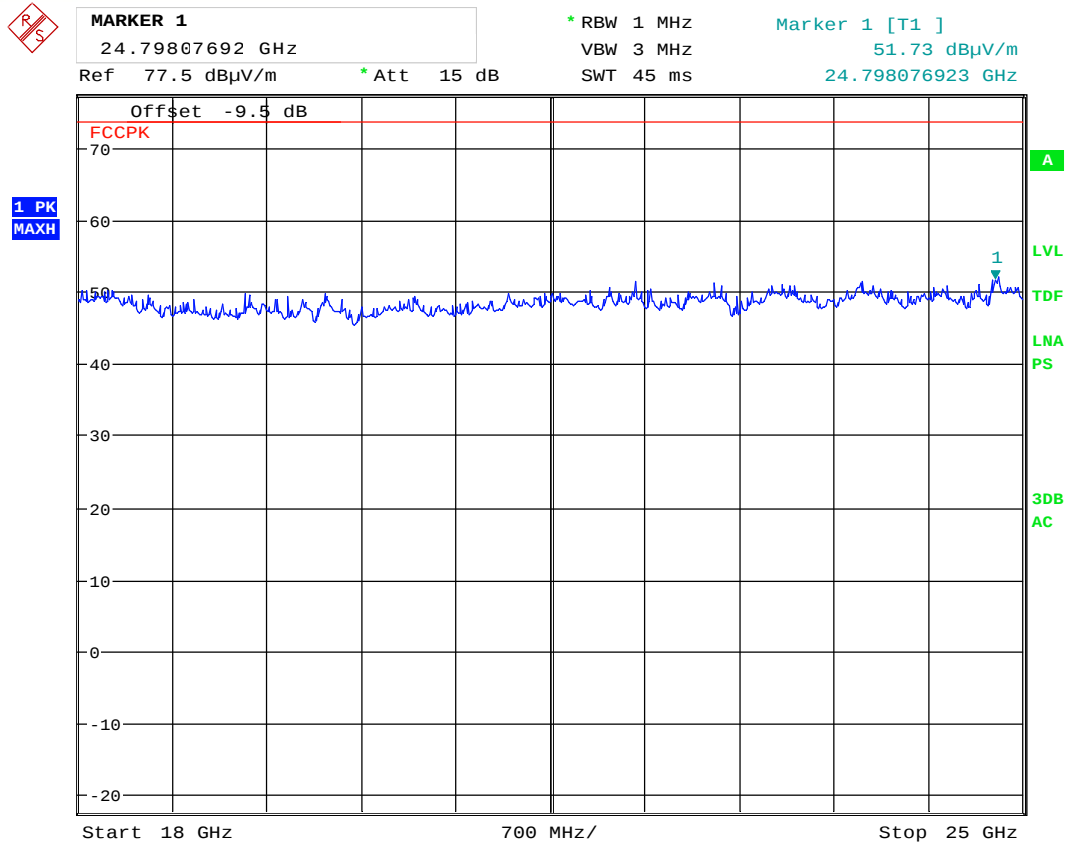

Date: 24.SEP.2019 13:28:52

Internal antenna, Pre-scan, Radiated spurious emissions, VP, 18 - 25GHz



MARKER 1

23.76602564 GHz

Ref 77.5 dBμV/m

* Att 15 dB

* RBW 1 MHz

VBW 3 MHz


SWT 45 ms

Marker 1 [T1]

53.03 dBμV/m

23.766025641 GHz

1 PK
MAXH

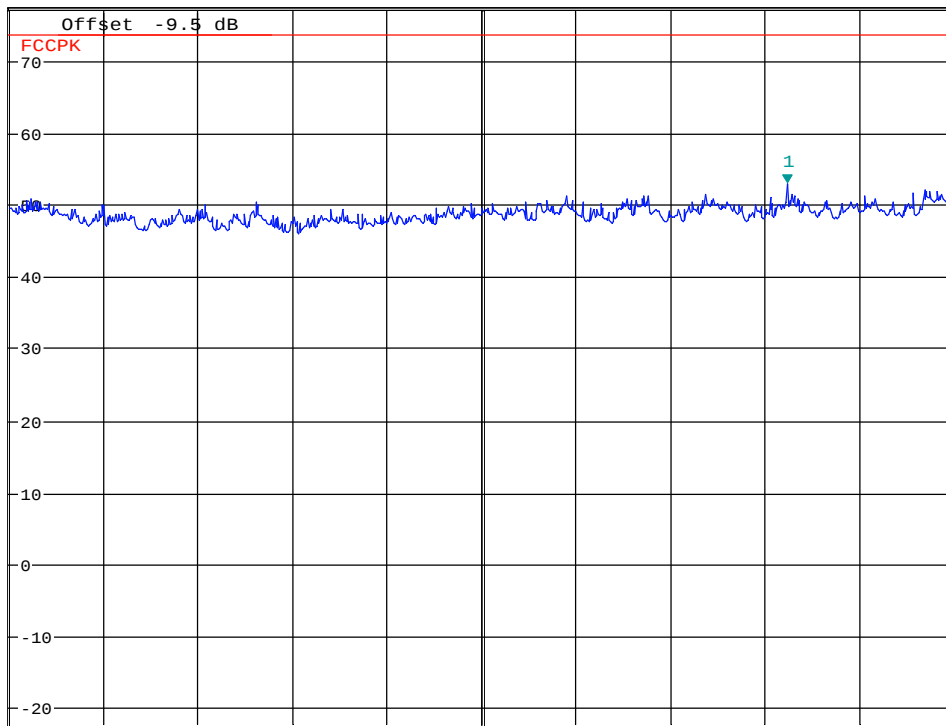

Start 18 GHz

700 MHz/

Stop 25 GHz

Date: 24.SEP.2019 13:28:09

Internal antenna, Pre-scan, Radiated spurious emissions, HP, 18 - 25GHz

External Antenna:

Radiated Emissions, 1-25 GHz

FCC Part 15.209 (a), ISCED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Measuring distance: 3m (1 – 18 GHz), 1m (18 – 25 GHz)

Peak Detector: (Restricted band frequencies)

Frequency	RF channel	Dist. corr. factor	Field strength, Peak Detector, 3m	Limit	Margin
GHz	L,M,H	dB	dB μ V/m	dB μ V/m	dB
7.32	M	0	54.18	74	19.82
7.44	H	0	54.36	74	19.64
9.62	L	0	52.03	74	19.30
9.76	M	0	51.70	74	22.30
9.92	H	0	53.62	74	20.38
14.42	L	0	51.70	74	22.30
Other freqs	L,M,H	0	None detected	74	>20

Average Detector: (Restricted band frequencies)

Frequency	RF channel	Dist. corr. factor	Field strength, Average Detector, 3m	Duty cycle corr. factor	Limit	Margin
GHz	L,M,H	dB	dB μ V/m	dB	dB μ V/m	dB
7.32	M	0	35.01	19.17	54	18.99
7.44	H	0	35.19	19.17	54	18.81
Other freqs	L,M,H	/	None detected	20	54	>20

Peak Detector: (Non Restricted band frequencies)

Frequency	RF channel	Dist. corr. factor	Field strength, Peak Detector, 3m	#Limit	Margin
GHz	L,M,H	dB	dB μ V/m	dB μ V/m	dB
7.215	L	0	61.16	101.1	39.94
Other freqs	L,M,H	0	None detected		>20

20 dB below the highest power level of the fundamental frequency (PK).

*distance correction is included on the plot.

Maximum is obtained in HP (14.42GHz in VP)


Duty Cycle Correction factor = $-20 \times \log(0.11) = -19.17$ dB (Duty cycle: 11%)

Maximum allowed Duty Cycle Correction: 20 dB

Antenna factor, amplifier gain and cable loss are included in spectrum analyzer "Transducer factor"., See plots.

Requirements/Limit

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, Clause 8.9 @ frequencies defined in clause 8.10	
	Radiated emission limit @3 meters	
Frequency (MHz)	AV (dB μ V/m)	Peak (dB μ V/m)
Above 1 GHz	54.0	74.0

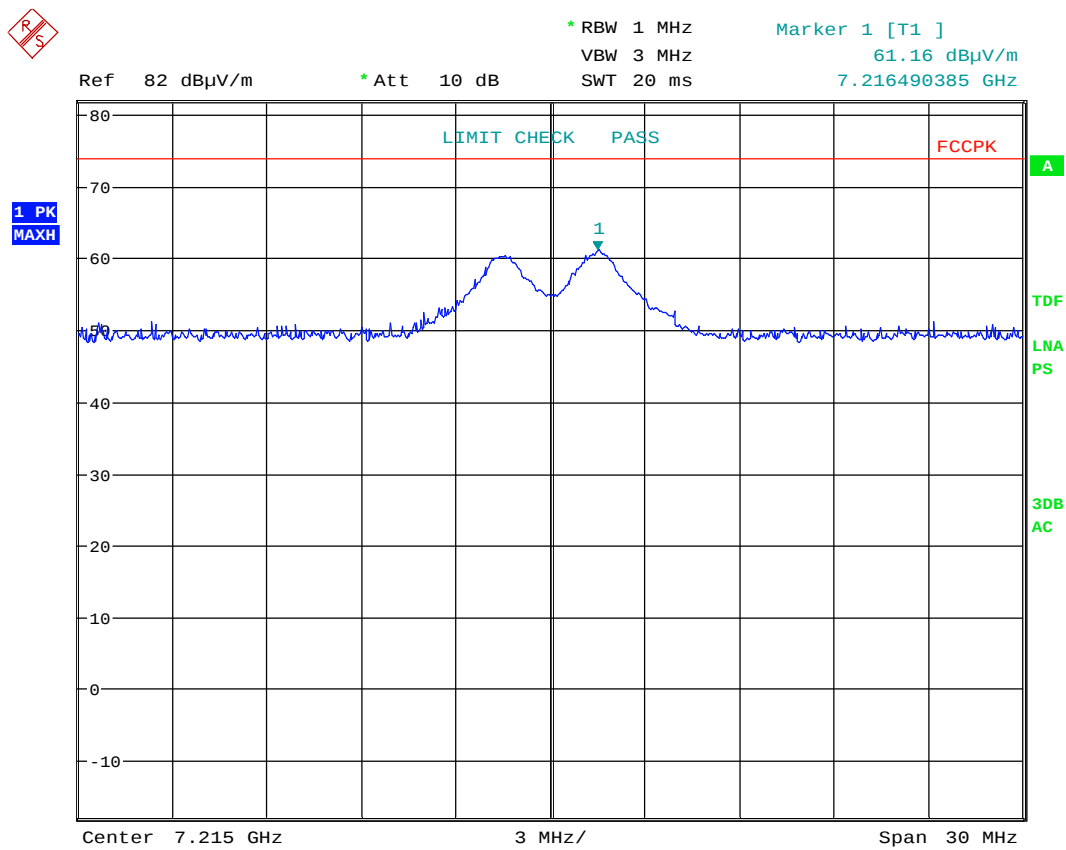

Date: 24.SEP.2019 12:08:59

External Antenna: Radiated spurious emissions, 7,215GHz, HP, ch2405MHz



MARKER 1

7.318365385 GHz

Ref 82 dB μ V/m

* Att 10 dB

* RBW 1 MHz

VBW 3 MHz


SWT 20 ms

Marker 1 [T1]

54.18 dB μ V/m


7.318365385 GHz

1 PK
MAXH

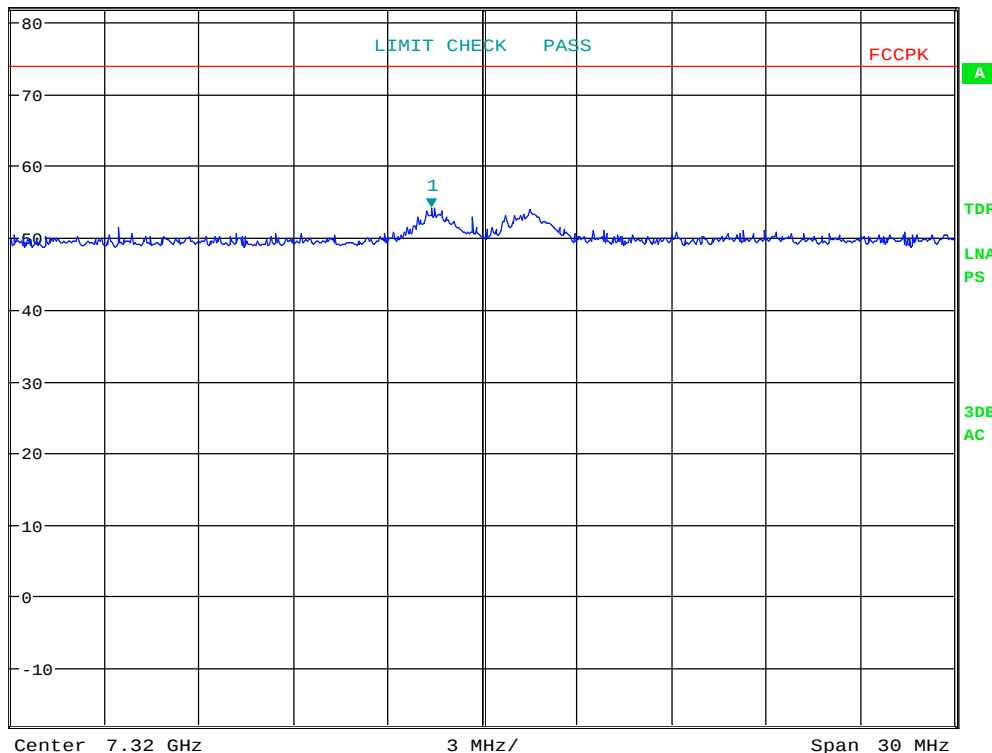


Date: 24.SEP.2019 11:27:24

External Antenna: Radiated spurious emissions, 7,32GHz, HP, ch2440MHz

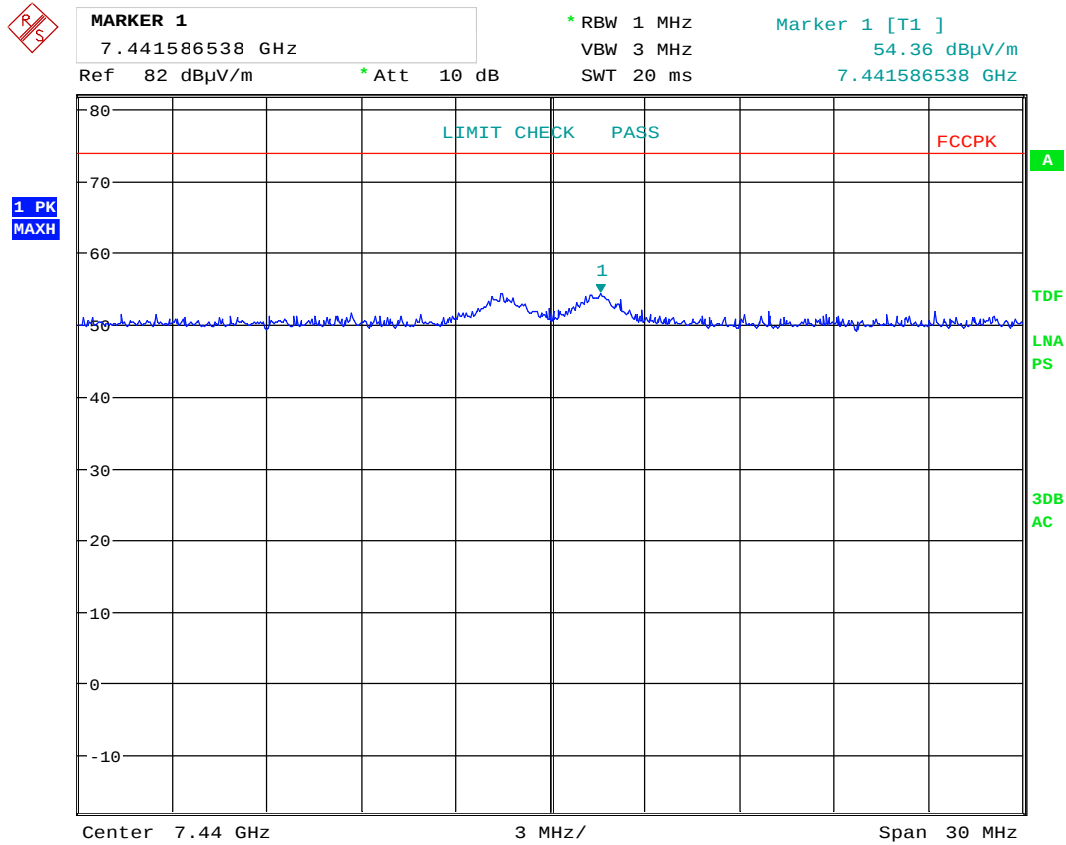


Date: 24.SEP.2019 11:02:38

External Antenna: Radiated spurious emissions, 7,44GHz, HP, ch2480MHz

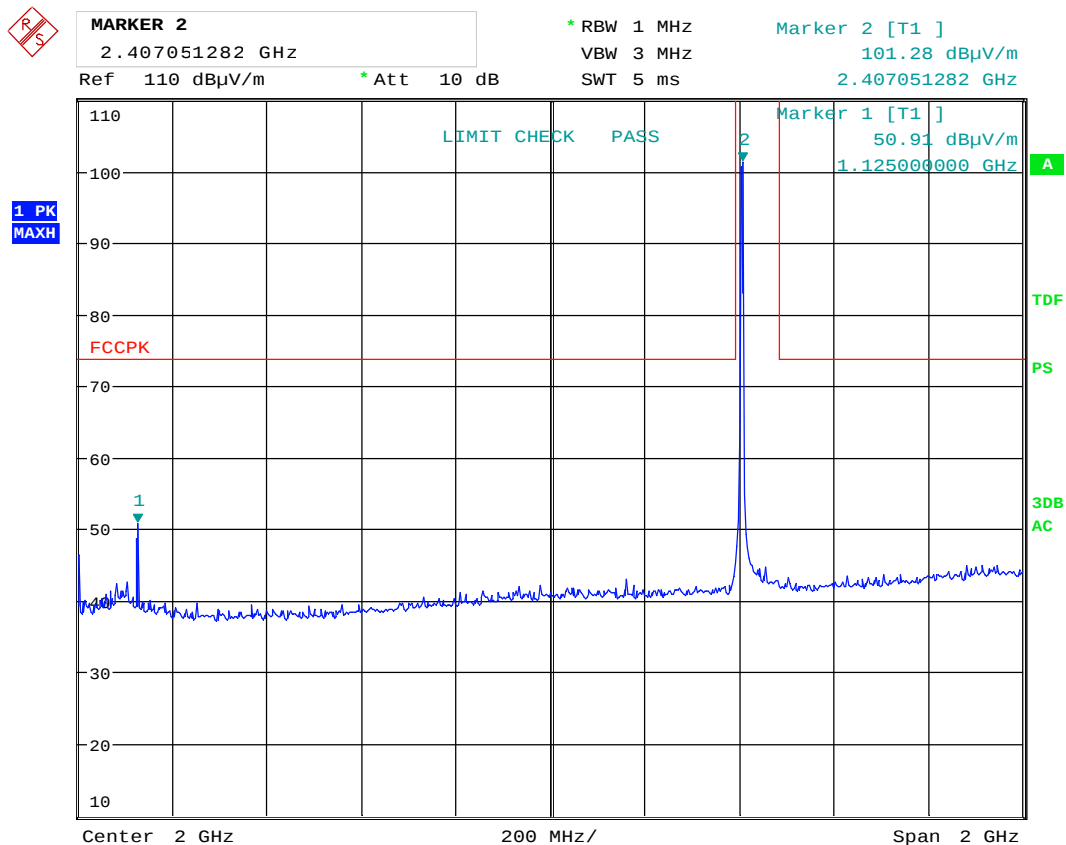


Date: 24.SEP.2019 12:14:00

External Antenna: Radiated spurious emissions, VP, 1 - 3GHz, ch2405MHz, PK scan

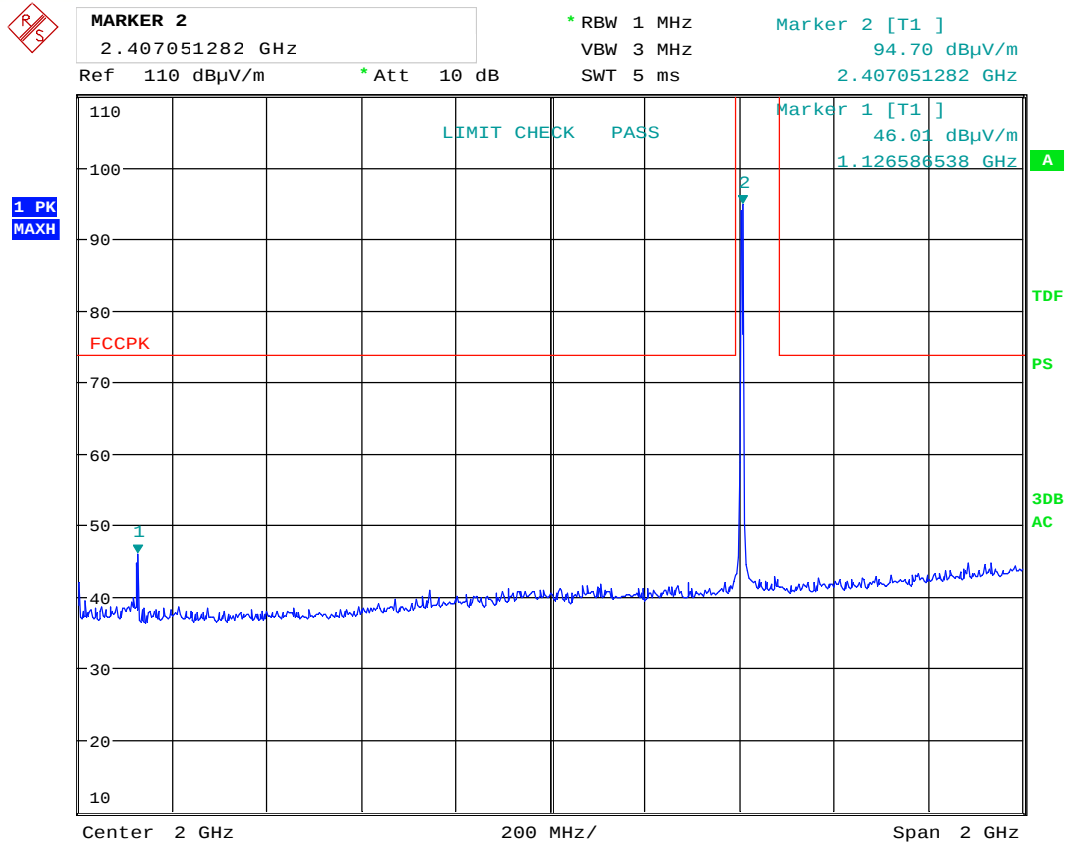


Date: 24.SEP.2019 12:19:55

External Antenna: Radiated spurious emissions, HP, 1 - 3GHz, ch2405MHz, PK scan

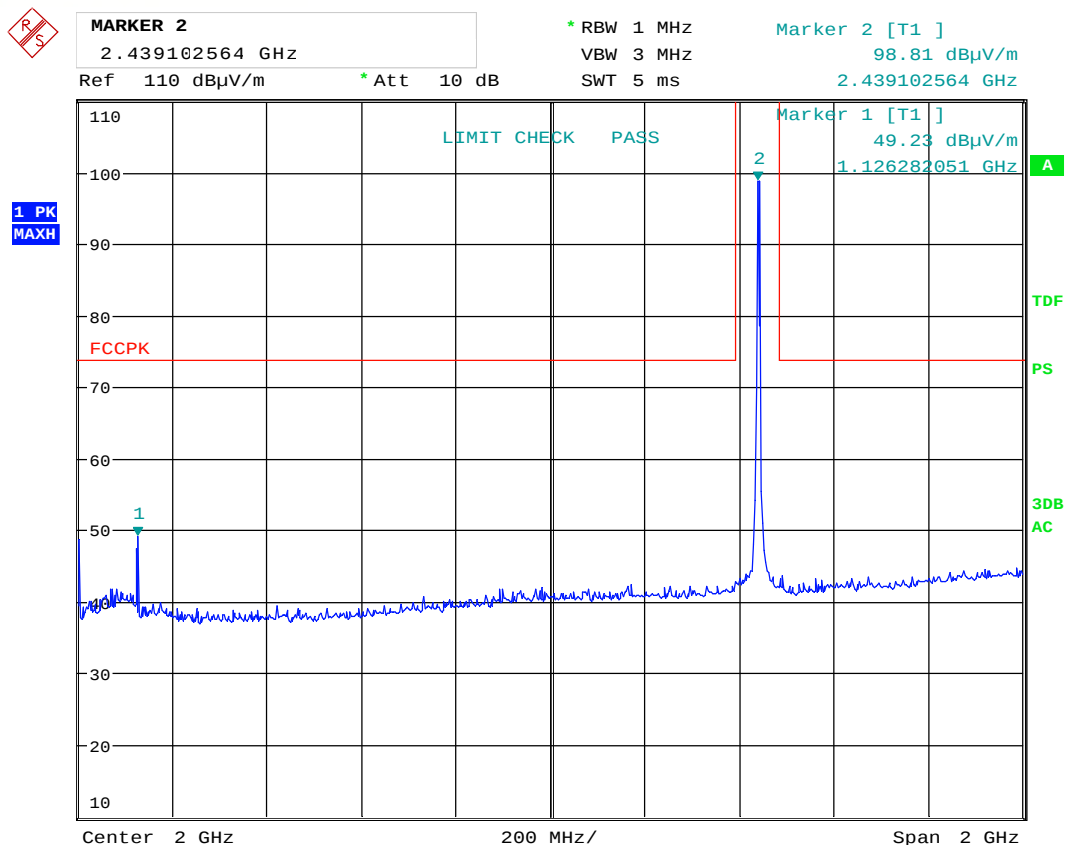


Date: 24.SEP.2019 11:21:34

External Antenna: Radiated spurious emissions, VP, 1 - 3GHz, ch2440MHz, PK scan

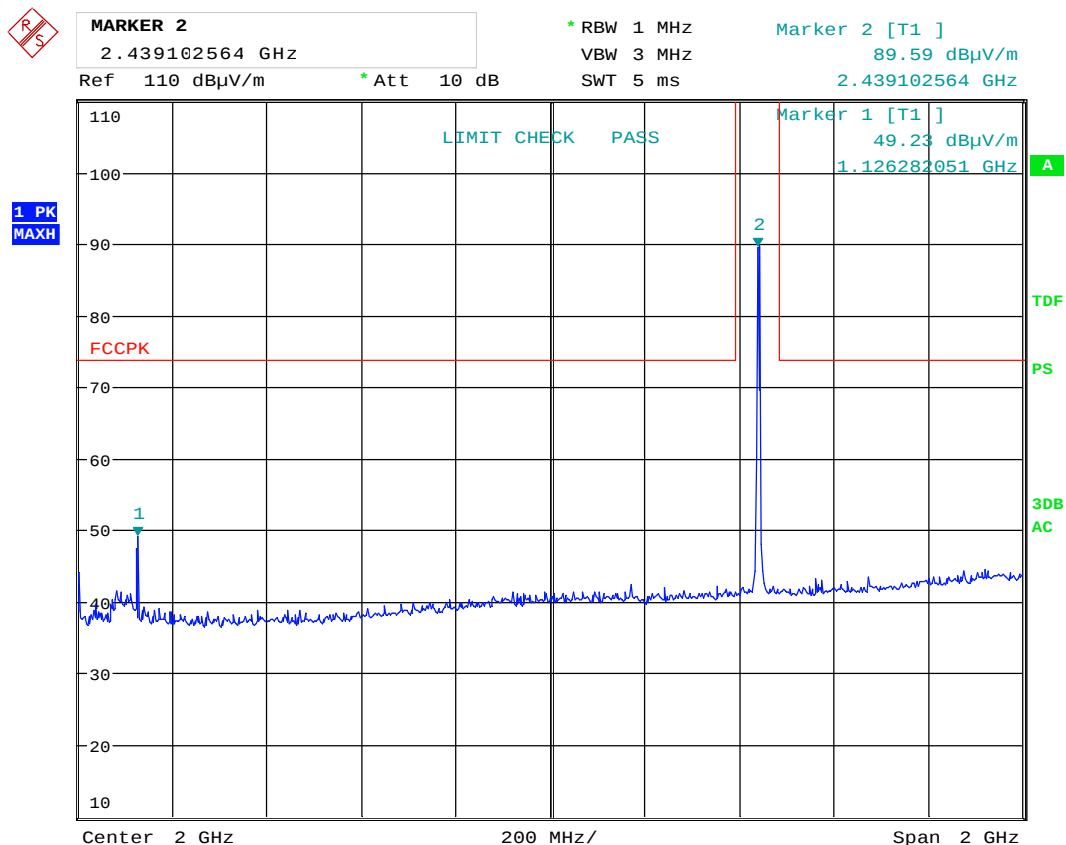


Date: 24.SEP.2019 11:20:49

External Antenna: Radiated spurious emissions, HP, 1 - 3GHz, ch2440MHz, PK scan

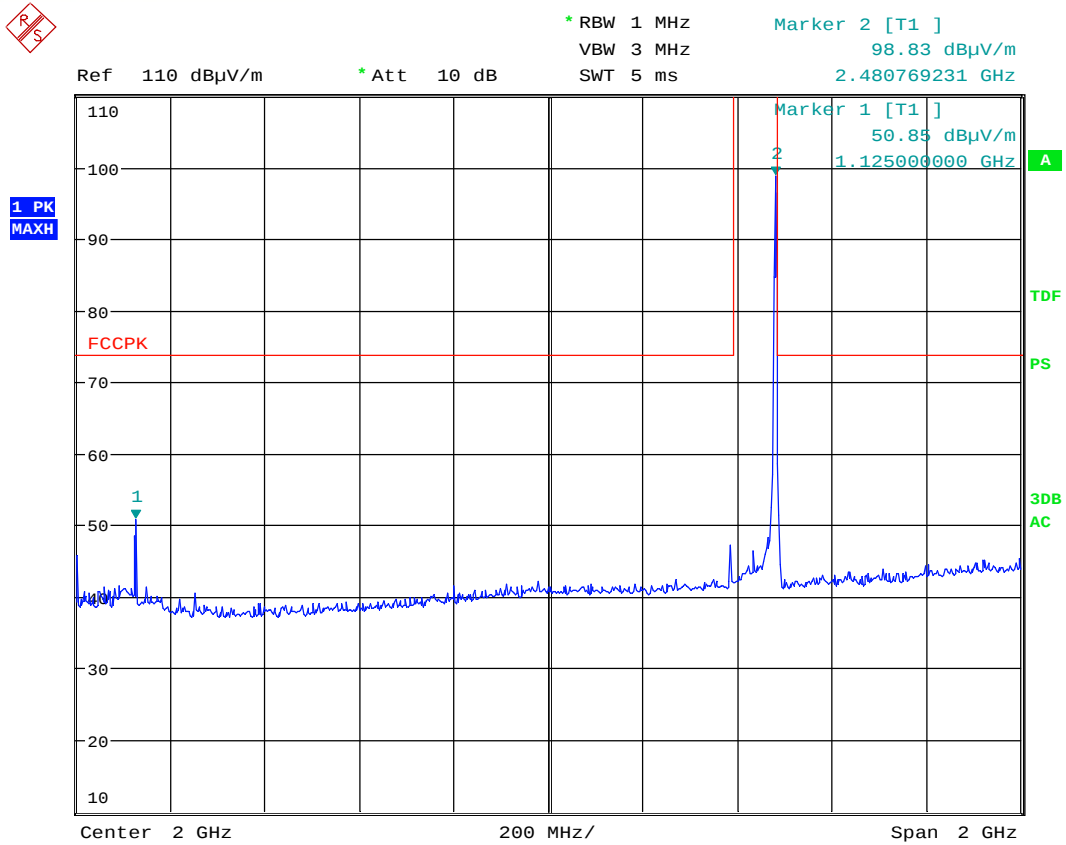


Date: 24.SEP.2019 11:10:57

External Antenna: Radiated spurious emissions, VP, 1 - 3GHz, ch2480MHz, PK scan

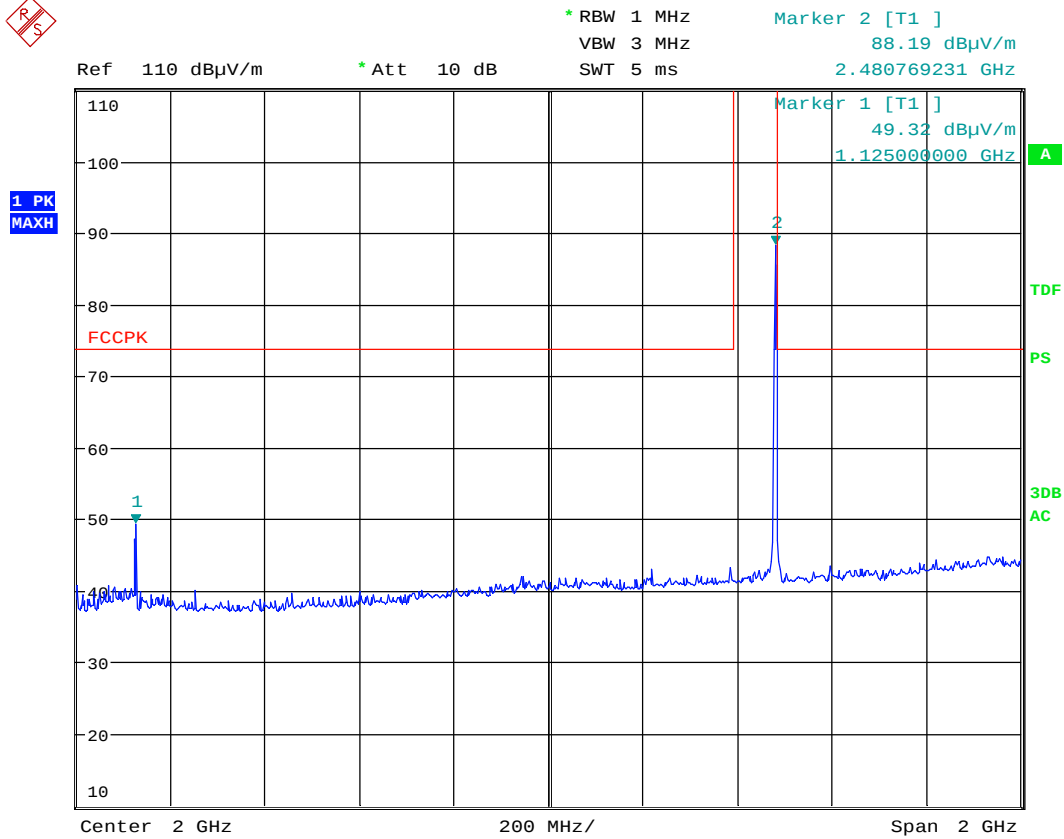

Date: 24.SEP.2019 11:12:47

External Antenna: Radiated spurious emissions, HP, 1 - 3GHz, ch2480MHz, PK scan

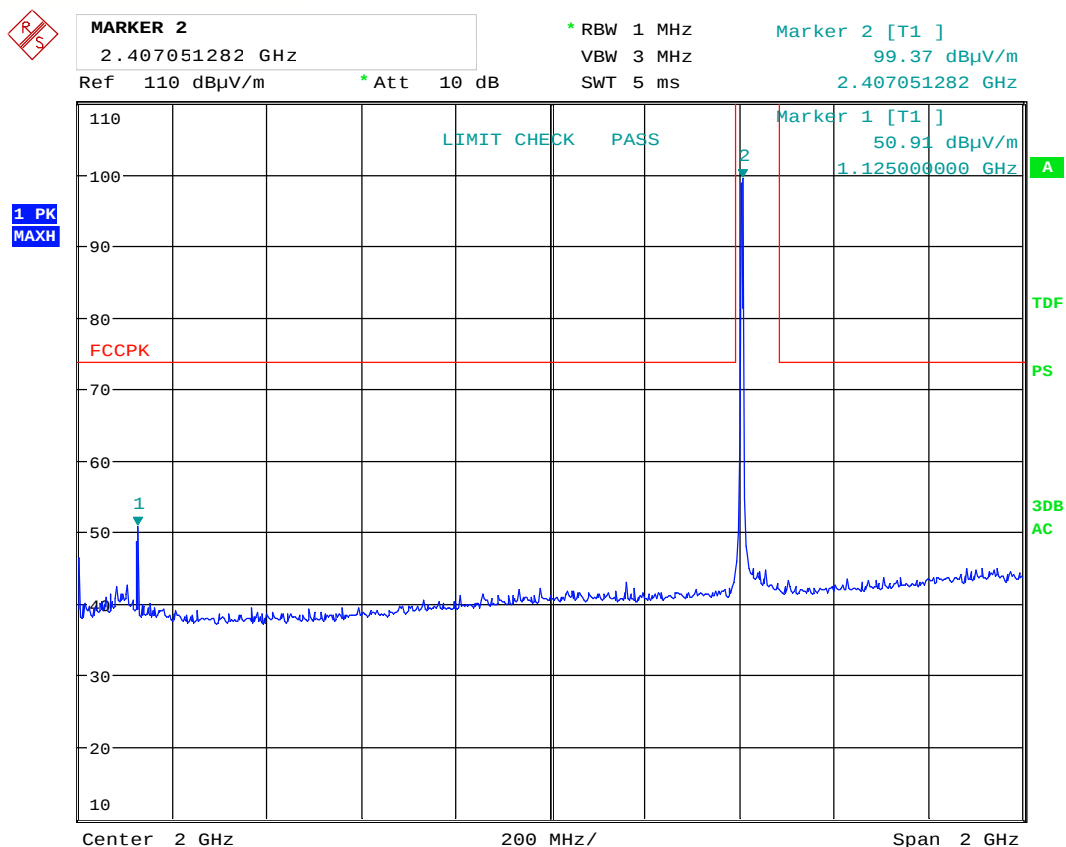

Date: 24.SEP.2019 12:13:36

External Antenna: Radiated spurious emissions, VP, 3 - 8GHz, ch2405MHz, PK scan



MARKER 1

7.22275641 GHz

* RBW 1 MHz

VBW 3 MHz

SWT 30 ms

Marker 1 [T1]


59.49 dBμV/m

7.222756410 GHz

Ref 82 dBμV/m

* Att 10 dB

1 PK
MAXH

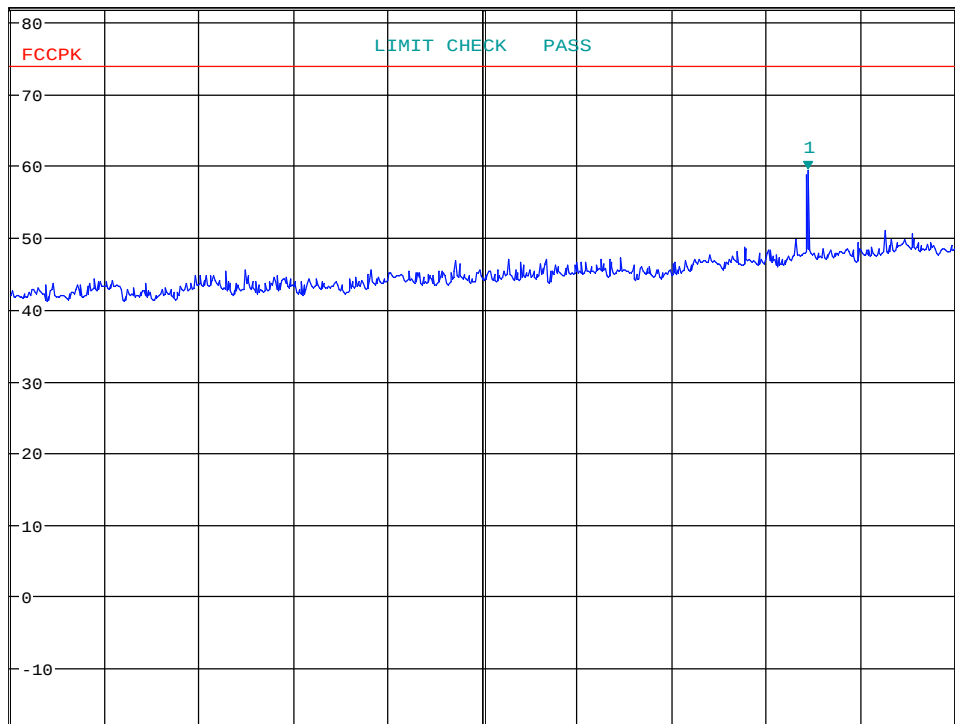


Start 3 GHz

500 MHz/

Stop 8 GHz


Date: 24.SEP.2019 12:09:26

External Antenna: Radiated spurious emissions, HP, 3 - 8GHz, ch2405MHz, PK scan

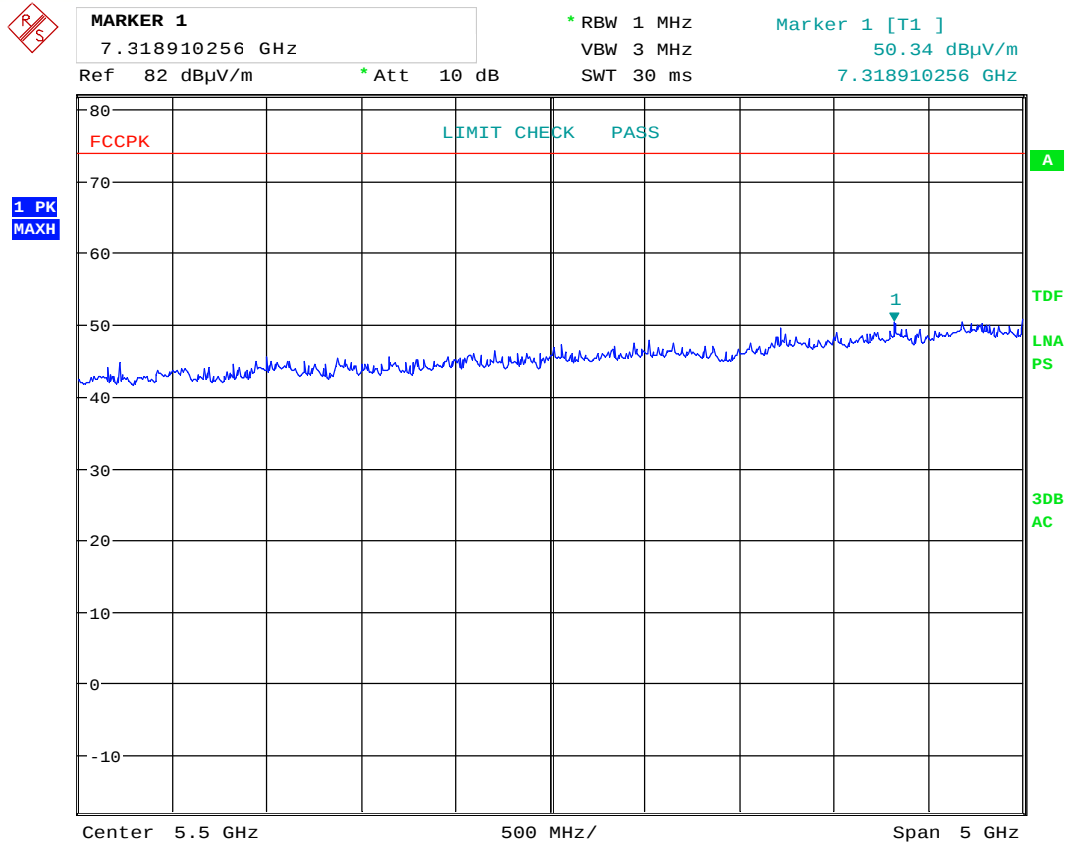


Date: 24.SEP.2019 11:24:07

External Antenna: Radiated spurious emissions, VP, 3 - 8GHz, ch2440MHz, PK scan

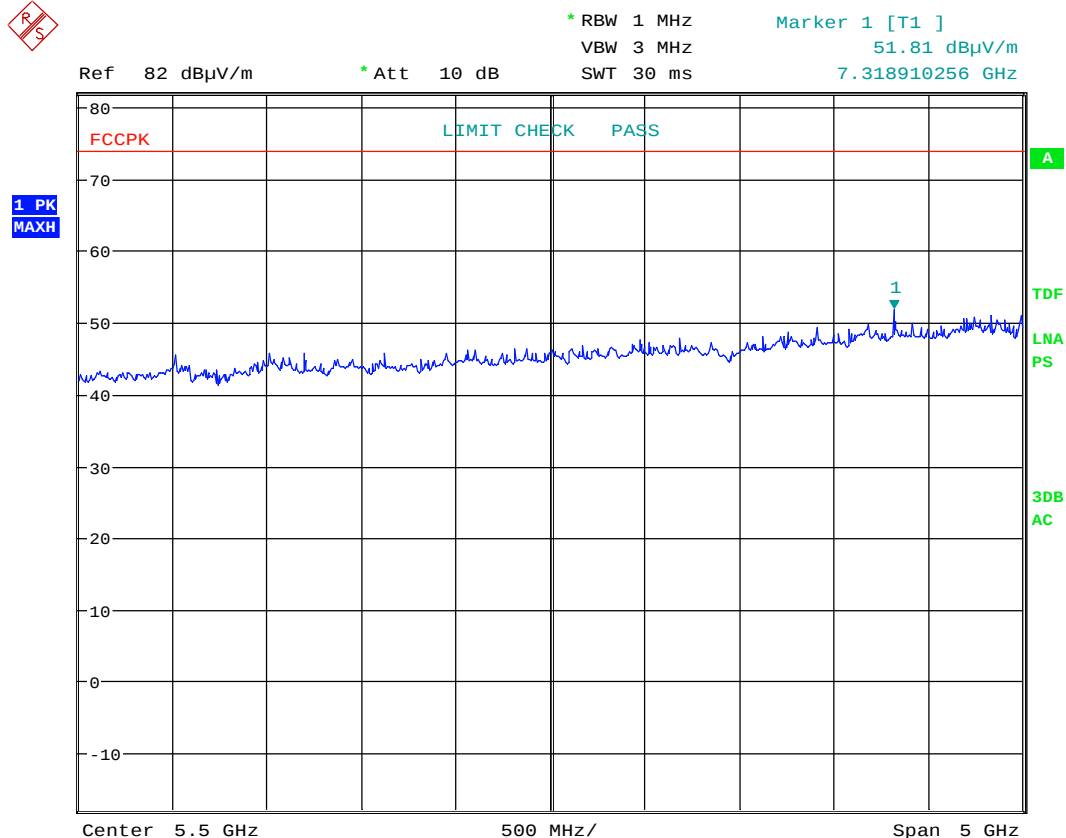


Date: 24.SEP.2019 11:25:05

External Antenna: Radiated spurious emissions, HP, 3 - 8GHz, ch2440MHz, PK scan

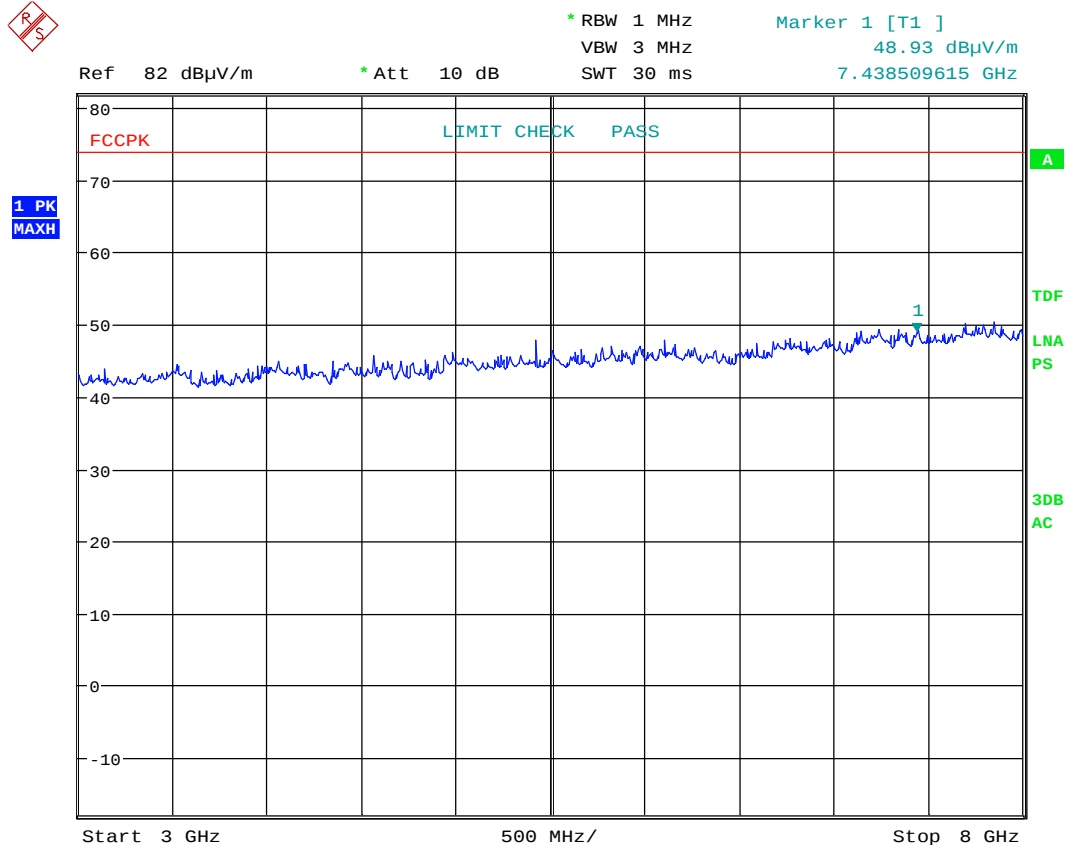


Date: 24.SEP.2019 11:04:34

External Antenna: Radiated spurious emissions, VP, 3 - 8GHz, ch2480MHz, PK scan

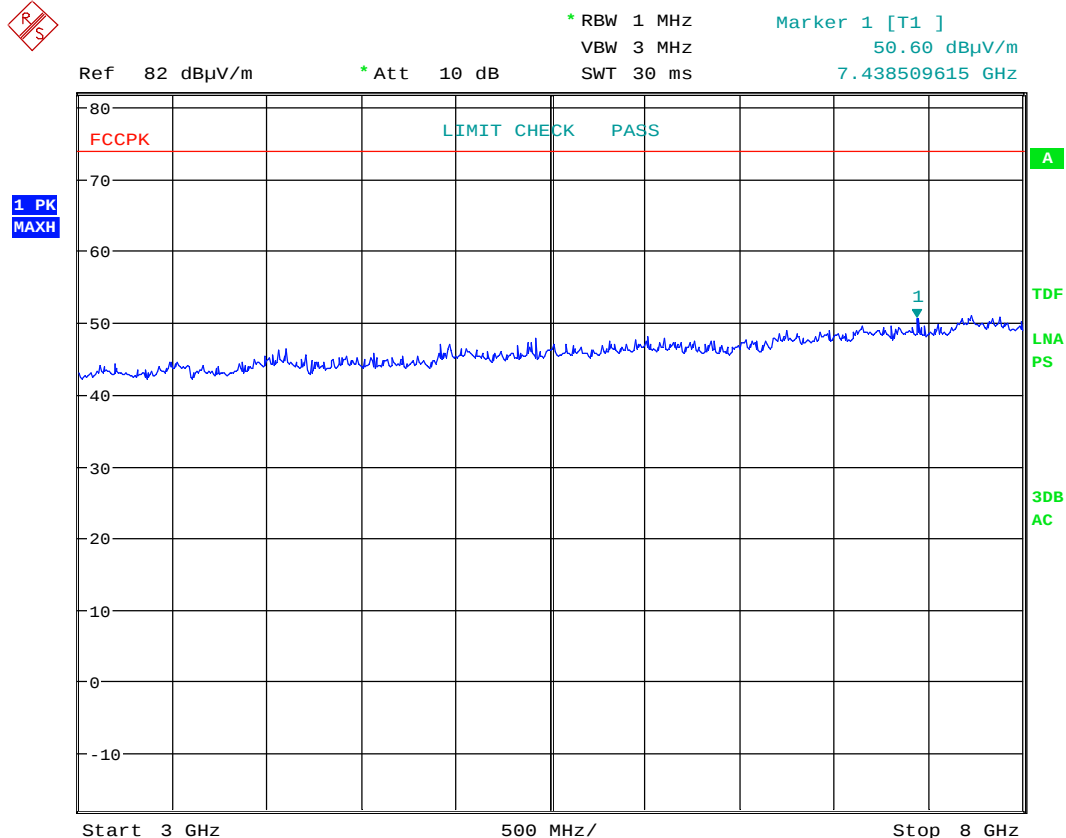


Date: 24.SEP.2019 11:05:39

External Antenna: Radiated spurious emissions, HP, 3 - 8GHz, ch2480MHz, PK scan

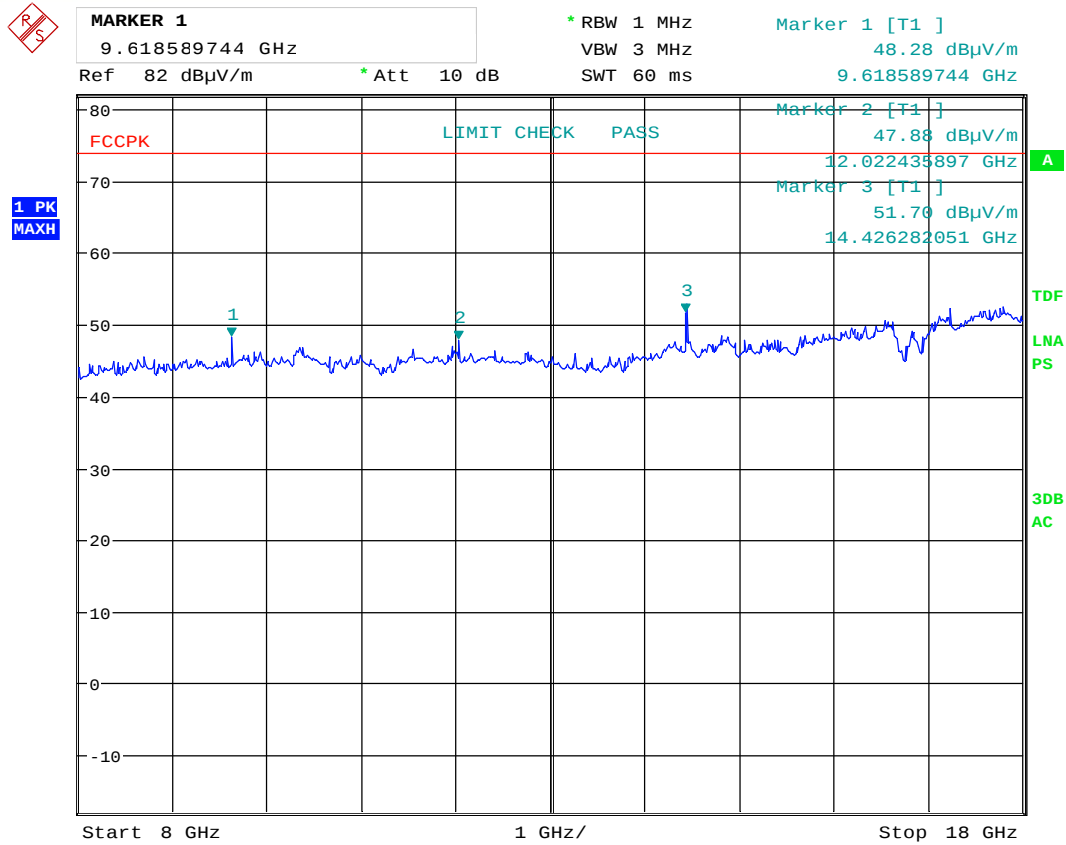


Date: 24.SEP.2019 12:57:08

External Antenna: Radiated spurious emissions, VP, 8 - 18GHz, ch2405MHz, PK scan

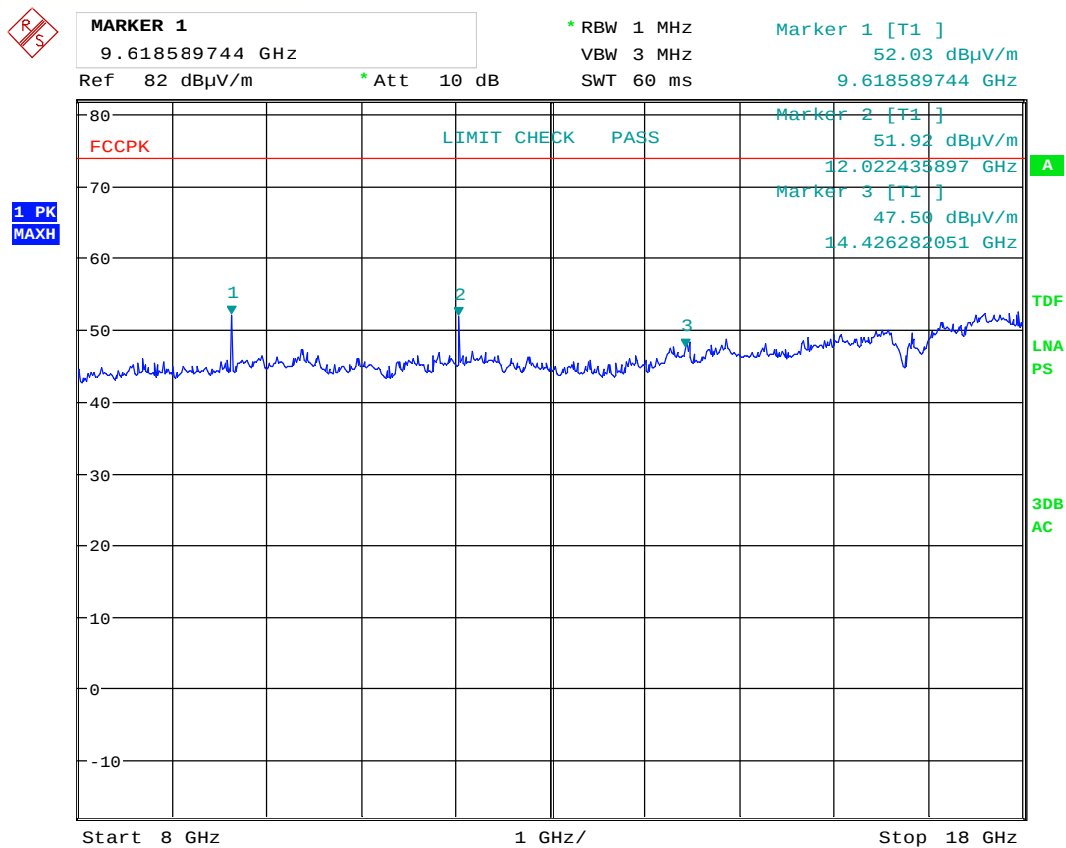

Date: 24.SEP.2019 12:59:06

External Antenna: Radiated spurious emissions, HP, 8 - 18GHz, ch2405MHz, PK scan

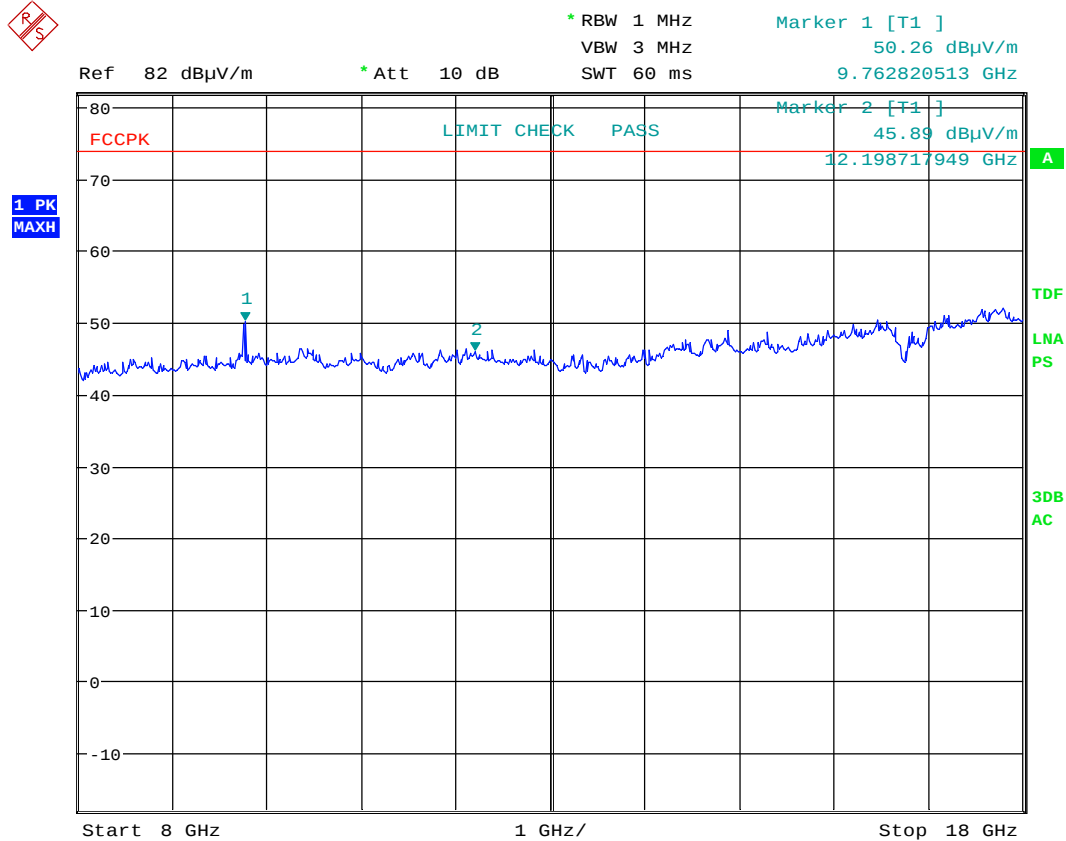

Date: 24.SEP.2019 12:51:03

External Antenna: Radiated spurious emissions, VP, 8 - 18GHz, ch2440MHz, PK scan



MARKER 1

9.762820513 GHz

Ref 82 dBμV/m

* Att 10 dB

* RBW 1 MHz

VBW 3 MHz


SWT 60 ms

Marker 1 [T1]

51.70 dBμV/m

9.762820513 GHz

1 PK
MAXH

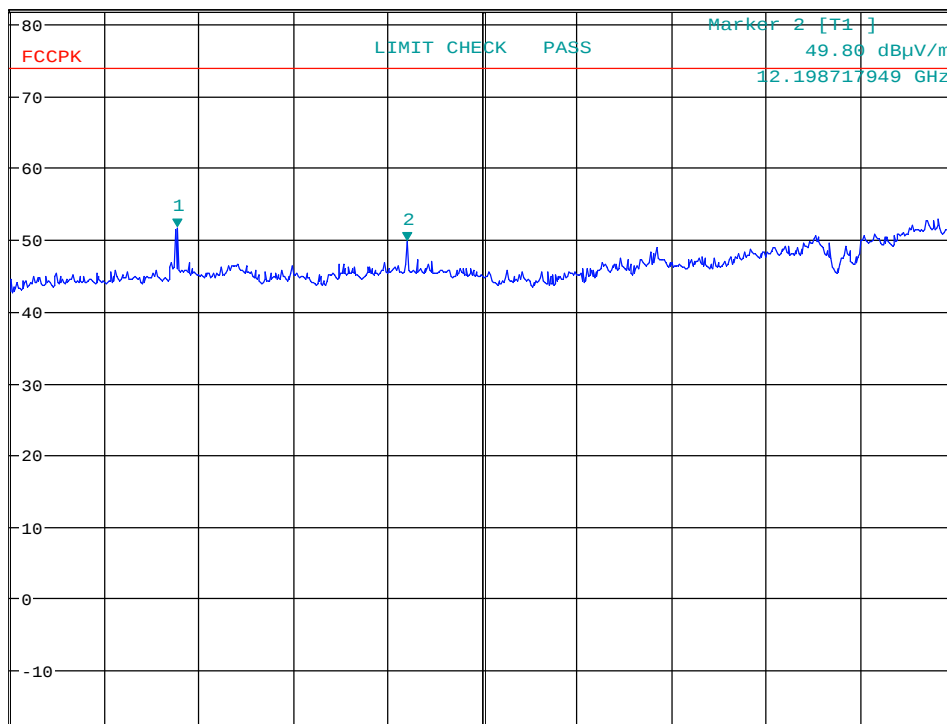


Start 8 GHz

1 GHz/

Stop 18 GHz


Date: 24.SEP.2019 12:50:01

External Antenna: Radiated spurious emissions, HP, 8 - 18GHz, ch2440MHz, PK scan

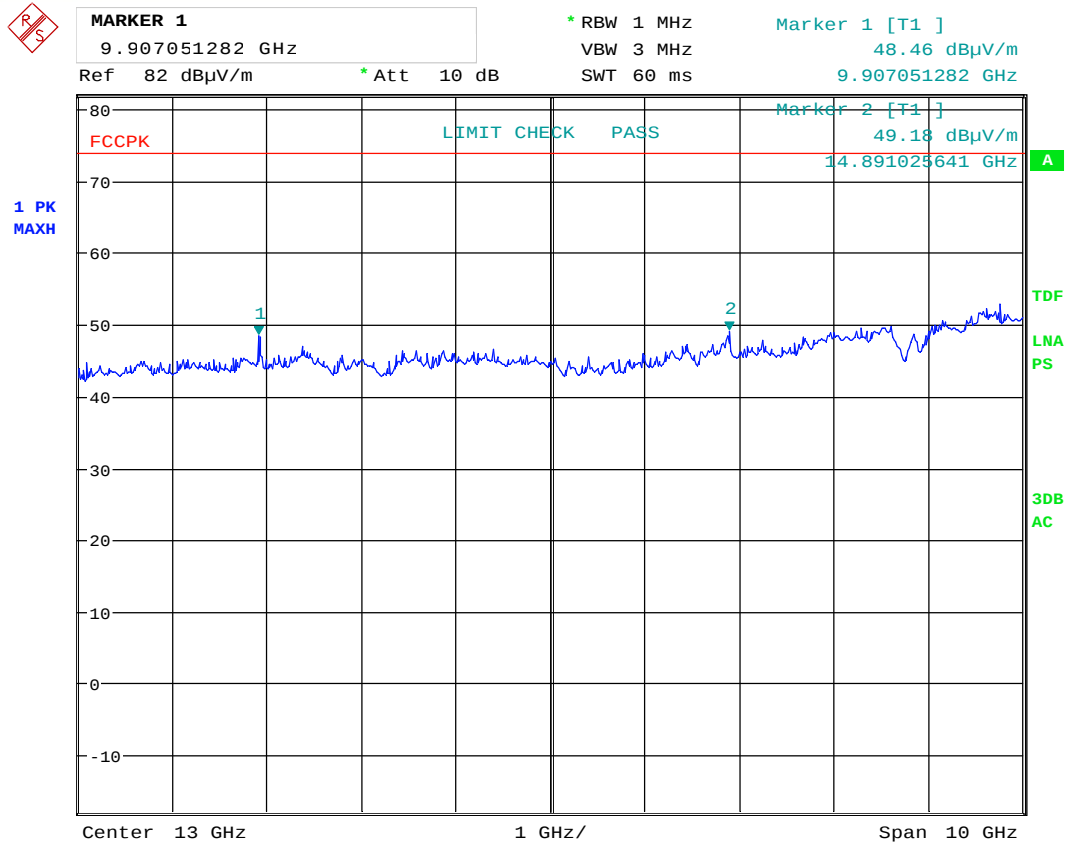


Date: 24.SEP.2019 12:43:52

External Antenna: Radiated spurious emissions, VP, 8 - 18GHz, ch2480MHz, PK scan

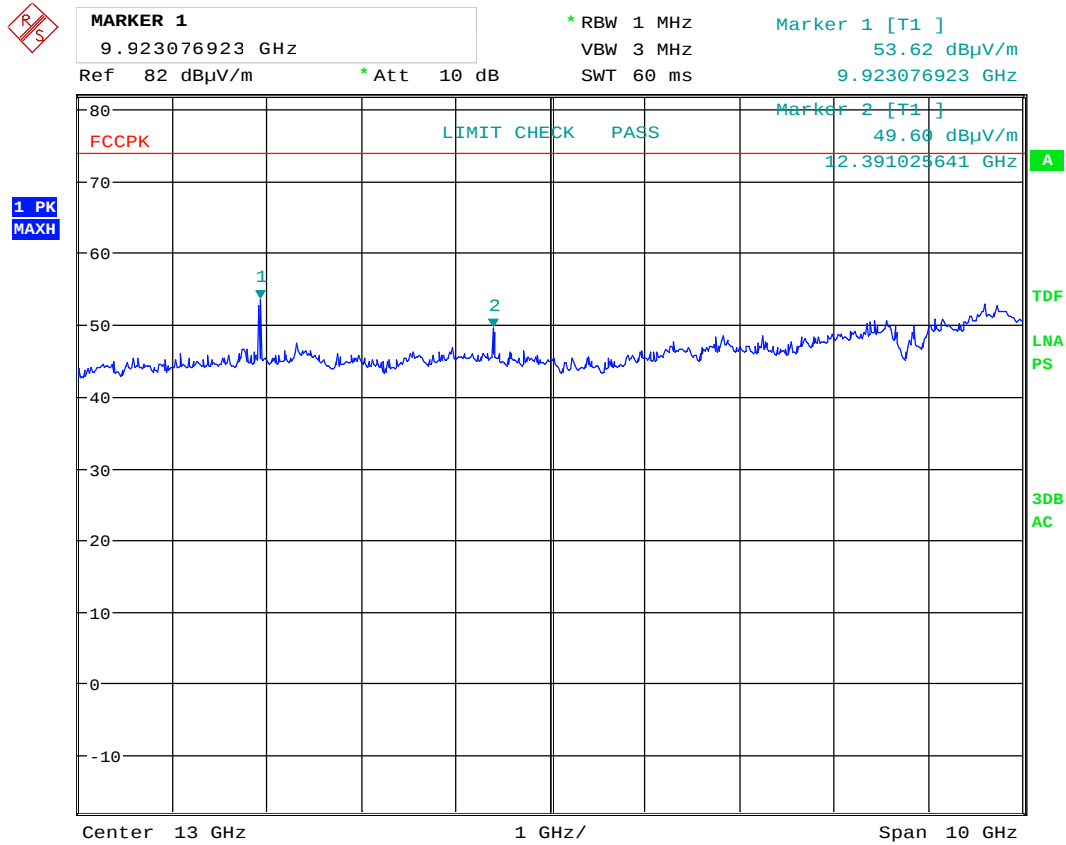


Date: 24.SEP.2019 12:45:42

External Antenna: Radiated spurious emissions, HP, 8 - 18GHz, ch2480MHz, PK scan

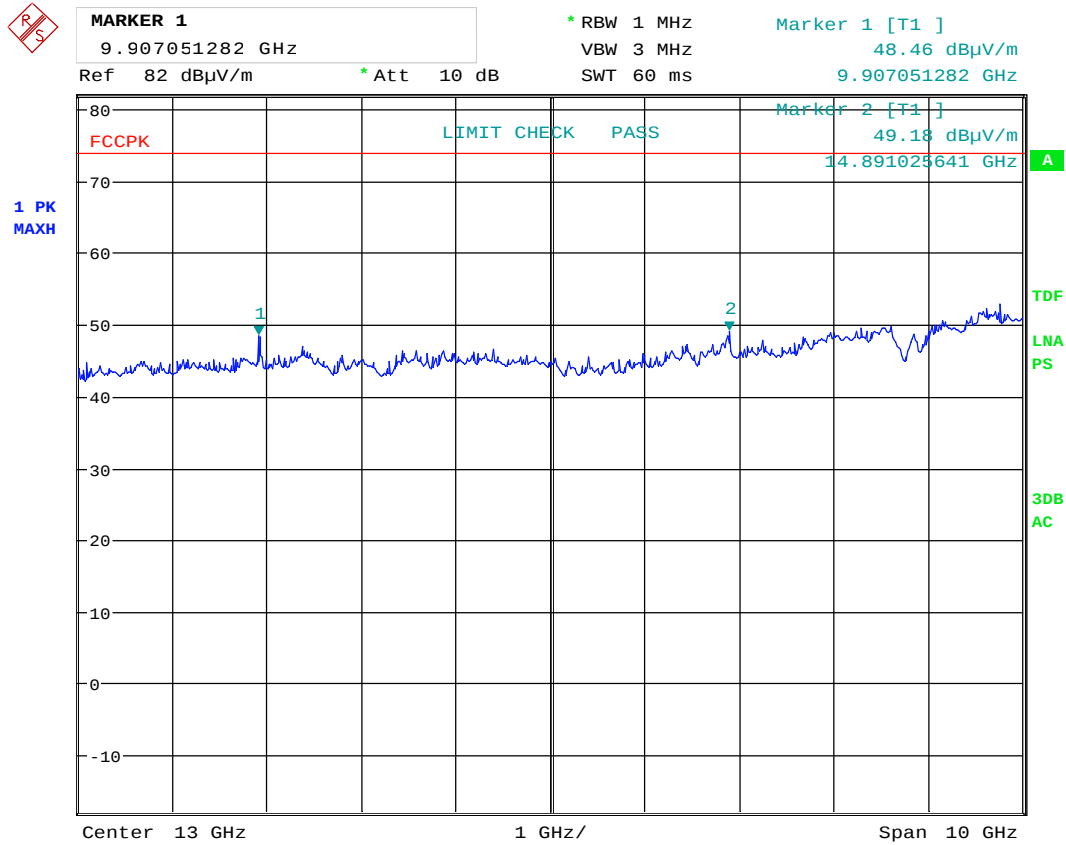

Date: 24.SEP.2019 12:43:52

External Antenna, Pre-scan, Radiated spurious emissions, VP, 18 - 25GHz

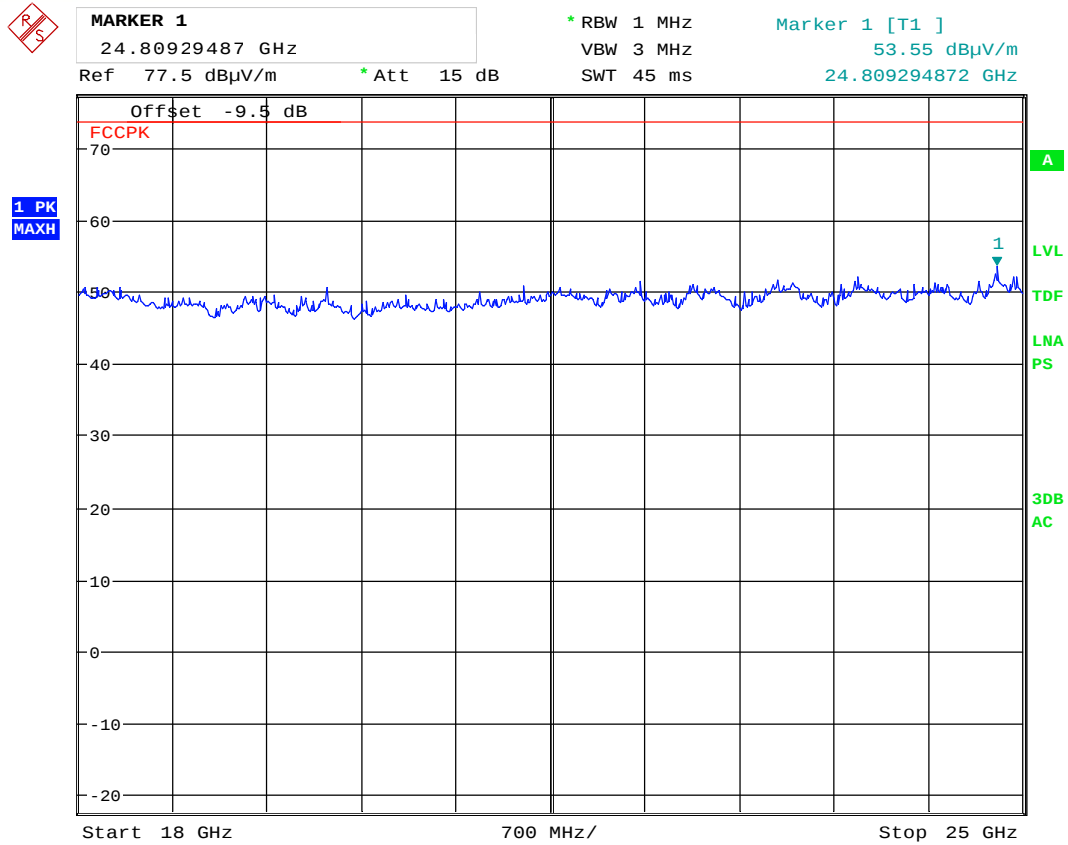

Date: 24.SEP.2019 13:30:57

External Antenna, Pre-scan, Radiated spurious emissions, HP, 18 - 25GHz

3.9 Power Spectral Density (PSD)

FCC part 15.247(e)

ISED Canada RSS-247 Issue 2, Clause 5.2 (2)

Measurement procedure: ANSI C63.10-2013 Clause 11.10

Test Results: Complies

Measured and Calculated Data:

The measurement procedures PKPSD described in ANSI C63.10-2013 was used.

	2405 MHz	2440 MHz	2480 MHz
Measured value (dBm/3kHz)	-10.04	-9.16	-11.73

Requirements:

The Power Spectral Density of a Digital Transmission System shall be no greater than +8 dBm in any 3 kHz band

No requirements for Frequency Hopping Systems.



MARKER 1

2.4049375 GHz

Ref 13.5 dBm

* Att 10 dB

* RBW 3 kHz


VBW 10 kHz

SWT 170 ms

Marker 1 [T1]

-10.04 dBm

2.404937500 GHz

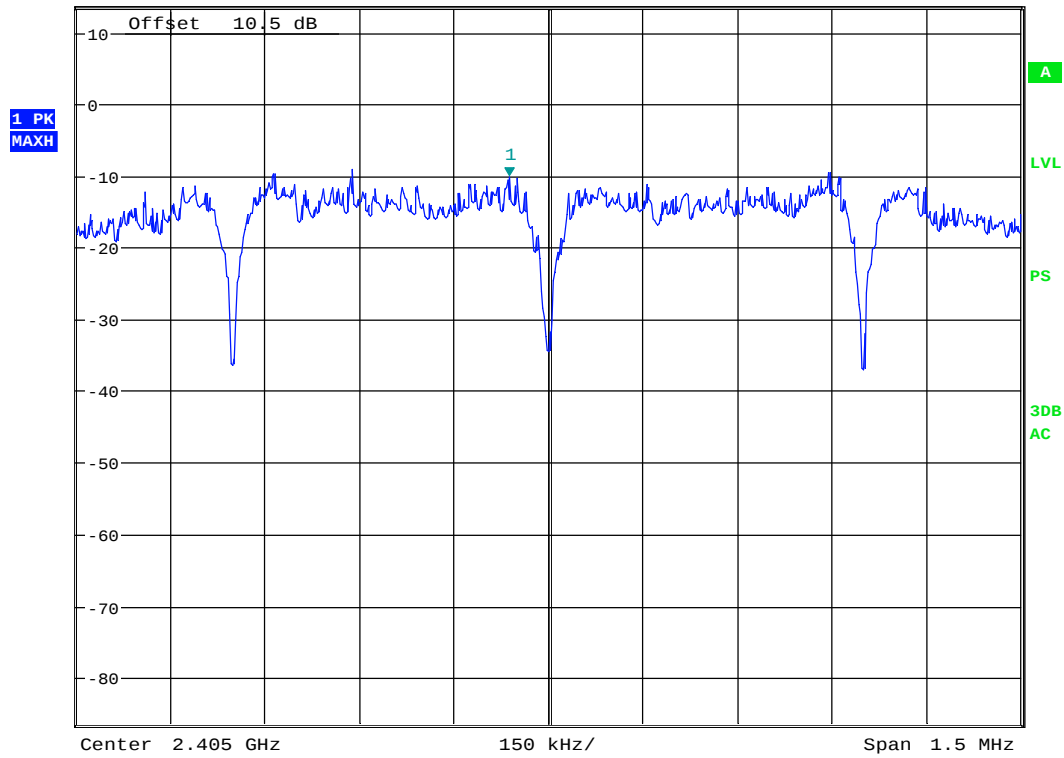

Date: 24.SEP.2019 13:35:31

Conducted PSD, ch2405MHz



MARKER 1

2.439435096 GHz

* RBW 3 kHz

VBW 10 kHz

SWT 170 ms

Marker 1 [T1]


-9.16 dBm

2.439435096 GHz

Ref 20.5 dBm

* Att 10 dB

1 PK
MAXH

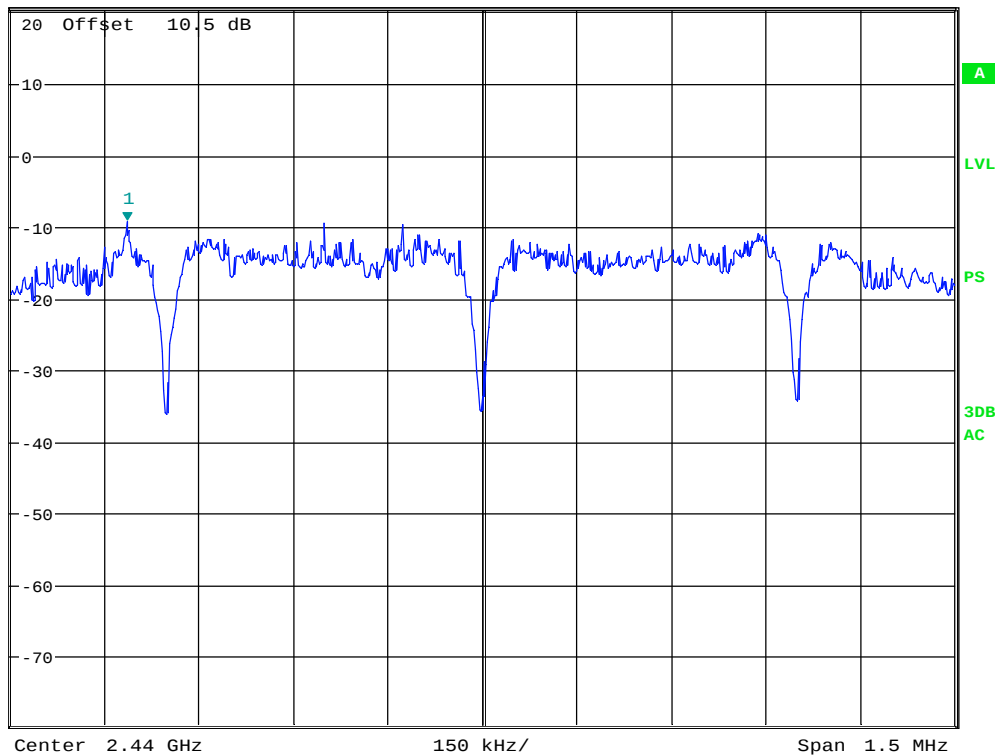

Date: 24.SEP.2019 13:41:54

Conducted PSD, ch2440MHz



MARKER 1

2.4796875 GHz

* RBW 3 kHz

VBW 10 kHz

SWT 170 ms


Marker 1 [T1]

-11.73 dBm

2.479687500 GHz

Ref 20.5 dBm * Att 10 dB

1 PK
MAXH

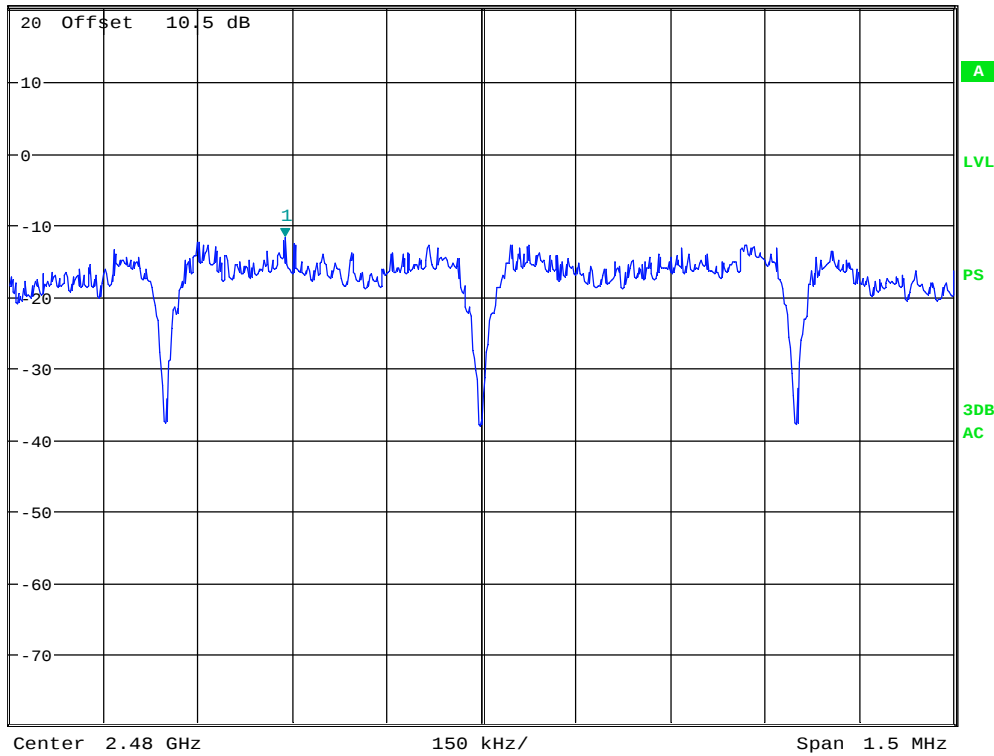

Date: 24.SEP.2019 13:48:00

Conducted PSD, ch2480MHz

4 Measurement Uncertainty

Measurement Uncertainty Values		
Test Item		Uncertainty
Output Power		±0.5 dB
Power Spectral Density		±0.5 dB
Out of Band Emissions, Conducted	< 3.6 GHz	±0.6 dB
	> 3.6 GHz	±0.9 dB
Spurious Emissions, Radiated	< 1 GHz	±2.5 dB
	> 1 GHz	±2.2 dB
Emission Bandwidth		±4 %
Power Line Conducted Emissions		+2.9 / -4.1 dB
Spectrum Mask Measurements	Frequency	±5 %
	Amplitude	±1.0 dB
Frequency Error		±0.6 ppm
Temperature Uncertainty		±1 °C

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.


No.	Instrument/ ancillary	Type of instrument/ ancillary	Manufacturer	Ref. no.	Cal. Date	Cal. Due
1.	ESU40	EMI Receiver	Rohde & Schwarz	LR1639	2019.01	2020.01
2.	FSW43	Spectrum analyser	Rohde & Schwarz	LR1690	2019.01	2020.01
3.	HFH2-Z2	Active Loop antenna	Rohde & Schwarz	LR1660	2016.11	2019.11
4.	3117-PA	Antenna horn	EMCO	LR 1717	2017.05	2020.05
5.	3115	Antenna horn	EMCO	LR 1330	2016.10	2020.10
6.	PM 320K	Antenna Horn	Sivers	LR 102	N/A	
7.	DBF-520-20	Antenna Horn	Systron-Donner corp	LR 101	N/A	
8.	638	Antenna Horn	NARDA	LR 1480	N/A	
9.	637	Antenna Horn	NARDA	LR 099	N/A	
10	ARJB1	Bi-log Hybrid Antenna	Sunol	LR 1734	2018.05	2020.05
11	4768-10	Attenuator	Narda	LR 1356	Cal b4 use	
12	6HC3000/18000	Highpass Filter	Trilithic	LR 1614	Cal b4 use	
13	8449B	Pre-amplifier	Hewlett Packard	LR 1322	2019.07	2020.07
14	310N	Pre-amplifier	Sonoma	LR 1686	2019.07	2020.07
15	Model 45	Multimeter	Fluke	LT 5218	2018.11	2020.11
16	6812B	AC Power source	Agilent	LR 1515	2019.03	2021.03
17	CPX400S	Power supply	TTi	LR 1713	Cal b4 use	

The software listed below has been used for one or more tests.


No.	Manufacturer	Name	Version	Comment
1	Rohde & Schwarz	GPBShot	2.7	Screenshots from R&S Spectrum Analyzers
2	Rohde & Schwarz	RScommander	1.9.2 64bit	Versatile Software Tool for R&S Instruments
3	Rohde & Schwarz	EMC 32	10.40.10	Radiated Emission test software

6 BLOCK DIAGRAM

6.1 Power Line Conducted Emission

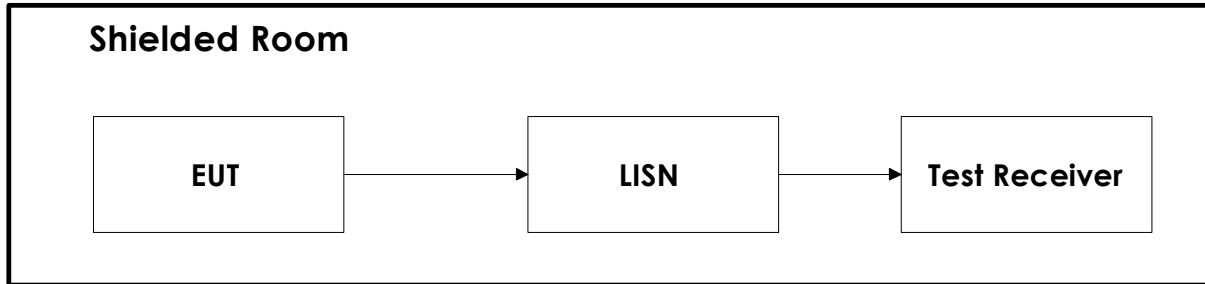

6.2 Test Site Radiated Emission

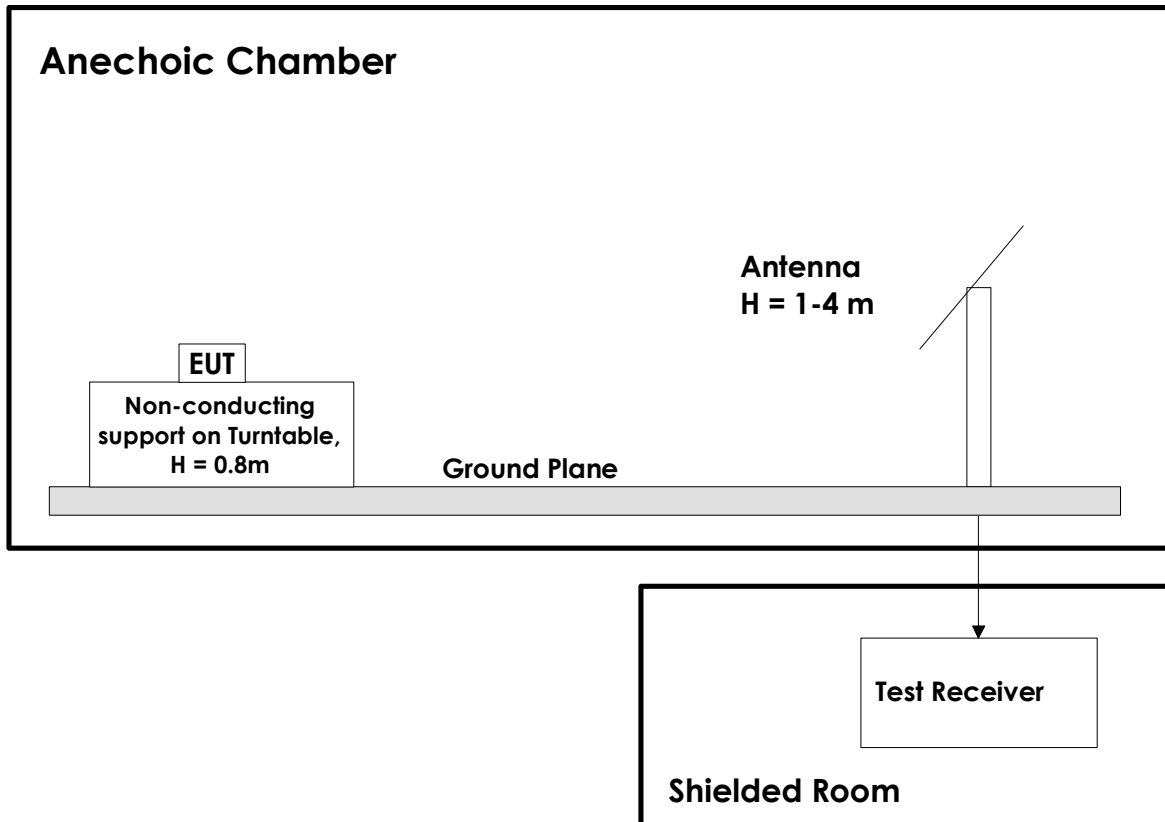

This test setup is used for all radiated emissions tests. For frequencies below 30 MHz the measuring distance is 10m, for all other frequencies it is 3m or 1m. Emissions above 1 GHz are measured with a Spectrum Analyzer and Horn Antenna. For measurements above 18 GHz the test receiver is moved inside the anechoic chamber and located next to the antenna to minimize the cable loss. All measurements at 1GHz and above were performed with turntable height 1.5m and with the ground plane covered by absorbers. A pre-amplifier is used for all measurements above 30 MHz, and High-Pass or Band-Pass filter is used for all harmonics.

Revision history

Version	Date	Comment	Sign
00	2019.10.22	First Version	gns