



FCC TEST REPORT

REPORT NO.: FC110128N05

MODEL NO.: MIP669A,ITPW891B(See Item 3.1)

RECEIVED: Jan.28, 2011

TESTED: Mar.10~Mar.15, 2011

ISSUED: Mar.18, 2011

APPLICANT: NGAI LIK ELECTRONICS ENTERPRISES LIMITED

**ADDRESS: FLAT 29-32,8/F., BLOCK B, FOCAL INDUSTRIAL CENTRE, 21
MAN LOK STREET, HUNG HOM, KOWLOON, HONG KONG**

ISSUED BY: NS Technology Co., Ltd.

**LAB ADDRESS: Chenwu Industrial Zone, Houjie Town, Dongguan,
Guangdong, China**

This test report consists of 4 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by A2LA, or any government agency. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.





PRODUCT: iPhone/iPod bar speaker

MODEL: MIP669A,ITPW891B (see Item 3.1)

BRAND: iLIVE

APPLICANT: NGAI LIK ELECTRONICS ENTERPRISES LIMITED

TESTED: Mar.10~Mar.15, 2011

TEST SAMPLE: ENGINEERING SAMPLE

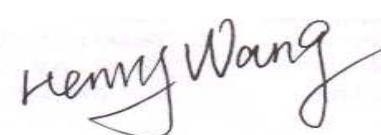
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**

ANSI C63.4-2003

47 CFR FCC Part 2 Subpart J, section 2.1091

The above equipment has been tested by **NS Technology Co., Ltd.**, and found compliance with the requirements of the above standards.

The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

REVIEWED BY : 
Henry Wang / Supervisor

APPROVED BY : 
Chris Du / Manager

DATE: Mar.18, 2011

DATE: Mar.18, 2011



Maximum Permissible Exposure

1 Applicable Standard

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2m normally can be maintained between the user and the device.

(a) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density(S) (mW/cm ²)	Averaging Times E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100000			5	6

(b) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density(S) (mW/cm ²)	Averaging Times E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100000			1.0	30

Note: f=frequency in MHz; *Plane-wave equivalent power density

2 MPE Calculation Method

$$E \text{ (V/m)} = (30 * P * G)^{0.5} / d \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = E^2 / 377$$

E = Electric Field (V/m)

P = Peak RF output Power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = (30 * P * G) / (377 * d^2)$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained.



3 Calculated Result and Limit

Mode	CH	Output power (dBm)	Output power (mW)	Antenna Gain (dBi)	MPE estimation result (mW/cm ²) at 20cm	Limit of MPE Estimation (mW/cm ²)	Test result
TX Mode	CH1:2406MHz	14.68	29.37	0.5	0.0066	1	Compiles
	CH16:2436MHz	13.74	23.66	0.5	0.0053	1	Compiles
	CH34:2472MHz	13.05	20.18	0.5	0.0045	1	Compiles