

Page 1 of 20

# **FCC TEST REPORT**

Product Name : ACRyan VEOLO SMART ANDROID HUB

Trade Name : AC RYAN

Model Name : ACR-VE91200

FCC ID : Y8J-ACR-VE91200

Contains FCC ID (WIFI module) : WWMMN42754IV1

Serial Number : N/A

Technical Data : 5V/2.4A

Report Number : EESZD10170006-7

Date : Nov. 15, 2011

Regulations : See below

Test Standards	Results
	PASS

#### Prepared for:

# AC RYAN ASIA PACIFIC PTE LTD 60 KAKI BUKIT PLACE #01-12 EUNOS TECPARK SINGAPORE 415979

#### Prepared by:

CENTRE TESTING INTERNATIONAL (SHENZHEN) CORPORATION
Building C, Hongwei Industrial Zone, Baoan 70 District,
Shenzhen, Guangdong, China

TEL: +86-755-3368 3668 FAX: +86-755-3368 3385

Check No.: 30000416

This report shall not be reproduced, except in full, without the written approval of CENTRE TESTING INTERNATIONAL (SHENZHEN) CORPORATION



Page 2 of 20

## **TABLE OF CONTENTS**

Descri	ption	Page
1. GE	NERAL INFORMATION	3
2. TE	ST SUMMARY	4
3. ME	ASUREMENT UNCERTAINTY	4
4. PR	ODUCT INFORMATION AND TEST SETUP	4
	PRODUCT INFORMATION	
	TEST SETUP CONFIGURATION	
	SUPPORT EQUIPMENT	
	CILITIES AND ACCREDITATIONS	
5 1	TEST FACILITY	5
	TEST EQUIPMENT LIST	
	LABORATORY ACCREDITATIONS AND LISTINGS	
6. CC	NDUCTED EMISSION TEST	7
6.1.	LIMITS	7
6.2.	BLOCK DIAGRAM OF TEST SETUP	
6.3.	PROCEDURE OF CONDUCTED EMISSION TEST	7
6.4.	GRAPHS AND DATA	8
7. RA	DIATED EMISSION TEST	10
7.1.	LIMITS	10
7.2.	BLOCK DIAGRAM OF TEST SETUP	10
7.3.	PROCEDURE OF RADIATED EMISSION TEST	11
7.4.	GRAPHS AND DATA	12
APPEN	IDIX 1 PHOTOGRAPHS OF TEST SETUP	14
APPEN	IDIX 2 PHOTOGRAPHS OF EUT	16
(Note:	N/A means not applicable)	



Report No.: EESZD10170006-7 Page 3 of 20

#### 1. GENERAL INFORMATION

Applicant:

AC RYAN ASIA PACIFIC PTE LTD

60 KAKI BUKIT PLACE #01-12 EUNOS TECPARK

SINGAPORE 415979

Manufacturer:

AC RYAN ASIA PACIFIC PTE LTD

60 KAKI BUKIT PLACE #01-12 EUNOS TECPARK

SINGAPORE 415979

**Equipment Authorization:** Certification

**Product Name:** 

ACRyan VEOLO SMART ANDROID HUB

Trade Name:

**AC RYAN** 

Model Name:

ACR-VE91200

**Serial Number:** 

N/A

**Report Number:** 

EESZD10170006-7

Date of Test:

Oct. 17, 2011 to Nov. 15, 2011

The results of this test report are only valid for the mentioned equipment under test. The test report with all its sub-reports, e.g. tables, photographs and drawings, is copyrighted. Unauthorized utilization, especially without permission of the test laboratory, is not allowed and punishable. For copying parts of the test report, a written permission by the test laboratory is needed.

The test results of this report relate only to the tested sample identified in this report.

Prepared by:

Reviewed by:

Louisa Lu

Approved by ;

Manager

Date

Nov. 15, 2011



Report No. : EESZD10170006-7 Page 4 of 20

#### 2. TEST SUMMARY

The EUT has been tested according to the following specifications:

Standard	Test Item	Test
FCC 15.107	Conducted Emission	Yes
FCC 15.109	Radiated Emission	Yes

#### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Value (dB)
Conducted Emission	2.6
Radiated Emission	4.4

#### 4. PRODUCT INFORMATION AND TEST SETUP

#### 4.1. PRODUCT INFORMATION

Technical Data:

5V/2.4A

Adapter information:

Model No.:ADS-18C-06 0512GPCU

Input: AC 100-240V, 50/60Hz, max. 0.6A

Output: DC 5V, 2.4A

#### I/O Port of EUT

No.	I/O Port Type	Quantity
1	USB port	2
2	Optical port	1
3	HDMI port	1
4	AV port	2
5	SD port	1
6	LAN port	1



Report No. : EESZD10170006-7 Page 5 of 20

#### 4.2. TEST SETUP CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

#### 4.3. SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	PC	IBM	8143	BD-241	N/A	Un-shielded 1.2M
2.	Monitor	Lenovo	SY2 SS161118X6		Un-shielded 1M	Un-shielded 1M
3.	Mouse	IBM	M028UOL 23-468157		Un-shielded 1.2M	N/A
4.	Keyboard	IBM	89P8300	02284699	Un-shielded 1.2M	N/A

#### Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 5. FACILITIES AND ACCREDITATIONS

#### **5.1. TEST FACILITY**

All test facilities used to collect the test data are located at Building C, Hongwei Industrial Zone, Baoan 70 District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4, CISPR 16-1-1 and other equivalent standards.

#### **5.2. TEST EQUIPMENT LIST**

**Instrumentation:** The following list contains equipments used at CTI for testing. The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

#### **Equipment used during the tests:**

Shielding Room No. 1 - Conducted Emission Test										
Equipment	Manufacturer	Model	Serial No.	Due Date						
Receiver	R&S	ESCI	100009	07/06/2012						
LISN	R&S	ENV216	100098	07/06/2012						



Report No.: EESZD10170006-7 Page 6 of 20

3M Semi-anechoic Chamber - Radiated Emission Test										
Equipment	Manufacturer	Model	Serial No.	Due Date						
3M Chamber & Accessory Equipment	ETS-LINDGREN	FACT-3	3510	07/09/2012						
Spectrum Analyzer	Agilent	E4440A	MY46185649	03/29/2012						
Biconilog Antenna	ETS-LINGREN	3142C	00044562	07/06/2012						
Multi device Controller	ETS-LINGREN	2090	00057230	N/A						
Horn Antenna	ETS-LINGREN	3117	00057407	07/06/2012						
Microwave Preamplifier	Agilent	8449B	3008A02425	07/06/2012						

#### 5.3. LABORATORY ACCREDITATIONS AND LISTINGS

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.



Report No.: EESZD10170006-7 Page 7 of 20

#### 6. CONDUCTED EMISSION TEST

#### 6.1. LIMITS


**Limits for Class B digital devices** 

Frequency range	Limits dB(	μ <b>V</b> )
(MHz)	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

**NOTE:** 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

#### 6.2. BLOCK DIAGRAM OF TEST SETUP

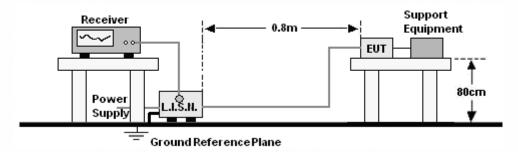


#### 6.3. PROCEDURE OF CONDUCTED EMISSION TEST

- a. The EUT was placed on a nonconductive table above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from EUT in all power lines in the full band.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.



Report No.: EESZD10170006-7 Page 8 of 20

#### 6.4. GRAPHS AND DATA

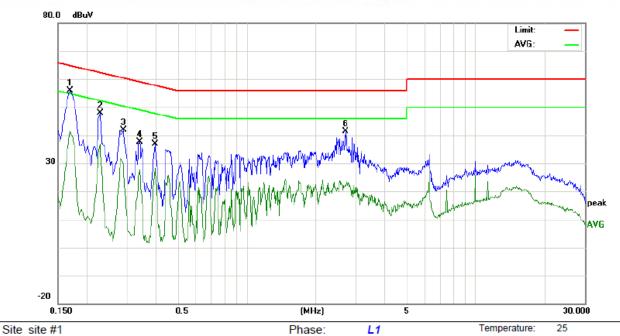

AC 120V/60Hz

Humidity:

56 %

Limit: FCC Class B CE (QP)

EUT: ACRyan VEOLO SMART ANDROID HUB

M/N: ACR-VE91200

Mode: Ping


Note:

No.	Freq.		ling_Le dBuV)	evel	Correct Factor	М	easuren (dBuV)		Lir (dB			rgin dB)		
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.1700	45.87		31.37	10.00	55.87		41.37	64.96	54.96	-9.09	-13.59	Р	
2	0.2300	37.89		26.85	10.00	47.89		36.85	62.45	52.45	-14.56	-15.60	Р	
3	0.2900	31.97		19.77	10.00	41.97		29.77	60.52	50.52	-18.55	-20.75	Р	
4	0.3420	27.63		17.71	10.00	37.63		27.71	59.15	49.15	-21.52	-21.44	Р	
5	0.3980	26.92		18.08	10.00	36.92		28.08	57.89	47.89	-20.97	-19.81	Р	
6	2.7180	31.53		12.20	9.90	41.43		22.10	56.00	46.00	-14.57	-23.90	Р	

Power:



Page 9 of 20

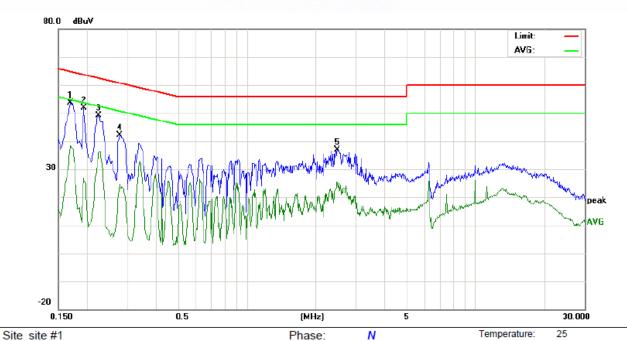

AC 120V/60Hz

Humidity:

56 %

Limit: FCC Class B CE (QP)

EUT: ACRyan VEOLO SMART ANDROID HUB

M/N: ACR-VE91200

Mode: Ping

Note:

No.	Freq.		ling_Le dBuV)	vel	Correct Factor	M	leasurem (dBuV)	ent	Lir (dB			rgin dB)		
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.1700	43.64		28.34	10.00	53.64		38.34	64.96	54.96	-11.32	-16.62	Р	
2	0.1940	41.89		16.88	10.00	51.89		26.88	63.86	53.86	-11.97	-26.98	Р	
3	0.2260	39.14		25.93	10.00	49.14		35.93	62.59	52.59	-13.45	-16.66	Р	
4	0.2779	32.13		14.70	10.00	42.13		24.70	60.88	50.88	-18.75	-26.18	Р	
5	2.4940	27.09		15.23	9.90	36.99		25.13	56.00	46.00	-19.01	-20.87	Р	

Power:



Report No. : EESZD10170006-7 Page 10 of 20

#### 7. RADIATED EMISSION TEST

#### 7.1. LIMITS


Frequency (MHz)	limits at 3m dB(μV/m)
30-88	40.0
88-216	43.5
216-960	46.0
Above 960	54.0

**NOTE:** 1. The lower limit shall apply at the transition frequency.


- 2. The limits shown above are based on measuring equipment employing a CISPR quasi-peak detector function for frequencies below or equal to 1000MHz.
- 3. The limits shown above are based on measuring equipment employing an average detector function for frequencies above 1000MHz.

#### 7.2. BLOCK DIAGRAM OF TEST SETUP

#### 30MHz ~ 1GHz:

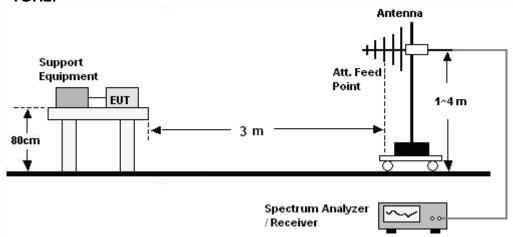

#### **Above 1GHz:**

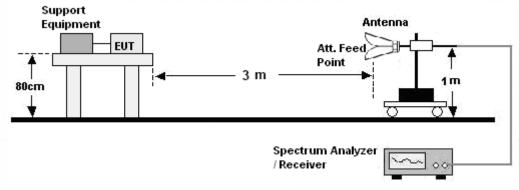

Report No.: EESZD10170006-7 Page 11 of 20

#### 7.3. PROCEDURE OF RADIATED EMISSION TEST

#### 30MHz ~ 1GHz:

- a. The EUT was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.


#### Above 1GHz:

- a. The EUT was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.



Report No. : EESZD10170006-7 Page 12 of 20

#### 7.4. GRAPHS AND DATA

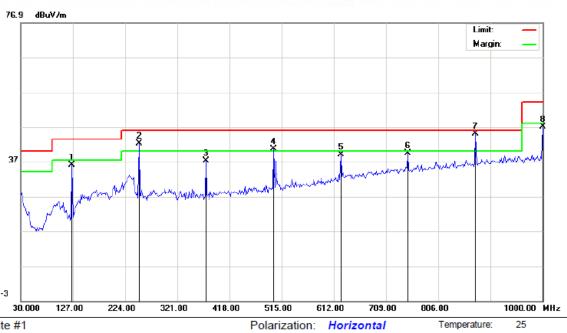

AC 120V/60Hz

Humidity:

56 %

Site site #1

Limit: FCC PART15 B

EUT: ACRyan VEOLO SMART ANDROID HUB

M/N: ACR-VE91200

Mode: Ping


Note:

No. F	req.	Reading_Level (dBuV)			Correct Factor	leasuren (dBuV/m			Limit dBuV/m)		Margin (dB)			
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1 12	5.3833	25.00			10.94	35.94			43.50		-7.56		Р	
2 24	9.8667	27.25	26.75		14.90	42.15	41.65		46.00		-4.35		Р	
3 37	4.3500	18.51			18.62	37.13			46.00		-8.87		Р	
4 50	0.4500	19.86			20.75	40.61			46.00		-5.39		Р	
5 62	4.9333	15.38			23.56	38.94			46.00		-7.06		Р	
6 74	9.4167	13.31			26.09	39.40			46.00		-6.60		Р	
7 87	5.5167	17.21	16.20		27.74	44.95	43.94		46.00		-2.06		Р	
8 10	00.000	18.31			28.75	47.06			54.00		-6.94		Р	

Power:



Report No. : EESZD10170006-7 Page 13 of 20

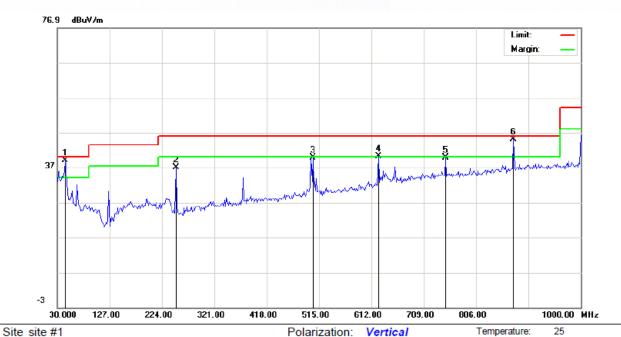

AC 120V/60Hz

Humidity:

56 %

Limit: FCC PART15 B

EUT: ACRyan VEOLO SMART ANDROID HUB

M/N: ACR-VE91200

Mode: Ping

Note:

No	. Freq.	ding_Le dBuV)	vel	Correct Factor	Measurement (dBuV/m)		Limit (dBuV/m)		Margin (dB)					
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	44.5500	26.82	23.39		12.24	39.06	35.63		40.00		-4.37		Р	
2	249.8667	22.19			14.90	37.09			46.00		-8.91		Р	
3	503.6833	18.99			20.82	39.81			46.00		-6.19		Р	
4	624.9333	16.61			23.56	40.17			46.00		-5.83		Р	
5	749.4167	13.81			26.09	39.90			46.00		-6.10		Р	
6	875.5167	17.21	16.23		27.74	44.95	43.97		46.00		-2.03		Р	

Power:

#### Remark:

The test data above 1GHz are much lower than the limit, and they are not recorded.



Report No. : EESZD10170006-7 Page 14 of 20

## **APPENDIX 1 PHOTOGRAPHS OF TEST SETUP**

**CONDUCTED EMISSION TEST SETUP** 




**RADIATED EMISSION TEST SETUP** 






Page 15 of 20

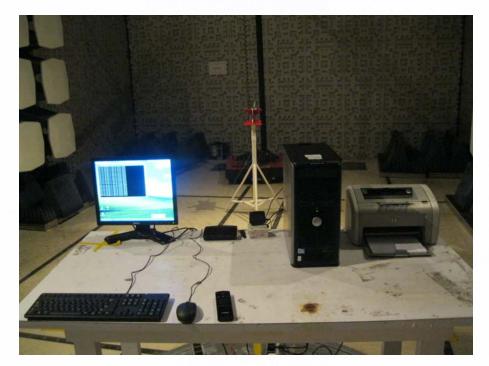



Report No. : EESZD10170006-7 Page 16 of 20

### **APPENDIX 2 PHOTOGRAPHS OF EUT**

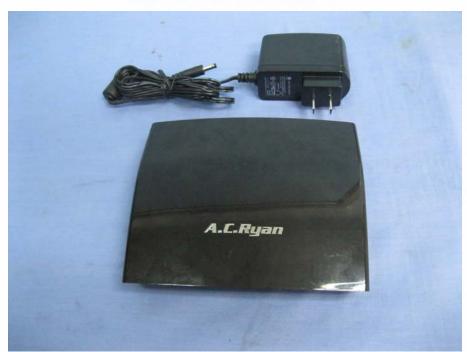

View of EUT-1



View of EUT-2



Report No.: EESZD10170006-7 Page 17 of 20



View of EUT-3



View of EUT-4



Report No. : EESZD10170006-7 Page 18 of 20



View of EUT-5



View of EUT-6



Report No. : EESZD10170006-7 Page 19 of 20




View of EUT-7



View of EUT-8



Report No. : EESZD10170006-7 Page 20 of 20

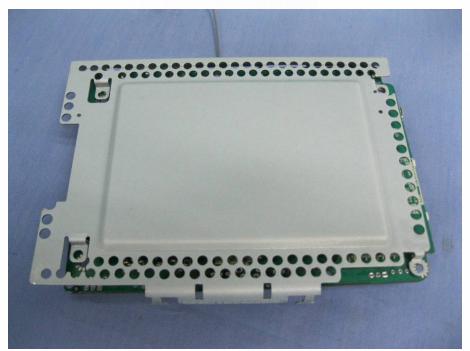

View of EUT-9



View of EUT-10

----End of the report----