



Specification acknowledgement Specification For Approval

customer name: _____ CPE
Customer

Specification description: 13 Total teeth S \ 1A-KWEQ Bring four welds

Foot-1. 13 (black) TPEX-L = 150 m m

Part name

BJ 1 M #: _____ BJL-ZSMA-KEWPQ13-I113-150B

Part No

Customer No. : _____

Customer Part No

Customer confirmed that the Customer confirmation		
Confirm that the Confirmation	verify check	Approval of the Approver

The manufacturer recognizes the Manufacturer recognition			
Sales Representative	Fitting the Drafters	verify check	Approval of the Approver
Li Jin	Yang-hui Chen		Zhou Xihua

Thank you for the opportunity to present the samples. If Simon admits to pass, please sign this form back to our company.

Thank you for giving us the chance to approve samples. If you agree to pass it, please kindly send it

back to us, Shenzhen Baijinlian Wireless Technology Co., LTD

Address: 1-11101, Yongwei Times Building, No.11, Jinye Second Road, Xi'an city, China

Tel.: 015114805156 Fax: 029-89737181

http://www.bilwireless.com




catalogue

Catalog

1. Product size diagram.....	3
2 . Product performance parameters.....	4
3. Connector specifications.....	4
4. Cable line specifications.....	4-5

amendant record

	date	revise content	
A0	2023. 09. 27	Yang-hu i Chen	new- buil t

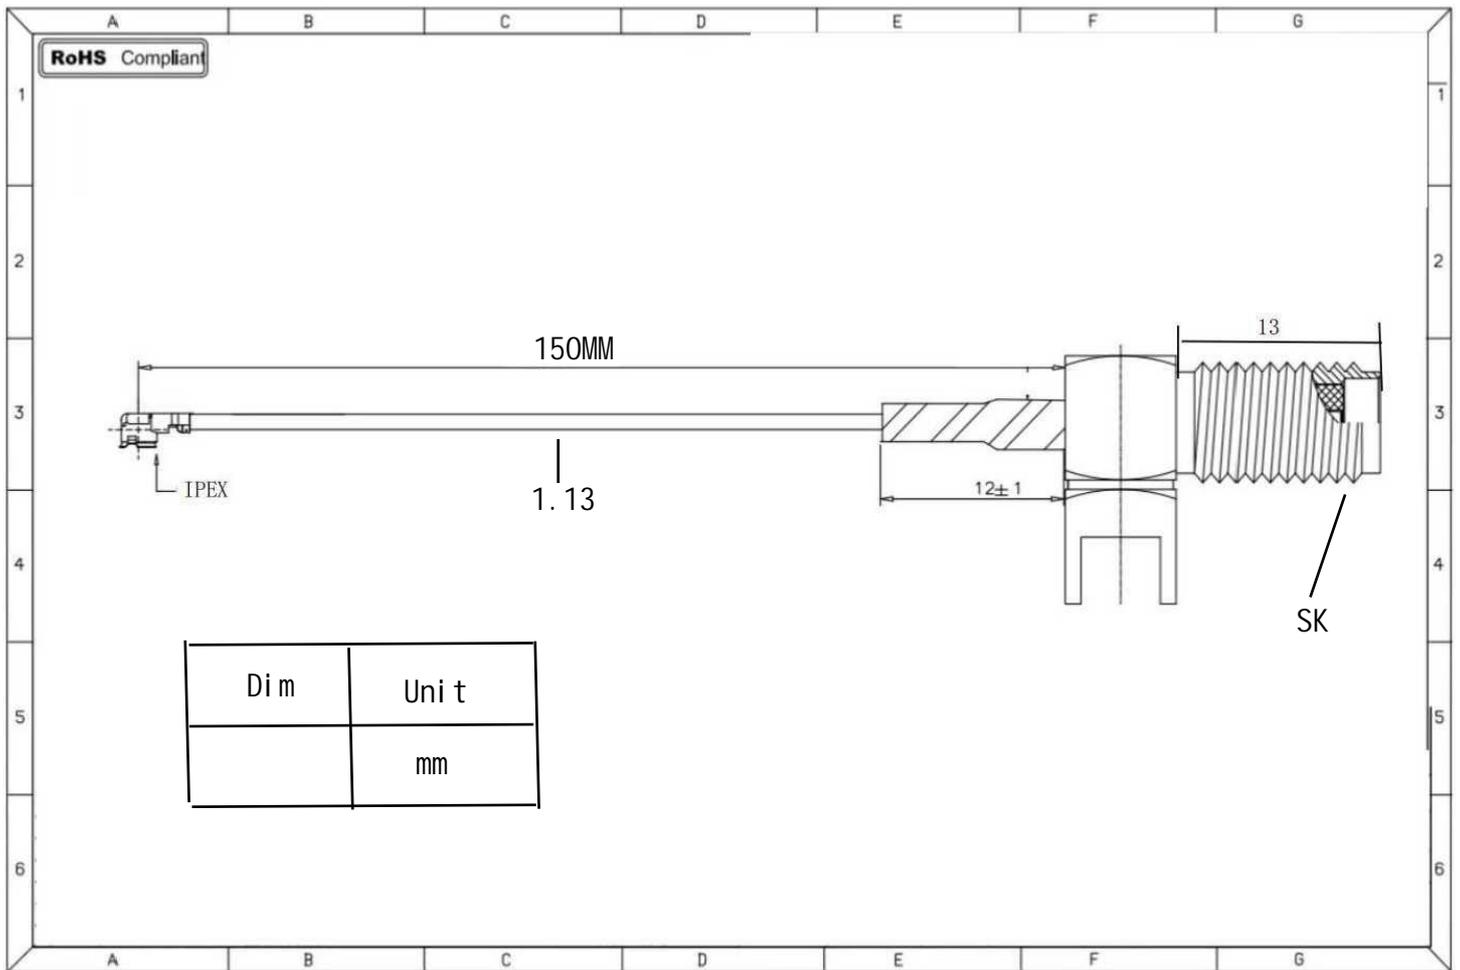



material

diameter (mm)

1. Internal conductor tinned wire 7/0.08 ±0.02

2. Insulators	Solid polyethylene (PE)	0.66±0.02
3. External conductor	tinned wire	0.88±0.05

Electrical performance parameters	
Capacitor (p F/m)	96±3
impedance (ohm)	50
speed (%)	66
Bending Radi (mm)	W7
Maximum operating voltage (VMS)	1000
Maximum operating frequency (MHz)	6000
Operating temperature range (C)	-40 To +80

Attenuation (typical value)	
frequency (MHz)	damping OdB/m)
100	0.42
400	0.58
1000	2.20
2000	3.40
3000	1.20
4000	4.50
5000	5.20
6000	5.60