

# FCC PART 22 AND 90 TEST REPORT

For

# **Hytera Communications Corporation Limited**

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, 518057 China

# FCC ID: YAMBD30XU1

Report Type: **Product Type:** Original Report Digital Portable Radio Test Engineer: Dean Liu **Report Number:** RDG160712002-00 **Report Date:** 2016-08-03 Sola Huard Sula Huang **Reviewed By:** RF Leader **Test Laboratory:** Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

# TABLE OF CONTENTS

GENERAL INFORMATION	
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
Objective	∠
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
SYSTEM TEST CONFIGURATION	
DESCRIPTION OF TEST CONFIGURATION	
Support Equipment List and Details	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	
FCC §1.1310 & §2.1093 - RF EXPOSURE	- -
Applicable Standard	
Test Result	
FCC §2.1046 &§ 22.727&§90.205- RF OUTPUT POWER	8
APPLICABLE STANDARD	8
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	
FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	
FCC \$2.1049& \$22.357 & \$ 22.731 &\$90.209 & \$90.210 - OCCUPIED BANDWIDTH & EMISSION	N MASK14
APPLICABLE STANDARD	14
TEST EQUIPMENT LIST AND DETAILS.	
TEST PROCEDURE	
TEST DATA	
FCC §2.1051& §22.861 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	
APPLICABLE STANDARD	
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	
FCC §2.1053 & §22.861 & §90.210 - RADIATED SPURIOUS EMISSIONS	30
APPLICABLE STANDARD	
TEST EQUIPMENT LIST AND DETAILS	30
TEST PROCEDURE	
TEST DATA	
FCC §2.1055 & § 22.355 & §90.213- FREQUENCY STABILITY	32
APPLICABLE STANDARD	
TEST EQUIPMENT LIST AND DETAILS	32

TEST PROCEDURE	32
Test Data	32
FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR	34
APPLICABLE STANDARD	34
TEST EQUIPMENT LIST AND DETAILS	34
TEST PROCEDURE	34
Test Data	36

#### **GENERAL INFORMATION**

#### **Product Description for Equipment under Test (EUT)**

The *Hytera Communications Corporation Limited*'s product, model: *BD302 U(1) (FCC ID: YAMBD30XU1)* (the "EUT") in this report is a *Digital Portable Radio*, which was measured approximately: 11.0 cm (H) x 5.3 cm (W) x 4.0 cm (D), rated input voltage: DC3.8V Li-ion battery or DC5V charging from adapter.

Report No.: RDG160712002-00

Adapter Information:

P/N: PS1030

MODEL: HKA00505010-XA

INPUT: AC 100-240V, 50/60Hz, 0.2A

OUTPUT: DC 5.0V, 1.0A

Note: The series product, model BD302 U(1), BD305 U(1), BD306 U(1), BD308 U(1) are electrically identical, the difference between them are just the model name, we selected BD302 U(1) for fully testing, the details were explained in the declaration letter.

\* All measurement and test data in this report was gathered from production sample serial number: 160712002 (assigned by BACL, Dongguan). The EUT was received on 2016-07-13.

#### **Objective**

This test report is prepared on behalf of *Hytera Communications Corporation Limited*. in accordance with Part 2, Part 22 and Part 90 of the Federal Communications Commission rules.

#### **Related Submittal(s)/Grant(s)**

No related submittal(s).

#### **Test Methodology**

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 22 – Public Mobile Service

Part 90 – Private Land Digital Portable Radio Service

Applicable Standards: TIA-603-D.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

# **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2015. The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 22 and 90 Page 4 of 37

# SYSTEM TEST CONFIGURATION

# **Description of Test Configuration**

The system was configured for testing in a test mode.

# **EUT Specification:**


Operating Frequency Band	400-406 MHz; 406.1-470 MHz
Modulation Mode	FM/4FSK
Channel Spacing	12.5 kHz
Rated Output Power	High: 4W
Raica Output I ower	Low: 1W

Report No.: RDG160712002-00

# **Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
/	/	/	/

# **Block Diagram of Test Setup**

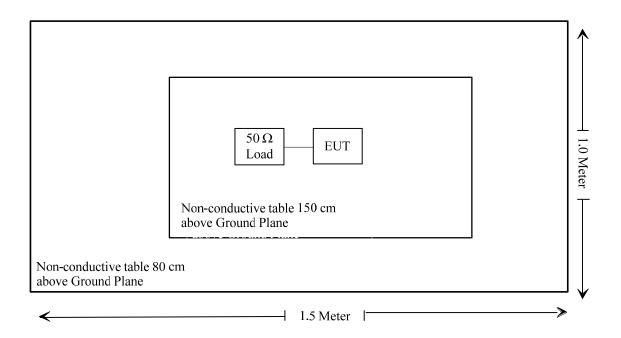

FCC Part 22 and 90 Page 5 of 37

# SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§1.1310 and §2.1093	RF Exposure	Compliant
§2.1046; § 22.727;§90.205	RF Output Power	Compliant
§2.1047;§90.207	Modulation Characteristic	Compliant
§2.1049;§22.357;§ 22. 731;§90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliant
\$2.1051; \$22.861;\$90.210	Spurious Emission at Antenna Terminal	Compliant
§2.1053; §22.861;§90.210	Spurious Radiated Emissions	Compliant
§2.1055; § 22.355;§90.213	Frequency Stability	Compliant
§90.214	Transient Frequency Behavior	Compliant

Report No.: RDG160712002-00

FCC Part 22 and 90 Page 6 of 37

# FCC §1.1310 & §2.1093 - RF EXPOSURE

Report No.: RDG160712002-00

# **Applicable Standard**

FCC§1.1310 and §2.1093.

# **Test Result**

Compliant, please refer to the SAR report: RDG160712002-20A.

FCC Part 22 and 90 Page 7 of 37

# FCC §2.1046 &§ 22.727&§90.205- RF OUTPUT POWER

# **Applicable Standard**

FCC §2.1046, § 22.727 and §90.205.

#### **Test Procedure**

Conducted RF Output Power:

TIA-603-D section 2.2.1

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Report No.: RDG160712002-00

Spectrum Analyzer setting:

RBW	VBW	
100 kHz	300 kHz	

#### **Test Equipment List and Details**

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
Weinschel Corp	Attenuator(20dB)	53-20-34	LN749	2016-05-07	2017-05-06
E-Microwave	DC Blocking	EMDCB- 00036	0E01201047	2016-05-05	2017-05-04

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25.2 °C
Relative Humidity:	50 %
ATM Pressure:	100.3 kPa

The testing was performed by Dean Liu on 2016-07-25.

FCC Part 22 and 90 Page 8 of 37

Test Result: Compliant. Please refer to following tables.

# FCC Part 90:

Modulation	Channel Spacing	f <sub>c</sub> (MHz)	Output	ucted t Power V)	Note
	(kHz)		High	Low	
		400.0125	4.00	1.04	Not for FCC Review
FM		435	3.99	1.06	/
	12.5	469.9875	4.01	1.05	/
	12.3	400.0125	4.01	1.06	Not for FCC Review
4FSK		435	4.00	1.05	/
		469.9875	4.02	1.05	/

Report No.: RDG160712002-00

# FCC Part 22:

Modulation	Channel Spacing	f <sub>c</sub> (MHz)	Output	ucted Power V)	Note
	(kHz)		High	Low	
FM	12.5	454.0125	4.02	1.05	/
4FSK	12.3	454.0125	4.01	1.04	/

Note: The rated high power is 4W (36 dBm) and low power is 1W (30 dBm).

FCC Part 22 and 90 Page 9 of 37

# FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC

#### **Applicable Standard**

FCC§2.1047 & §90.207:

(a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.

Report No.: RDG160712002-00

(b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

#### **Test Procedure**

Test Method: TIA/EIA-603 2.2.3

#### **Test Equipment List and Details**

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	RF Communications Test Set	8920A	00 235	2015-07-18	2016-07-17
Weinschel Corp	Attenuator(20dB)	53-20-34	LN749	2016-05-07	2017-05-06
E-Microwave	DC Blocking	EMDCB- 00036	0E01201047	2016-05-05	2017-05-04

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

Temperature:	30.2 °C
Relative Humidity:	50 %
ATM Pressure:	100.3 kPa

The testing was performed by Dean Liu on 2016-07-25.

Test Result: Compliant. Please refer to following table and plots.


FCC Part 22 and 90 Page 10 of 37

MODULATION LIMITING

Report No.: RDG160712002-00

Carrier Frequency: 435MHz, Channel Spacing = 12.5 kHz, high power level

	Instantaneous		Steady	y-state	
Audio Frequency (Hz)	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Limit [kHz]
300	1.041	0.105	1.021	0.083	2.5
400	1.271	0.114	1.252	0.093	2.5
500	1.645	0.125	1.622	0.102	2.5
600	1.830	0.142	1.812	0.126	2.5
700	1.867	0.151	1.844	0.132	2.5
800	1.896	0.163	1.879	0.144	2.5
900	1.999	0.168	1.977	0.150	2.5
1000	2.152	0.191	2.135	0.172	2.5
1200	2.179	0.200	2.158	0.186	2.5
1400	2.096	0.231	2.075	0.216	2.5
1600	2.065	0.250	2.044	0.232	2.5
1800	2.031	0.269	2.010	0.256	2.5
2000	1.976	0.284	1.954	0.266	2.5
2200	1.944	0.312	1.920	0.290	2.5
2400	1.953	0.321	1.933	0.302	2.5
2600	2.085	0.335	2.064	0.316	2.5
2800	2.076	0.370	2.054	0.349	2.5
3000	1.911	0.349	1.890	0.336	2.5

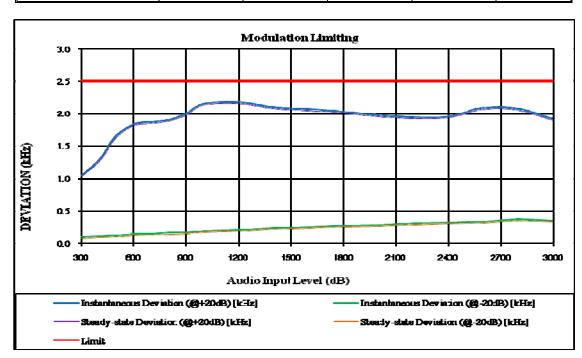


FCC Part 22 and 90 Page 11 of 37

**Audio Frequency Response** 

Report No.: RDG160712002-00

Carrier Frequency: 435 MHz, Channel Spacing = 12.5 kHz, high power level

Audio Frequency	Response Attenuation
Hz	dB
300	-11.53
400	-8.66
500	-6.20
600	-4.45
700	-3.09
800	-2.08
900	-1.14
1000	0.00
1200	1.54
1400	2.89
1600	3.90
1800	4.69
2000	5.34
2200	5.88
2400	6.40
2600	7.13
2800	7.94
3000	7.55

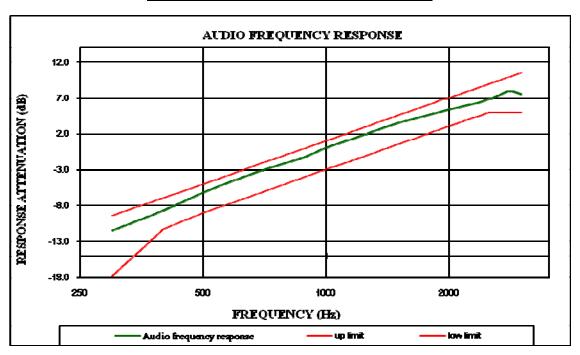


FCC Part 22 and 90 Page 12 of 37

# **Audio Frequency Low Pass Filter Response**

Report No.: RDG160712002-00

Carrier Frequency: 435 MHz, Channel Spacing = 12.5 kHz, high power level

Audio Frequency	Response Attenuation	Limit
kHz	dB	dB
3.0	-2.2	0.0
3.5	-8.4	-6.7
4.0	-14.1	-12.5
5.0	-25.0	-22.2
7.0	-39.6	-36.8
10.0	-54.8	-52.3
15.0	-72.5	-69.9
20.0	-85.0	-82.5
30.0	-86.3	-82.5
50.0	-85.5	-82.5
70.0	-85.3	-82.5

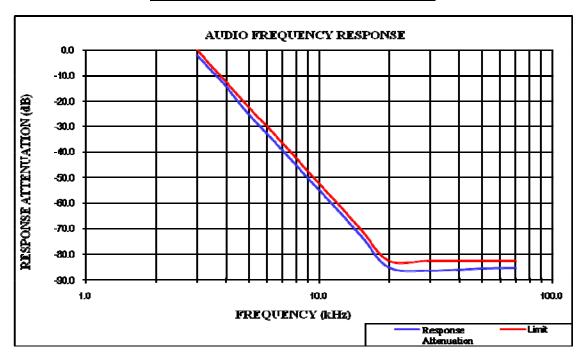

FCC Part 22 and 90 Page 13 of 37

# FCC §2.1049& §22.357 & § 22.731 &§90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK

#### Applicable Standard

FCC §2.1049, §22.357, § 22.731, §90.209 and §90.210

Applicable Emission Masks

Report No.: RDG160712002-00

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25	A or B	A or C
25-50	В	С
72-76	В	С
150-174	B, D, or E	C, D or E
150 paging only	В	С
220-222	F	F
421-512	B, D, or E	C, D, or E
450 paging only	В	G
806-809/851-854	В	Н
809-824/854-869	В	G
896-901/935-940	I	J
902-928	K	K
929-930	В	G
4940-4990 MHz	L or M	L or M
5850-5925		
All other bands	В	С

**Emission Mask D**—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed from f0: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least 7.27(fd-2.88 kHz) dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

FCC Part 22 and 90 Page 14 of 37

#### §22.357 Emission types.

Any authorized station in the Public Mobile Services may transmit emissions of any type(s) that comply with the applicable emission rule, i.e. §22.359, §22.861 or §22.917

Report No.: RDG160712002-00

#### §22.731 Emission limitations.

Upon application for multichannel operation, the FCC may authorize emission bandwidths wider than those specified in §22.357, provided that spectrum utilization is equal to or better than that achieved by single channel operation.

#### **Test Equipment List and Details**

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
НР	RF Communications Test Set	8920A	00 235	2015-07-18	2016-07-17
Weinschel Corp	Attenuator(20dB)	53-20-34	LN749	2016-05-07	2017-05-06
E-Microwave	DC Blocking	EMDCB- 00036	0E01201047	2016-05-05	2017-05-04

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### **Test Procedure**

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

# **Test Data**

#### **Environmental Conditions**

Temperature:	25.2°C
Relative Humidity:	50 %
ATM Pressure:	100.3 kPa

The testing was performed by Dean Liu on 2016-07-25.

FCC Part 22 and 90 Page 15 of 37

Test Result: Compliant. Please refer to the following tables and plots.

#### FCC Part 90:

Modulation	Channel	$\mathbf{f}_{\mathrm{c}}$	26 dB Bandwidth	99% Occupied Bandwidth	Power Level
Mode	Spacing	MHz	kHz	kHz	
		435	10.30	5.30	High
FM	12.5 kHz		10.30	5.30	Low
FWI	12.3 KHZ		10.30	5.30	High
			10.30	5.30	Low
4FSK	12.5 kHz	435	9.50	7.10	High
4F5K			9.20	7.00	Low

Report No.: RDG160712002-00

#### FCC Part 22:

Modulation Mode	Channel	$\mathbf{f}_{\mathrm{c}}$	26 dB Bandwidth	99% Occupied Bandwidth	Power Level
Mode	Spacing	MHz	kHz	kHz	
FM		10.30	5.30	High	
FIVI	10 5 kHz	5111 454.0125	10.30	5.30	Low
AECIZ	12.5 kHz 454.0125	9.40	7.00	High	
4FSK			9.50	7.00	Low

Note: Emission bandwidth was based on calculation method instead of measurement.

**Emission Designator** 

Per CFR 47  $\S 2.201\& \S 2.202\&$ , Bn = 2M + 2D

#### For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2\*(3.0 kHz + 2.5 kHz) = 11 kHz = 11 kHz

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

# For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator 7K60FXD and 7K60FXW

The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.10 kHz. The emission mask was obtained from 47CFR 90.210(d).

FXD and FXW portion of the designator indicates digital information.


Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60FXD and 7K60FXW.

FCC Part 22 and 90 Page 16 of 37

#### Part 90:


# Occupied Bandwidth – FM, 435 MHz, High Power Level

Report No.: RDG160712002-00

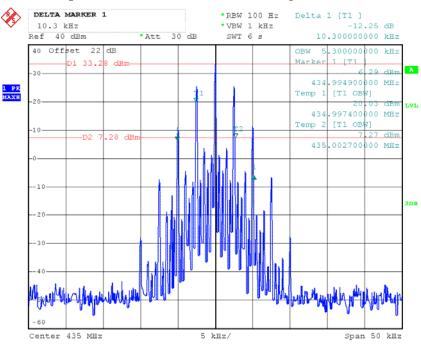

Date: 25.JUL.2016 20:32:23

#### **Emission Mask - Type D**

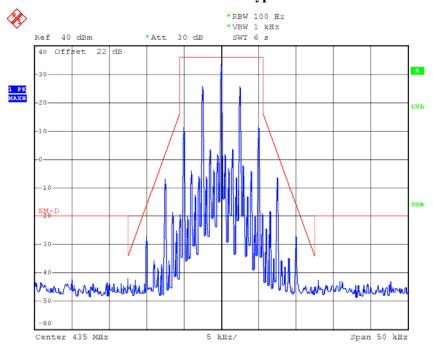


Date: 25.JUL.2016 20:17:51

FCC Part 22 and 90 Page 17 of 37


# Occupied Bandwidth - FM, 435 MHz, Low Power Level

Report No.: RDG160712002-00

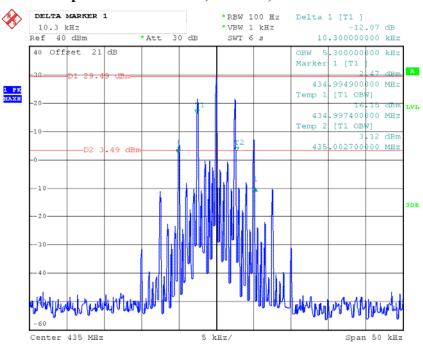

Date: 25.JUL.2016 21:24:07

#### **Emission Mask - Type D**

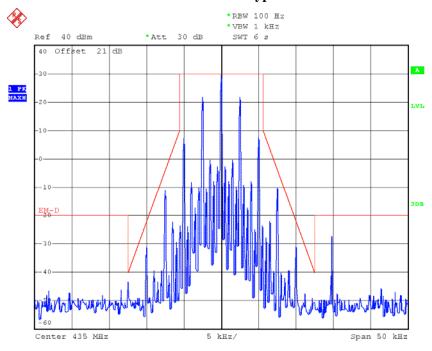


Date: 25.JUL.2016 21:21:30

FCC Part 22 and 90 Page 18 of 37


# Occupied Bandwidth -4FSK, 435 MHz, High Power Level

Report No.: RDG160712002-00

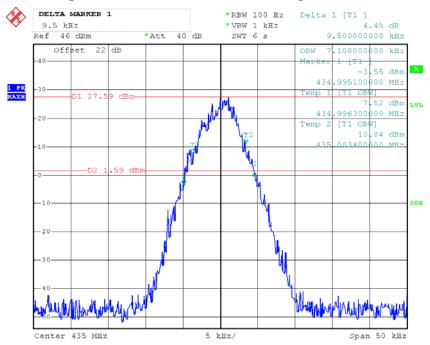

Date: 19.JUL.2016 22:22:43

#### **Emission Mask - Type D**

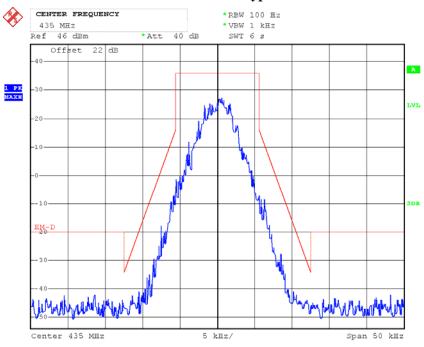


Date: 19.JUL.2016 22:20:27

FCC Part 22 and 90 Page 19 of 37


# Occupied Bandwidth - 4FSK, 435 MHz, Low Power Level

Report No.: RDG160712002-00

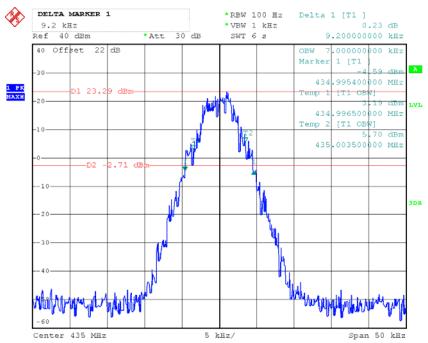

Date: 25.JUL.2016 20:55:25

# **Emission Mask - Type D**

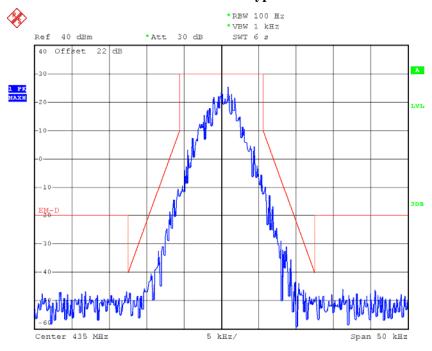


Date: 25.JUL.2016 20:58:23

FCC Part 22 and 90 Page 20 of 37


#### Occupied Bandwidth - FM, 453.2125 MHz, High Power Level

Report No.: RDG160712002-00

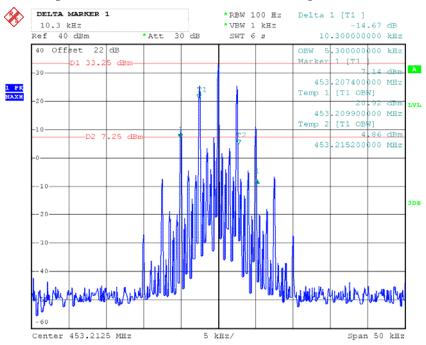

Date: 25.JUL.2016 20:36:39

#### Occupied Bandwidth - FM, 453.2125 MHz, Low Power Level

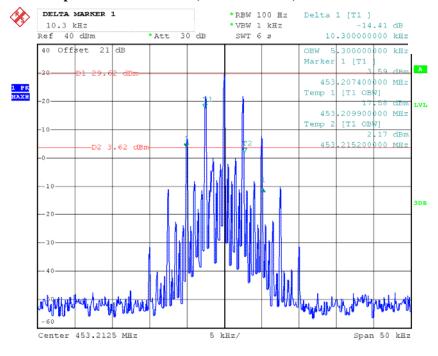


Date: 25.JUL.2016 21:26:14

FCC Part 22 and 90 Page 21 of 37

Part 22:


#### Occupied Bandwidth -FM, 454.0125 MHz, High Power Level

Report No.: RDG160712002-00

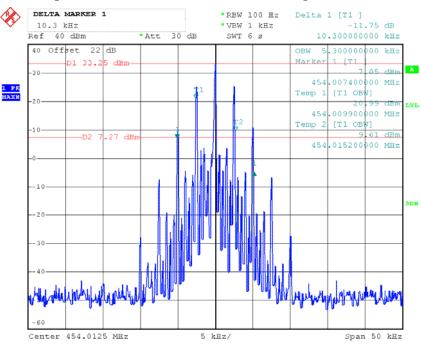

Date: 25.JUL.2016 20:42:33

#### Occupied Bandwidth - FM, 454.0125 MHz, Low Power Level

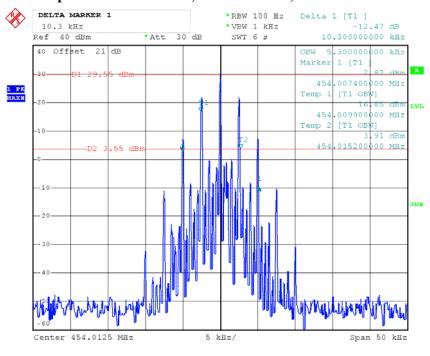


Date: 25.JUL.2016 21:28:58

FCC Part 22 and 90 Page 22 of 37


#### Occupied Bandwidth -4FSK, 454.0125 MHz, High Power Level

Report No.: RDG160712002-00

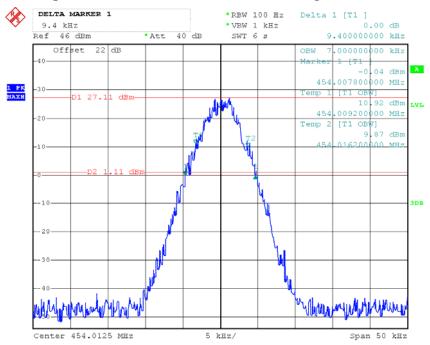

Date: 19.JUL.2016 22:28:11

#### Occupied Bandwidth - 4FSK, 454.0125 MHz, Low Power Level

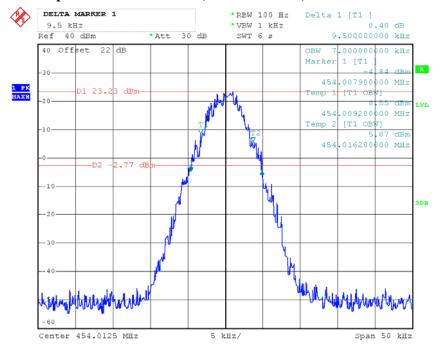

Date: 25.JUL.2016 21:10:12

FCC Part 22 and 90 Page 23 of 37

# FCC §2.1051& §22.861 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Report No.: RDG160712002-00

#### **Applicable Standard**

**Emission Mask D**—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed from f0: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least 7.27(fd-2.88 kHz) dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least  $50 + 10 \log (P) \text{ dB}$  or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

#### §22.861 Emission limitations.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

#### **Test Equipment List and Details**

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
R&S	Spectrum Analyzer	FSEM	DE23437	2015-11-23	2016-11-22
НР	RF Communications Test Set	8920A	00 235	2015-07-18	2016-07-17
Weinschel Corp	Attenuator(20dB)	53-20-34	LN749	2016-05-07	2017-05-06
Mini-Circuits	HIGH PASS FILTER	BHP-550+	YZU15801121	2016-05-05	2017-05-04
E-Microwave	DC Blocking	EMDCB- 00036	0E01201047	2016-05-05	2017-05-04

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

FCC Part 22 and 90 Page 24 of 37

# **Test Procedure**

Adjust the spectrum analyzer for the following settings:

1) Resolution Bandwidth = 100 kHz for spurious emissions below 1 GHz, and 1 MHz for spurious emissions above 1 GHz.

Report No.: RDG160712002-00

- 2) Video Bandwidth ≥3 times the resolution bandwidth.
  3) Sweep Speed ≤2000 Hz per second.
  4) Detector Mode = mean or average power.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25.2 °C
Relative Humidity:	50 %
ATM Pressure:	100.3 kPa


The testing was performed by Dean Liu on 2016-07-25

FCC Part 22 and 90 Page 25 of 37 Fundamental test


Filter

#### **FCC PART 90** 435 MHz - FM Mode, High Power

Report No.: RDG160712002-00

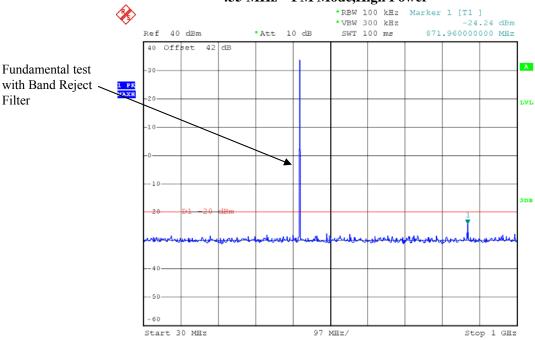

25.JUL.2016 19:13:43

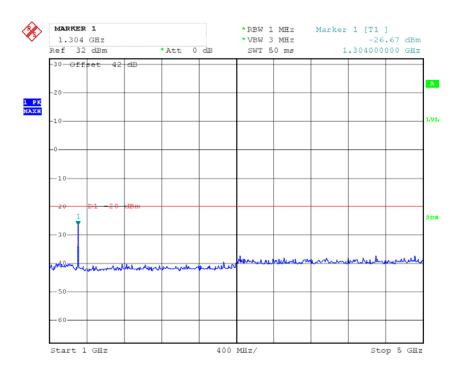


Date: 25.JUL.2016 19:33:06


FCC Part 22 and 90 Page 26 of 37

#### FCC PART 90 435 MHz –4FSK Mode,High Power

Report No.: RDG160712002-00

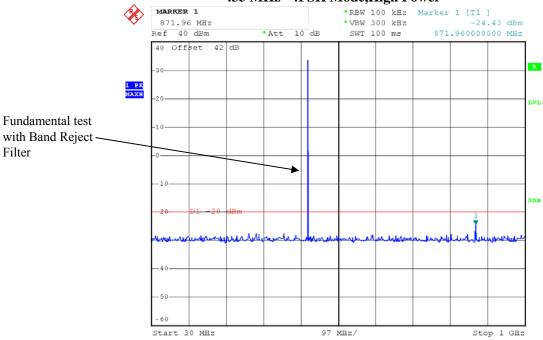

Date: 25.JUL.2016 19:11:35

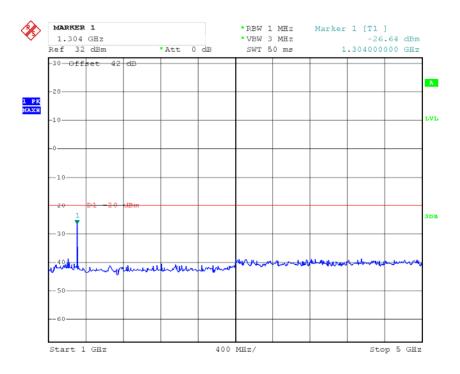


Date: 25.JUL.2016 19:36:12


FCC Part 22 and 90 Page 27 of 37

#### FCC PART 22 454.0125 MHz –FM Mode,High Power

Report No.: RDG160712002-00

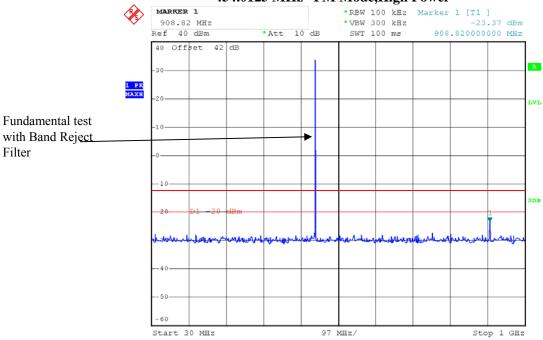

Date: 25.JUL.2016 19:14:29

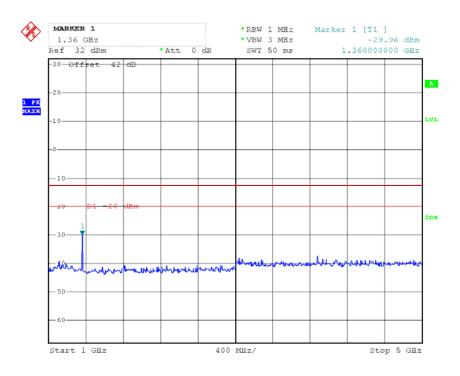


Date: 25.JUL.2016 19:31:38


FCC Part 22 and 90 Page 28 of 37

#### FCC PART 22 454.0125 MHz –4FSK Mode,High Power

Report No.: RDG160712002-00

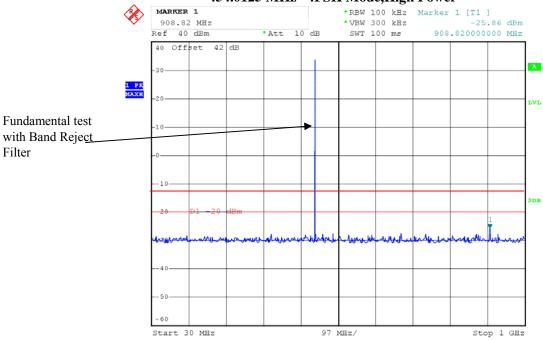

Date: 25.JUL.2016 19:12:54

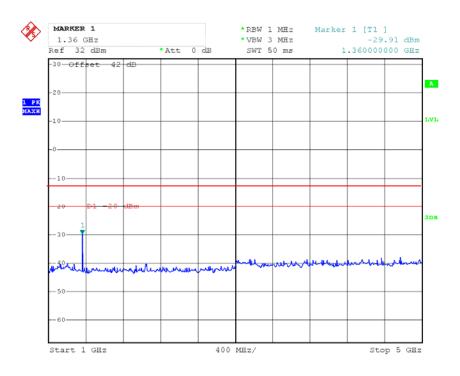

Date: 25.JUL.2016 19:35:33

FCC Part 22 and 90 Page 29 of 37

# FCC §2.1053 & §22.861 & §90.210 - RADIATED SPURIOUS EMISSIONS

Report No.: RDG160712002-00

#### **Applicable Standard**

FCC §2.1053 and §22.861 and §90.210

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Signal Generator	1026	320408	2015-11-23	2016-11-22
Sunol Sciences	Antenna	ЈВ3	A060611-3	2014-07-28	2017-07-27
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-19
TDK RF	Horn Antenna	HRN-0118	130 084	2015-09-06	2018-09-06
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
N/A	Coaxial Cable	14m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	8m	N/A	2016-05-06	2017-05-06
Mini-Circuits	HIGH PASS FILTER	BHP-550+	YZU15801121	2016-05-05	2017-05-04
Weinschel Corp	Terminal Load(100W)	1440-3	MD447	/	/

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### **Test Procedure**

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

# For part 90:

Spurious emissions in dB = 10 1g (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = $50+10 \text{ Log}_{10}$  (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

#### For part 22:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P) dB$ .

FCC Part 22 and 90 Page 30 of 37

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25.4°C
Relative Humidity:	54 %
ATM Pressure:	100.1 kPa

The testing was performed by Dean Liu on 2016-07-16.

Test Mode: Transmitting (FM mode, high power level)

Frequency	Polar	S.A. Reading	S.G. Level	Antenna Gain	Cable Loss	Absolute Level	Limit	Margin
MHz	H/V	dΒμV	dBm	dBd/dBi	dB	dBm	dBm	dB
		Freque	ncy: 435.0	000 MHz, for	FCC PAI	RT 90		
870.000	Н	24.62	-50	0.0	1.0	-51.0	-20.0	31.0
870.000	V	24.26	-47.2	0.0	1.0	-48.2	-20.0	28.2
1305.000	Н	39.82	-60	8.3	1.3	-53.0	-20.0	33.0
1305.000	V	34.46	-65.9	8.3	1.3	-58.9	-20.0	38.9
1740.000	Н	31.48	-69.2	10.9	1.4	-59.7	-20.0	39.7
1740.000	V	31.37	-69.6	10.9	1.4	-60.1	-20.0	40.1
	Frequency:454.0125 MHz, for FCC PART 22							
908.025	Н	24.26	-49.9	0.0	1.0	-50.9	-13.0	37.9
908.025	V	23.75	-47.2	0.0	1.0	-48.2	-13.0	35.2
1362.038	Н	40.32	-60	8.7	1.4	-52.7	-13.0	39.7
1362.038	V	35.35	-65	8.7	1.4	-57.7	-13.0	44.7
1816.050	Н	31.69	-68.3	11.2	1.3	-58.4	-13.0	45.4
1816.050	V	31.57	-68.7	11.2	1.3	-58.8	-13.0	45.8

Report No.: RDG160712002-00

Test Mode: Transmitting (4FSK mode, high power level)

Frequency	Polar	S.A. Reading	S.G. Level	Antenna Gain	Cable Loss	Absolute Level	Limit	Margin
MHz	H/V	dΒμV	dBm	dBd/dBi	dB	dBm	dBm	dB
		Freque	ency:435.0	00 MHz, for	FCC PAI	RT 90		
870.000	Н	25.54	-49.1	0.0	1	-50.1	-20.0	30.1
870.000	V	25.61	-45.8	0.0	1	-46.8	-20.0	26.8
1305.000	Н	41.12	-58.7	8.3	1.3	-51.7	-20.0	31.7
1305.000	V	35.39	-64.9	8.3	1.3	-57.9	-20.0	37.9
1740.000	Н	32.04	-68.7	10.9	1.4	-59.2	-20.0	39.2
1740.000	V	31.92	-69	10.9	1.4	-59.5	-20.0	39.5
	Frequency:454.0125 MHz, for FCC PART 22							
908.025	Н	24.41	-49.8	0.0	1	-50.8	-13.0	37.8
908.025	V	23.58	-47.3	0.0	1	-48.3	-13.0	35.3
1362.038	Н	42.03	-58.3	8.7	1.4	-51	-13.0	38
1362.038	V	36.03	-64.3	8.7	1.4	-57	-13.0	44
1816.050	Н	31.57	-68.5	11.2	1.3	-58.6	-13.0	45.6
1816.050	V	32.60	-67.7	11.2	1.3	-57.8	-13.0	44.8

# Note:

- The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
   Absolute Level = SG Level Cable loss + Antenna Gain
   Margin = Limit-Absolute Level

FCC Part 22 and 90 Page 31 of 37

# FCC §2.1055 & § 22.355 & §90.213- FREQUENCY STABILITY

#### **Applicable Standard**

FCC §2.1055, § 22.355, §90.213

#### **Test Equipment List and Details**

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-3	2015-09-10	2016-09-09
UNI-T	Multimeter	UT39A	M130199938	2016-04-02	2017-04-02
Weinschel Corp	Attenuator(20dB)	53-20-34	LN749	2016-05-07	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-05	2017-05-04

Report No.: RDG160712002-00

#### **Test Procedure**

Frequency Stability vs. Temperature: The equipment under test was connected to DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The power leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	30.4 °C
Relative Humidity:	54 %
ATM Pressure:	100.1 kPa

The testing was performed by Dean Liu on 2016-07-16.

FCC Part 22 and 90 Page 32 of 37

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Mode: Transmitting

# FCC PART 90:

Ref	Reference Frequency: 435 MHz, Limit: 2.5 ppm					
Temerature	Voltage	Measured	Frequency Error			
${\mathfrak C}$	$V_{DC}$	MHz	ppm			
-30	3.8	435.000032	0.07			
-20	3.8	435.000031	0.07			
-10	3.8	435.000027	0.06			
0	3.8	435.000038	0.09			
10	3.8	435.000032	0.07			
20	3.8	435.000026	0.06			
30	3.8	435.000029	0.07			
40	3.8	435.000034	0.08			
50	3.8	435.000021	0.05			
25	3.6	435.000036	0.08			
25	3.8	435.000039	0.09			

Report No.: RDG160712002-00

# FCC PART 22:

Reference Frequency: 454.0125 MHz, Limit: 5.0 ppm						
Temerature	Voltage	Measured	Frequency Error			
°C	V <sub>DC</sub>	MHz	ppm			
-30	3.8	454.012535	0.08			
-20	3.8	454.012520	0.04			
-10	3.8	454.012519	0.04			
0	3.8	454.012523	0.05			
10	3.8	454.012522	0.05			
20	3.8	454.012526	0.06			
30	3.8	454.012529	0.06			
40	3.8	454.012528	0.06			
50	3.8	454.012531	0.07			
25	3.6	454.012530	0.07			
23	3.8	454.012534	0.07			

Note: The operation end point is 3.6V which is specified by the manufacturer.

FCC Part 22 and 90 Page 33 of 37

# FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR

#### **Applicable Standard**

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3

#### **Test Equipment List and Details**

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-11-23	2016-11-22
HP	Signal Generator	8648A	3426A00831	2015-11-06	2016-11-06
Weinschel Corp	Attenuator(20dB)	53-20-34	LN749	2016-05-07	2017-05-06
E-Microwave	DC Blocking	EMDCB- 00036	0E01201047	2016-05-05	2017-05-04

Report No.: RDG160712002-00


#### **Test Procedure**

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at  $\pm 12.5$  kHz deviation and set its output level to -100dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P<sub>0</sub>.
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to P<sub>0</sub>. This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ±4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "tiger offset" to -10ms for turn on and -15ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t<sub>on</sub>. The trace should be maintained within the allowed divisions during the period t<sub>1</sub> and t<sub>2</sub>.

FCC Part 22 and 90 Page 34 of 37

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Report No.: RDG160712002-00



FCC Part 22 and 90 Page 35 of 37

# **Test Data**

# **Environmental Conditions**

Temperature:	25.2°C
Relative Humidity:	50 %
ATM Pressure:	100.3kPa

The testing was performed by Dean Liu on 2016-07-25.

Channel Spacing (kHz)	Transient Period (ms)	Maximum frequency difference	Result
	$<10(t_1)$	±12.5 kHz	
12.5	<25(t <sub>2</sub> )	±6.25 kHz	Pass
	<10(t <sub>3</sub> )	±12.5 kHz	


Report No.: RDG160712002-00

Please refer to the following plots.

FCC Part 22 and 90 Page 36 of 37


# Turn on – 435 MHz, High power level

Report No.: RDG160712002-00

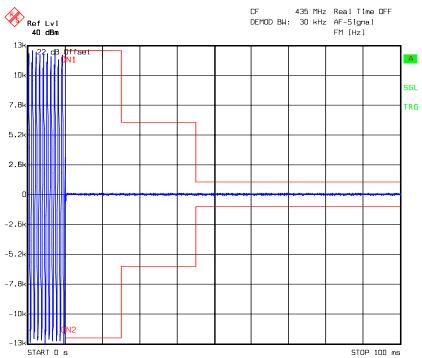

Date: 25.JUL.2016 00:59:11

# Turn off – 435 MHz, High power level

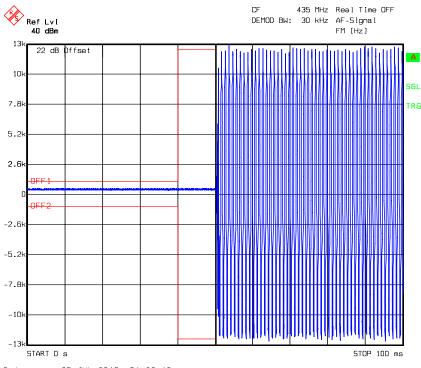

Date: 25.JUL.2016 01:22:10

\*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Part 22 and 90 Page 37 of 37