



FCC PART 22, 74, 80 and 90

TEST REPORT

For

Hytera Communications Corporation Limited

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, 518057 China

FCC ID: YAMPD98XIVHF

| | |
|--|---|
| Report Type: Original Report | Product Type: Digital Portable Radio |
| Report Number: | <u>RDG171207016-00A</u> |
| Report Date: | <u>2018-01-03</u> |
| Reviewed By: | <u>Candy Li</u>  |
| Prepared By: | Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn |

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP* or any agency of the Federal Government. * This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk “**”.

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL INFORMATION | 4 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4 |
| OBJECTIVE..... | 4 |
| RELATED SUBMITTAL(S)/GRANT(S)..... | 4 |
| TEST METHODOLOGY..... | 5 |
| MEASUREMENT UNCERTAINTY..... | 5 |
| TEST FACILITY..... | 5 |
| SYSTEM TEST CONFIGURATION | 6 |
| DESCRIPTION OF TEST CONFIGURATION..... | 6 |
| EUT EXERCISE SOFTWARE..... | 6 |
| SPECIAL ACCESSORIES..... | 6 |
| EQUIPMENT MODIFICATIONS..... | 6 |
| SUPPORT EQUIPMENT LIST AND DETAILS..... | 6 |
| EXTERNAL I/O CABLE..... | 6 |
| BLOCK DIAGRAM OF TEST SETUP..... | 7 |
| SUMMARY OF TEST RESULTS | 8 |
| TEST EQUIPMENT LIST | 9 |
| FCC §1.1307(b) & §2.1093 - RF EXPOSURE | 10 |
| APPLICABLE STANDARD..... | 10 |
| FCC §2.1046 & § 22.727 & §74.461 & §80.215 & §90.205 - RF OUTPUT POWER | 11 |
| APPLICABLE STANDARD..... | 11 |
| TEST PROCEDURE..... | 11 |
| TEST DATA..... | 11 |
| FCC §2.1047 - MODULATION CHARACTERISTIC | 13 |
| APPLICABLE STANDARD..... | 13 |
| TEST PROCEDURE..... | 13 |
| TEST DATA..... | 13 |
| FCC §2.1049 & §22.357 & § 22.731 & §74.462 & § 80.205 & § 80.207 & §80.211 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK | 24 |
| APPLICABLE STANDARD..... | 24 |
| TEST PROCEDURE..... | 24 |
| TEST DATA..... | 25 |
| FCC §2.1051 & §22.861 & §74.462 & § 80.211 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS | 45 |
| APPLICABLE STANDARD..... | 45 |
| TEST PROCEDURE..... | 46 |
| TEST DATA..... | 46 |
| FCC §2.1053 & §22.861 & §74.462 & § 80.211 & §90.210 - RADIATED SPURIOUS EMISSIONS | 56 |
| APPLICABLE STANDARD..... | 56 |
| TEST PROCEDURE..... | 56 |
| TEST DATA..... | 56 |
| FCC §2.1055 & § 22.355 & §74.464 & § 80.209 & §90.213 - FREQUENCY STABILITY | 59 |
| APPLICABLE STANDARD..... | 59 |

| | |
|--|-----------|
| TEST PROCEDURE | 59 |
| TEST DATA | 59 |
| FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR..... | 65 |
| APPLICABLE STANDARD | 65 |
| TEST PROCEDURE | 65 |
| TEST DATA | 66 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Hytera Communications Corporation Limited's* product, model number: *PD982i VHF* (FCC ID: *YAMPD98XIVHF*) in this report is a *Digital Portable Radio* which was measured approximately: 131 mm (L) x 54.5 mm (W) x 36 mm (H), rated input voltage: DC 7.4V rechargeable Li-ion battery or DC 12V from adapter.

Adapter Information:

Model: HKA01212010-XQ

Input: AC 100-240V, 50/60Hz, 0.5A

Output: DC 12V, 1.0 A

| Type | Parameter |
|---------------------------|-------------------|
| Frequency Range(MHz) | 136-174 |
| Rated Output power(Watts) | 5 (High)/ 1(Low) |
| Modulation | FM/ 4FSK |
| Channel Spacing(kHz) | 12.5/ 25 (Analog) |
| | 12.5 (Digital) |

Notes: This series products model: PD985i VHF, PD986i VHF, PD988i VHF and PD982i VHF are electrically identical, the difference among them is only model number due to marketing purpose. Model PD982i VHF was selected for fully testing, the detailed information can be referred to the declaration letter which was stated and guaranteed by the applicant.

** All measurement and test data in this report was gathered from production sample serial number: 171207016 (Assigned by BAACL, Shenzhen). The EUT supplied by the applicant was received on 2017-12-07.*

Objective

This test report is prepared on behalf of *Hytera Communications Corporation Limited* in accordance with Part 2, and Part 22, 74, 80, 90 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS & DTS submission with FCC ID: YAMPD98XIVHF.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 22 – Public Mobile Service

Part 74 – Experimental Radio, Auxiliary, Special Broadcast and other Program Distributonal Service

Part 80 – Stantions in the Maritme Service

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

| Parameter | | uncertainty |
|------------------------------|------------|-------------|
| Occupied Channel Bandwidth | | ±5% |
| RF output power, conducted | | ±1.5dB |
| Unwanted Emission, conducted | | ±1.5dB |
| Emissions, Radiated | Below 1GHz | ±4.75dB |
| | Above 1GHz | ±4.88dB |
| Temperature | | ±1 °C |
| Supply voltages | | ±0.4% |

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 382179, the FCC Designation No.: CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

EUT Exercise Software

No exercise software was used.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|------------|---------------|
| N/A | Load | 100W/50Ohm | N/A |

External I/O Cable

| Cable Description | Length (m) | From Port | To |
|-------------------|------------|-----------|-----|
| N/A | N/A | N/A | N/A |

Block Diagram of Test Setup

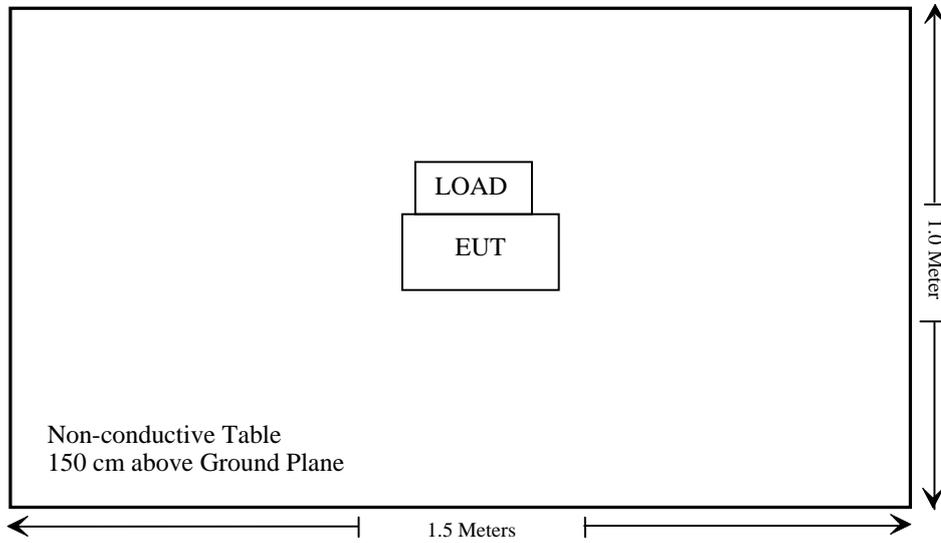

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Results |
|---|---------------------------------------|----------------|
| FCC §1.1307(b) & §2.1093 | RF Exposure | Compliance |
| §2.1046; § 22.727; §74.461; § 80.215; §90.205 | RF Output Power | Compliance |
| §2.1047 | Modulation Characteristic | Compliance |
| §2.1049;§22.357;§ 22.731; §74.462; § 80.205; § 80.207; § 80.211; §90.209; §90.210 | Occupied Bandwidth & Emission Mask | Compliance |
| §2.1051; §22.861; §74.462; § 80.211;§90.210 | Spurious Emission at Antenna Terminal | Compliance |
| §2.1053; §22.861; §74.462; § 80.211;§90.210 | Spurious Radiated Emissions | Compliance |
| §2.1055; § 22.355; §74.464; § 80.209;§90.213 | Frequency Stability | Compliance |
| §90.214 | Transient Frequency Behavior | Compliance |

TEST EQUIPMENT LIST

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-------------------------------|--------------------------------|-----------------------|------------------------|------------------|----------------------|
| Radiated Emission Test | | | | | |
| Rohde & Schwarz | Signal Generator | FSIQ26 | 8386001028 | 2017-04-24 | 2018-04-24 |
| Sunol Sciences | Bi-log Antenna | JB1 | A040904-2 | 2017-12-17 | 2020-12-17 |
| Mini | Pre-amplifier | ZVA-183-S+ | 5969001149 | 2017-05-21 | 2018-05-21 |
| HP | Amplifier | HP8447E | 1937A01046 | 2017-11-19 | 2018-05-17 |
| Anritsu | Signal Generator | 68369B | 004114 | 2017-12-05 | 2018-12-05 |
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101120 | 2017-12-07 | 2018-12-07 |
| COM POWER | Dipole Antenna | AD-100 | 041000 | NCR | NCR |
| A.H. System | Horn Antenna | SAS-200/571 | 135 | 2015-08-18 | 2018-08-17 |
| Ducommun technologies | RF Cable | UFA210A-1-4724-30050U | MFR64369 223410-001 | 2017-11-19 | 2018-05-17 |
| Ducommun technologies | RF Cable | 104PEA | 218124002 | 2017-11-19 | 2018-05-17 |
| Ducommun technologies | RF Cable | RG-214 | 1 | 2017-11-19 | 2018-05-17 |
| Ducommun technologies | RF Cable | RG-214 | 2 | 2017-11-22 | 2018-05-22 |
| RF Conducted Test | | | | | |
| Rohde & Schwarz | Signal Analyzer | FSW13 | 103533 | 2017-06-15 | 2018-06-14 |
| ESPEC | Temperature & Humidity Chamber | EL-10KA | 09107726 | 2017-11-22 | 2018-11-22 |
| Long Wei | DC Power Supply | TPR-6420D | 398363 | NCR | NCR |
| Rohde & Schwarz | Vector Signal Generator | SMW200A | 102522 | 2017-06-15 | 2018-06-14 |
| BEW | Coaxial Attenuator | TS300-6-40 | N/A | 2017-06-15 | 2018-06-14 |
| MICABLE | RF Cable | D02 | N/A | 2017-06-15 | 2018-06-14 |
| Rohde & Schwarz | SPECTRUM ANALYZER | FSU26 | 200120 | 2017-12-05 | 2018-12-05 |
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 837405/023 | 2017-04-24 | 2018-04-24 |
| WEINSCHL | 30dB Attenuator | 53-30-43 | PG633 | 2017-11-22 | 2018-05-22 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE

Applicable Standard

According to FCC §1.1307(b) and §2.1093, portable device should be subjected to routine environmental evaluation for RF exposure prior or equipment authorization or use.

Result: Compliance.

Please refer to SAR Report Number: RDG171207016-20.

FCC §2.1046 & § 22.727 & §74.461 & §80.215 & §90.205 - RF OUTPUT POWER

Applicable Standard

FCC §2.1046, § 22.727, §74.461, § 80.215 and §90.205

Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

| | |
|--------------|------------------|
| <u>R B/W</u> | <u>Video B/W</u> |
| 100 kHz | 300 kHz |

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 24 °C |
| Relative Humidity: | 55 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Xiangguang Kong on 2017-12-19.

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table.

| Modulation | Channel Separation (kHz) | Frequency (MHz) | Power Level | Output Power (dBm) | Output Power (W) | Note |
|------------|--------------------------|-----------------|-------------|--------------------|------------------|----------------|
| Analog | 12.5 | 136.025 | High | 37.61 | 5.77 | For Federal |
| | | | Low | 30.05 | 1.01 | |
| | 12.5 | 151.025 | High | 37.61 | 5.77 | For Part 22/90 |
| | | | Low | 30.38 | 1.09 | |
| | 12.5 | 155.7525 | High | 37.58 | 5.73 | For Part 90 |
| | | | Low | 30.72 | 1.18 | |
| | 12.5 | 153.025 | High | 37.72 | 5.92 | For Part 74/90 |
| | | | Low | 30.24 | 1.06 | |
| | 12.5 | 173.97 | High | 37.65 | 5.82 | For Federal |
| | | | Low | 30.43 | 1.10 | |
| | 25 | 136.025 | High | 37.59 | 5.74 | For Federal |
| | | | Low | 30.05 | 1.01 | |
| | 25 | 151.025 | High | 37.67 | 5.85 | For Part 22 |
| | | | Low | 30.43 | 1.10 | |
| | 25 | 153.025 | High | 37.57 | 5.71 | For Part 74 |
| | | | Low | 30.20 | 1.05 | |
| | 25 | 161.605 | High | 37.59 | 5.74 | For Part 80 |
| | | | Low | 30.54 | 1.13 | |
| | 25 | 173.97 | High | 37.65 | 5.82 | For Federal |
| | | | Low | 30.43 | 1.10 | |
| Digital | 12.5 | 136.025 | High | 37.61 | 5.77 | For Federal |
| | | | Low | 30.04 | 1.01 | |
| | 12.5 | 151.025 | High | 37.25 | 5.31 | For Part 22/90 |
| | | | Low | 30.41 | 1.10 | |
| | 12.5 | 155.7525 | High | 37.64 | 5.81 | For Part 90 |
| | | | Low | 30.51 | 1.12 | |
| | 12.5 | 153.025 | High | 37.77 | 5.98 | For Part 74/90 |
| | | | Low | 30.21 | 1.05 | |
| | 12.5 | 173.97 | High | 37.62 | 5.78 | For Federal |
| | | | Low | 30.47 | 1.11 | |

Note: Rated high power is 5W, limit is 4-6W
 Rated low power is 1W, limit is 0.8-1.2W

FCC §2.1047 - MODULATION CHARACTERISTIC

Applicable Standard

FCC§2.1047:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Procedure

Test Method: TIA/EIA-603 2.2.3

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 24 °C |
| Relative Humidity: | 52 % |
| ATM Pressure: | 101.1 kPa |

The testing was performed by Xiangguang Kong on 2017-12-22.

Test Mode: Transmitting


Result: Compliance.

Analog Modulation:

MODULATION LIMITING

Carrier Frequency: 151.025 MHz, Channel Separation=12.5 kHz


| Audio Frequency (Hz) | Instantaneous | | Steady-state | | FCC Limit [kHz] |
|-------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------|
| | DEVIATION (@+20dB) [kHz] | DEVIATION (@-20dB) [kHz] | DEVIATION (@+20dB) [kHz] | DEVIATION (@-20dB) [kHz] | |
| 300 | 2.241 | 0.129 | 2.221 | 0.098 | 2.5 |
| 400 | 2.249 | 0.142 | 2.203 | 0.125 | 2.5 |
| 500 | 2.261 | 0.152 | 2.217 | 0.109 | 2.5 |
| 600 | 2.252 | 0.163 | 2.220 | 0.112 | 2.5 |
| 700 | 2.217 | 0.182 | 2.123 | 0.163 | 2.5 |
| 800 | 2.253 | 0.179 | 2.250 | 0.174 | 2.5 |
| 900 | 2.267 | 0.212 | 2.258 | 0.192 | 2.5 |
| 1000 | 2.263 | 0.243 | 2.261 | 0.242 | 2.5 |
| 1200 | 2.284 | 0.253 | 2.280 | 0.231 | 2.5 |
| 1400 | 2.286 | 0.264 | 2.236 | 0.242 | 2.5 |
| 1600 | 2.306 | 0.289 | 2.211 | 0.263 | 2.5 |
| 1800 | 2.287 | 0.331 | 2.256 | 0.278 | 2.5 |
| 2000 | 2.315 | 0.352 | 2.235 | 0.289 | 2.5 |
| 2100 | 2.284 | 0.374 | 2.241 | 0.321 | 2.5 |
| 2200 | 2.268 | 0.368 | 2.245 | 0.352 | 2.5 |
| 2300 | 2.262 | 0.342 | 2.174 | 0.309 | 2.5 |
| 2400 | 2.253 | 0.354 | 2.183 | 0.286 | 2.5 |
| 2500 | 2.214 | 0.396 | 2.193 | 0.335 | 2.5 |
| 2600 | 2.152 | 0.401 | 2.145 | 0.387 | 2.5 |
| 2700 | 2.143 | 0.399 | 2.103 | 0.390 | 2.5 |
| 2800 | 2.106 | 0.384 | 2.068 | 0.332 | 2.5 |
| 2900 | 2.087 | 0.396 | 1.968 | 0.356 | 2.5 |
| 3000 | 1.986 | 0.438 | 1.938 | 0.401 | 2.5 |

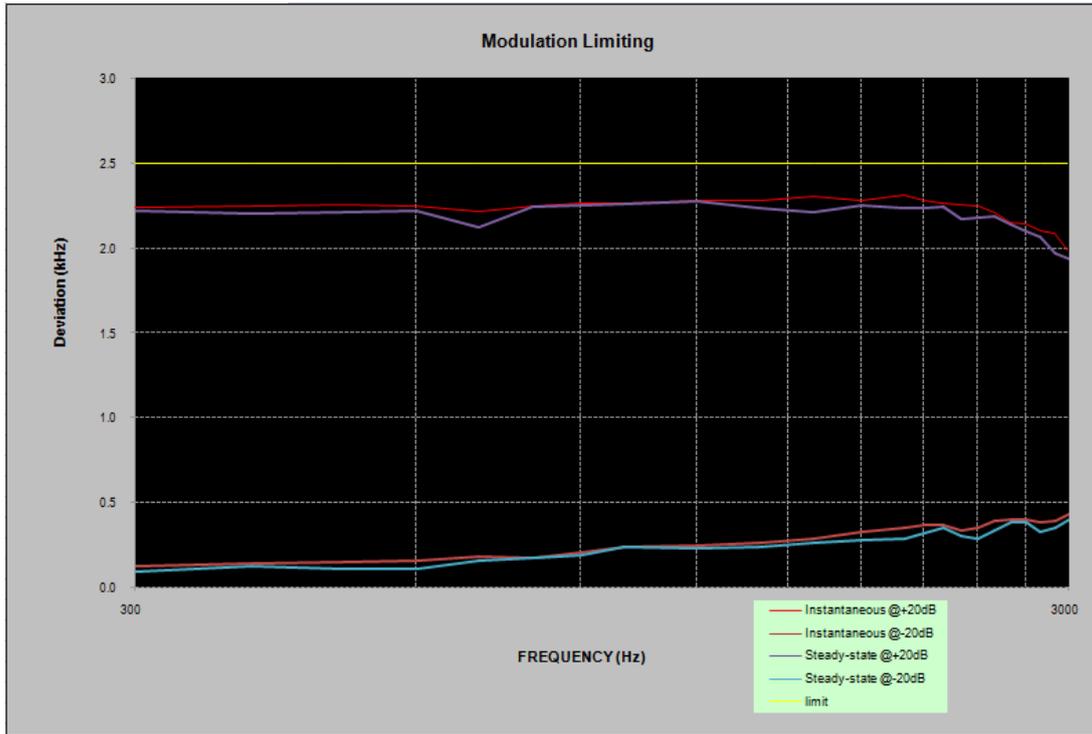

Audio Frequency Response

Carrier Frequency: 151.025 MHz, Channel Separation=12.5 kHz


| Audio Frequency (Hz) | Response Attenuation (dB) |
|---------------------------------|--------------------------------------|
| 300 | -9.84 |
| 400 | -7.13 |
| 500 | -5.38 |
| 600 | -3.85 |
| 700 | -3.10 |
| 800 | -2.18 |
| 900 | -0.88 |
| 1000 | 0 |
| 1200 | 1.03 |
| 1400 | 2.52 |
| 1600 | 3.31 |
| 1800 | 4.41 |
| 2000 | 4.91 |
| 2100 | 5.51 |
| 2200 | 5.91 |
| 2300 | 6.06 |
| 2400 | 6.11 |
| 2500 | 6.26 |
| 2600 | 6.55 |
| 2700 | 7.01 |
| 2800 | 7.00 |
| 2900 | 7.01 |
| 3000 | 7.03 |

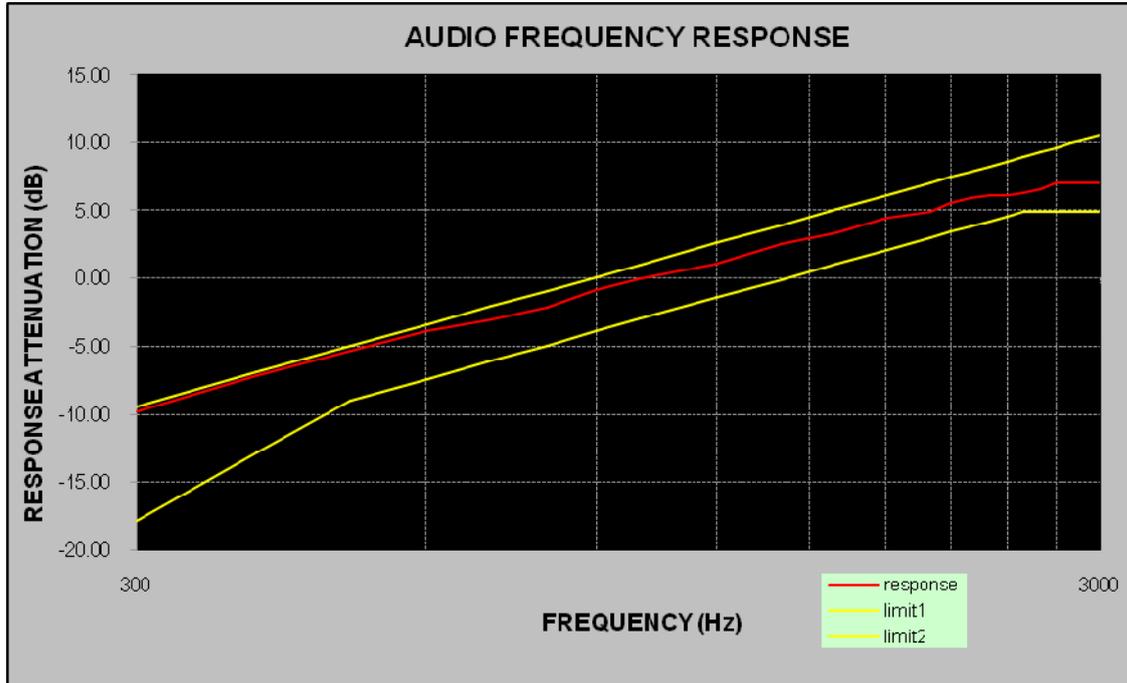

Audio frequency lows pass filter response

Carrier Frequency: 151.025 MHz, Channel Separation=12.5 kHz


| Audio Frequency (kHz) | Response Attenuation (dB) | Limit (dB) |
|-----------------------|---------------------------|------------|
| 1.0 | 0 | / |
| 3.0 | -19.1 | 0 |
| 4.0 | -75.3 | -12.5 |
| 5.0 | -83.9 | -22.2 |
| 6.0 | -88.7 | -30.1 |
| 7.0 | -84.2 | -36.8 |
| 8.0 | -90.4 | -42.6 |
| 9.0 | -89.6 | -47.7 |
| 10.0 | -90.2 | -52.3 |
| 12.0 | -92.7 | -60.2 |
| 14.0 | -92.5 | -66.9 |
| 16.0 | -93.8 | -72.7 |
| 18.0 | -91.6 | -77.8 |
| 20.0 | -92.3 | -82.5 |

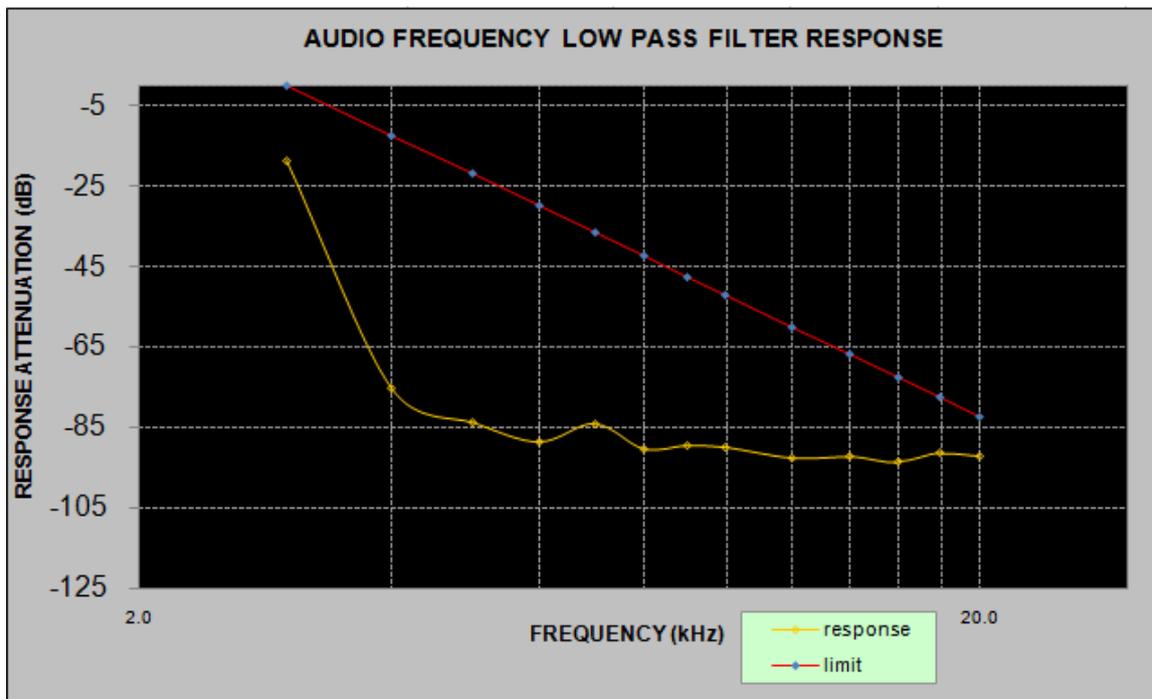

MODULATION LIMITING

Carrier Frequency: 151.025 MHz, Channel Separation= 25 kHz


| Audio Frequency (Hz) | Instantaneous | | Steady-state | | FCC Limit [kHz] |
|----------------------|--------------------------|--------------------------|--------------------------|--------------------------|-----------------|
| | DEVIATION (@+20dB) [kHz] | DEVIATION (@-20dB) [kHz] | DEVIATION (@+20dB) [kHz] | DEVIATION (@-20dB) [kHz] | |
| 300 | 4.396 | 0.153 | 4.371 | 0.132 | 5.000 |
| 400 | 4.386 | 0.172 | 4.362 | 0.151 | 5.000 |
| 500 | 4.421 | 0.236 | 4.385 | 0.216 | 5.000 |
| 600 | 4.414 | 0.252 | 4.378 | 0.233 | 5.000 |
| 700 | 4.367 | 0.271 | 4.355 | 0.238 | 5.000 |
| 800 | 4.358 | 0.284 | 4.316 | 0.242 | 5.000 |
| 900 | 4.379 | 0.339 | 4.320 | 0.284 | 5.000 |
| 1000 | 4.367 | 0.382 | 4.287 | 0.342 | 5.000 |
| 1200 | 4.410 | 0.421 | 4.368 | 0.398 | 5.000 |
| 1400 | 4.386 | 0.482 | 4.357 | 0.463 | 5.000 |
| 1600 | 4.485 | 0.521 | 4.396 | 0.471 | 5.000 |
| 1800 | 4.562 | 0.579 | 4.501 | 0.541 | 5.000 |
| 2000 | 4.632 | 0.607 | 4.476 | 0.576 | 5.000 |
| 2100 | 4.621 | 0.612 | 4.512 | 0.586 | 5.000 |
| 2200 | 4.568 | 0.658 | 4.487 | 0.624 | 5.000 |
| 2300 | 4.512 | 0.608 | 4.426 | 0.562 | 5.000 |
| 2400 | 4.461 | 0.712 | 4.408 | 0.692 | 5.000 |
| 2500 | 4.375 | 0.732 | 4.311 | 0.686 | 5.000 |
| 2600 | 4.312 | 0.753 | 4.201 | 0.704 | 5.000 |
| 2700 | 4.223 | 0.795 | 4.136 | 0.713 | 5.000 |
| 2800 | 4.196 | 0.763 | 4.002 | 0.682 | 5.000 |
| 2900 | 4.102 | 0.758 | 3.658 | 0.711 | 5.000 |
| 3000 | 3.936 | 0.857 | 3.821 | 0.796 | 5.000 |

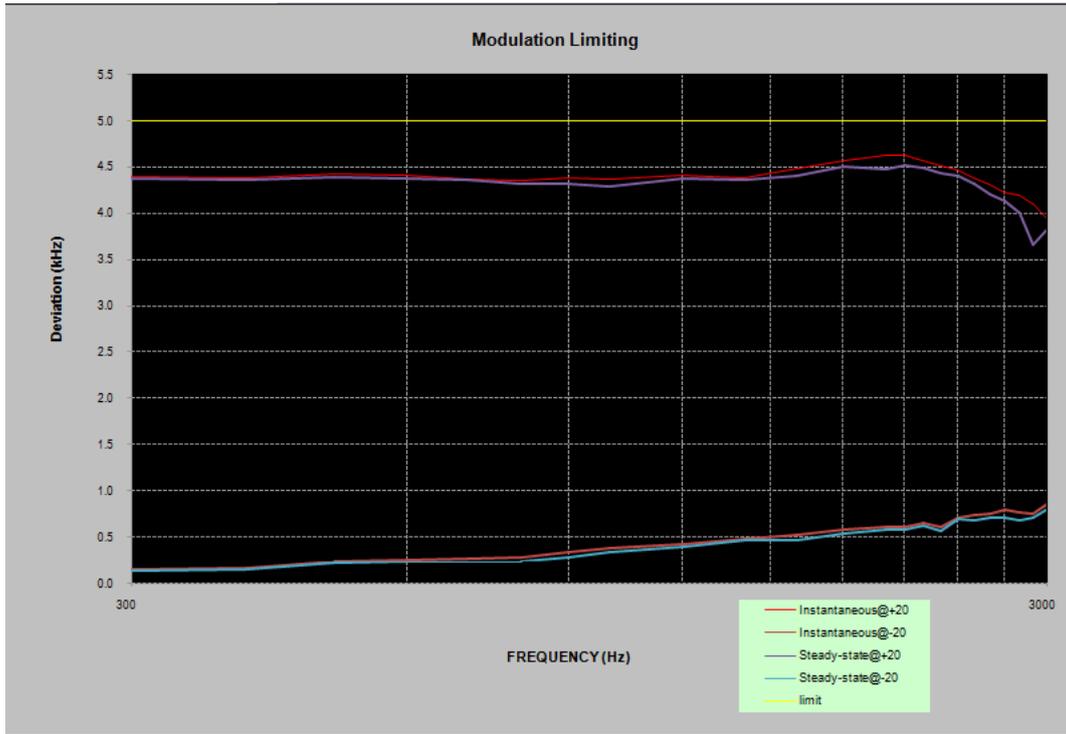

Audio Frequency Response

Carrier Frequency: 151.025 MHz, Channel Separation= 25 kHz


| Audio Frequency (Hz) | Response Attenuation(dB) |
|---------------------------------|---------------------------------|
| 300 | -10.29 |
| 400 | -8.36 |
| 500 | -6.06 |
| 600 | -4.42 |
| 700 | -3.24 |
| 800 | -2.04 |
| 900 | -0.82 |
| 1000 | 0 |
| 1200 | 1.20 |
| 1400 | 3.00 |
| 1600 | 3.60 |
| 1800 | 4.15 |
| 2000 | 5.39 |
| 2100 | 5.93 |
| 2200 | 6.39 |
| 2300 | 6.50 |
| 2400 | 6.63 |
| 2500 | 7.01 |
| 2600 | 7.31 |
| 2700 | 7.47 |
| 2800 | 7.68 |
| 2900 | 8.25 |
| 3000 | 8.38 |

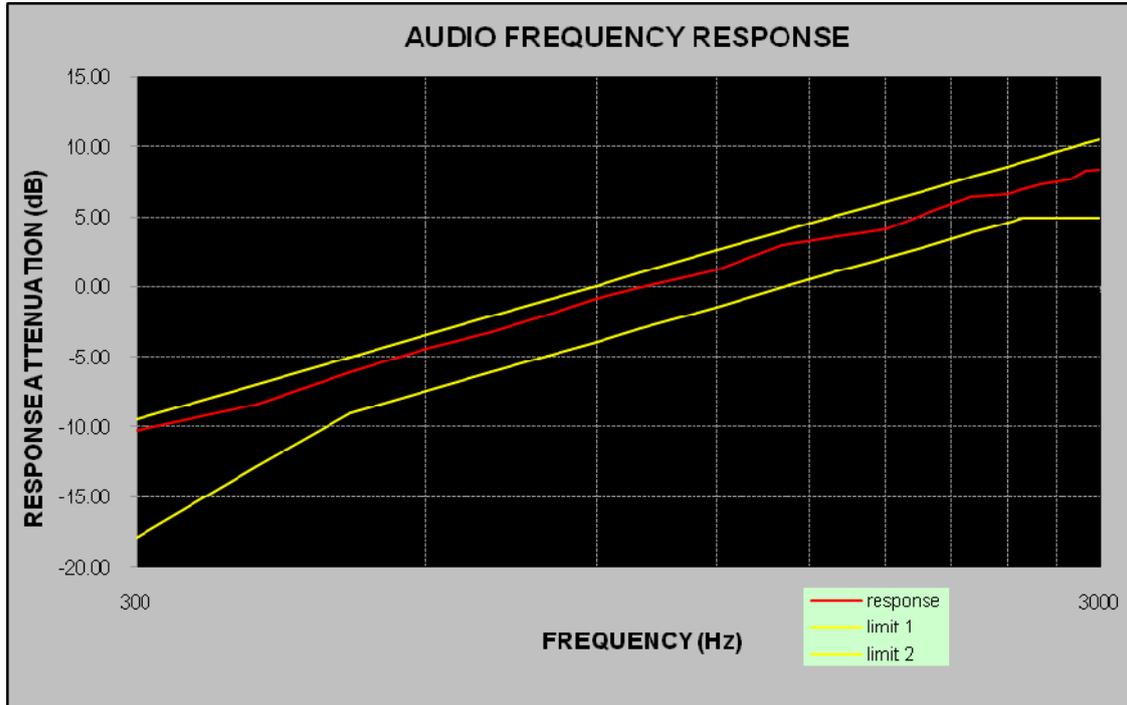

Audio frequency lows pass filter response

Carrier Frequency: 151.025 MHz, Channel Separation= 25 kHz

| Audio Frequency (kHz) | Response Attenuation (dB) | Limit (dB) |
|-----------------------|---------------------------|------------|
| 1.0 | 0 | / |
| 3.0 | -18.6 | 0 |
| 4.0 | -78.9 | -5.0 |
| 5.0 | -85.2 | -8.9 |
| 6.0 | -88.9 | -12.0 |
| 7.0 | -89.2 | -14.7 |
| 8.0 | -87.6 | -17.0 |
| 9.0 | -89.7 | -19.1 |
| 10.0 | -90.6 | -20.9 |
| 15.0 | -92.3 | -28.0 |
| 20.0 | -91.6 | -28.0 |
| 30.0 | -91.7 | -28.0 |
| 40.0 | -92.6 | -28.0 |
| 50.0 | -91.4 | -28.0 |
| 60.0 | -90.5 | -28.0 |
| 70.0 | -91.4 | -28.0 |

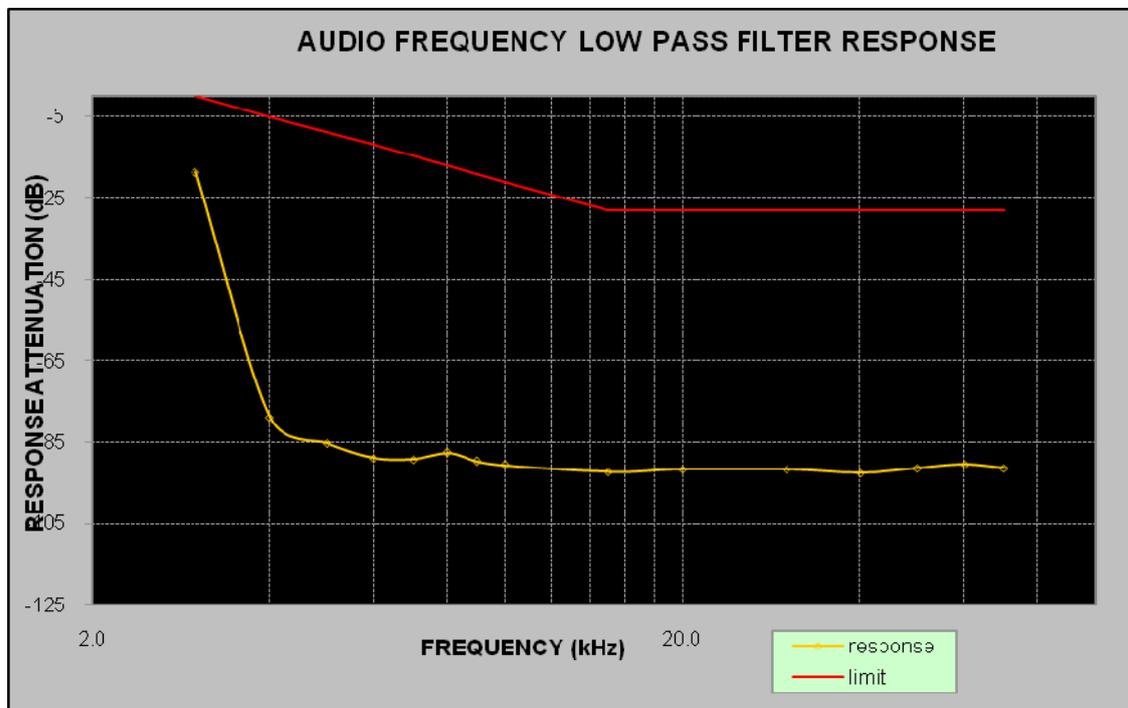

FCC §2.1049 & §22.357 & § 22.731 & §74.462 & § 80.205 & § 80.207 & §80.211 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK**Applicable Standard**

FCC §2.1049, §22.357, § 22.731, §74.462, § 80.205, § 80.207, § 80.211, §90.209 and §90.210

Emission Mask D - 12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least 7.27 ($f_d - 2.88$ kHz) dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.

Emission Mask B - 25 kHz channel bandwidth equipment. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.

Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz for 12.5kHz channel spacing and 300 Hz for 25kHz channel spacing.

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Xiangguang Kong on 2017-12-19 and 2017-12-20.

Test mode: transmitting

| Modulation | Channel Separation (kHz) | Frequency (MHz) | Power Level | 99% Occupied Bandwidth (kHz) | 26 dB Emissions Bandwidth (kHz) | Note |
|------------|--------------------------|-----------------|-------------|------------------------------|---------------------------------|-------------|
| Analog | 12.5 | 151.025 | High | 9.856 | 10.256 | For Part 22 |
| | | | Low | 9.856 | 10.256 | |
| | 12.5 | 153.025 | High | 9.936 | 10.256 | For Part 74 |
| | | | Low | 9.936 | 10.256 | |
| | 12.5 | 155.7525 | High | 9.936 | 10.336 | For Part 90 |
| | | | Low | 9.936 | 10.256 | |
| | 25 | 151.025 | High | 14.824 | 15.625 | For Part 22 |
| | | | Low | 14.824 | 15.625 | |
| | 25 | 153.025 | High | 14.824 | 15.625 | For Part 74 |
| | | | Low | 14.904 | 15.625 | |
| | 25 | 161.605 | High | 14.824 | 15.625 | For Part 80 |
| | | | Low | 14.824 | 15.625 | |

Emission Designator Per CFR 47 §2.201 & §2.202, $B_n = 2M + 2D$


For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator 11K0F3E In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation. $BW = 2(M+D) = 2*(3.0\text{ kHz} + 2.5\text{ kHz}) = 11\text{ kHz} \rightarrow 11K0$
 F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 25 kHz)


Emission Designator 16K0F3E In this case, the maximum modulating frequency is 5.0 kHz with a 3 kHz deviation. $BW = 2(M+D) = 2*(5\text{ kHz} + 3\text{ kHz}) = 16\text{ kHz} \rightarrow 16K0$
 F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

Analog Modulation, 12.5 kHz: Frequency 151.025 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

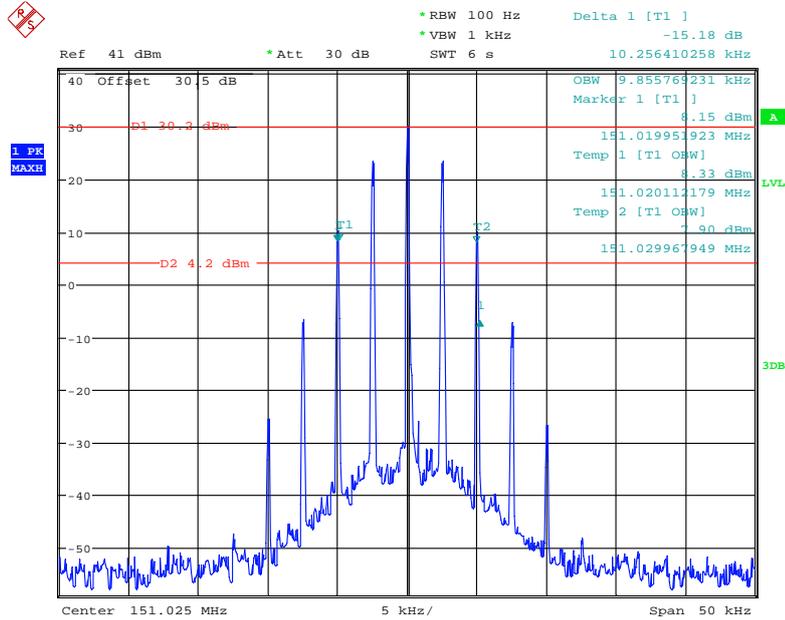


Date: 19.DEC.2017 11:30:51

Frequency 151.025 MHz: 99% Occupied & 26 dB Bandwidth, High Power

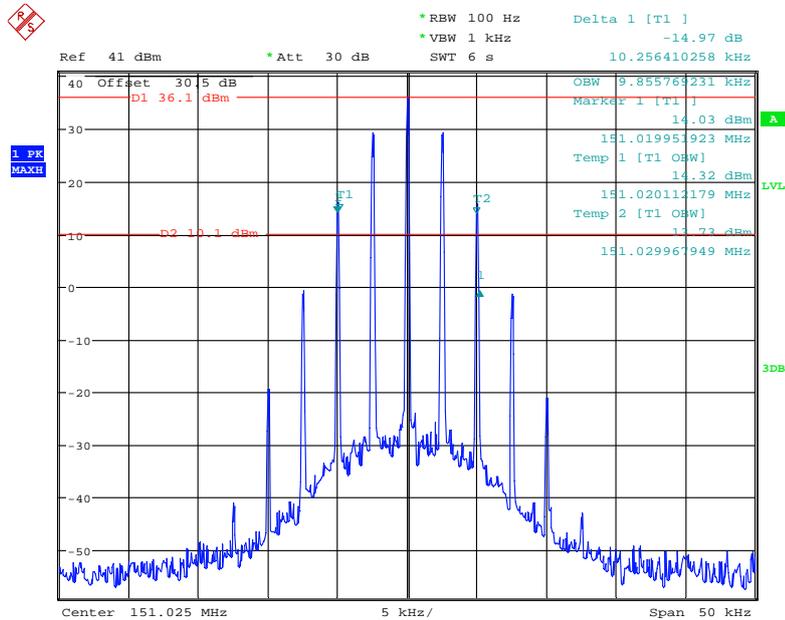


Date: 19.DEC.2017 11:32:12

Frequency 151.025 MHz: Emission Mask, Low Power, FCC part 22.359

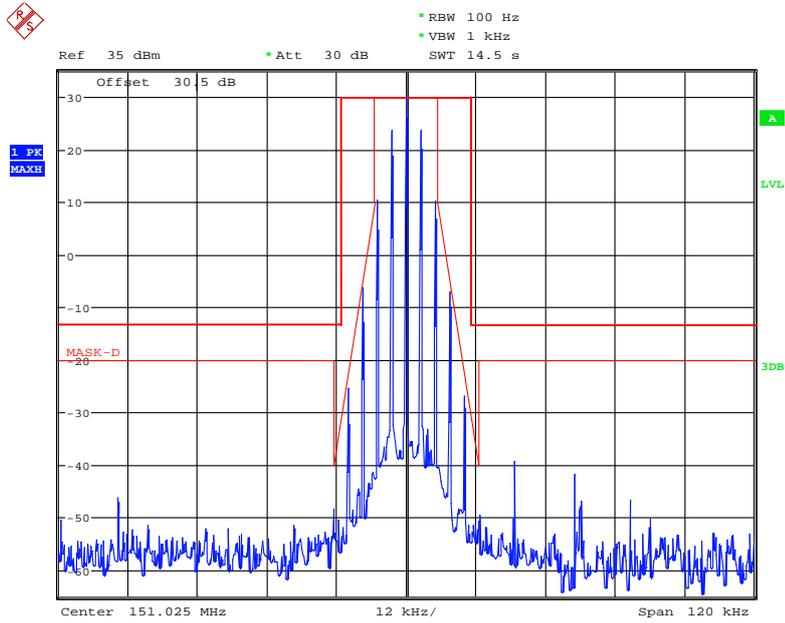


Date: 19.DEC.2017 11:39:14

Frequency 151.025 MHz: Emission Mask, High Power, FCC part 22.359

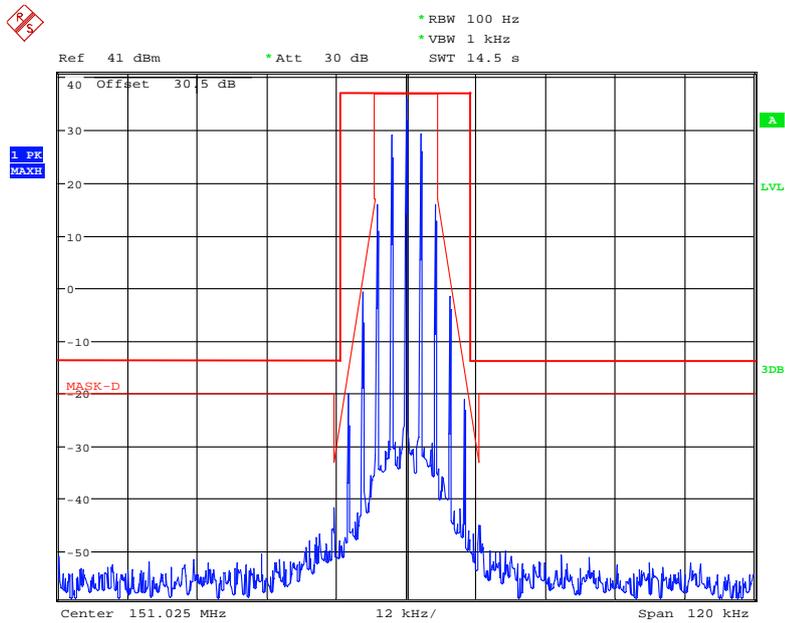


Date: 19.DEC.2017 11:34:41

Frequency 153.025 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

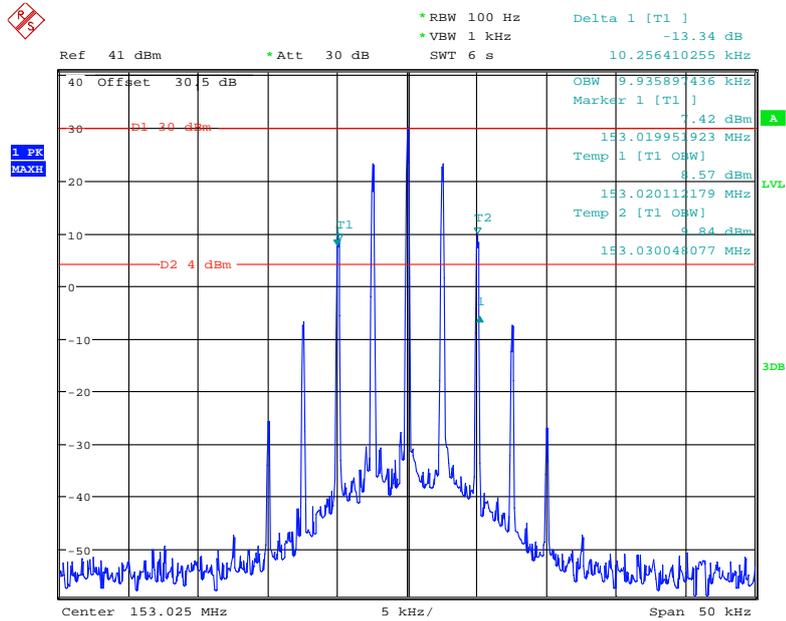


Date: 19.DEC.2017 11:28:55

Frequency 153.025 MHz: 99% Occupied & 26 dB Bandwidth, High Power

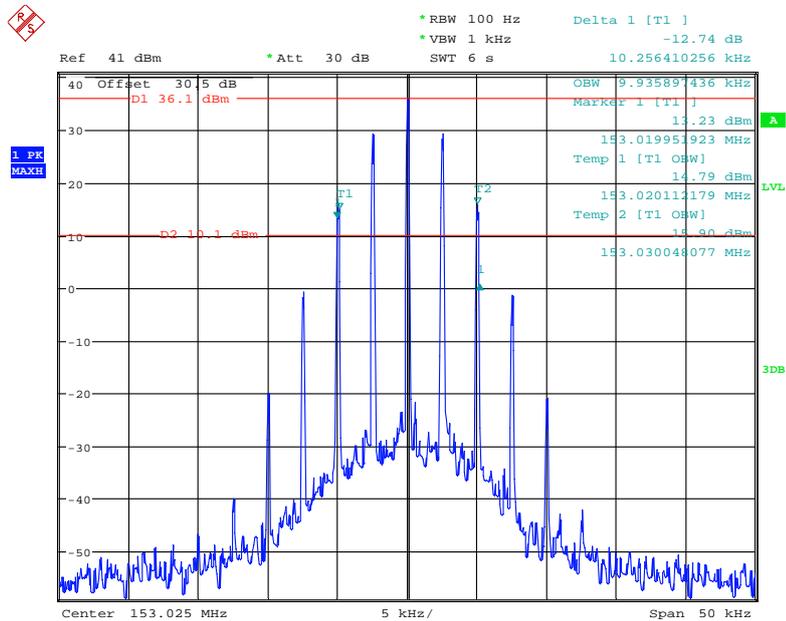


Date: 19.DEC.2017 11:26:34

Frequency 153.025 MHz: Emission Mask D, Low Power, FCC part 74.462

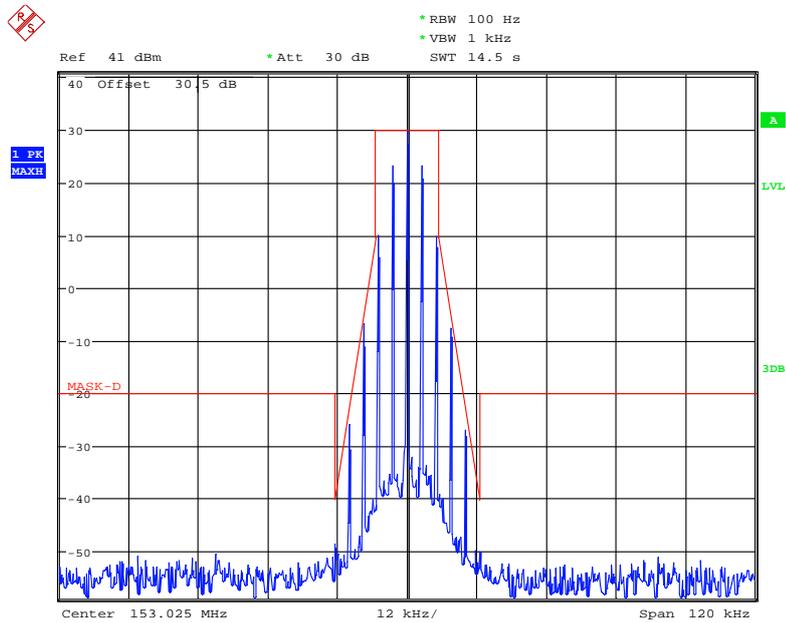


Date: 19.DEC.2017 11:23:35

Frequency 153.025 MHz: Emission Mask D, High Power, FCC part 74.462

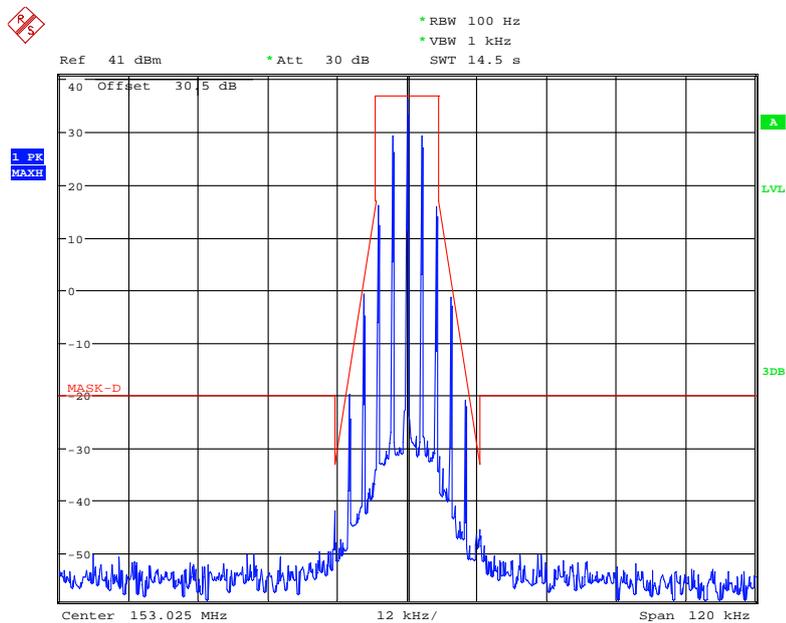


Date: 19.DEC.2017 11:25:48

Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

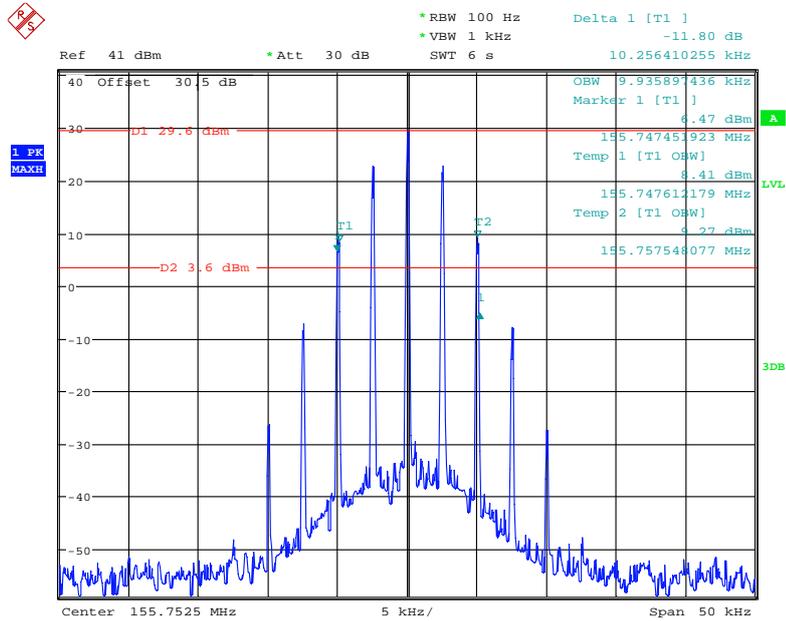


Date: 19.DEC.2017 09:41:32

Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth, High Power

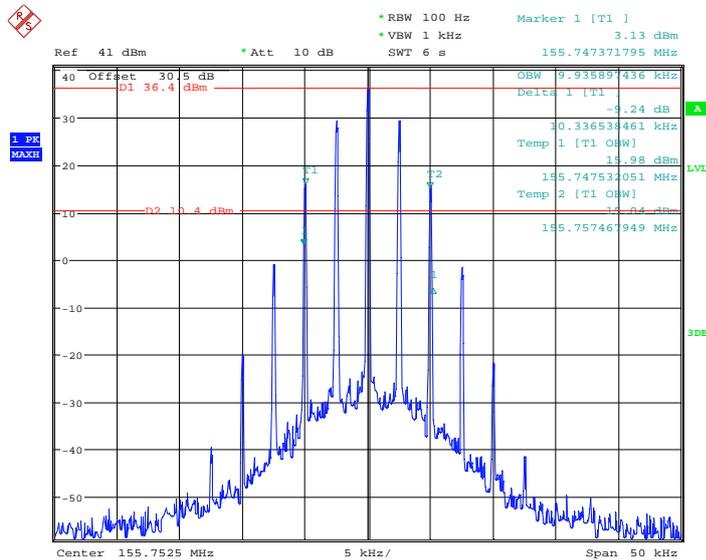


Date: 20.DEC.2017 00:29:00

Frequency 155.7525 MHz: Emission Mask D, Low Power, FCC part 90.210

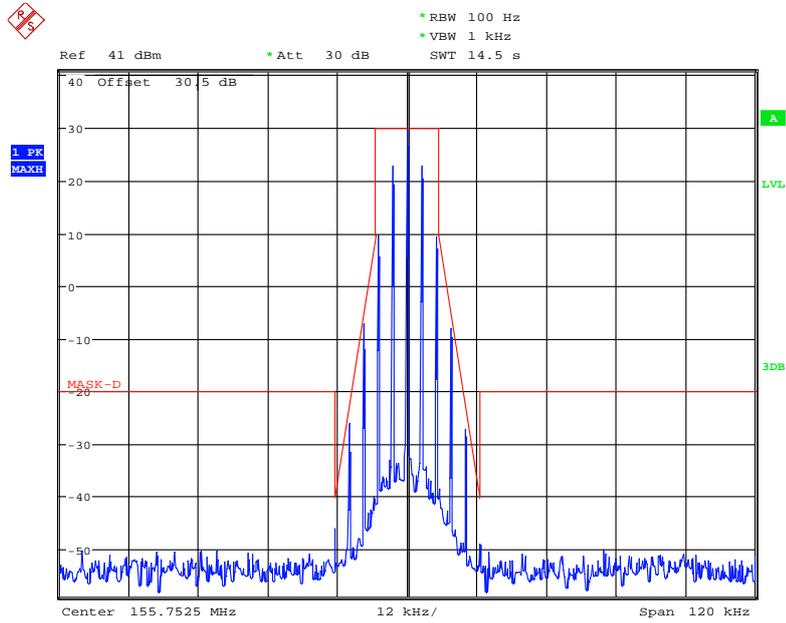


Date: 19.DEC.2017 09:57:39

Frequency 155.7525 MHz: Emission Mask D, High Power, FCC part 90.210

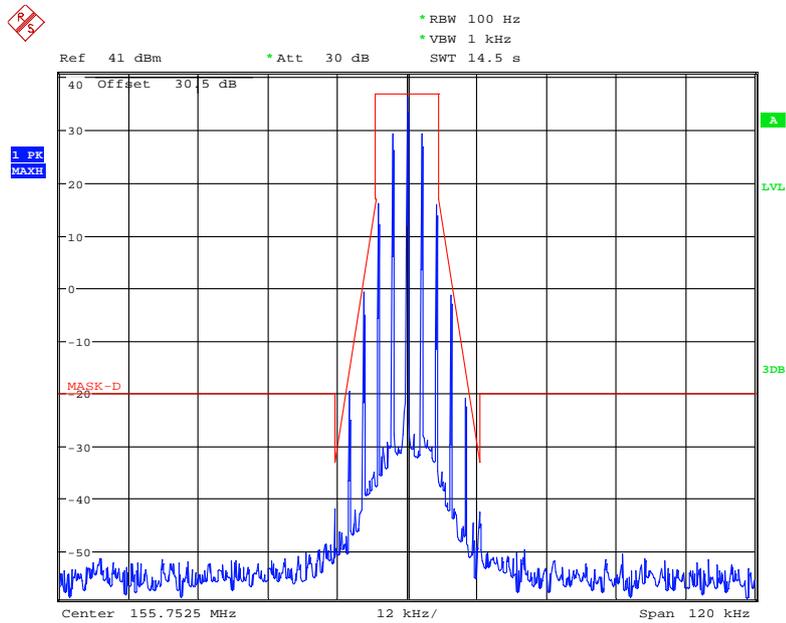


Date: 19.DEC.2017 09:59:44

**Analog Modulation, 25 kHz:
Frequency 151.025 MHz: 99% Occupied & 26 dB Bandwidth, Low Power**

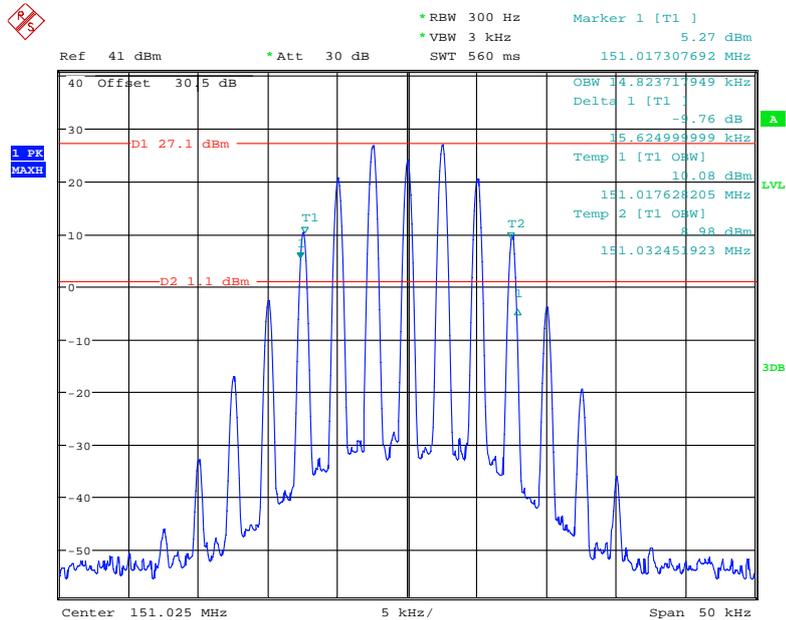


Date: 19.DEC.2017 11:12:47

Frequency 151.025 MHz: 99% Occupied & 26 dB Bandwidth, High Power

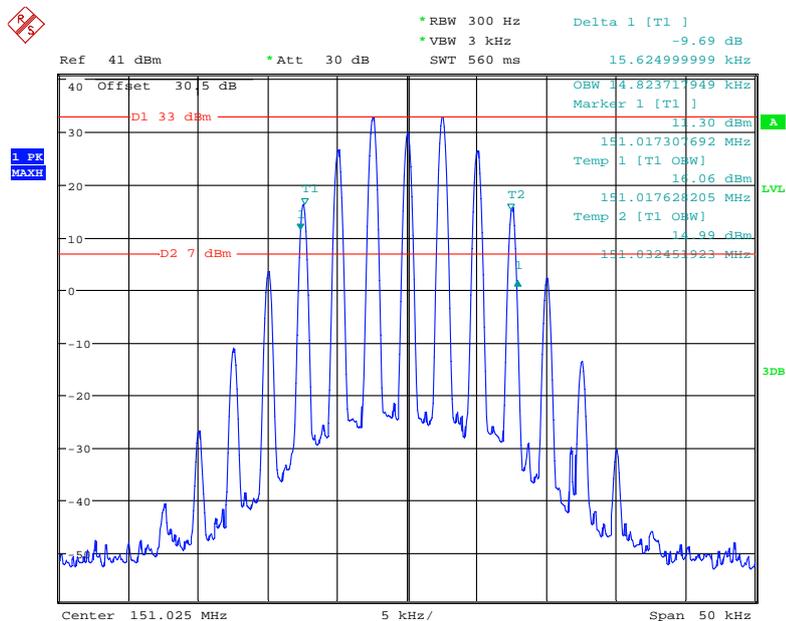


Date: 19.DEC.2017 11:12:05

Frequency 151.025 MHz: Emission Mask, Low Power, FCC part 22.359

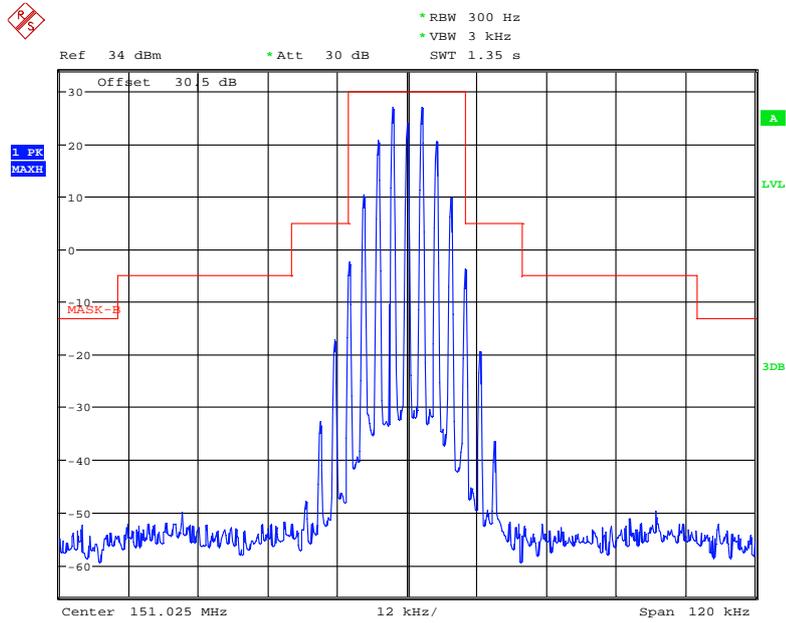


Date: 19.DEC.2017 11:09:32

Frequency 151.025 MHz: Emission Mask, High Power, FCC part 22.359

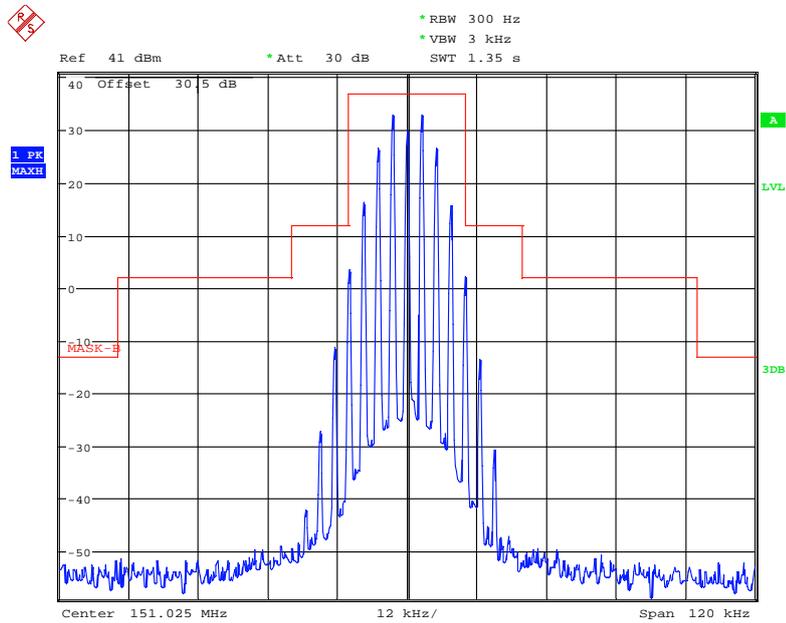


Date: 19.DEC.2017 11:11:04

Frequency 153.025 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

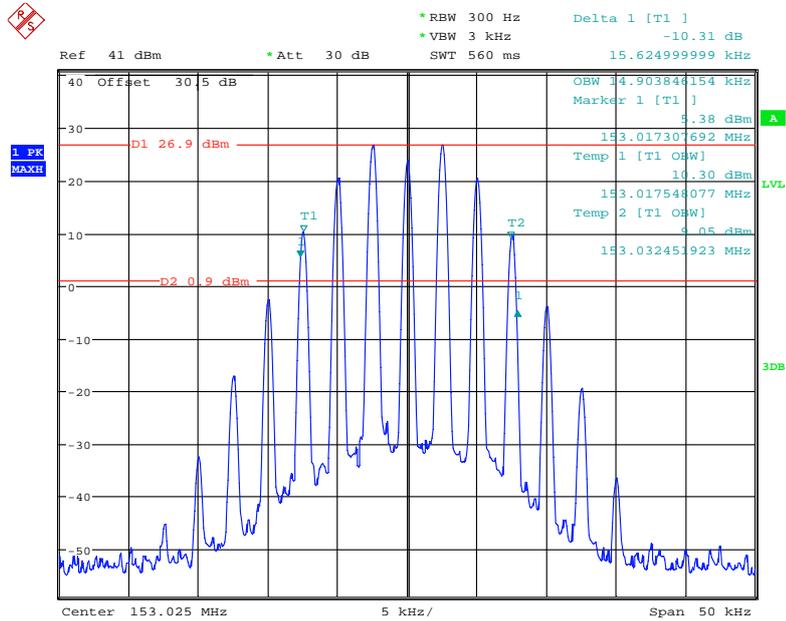


Date: 19.DEC.2017 11:15:18

Frequency 153.025 MHz: 99% Occupied & 26 dB Bandwidth, High Power

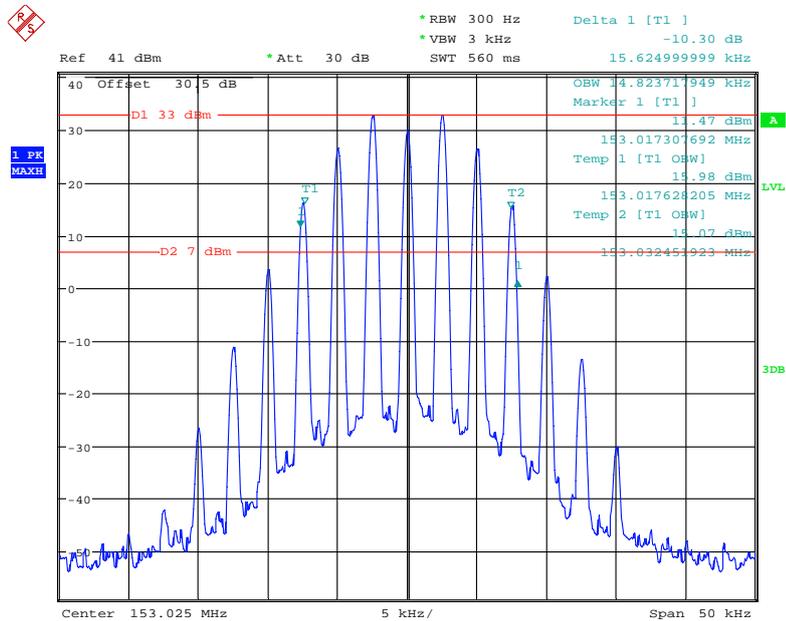


Date: 19.DEC.2017 11:16:28

Frequency 153.025 MHz: Emission Mask B, Low Power, FCC Part 74.462

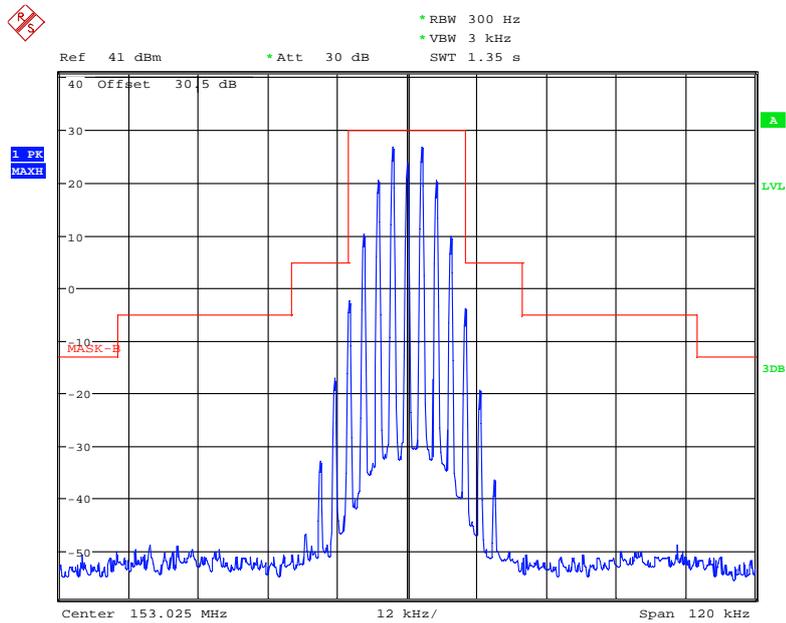


Date: 19.DEC.2017 11:20:09

Frequency 153.025 MHz: Emission Mask B, High Power, FCC Part 74.462

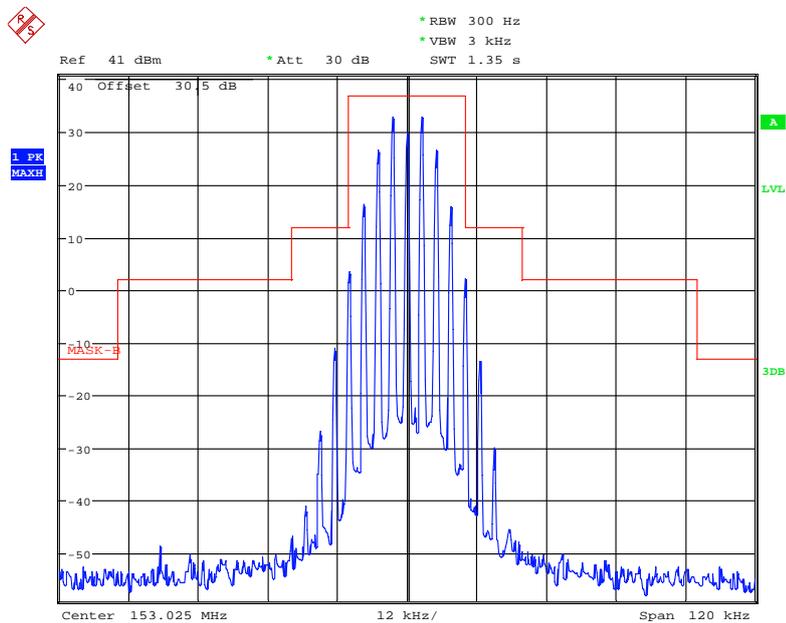


Date: 19.DEC.2017 11:18:23

Frequency 161.605 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

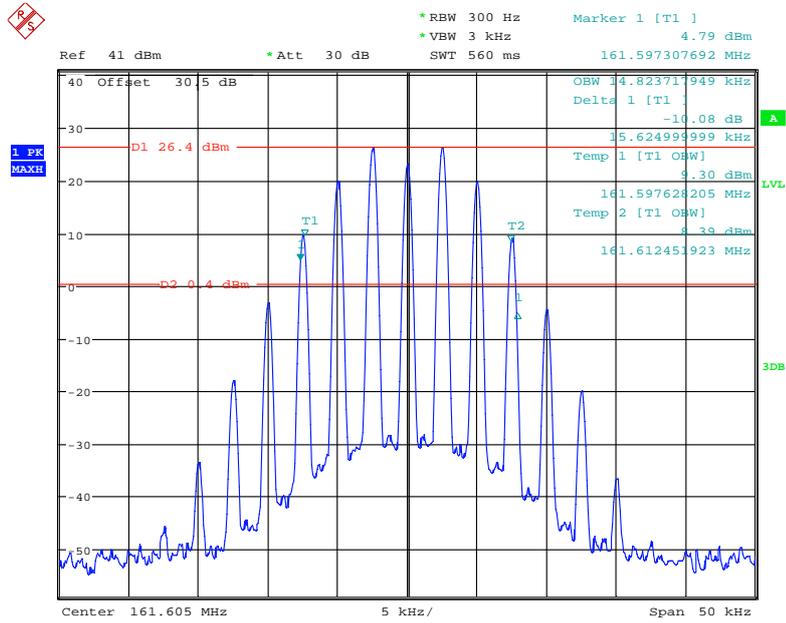


Date: 19.DEC.2017 11:01:58

Frequency 161.605 MHz: 99% Occupied & 26 dB Bandwidth, High Power

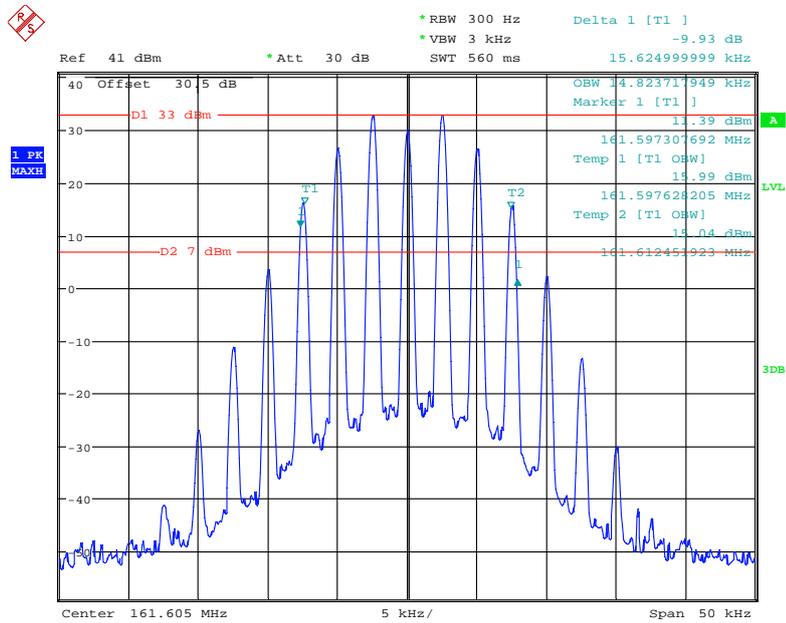


Date: 19.DEC.2017 11:00:48

Frequency 161.605 MHz: Emission Mask B, Low Power, FCC Part 80.211

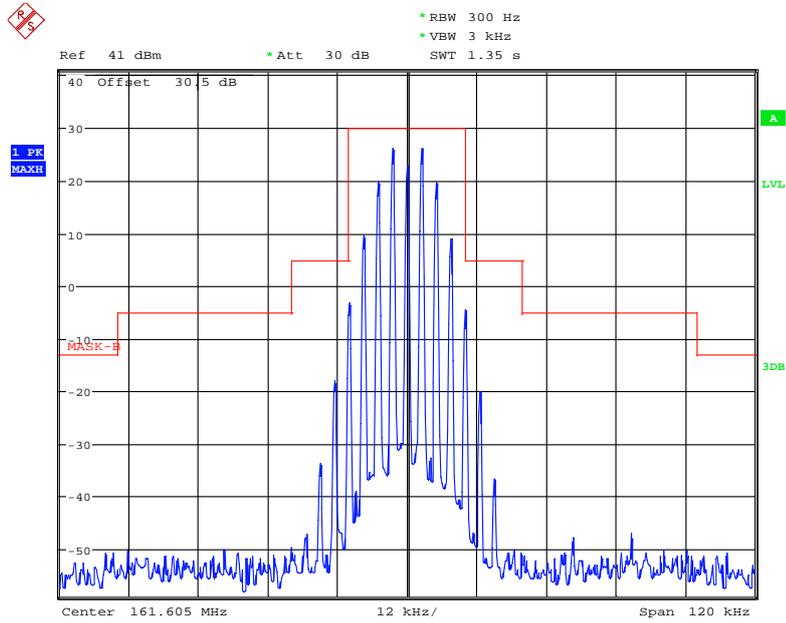

Date: 19.DEC.2017 11:05:00

Frequency 161.605 MHz: Emission Mask B, High Power, FCC Part 80.211

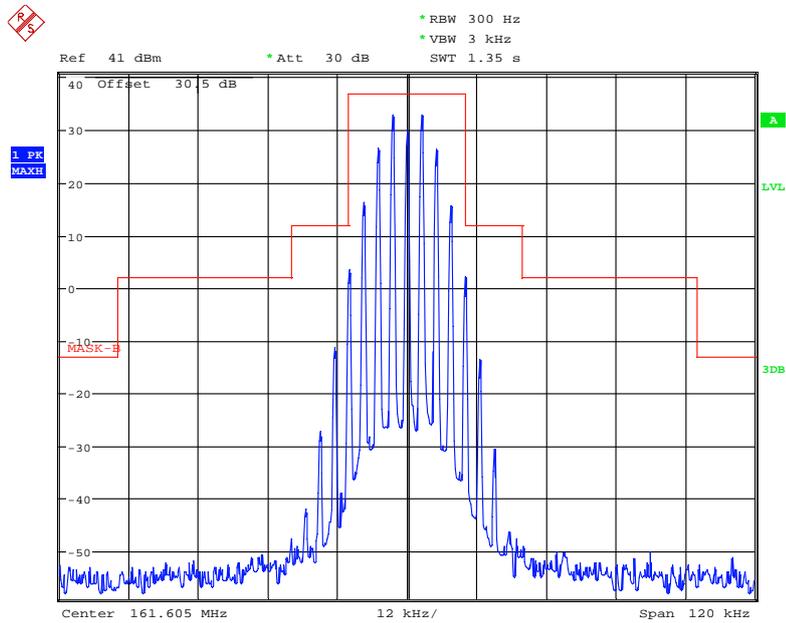

Date: 19.DEC.2017 11:03:24

| Modulation | Channel Separation (kHz) | Frequency (MHz) | Power Level | 99% Occupied Bandwidth (kHz) | 26 dB Emissions Bandwidth (kHz) | Note |
|------------|--------------------------|-----------------|-------------|------------------------------|---------------------------------|-------------|
| Digital | 12.5 | 151.025 | High | 6.731 | 8.413 | For Part 22 |
| | | | Low | 6.811 | 8.734 | |
| | 12.5 | 153.025 | High | 7.131 | 8.814 | For Part 74 |
| | | | Low | 6.651 | 8.173 | |
| | 12.5 | 155.7525 | High | 6.891 | 8.574 | For Part 90 |
| | | | Low | 6.971 | 8.894 | |

Emission Designator Per CFR 47 §2.201 & §2.202, $B_n = 2M + 2D$

For Digital Mode (Channel Spacing: 12.5 kHz)


Emission Designator 7K60F1D and 7K60F1E

The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).

F1D and F1E portion of the designator indicates digital information.


Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.

Digital Modulation, 12.5 kHz:
Frequency 151.025 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

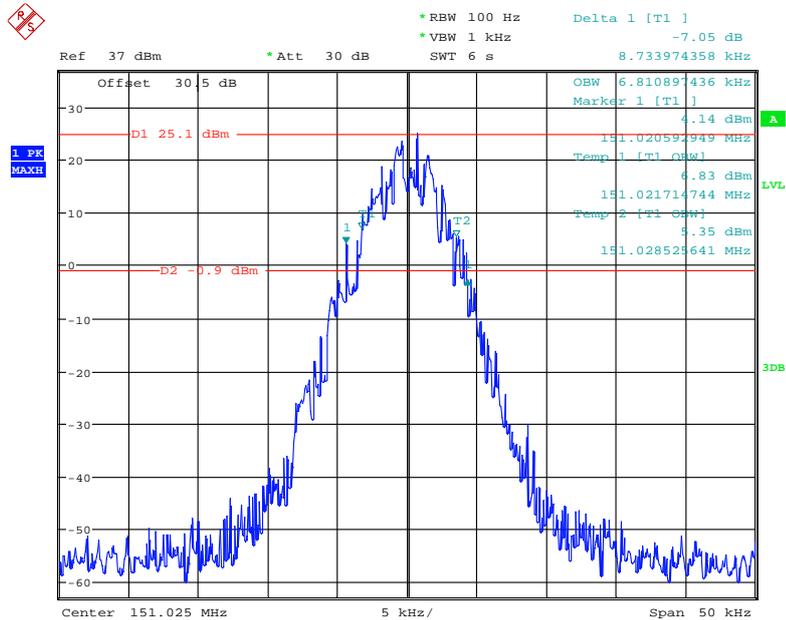


Date: 19.DEC.2017 11:55:40

Frequency 151.025 MHz: 99% Occupied & 26 dB Bandwidth, High Power

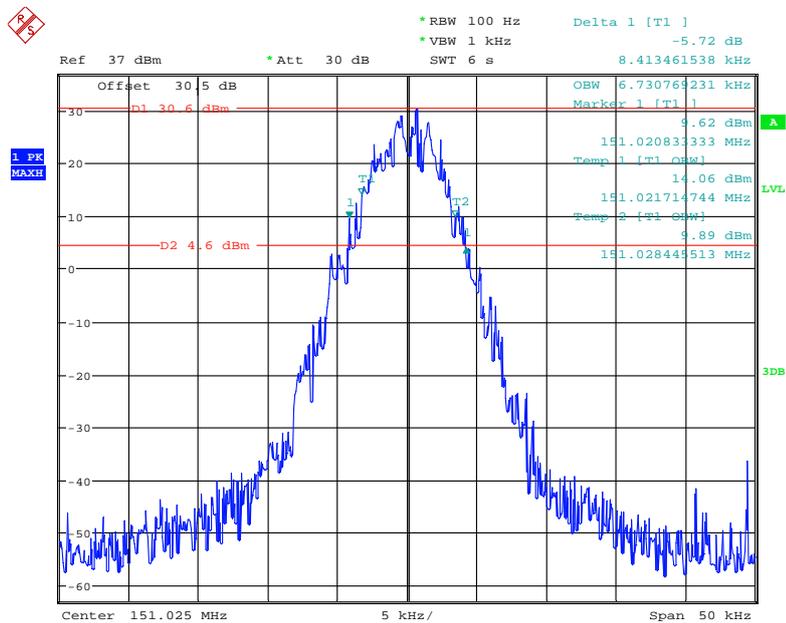


Date: 19.DEC.2017 11:54:05

Frequency 151.025 MHz: Emission Mask, Low Power, FCC part 22.359

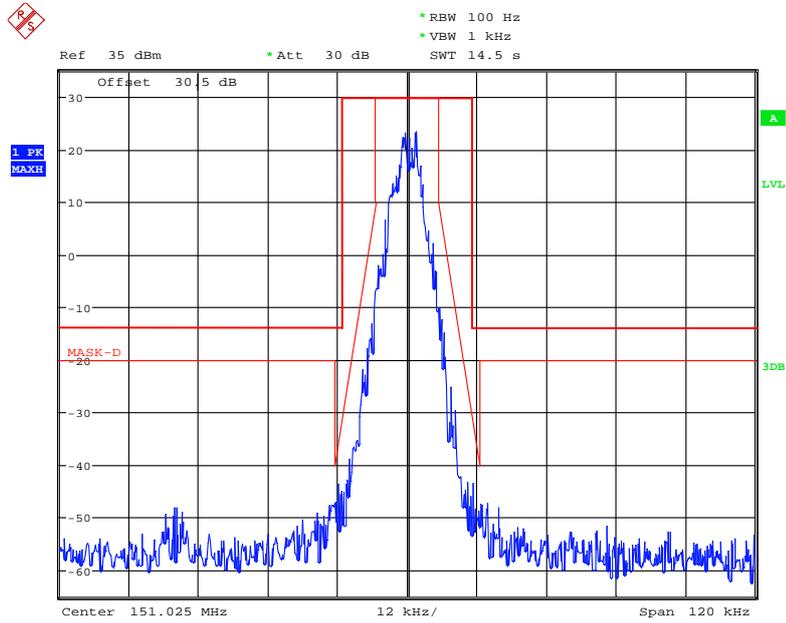


Date: 19.DEC.2017 11:40:28

Frequency 151.025 MHz: Emission Mask, High Power, FCC part 22.359

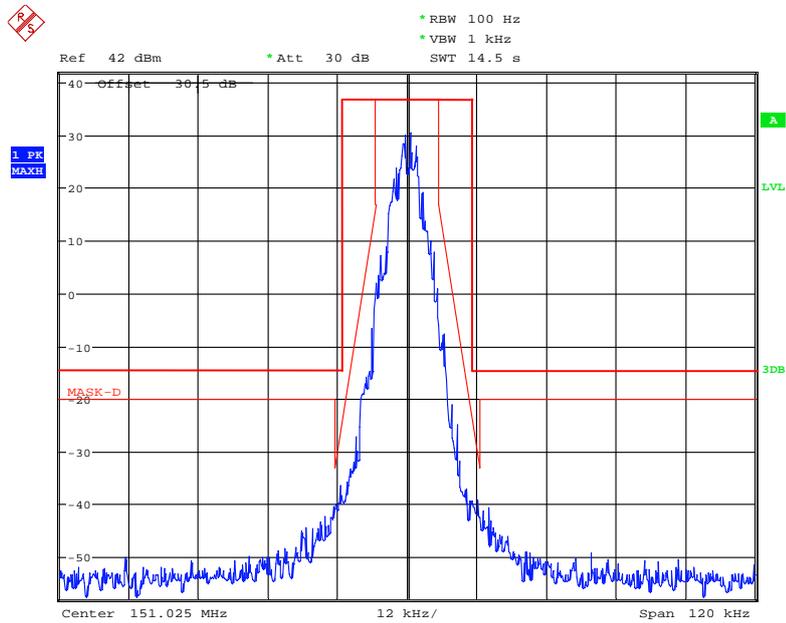


Date: 19.DEC.2017 11:43:17

Frequency 153.025 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

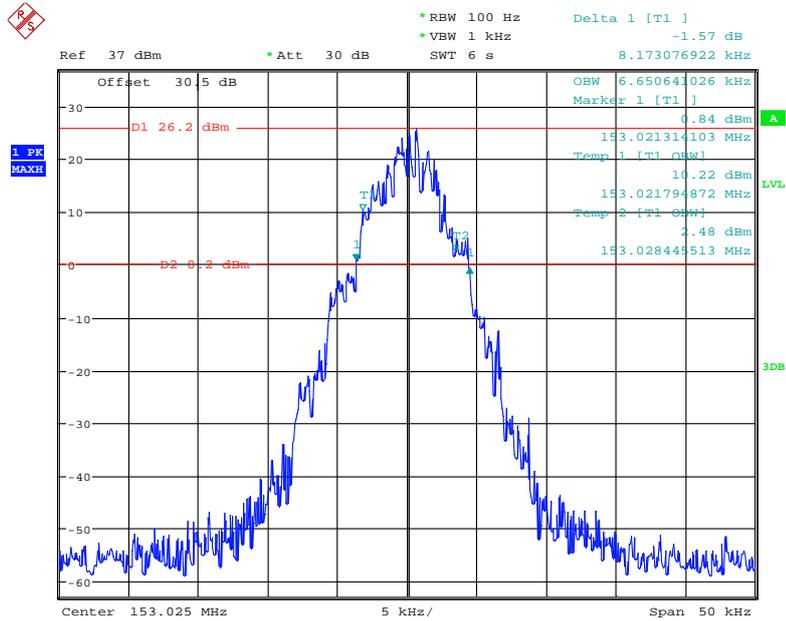


Date: 19.DEC.2017 11:56:55

Frequency 153.025 MHz: 99% Occupied & 26 dB Bandwidth, High Power

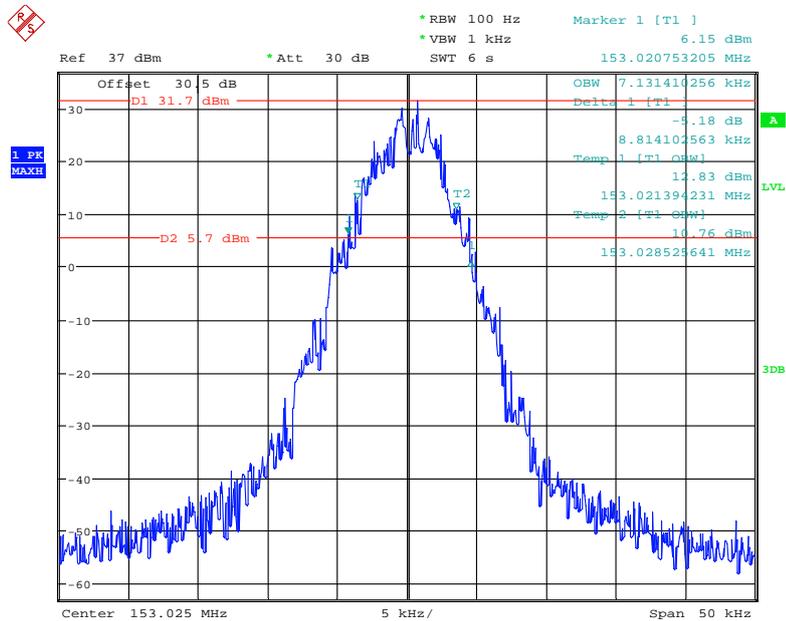


Date: 19.DEC.2017 11:58:05

Frequency 153.025 MHz: Emission Mask D, Low Power, FCC Part 74.462

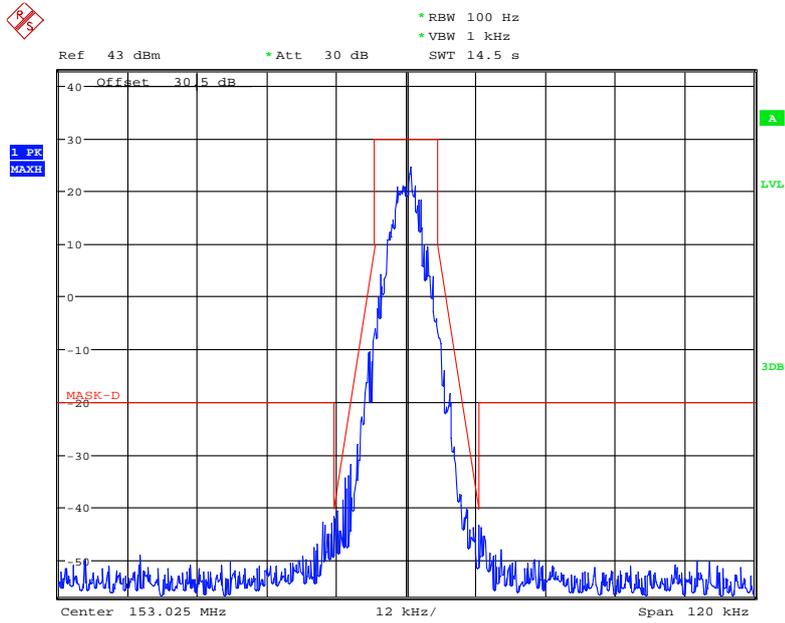


Date: 19.DEC.2017 12:01:55

Frequency 153.025 MHz: Emission Mask D, High Power, FCC Part 74.462

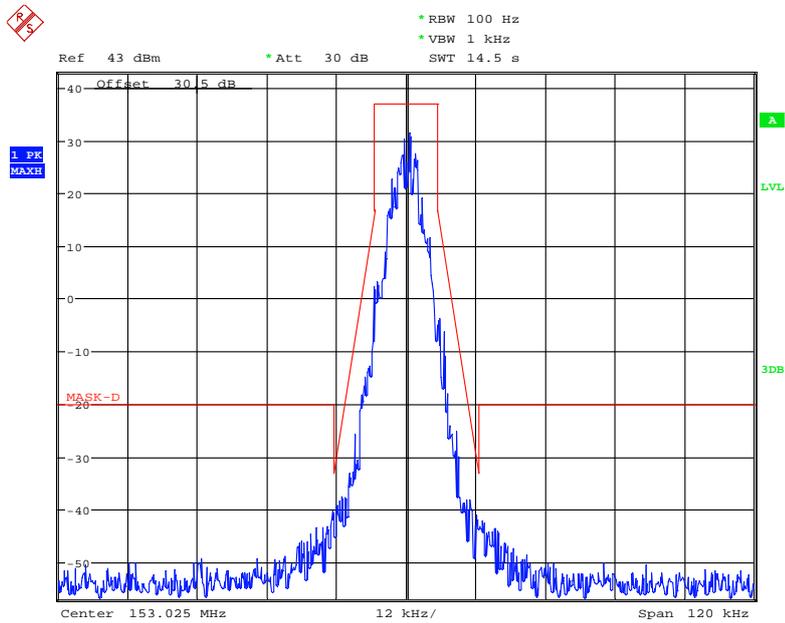


Date: 19.DEC.2017 11:59:50

Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

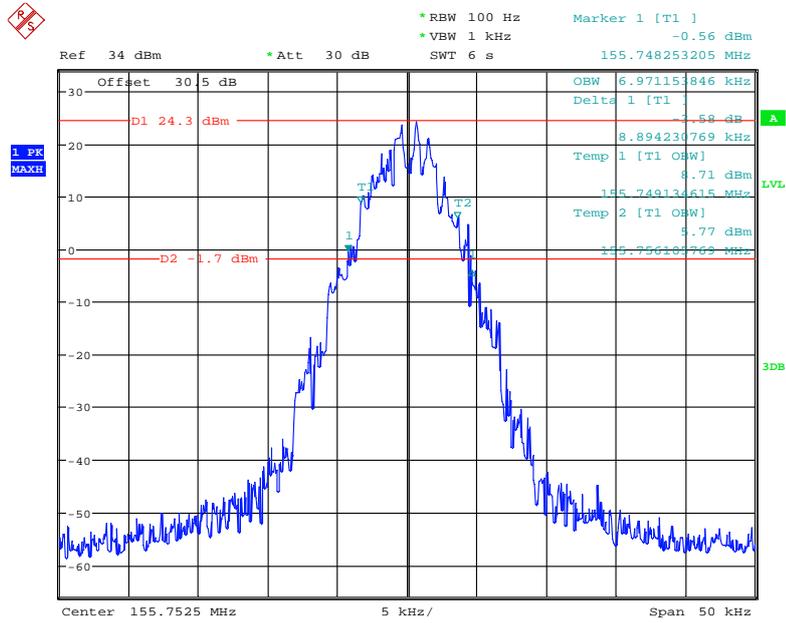


Date: 19.DEC.2017 10:05:27

Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth, High Power

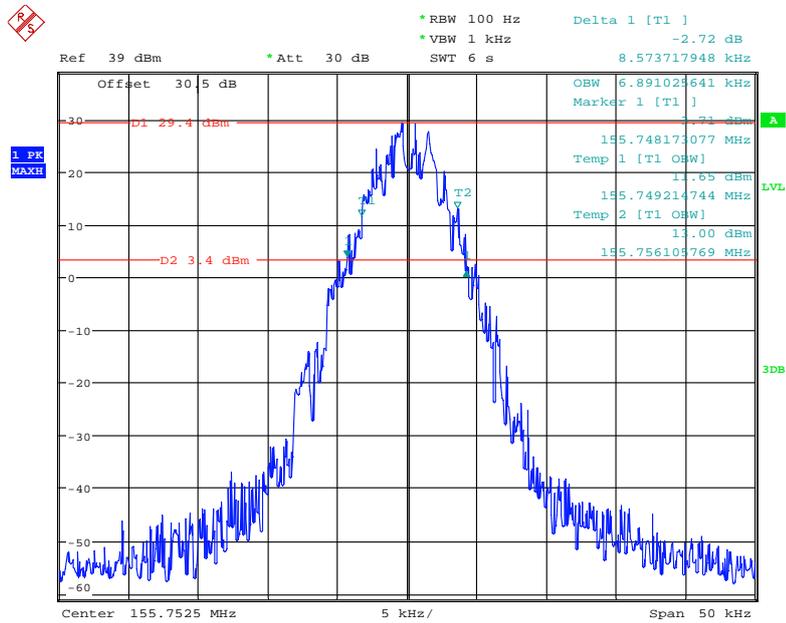


Date: 19.DEC.2017 10:07:00

Frequency 155.7525 MHz: Emission Mask D, Low Power, FCC part 90.210

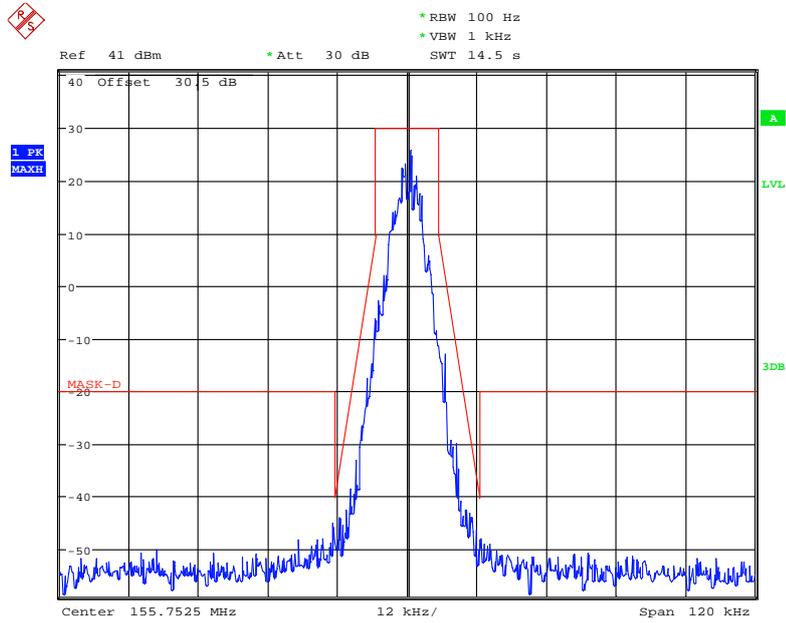

Date: 19.DEC.2017 10:03:37

Frequency 155.7525 MHz: Emission Mask D, High Power, FCC part 90.210

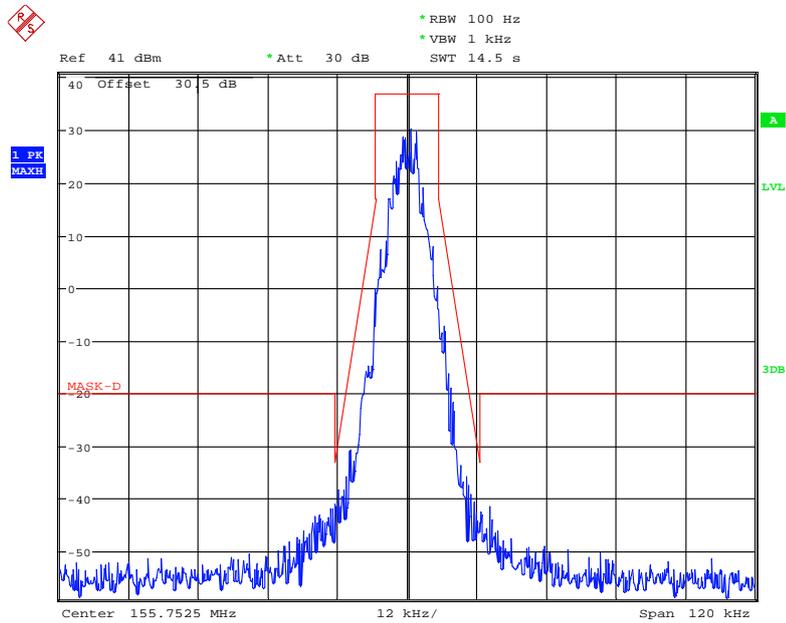

Date: 19.DEC.2017 10:01:21

FCC §2.1051 & §22.861 & §74.462 & § 80.211 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0 dB.

2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least $7.27 (f_d - 2.88 \text{ kHz})$ dB.

3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

Emission Mask B - 25 kHz channel bandwidth equipment. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

(1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.

(2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.

(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Emission Mask 24.133 (i) On any frequency outside the authorized bandwidth and removed from the edge of the authorized bandwidth by a displacement frequency (f_d in kHz) of up to and including 20 kHz: at least $116 \times \text{Log}_{10} ((f_d + 5)/3.05)$ decibels or $50 + 10 \times \text{Log}_{10}(P)$ decibels or 70 decibels, whichever is the lesser attenuation;

(ii) On any frequency outside the authorized bandwidth and removed from the edge of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 20 kHz: at least $43 + 10 \text{Log}_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation.

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data


Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Xiangguang Kong on 2017-12-19.


Test Mode: Transmitting, please refer to the following plots.

30MHz – 1 GHz, Channel Spacing 25 kHz, 151.025 MHz, For FCC part 22

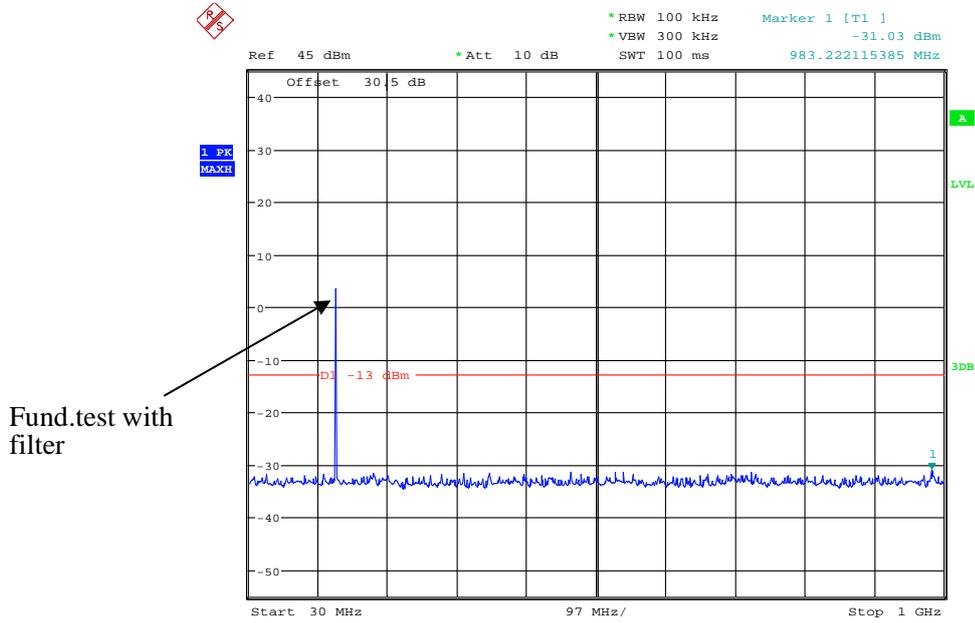


Date: 19.DEC.2017 10:33:18

1 GHz – 2 GHz, Channel Spacing 25 kHz, 151.025 MHz, For FCC part 22

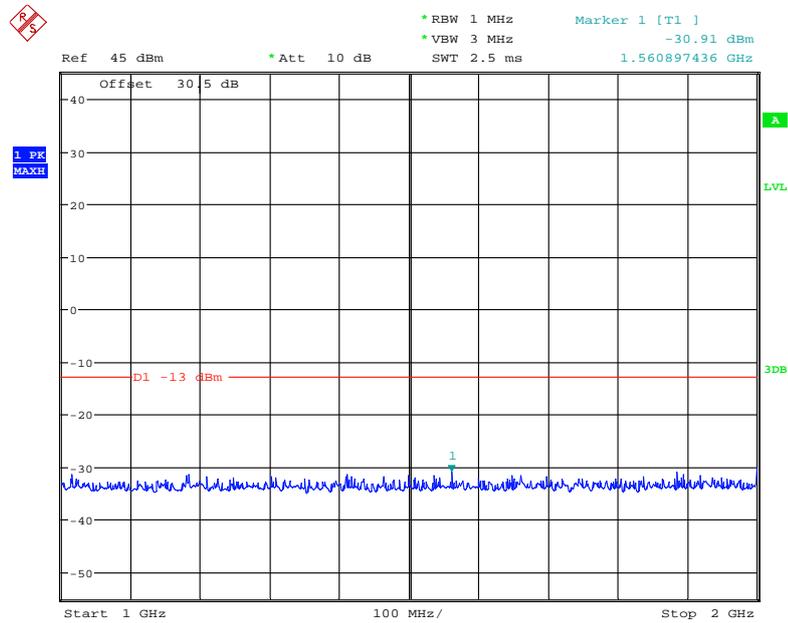


Date: 19.DEC.2017 10:33:51

30MHz – 1 GHz, Channel Spacing 12.5 kHz, 153.025 MHz, For FCC part 74

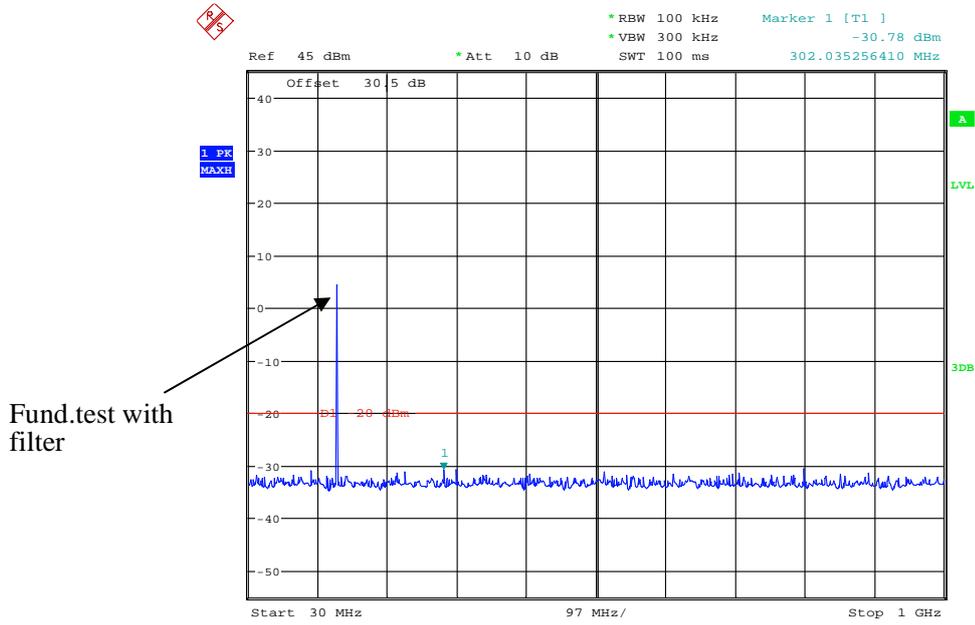


Date: 19.DEC.2017 10:42:40

1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 153.025 MHz, For FCC part 74

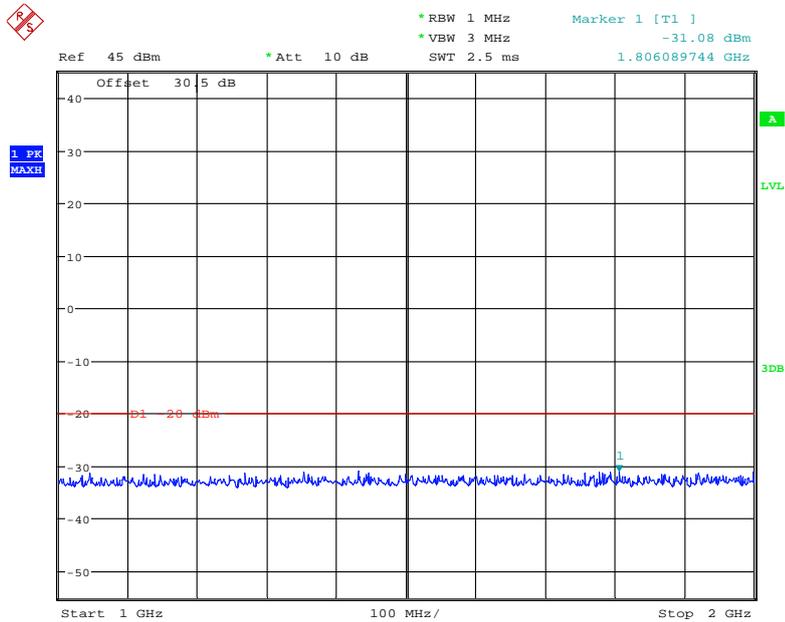


Date: 19.DEC.2017 10:40:39

30MHz – 1 GHz, Channel Spacing 25 kHz, 153.025 MHz, For FCC part 74

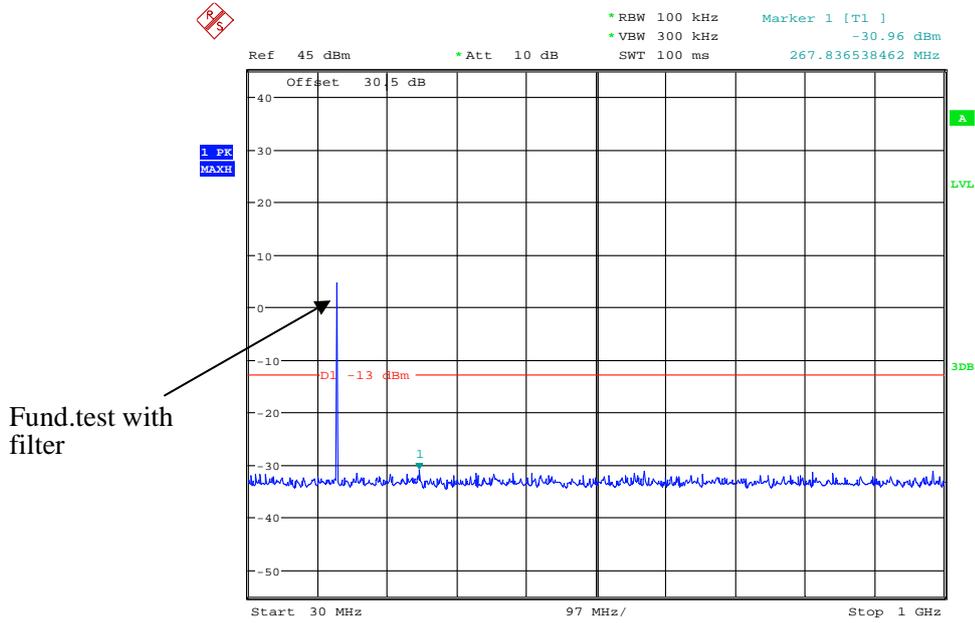


Date: 19.DEC.2017 10:41:42

1 GHz – 2 GHz, Channel Spacing 25 kHz, 153.025 MHz, For FCC part 74

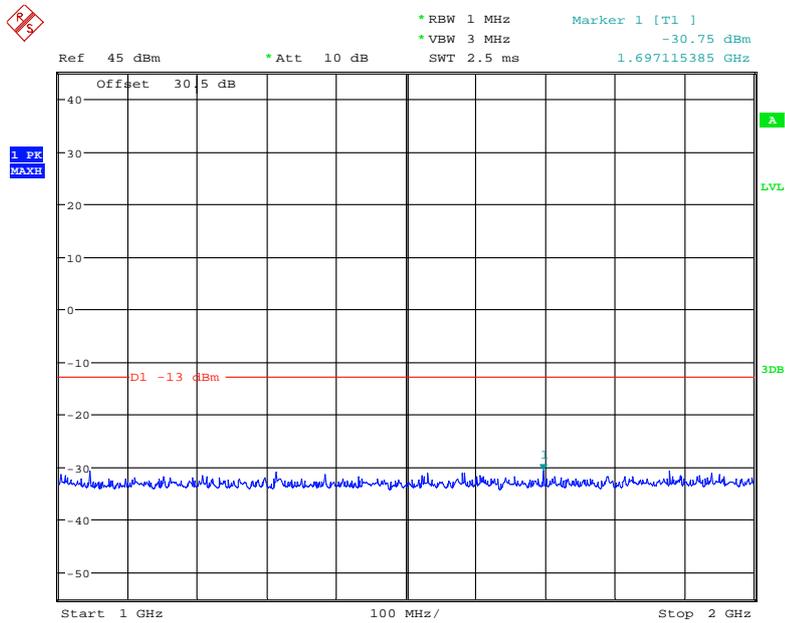


Date: 19.DEC.2017 10:41:14

30MHz – 1 GHz, Channel Spacing 12.5 kHz, 155.7525 MHz, For FCC part 90

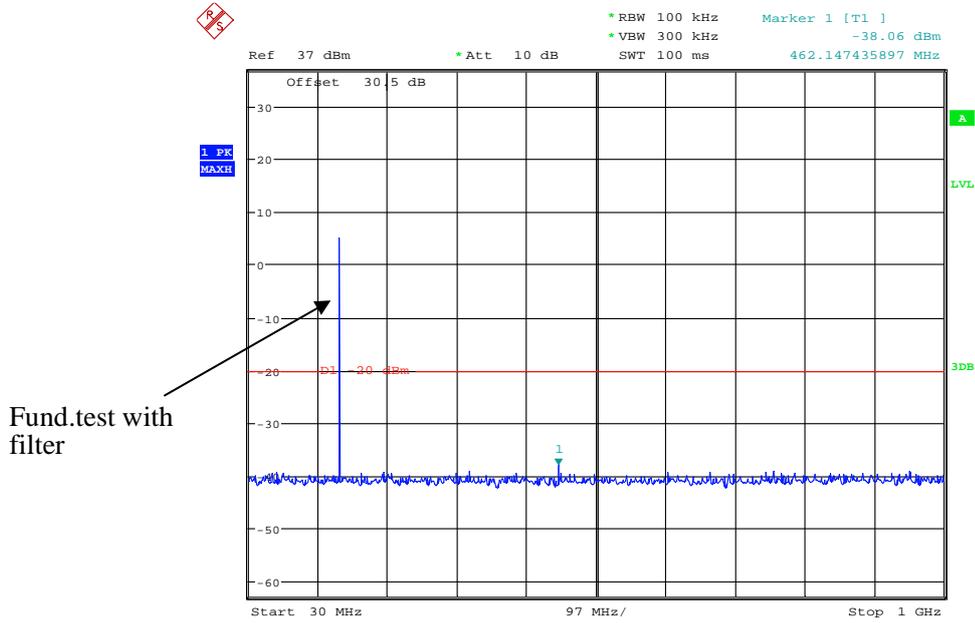


Date: 19.DEC.2017 09:19:37

1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 155.7525 MHz, For FCC part 90

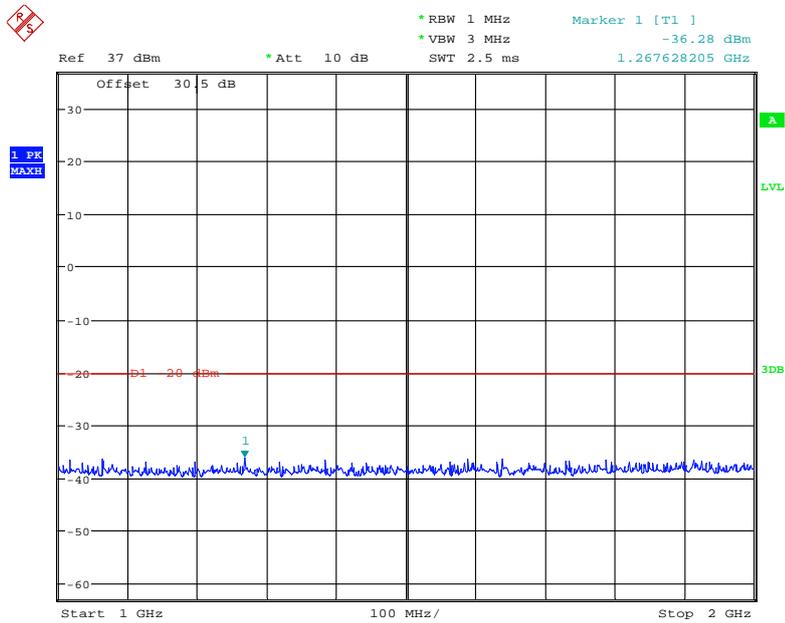


Date: 19.DEC.2017 09:20:57

30MHz – 1 GHz, Channel Spacing 25 kHz, 161.605 MHz, For FCC part 80

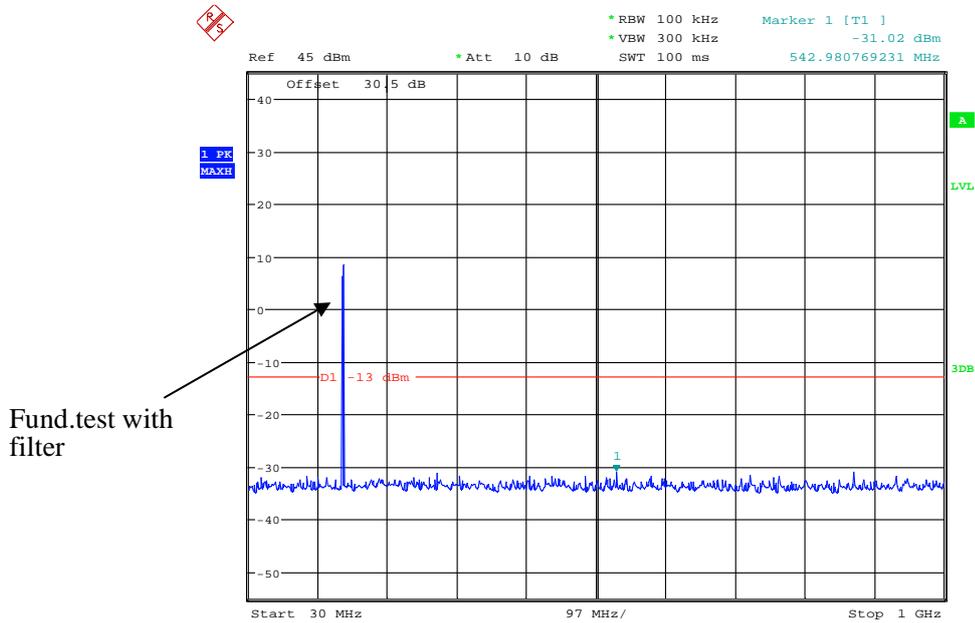

Date: 19.DEC.2017 10:44:40


1 GHz – 2 GHz, Channel Spacing 25 kHz, 161.605 MHz, For FCC part 80

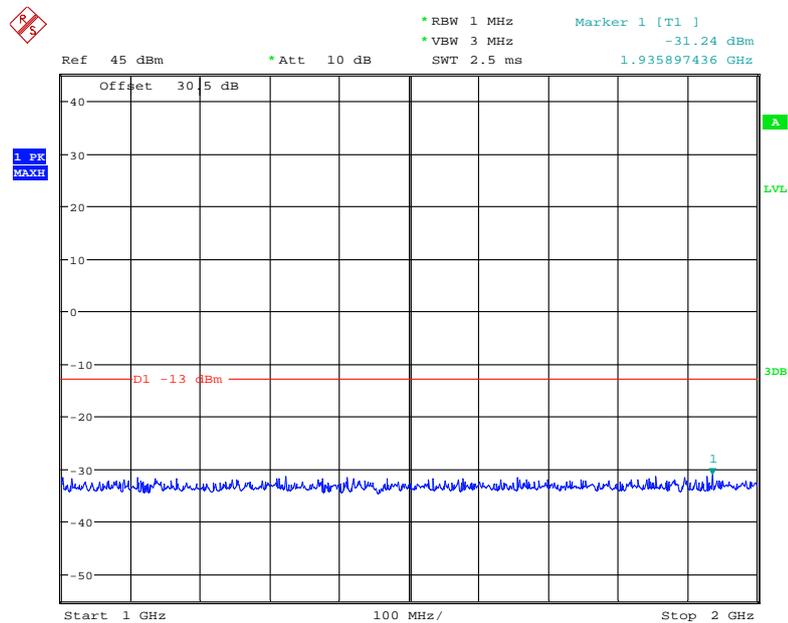

Date: 19.DEC.2017 10:45:44


Digital Modulation:

30MHz – 1 GHz, Channel Spacing 12.5 kHz, 151.025 MHz, For FCC part 22

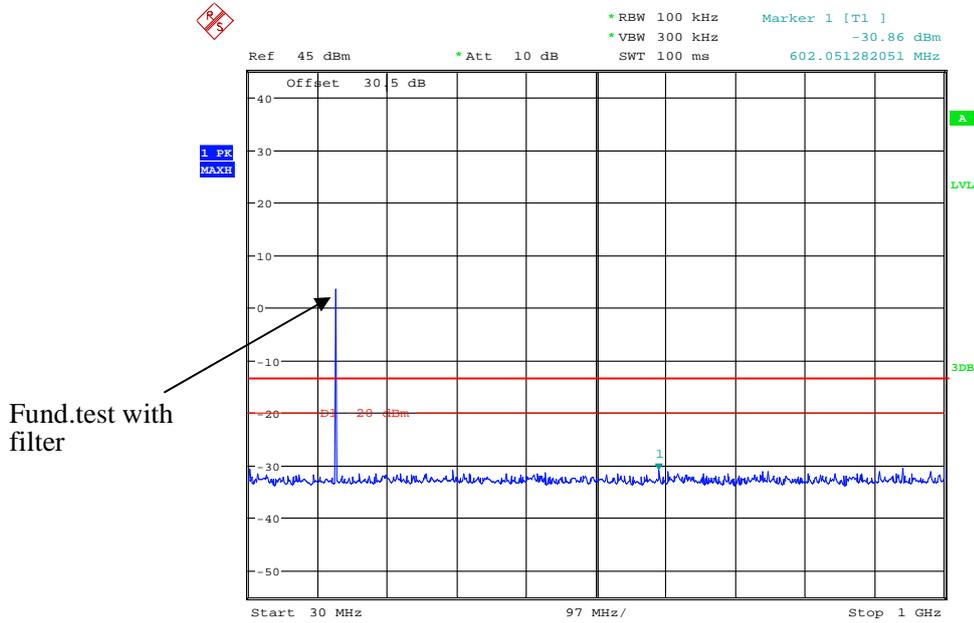


Date: 19.DEC.2017 10:36:03

1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 151.025 MHz, For FCC part 22

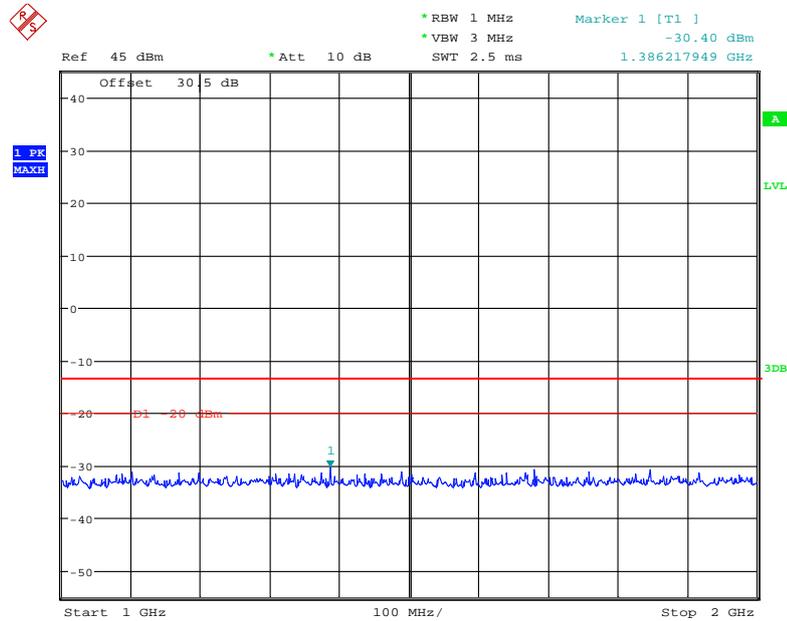


Date: 19.DEC.2017 10:38:38

30MHz – 1 GHz, Channel Spacing 12.5 kHz, 153.025 MHz, For FCC part 74

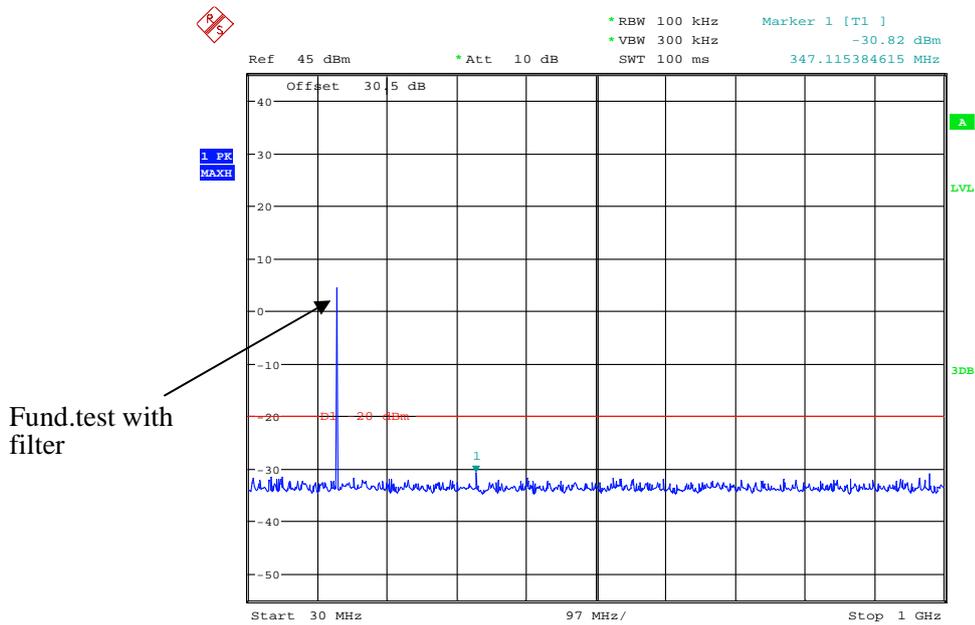

Date: 19.DEC.2017 10:43:13

1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 153.025 MHz, For FCC part 74

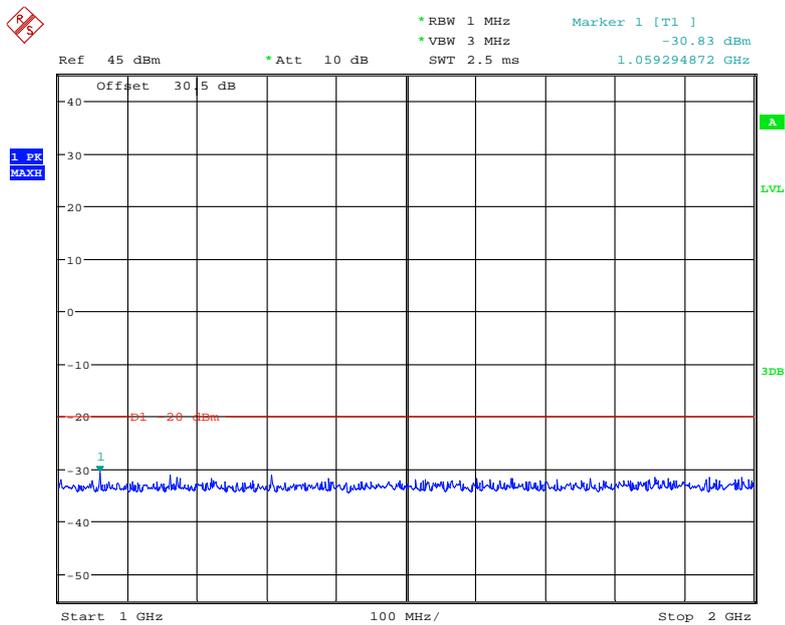

Date: 19.DEC.2017 10:39:32

FCC §2.1053 & §22.861 & §74.462 & § 80.211 & §90.210 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053, §22.861, §74.462, § 80.211 and §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 50 + 10 Log₁₀ (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

Spurious attenuation limit in dB = 43 + 10 Log₁₀ (power out in Watts) for EUT with a 25 kHz channel bandwidth.

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Xiangguang Kong on 2017-12-19.

Test Mode: Transmitting

30MHz - 2GHz:

| Frequency (MHz) | Receiver Reading (dBµV) | Turn Table Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--|-------------------------|-------------------------|------------|-------------|-------------|-----------------|-------------------|----------------------|-------------|-------------|
| | | | Height (m) | Polar (H/V) | Level (dBm) | Cable Loss (dB) | Antenna Gain (dB) | | | |
| Analog 151.025MHz, 12.5 kHz,For FCC part 22 | | | | | | | | | | |
| 453.08 | 44.94 | 70 | 1.3 | H | -50.1 | 0.47 | 0.0 | -50.57 | -13 | 37.57 |
| 453.08 | 43.53 | 2 | 1.2 | V | -51.5 | 0.47 | 0.0 | -51.97 | -13 | 38.97 |
| 1208.20 | 47.69 | 152 | 2.5 | H | -60.0 | 1.50 | 7.20 | -54.30 | -13 | 41.30 |
| 1208.20 | 46.38 | 111 | 2.1 | V | -61.0 | 1.50 | 7.20 | -55.30 | -13 | 42.30 |
| Analog 151.025MHz, 25 kHz,For FCC part 22 | | | | | | | | | | |
| 453.08 | 43.76 | 232 | 2.1 | H | -51.2 | 0.47 | 0.0 | -51.67 | -13 | 38.67 |
| 453.08 | 45.09 | 77 | 2.2 | V | -49.9 | 0.47 | 0.0 | -50.37 | -13 | 37.37 |
| 1208.20 | 47.65 | 82 | 2.3 | H | -60.1 | 1.50 | 7.20 | -54.40 | -13 | 41.40 |
| 1208.20 | 48.39 | 259 | 1.4 | V | -59.0 | 1.50 | 7.20 | -53.30 | -13 | 40.30 |
| Analog 153.025MHz, 12.5 kHz,For FCC part 74 | | | | | | | | | | |
| 459.08 | 44.53 | 336 | 2.2 | H | -50.5 | 0.47 | 0.0 | -50.97 | -20 | 30.97 |
| 459.08 | 43.81 | 12 | 2.4 | V | -51.2 | 0.47 | 0.0 | -51.67 | -20 | 31.67 |
| 1224.20 | 47.69 | 68 | 2.1 | H | -60.0 | 1.50 | 7.20 | -54.30 | -20 | 34.30 |
| 1224.20 | 47.44 | 116 | 2.1 | V | -60.0 | 1.50 | 7.20 | -54.30 | -20 | 34.30 |
| Analog 153.025MHz, 25 kHz,For FCC part 74 | | | | | | | | | | |
| 459.08 | 43.37 | 134 | 1.1 | H | -51.6 | 0.47 | 0.0 | -52.07 | -13 | 39.07 |
| 459.08 | 44.15 | 140 | 2.4 | V | -50.9 | 0.47 | 0.0 | -51.37 | -13 | 38.37 |
| 1530.25 | 48.63 | 53 | 1.3 | H | -60.1 | 1.60 | 8.70 | -53.00 | -13 | 40.00 |
| 1530.25 | 46.22 | 294 | 1.1 | V | -62.8 | 1.60 | 8.70 | -55.70 | -13 | 42.70 |
| Analog 155.7525MHz, 12.5 kHz,For FCC part 90 | | | | | | | | | | |
| 467.26 | 44.94 | 22 | 1.9 | H | -50.1 | 0.47 | 0.0 | -50.57 | -20 | 30.57 |
| 467.26 | 43.58 | 200 | 1.4 | V | -51.4 | 0.47 | 0.0 | -51.87 | -20 | 31.87 |
| 1557.53 | 49.68 | 339 | 2.4 | H | -58.6 | 1.40 | 8.90 | -51.10 | -20 | 31.10 |
| 1557.53 | 47.32 | 46 | 1.1 | V | -60.8 | 1.40 | 8.90 | -53.30 | -20 | 33.30 |
| Analog 161.605MHz, 25 kHz,For FCC part 80 | | | | | | | | | | |
| 484.82 | 49.85 | 123 | 1.1 | H | -45.2 | 0.47 | 0.0 | -45.67 | -13 | 32.67 |
| 484.82 | 48.76 | 102 | 1.9 | V | -46.2 | 0.47 | 0.0 | -46.67 | -13 | 33.67 |
| 1454.45 | 48.54 | 68 | 1.9 | H | -59.9 | 1.60 | 8.70 | -52.80 | -13 | 39.80 |
| 1454.45 | 47.21 | 213 | 2.1 | V | -61.6 | 1.60 | 8.70 | -54.50 | -13 | 41.50 |

| Frequency (MHz) | Receiver Reading (dBμV) | Turn Table Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|---|-------------------------|-------------------------|------------|-------------|-------------|-----------------|-------------------|----------------------|-------------|-------------|
| | | | Height (m) | Polar (H/V) | Level (dBm) | Cable Loss (dB) | Antenna Gain (dB) | | | |
| Digital 151.025MHz, 12.5 kHz,For FCC part 22 | | | | | | | | | | |
| 453.08 | 44.68 | 204 | 2.0 | H | -50.3 | 0.47 | 0 | -50.77 | -13 | 37.77 |
| 453.08 | 43.29 | 102 | 1.6 | V | -51.7 | 0.47 | 0 | -52.17 | -13 | 39.17 |
| 1359.23 | 46.89 | 52 | 1.8 | H | -60.9 | 1.60 | 8.30 | -54.20 | -13 | 41.20 |
| 1359.23 | 47.32 | 125 | 1.1 | V | -60.7 | 1.60 | 8.30 | -54.00 | -13 | 41.00 |
| Digital 153.025MHz, 12.5 kHz,For FCC part 74 | | | | | | | | | | |
| 459.08 | 43.87 | 218 | 1.5 | H | -51.1 | 0.47 | 0 | -51.57 | -20 | 31.57 |
| 459.08 | 44.95 | 284 | 1.6 | V | -50.0 | 0.47 | 0 | -50.47 | -20 | 30.47 |
| 1377.23 | 46.73 | 253 | 1.1 | H | -61.1 | 1.60 | 8.30 | -54.40 | -20 | 34.40 |
| 1377.23 | 47.28 | 253 | 1.9 | V | -60.8 | 1.60 | 8.30 | -54.10 | -20 | 34.10 |
| Digital 155.7525MHz, 12.5 kHz,For FCC part 90 | | | | | | | | | | |
| 467.26 | 45.13 | 248 | 1.5 | H | -49.9 | 0.47 | 0 | -50.37 | -20 | 30.37 |
| 467.26 | 44.51 | 60 | 1.9 | V | -50.5 | 0.47 | 0 | -50.97 | -20 | 30.97 |
| 1401.77 | 46.72 | 171 | 1.6 | H | -61.1 | 1.60 | 8.30 | -54.40 | -20 | 34.40 |
| 1401.77 | 47.43 | 86 | 1.3 | V | -60.6 | 1.60 | 8.30 | -53.90 | -20 | 33.90 |

Note:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1055 & § 22.355 & §74.464 & § 80.209 & §90.213 - FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, § 22.355, §74.464, § 80.209 and §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Xiangguang Kong on 2017-12-19.

Test Mode: Transmitting

| Analog Modulation, Reference Frequency: 151.025 MHz, Limit: ±2.5 ppm, 12.5 kHz | | | |
|---|--|--|------------------------------|
| Test Environment | | Frequency Measure with Time Elapsed | |
| Temperature (°C) | Voltage Supplied (V_{DC}) | Measured Frequency (MHz) | Frequency Error (ppm) |
| Frequency Stability versus Input Temperature | | | |
| 50 | 7.40 | 151.025044 | 0.2913 |
| 40 | 7.40 | 151.025037 | 0.2450 |
| 30 | 7.40 | 151.025059 | 0.3907 |
| 20 | 7.40 | 151.025032 | 0.2119 |
| 10 | 7.40 | 151.025005 | 0.0331 |
| 0 | 7.40 | 151.025014 | 0.0927 |
| -10 | 7.40 | 151.025016 | 0.1059 |
| -20 | 7.40 | 151.025008 | 0.0530 |
| -30 | 7.40 | 151.025049 | 0.3244 |
| Frequency Stability versus Input Voltage | | | |
| 20 | 6.40 | 151.025026 | 0.1722 |

| Analog Modulation, Reference Frequency: 151.025 MHz, Limit: ±5 ppm, 25 kHz | | | |
|---|--|--|------------------------------|
| Test Environment | | Frequency Measure with Time Elapsed | |
| Temperature (°C) | Voltage Supplied (V_{DC}) | Measured Frequency (MHz) | Frequency Error (ppm) |
| Frequency Stability versus Input Temperature | | | |
| 50 | 7.40 | 151.025066 | 0.4370 |
| 40 | 7.40 | 151.025008 | 0.0530 |
| 30 | 7.40 | 151.025040 | 0.2649 |
| 20 | 7.40 | 151.025032 | 0.2119 |
| 10 | 7.40 | 151.025032 | 0.2119 |
| 0 | 7.40 | 151.025053 | 0.3509 |
| -10 | 7.40 | 151.025014 | 0.0927 |
| -20 | 7.40 | 151.025030 | 0.1986 |
| -30 | 7.40 | 151.025068 | 0.4503 |
| Frequency Stability versus Input Voltage | | | |
| 20 | 6.40 | 151.025017 | 0.1126 |

| Analog Modulation, Reference Frequency: 153.025 MHz, Limit: ±2.5 ppm, 12.5 kHz | | | |
|---|--|--|------------------------------|
| Test Environment | | Frequency Measure with Time Elapsed | |
| Temperature (°C) | Voltage Supplied (V_{DC}) | Measured Frequency (MHz) | Frequency Error (ppm) |
| Frequency Stability versus Input Temperature | | | |
| 50 | 7.40 | 153.025031 | 0.2026 |
| 40 | 7.40 | 153.025037 | 0.2418 |
| 30 | 7.40 | 153.025059 | 0.3856 |
| 20 | 7.40 | 153.025016 | 0.1046 |
| 10 | 7.40 | 153.025035 | 0.2287 |
| 0 | 7.40 | 153.025042 | 0.2745 |
| -10 | 7.40 | 153.025001 | 0.0065 |
| -20 | 7.40 | 153.024992 | -0.0523 |
| -30 | 7.40 | 153.025047 | 0.3071 |
| Frequency Stability versus Input Voltage | | | |
| 20 | 6.40 | 153.024985 | -0.0980 |

| Analog Modulation, Reference Frequency: 153.025 MHz, Limit: ±5 ppm, 25 kHz | | | |
|---|--|--|------------------------------|
| Test Environment | | Frequency Measure with Time Elapsed | |
| Temperature (°C) | Voltage Supplied (V_{DC}) | Measured Frequency (MHz) | Frequency Error (ppm) |
| Frequency Stability versus Input Temperature | | | |
| 50 | 7.40 | 153.024999 | -0.0065 |
| 40 | 7.40 | 153.025015 | 0.0980 |
| 30 | 7.40 | 153.025050 | 0.3267 |
| 20 | 7.40 | 153.025028 | 0.1830 |
| 10 | 7.40 | 153.025058 | 0.3790 |
| 0 | 7.40 | 153.025057 | 0.3725 |
| -10 | 7.40 | 153.025037 | 0.2418 |
| -20 | 7.40 | 153.024986 | -0.0915 |
| -30 | 7.40 | 153.025075 | 0.4901 |
| Frequency Stability versus Input Voltage | | | |
| 20 | 6.40 | 153.025020 | 0.1307 |

| Analog Modulation, Reference Frequency: 155.7525 MHz, Limit: ±2.5 ppm, 12.5 kHz | | | |
|--|--|--|------------------------------|
| Test Environment | | Frequency Measure with Time Elapsed | |
| Temperature (°C) | Voltage Supplied (V_{DC}) | Measured Frequency (MHz) | Frequency Error (ppm) |
| Frequency Stability versus Input Temperature | | | |
| 50 | 7.40 | 155.752511 | 0.0706 |
| 40 | 7.40 | 155.752529 | 0.1862 |
| 30 | 7.40 | 155.752577 | 0.4944 |
| 20 | 7.40 | 155.752524 | 0.1541 |
| 10 | 7.40 | 155.752506 | 0.0385 |
| 0 | 7.40 | 155.752482 | -0.1156 |
| -10 | 7.40 | 155.752514 | 0.0899 |
| -20 | 7.40 | 155.752504 | 0.0257 |
| -30 | 7.40 | 155.752558 | 0.3724 |
| Frequency Stability versus Input Voltage | | | |
| 20 | 6.40 | 155.752554 | 0.3467 |

| Analog Modulation, Reference Frequency: 161.605 MHz, Limit: ±5 ppm, 25 kHz | | | |
|---|--|--|------------------------------|
| Test Environment | | Frequency Measure with Time Elapsed | |
| Temperature (°C) | Voltage Supplied (V_{DC}) | Measured Frequency (MHz) | Frequency Error (ppm) |
| Frequency Stability versus Input Temperature | | | |
| 50 | 7.40 | 161.605017 | 0.1052 |
| 40 | 7.40 | 161.605006 | 0.0371 |
| 30 | 7.40 | 161.605027 | 0.1671 |
| 20 | 7.40 | 161.605024 | 0.1485 |
| 10 | 7.40 | 161.605039 | 0.2413 |
| 0 | 7.40 | 161.605032 | 0.1980 |
| -10 | 7.40 | 161.605063 | 0.3898 |
| -20 | 7.40 | 161.605015 | 0.0928 |
| -30 | 7.40 | 161.605052 | 0.3218 |
| Frequency Stability versus Input Voltage | | | |
| 20 | 6.40 | 161.604994 | -0.0371 |

| Digital Modulation, Reference Frequency: 151.025 MHz, Limit: ±2.5 ppm, 12.5 kHz | | | |
|--|--|--|------------------------------|
| Test Environment | | Frequency Measure with Time Elapsed | |
| Temperature (°C) | Voltage Supplied (V_{DC}) | Measured Frequency (MHz) | Frequency Error (ppm) |
| Frequency Stability versus Input Temperature | | | |
| 50 | 7.40 | 151.025016 | 0.1059 |
| 40 | 7.40 | 151.025029 | 0.1920 |
| 30 | 7.40 | 151.025055 | 0.3642 |
| 20 | 7.40 | 151.025019 | 0.1258 |
| 10 | 7.40 | 151.025006 | 0.0397 |
| 0 | 7.40 | 151.025011 | 0.0728 |
| -10 | 7.40 | 151.025004 | 0.0265 |
| -20 | 7.40 | 151.025025 | 0.1655 |
| -30 | 7.40 | 151.025029 | 0.1920 |
| Frequency Stability versus Input Voltage | | | |
| 20 | 6.40 | 151.024995 | -0.0331 |

| Digital Modulation, Reference Frequency: 153.025 MHz, Limit: ±2.5 ppm, 12.5 kHz | | | |
|--|--|--|------------------------------|
| Test Environment | | Frequency Measure with Time Elapsed | |
| Temperature (°C) | Voltage Supplied (V_{DC}) | Measured Frequency (MHz) | Frequency Error (ppm) |
| Frequency Stability versus Input Temperature | | | |
| 50 | 7.40 | 153.025012 | 0.0784 |
| 40 | 7.40 | 153.025013 | 0.0850 |
| 30 | 7.40 | 153.025066 | 0.4313 |
| 20 | 7.40 | 153.025022 | 0.1438 |
| 10 | 7.40 | 153.025028 | 0.1830 |
| 0 | 7.40 | 153.025046 | 0.3006 |
| -10 | 7.40 | 153.025005 | 0.0327 |
| -20 | 7.40 | 153.024979 | -0.1372 |
| -30 | 7.40 | 153.025001 | 0.0065 |
| Frequency Stability versus Input Voltage | | | |
| 20 | 6.40 | 153.025045 | 0.2941 |

| Digital Modulation, Reference Frequency: 155.7525 MHz, Limit: ±2.5 ppm, 12.5 kHz | | | |
|---|--|--|------------------------------|
| Test Environment | | Frequency Measure with Time Elapsed | |
| Temperature (°C) | Voltage Supplied (V_{DC}) | Measured Frequency (MHz) | Frequency Error (ppm) |
| Frequency Stability versus Input Temperature | | | |
| 50 | 7.40 | 155.752509 | 0.0578 |
| 40 | 7.40 | 155.752540 | 0.2568 |
| 30 | 7.40 | 155.752510 | 0.0642 |
| 20 | 7.40 | 155.752519 | 0.1220 |
| 10 | 7.40 | 155.752515 | 0.0963 |
| 0 | 7.40 | 155.752511 | 0.0706 |
| -10 | 7.40 | 155.752510 | 0.0642 |
| -20 | 7.40 | 155.752475 | -0.1605 |
| -30 | 7.40 | 155.752529 | 0.1862 |
| Frequency Stability versus Input Voltage | | | |
| 20 | 6.40 | 155.752552 | 0.3339 |

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR


Applicable Standard

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3

Test Procedure

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- k) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

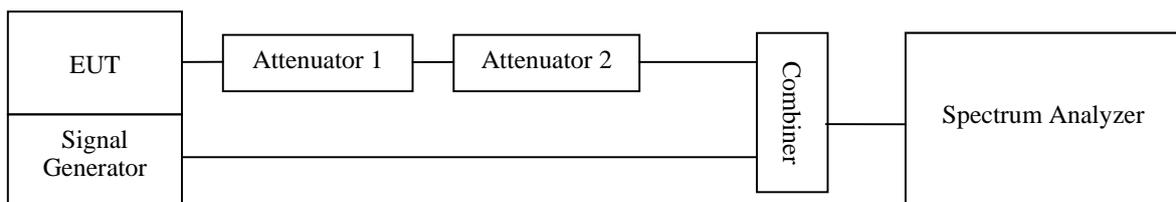

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 101.0 kPa |


The testing was performed by Xiangguang Kong on 2017-12-27.

| Channel Separation (kHz) | Transient Period (ms) | Transient Frequency | Result |
|--------------------------|-----------------------|---------------------|--------|
| 12.5 | 5 (t1) | <+/-12.5 kHz | Pass |
| | 25(t2) | <+/-6.25 kHz | |
| | 5 (t3) | <+/-12.5 kHz | |


Please refer to the following plots.

Carrier Frequency: 155.7525 MHz, Channel Separation = 12.5 kHz

Turn on

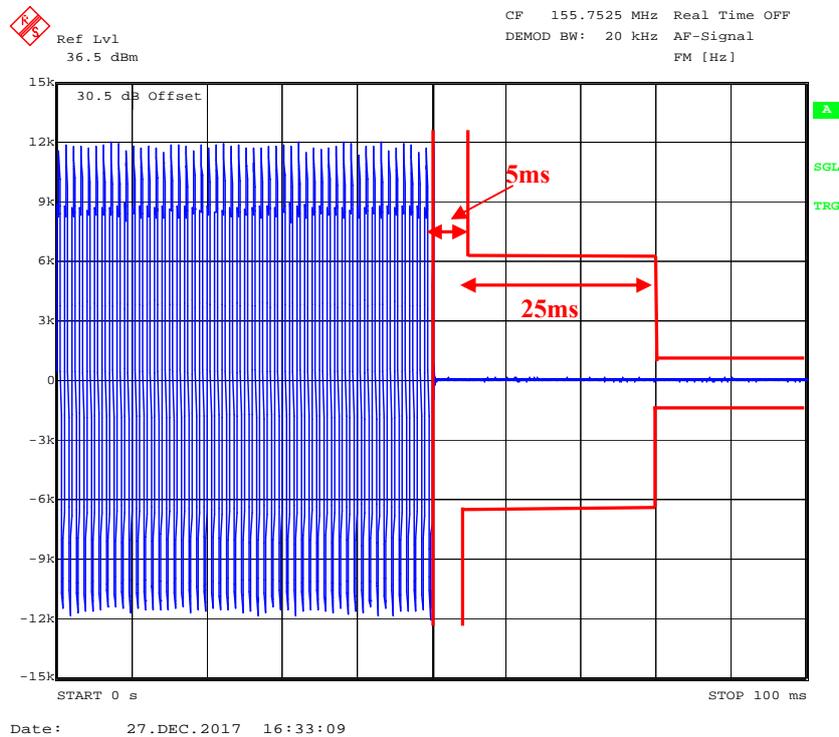

Turn off

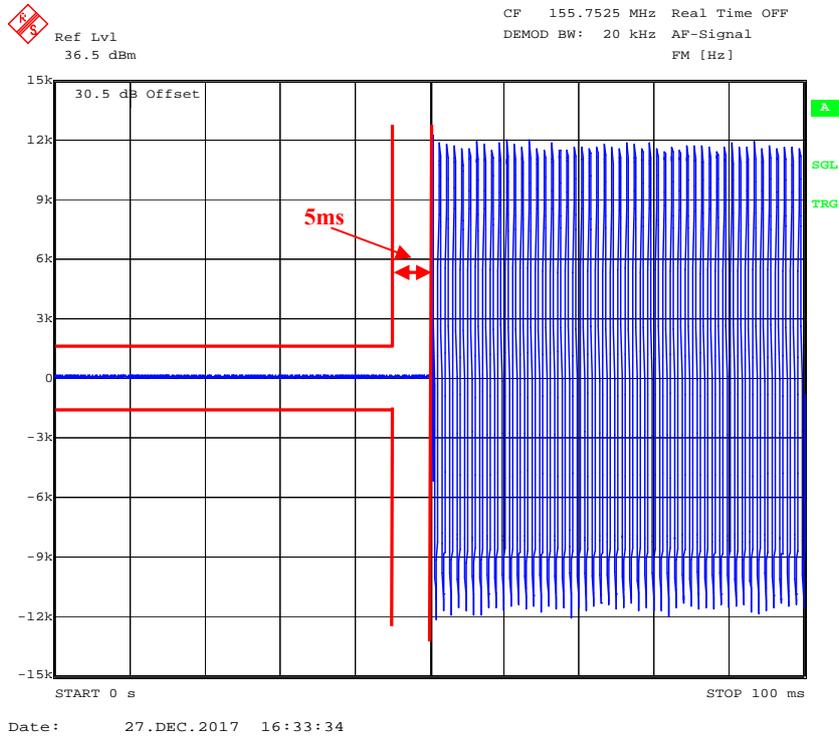

***** END OF REPORT *****