

Test Plot 1#: GSM 850_Head Left Cheek_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 42.458$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.257 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.256 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.262 W/kg

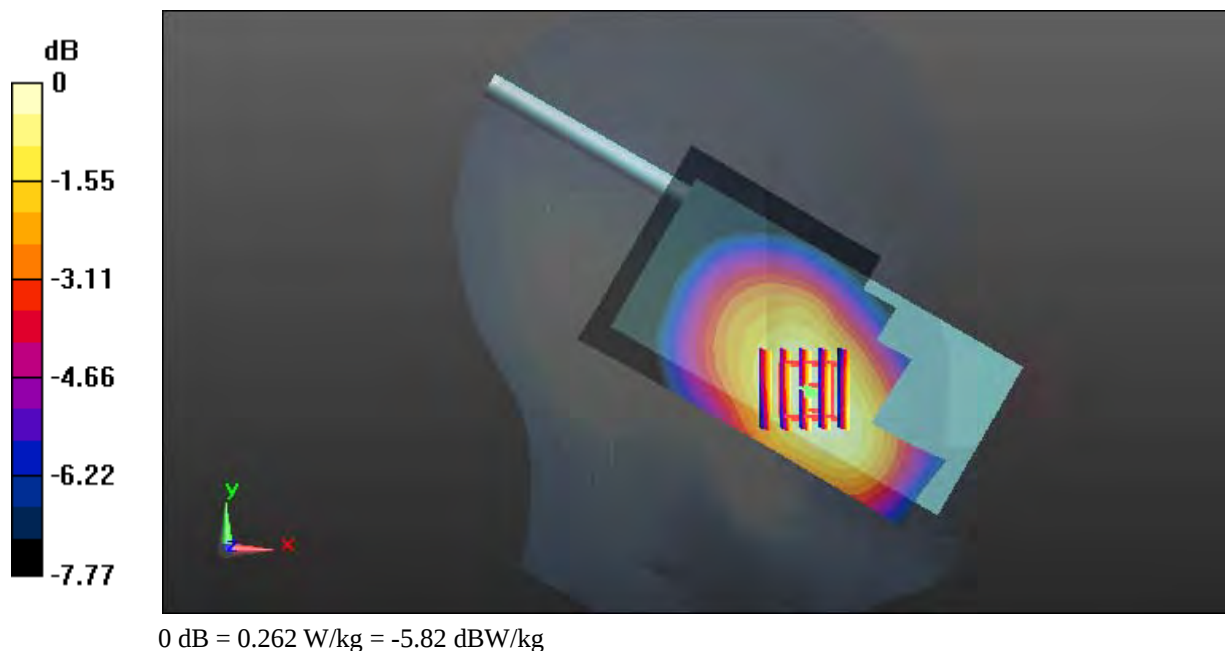

Test Plot 2#: GSM 850_Head Left Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.316$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.294 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.338 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.294 W/kg

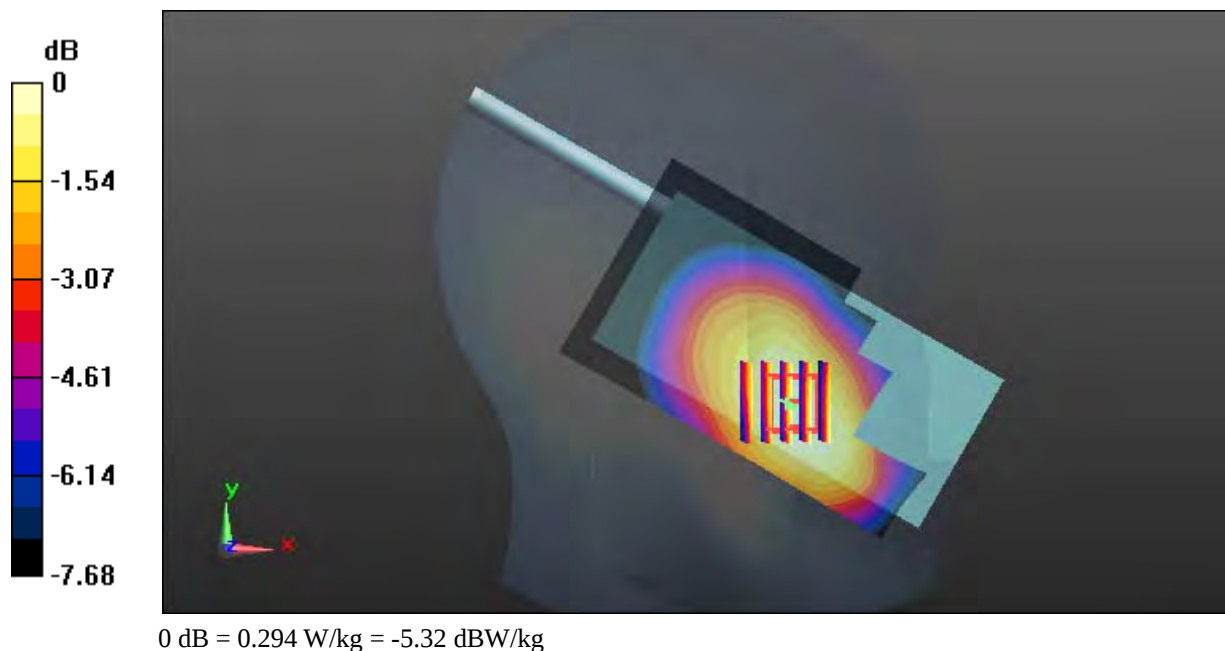

Test Plot 3#: GSM 850_Head Left Cheek_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 42.072$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.339 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.633 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.342 W/kg

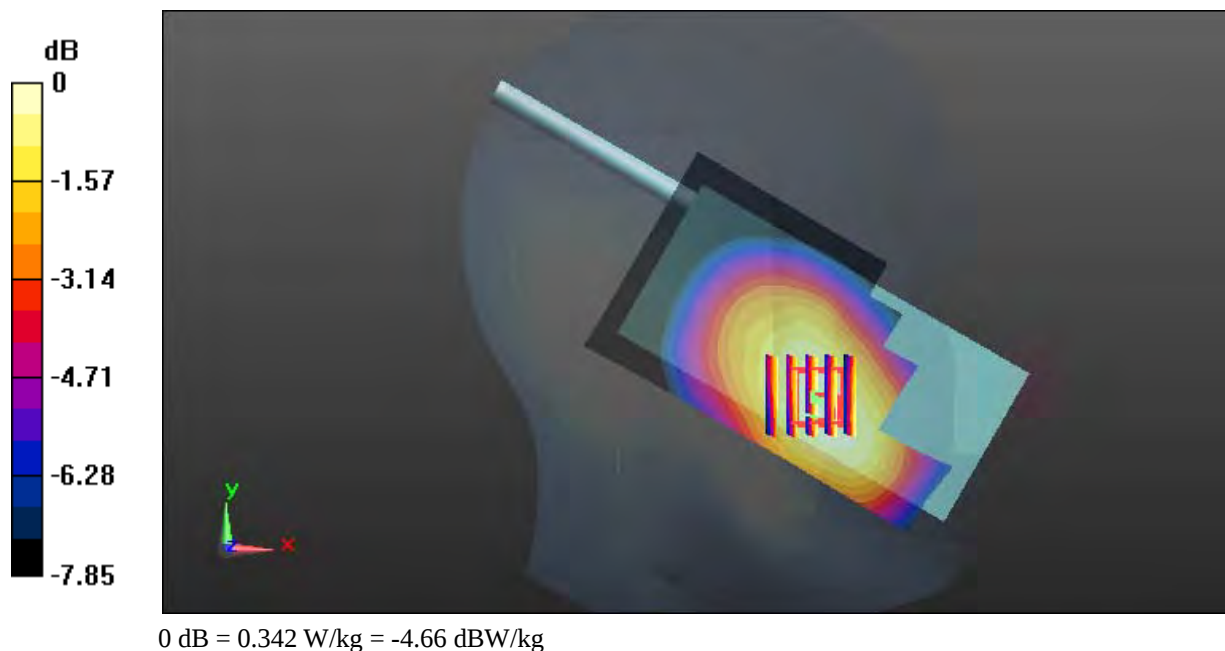

Test Plot 4#: GSM 850_Head Left Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.316$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.201 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.90 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.201 W/kg

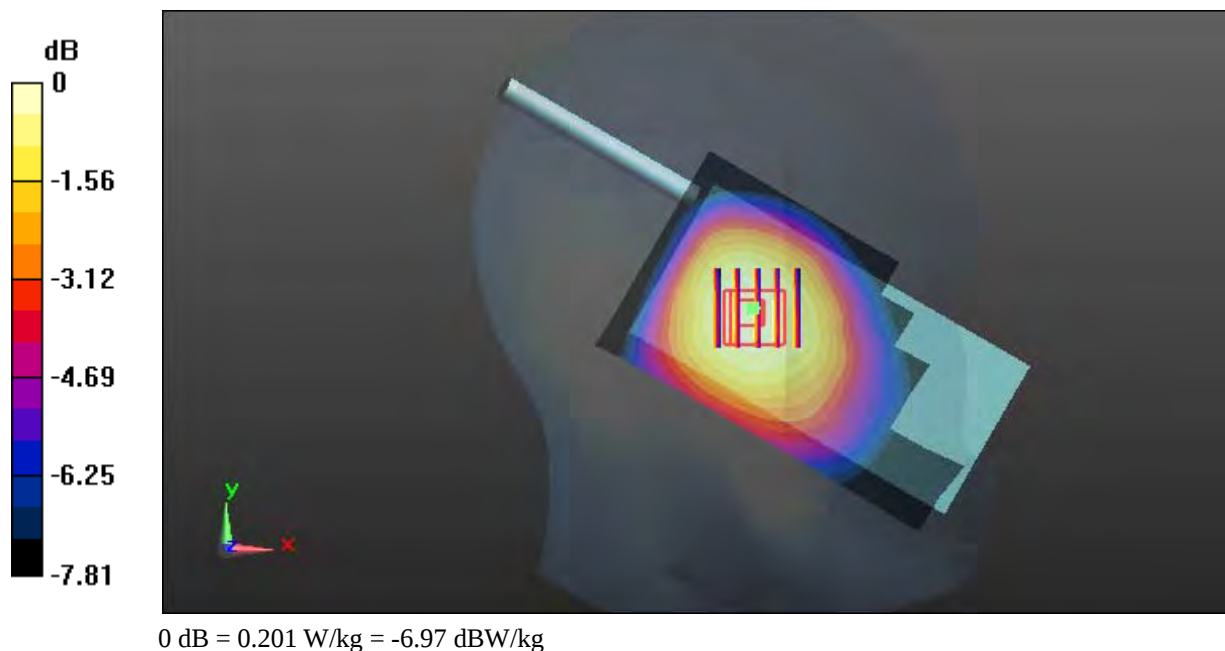

Test Plot 5#: GSM 850_Head Right Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.316$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.272 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.68 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.258 W/kg

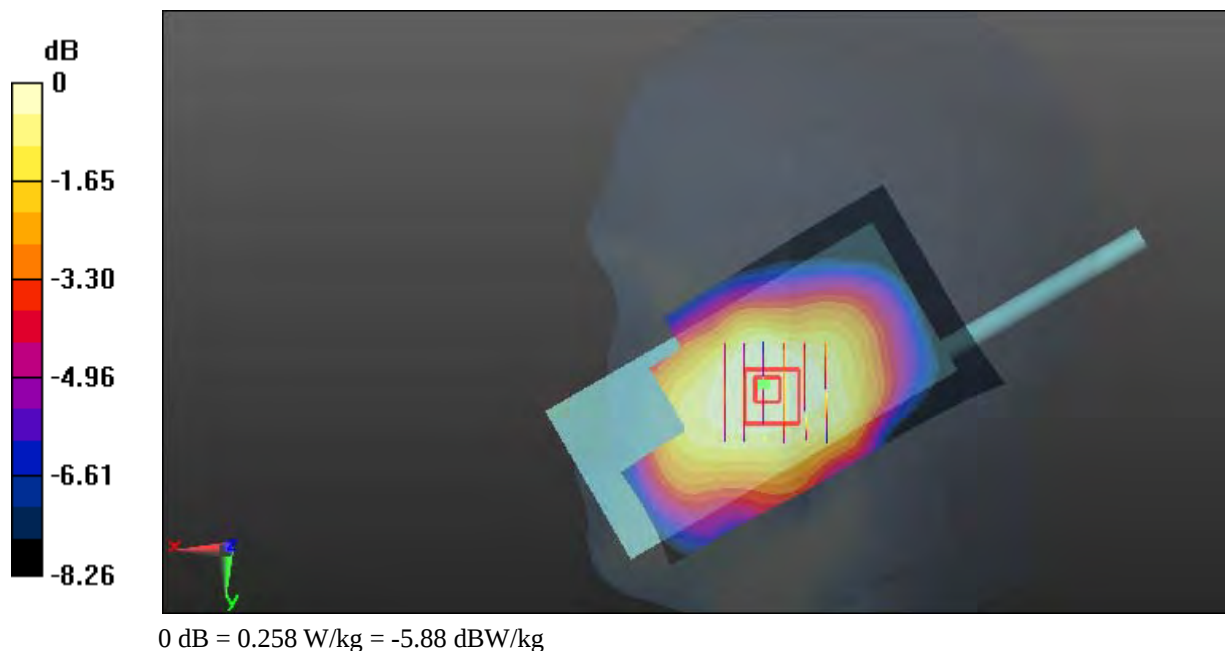

Test Plot 6#: GSM 850_Head Right Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.316$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.161 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.20 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

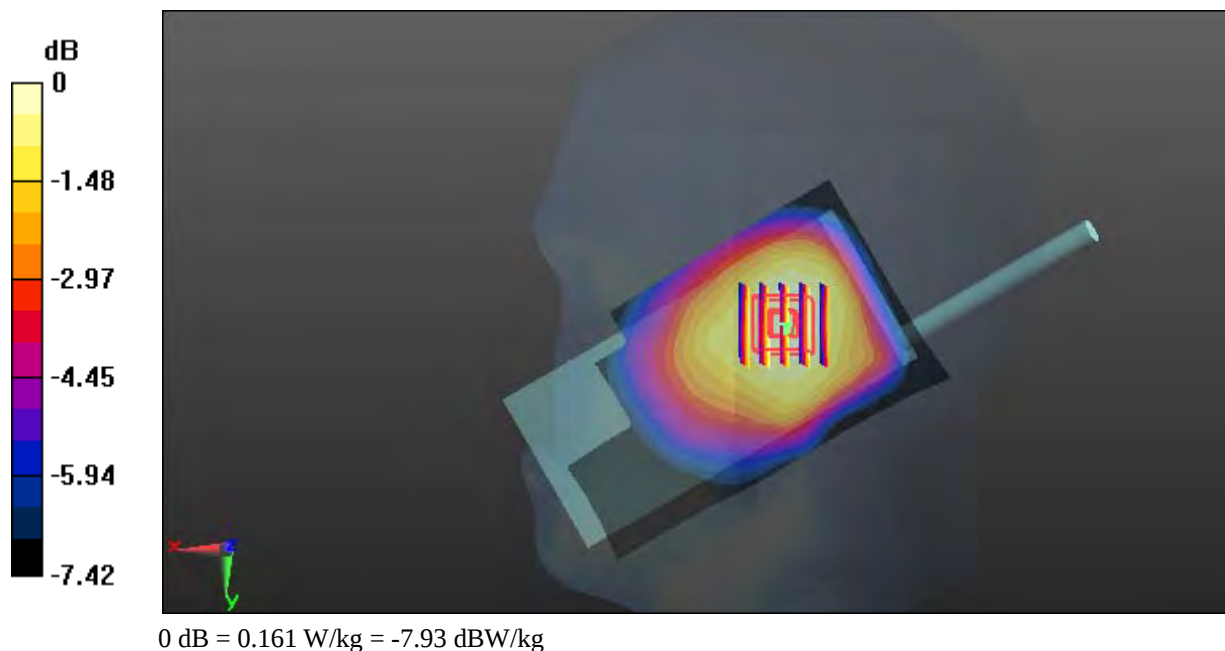

Test Plot 7#: GSM 850_Face Up_Middle

DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820

Communication System: Generic GPRS-3 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.316$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.154 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.94 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.153 W/kg



Test Plot 8#: GSM 850_Body Worn Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.229 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.73 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.225 W/kg

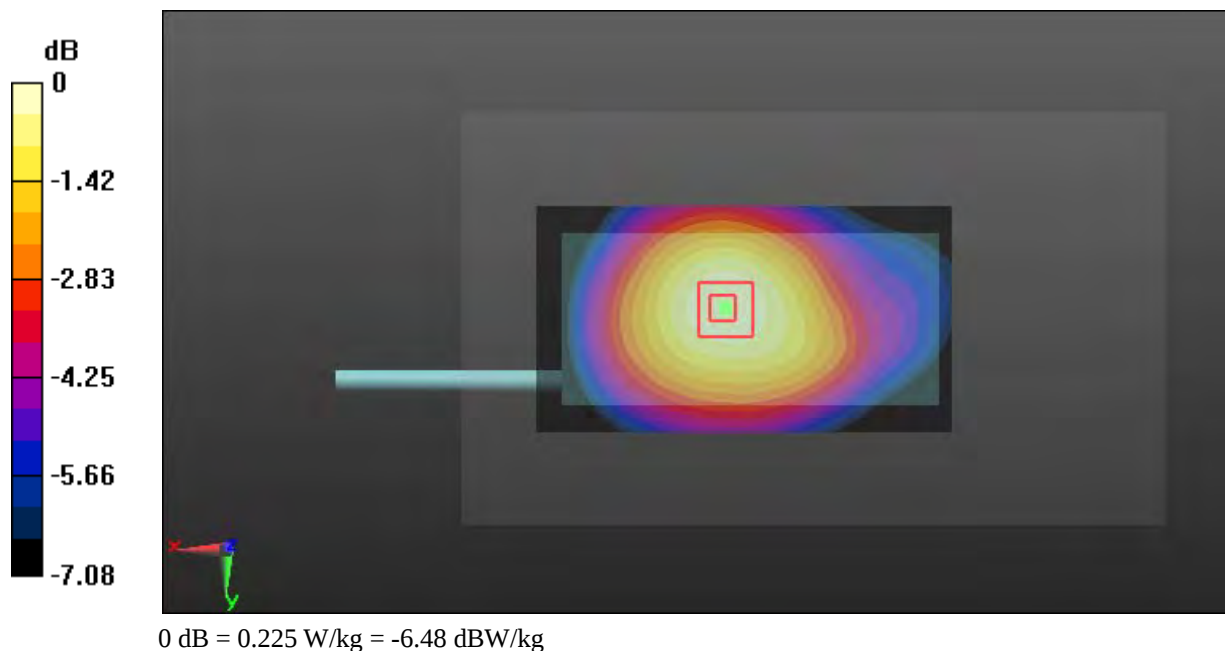

Test Plot 9#: GSM 850_Body Front _Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 824.2 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 57.433$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.363 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.58 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.355 W/kg

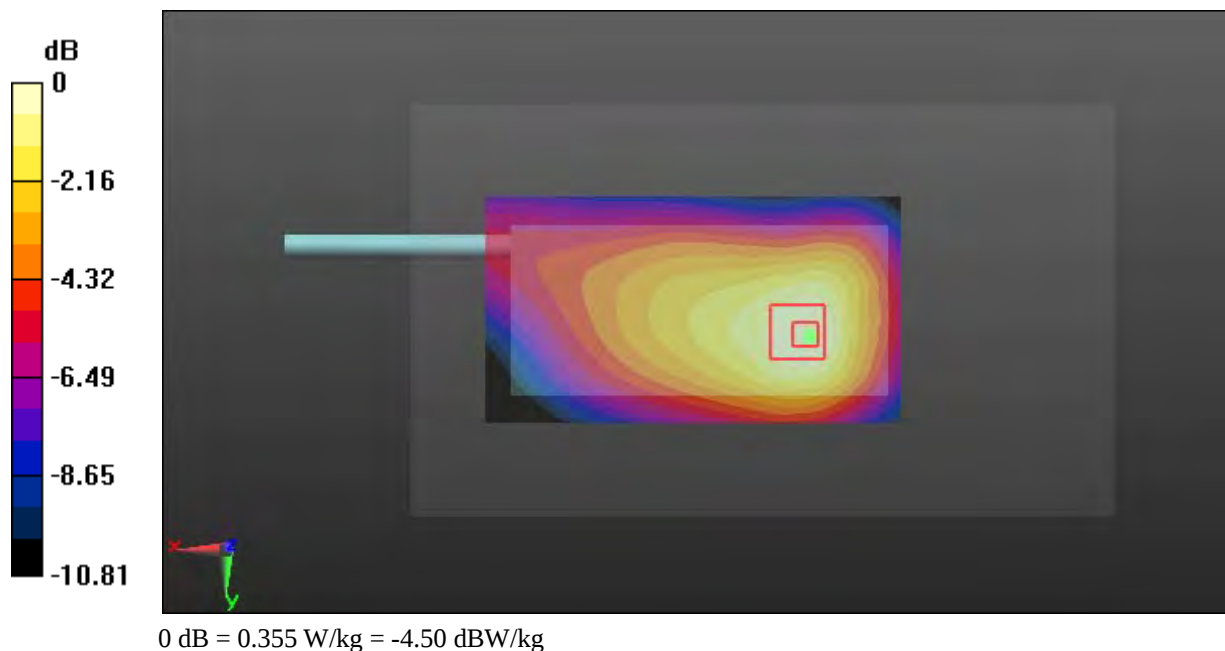

Test Plot 10#: GSM 850_Body Front _Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.343 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.80 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.337 W/kg

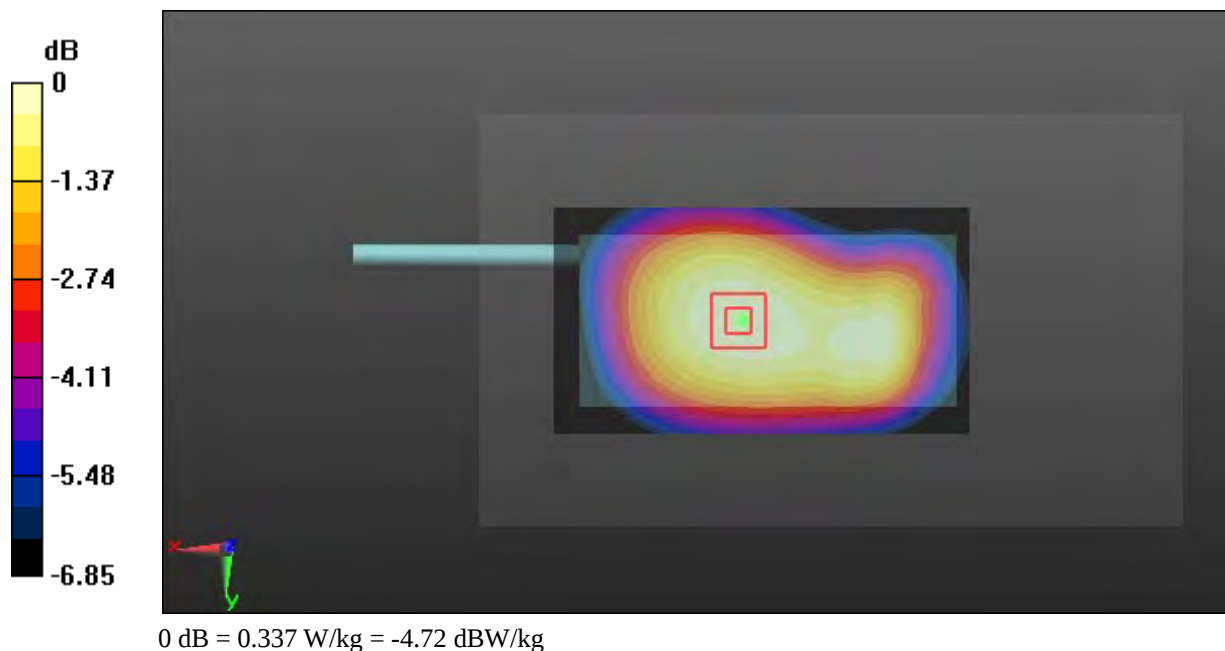

Test Plot 11#: GSM 850_Body Front _High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 848.8 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.966$ S/m; $\epsilon_r = 56.852$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.453 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.83 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.299 W/kg

Maximum value of SAR (measured) = 0.443 W/kg

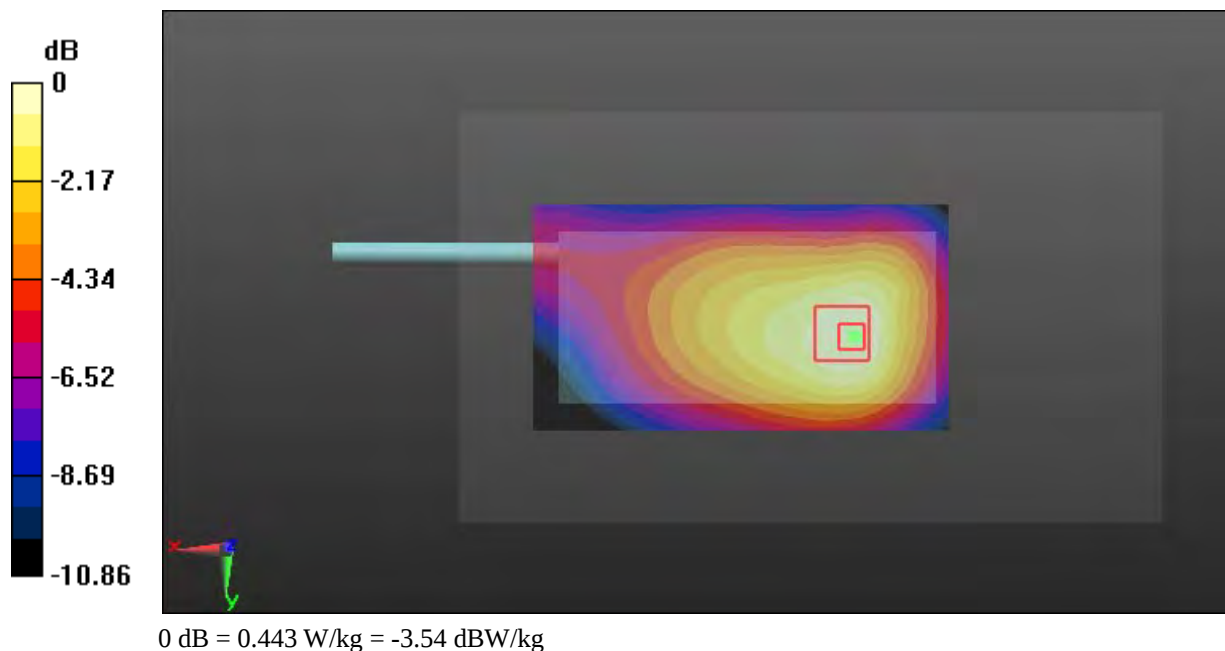

Test Plot 12#: GSM 850_Body Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.179 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.61 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

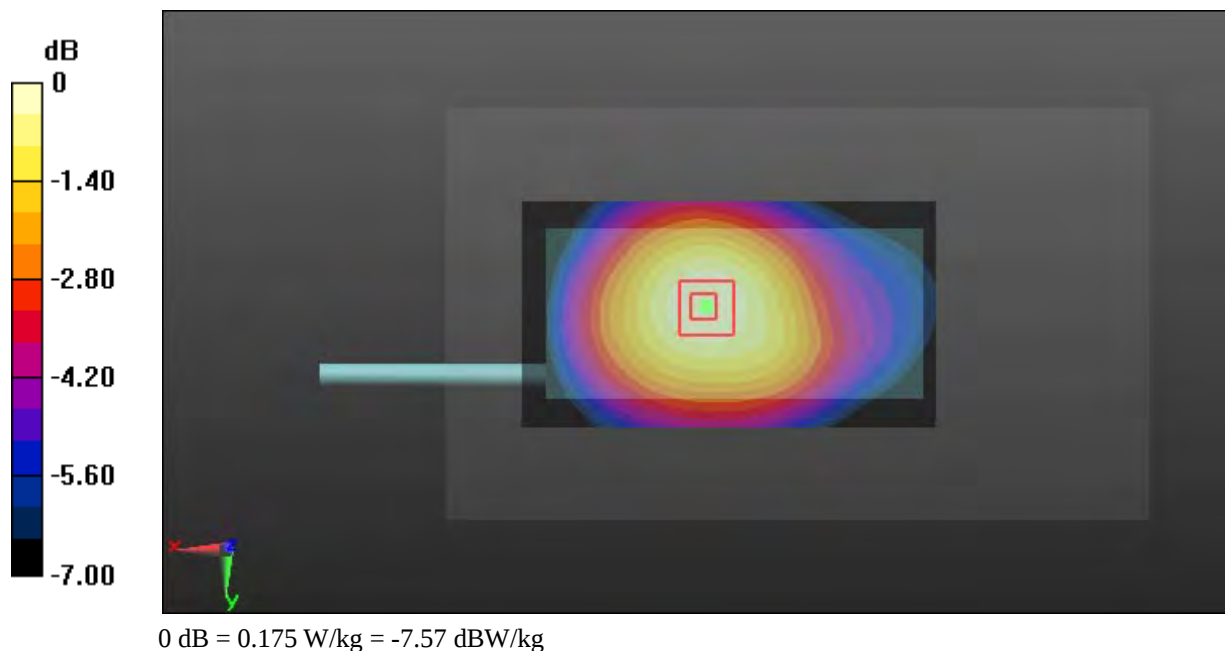

Test Plot 13#: GSM 850_Body Left_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.190 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.50 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.187 W/kg

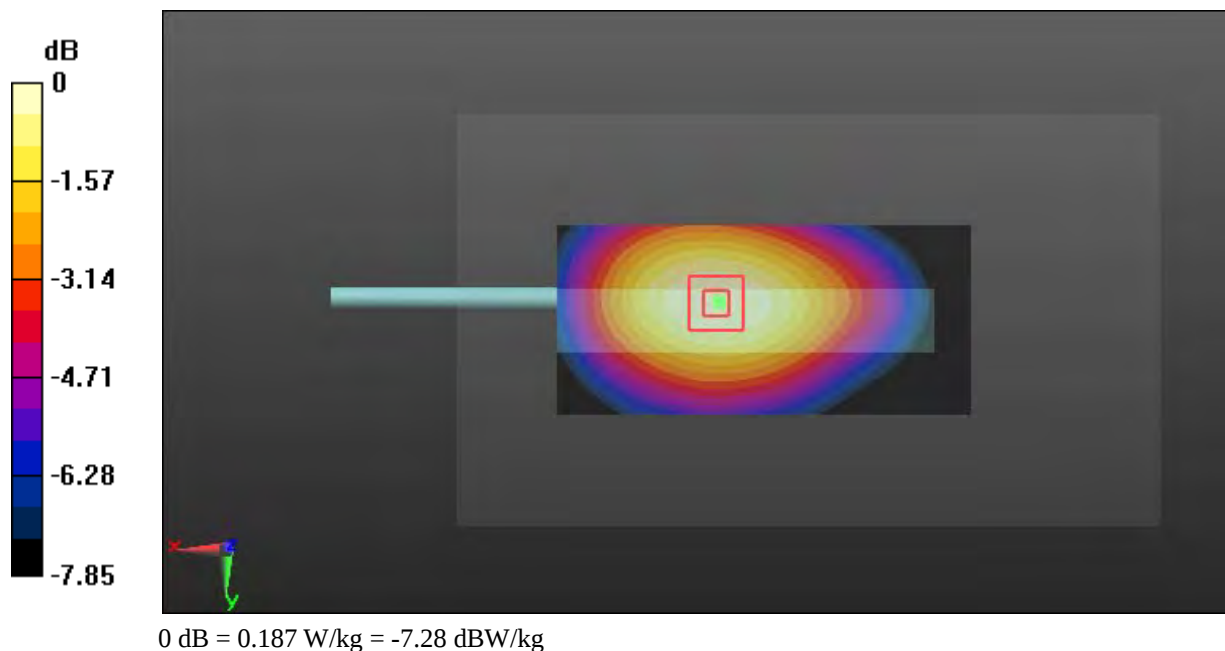

Test Plot 14#: GSM 850_Body Right_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.252 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.35 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.234 W/kg

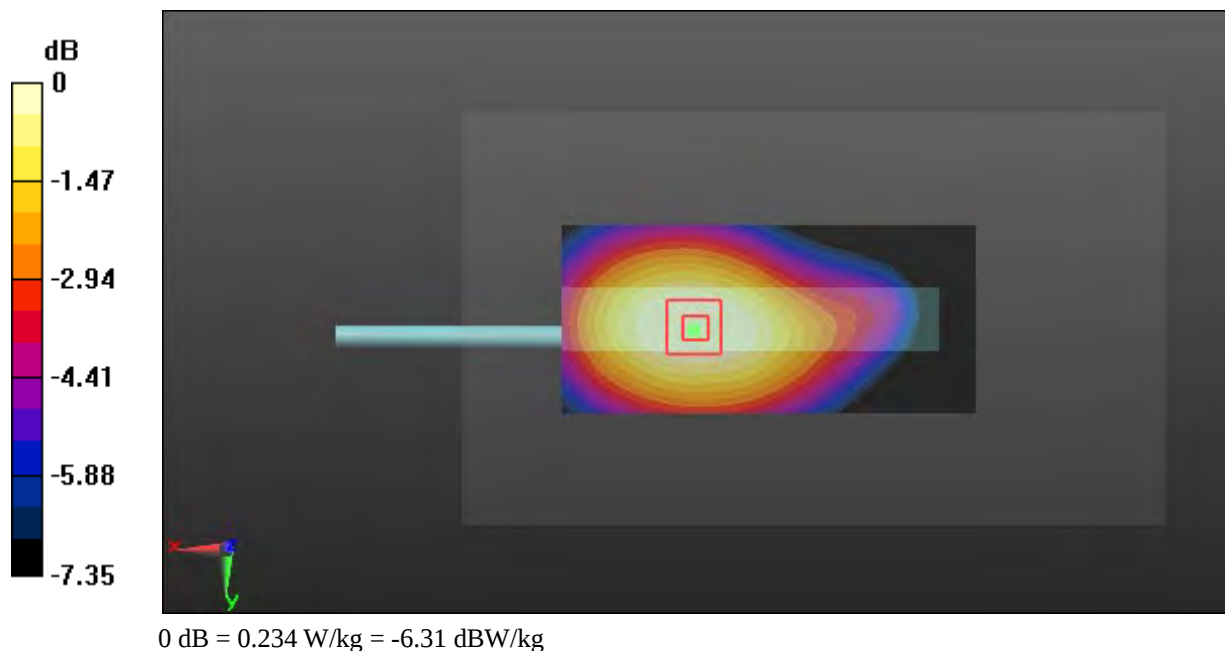

Test Plot 15#: GSM 850_Body Bottom_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.148 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.34 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.142 W/kg



Test Plot 16#: GSM 1900_Head Left Cheek_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.339$ S/m; $\epsilon_r = 40.732$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.267 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.659 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.272 W/kg

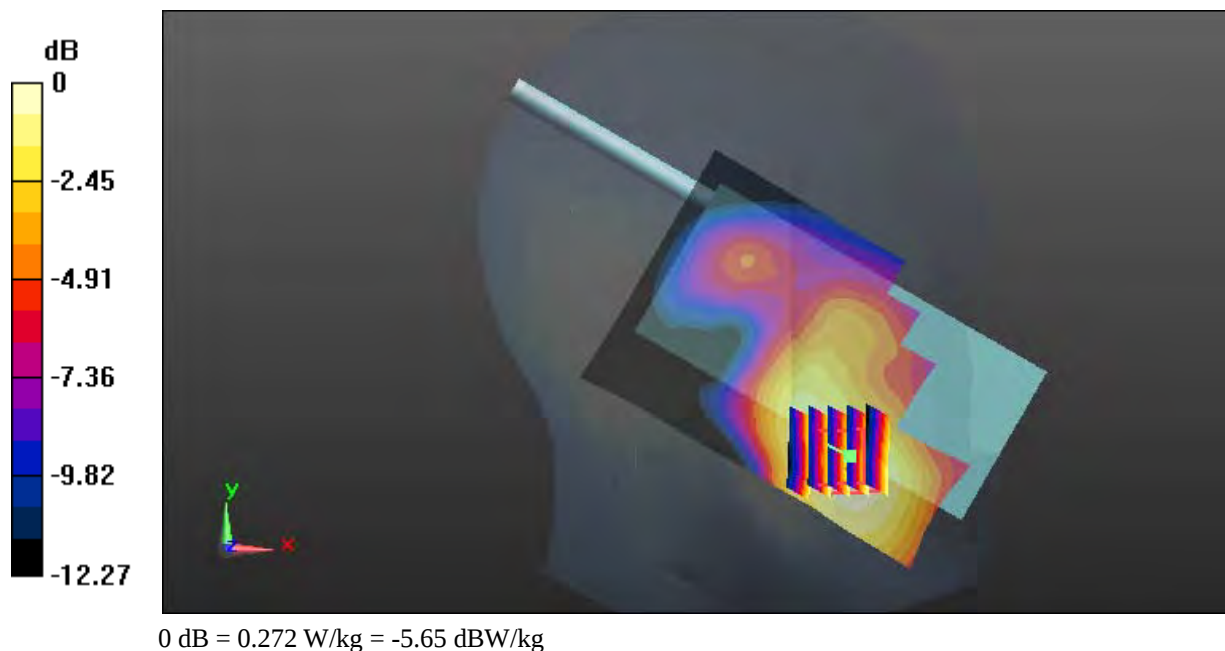

Test Plot 17#: GSM 1900_Head Left Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.323 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.141 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.317 W/kg

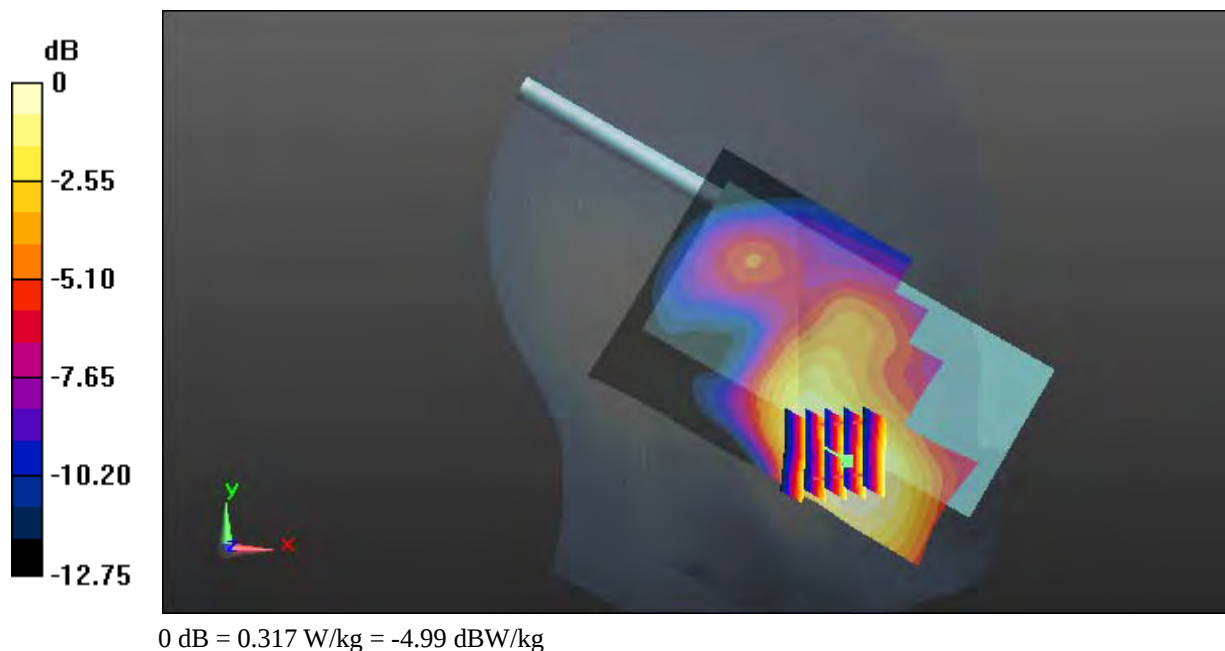

Test Plot 18#: GSM 1900_Head Left Cheek_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.302$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.315 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.755 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

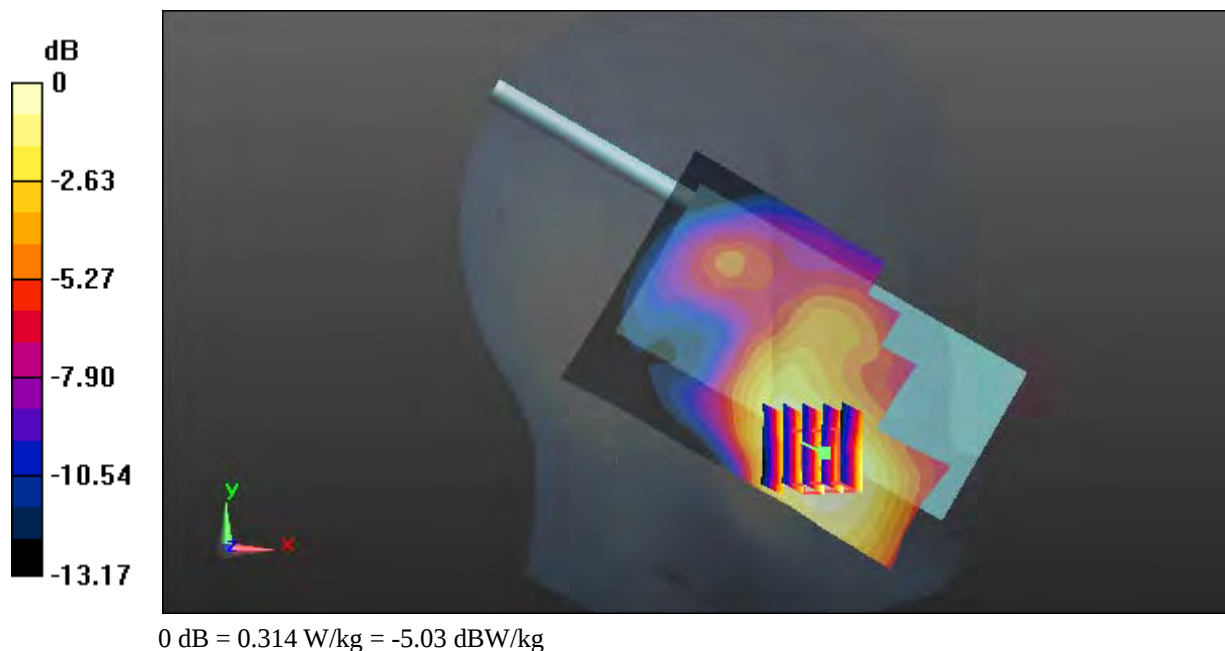

Test Plot 19#: GSM 1900_Head Left Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.192 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.625 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.180 W/kg

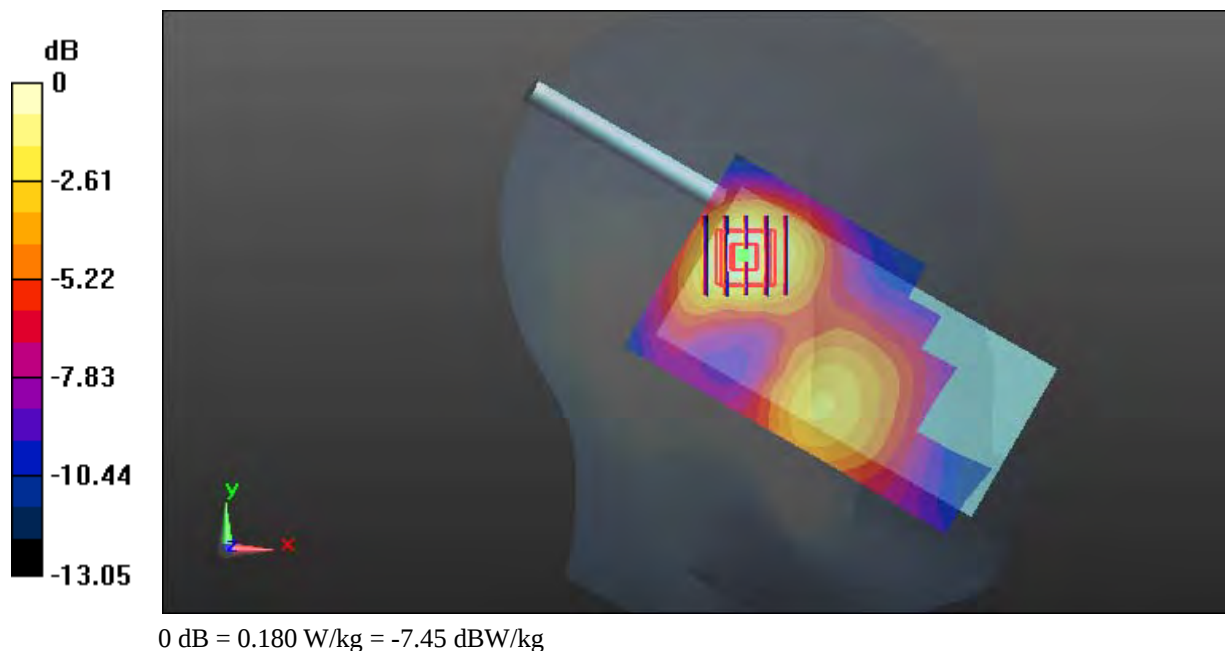

Test Plot 20#: GSM 1900_Head Right Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.178 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.725 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.178 W/kg

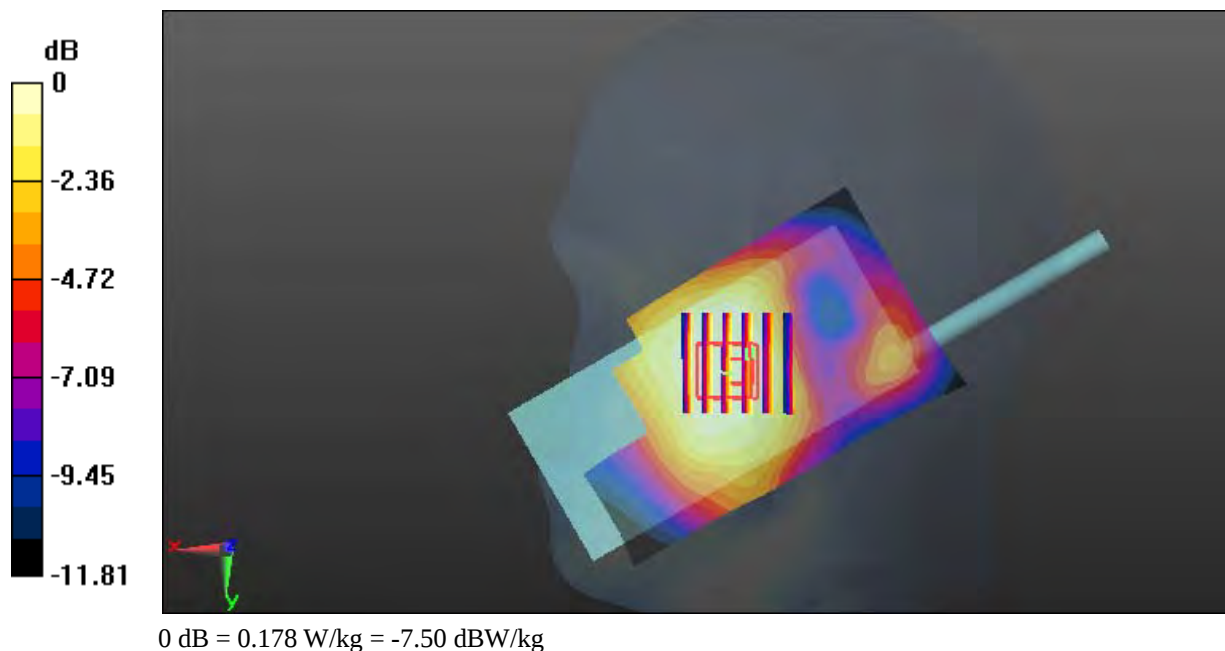

Test Plot 21#: GSM 1900_Head Right Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.109 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.488 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

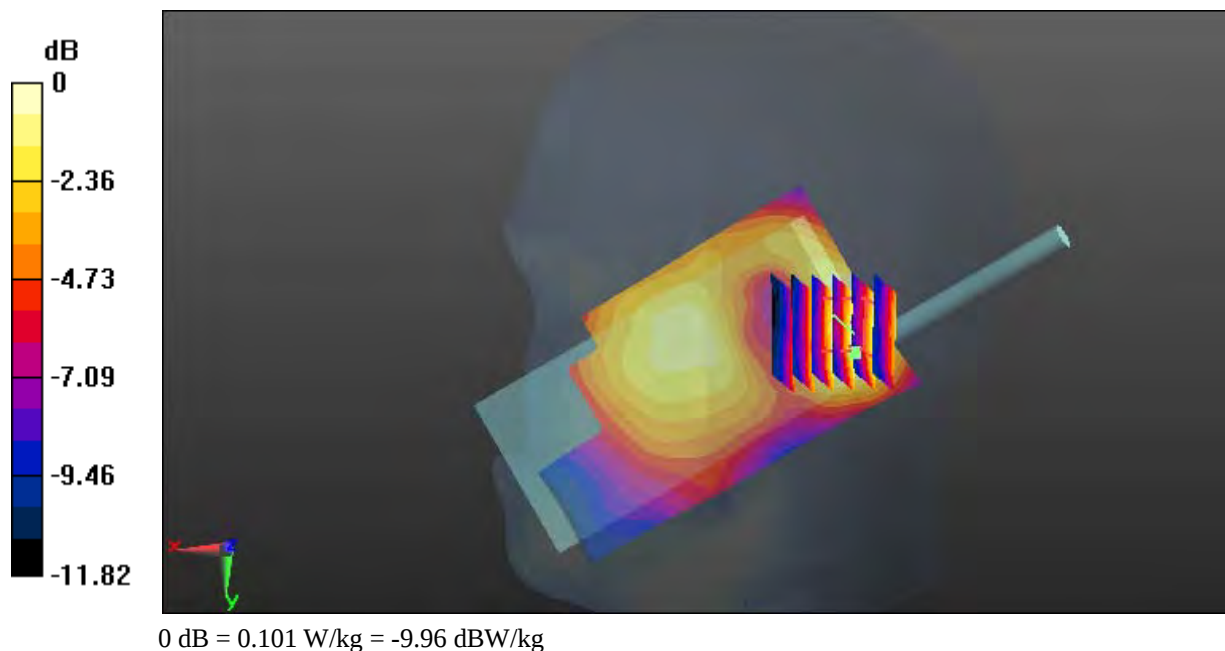

Test Plot 22#: GSM 1900_Face Up_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0758 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.951 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0990 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.0732 W/kg

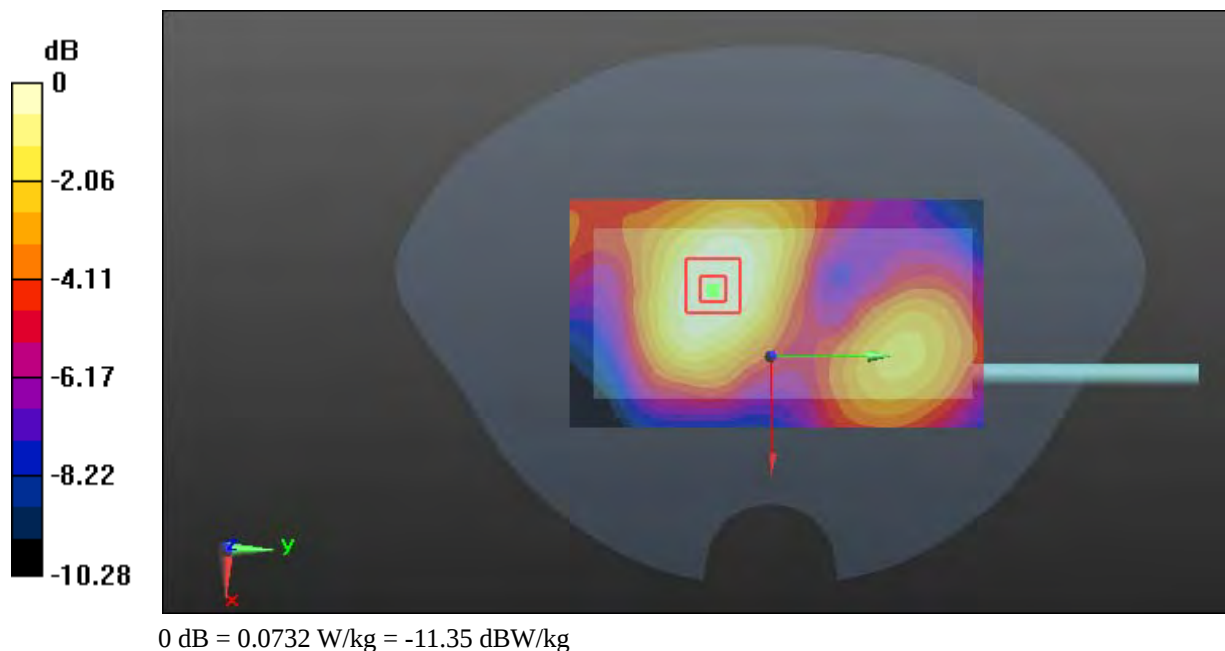

Test Plot 23#: GSM 1900_Body Worn Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.103 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.160 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.100 W/kg

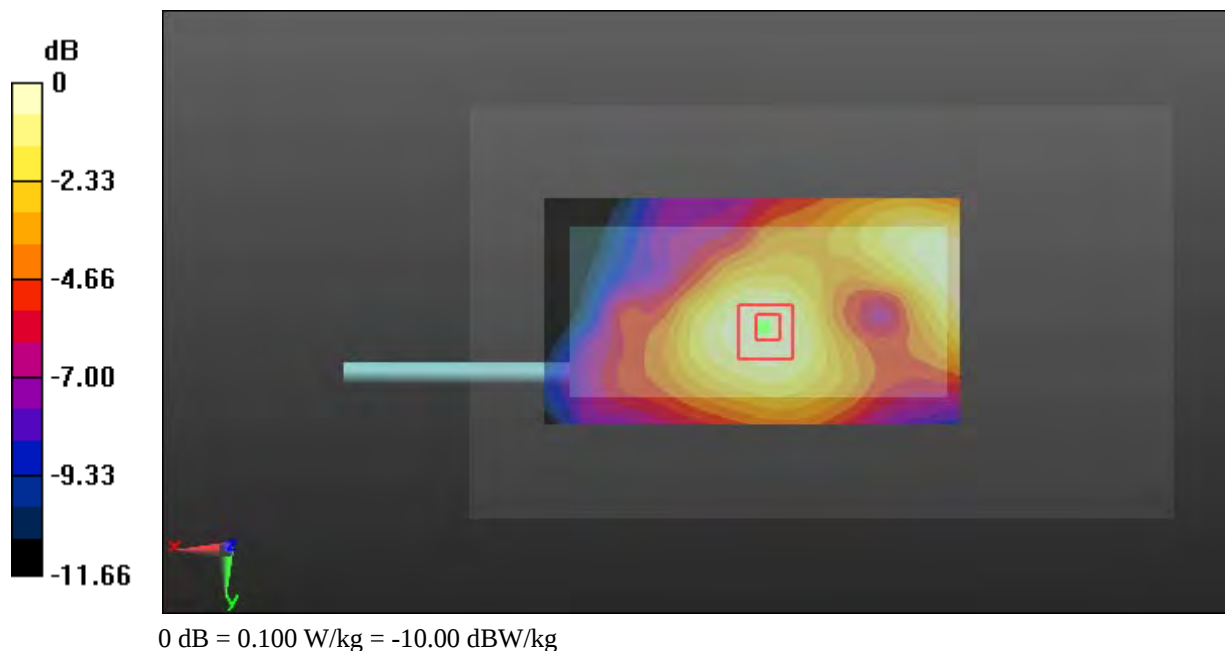

Test Plot 24#: GSM 1900_Body Front _Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.149 W/kg


Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.783 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.149 W/kg

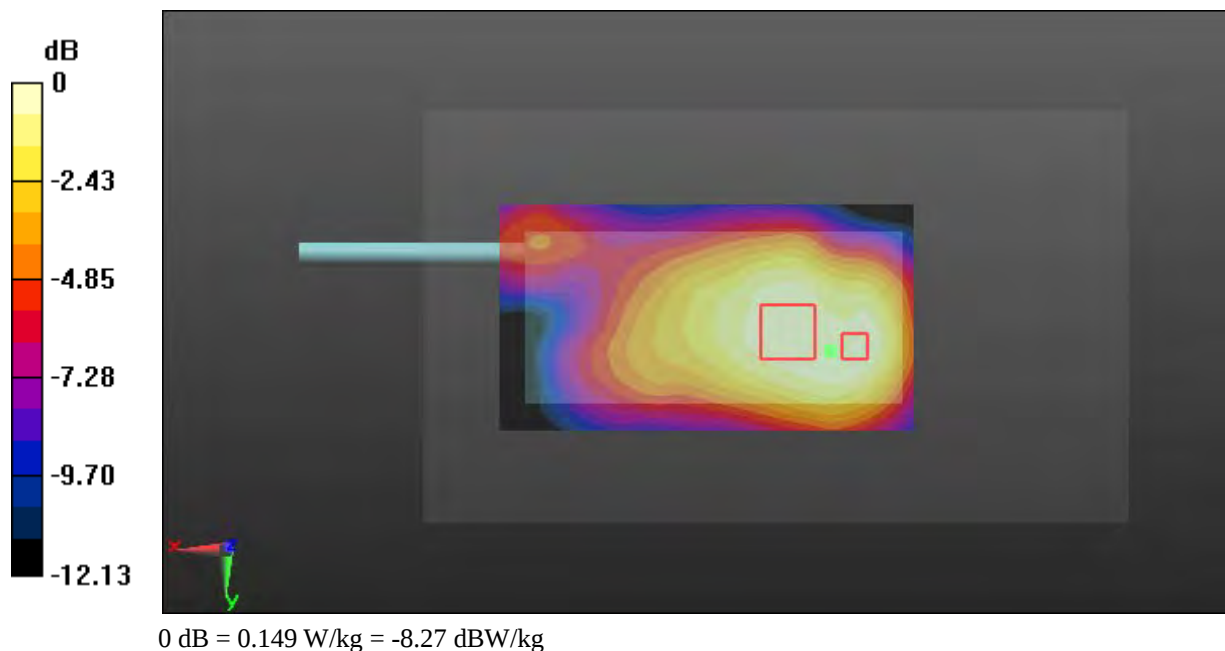

Test Plot 25#: GSM 1900_Body Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0984 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.635 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.0941 W/kg

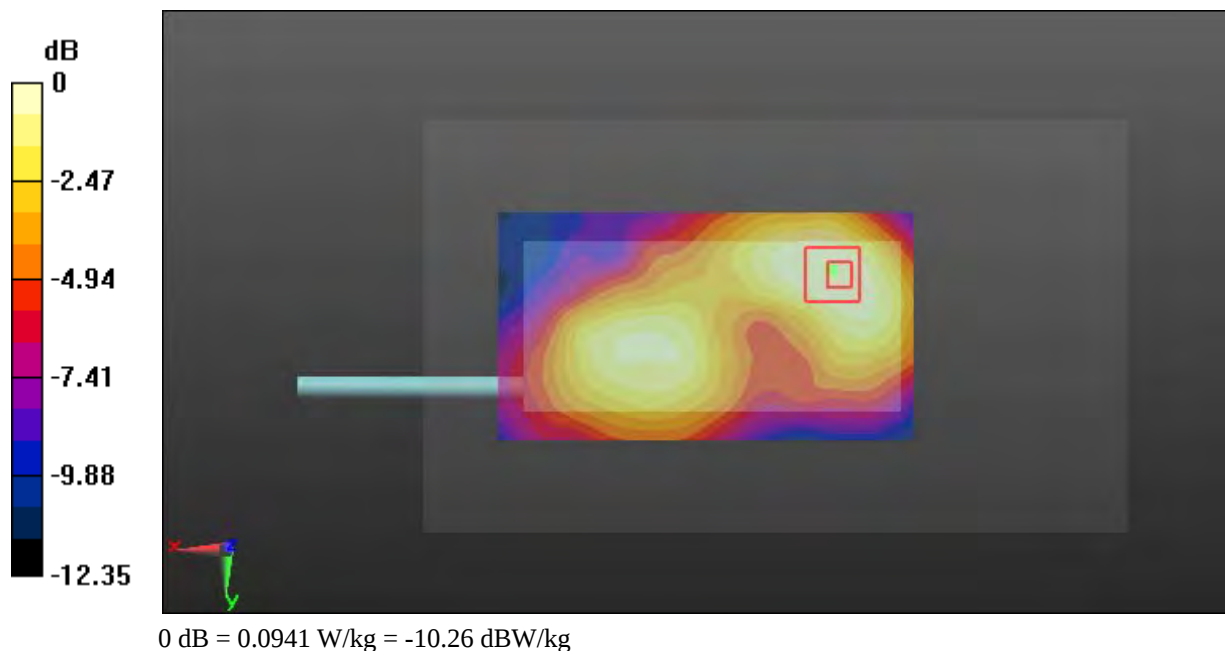

Test Plot 26#: GSM 1900_Body Left_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.182 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.15 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.184 W/kg

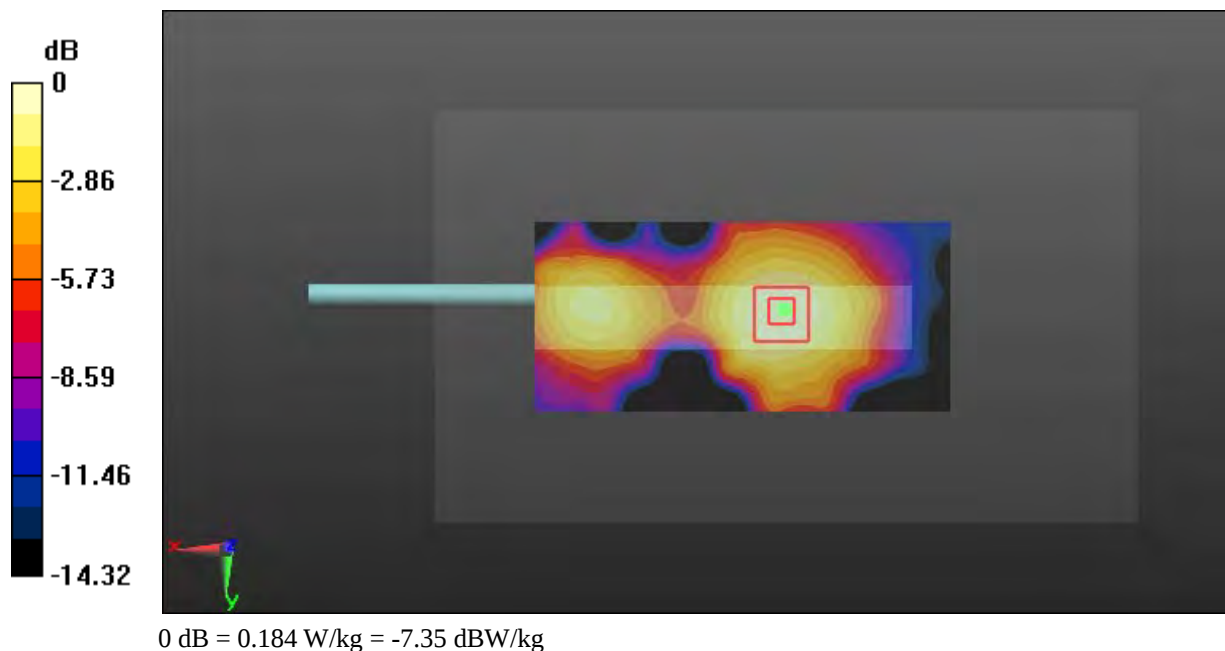

Test Plot 27#: GSM 1900_Body Right_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0796 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.662 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0768 W/kg

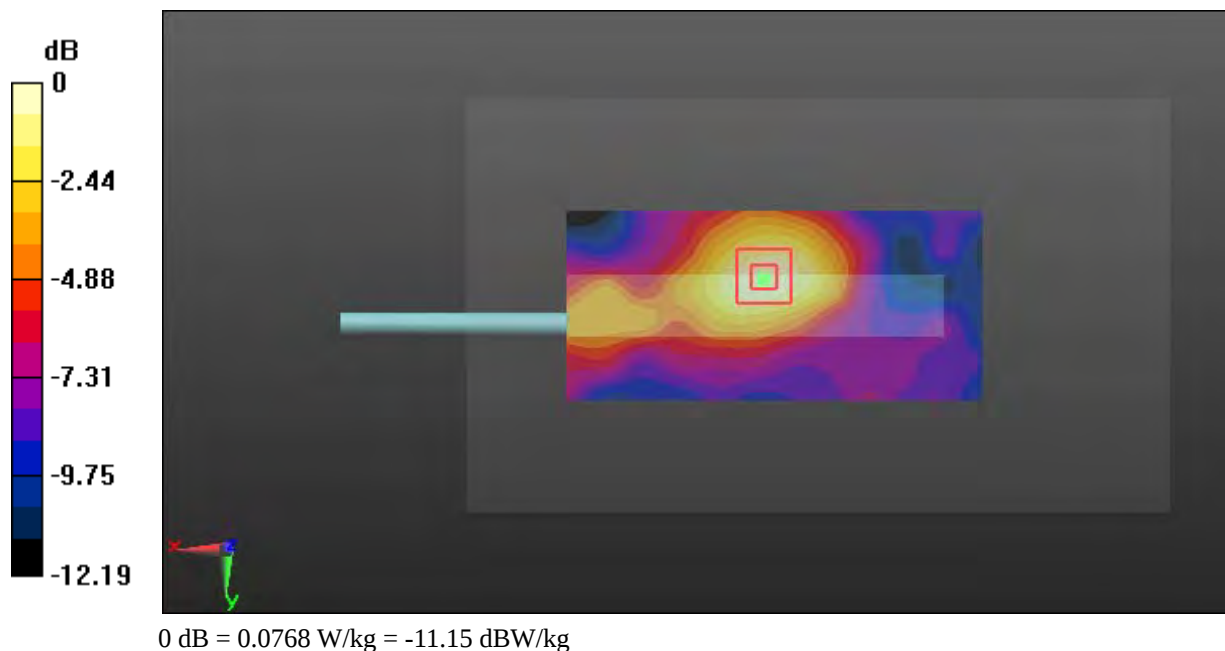

Test Plot 28#: GSM 1900_Body Bottom_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.454$ S/m; $\epsilon_r = 54.636$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.328 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.19 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.309 W/kg



Test Plot 29#: GSM 1900_Body Bottom_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.328 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.29 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.500 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.308 W/kg

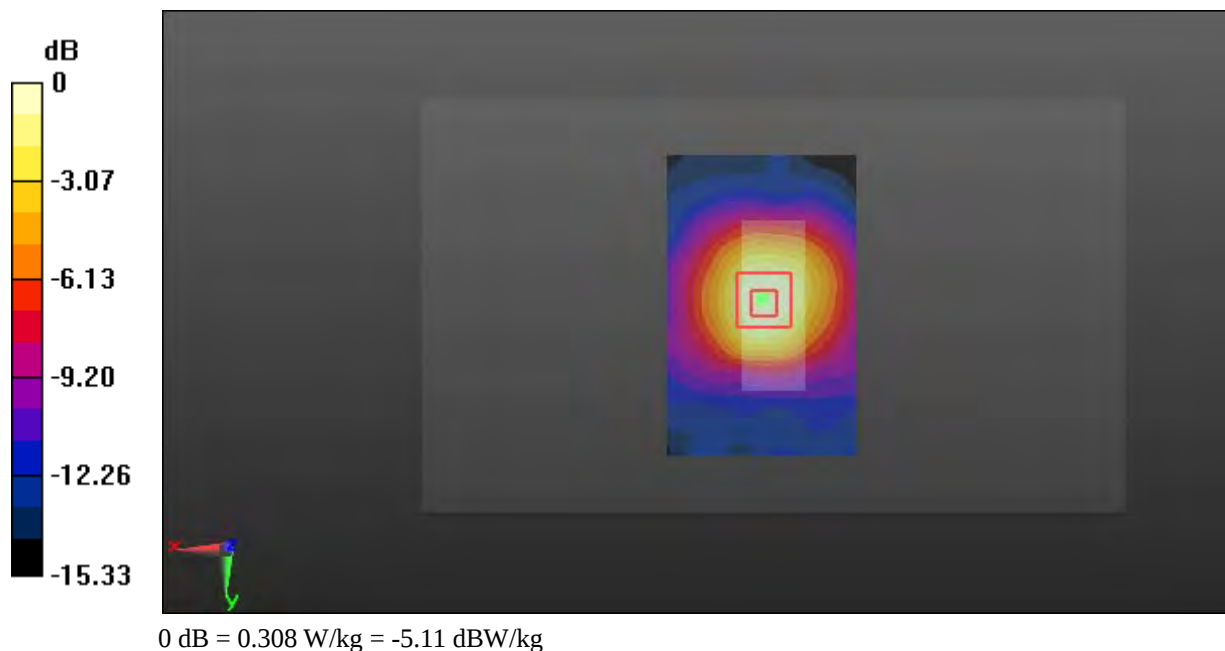

Test Plot 30#: GSM 1900_Body Bottom_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.529$ S/m; $\epsilon_r = 54.103$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.331 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.53 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.319 W/kg

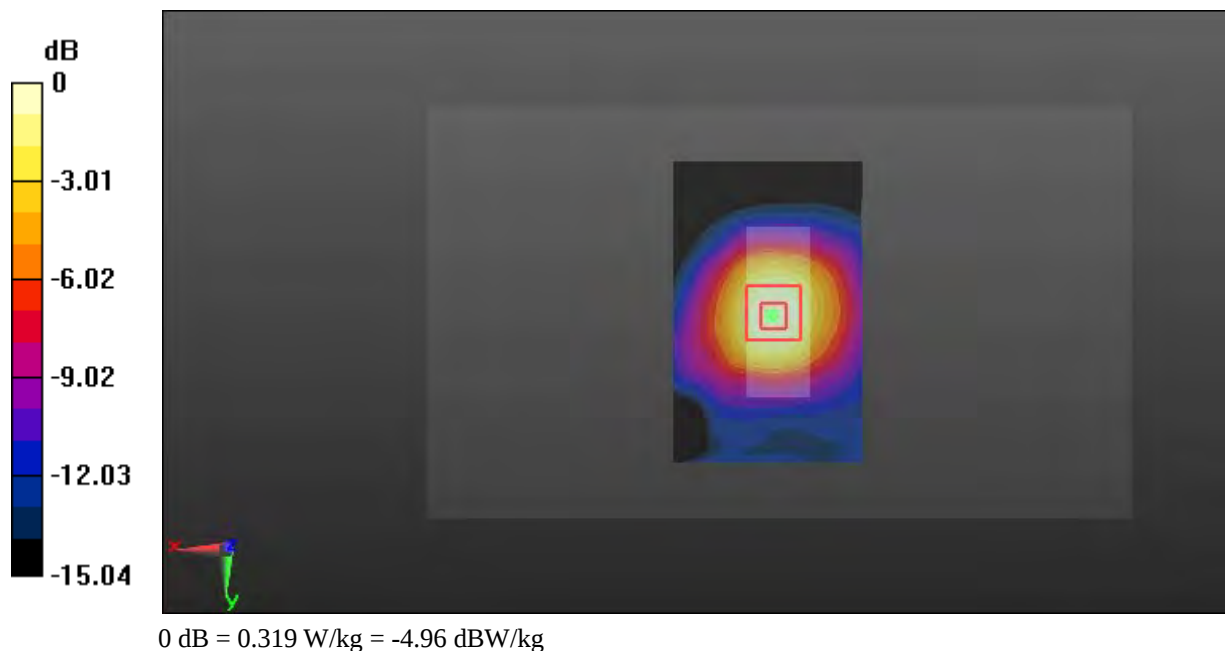

Test Plot 31#: WCDMA Band 2_Head Left Cheek_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 40.698$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.702 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.239 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.677 W/kg; SAR(10 g) = 0.426 W/kg

Maximum value of SAR (measured) = 0.721 W/kg

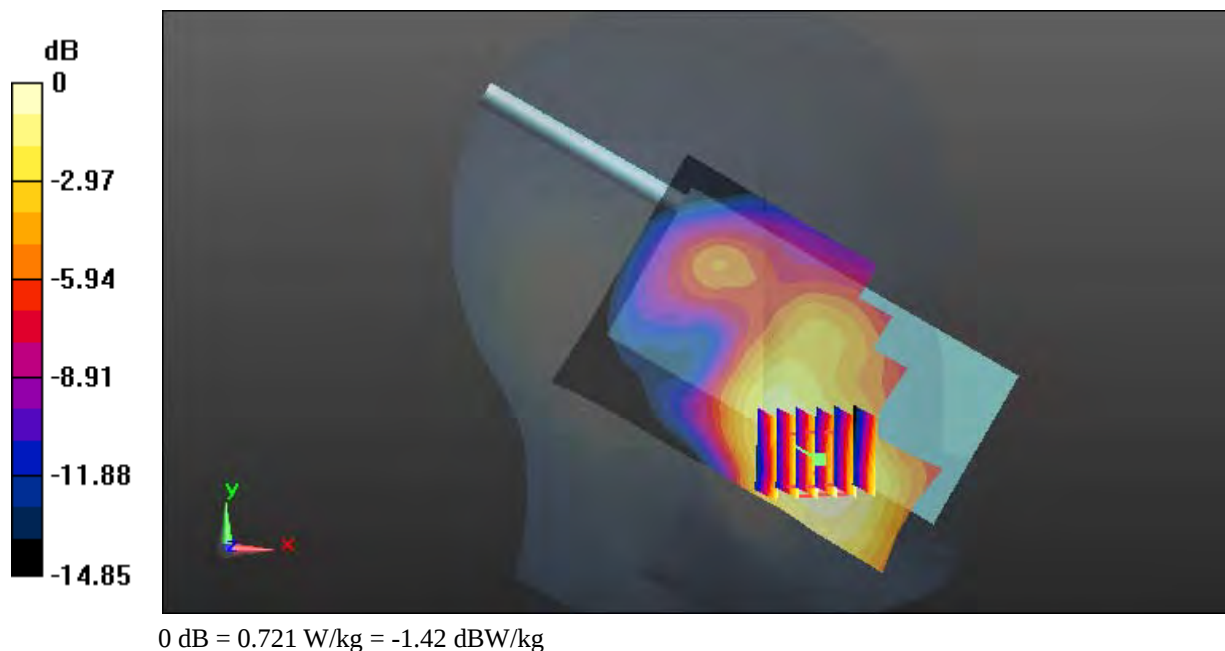

Test Plot 32#: WCDMA Band 2_Head Left Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.689 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.784 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.418 W/kg

Maximum value of SAR (measured) = 0.730 W/kg

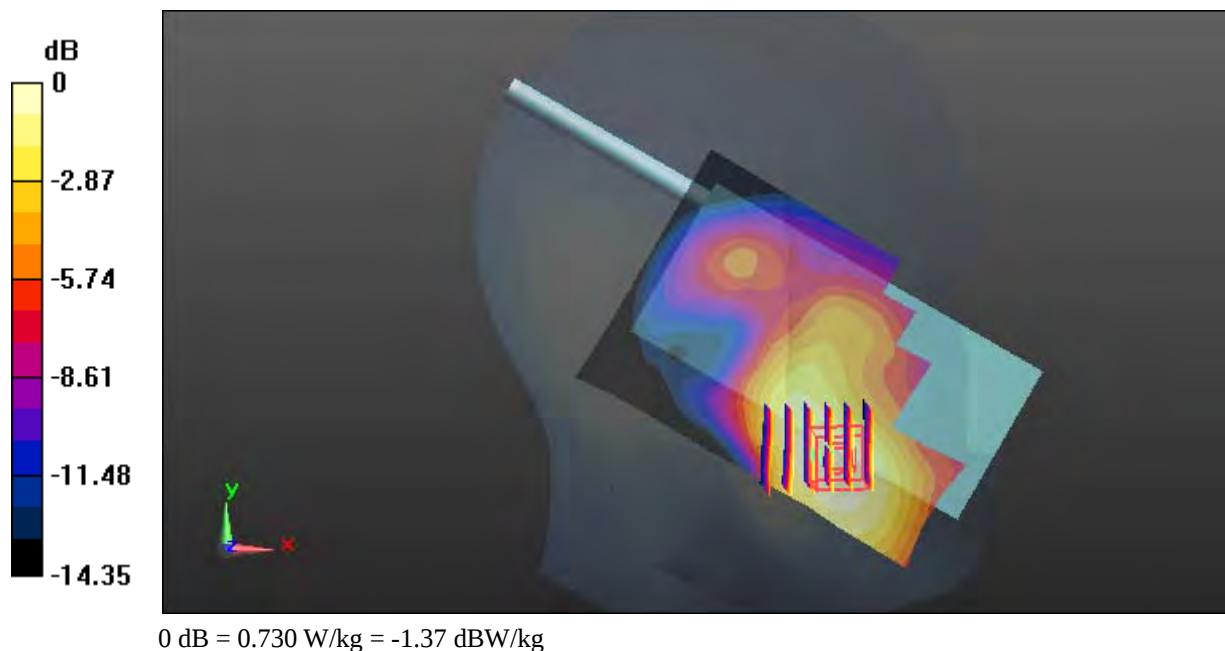

Test Plot 33#: WCDMA Band 2_Head Left Cheek_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.398$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.654 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.983 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.992 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.379 W/kg

Maximum value of SAR (measured) = 0.652 W/kg

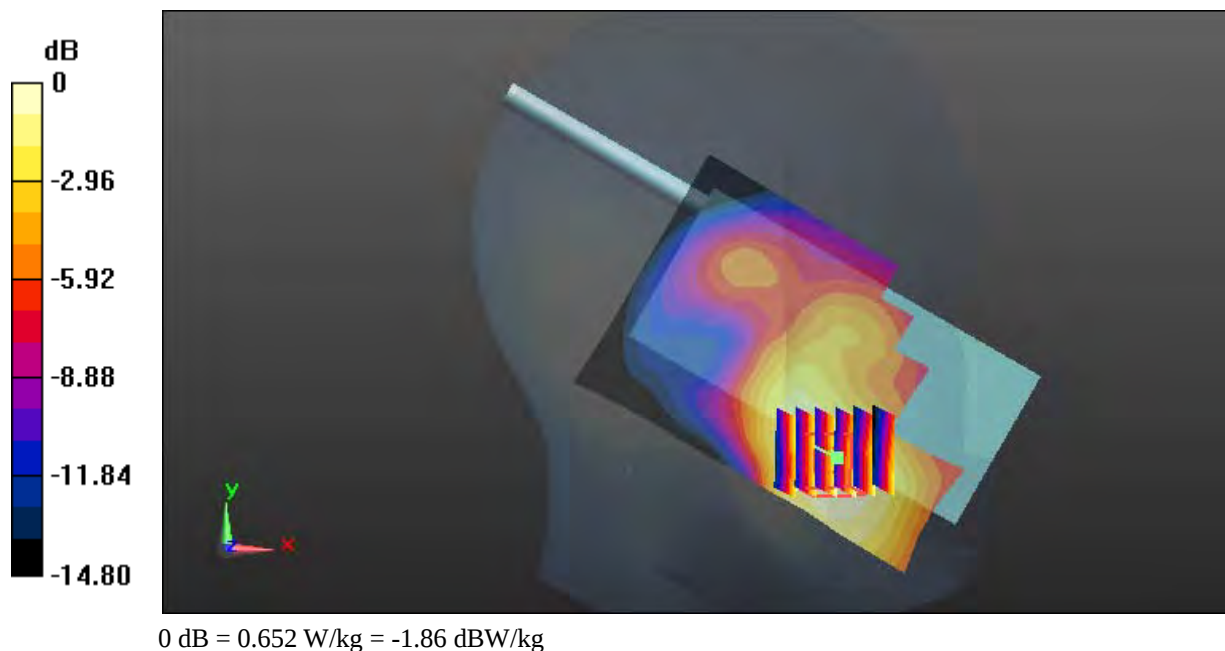

Test Plot 34#: WCDMA Band 2_Head Left Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.397 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.68 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.552 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.378 W/kg

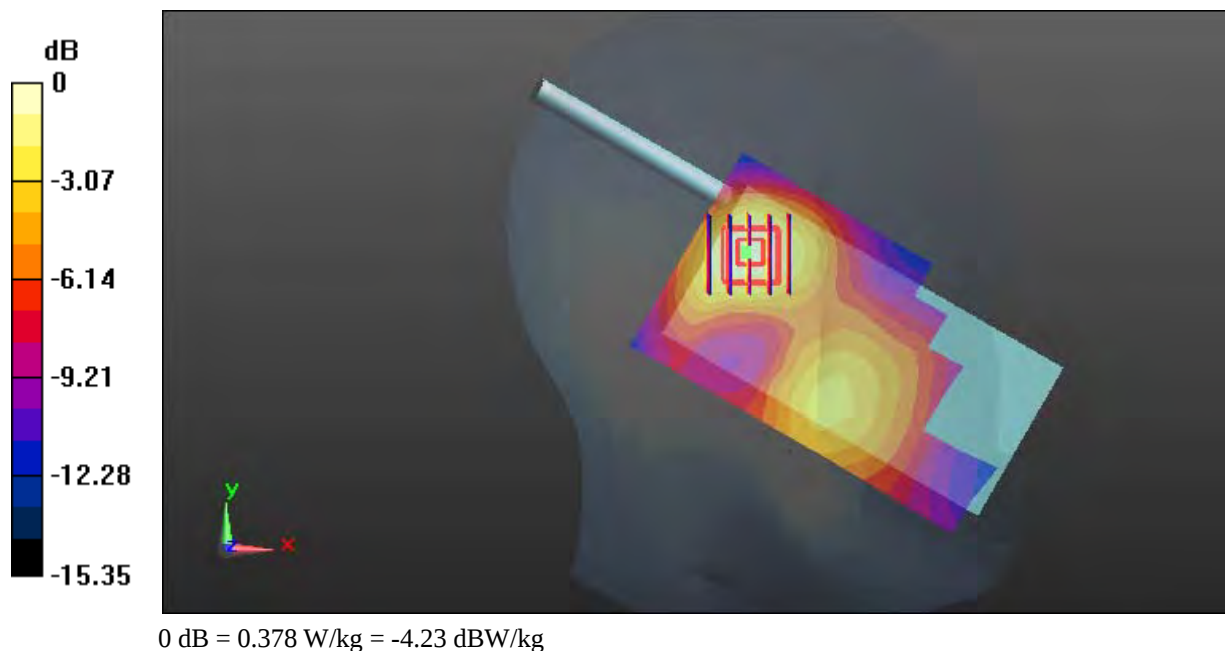

Test Plot 35#: WCDMA Band 2_Head Right Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.367 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.288 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.375 W/kg

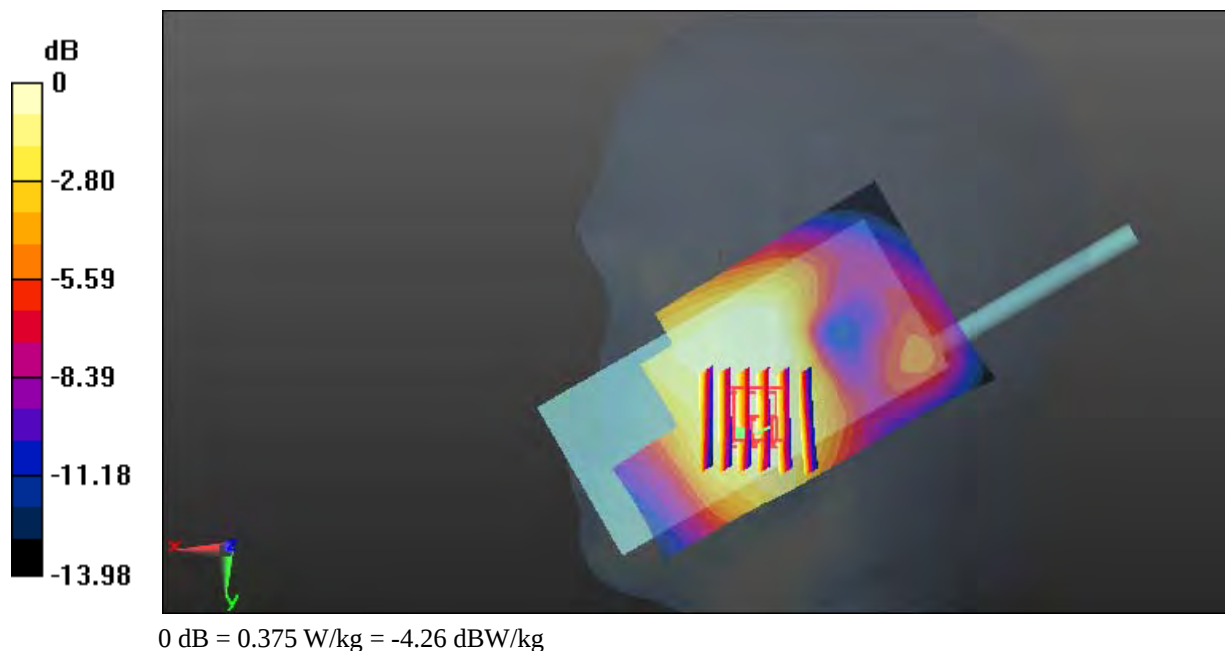

Test Plot 36#: WCDMA Band 2_Head Right Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.244 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.180 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.210 W/kg

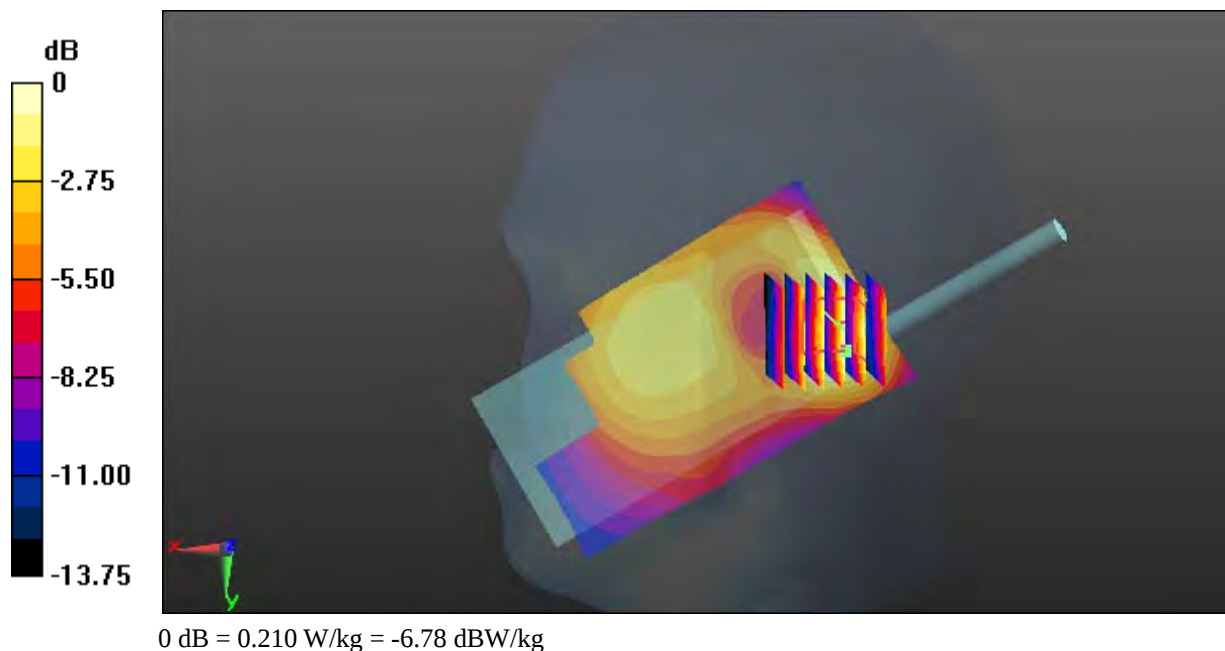

Test Plot 37#: WCDMA Band 2_Face Up_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.304 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.06 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 0.295 W/kg

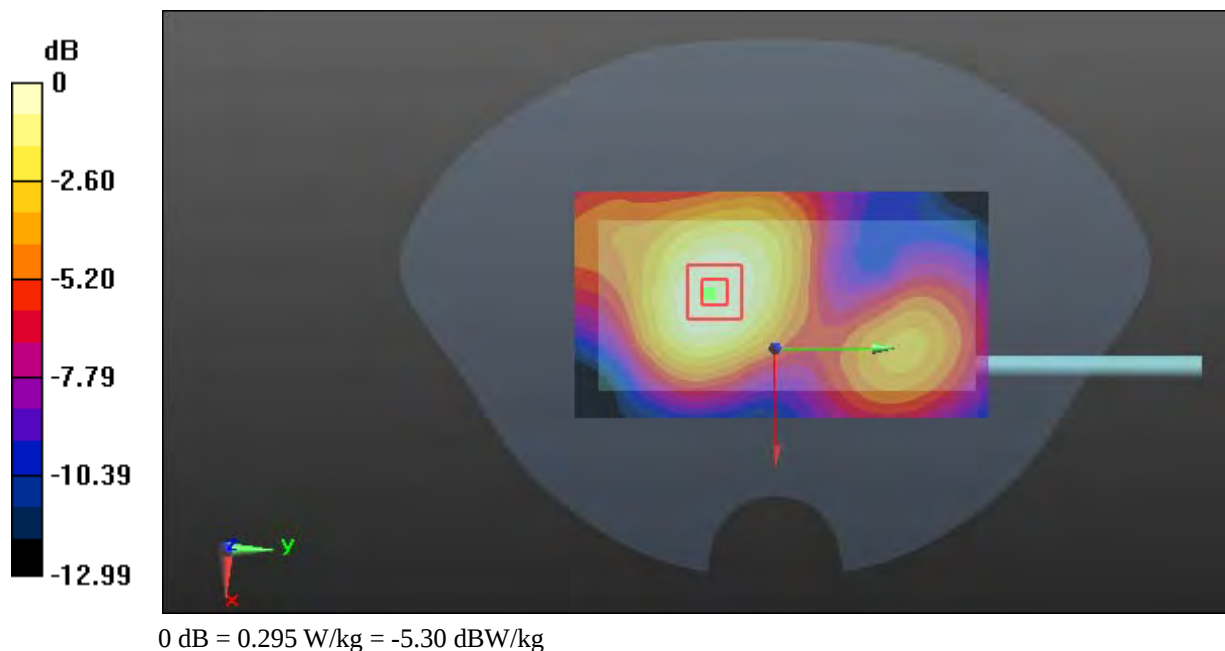

Test Plot 38#: WCDMA Band 2_Body Front _Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.442 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.74 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.442 W/kg

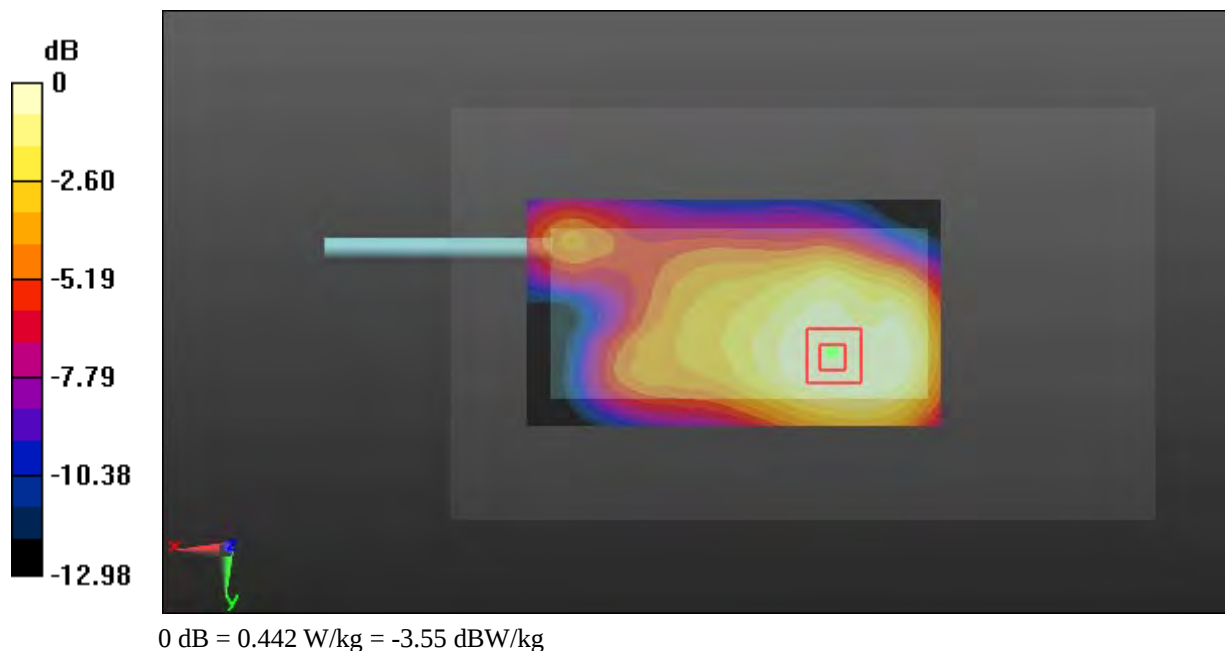

Test Plot 39#: WCDMA Band 2_Body Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.463 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.104 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.661 W/kg

SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 0.437 W/kg

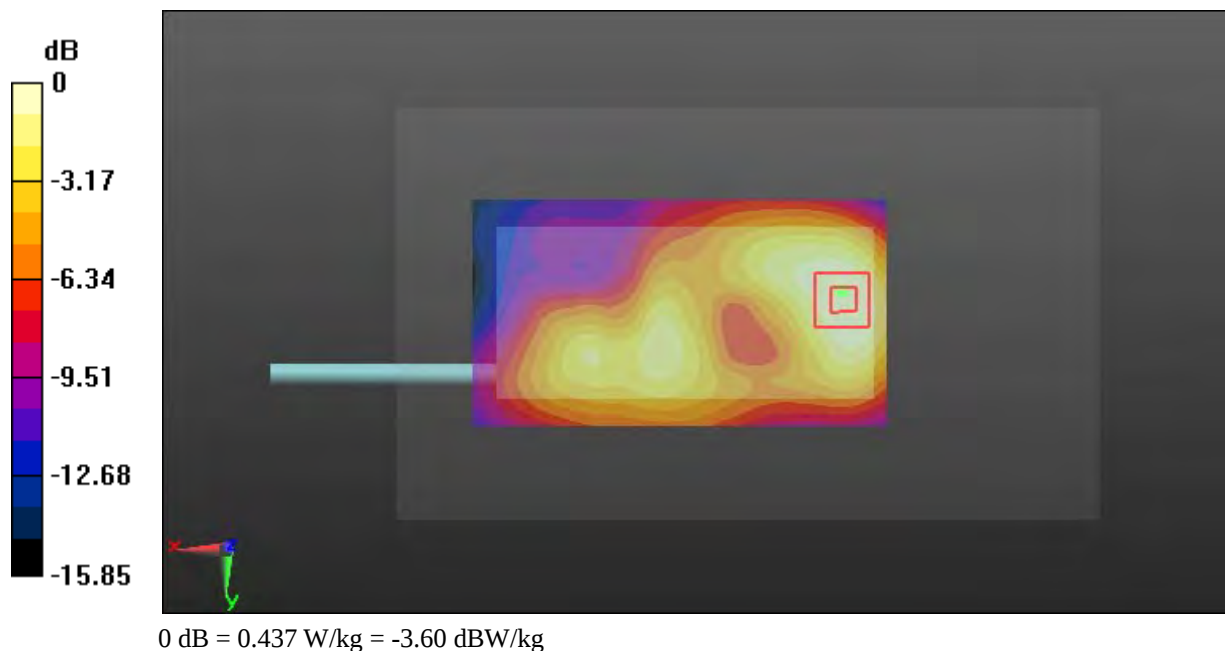

Test Plot 40#: WCDMA Band 2_Body Left_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.647 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.92 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.965 W/kg

SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.359 W/kg

Maximum value of SAR (measured) = 0.639 W/kg

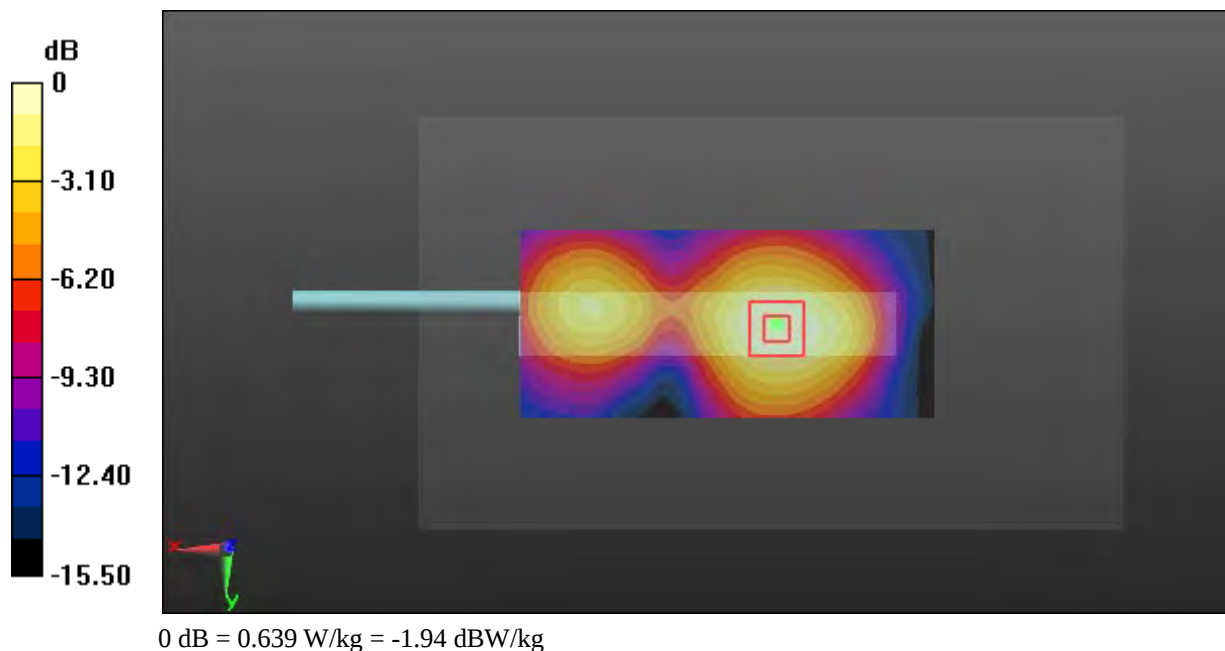

Test Plot 41#: WCDMA Band 2_Body Right_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.263 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.46 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.254 W/kg

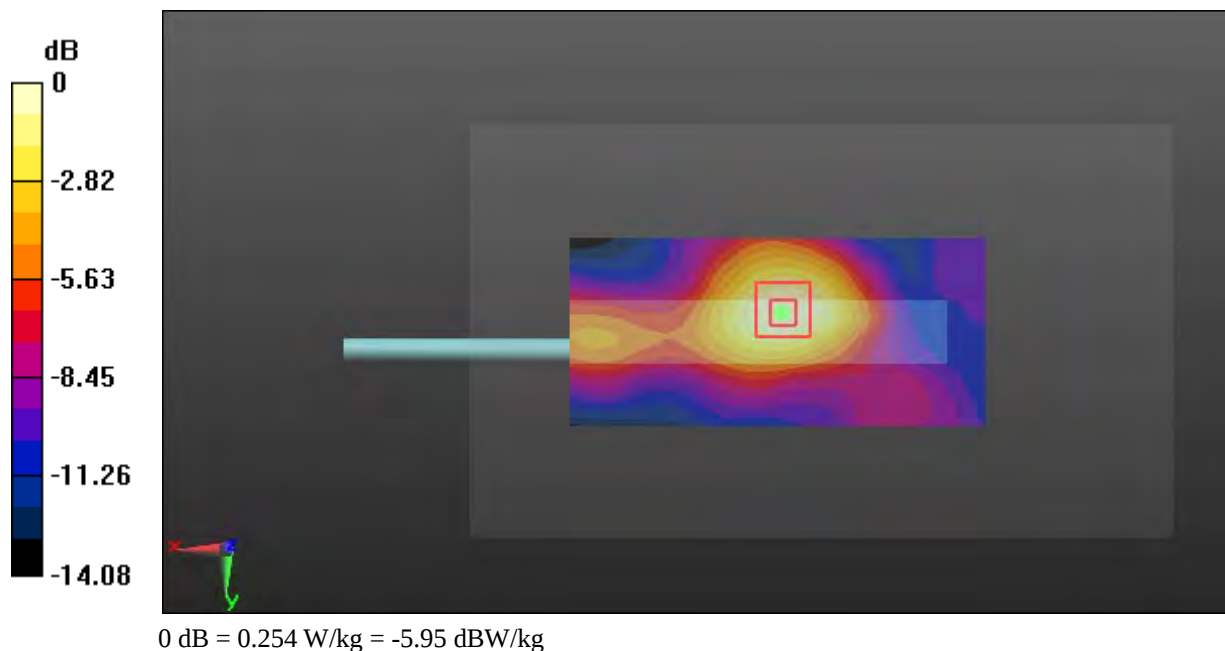

Test Plot 42#: WCDMA Band 2_Body Bottom_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 54.598$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.866 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.27 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.731 W/kg; SAR(10 g) = 0.398 W/kg

Maximum value of SAR (measured) = 0.797 W/kg

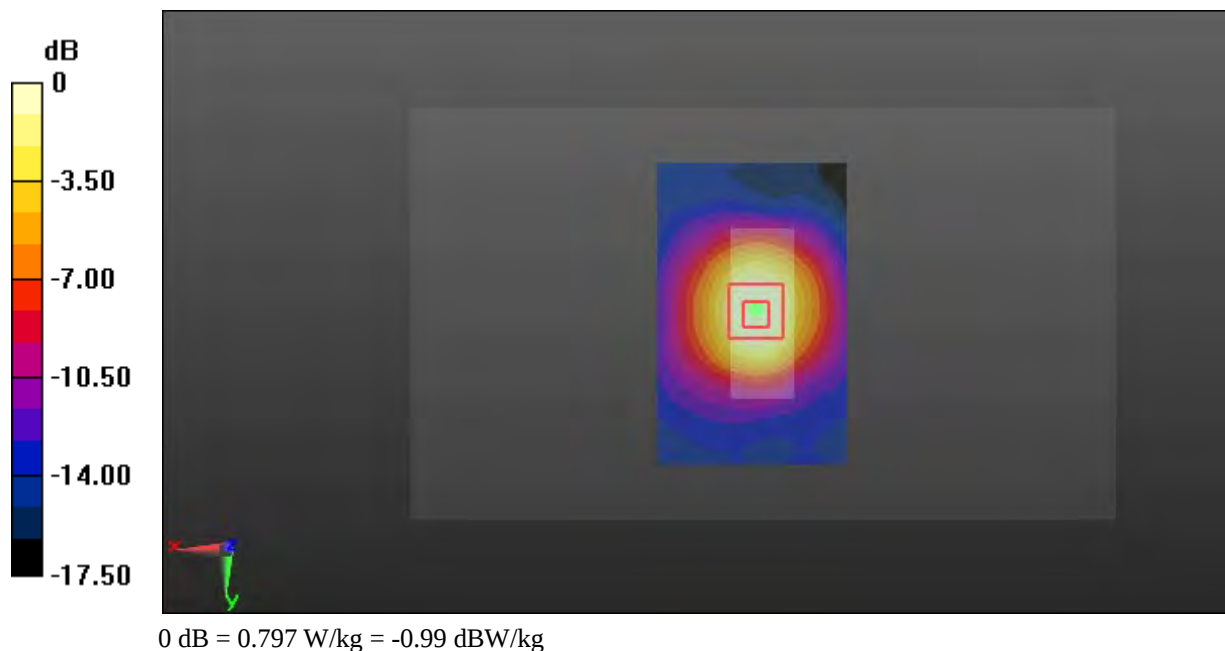

Test Plot 43#: WCDMA Band 2_Body Bottom_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.765 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.44 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.669 W/kg; SAR(10 g) = 0.370 W/kg

Maximum value of SAR (measured) = 0.715 W/kg

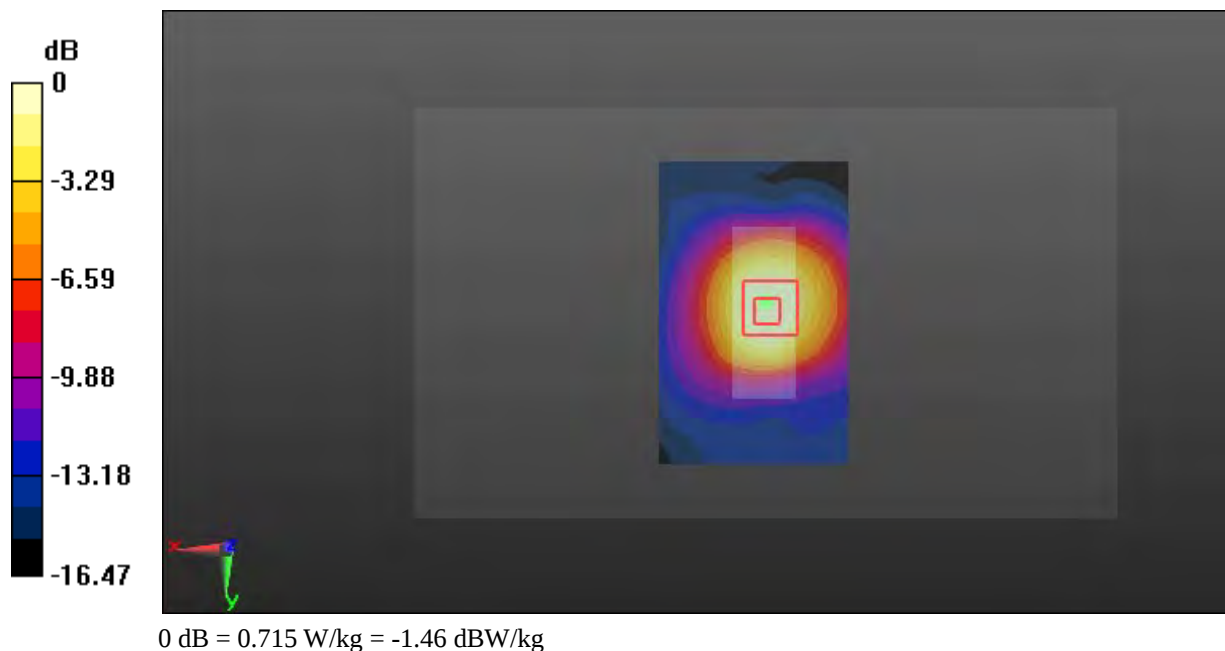

Test Plot 44#: WCDMA Band 2_Body Bottom_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 54.148$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.873 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.08 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.734 W/kg; SAR(10 g) = 0.405 W/kg

Maximum value of SAR (measured) = 0.778 W/kg

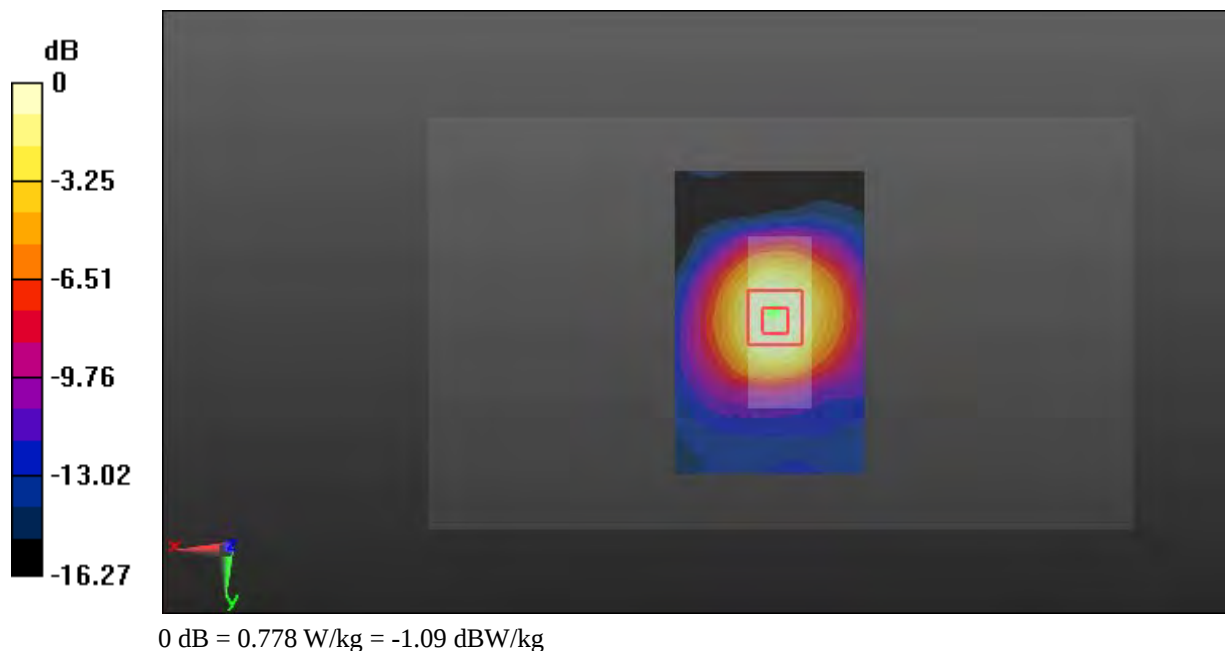

Test Plot 45#: WCDMA Band 4_Head Left Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 41.215$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.202 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.120 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.203 W/kg

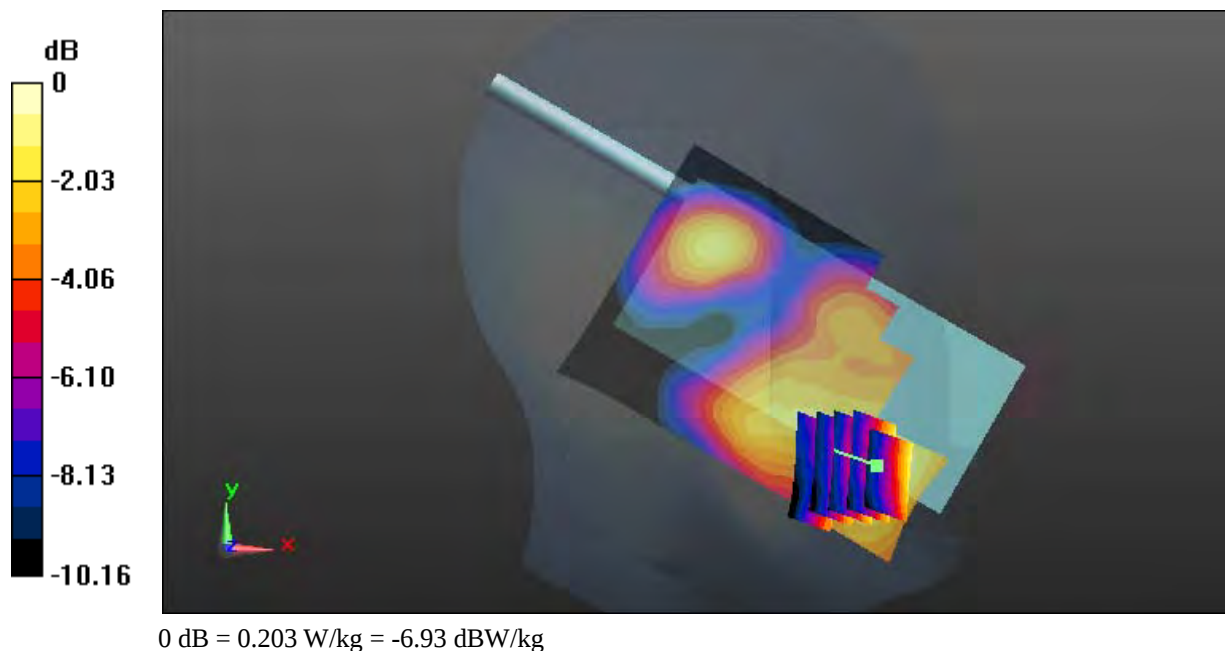

Test Plot 46#: WCDMA Band 4_Head Left Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 41.215$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.130 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.629 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.127 W/kg

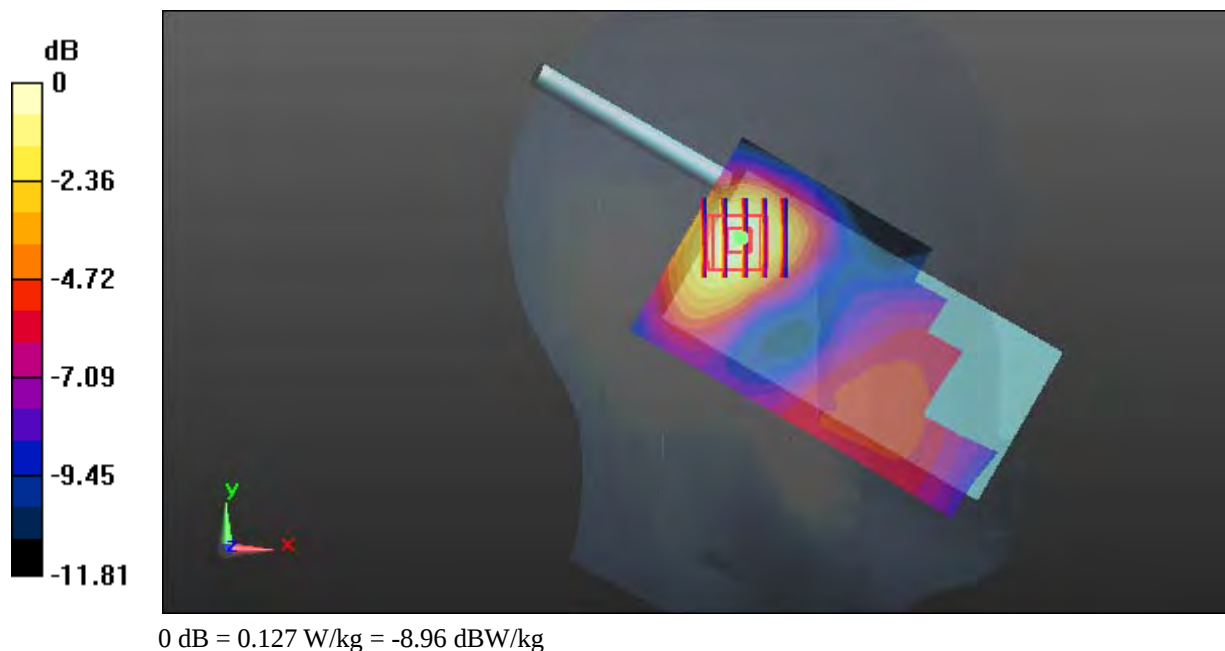

Test Plot 47#: WCDMA Band 4_Head Right Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 41.215$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.163 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.676 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

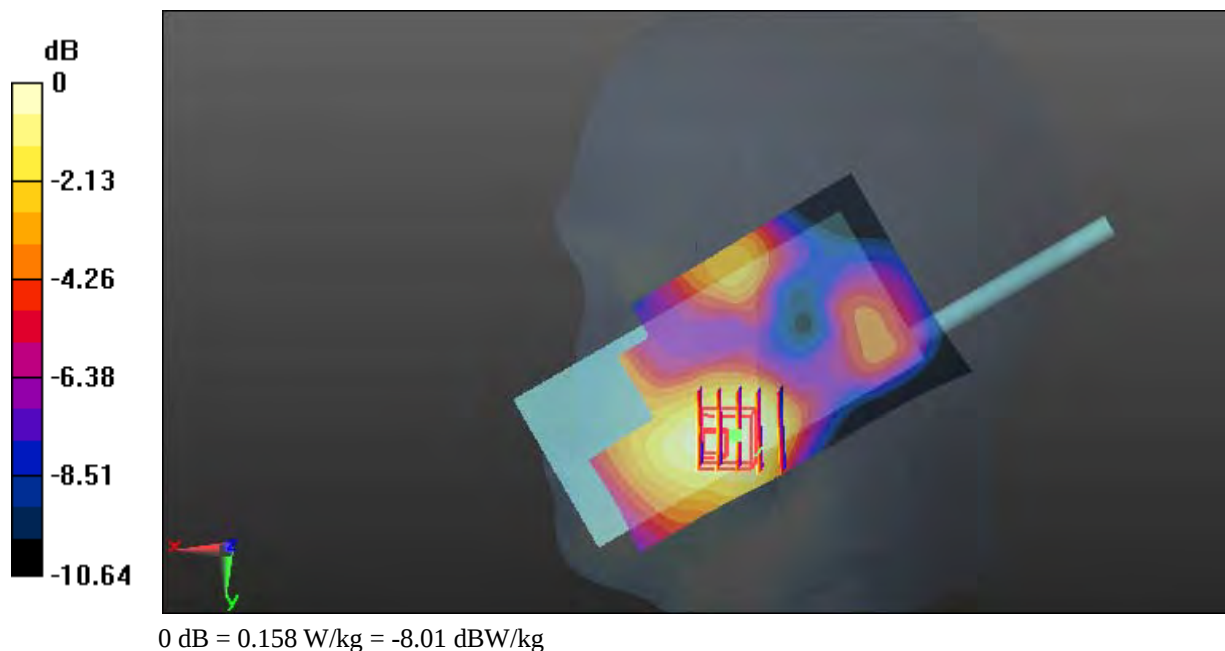

Test Plot 48#: WCDMA Band 4_Head Right Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 41.215$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0975 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.525 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.0821 W/kg

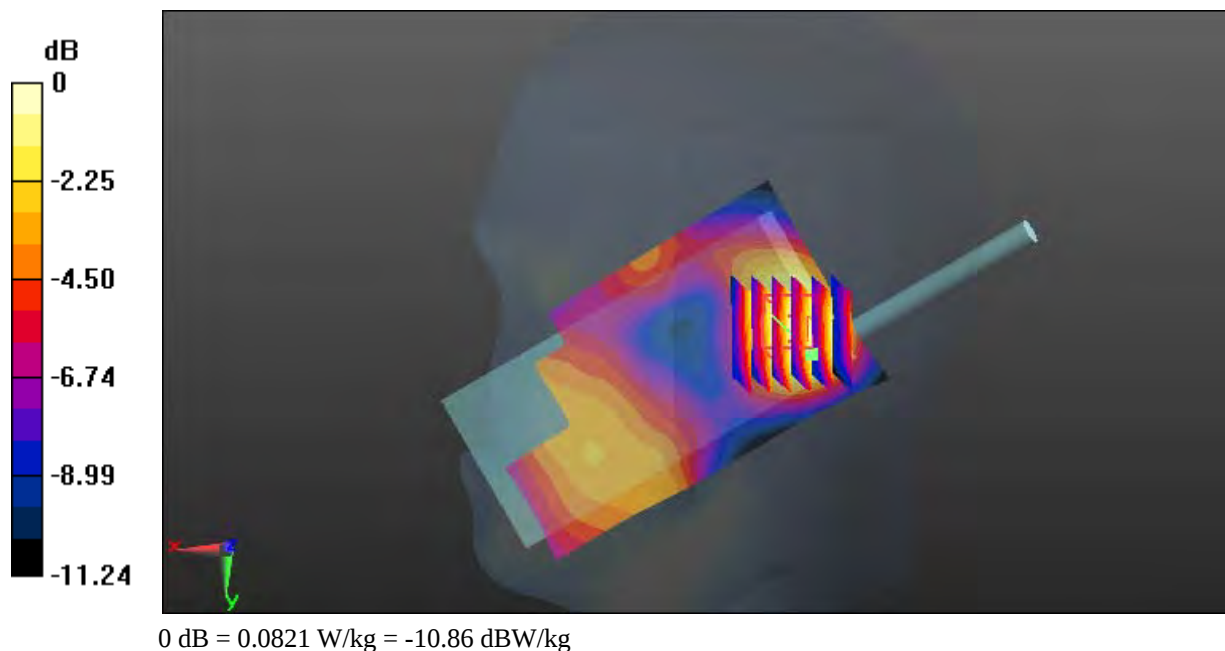

Test Plot 49#: WCDMA Band 4_Face Up_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.319$ S/m; $\epsilon_r = 41.364$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.267 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.093 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.358 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.271 W/kg

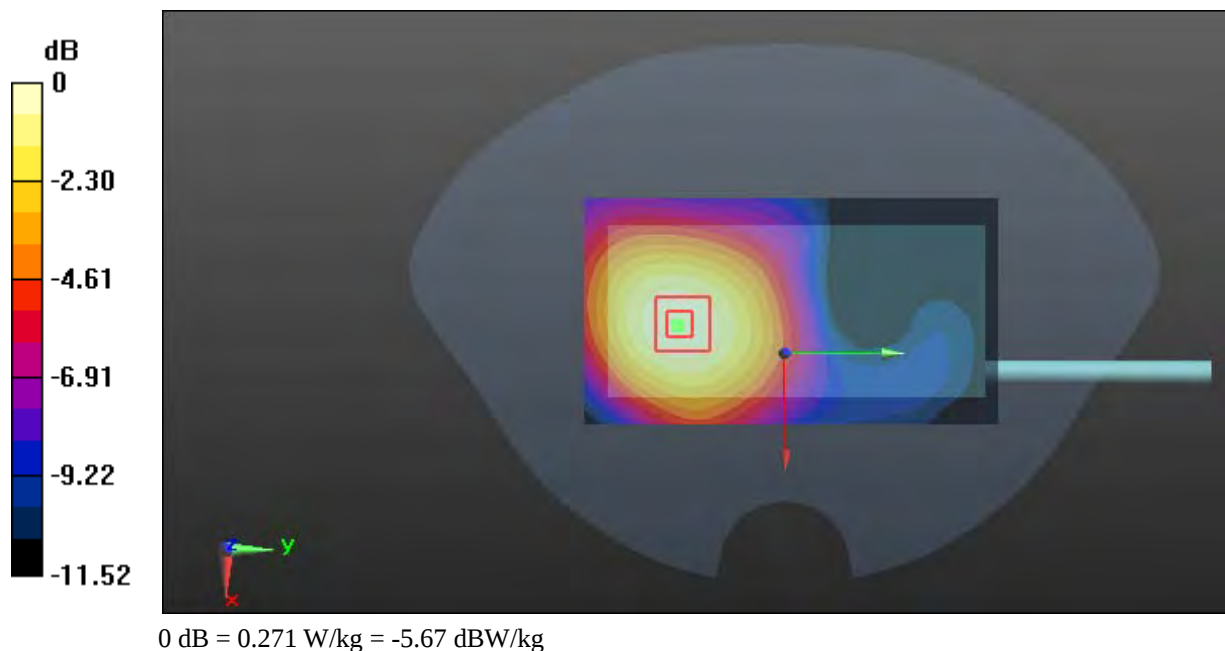

Test Plot 50#: WCDMA Band 4_Face Up_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.811$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.227 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.756 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.232 W/kg

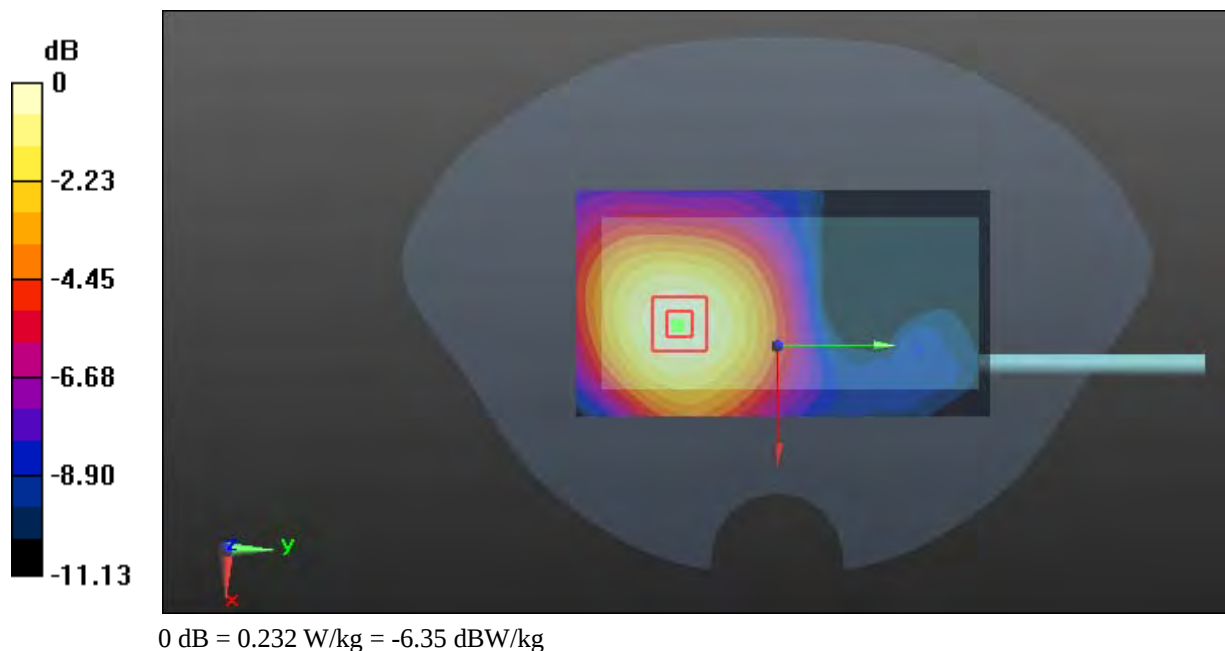

Test Plot 51#: WCDMA Band 4_Face Up_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 41.021$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.280 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.412 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.283 W/kg

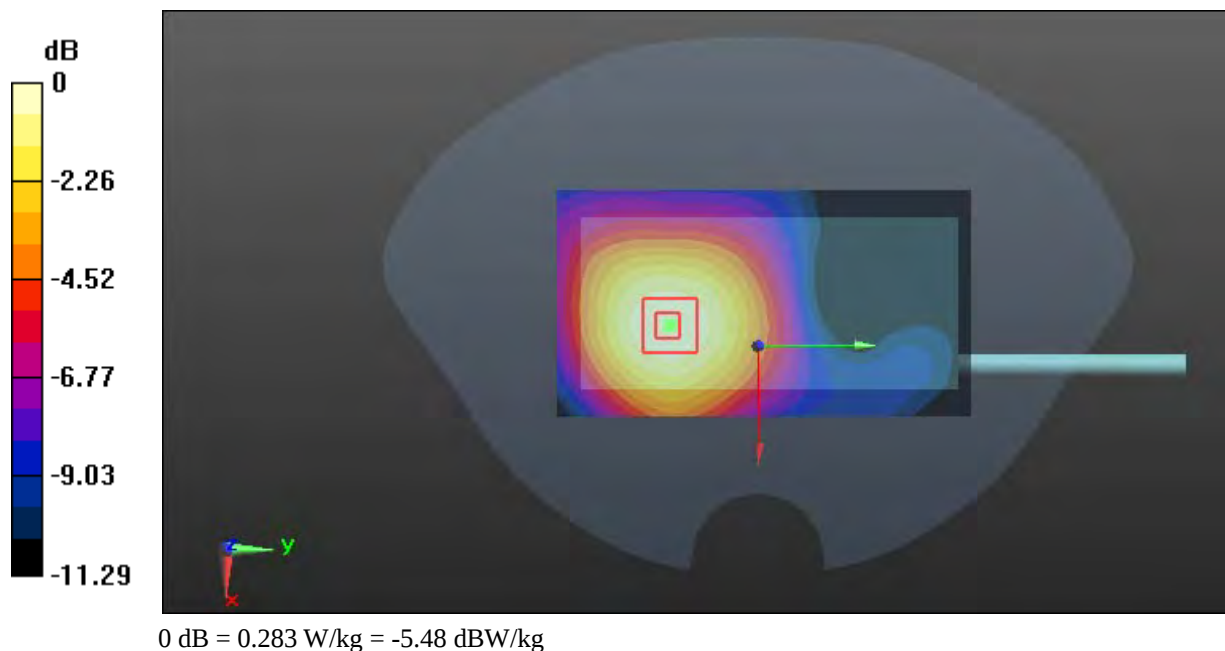

Test Plot 52#: WCDMA Band 4_Body Front _Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.811$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.607 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.97 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.883 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 0.607 W/kg

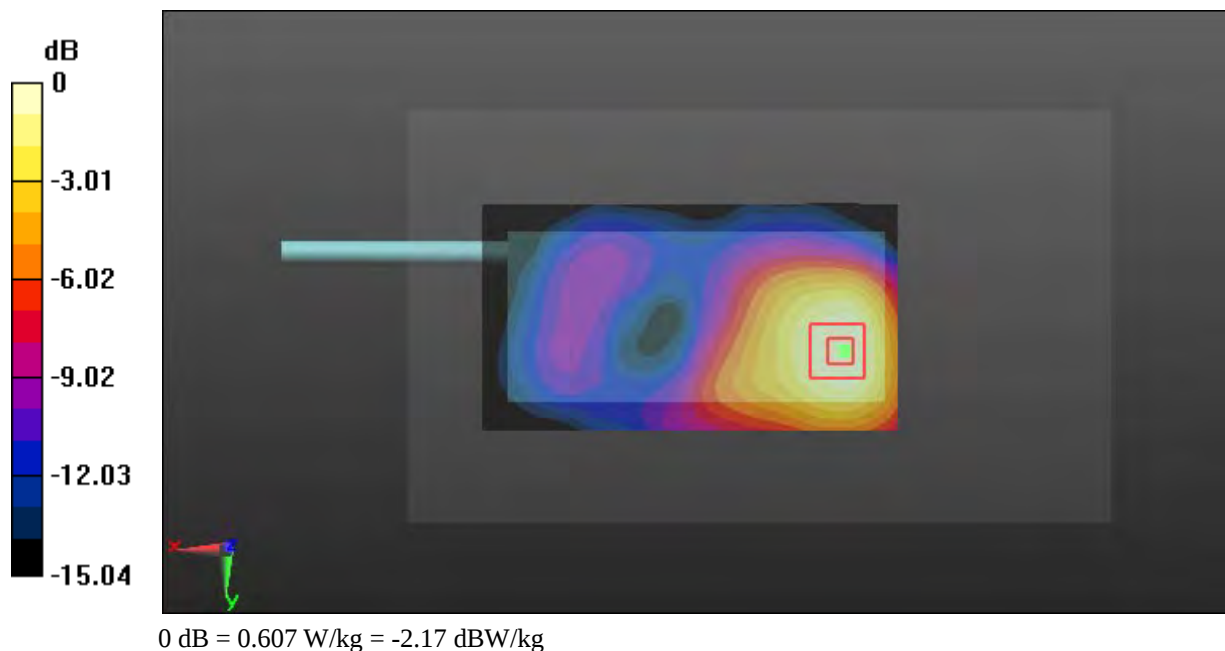

Test Plot 53#: WCDMA Band 4_Body Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.811$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.384 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.92 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.515 W/kg

SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.374 W/kg

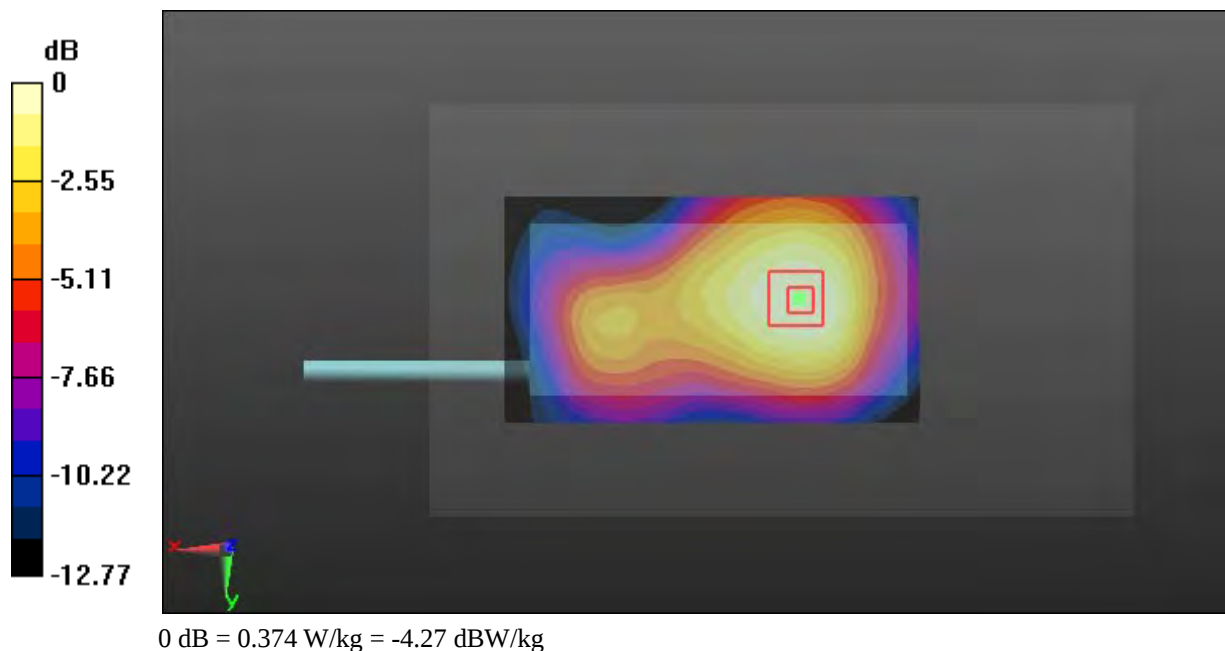

Test Plot 54#: WCDMA Band 4_Body Left_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.811$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.389 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.47 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.555 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 0.387 W/kg

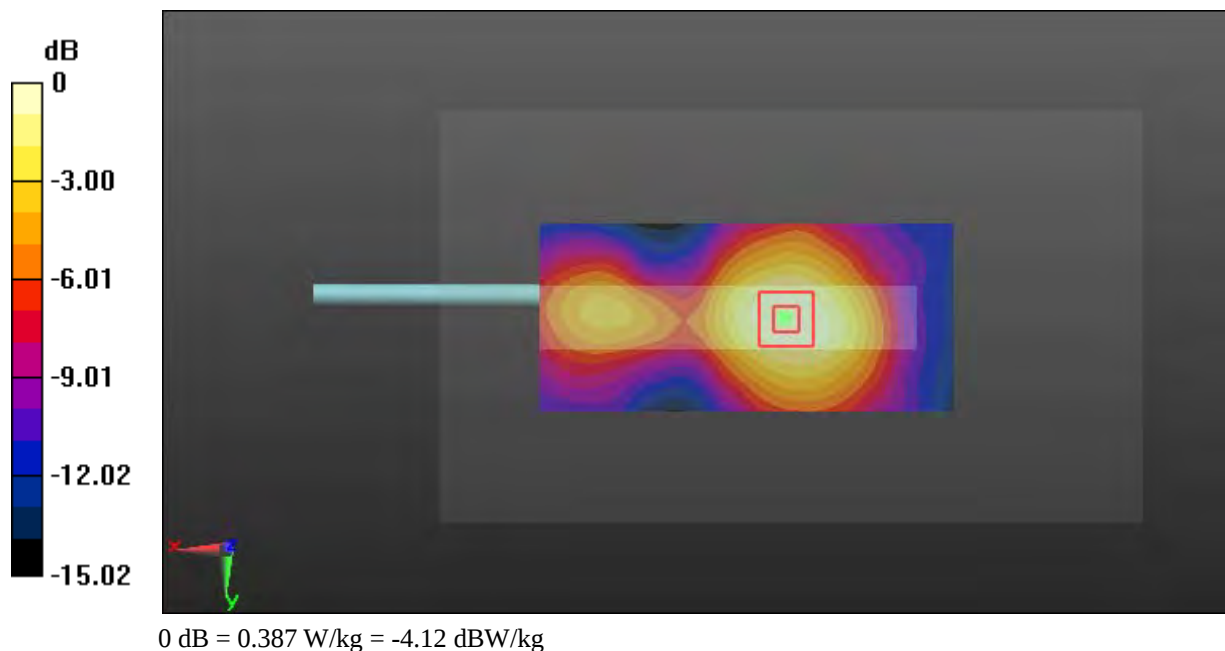

Test Plot 55#: WCDMA Band 4_Body Right_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.811$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.121 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.354 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.116 W/kg

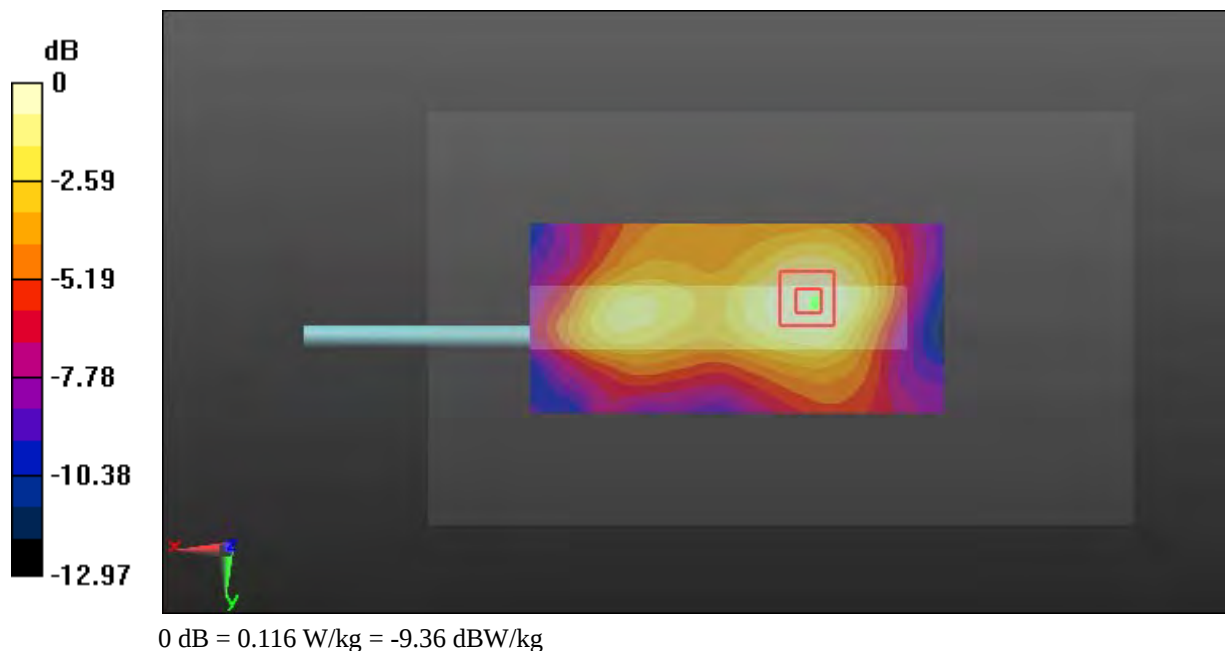

Test Plot 56#: WCDMA Band 4_Body Bottom_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.496$ S/m; $\epsilon_r = 53.042$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.666 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.34 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 0.650 W/kg

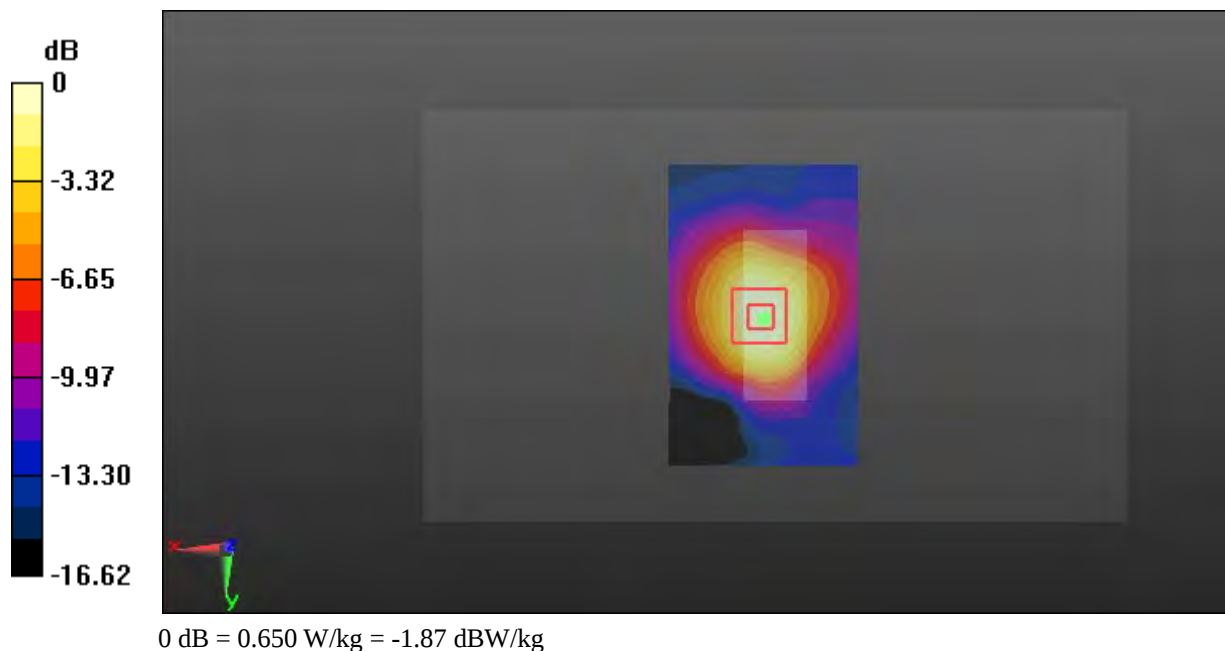

Test Plot 57#: WCDMA Band 4_Body Bottom_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.811$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.764 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.84 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.364 W/kg

Maximum value of SAR (measured) = 0.703 W/kg



Test Plot 58#: WCDMA Band 4_Body Bottom_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.547$ S/m; $\epsilon_r = 52.608$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.600 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.71 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.898 W/kg

SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.290 W/kg

Maximum value of SAR (measured) = 0.561 W/kg

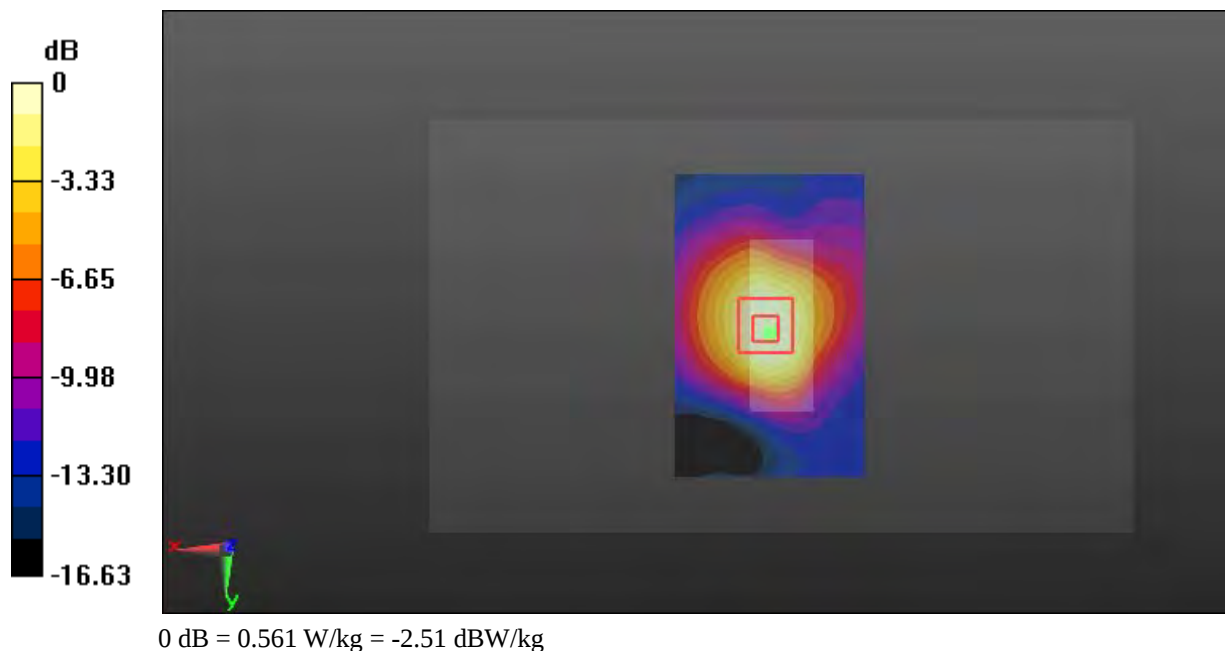

Test Plot 59#: WCDMA Band 5_Head Left Cheek_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 42.408$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.274 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.070 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.278 W/kg

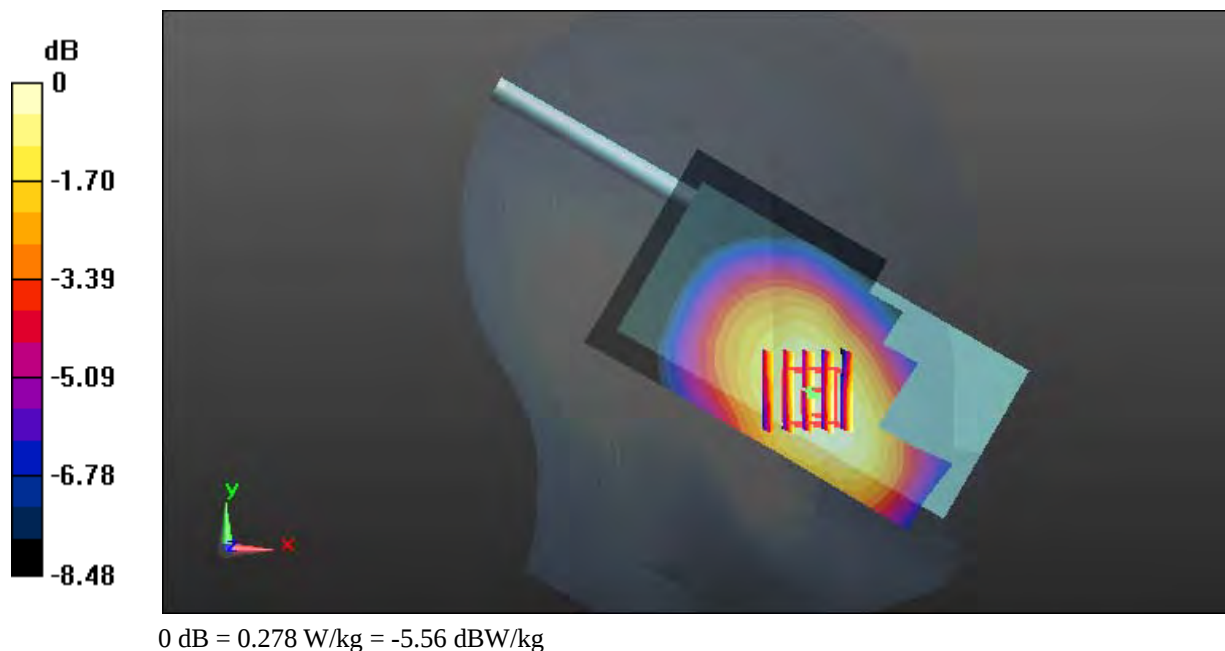

Test Plot 60#: WCDMA Band 5_Head Left Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.316$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.292 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.231 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.220 W/kg

Maximum value of SAR (measured) = 0.297 W/kg

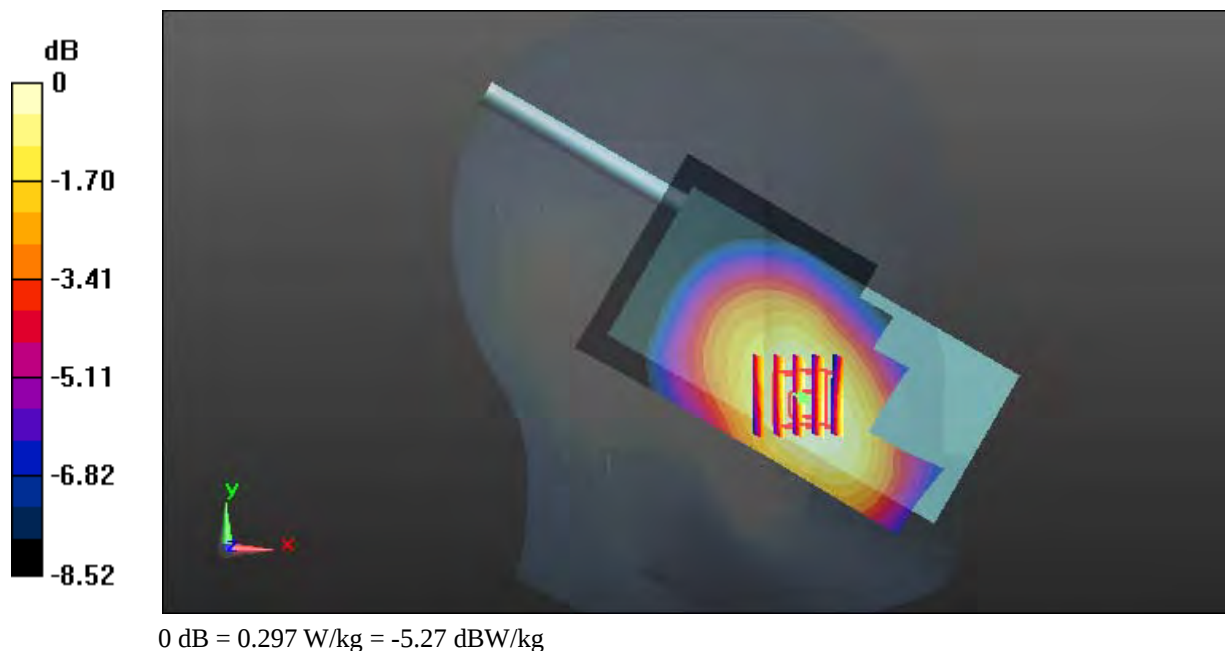

Test Plot 61#: WCDMA Band 5_Head Left Cheek_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.306 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.422 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 0.308 W/kg

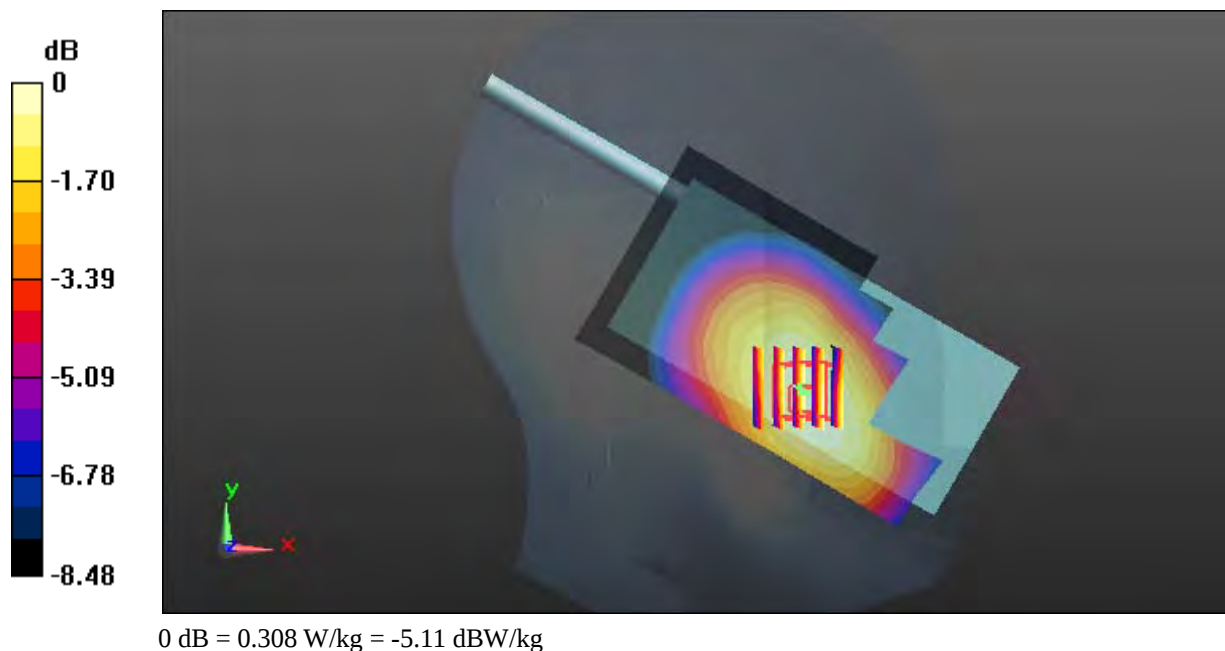

Test Plot 62#: WCDMA Band 5_Head Left Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.316$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.171 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.91 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.200 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

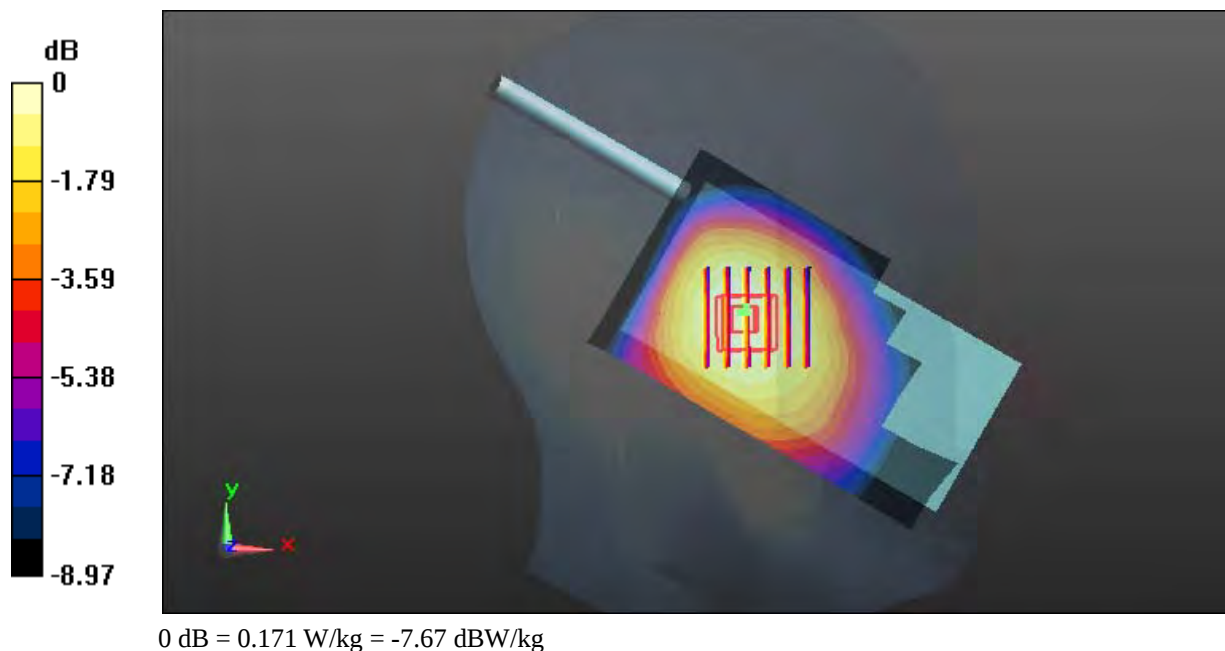

Test Plot 63#: WCDMA Band 5_Head Right Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.316$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.272 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.559 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.263 W/kg

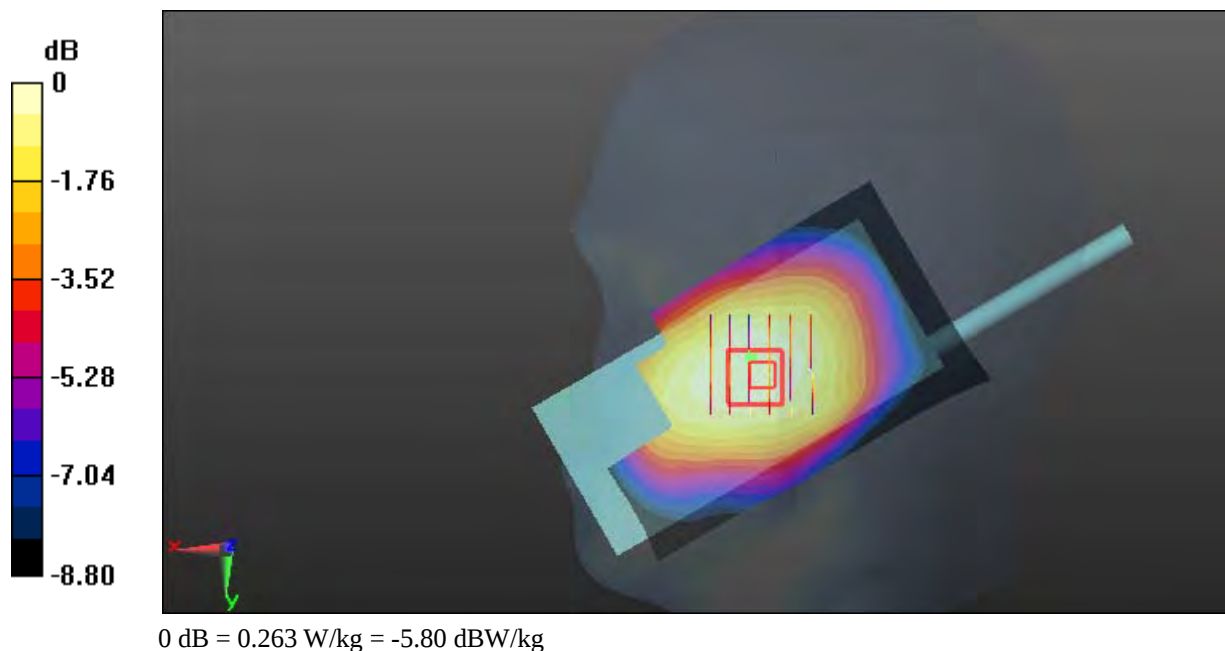

Test Plot 64#: WCDMA Band 5_Head Right Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.316$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.139 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.52 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.137 W/kg

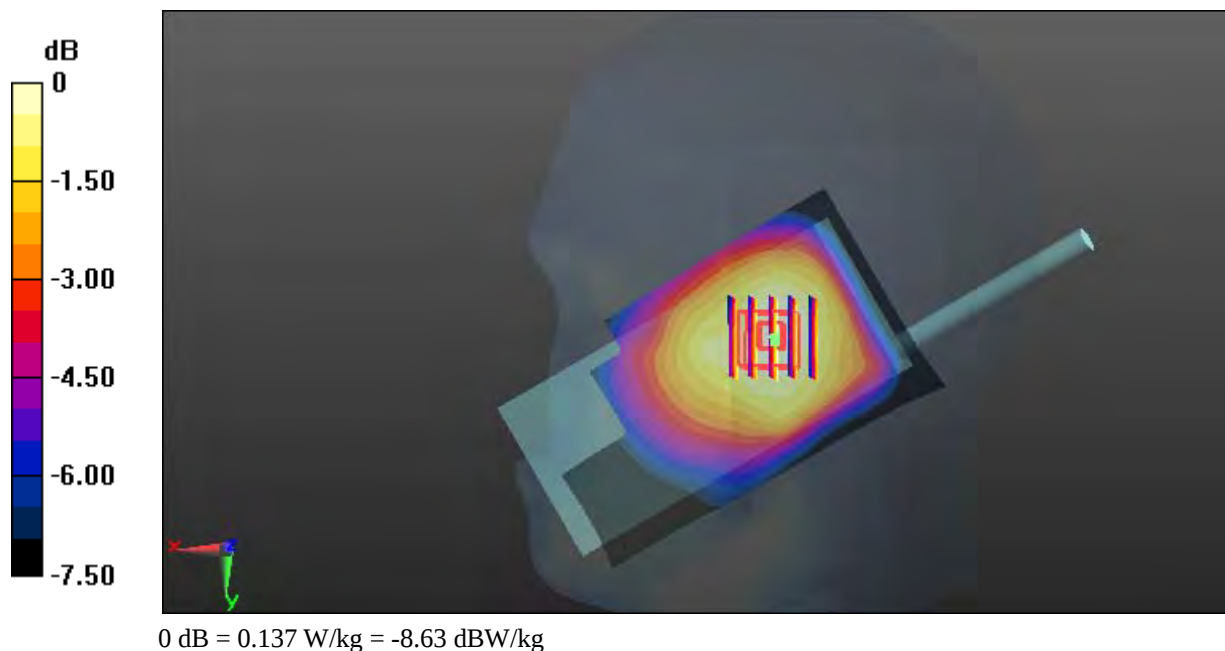

DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820

DASY5 Configuration:


- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Maximum value of SAR (interpolated) = 0.101 W/kg

Reference Value = 10.68 V/m; Power Drift = 0.14 dB

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

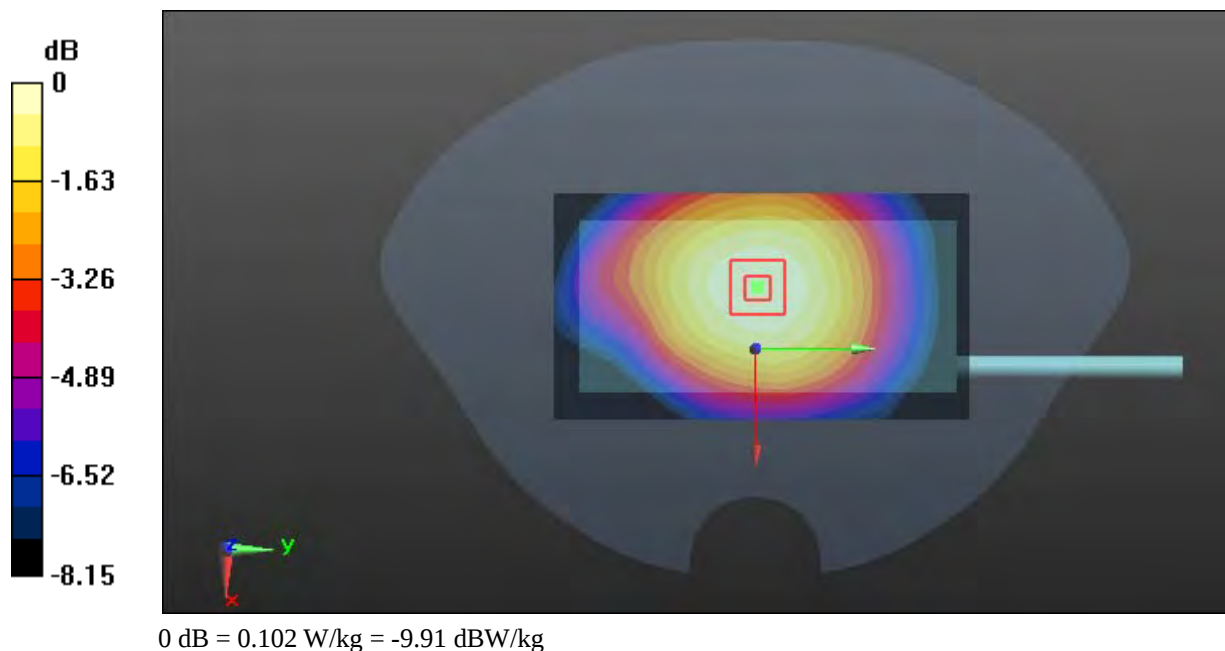

Test Plot 66#: WCDMA Band 5_Body Front _Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 57.372$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.500 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.76 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.668 W/kg

SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.327 W/kg

Maximum value of SAR (measured) = 0.496 W/kg

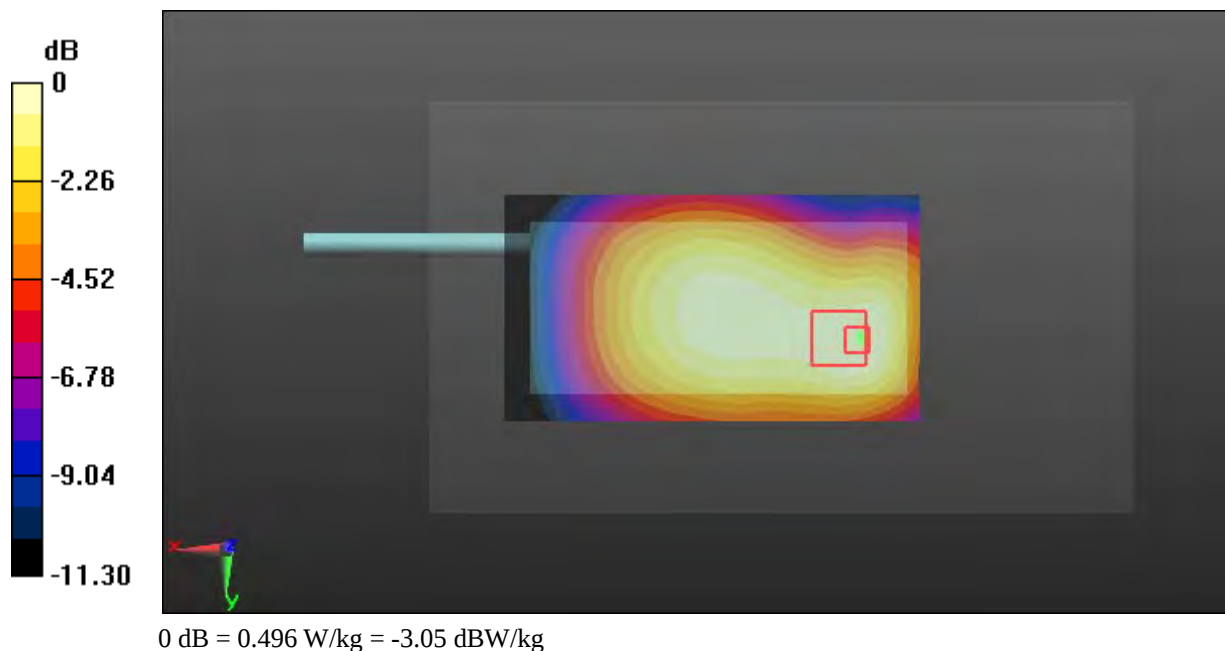

Test Plot 67#: WCDMA Band 5_Body Front _Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.510 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.86 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.385 W/kg

Maximum value of SAR (measured) = 0.500 W/kg

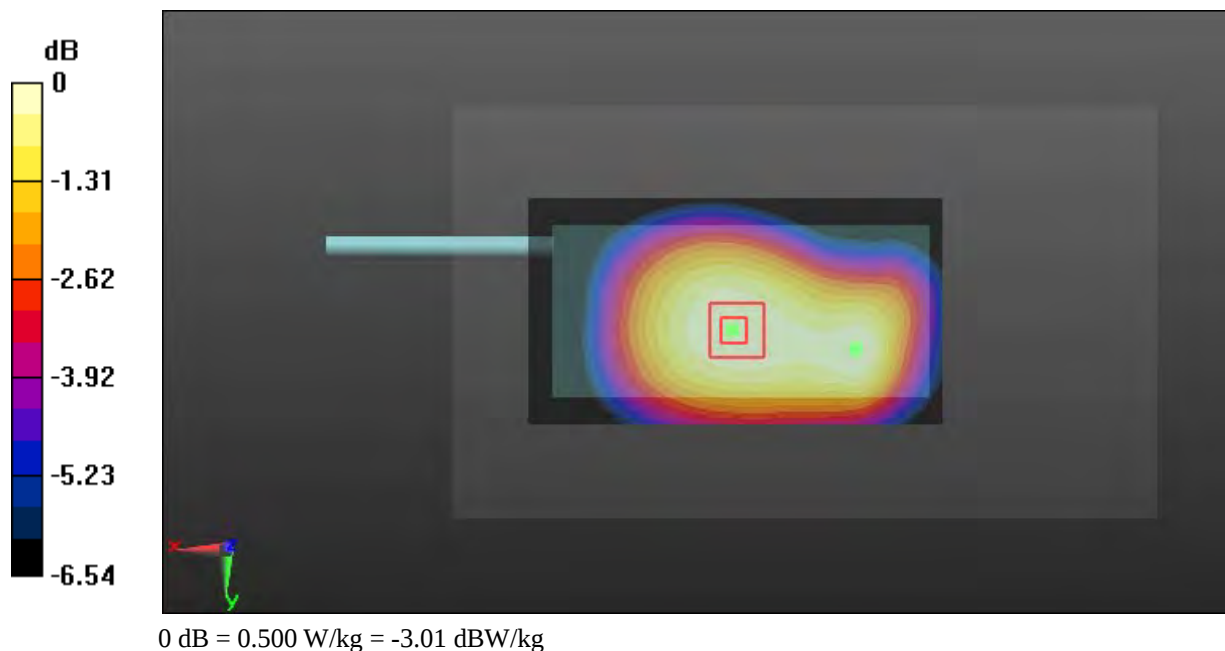

Test Plot 68#: WCDMA Band 5_Body Front _High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.963$ S/m; $\epsilon_r = 57.209$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.532 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.04 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.699 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 0.526 W/kg

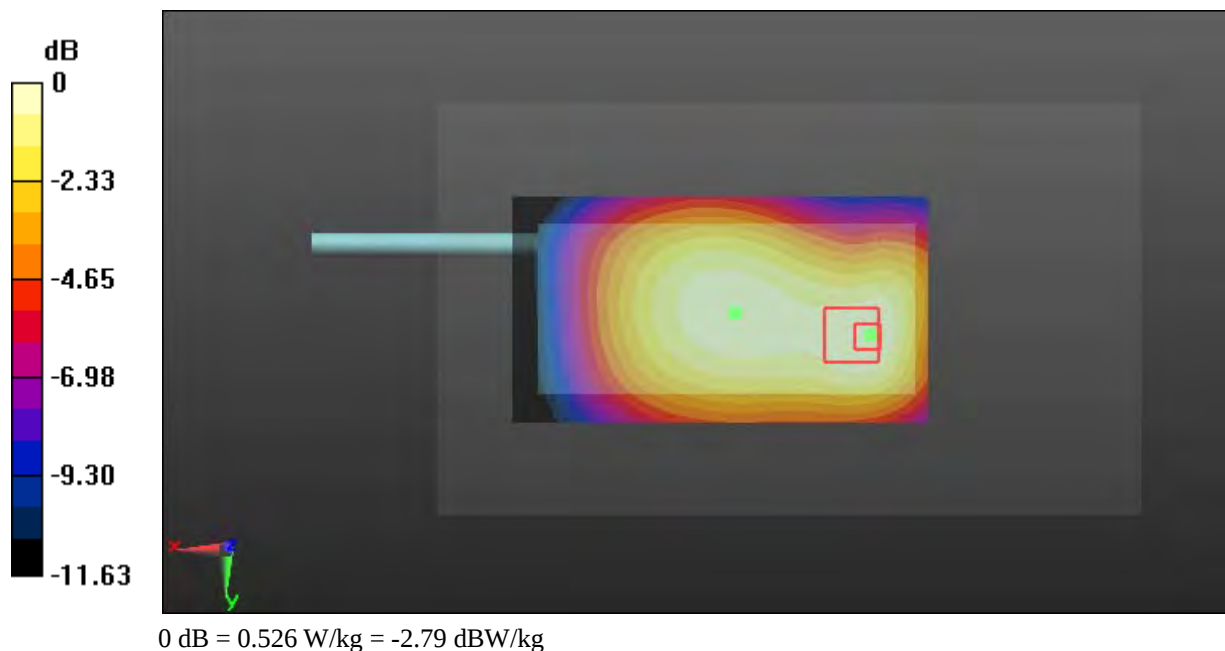

Test Plot 69#: WCDMA Band 5_Body Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.251 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.47 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.250 W/kg

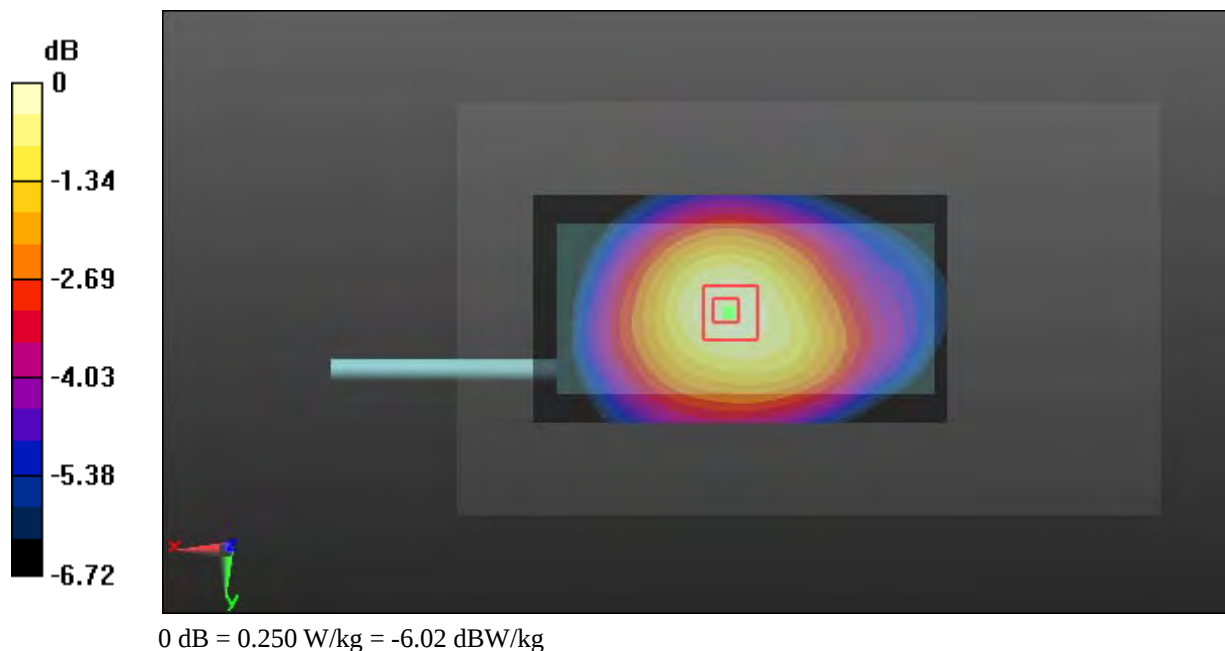

Test Plot 70#: WCDMA Band 5_Body Left_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.265 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.71 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.300 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.260 W/kg

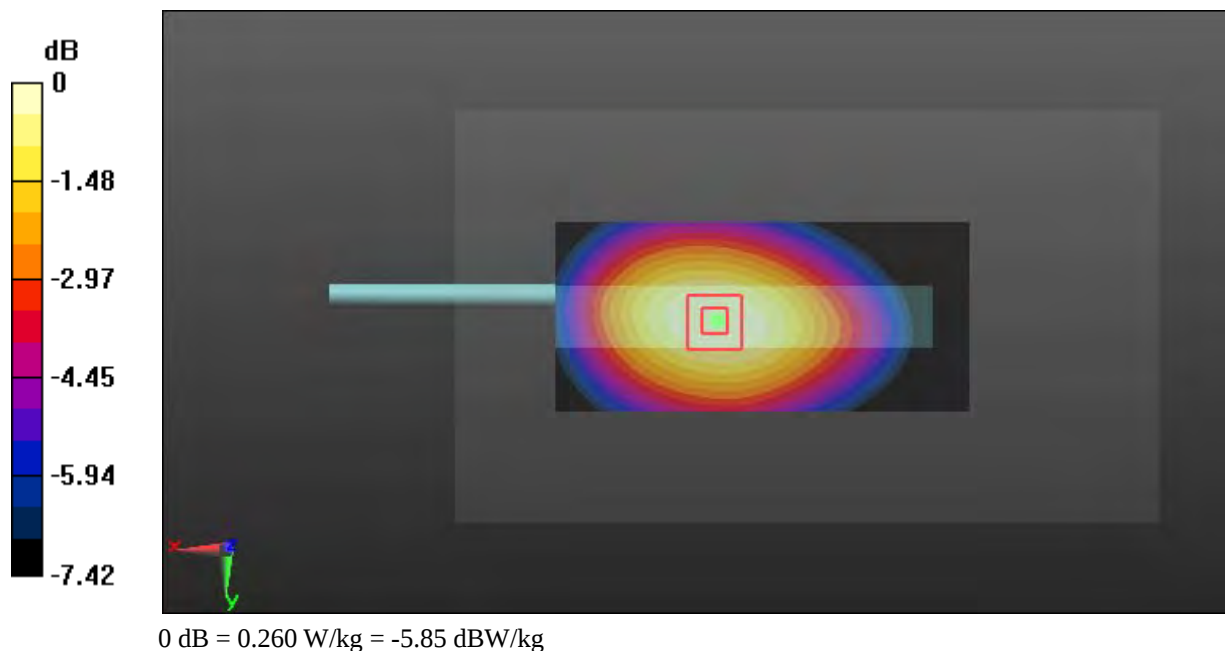

Test Plot 71#: WCDMA Band 5_Body Right_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.388 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.00 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 0.381 W/kg

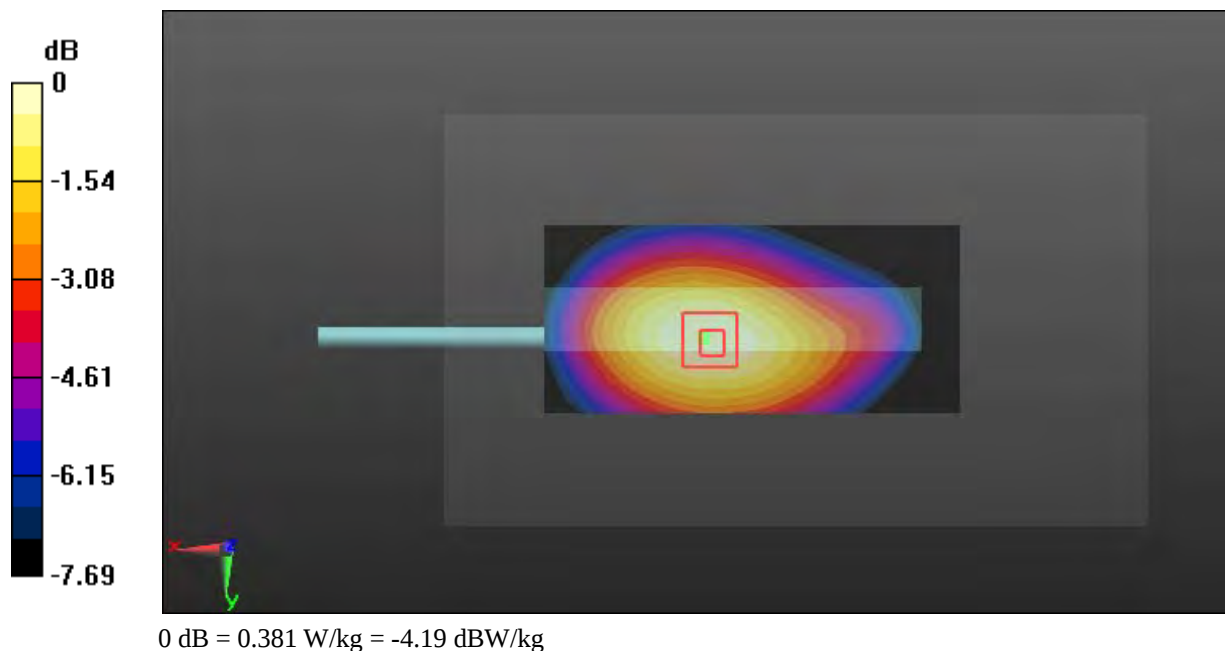

Test Plot 72#: WCDMA Band 5_Body Bottom_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.242 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.45 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.557 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.245 W/kg

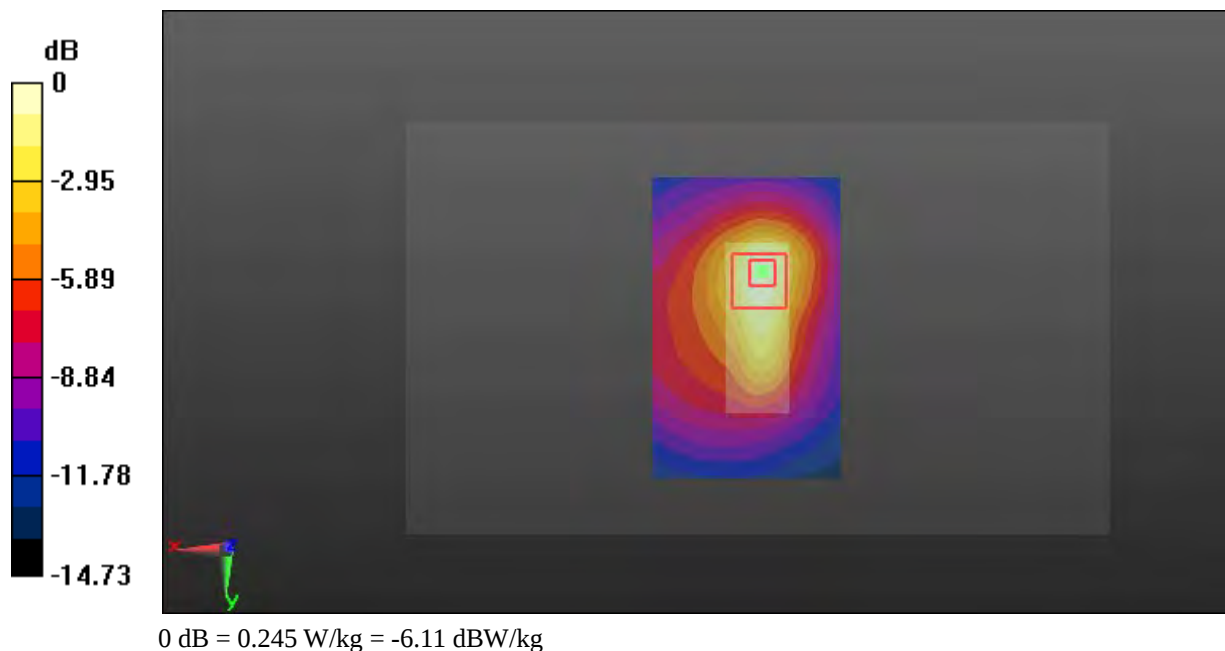

Test Plot 73#: LTE Band 2_Head Left Cheek_Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 40.582$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.698 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.596 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.700 W/kg; SAR(10 g) = 0.420 W/kg

Maximum value of SAR (measured) = 0.743 W/kg

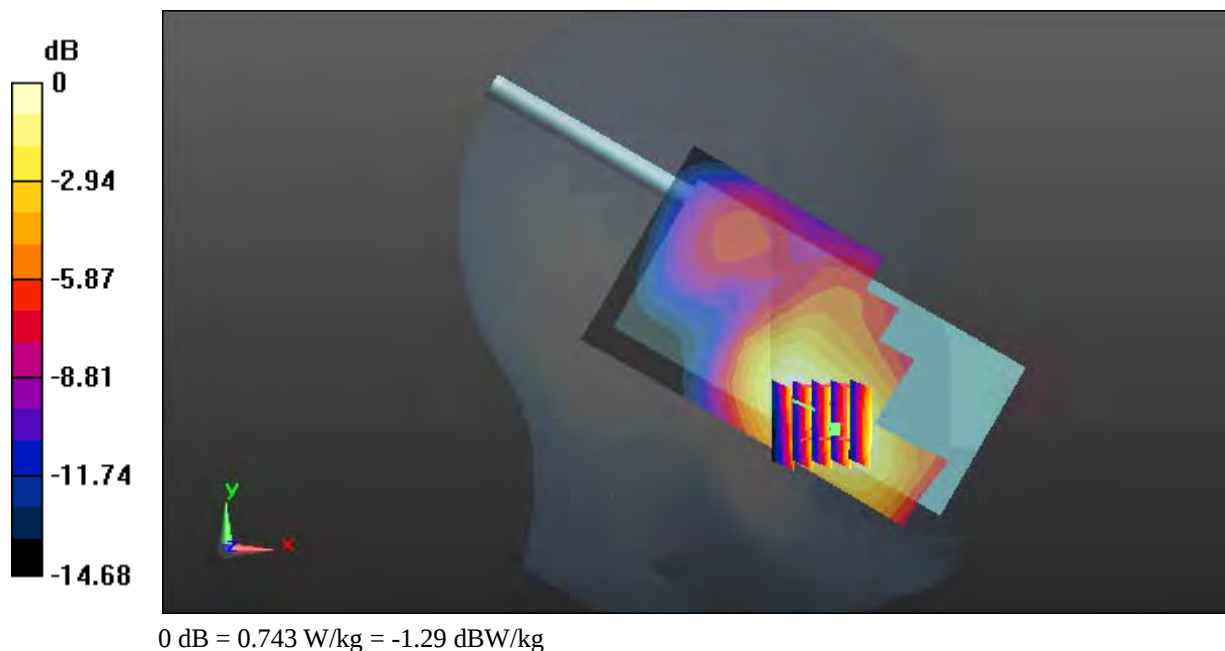

Test Plot 74#: LTE Band 2_Head Left Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.754 W/kg


Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.576 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.387 W/kg

Maximum value of SAR (measured) = 0.686 W/kg

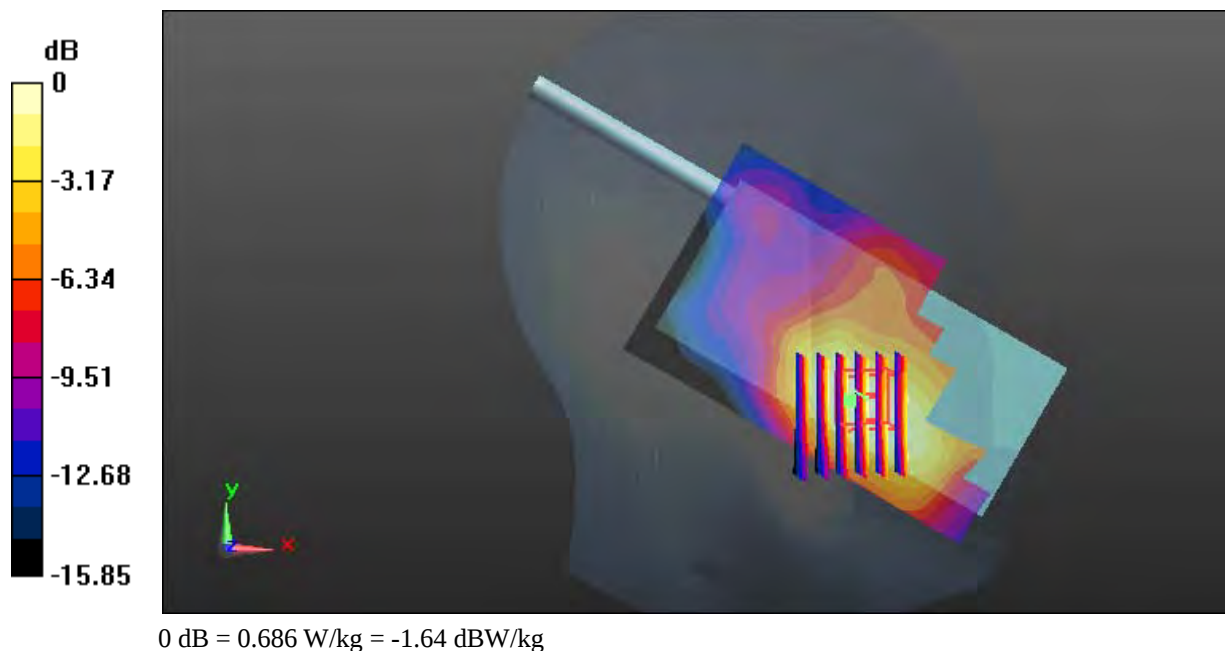

Test Plot 75#: LTE Band 2_Head Left Cheek_High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.391$ S/m; $\epsilon_r = 40.425$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.660 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.192 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.661 W/kg; SAR(10 g) = 0.393 W/kg

Maximum value of SAR (measured) = 0.706 W/kg

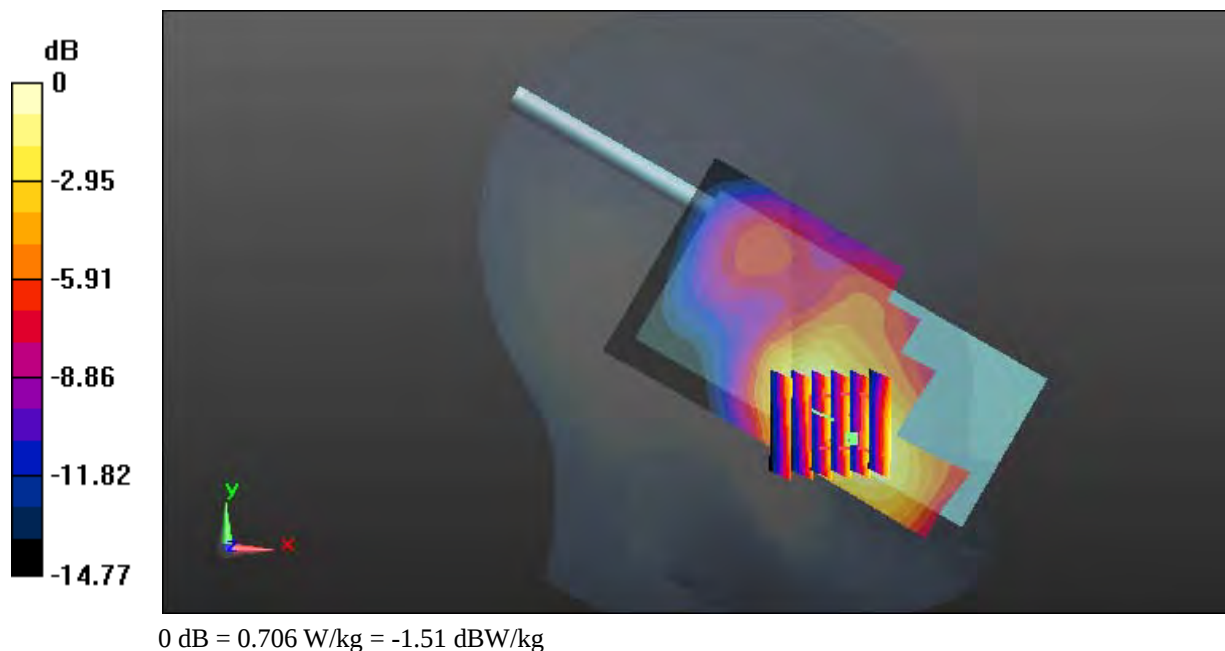

Test Plot 76#: LTE Band 2_Head Left Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.545 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.031 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.898 W/kg

SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 0.561 W/kg

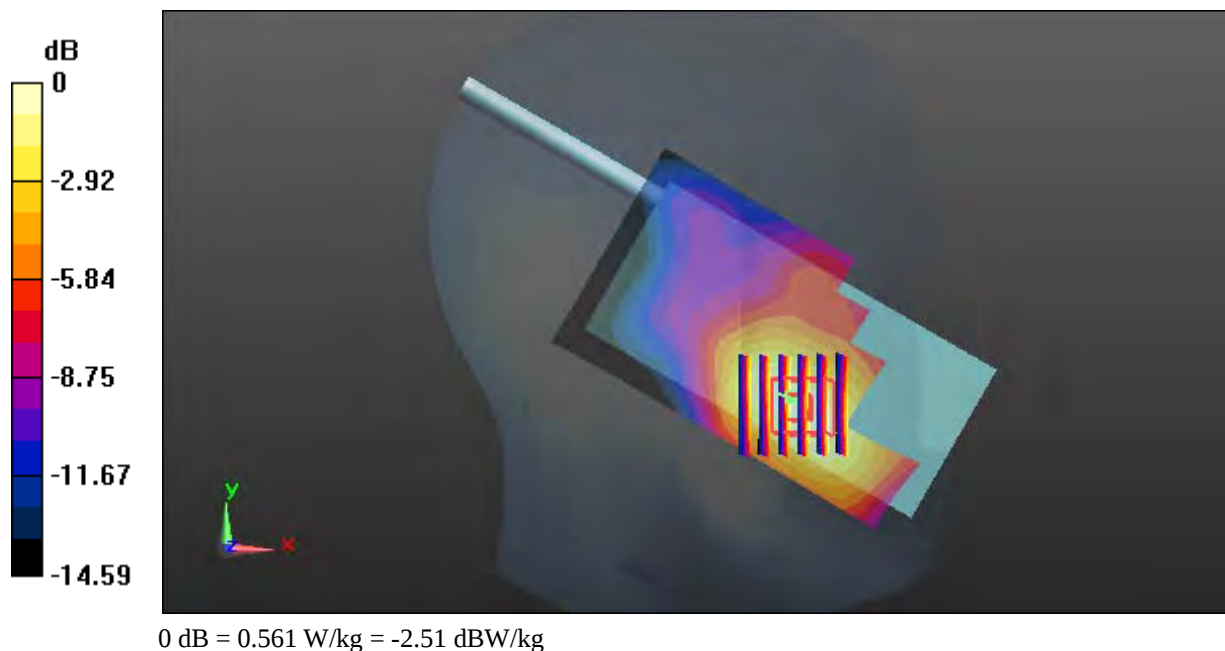

Test Plot 77#: LTE Band 2_Head Left Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.176 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.137 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.165 W/kg

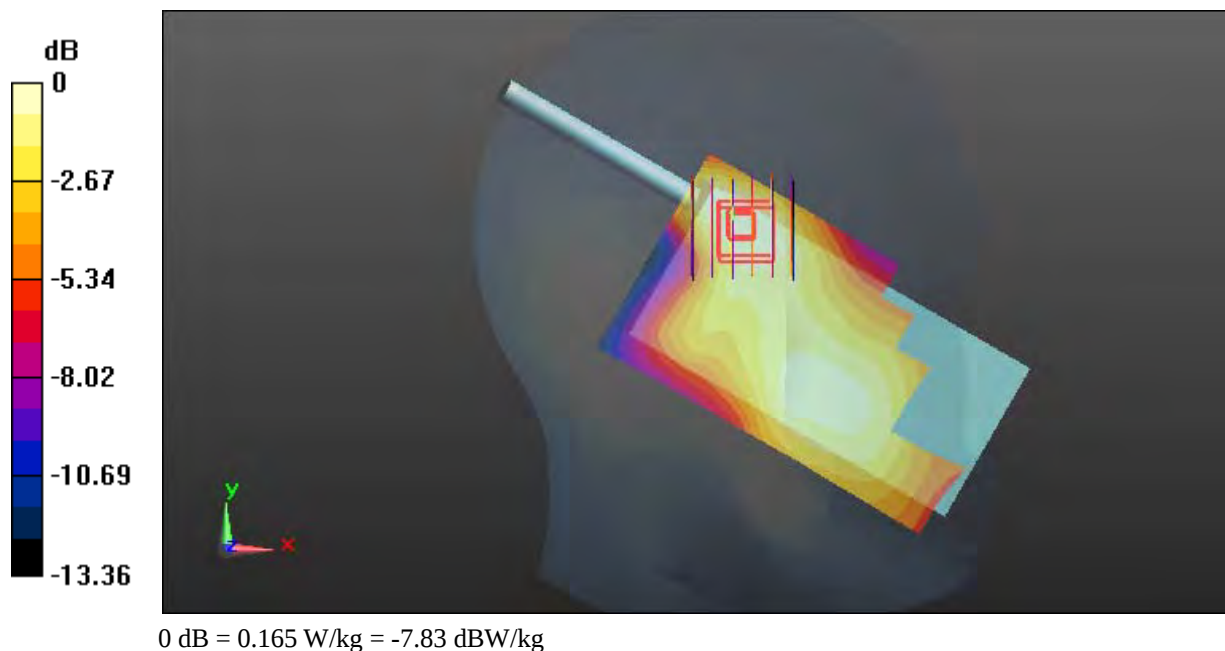

Test Plot 78#: LTE Band 2_Head Left Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.129 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.071 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.124 W/kg

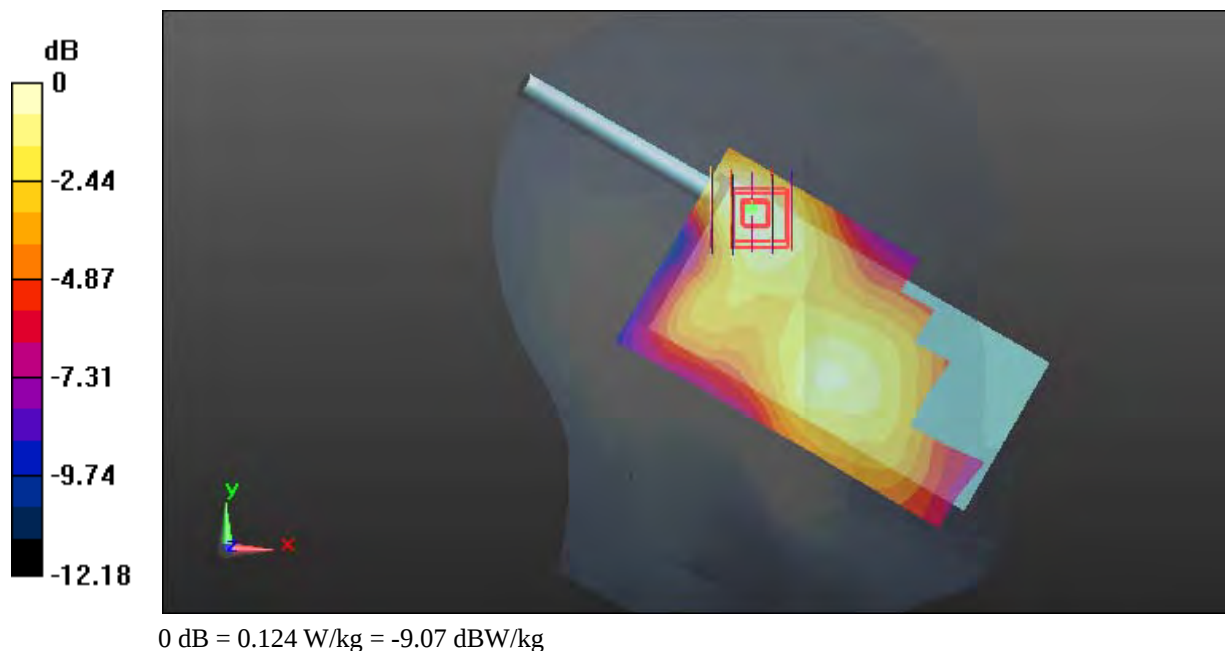

Test Plot 79#: LTE Band 2_Head Right Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.326 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.986 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.531 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 0.372 W/kg

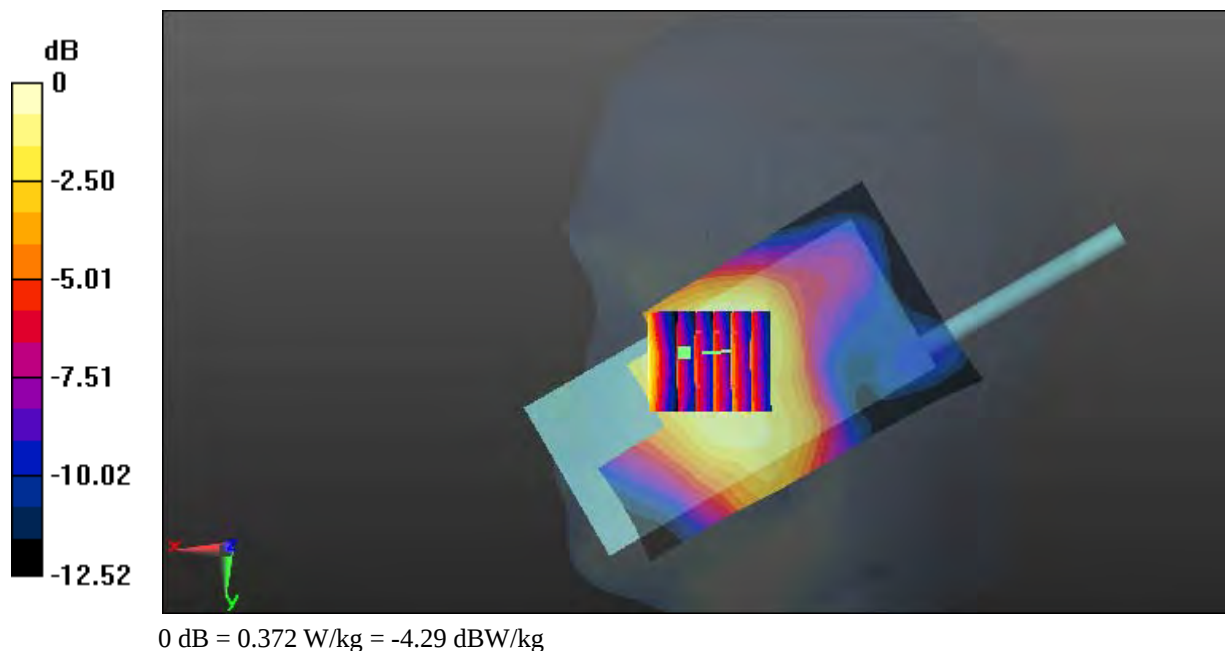

Test Plot 80#: LTE Band 2_Head Right Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.208 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.417 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.220 W/kg

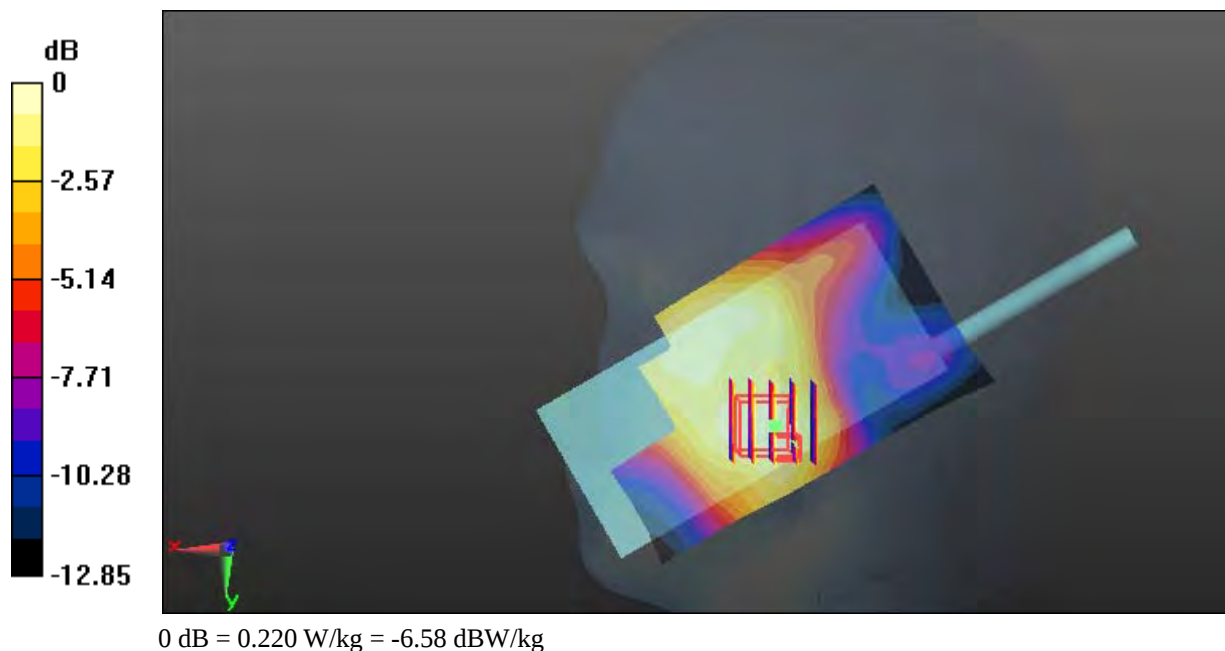

Test Plot 81#: LTE Band 2_Head Right Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0991 W/kg


Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.545 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.105 W/kg

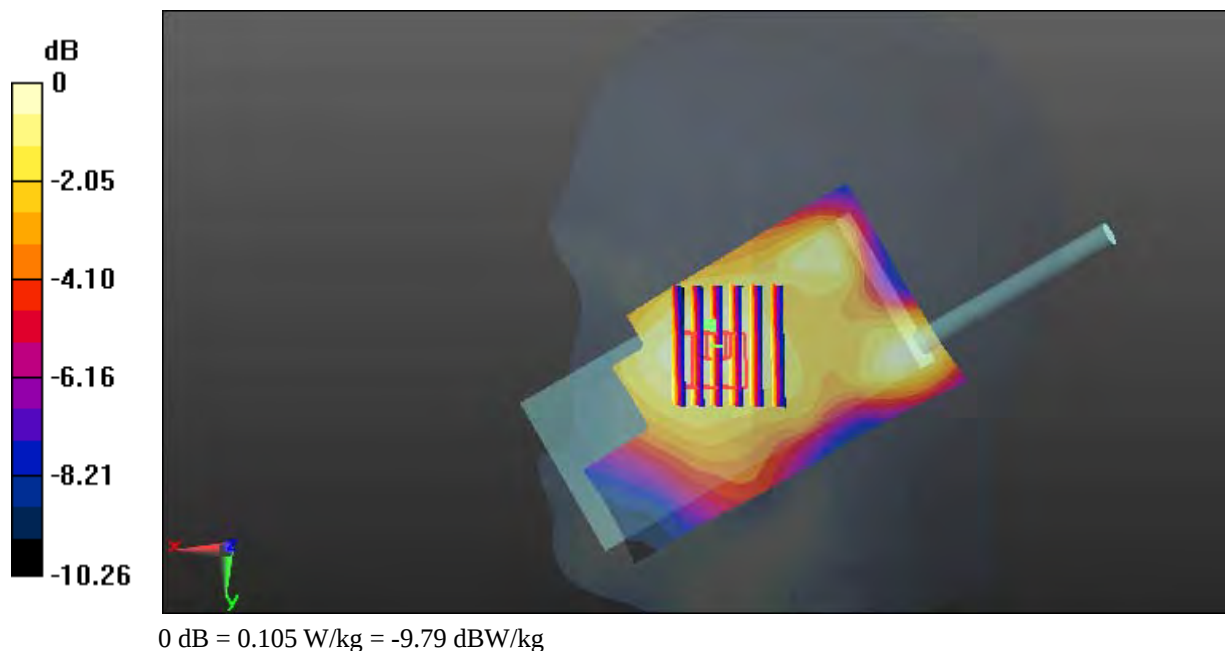

Test Plot 82#: LTE Band 2_Head Right Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0813 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.162 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.0821 W/kg

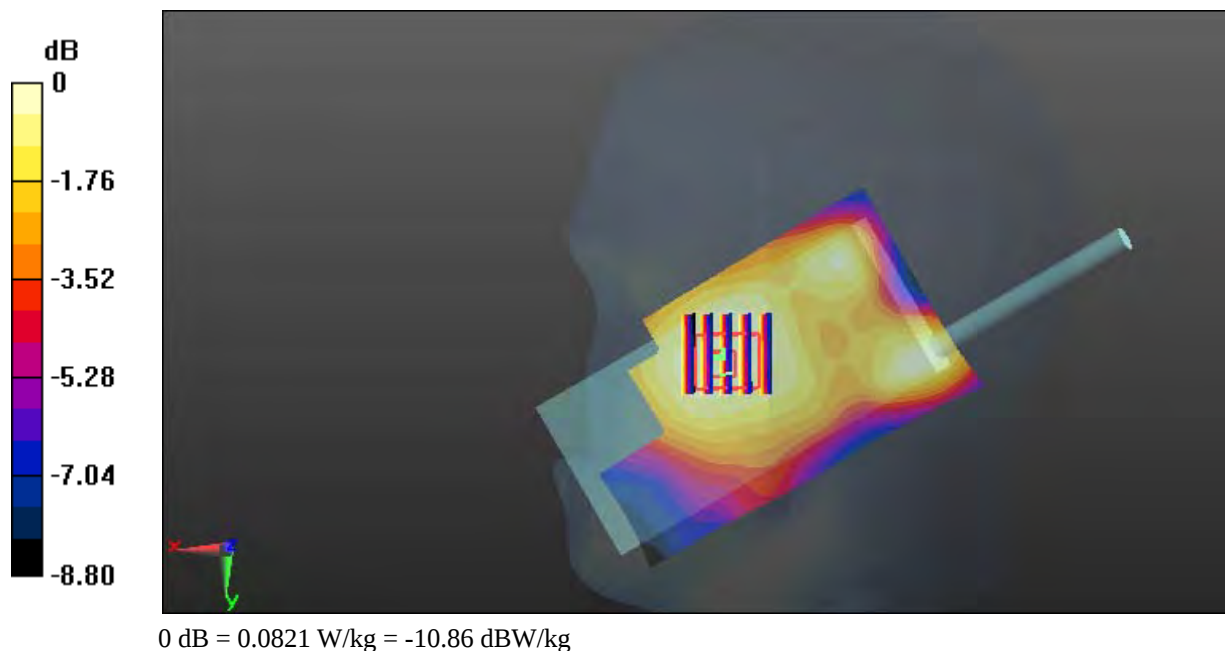

Test Plot 83#: LTE Band 2_Face Up_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0749 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.591 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.0758 W/kg

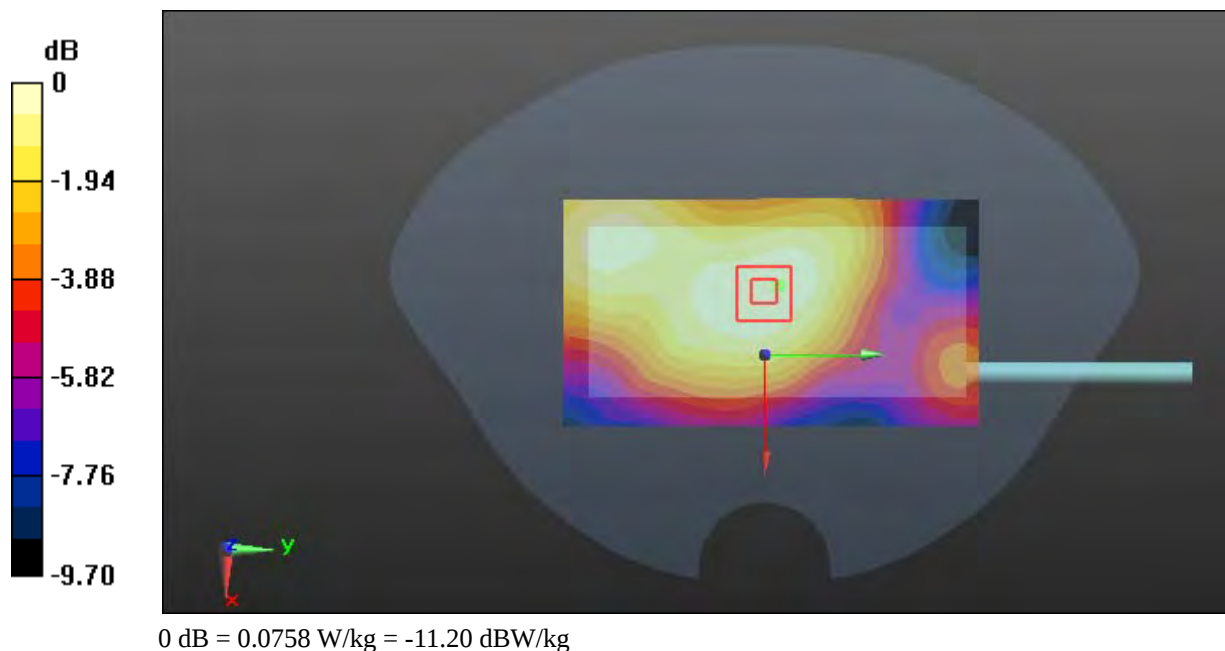

Test Plot 84#: LTE Band 2_Face Up_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0871 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.138 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0831 W/kg

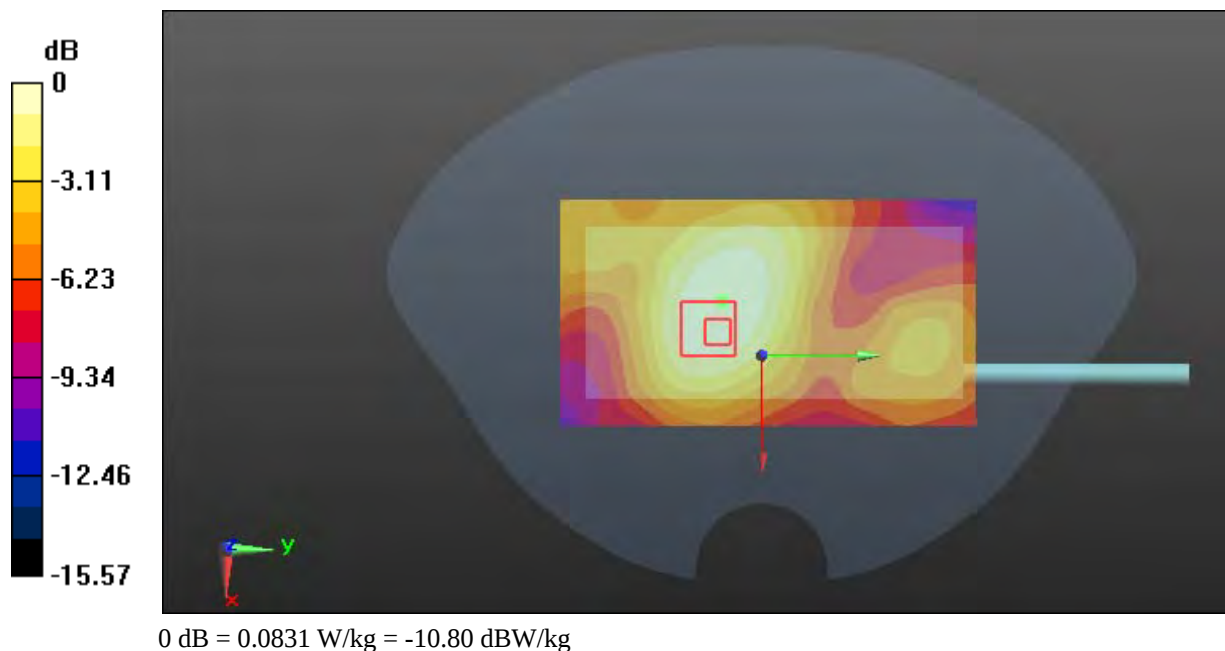

Test Plot 85#: LTE Band 2_Body Front _Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.468$ S/m; $\epsilon_r = 54.414$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.472 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.61 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.764 W/kg

SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.481 W/kg

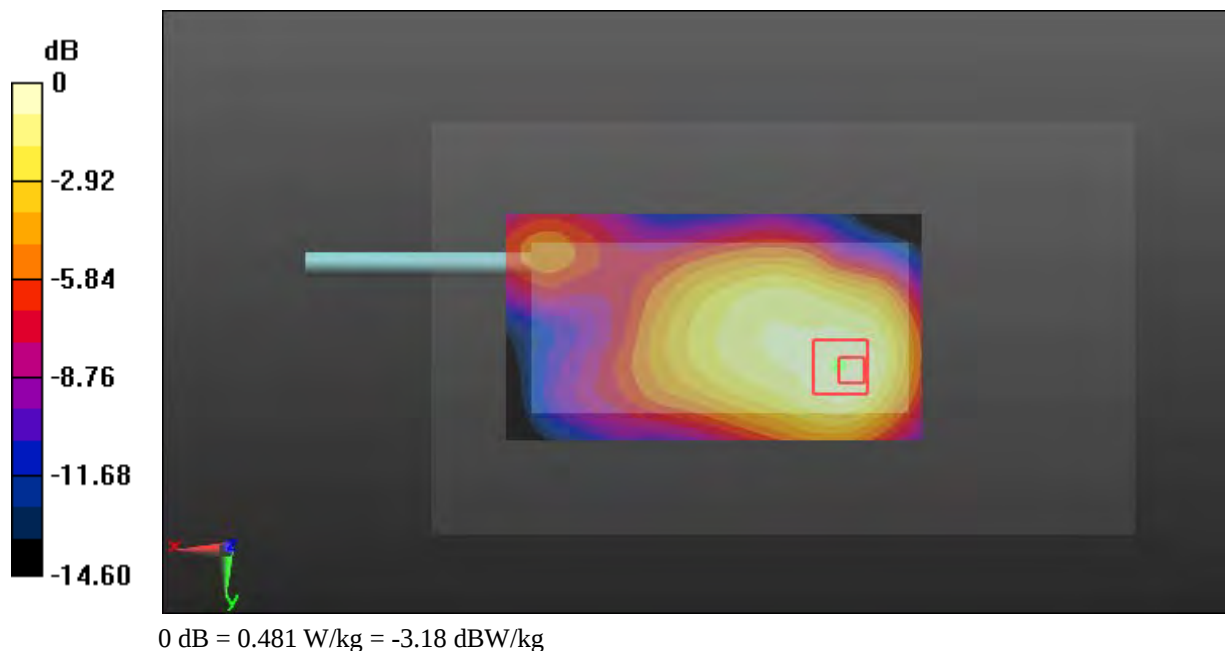

Test Plot 86#: LTE Band 2_Body Front _Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.445 W/kg


Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.58 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.708 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.455 W/kg

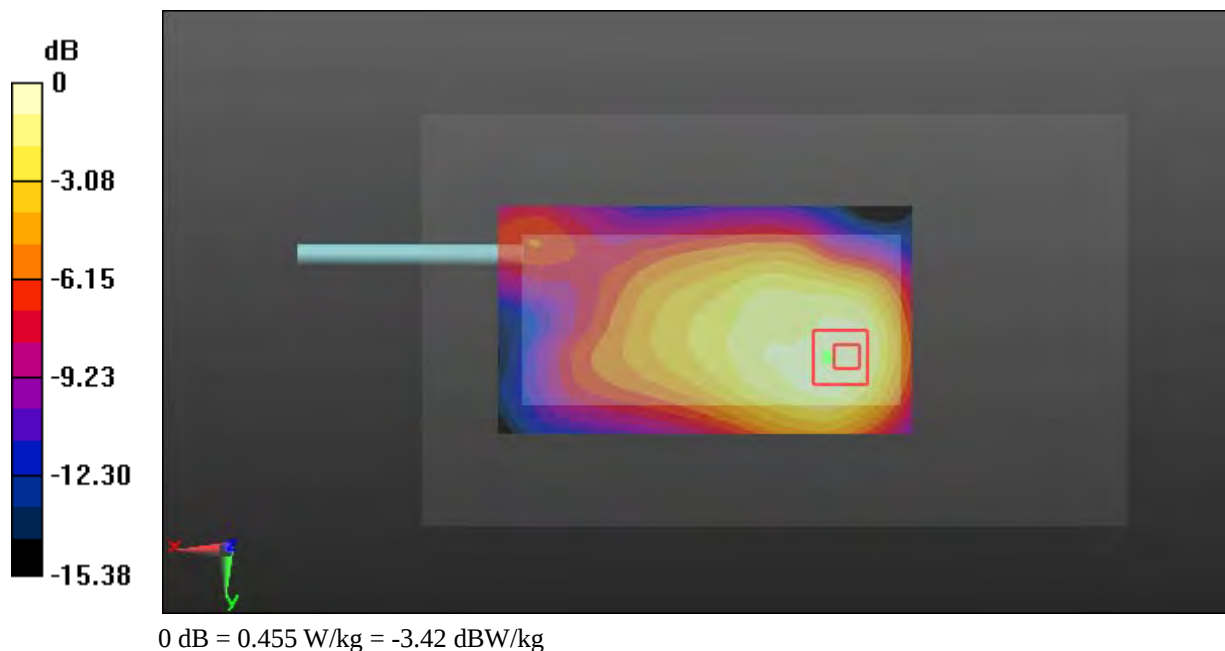

Test Plot 87#: LTE Band 2_Body Front _High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.514$ S/m; $\epsilon_r = 54.191$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.394 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.79 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.647 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.401 W/kg

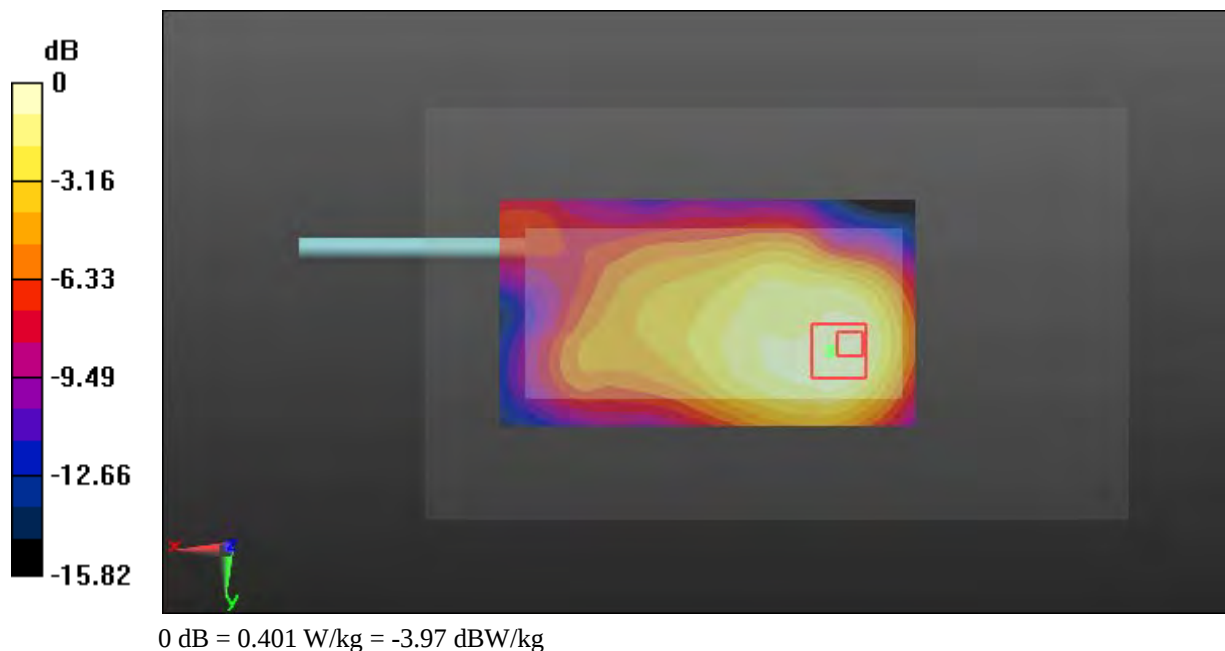

Test Plot 88#: LTE Band 2_Body Front _Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.326 W/kg


Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.52 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.513 W/kg

SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

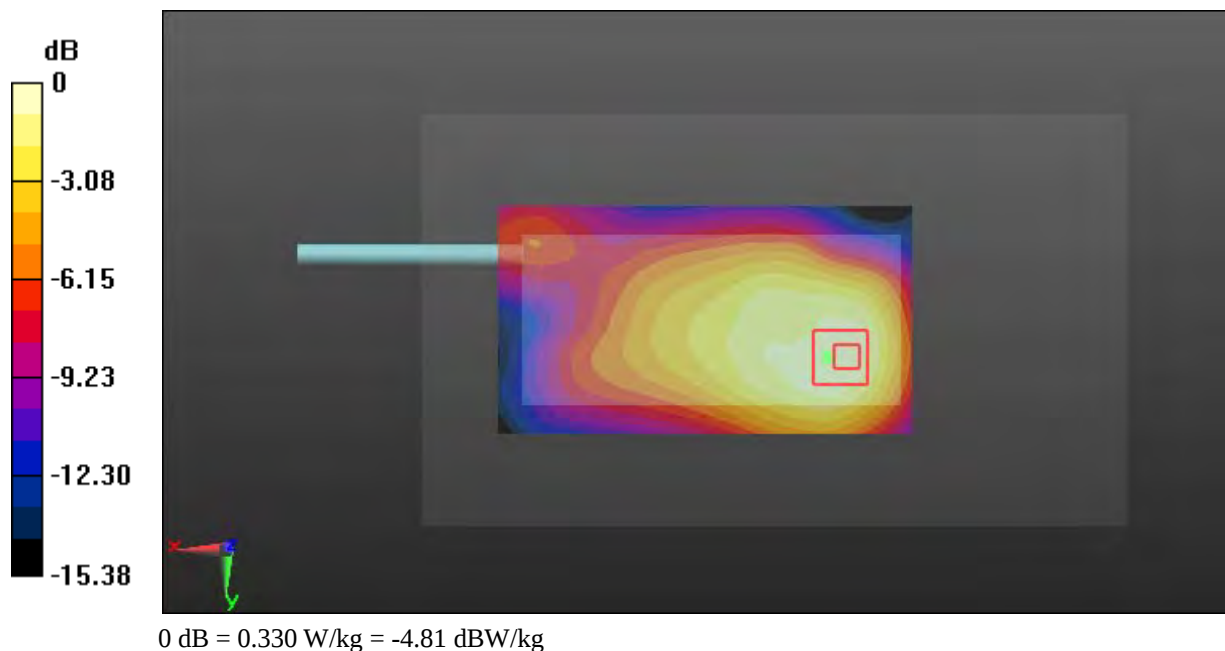

Test Plot 89#: LTE Band 2_Body Back_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.196 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.144 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

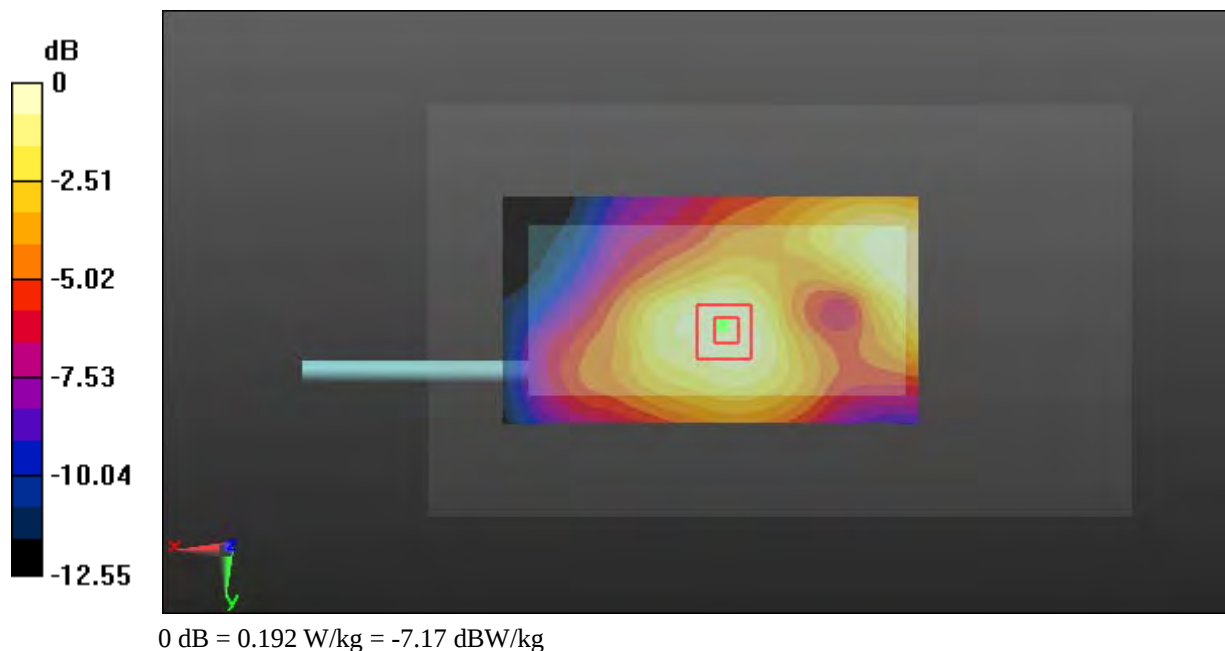

Test Plot 90#: LTE Band 2_Body Back_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.156 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.131 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

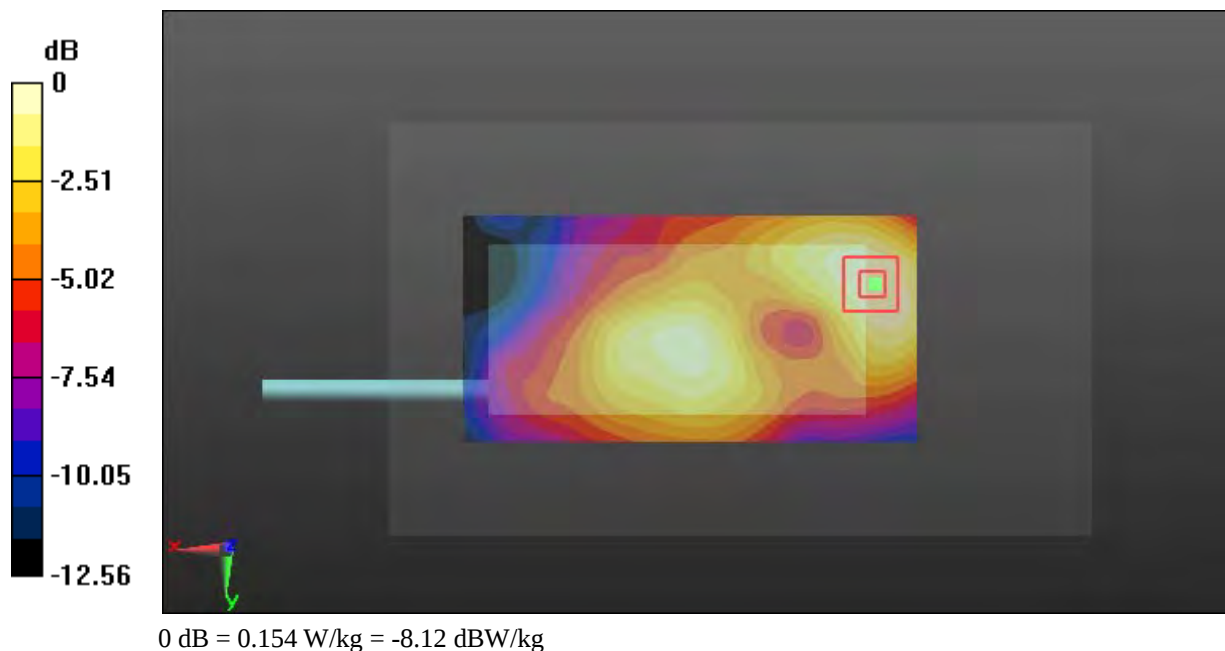

Test Plot 91#: LTE Band 2_Body Left_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.553 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.62 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.822 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.308 W/kg

Maximum value of SAR (measured) = 0.550 W/kg

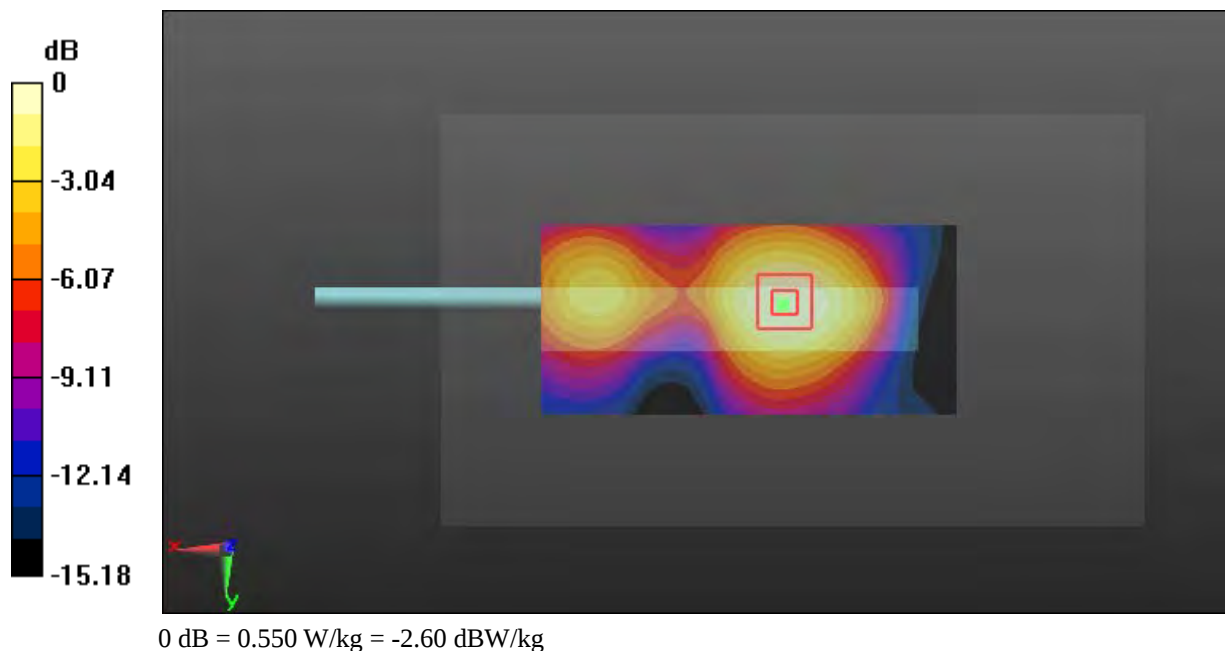

Test Plot 92#: LTE Band 2_Body Left_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.453 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.66 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.683 W/kg

SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 0.451 W/kg

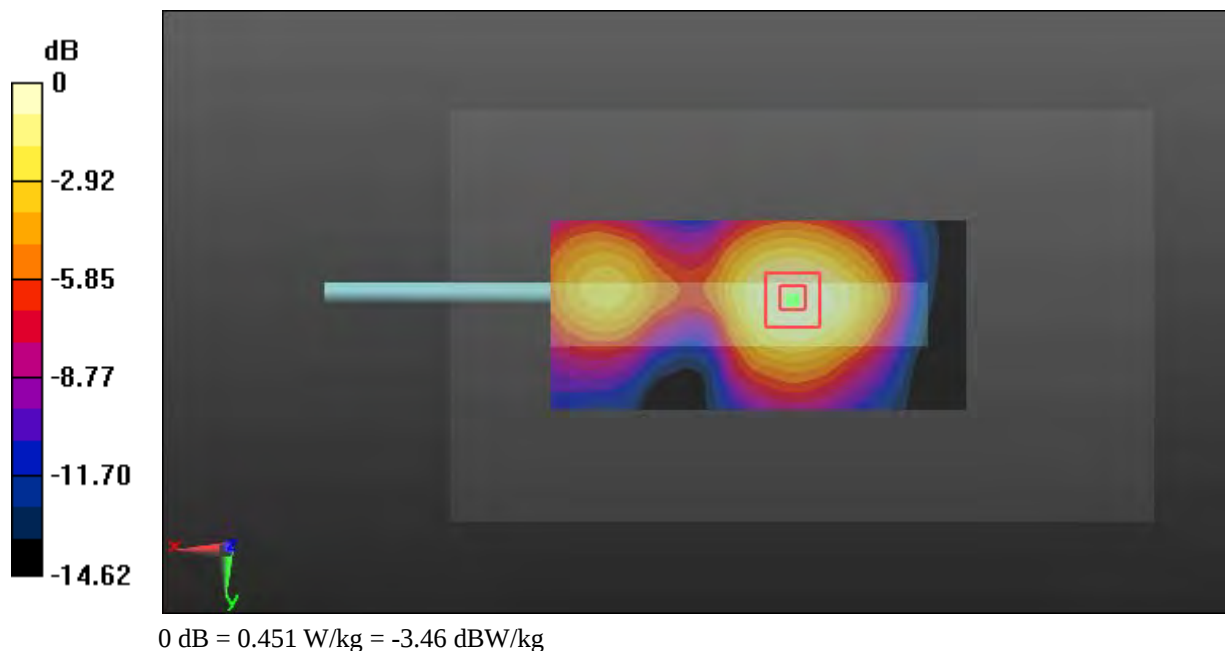

Test Plot 93#: LTE Band 2_Body Right_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.201 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.638 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.310 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.198 W/kg

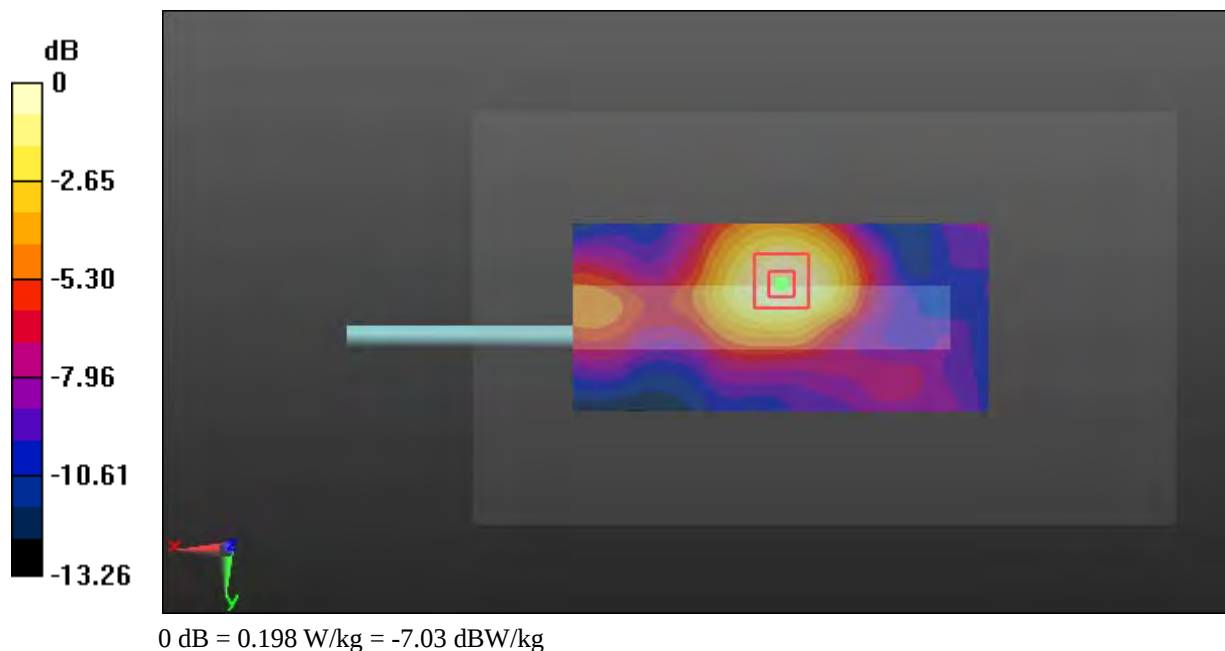

Test Plot 94#: LTE Band 2_Body Right_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.148 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.464 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

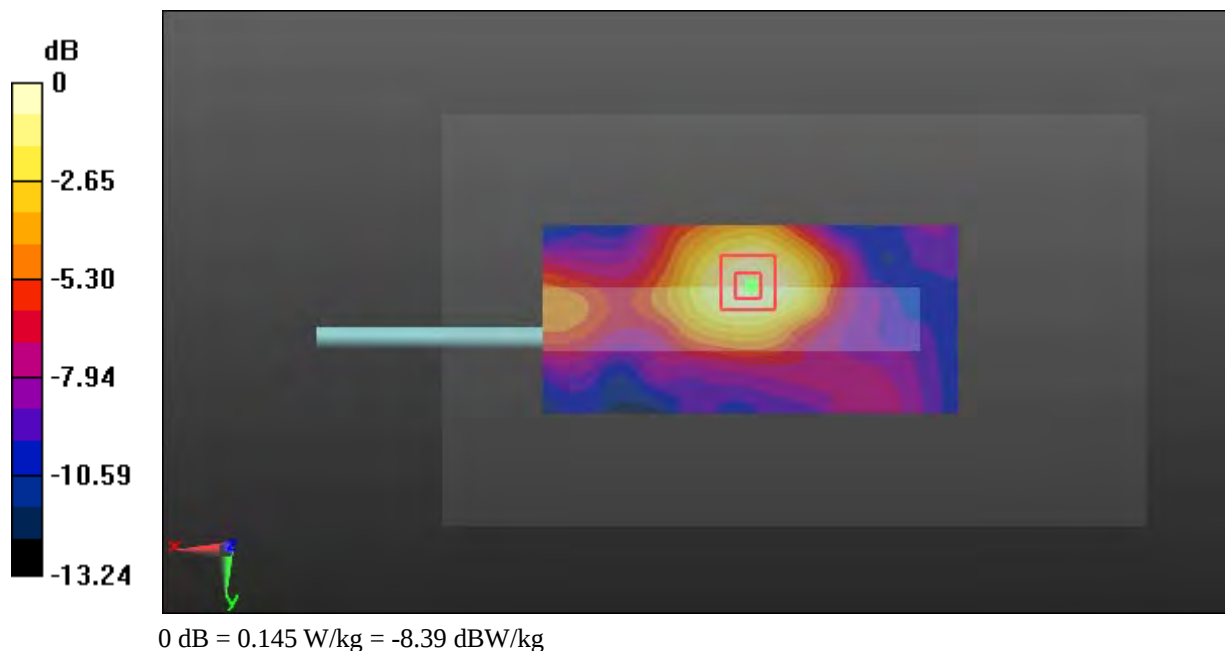

Test Plot 95#: LTE Band 2_Body Bottom_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.447 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.27 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.723 W/kg

SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.428 W/kg



Test Plot 96#: LTE Band 2_Body Bottom_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.375 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.83 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.359 W/kg

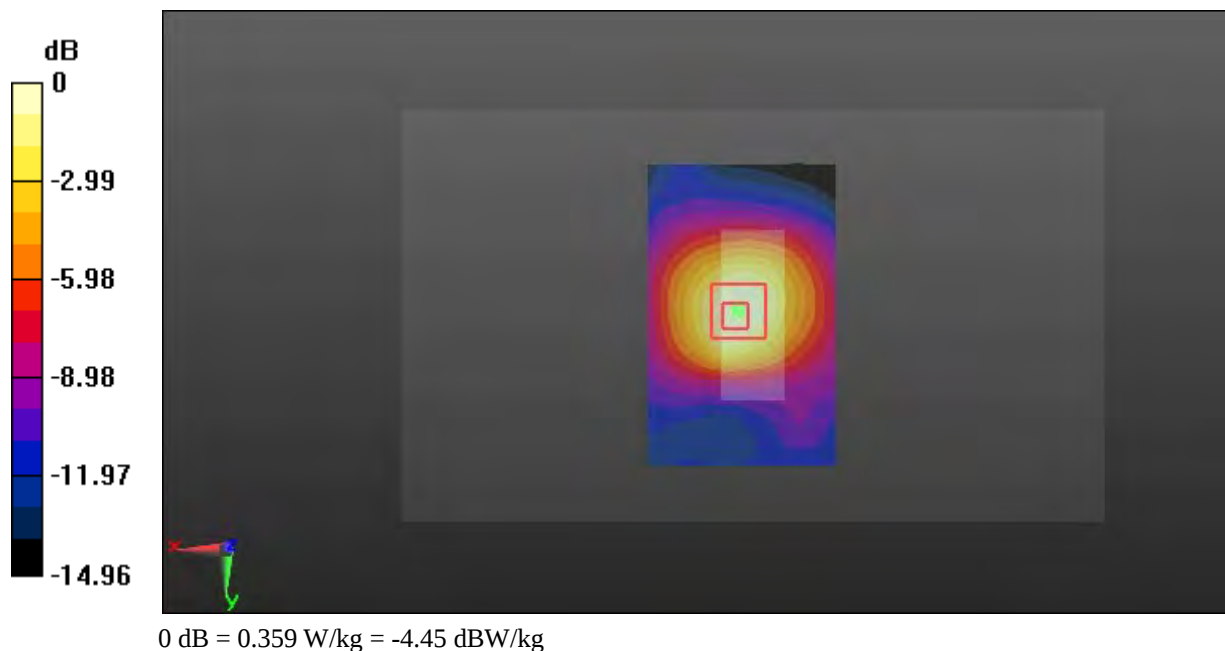

Test Plot 97#: LTE Band 4_Head Left Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.251$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.279 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.397 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.285 W/kg

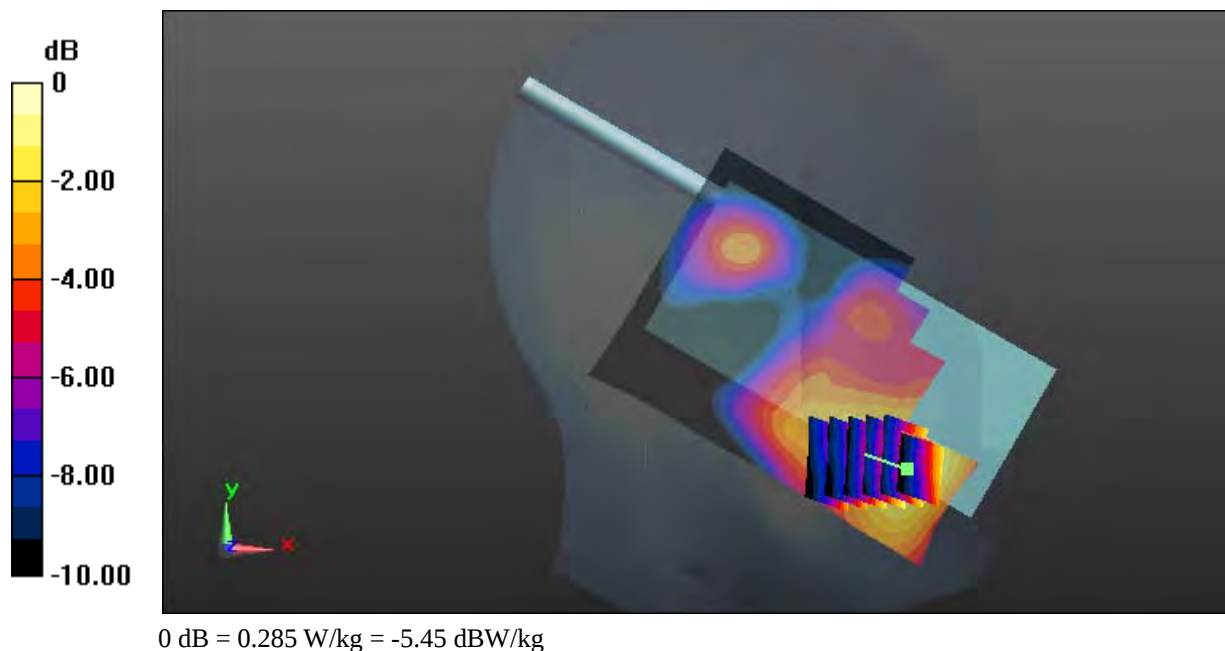

Test Plot 98#: LTE Band 4_Head Left Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.251$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.236 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.678 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.236 W/kg

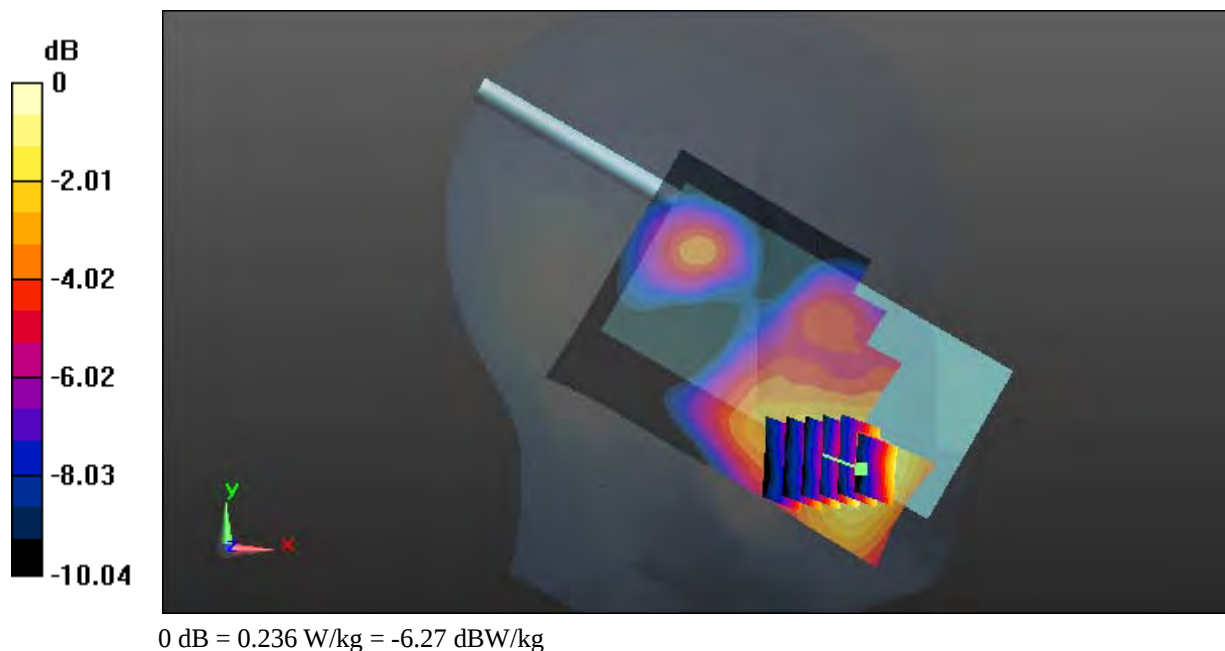

Test Plot 99#: LTE Band 4_Head Left Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.251$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.127 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.622 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

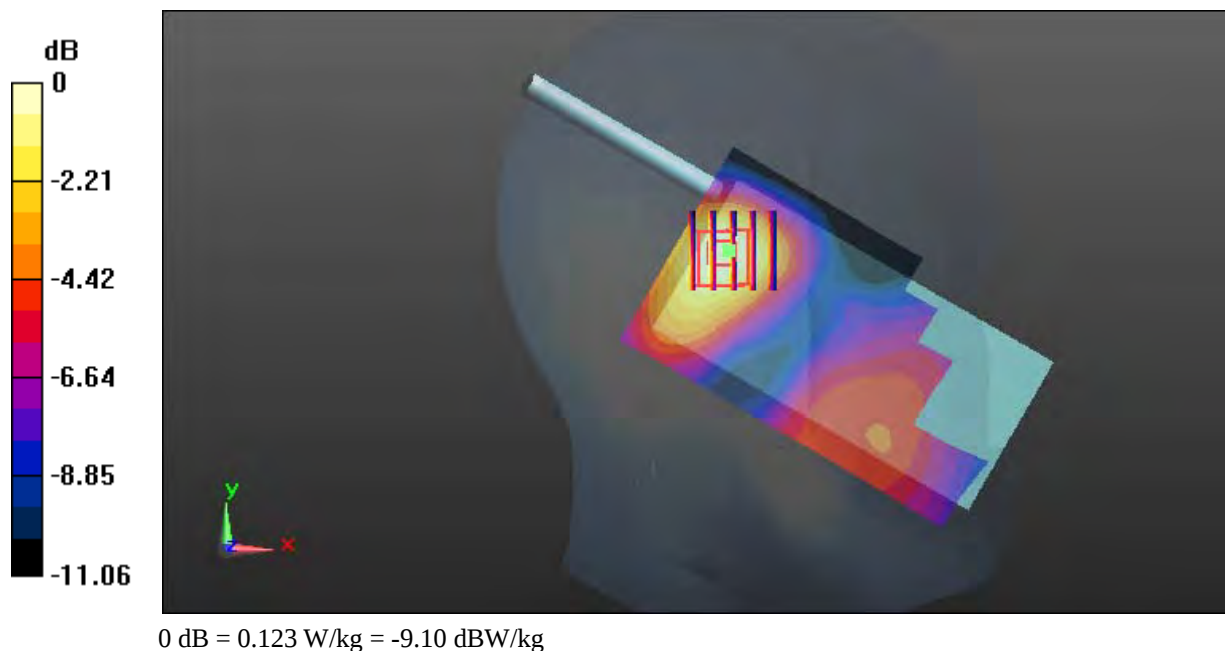

Test Plot 100#: LTE Band 4_Head Left Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.251$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0917 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.584 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0905 W/kg

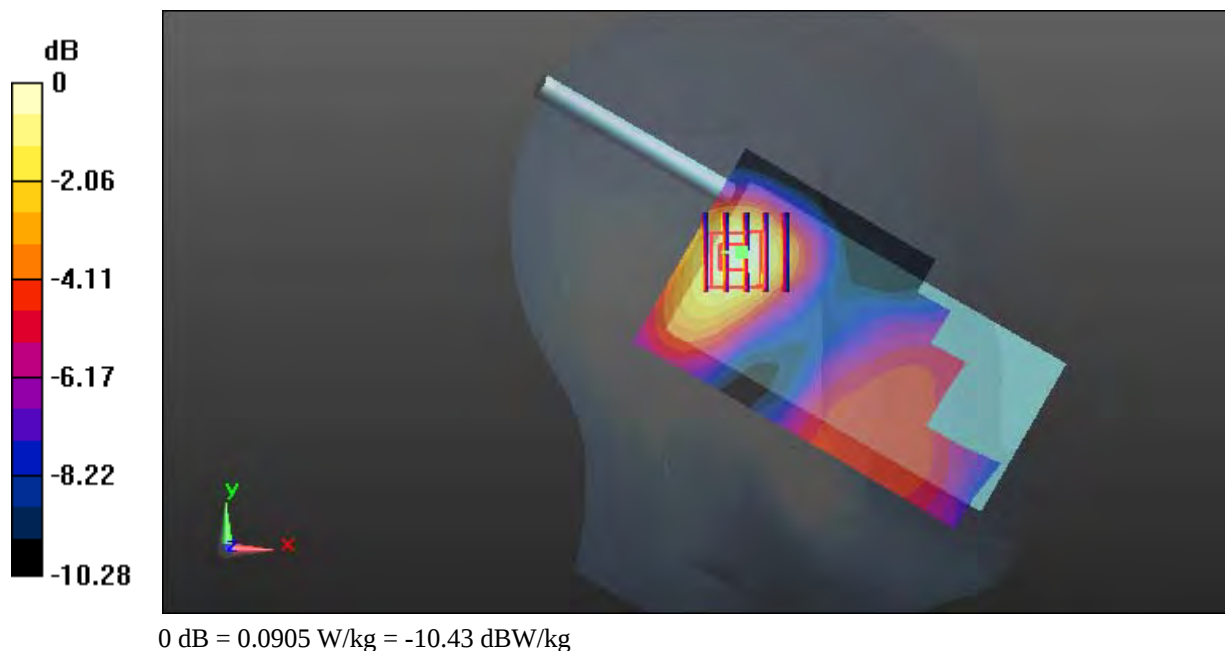

Test Plot 101#: LTE Band 4_Head Right Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.251$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.156 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.617 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

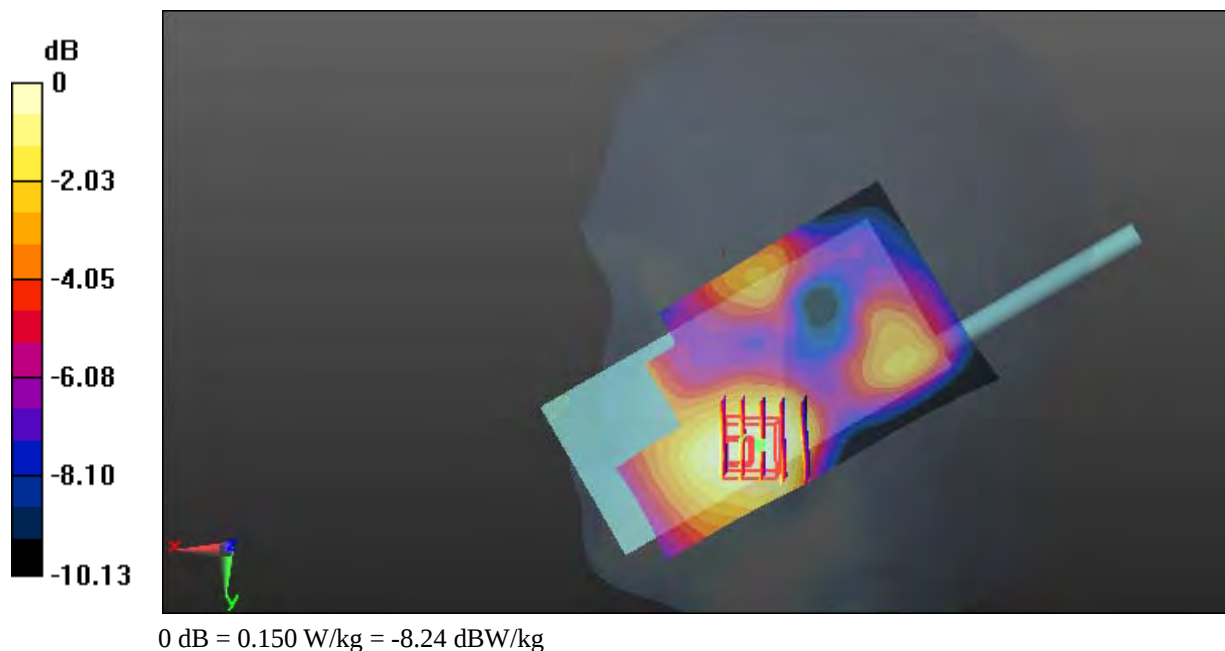

Test Plot 102#: LTE Band 4_Head Right Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.251$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.123 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.909 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.118 W/kg

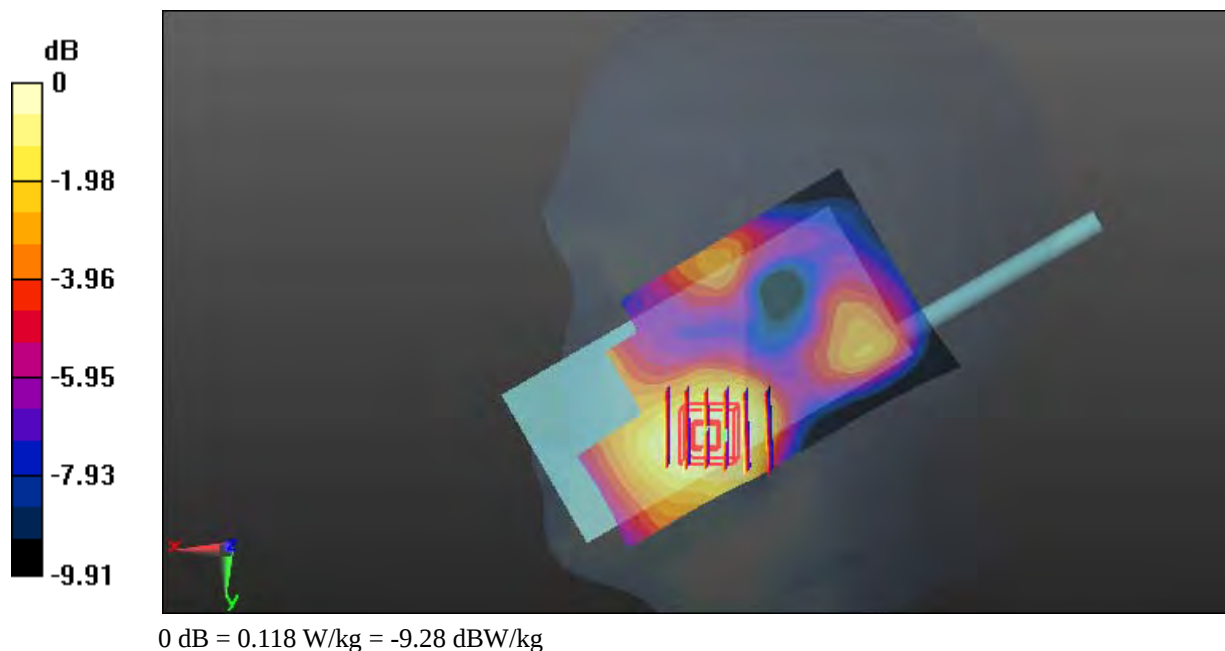

Test Plot 103#: LTE Band 4_Head Right Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.251$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0911 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.704 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.0860 W/kg

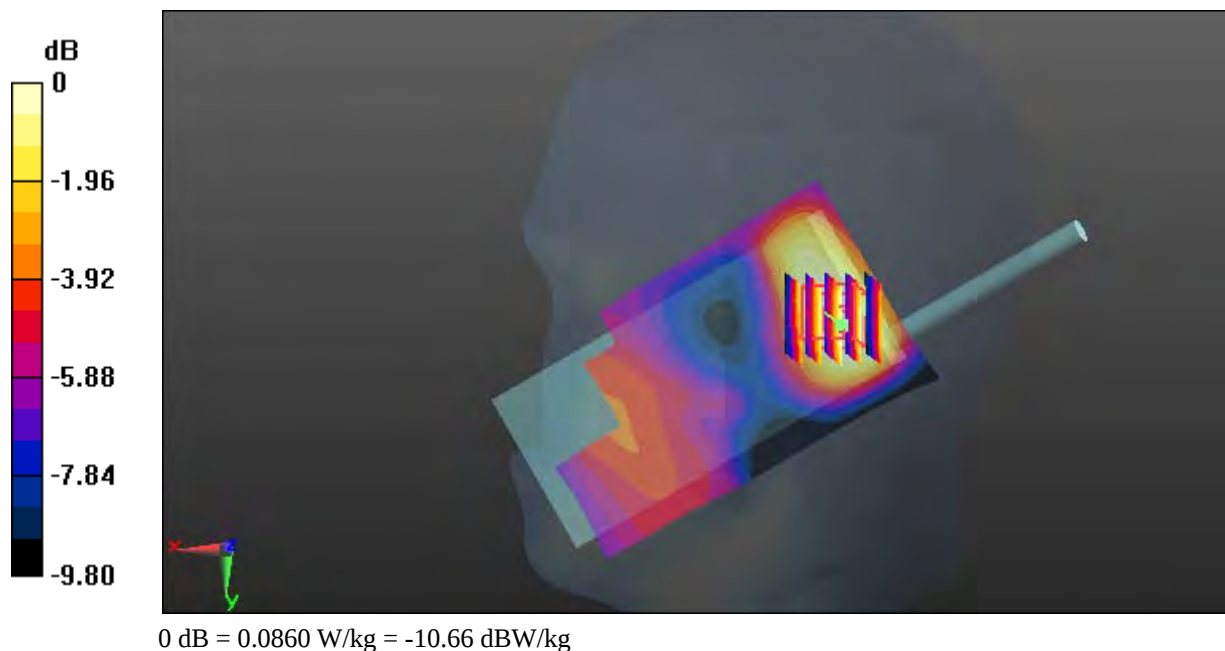

Test Plot 104#: LTE Band 4_Head Right Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.251$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0686 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.452 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0800 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.0656 W/kg

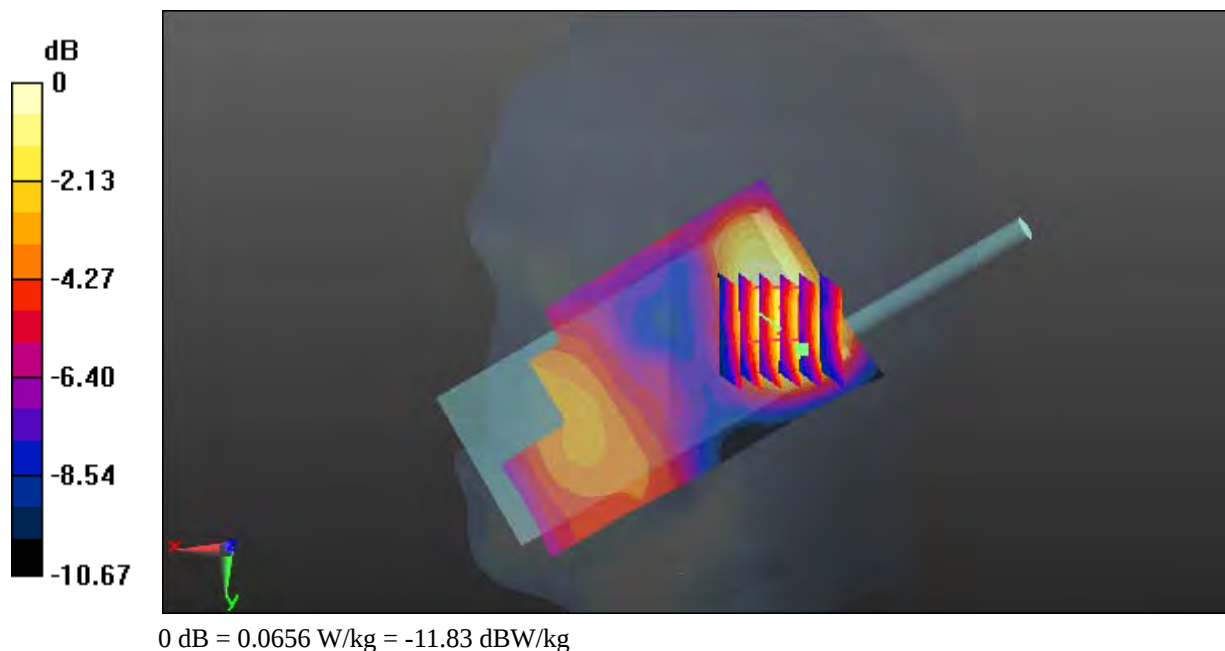

Test Plot 105#: LTE Band 4_Face Up_Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1720 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.333$ S/m; $\epsilon_r = 41.262$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.273 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.474 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.275 W/kg

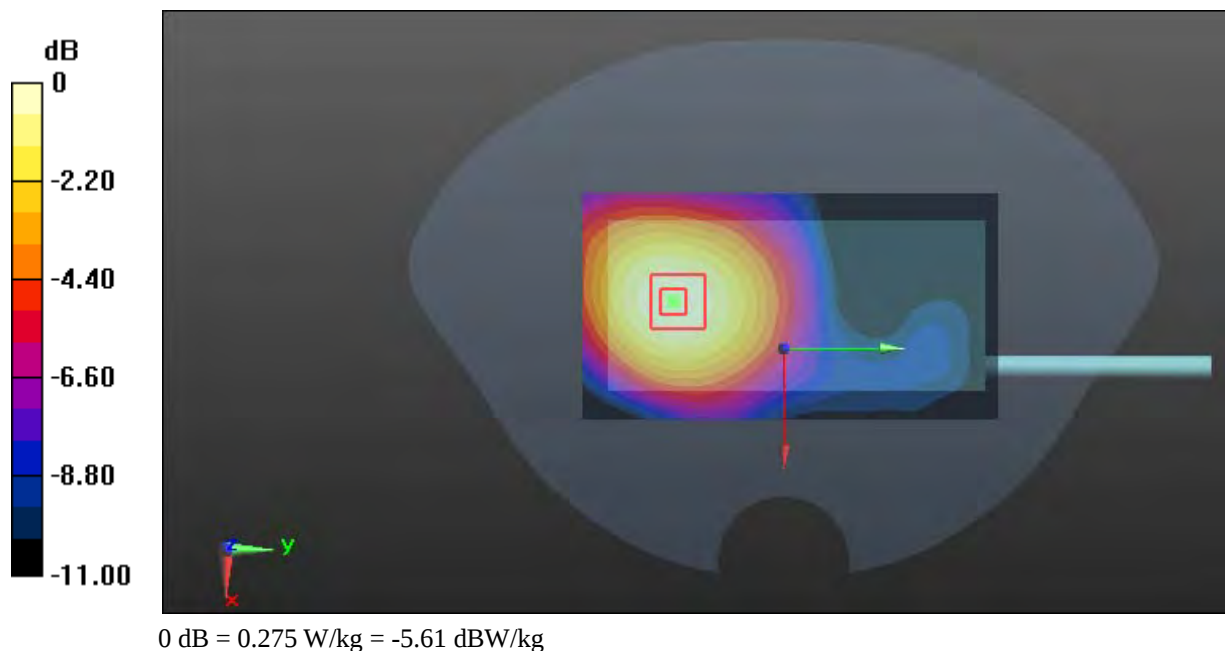

Test Plot 106#: LTE Band 4_Face Up_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.251$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.318 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.942 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.297 W/kg

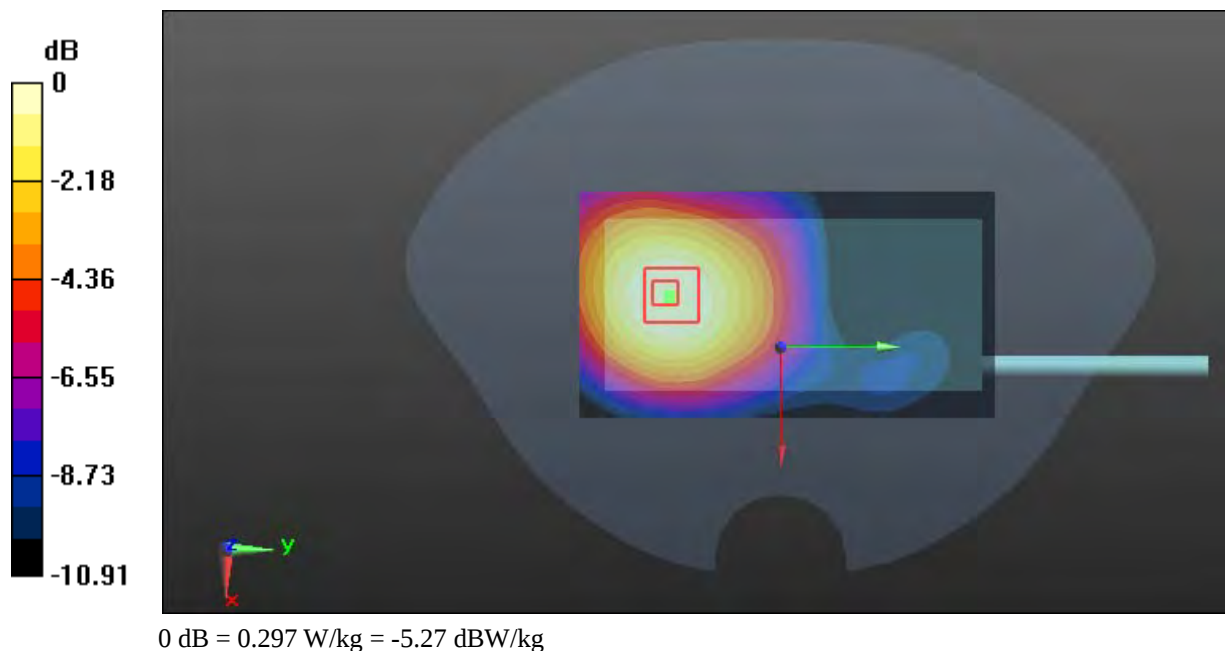

Test Plot 107#: LTE Band 4_Face Up_High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.347$ S/m; $\epsilon_r = 41.091$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.291 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.353 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.290 W/kg

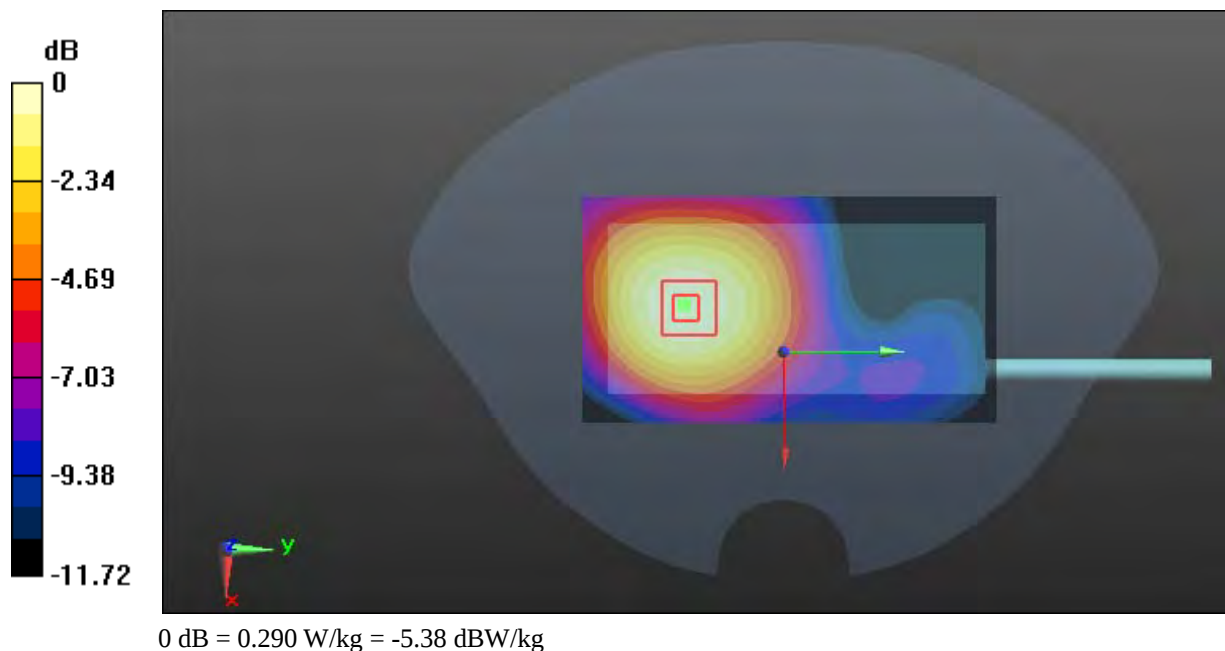

Test Plot 108#: LTE Band 4_Face Up_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.251$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.241 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.955 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.236 W/kg

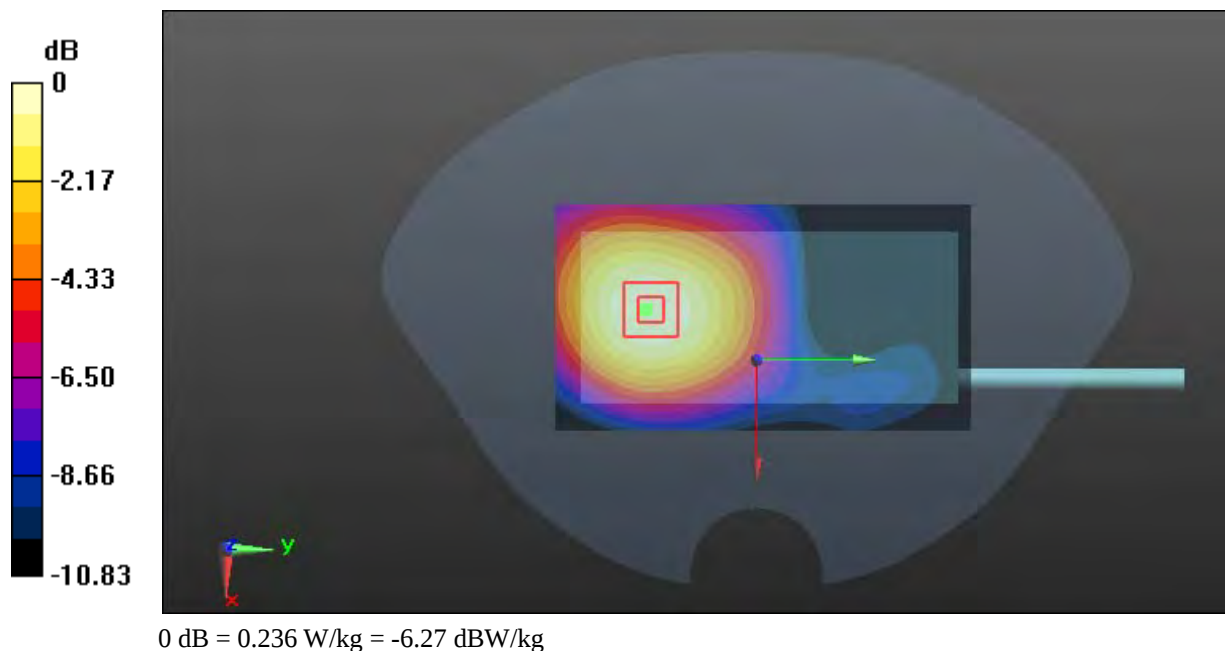

Test Plot 109#: LTE Band 4_Body Front _Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.822$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.575 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.53 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.723 W/kg

SAR(1 g) = 0.460 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.499 W/kg

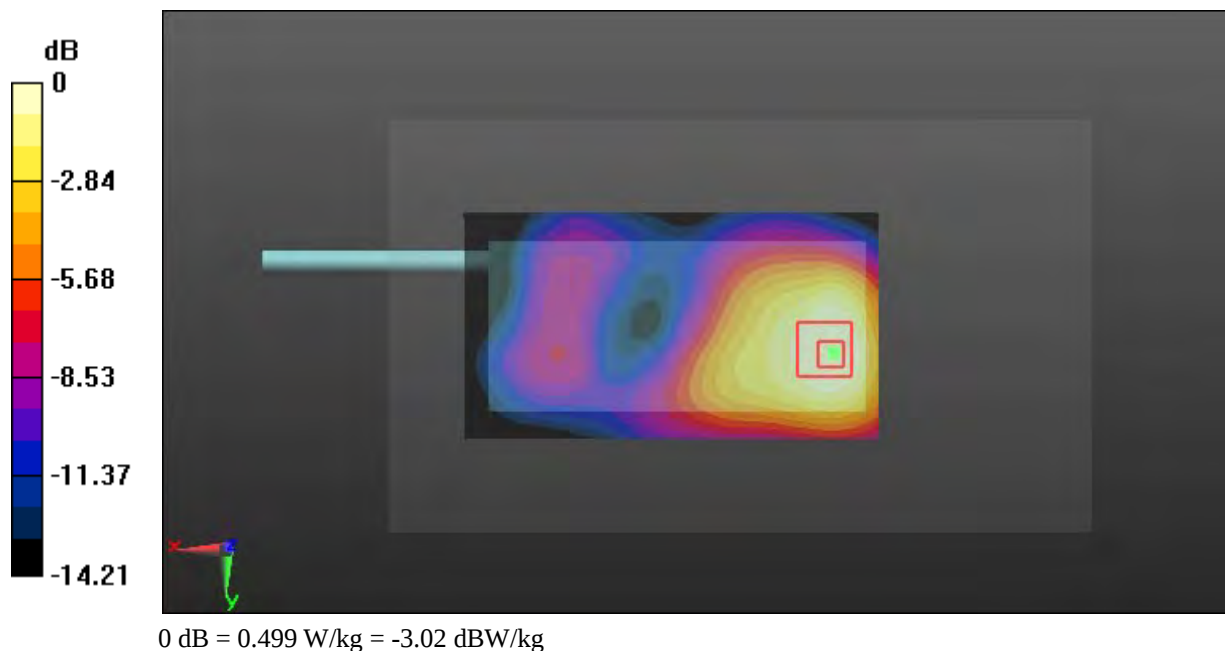

Test Plot 110#: LTE Band 4_Body Front _Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.822$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.442 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.70 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 0.432 W/kg

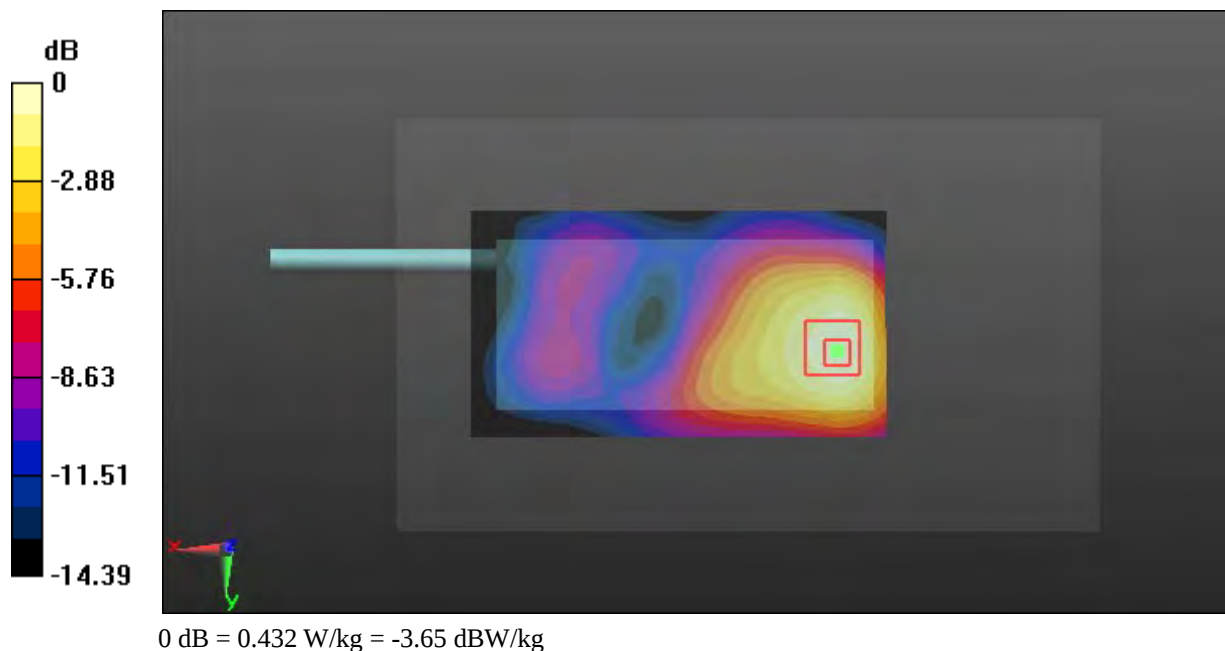

Test Plot 111#: LTE Band 4_Body Back_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.822$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.328 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.62 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.326 W/kg

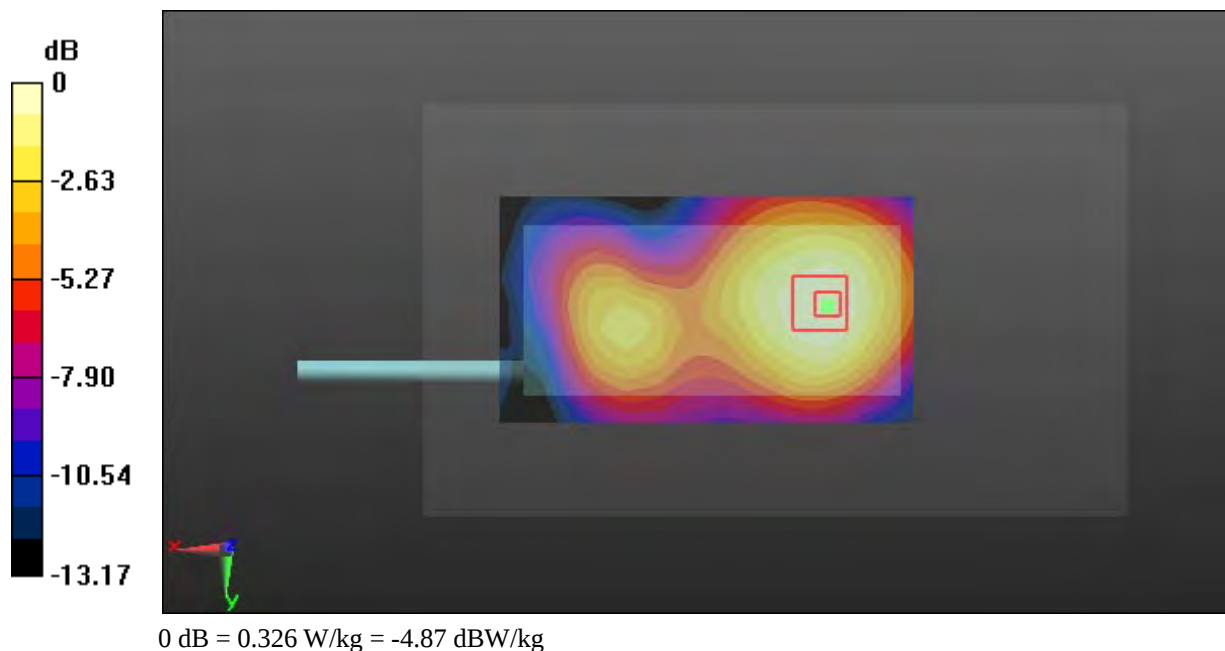

Test Plot 112#: LTE Band 4_Body Back_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.822$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.272 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.49 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.264 W/kg

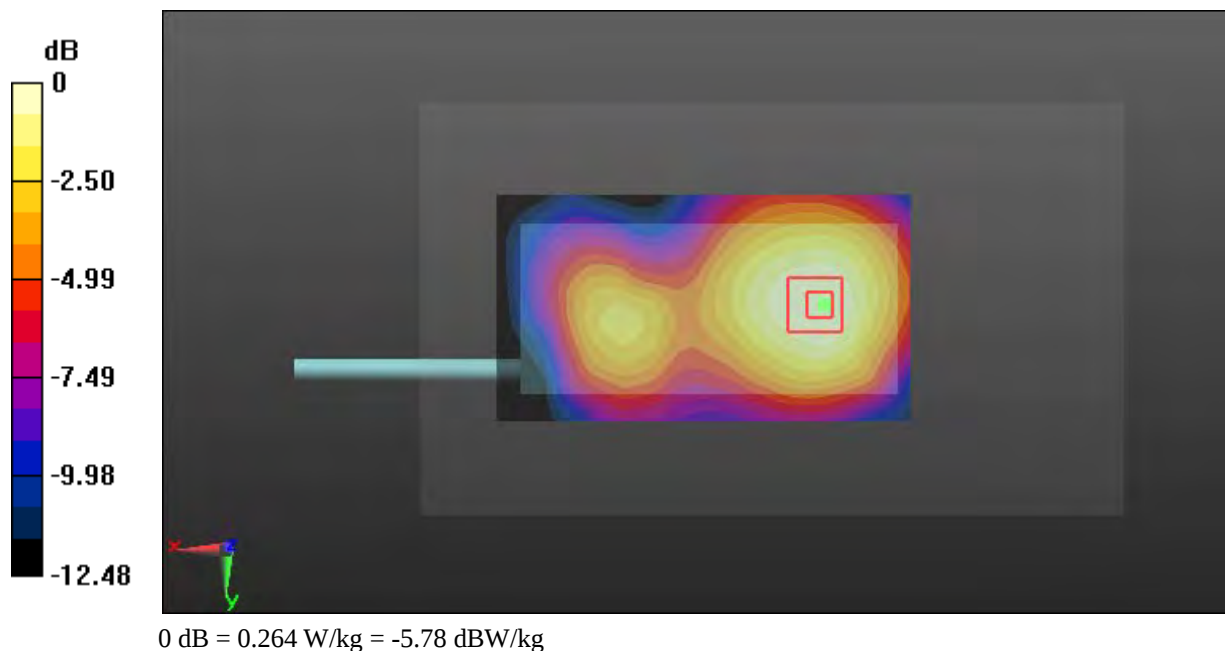

Test Plot 113#: LTE Band 4_Body Left_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.822$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.414 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.31 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 0.410 W/kg

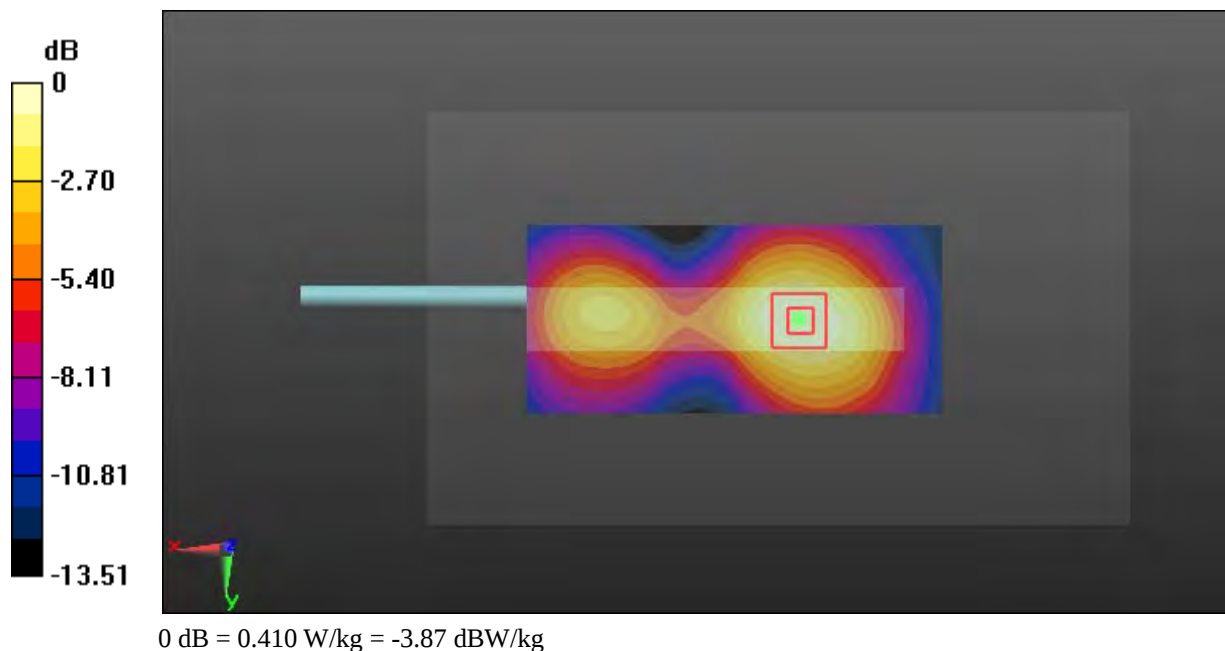

Test Plot 114#: LTE Band 4_Body Left_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.822$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.312 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.77 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.437 W/kg

SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.306 W/kg

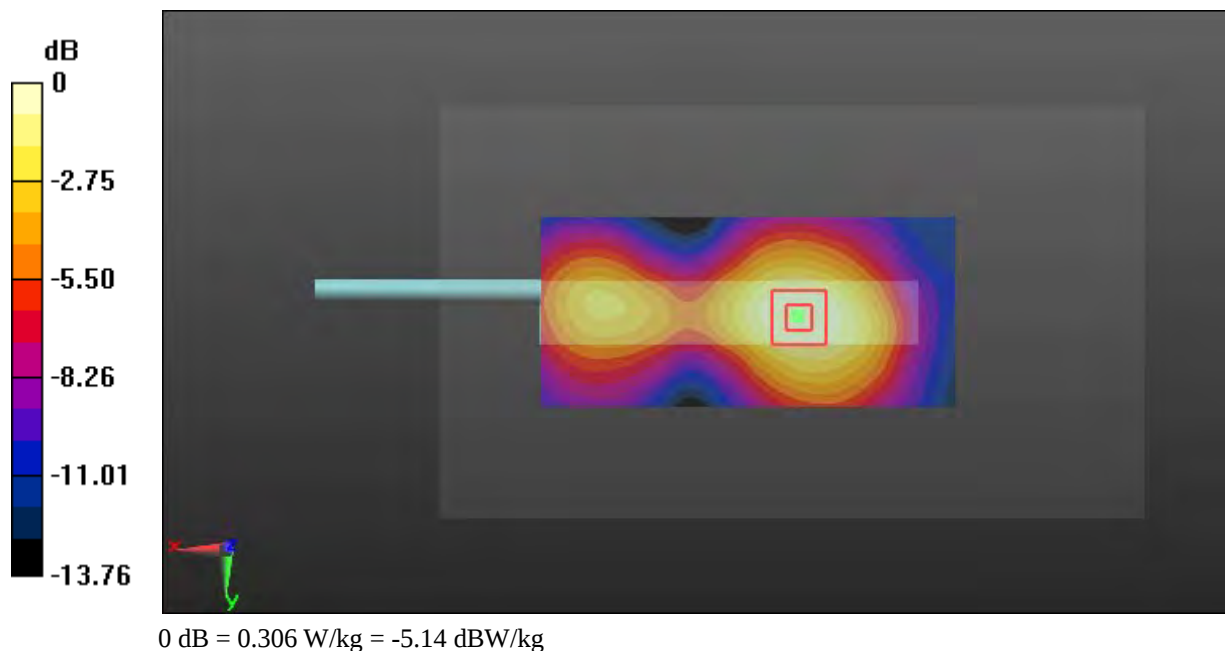

Test Plot 115#: LTE Band 4_Body Right_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.822$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.110 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.704 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.166 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

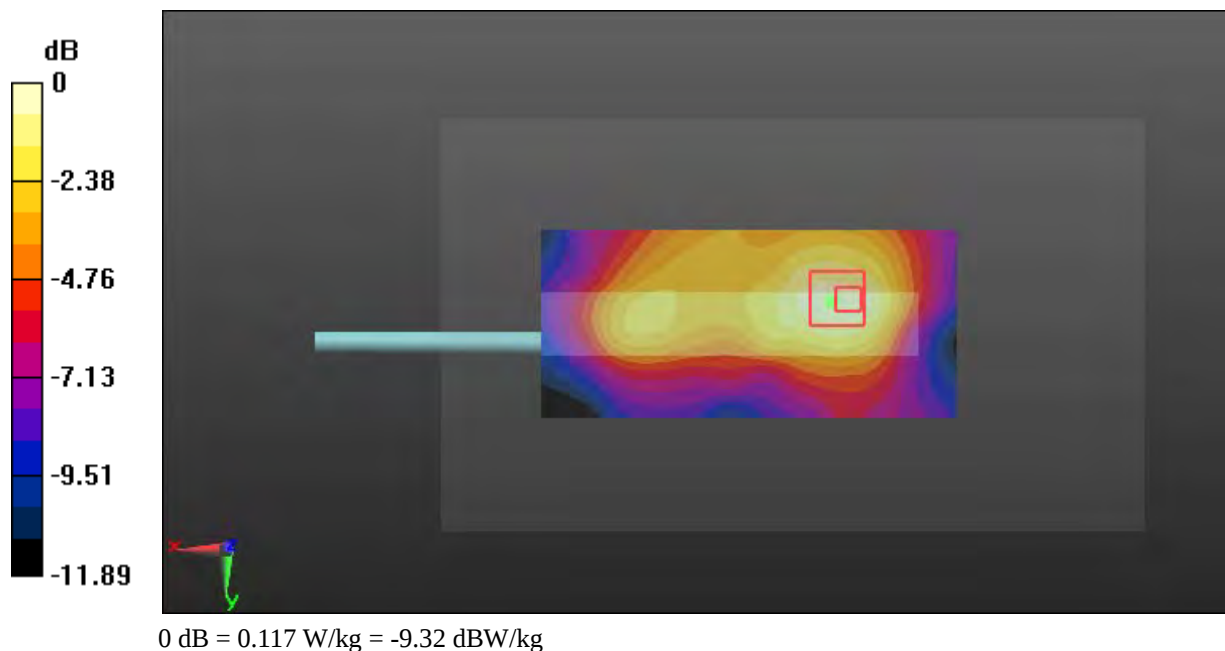

Test Plot 116#: LTE Band 4_Body Right_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.822$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0937 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.259 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0937 W/kg

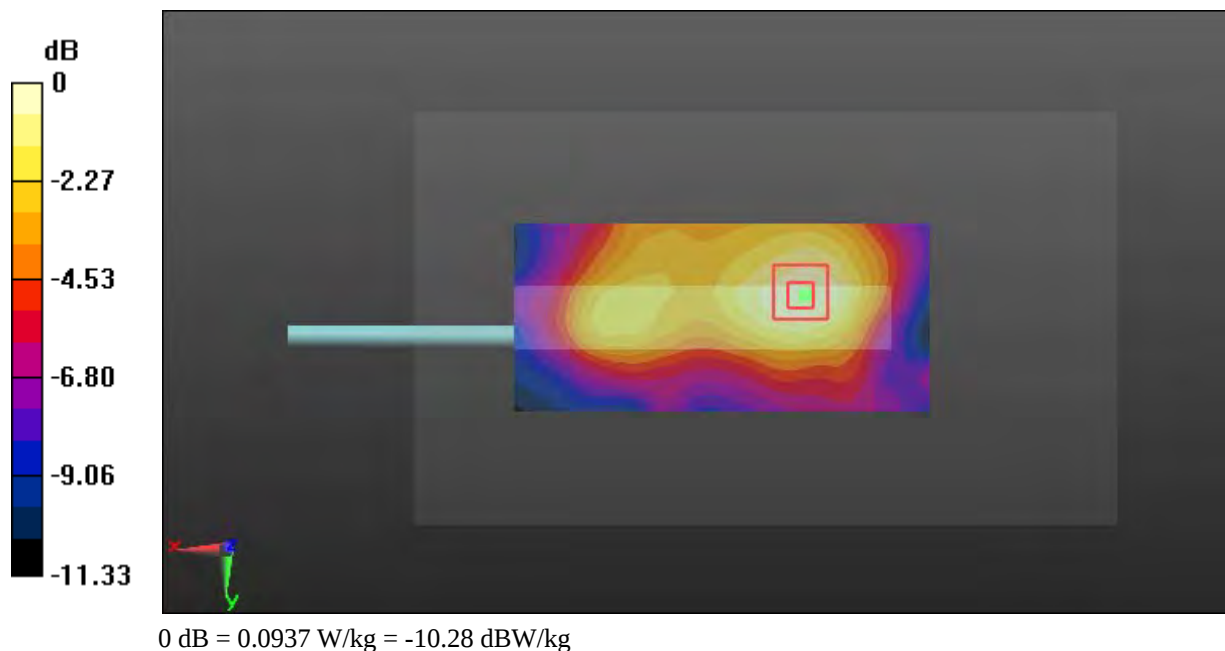

Test Plot 117#: LTE Band 4_Body Bottom_Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1720 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 52.843$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.757 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.42 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.354 W/kg

Maximum value of SAR (measured) = 0.690 W/kg

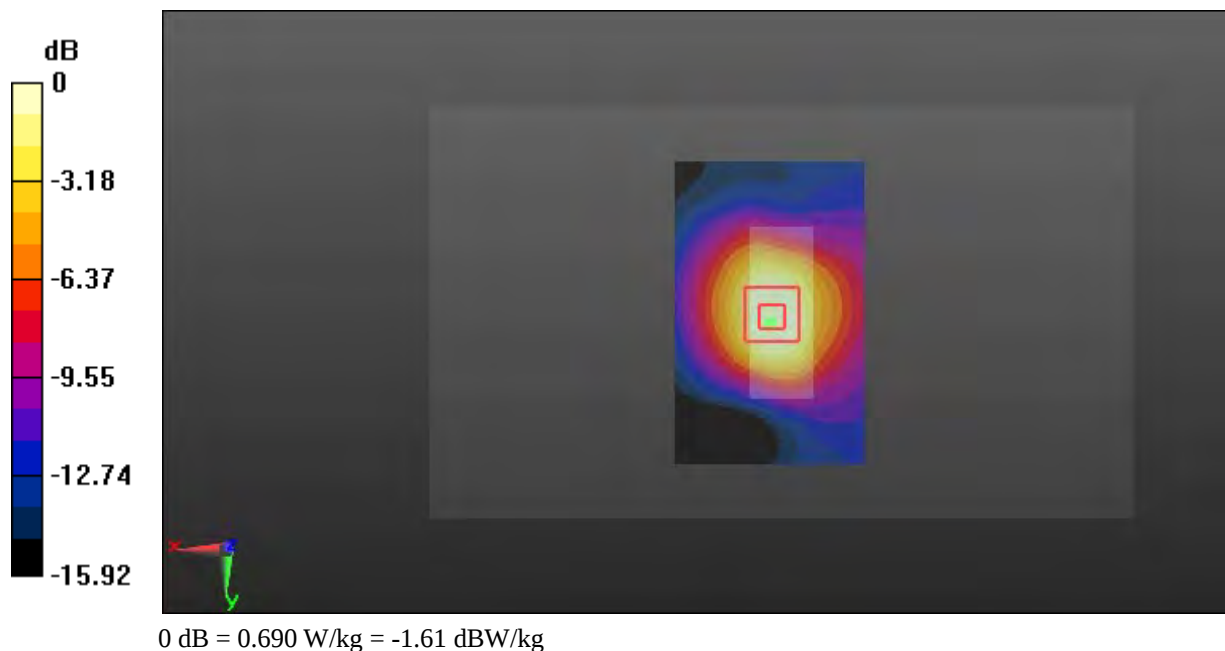

Test Plot 118#: LTE Band 4_Body Bottom_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.822$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.757 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.69 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.364 W/kg

Maximum value of SAR (measured) = 0.717 W/kg



Test Plot 119#: LTE Band 4_Body Bottom_High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.682$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.714 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.96 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.623 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 0.681 W/kg

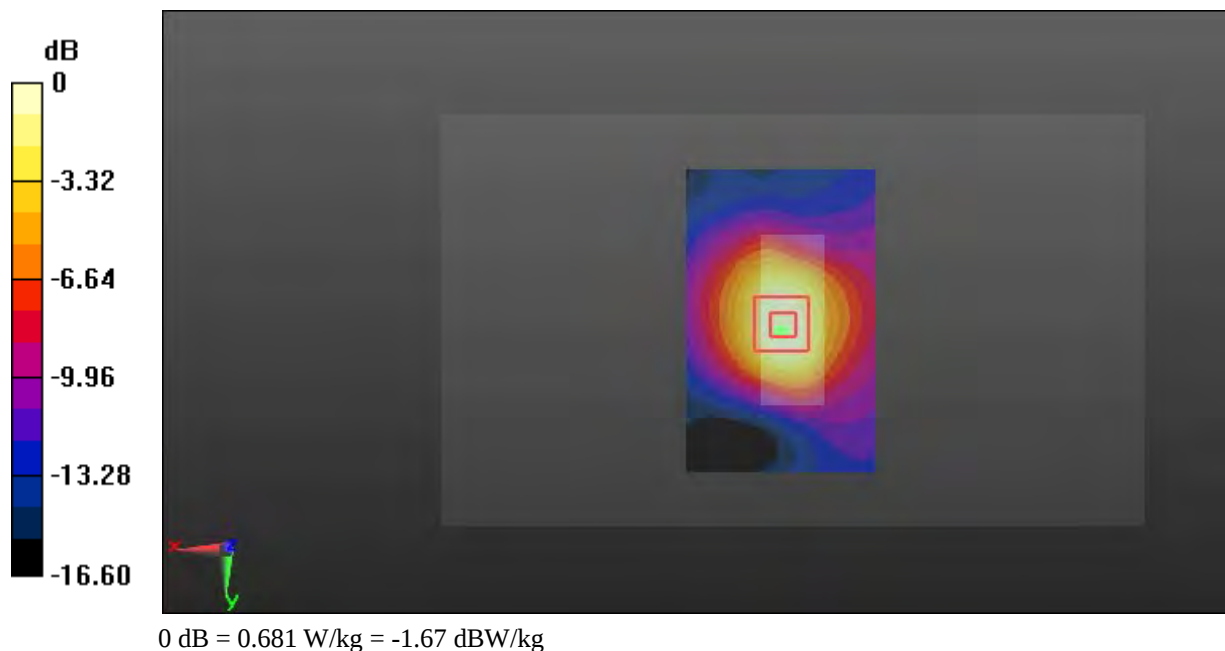

Test Plot 120#: LTE Band 4_Body Bottom_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.822$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.575 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.18 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.871 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.279 W/kg

Maximum value of SAR (measured) = 0.543 W/kg

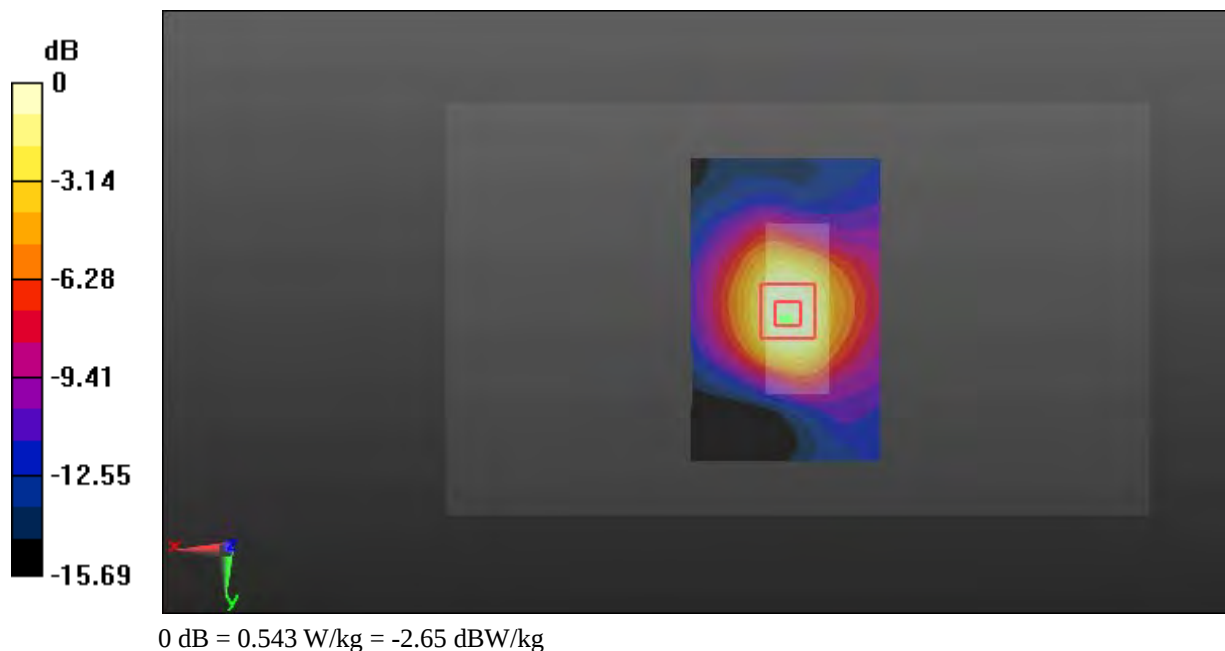

Test Plot 121#: LTE Band 5_Head Left Cheek_Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 829 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 829$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 42.387$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.227 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.389 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

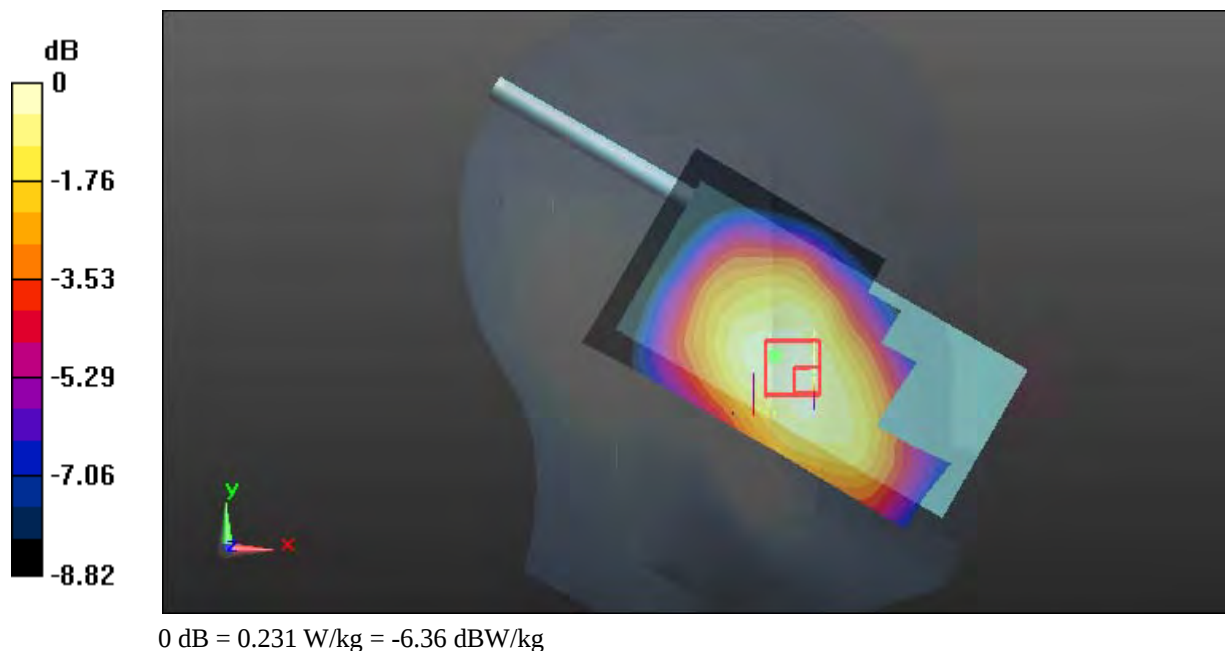

Test Plot 122#: LTE Band 5_Head Left Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 42.337$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.277 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.701 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.293 W/kg

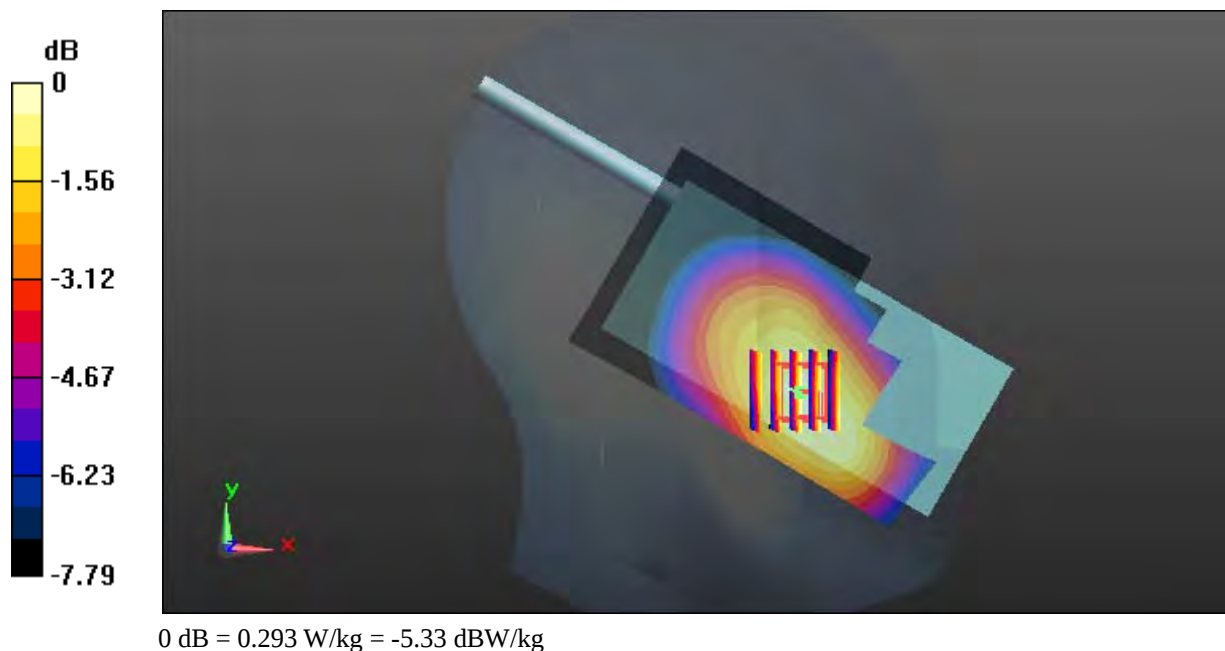

Test Plot 123#: LTE Band 5_Head Left Cheek_High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 844 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 844$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.276$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.244 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.740 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

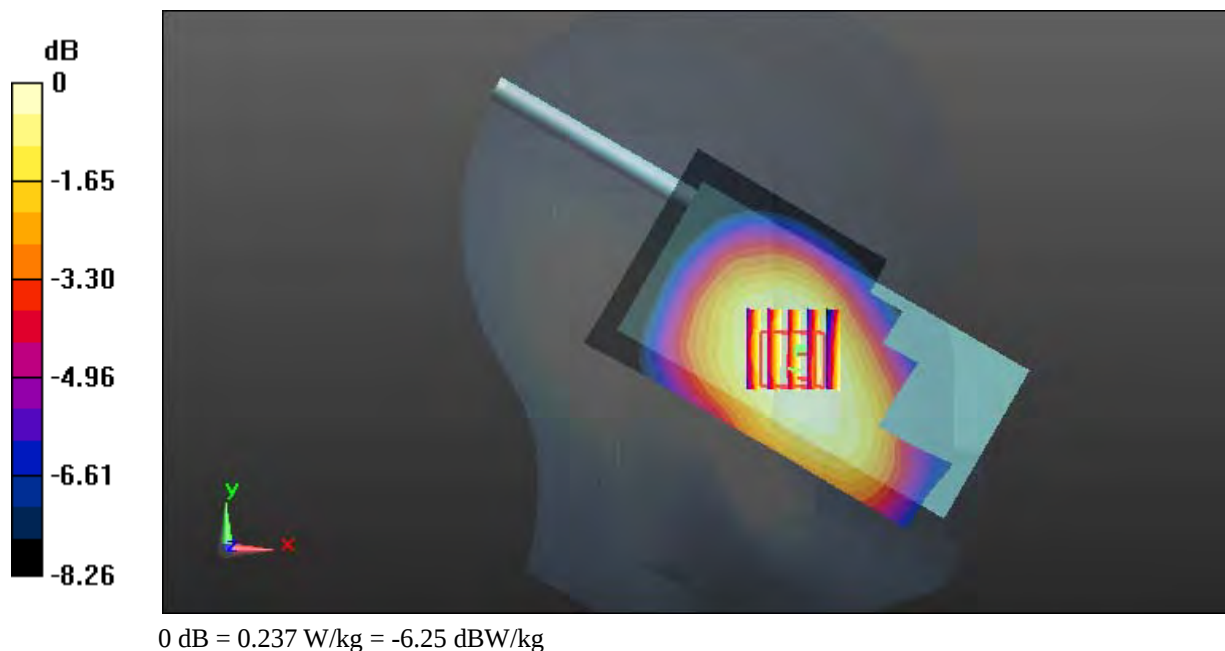

Test Plot 124#: LTE Band 5_Head Left Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 42.337$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.229 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.845 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.232 W/kg

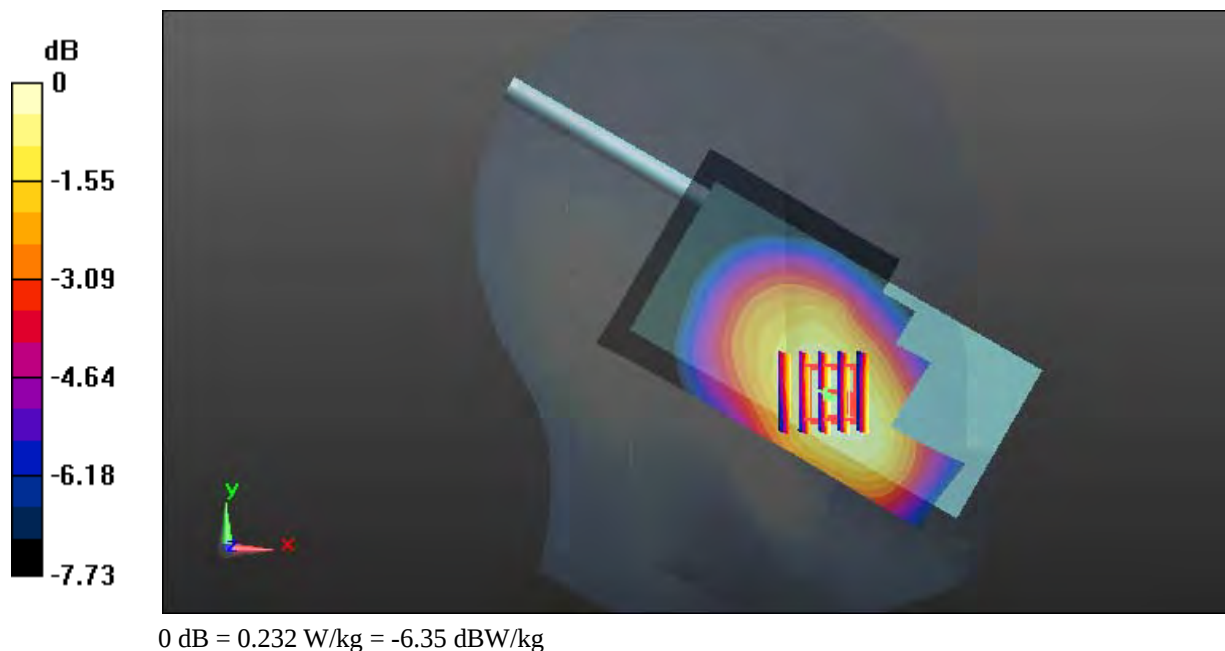

Test Plot 125#: LTE Band 5_Head Left Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 42.337$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.184 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.26 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

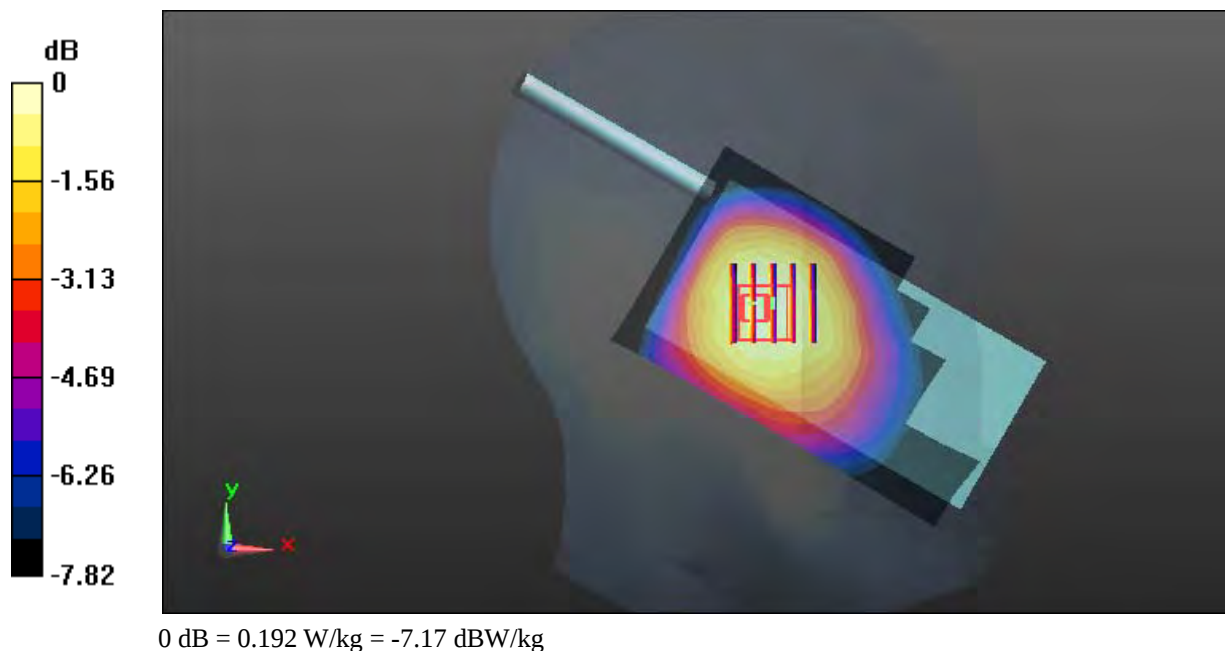

Test Plot 126#: LTE Band 5_Head Left Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 42.337$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.149 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.04 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.153 W/kg

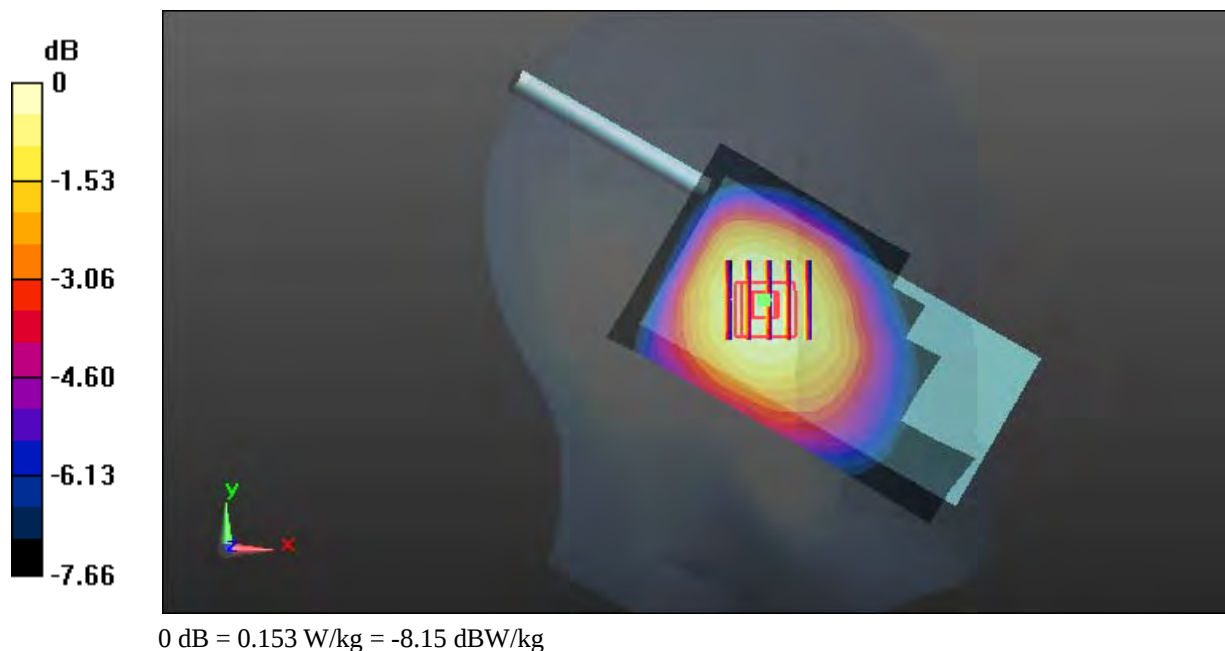

Test Plot 127#: LTE Band 5_Head Right Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 42.337$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.290 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.18 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.342 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.220 W/kg

Maximum value of SAR (measured) = 0.287 W/kg

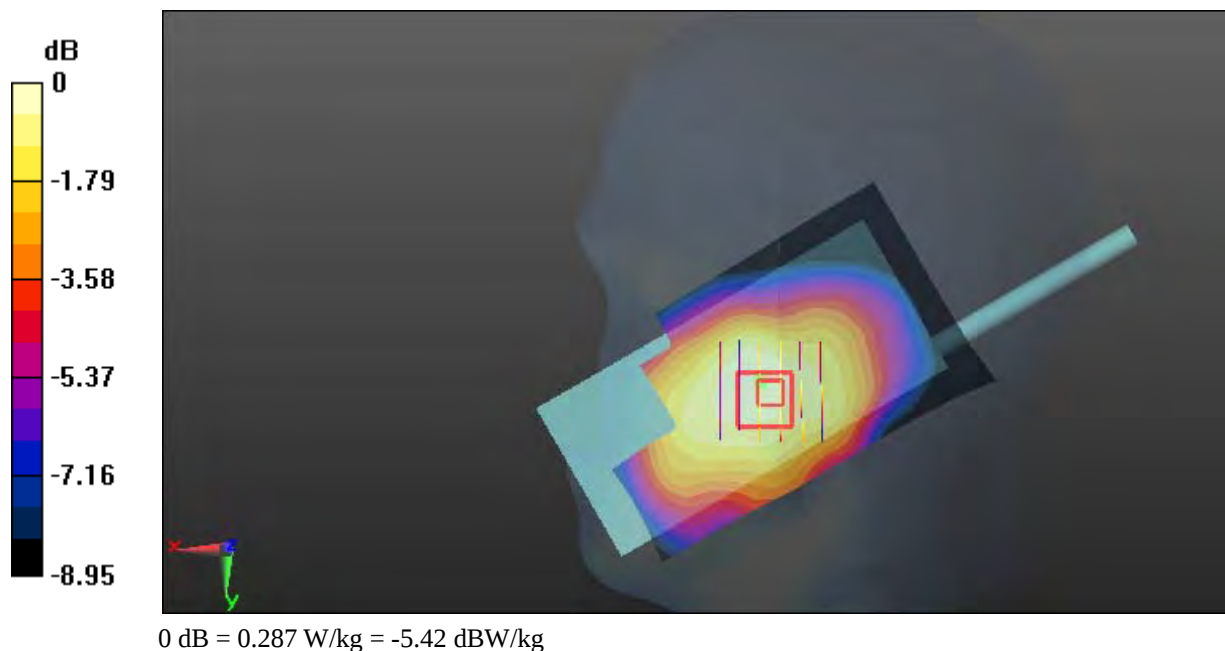

Test Plot 128#: LTE Band 5_Head Right Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 42.337$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.221 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.943 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.170 W/kg

Maximum value of SAR (measured) = 0.221 W/kg

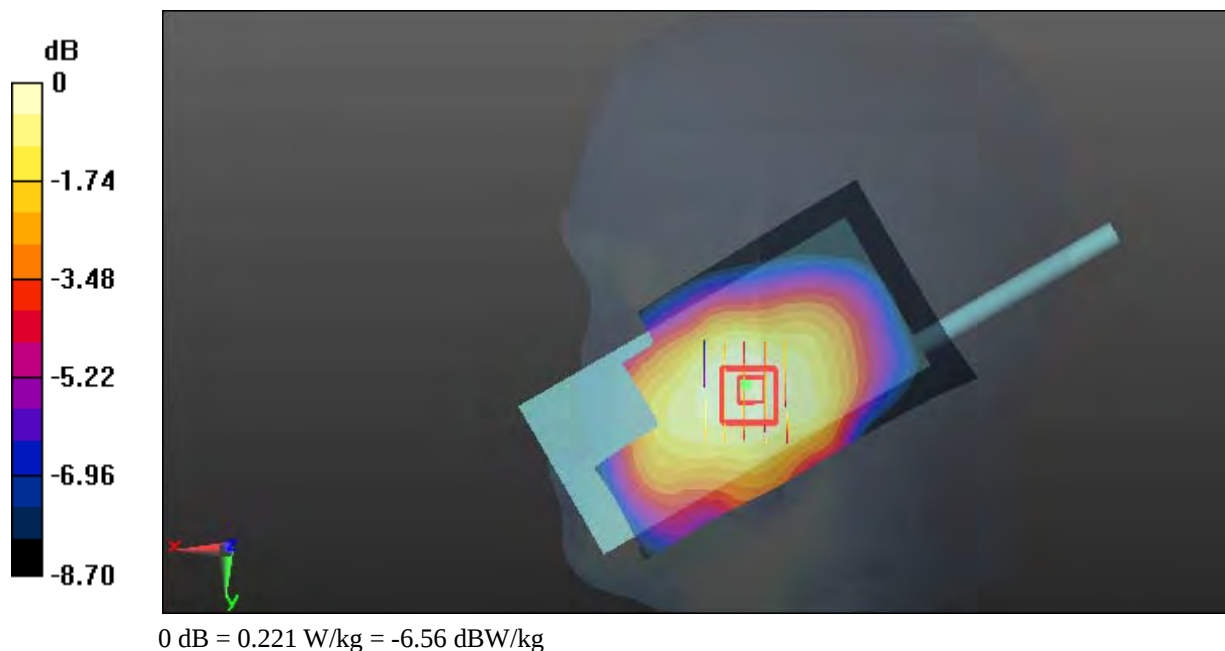

Test Plot 129#: LTE Band 5_Head Right Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 42.337$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.139 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.09 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.172 W/kg

SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.148 W/kg

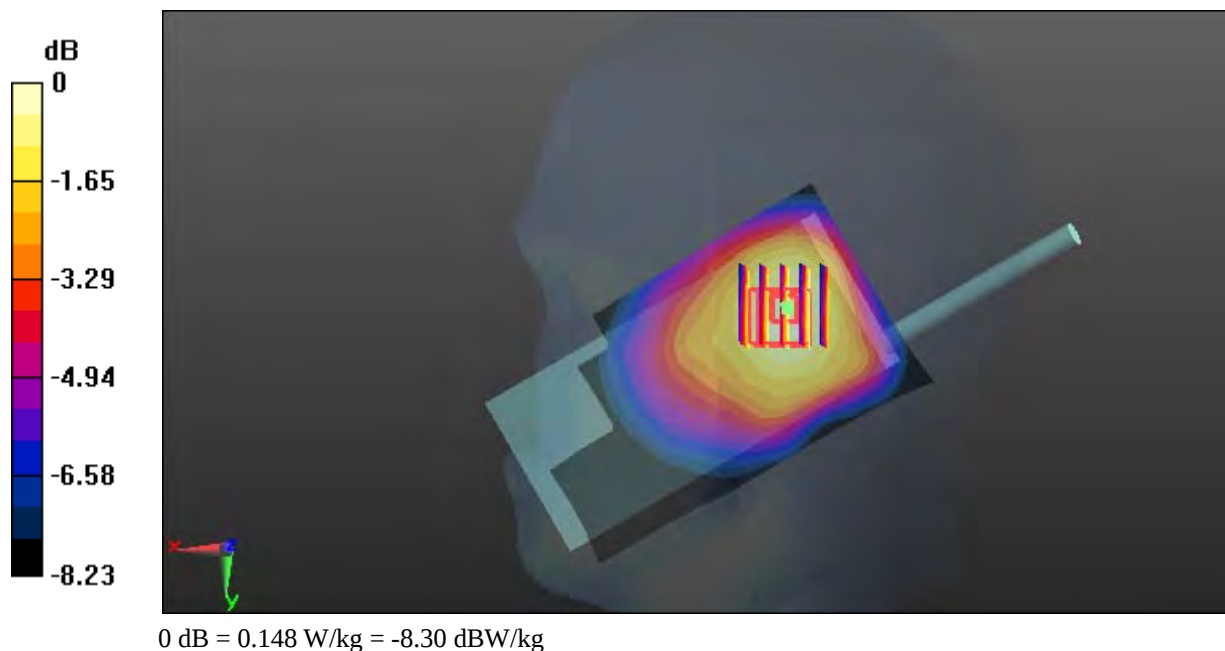

Test Plot 130#: LTE Band 5_Head Right Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 42.337$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.112 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.86 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

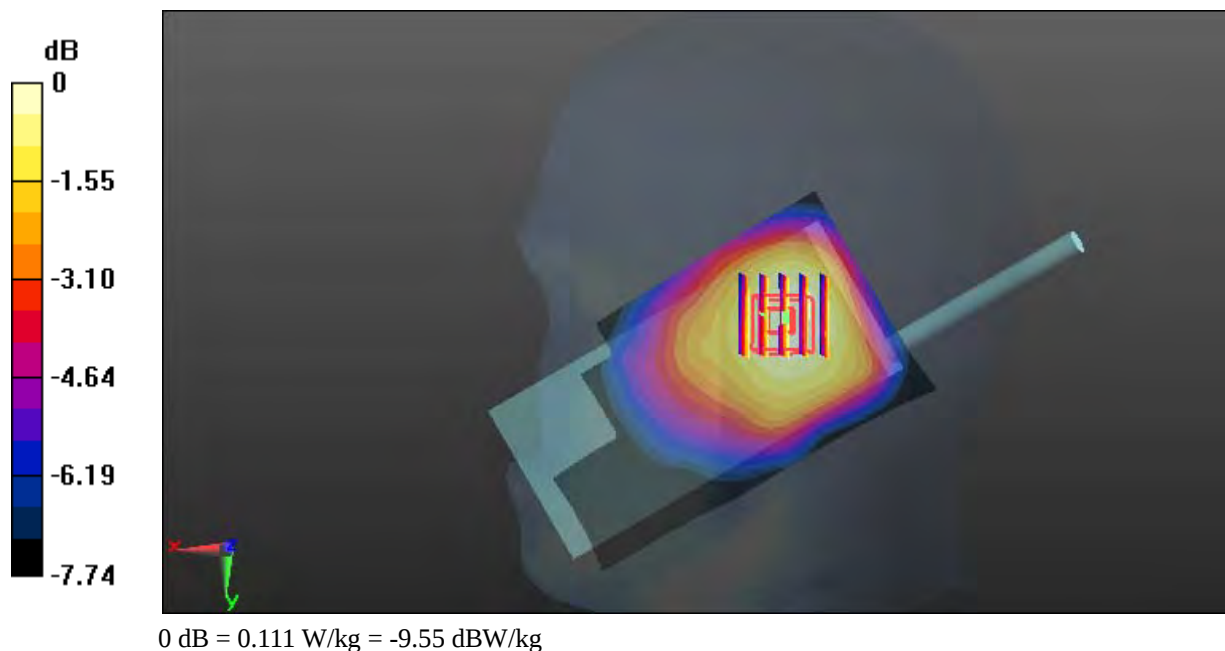

Test Plot 131#: LTE Band 5_Face Up_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 42.337$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0630 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.254 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0575 W/kg

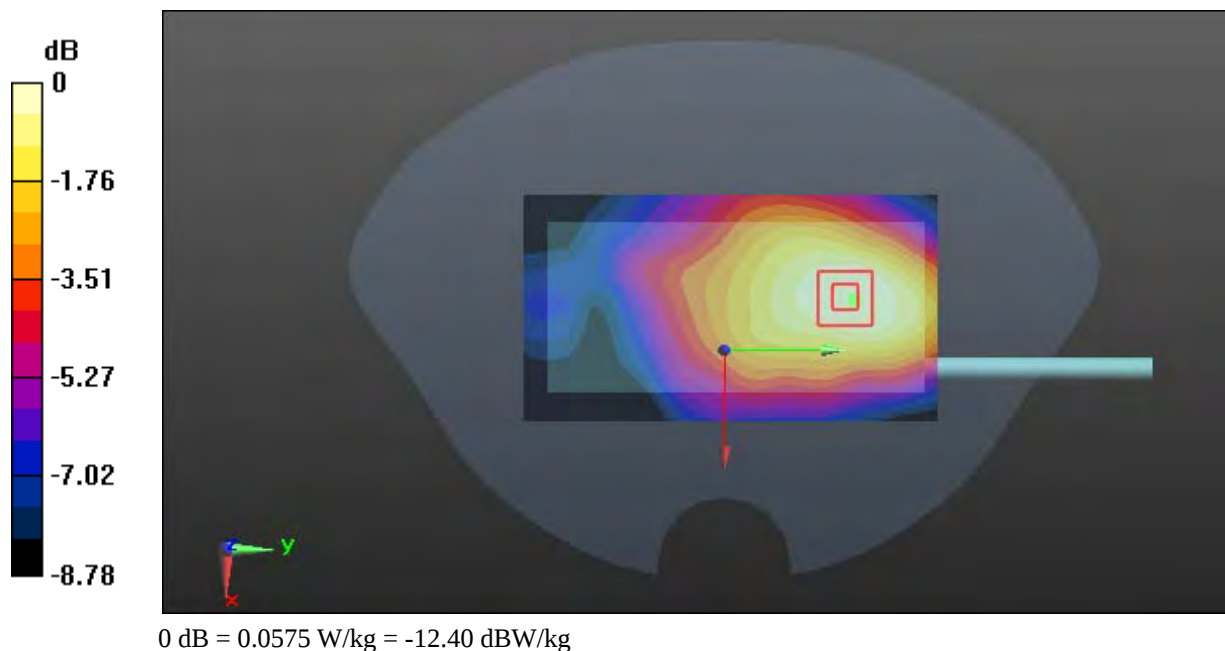

Test Plot 132#: LTE Band 5_Face Up_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 42.337$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0490 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.536 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0650 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0494 W/kg

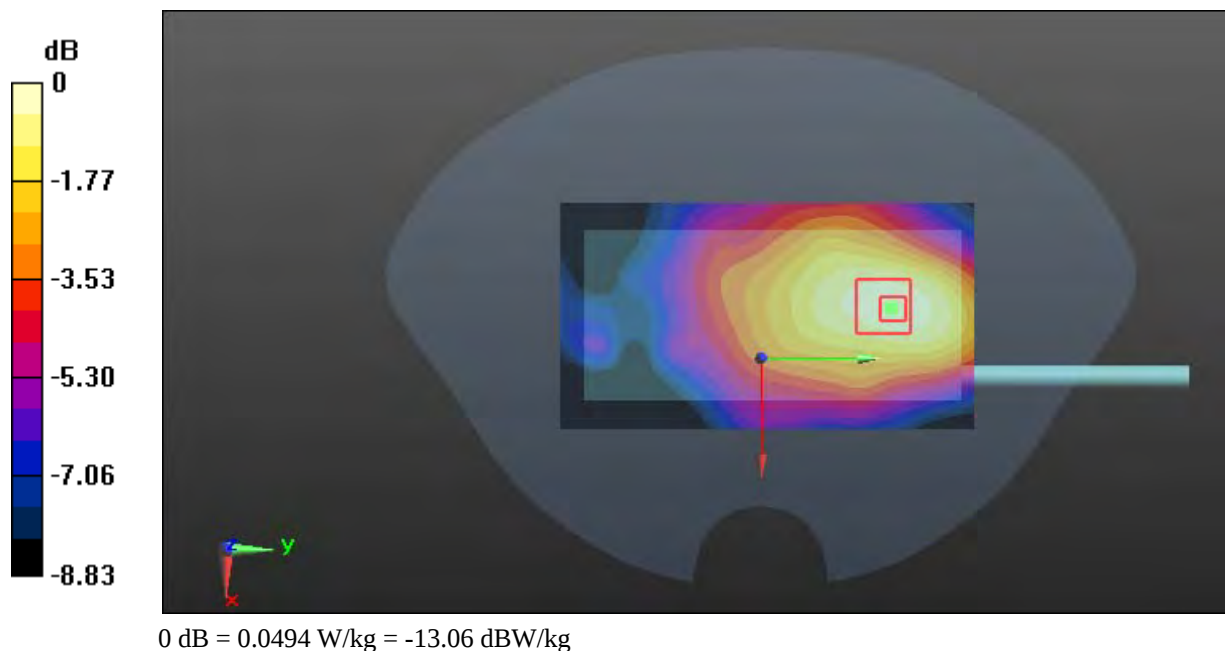

Test Plot 133#: LTE Band 5_Body Front _Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 829 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 829$ MHz; $\sigma = 0.951$ S/m; $\epsilon_r = 57.369$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.417 W/kg


Zoom Scan (12x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.22 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.526 W/kg

SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 0.398 W/kg

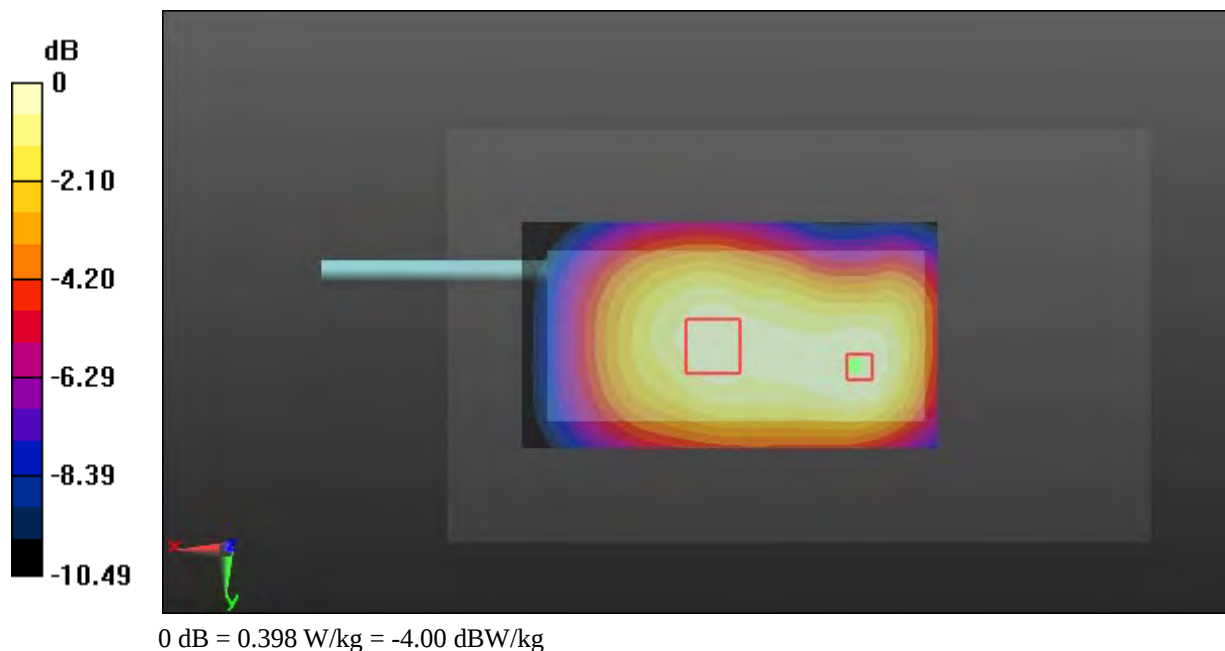

Test Plot 134#: LTE Band 5_Body Front _Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.279$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.472 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.52 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.299 W/kg

Maximum value of SAR (measured) = 0.444 W/kg

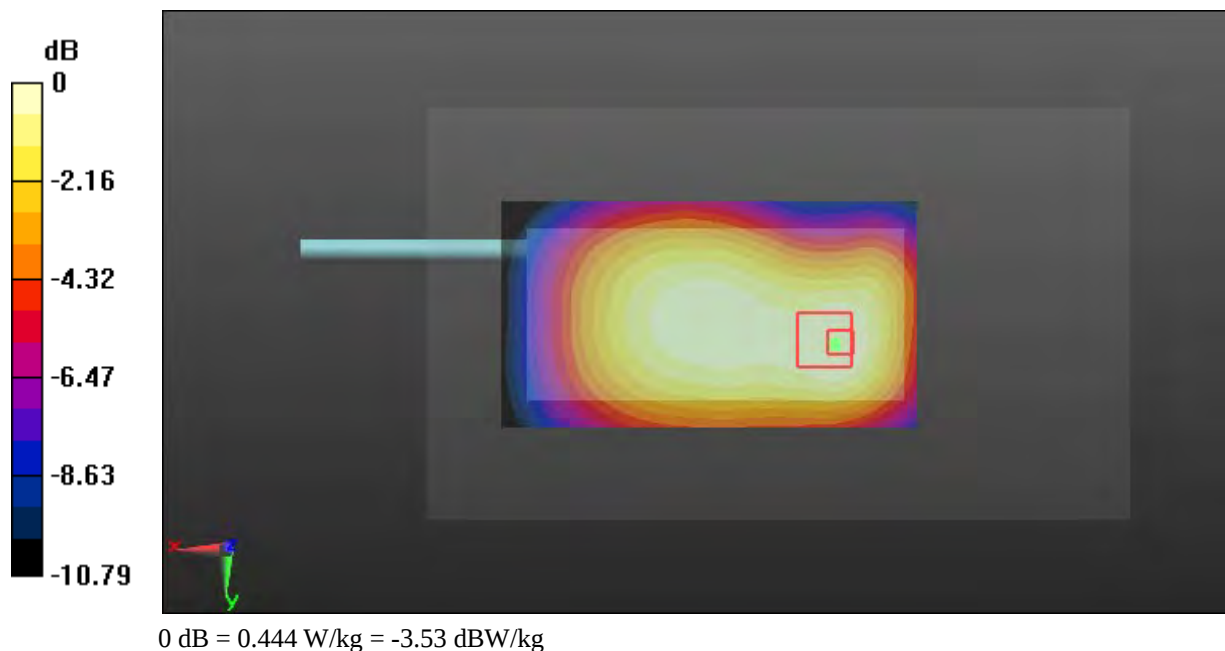

Test Plot 135#: LTE Band 5_Body Front _High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 844 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 844$ MHz; $\sigma = 0.961$ S/m; $\epsilon_r = 57.174$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.422 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.21 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.645 W/kg

SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.398 W/kg

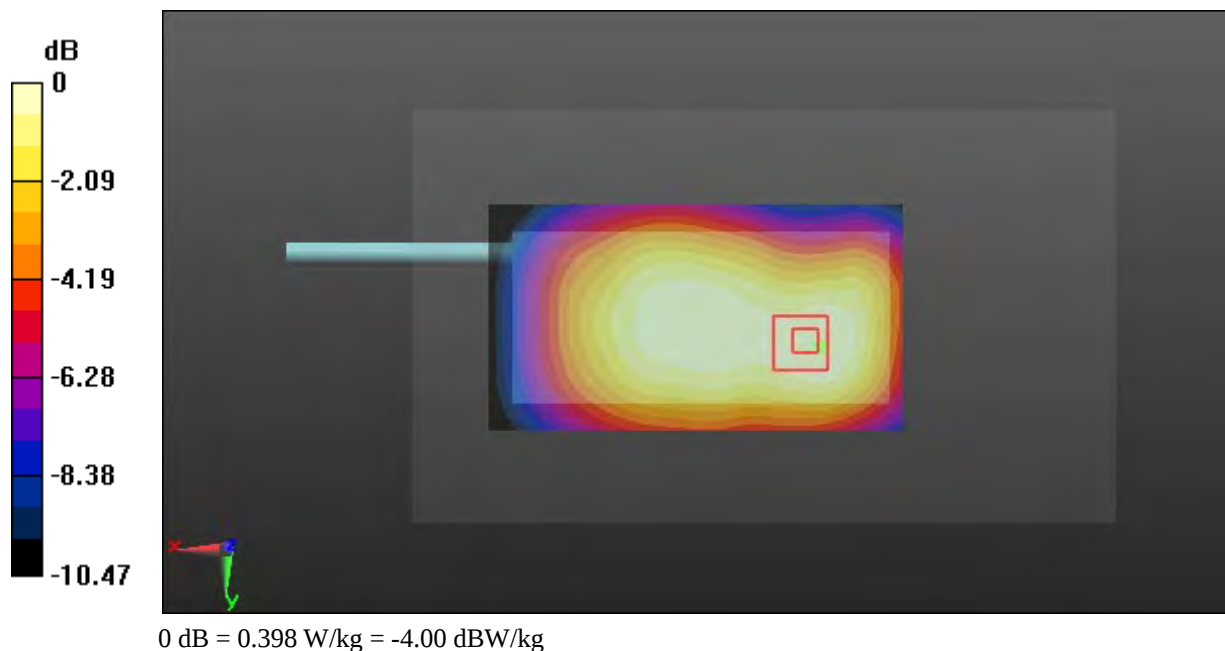

Test Plot 136#: LTE Band 5_Body Front _Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.279$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.332 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.81 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.325 W/kg

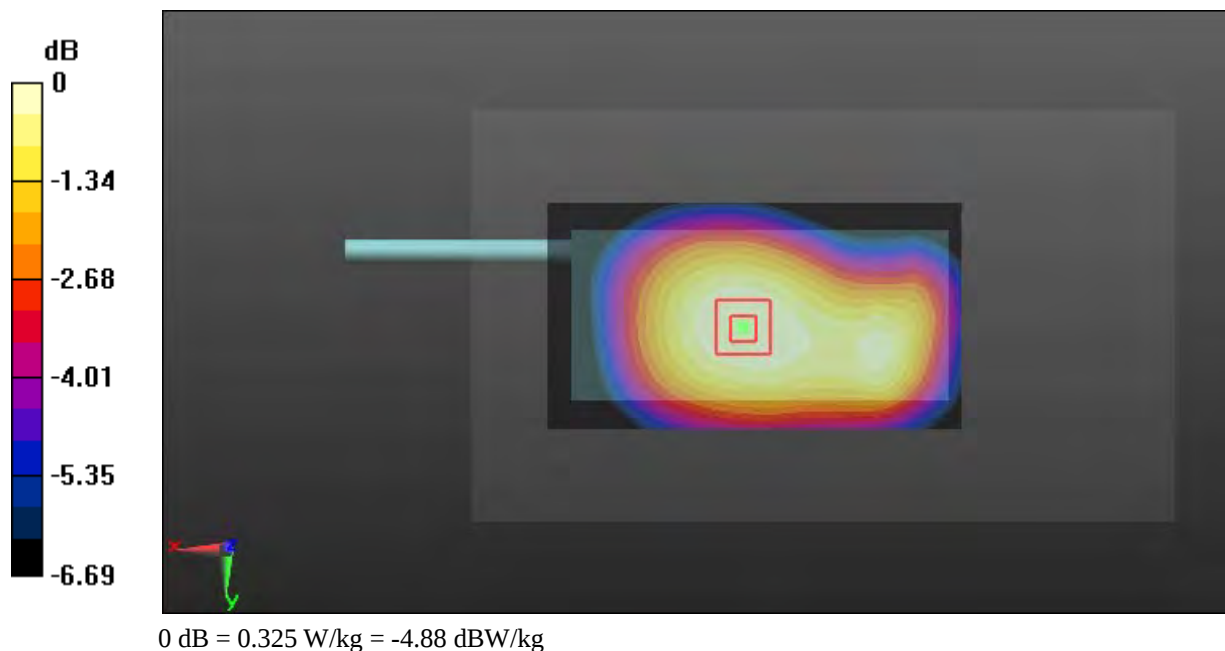

Test Plot 137#: LTE Band 5_Body Back_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.279$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.198 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.02 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.205 W/kg

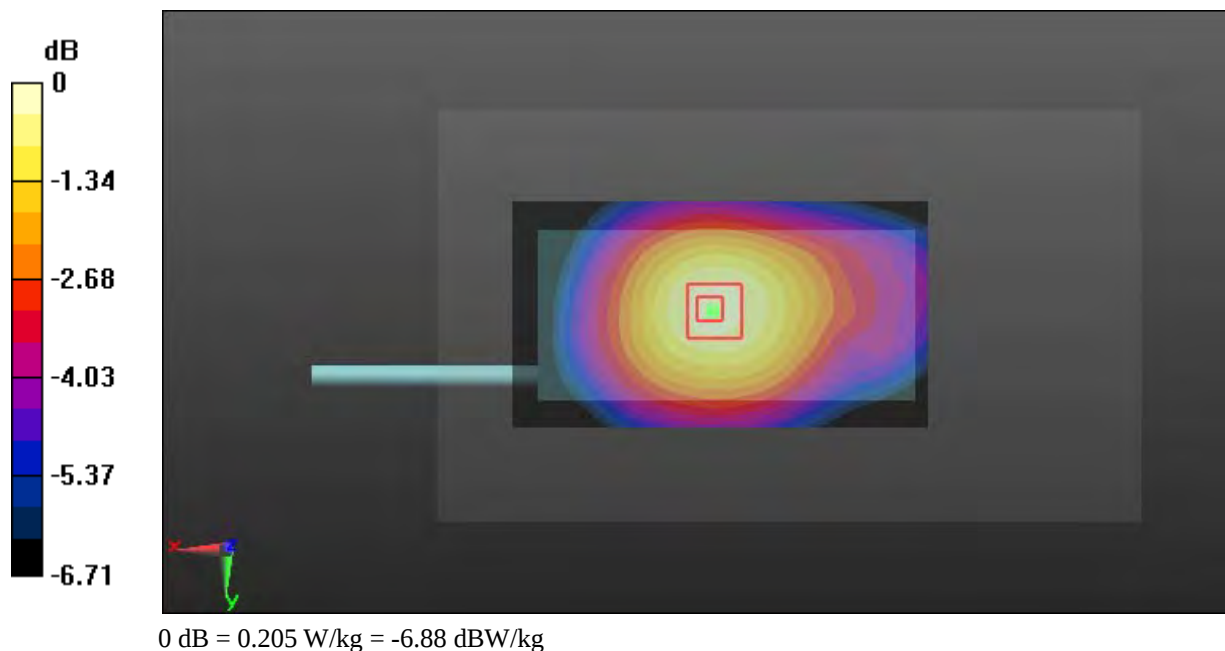

Test Plot 138#: LTE Band 5_Body Back_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.279$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.167 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.58 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 0.163 W/kg

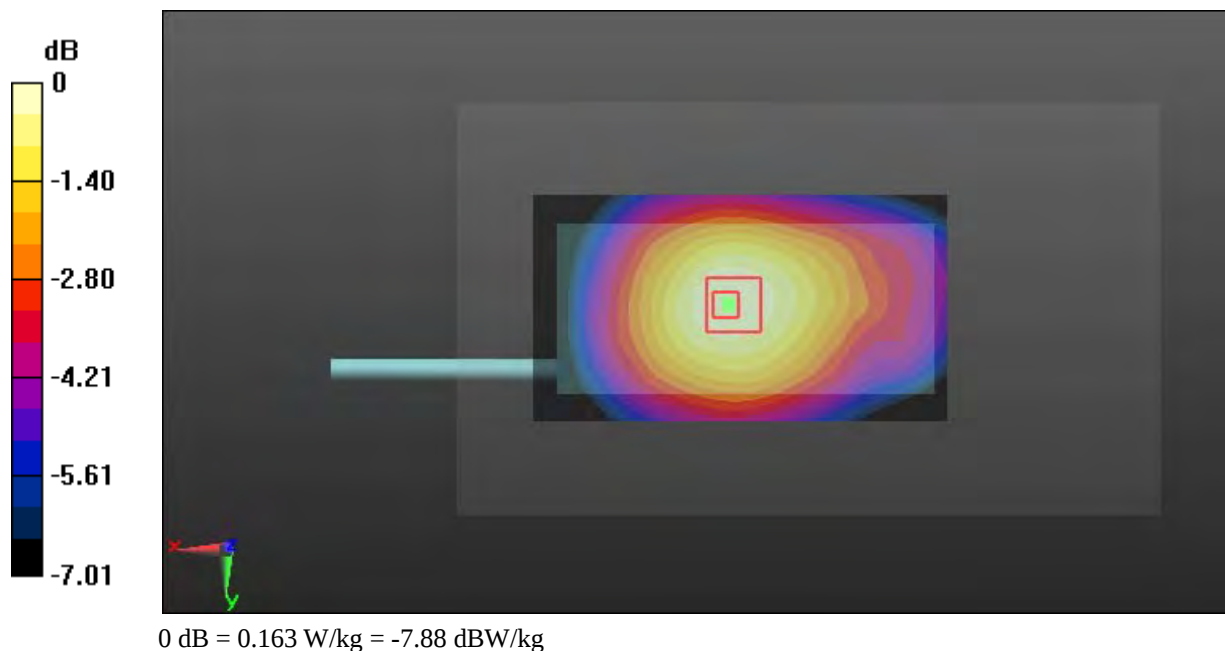

Test Plot 139#: LTE Band 5_Body Left_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.279$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.255 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.58 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.250 W/kg

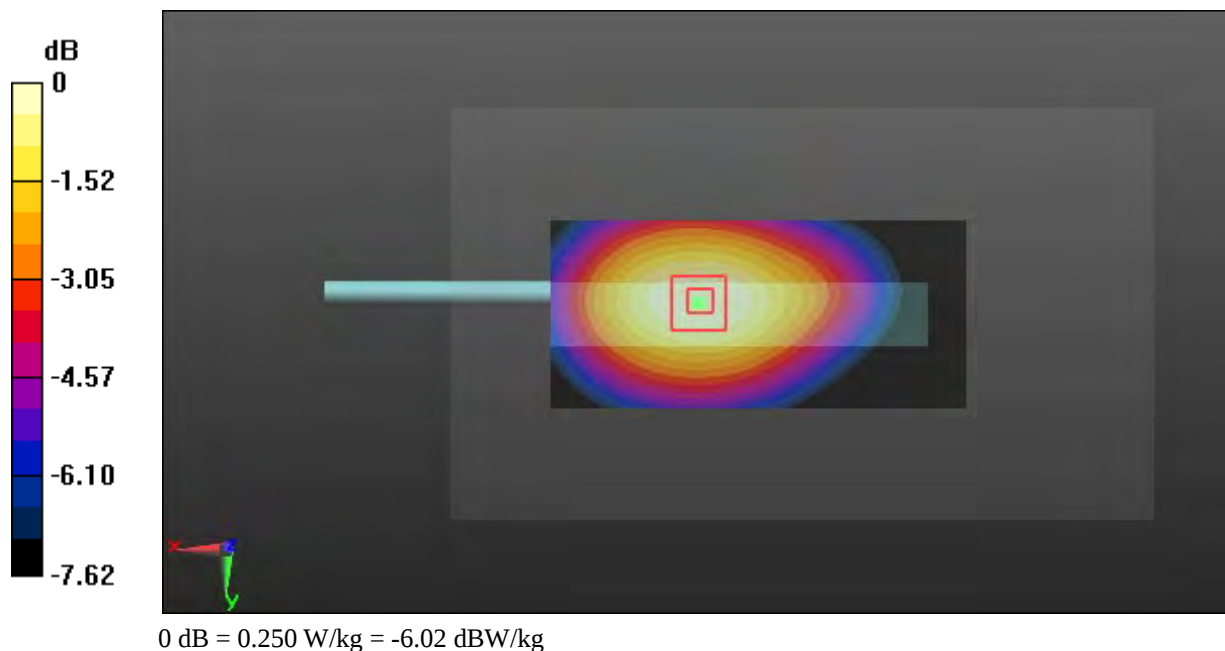

Test Plot 140#: LTE Band 5_Body Left_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.279$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.194 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.84 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.222 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.187 W/kg

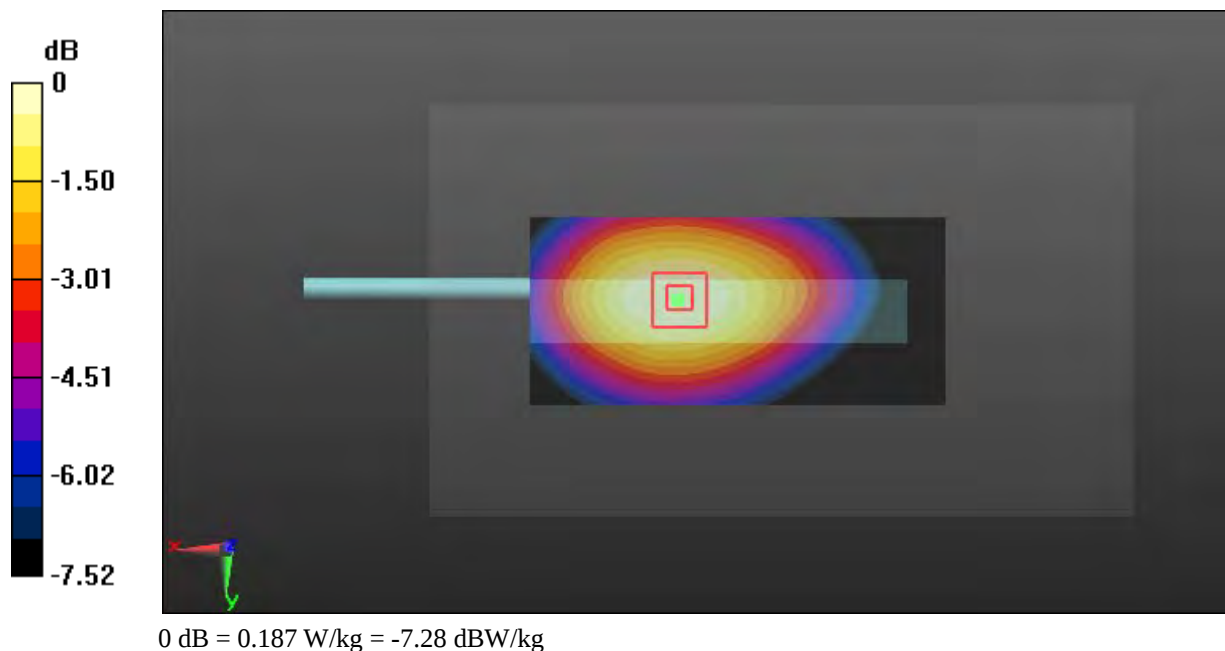

Test Plot 141#: LTE Band 5_Body Right_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.279$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.293 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.81 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.350 W/kg

SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 0.295 W/kg

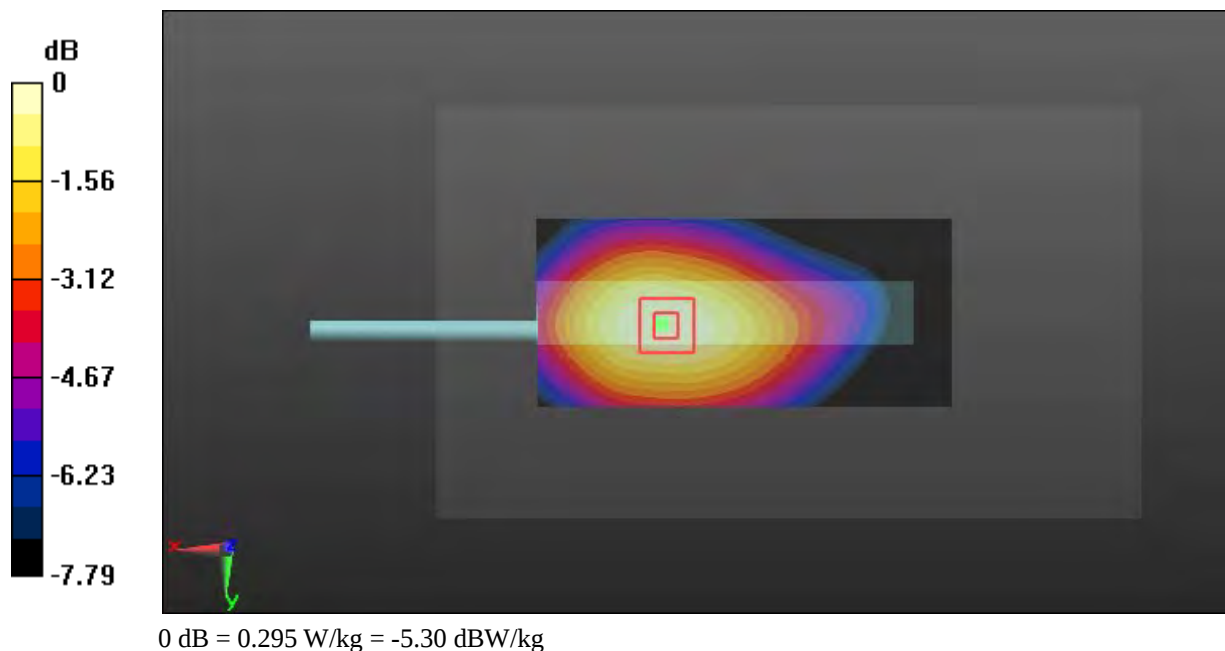

Test Plot 142#: LTE Band 5_Body Right_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.279$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.242 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.65 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.171 W/kg

Maximum value of SAR (measured) = 0.238 W/kg

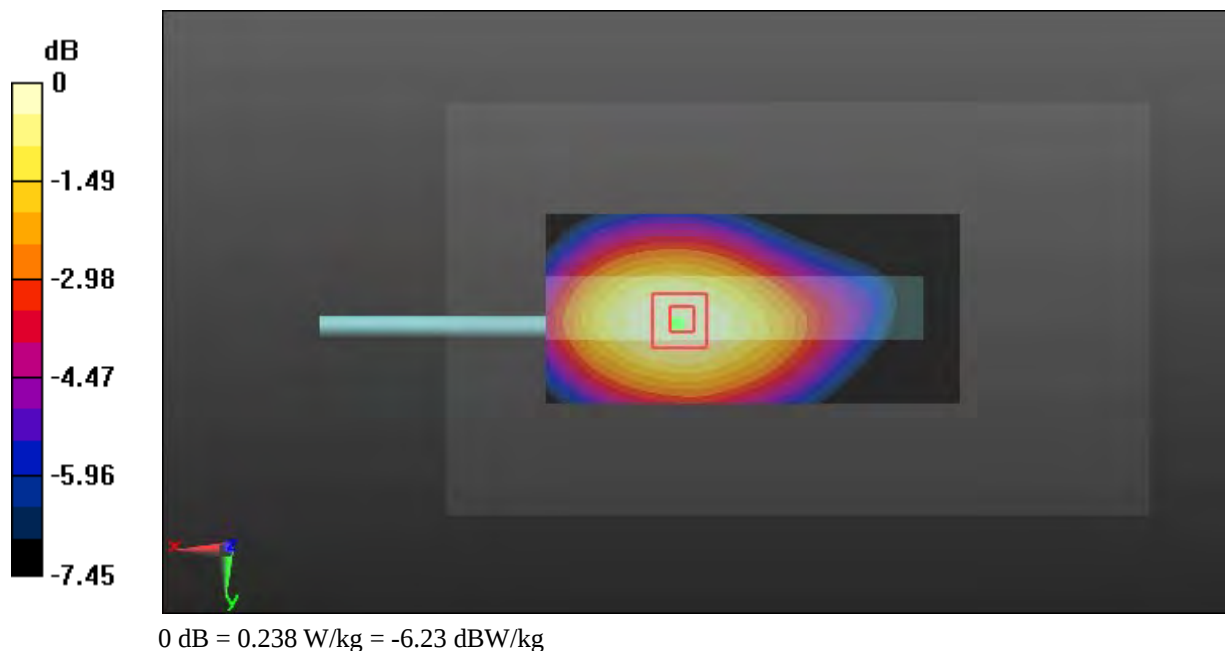

Test Plot 143#: LTE Band 5_Body Bottom_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.279$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.168 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.51 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.164 W/kg



Test Plot 144#: LTE Band 5_Body Bottom_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.279$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.129 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.965 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

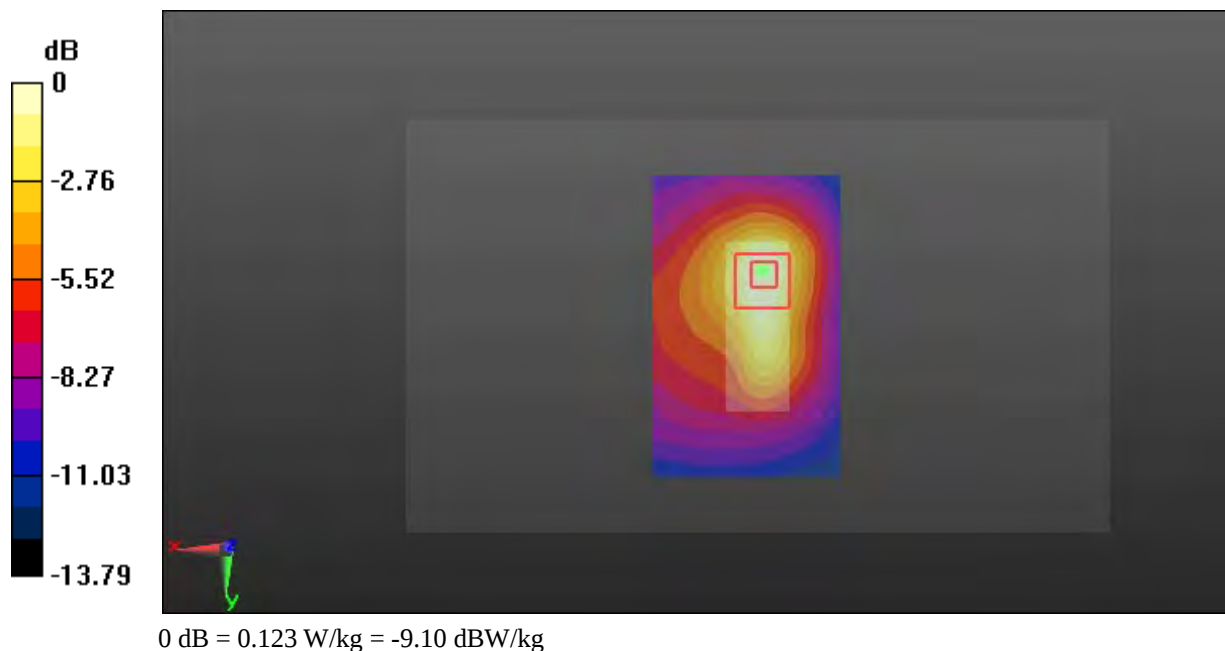

Test Plot 145#: LTE Band 7_Head Left Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 39.016$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.462 W/kg


Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.803 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.714 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.261 W/kg

Maximum value of SAR (measured) = 0.450 W/kg

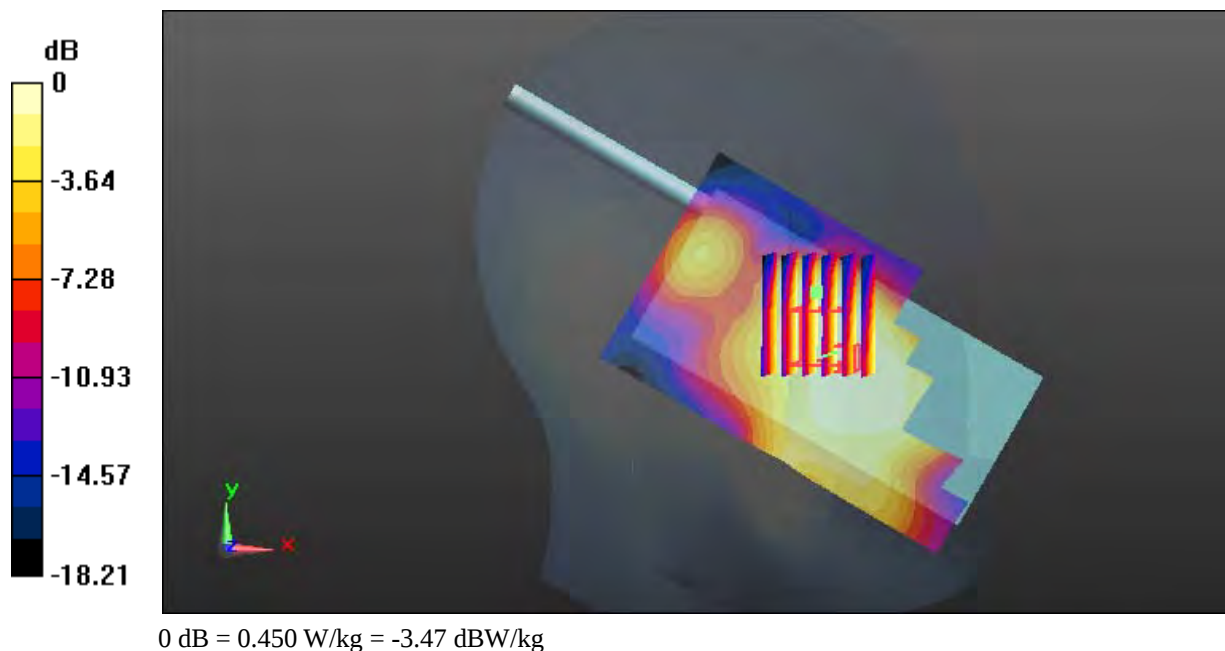

Test Plot 146#: LTE Band 7_Head Left Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 39.016$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.391 W/kg


Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.910 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.868 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.364 W/kg

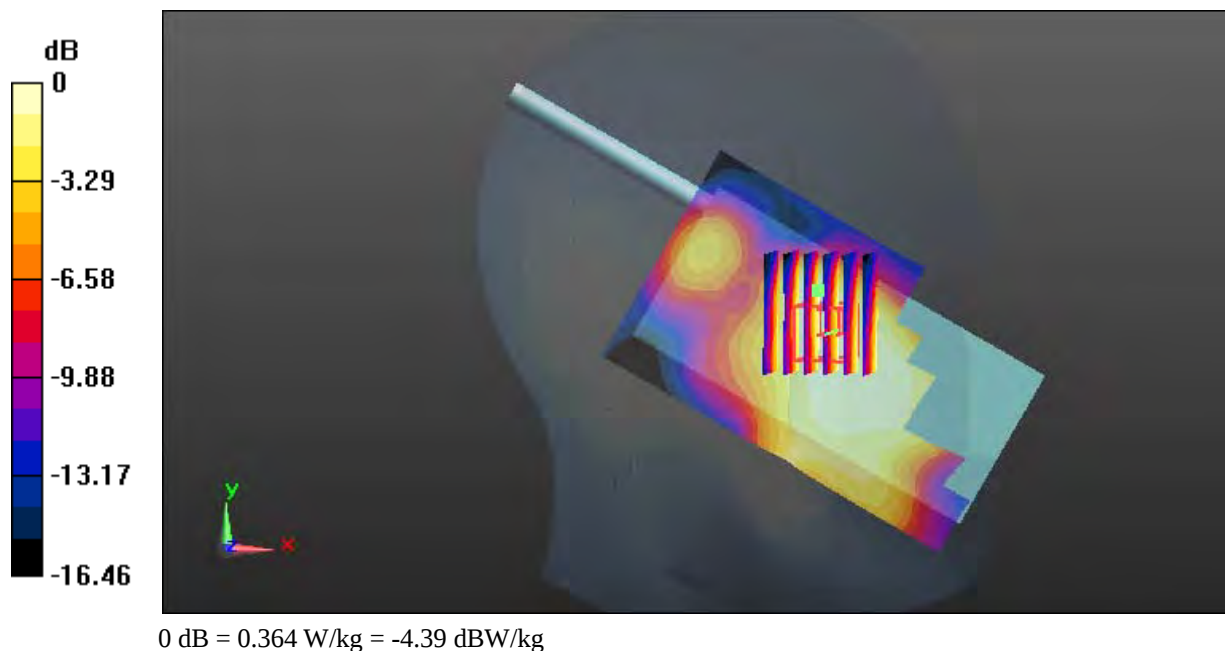

Test Plot 147#: LTE Band 7_Head Left Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 39.016$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.375 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.007 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.361 W/kg

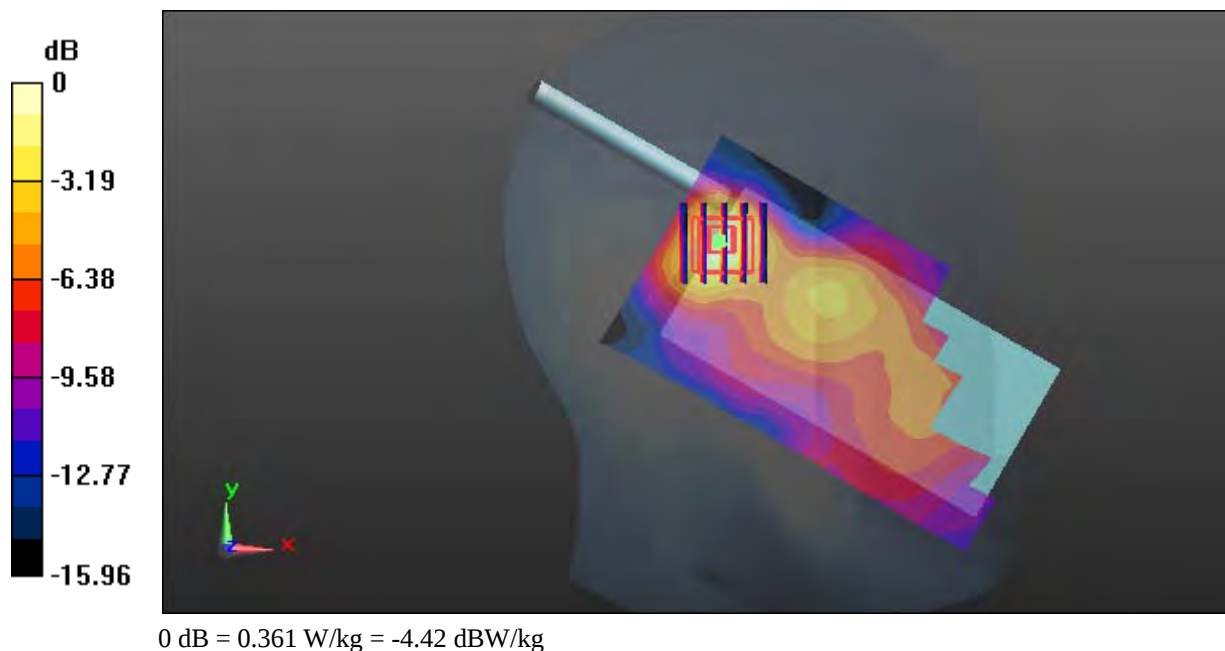

Test Plot 148#: LTE Band 7_Head Left Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 39.016$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.311 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.238 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.504 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.297 W/kg

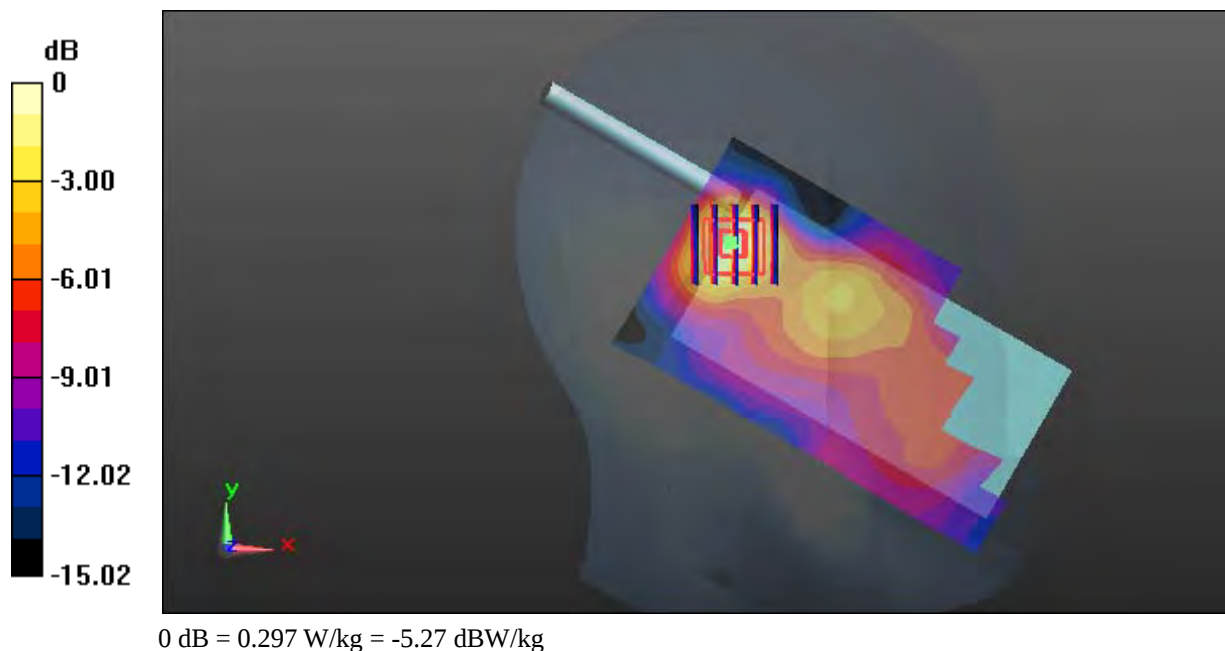

Test Plot 149#: LTE Band 7_Head Right Cheek_Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2510$ MHz; $\sigma = 1.816$ S/m; $\epsilon_r = 40.069$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.714 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.230 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.615 W/kg; SAR(10 g) = 0.368 W/kg

Maximum value of SAR (measured) = 0.663 W/kg

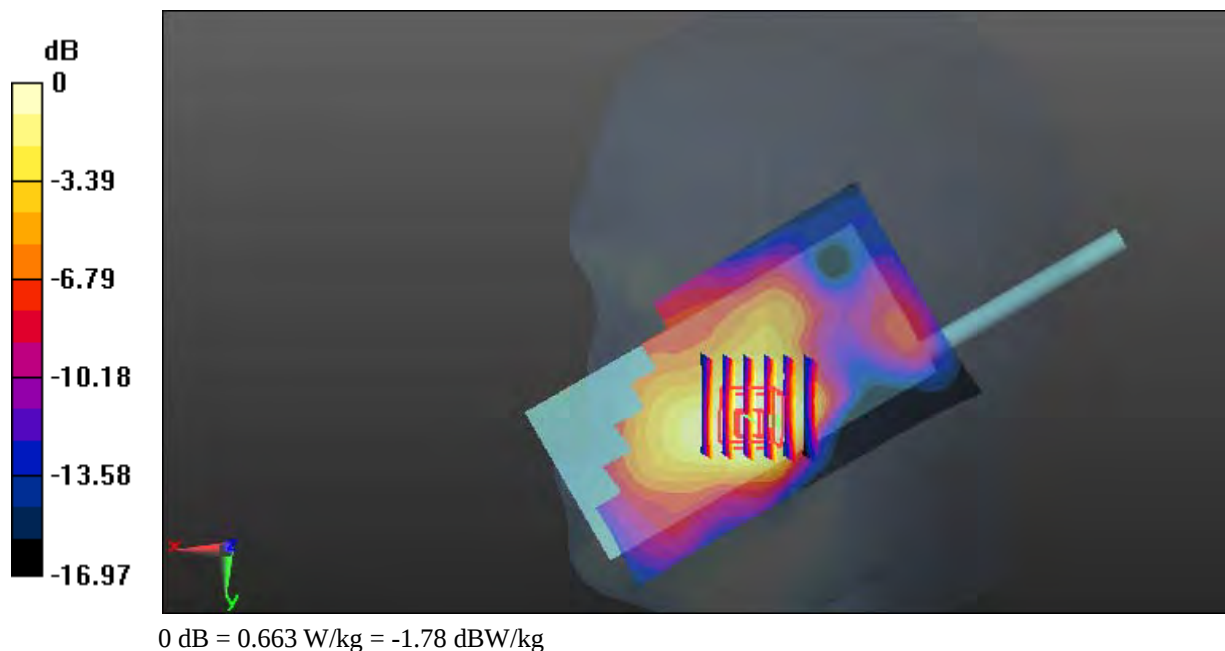

Test Plot 150#: LTE Band 7_Head Right Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 39.016$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.756 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.315 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.410 W/kg

Maximum value of SAR (measured) = 0.742 W/kg

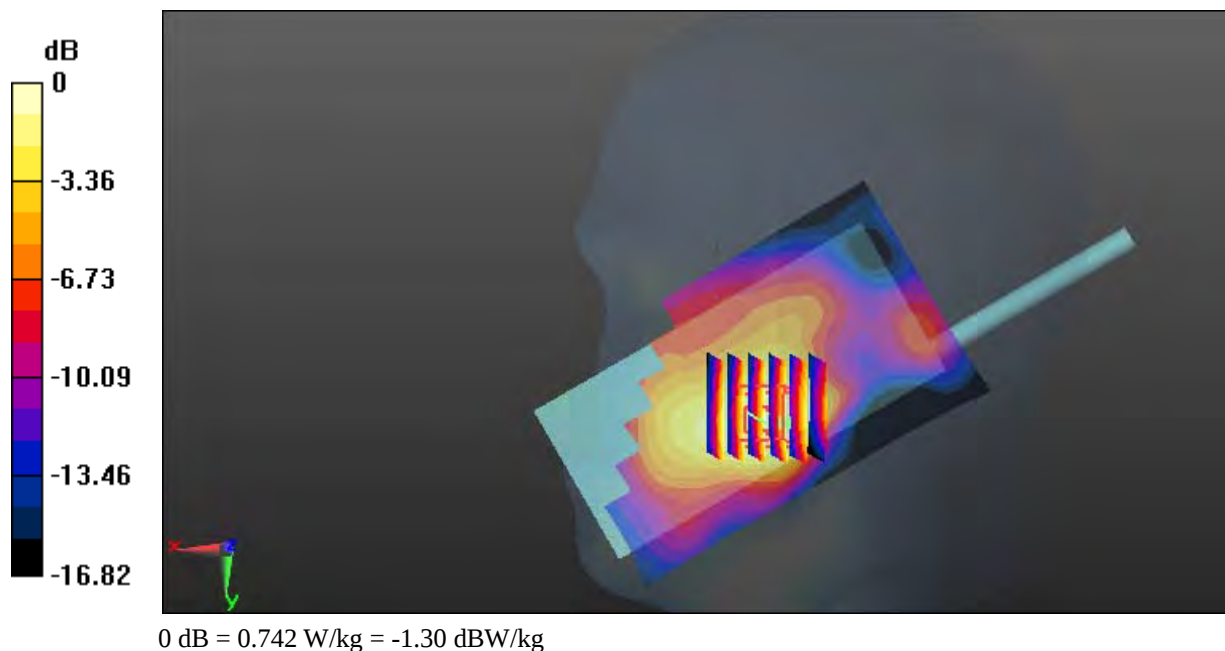

Test Plot 151#: LTE Band 7_Head Right Cheek_High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.925$ S/m; $\epsilon_r = 38.898$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.883 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.132 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.739 W/kg; SAR(10 g) = 0.438 W/kg

Maximum value of SAR (measured) = 0.794 W/kg

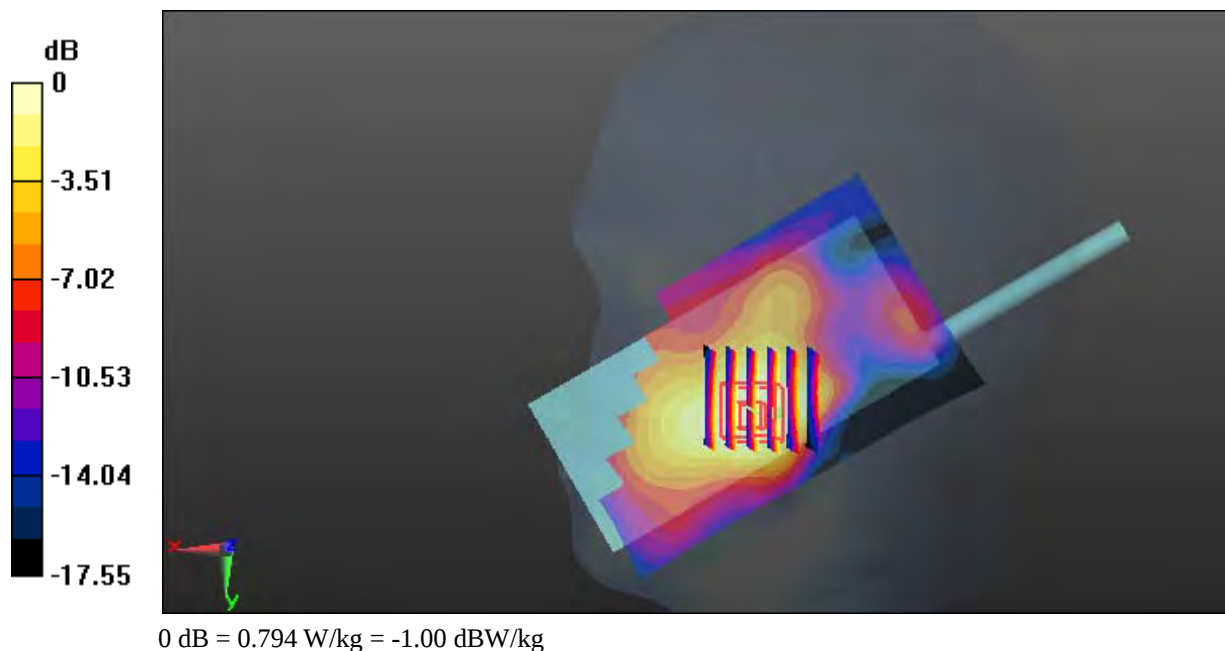

Test Plot 152#: LTE Band 7_Head Right Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 39.016$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.614 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.910 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.893 W/kg

SAR(1 g) = 0.531 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 0.570 W/kg

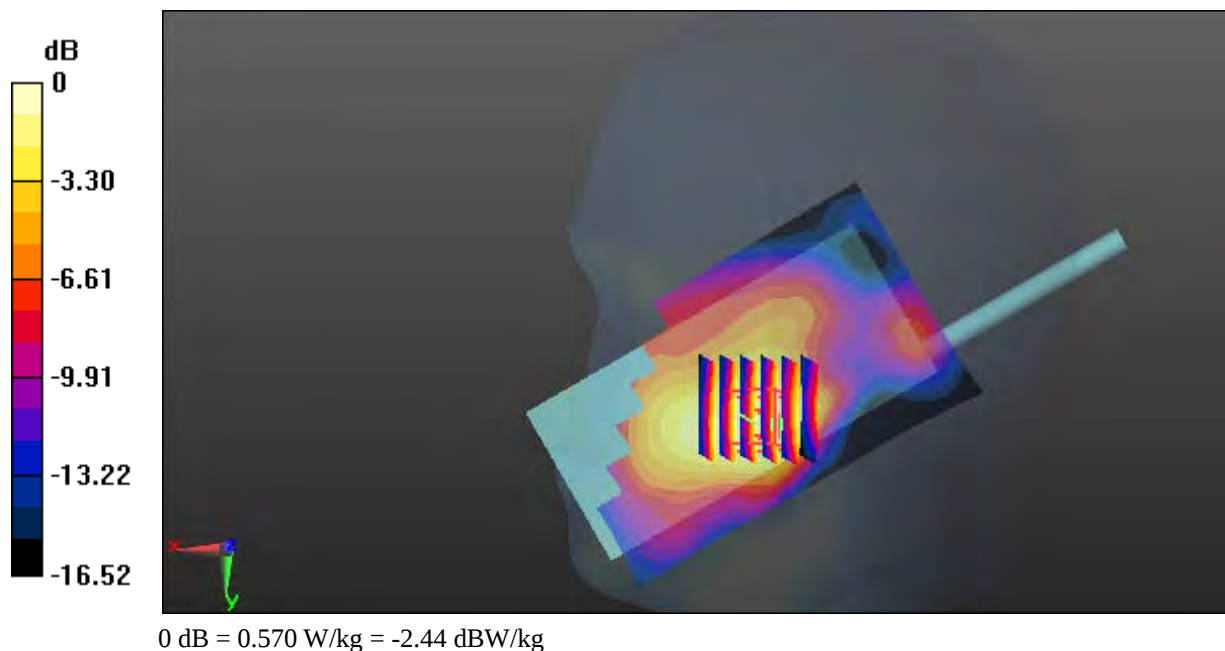

Test Plot 153#: LTE Band 7_Head Right Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 39.016$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.265 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.700 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.225 W/kg

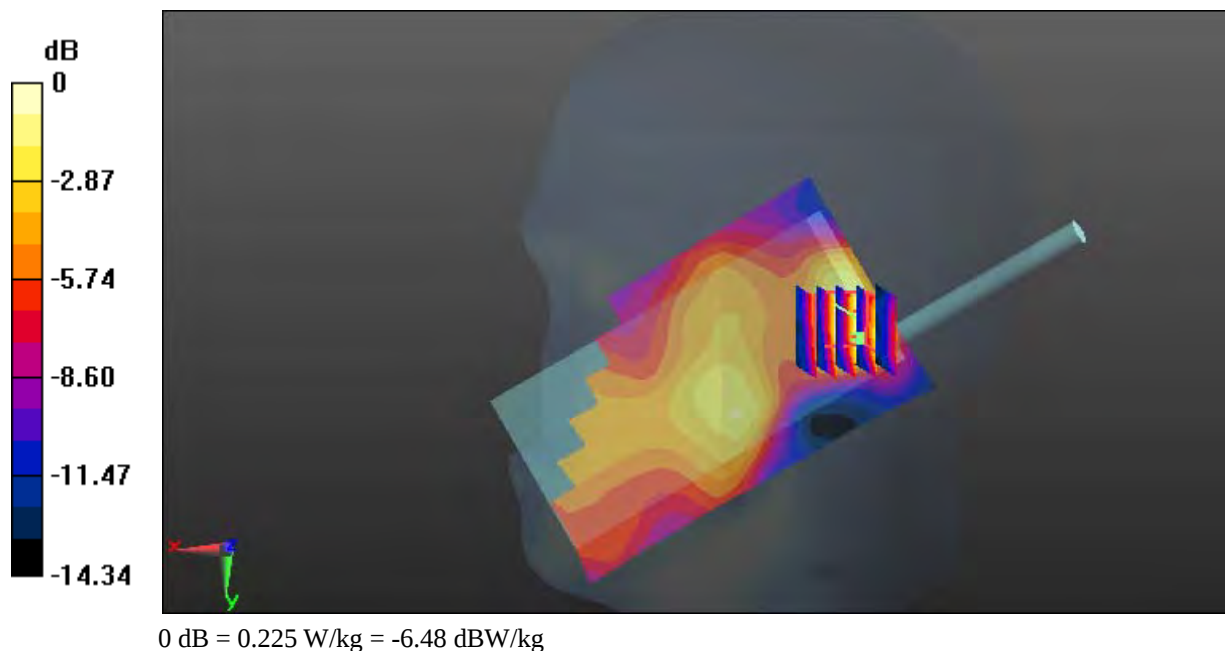

Test Plot 154#: LTE Band 7_Head Right Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 39.016$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.183 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.156 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.151 W/kg

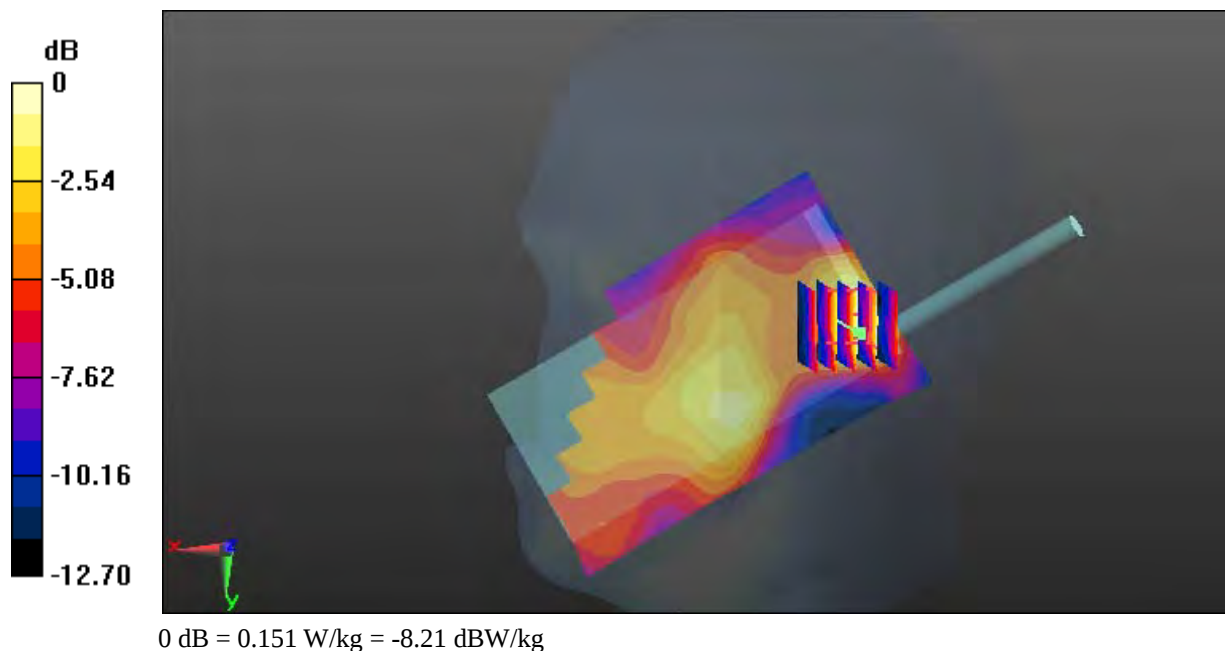

Test Plot 155#: LTE Band 7_Face Up_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 39.016$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.114 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.418 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.110 W/kg

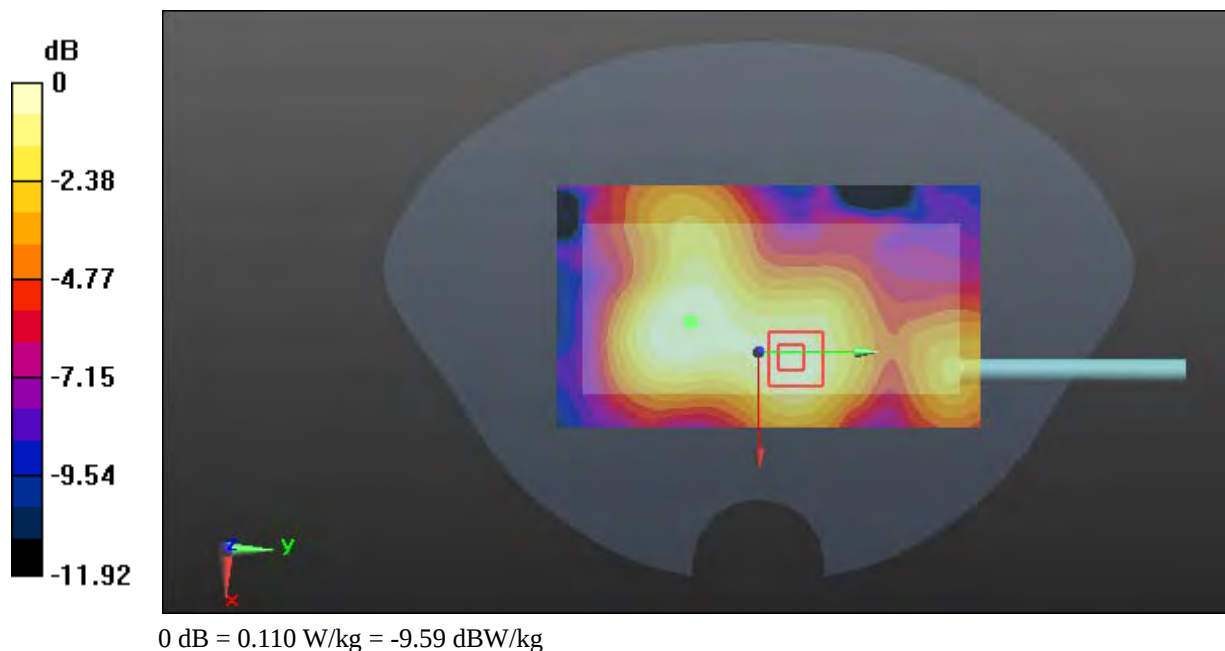

Test Plot 156#: LTE Band 7_Face Up_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 39.016$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0953 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.699 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0878 W/kg

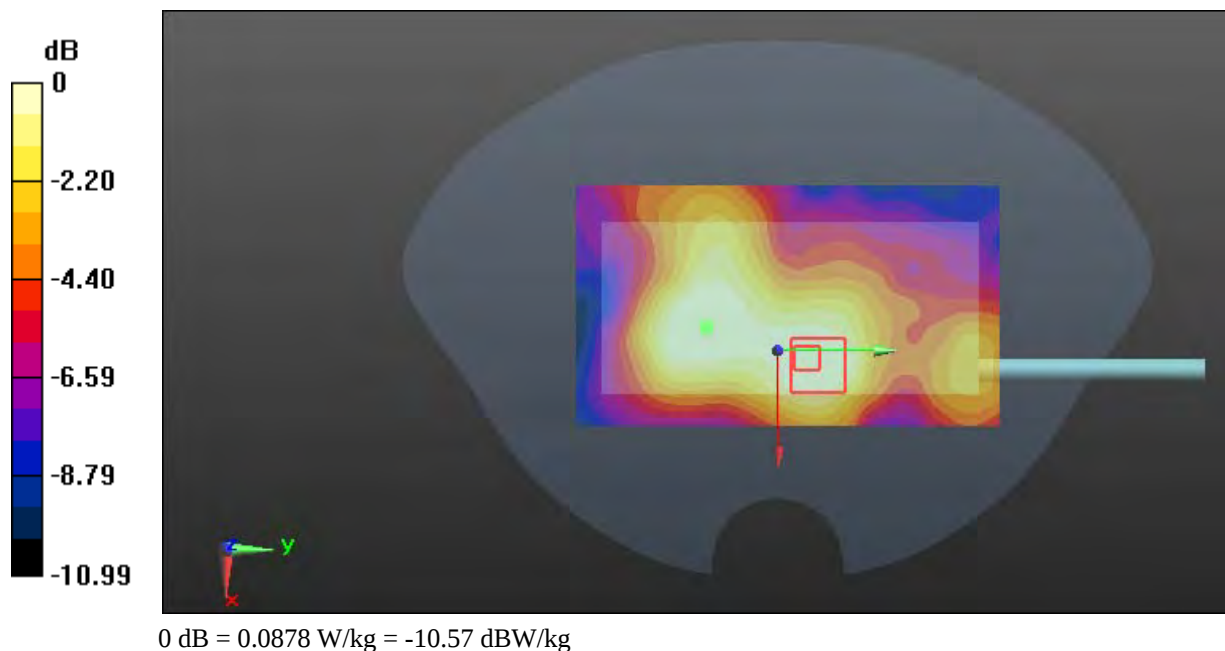

Test Plot 157#: LTE Band 7_Body Front _Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2510$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 52.632$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.429 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.495 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.444 W/kg

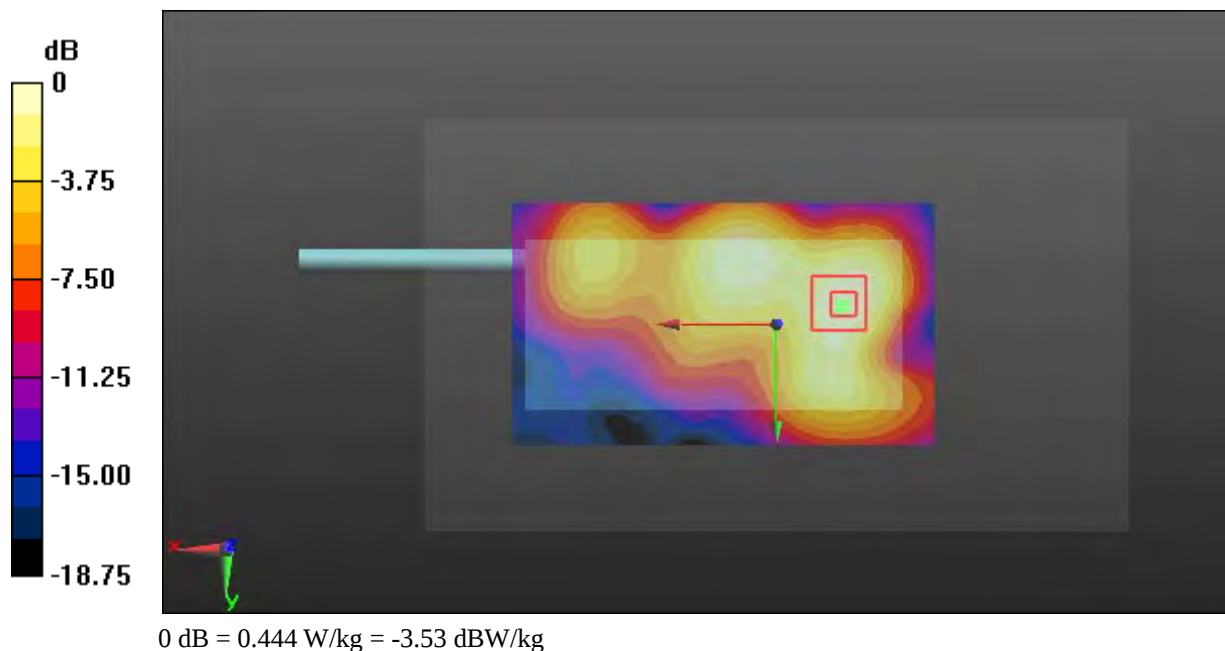

Test Plot 158#: LTE Band 7_Body Front _Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 2.111$ S/m; $\epsilon_r = 52.483$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.430 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.806 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.902 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 0.431 W/kg

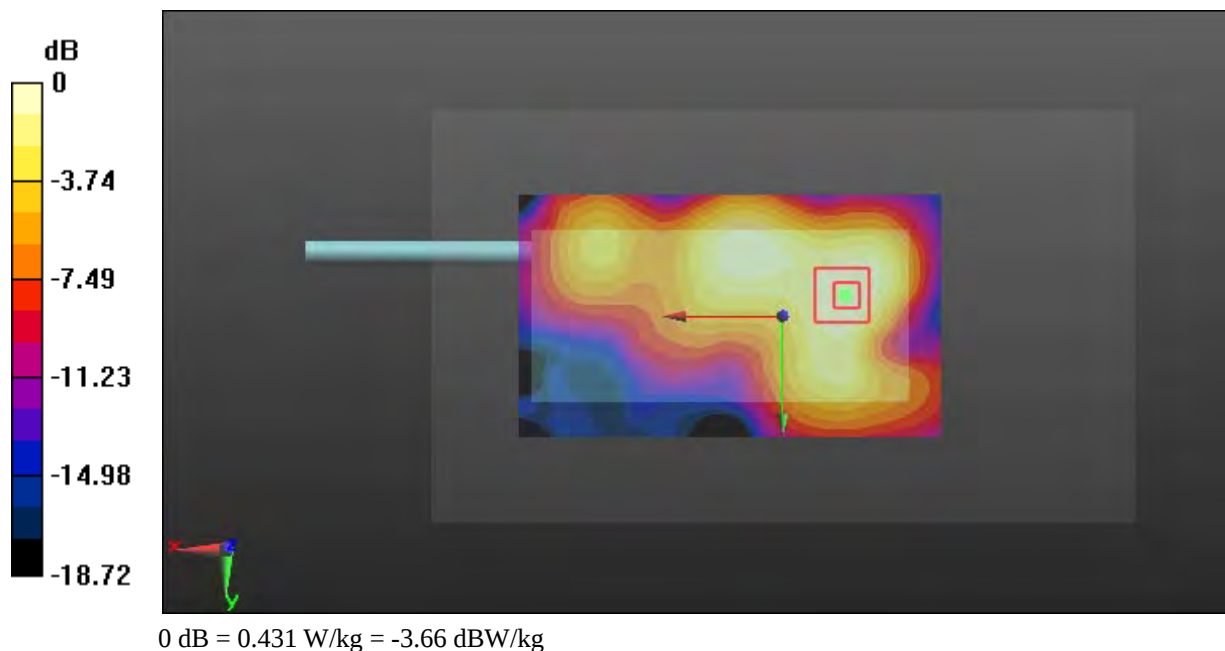

Test Plot 159#: LTE Band 7_Body Front _High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2560$ MHz; $\sigma = 2.119$ S/m; $\epsilon_r = 54.244$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.503 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.99 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.992 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.491 W/kg

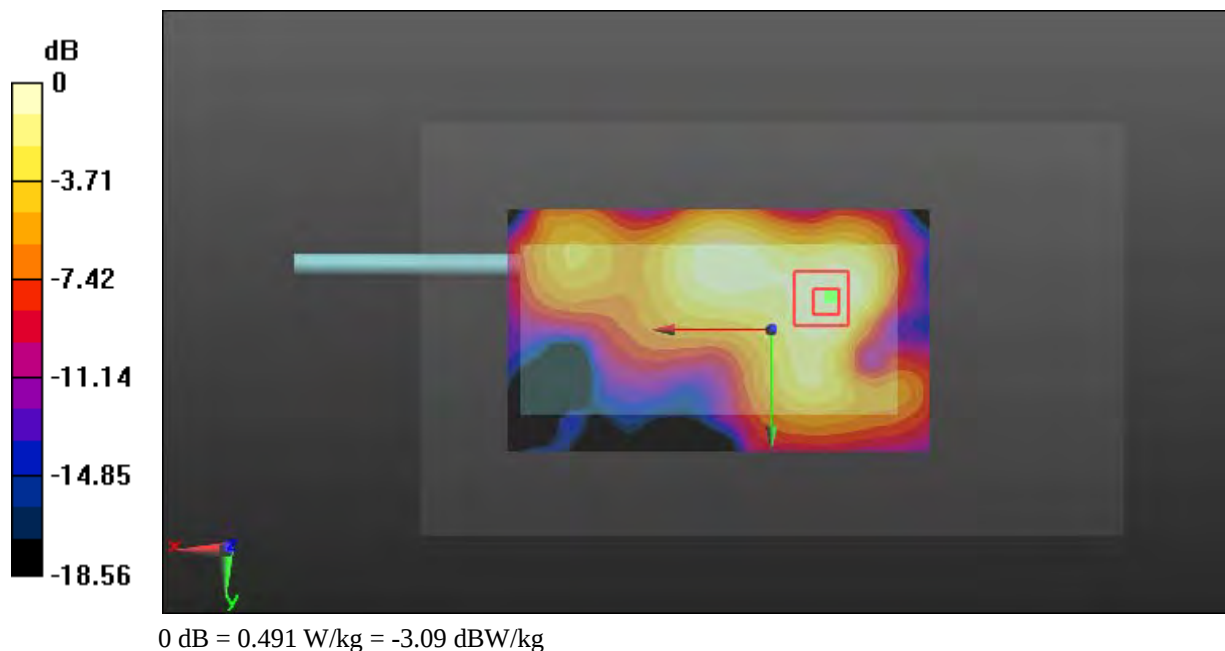

Test Plot 160#: LTE Band 7_Body Front _Middle_50%RB

DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 2.111$ S/m; $\epsilon_r = 52.483$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.489 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.69 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.979 W/kg

SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.475 W/kg

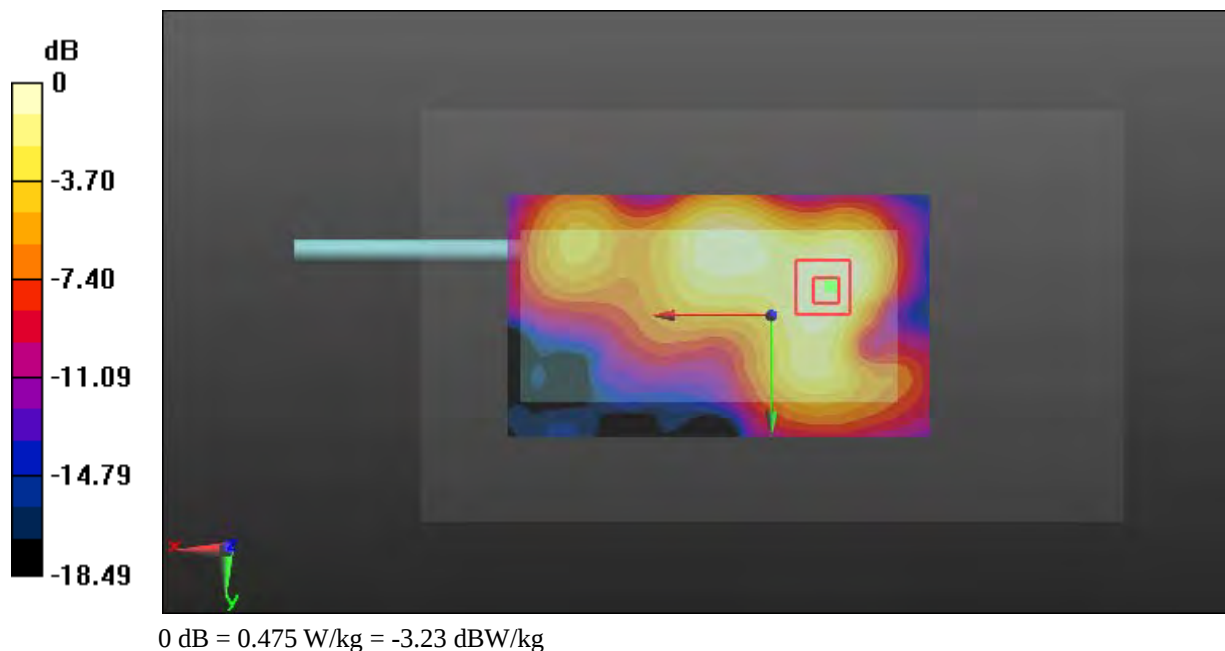

Test Plot 161#: LTE Band 7_Body Back_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 2.111$ S/m; $\epsilon_r = 52.483$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.293 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.796 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.455 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 0.287 W/kg

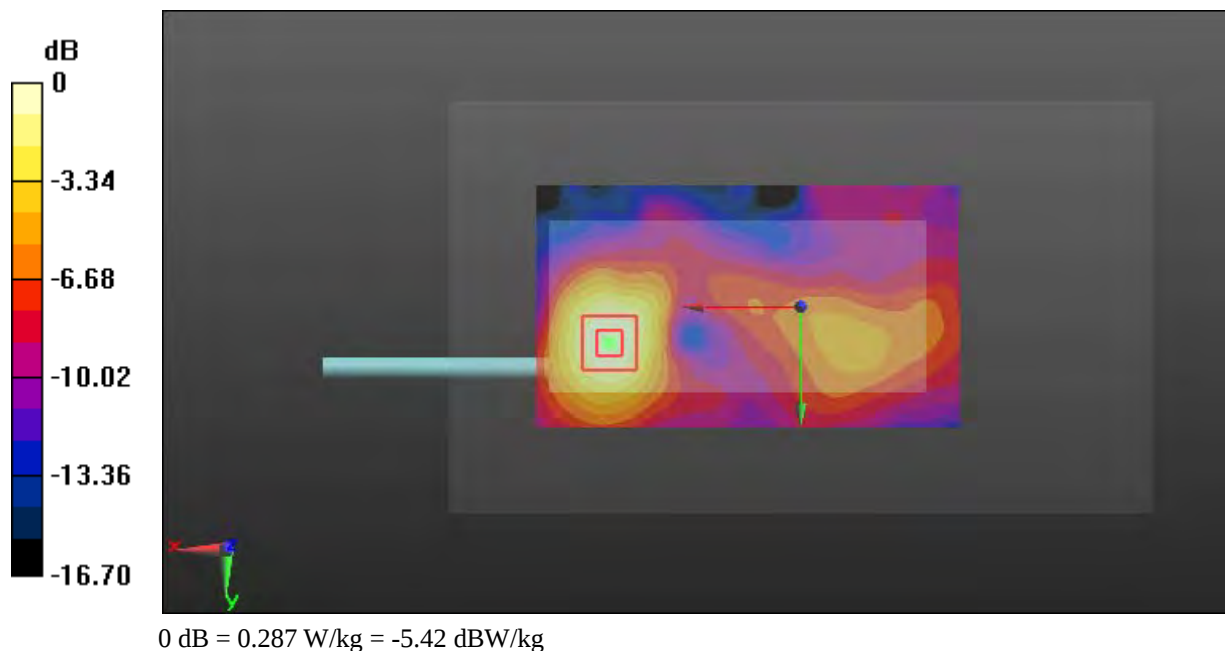

Test Plot 162#: LTE Band 7_Body Back_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 2.111$ S/m; $\epsilon_r = 52.483$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.235 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.531 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.492 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.226 W/kg

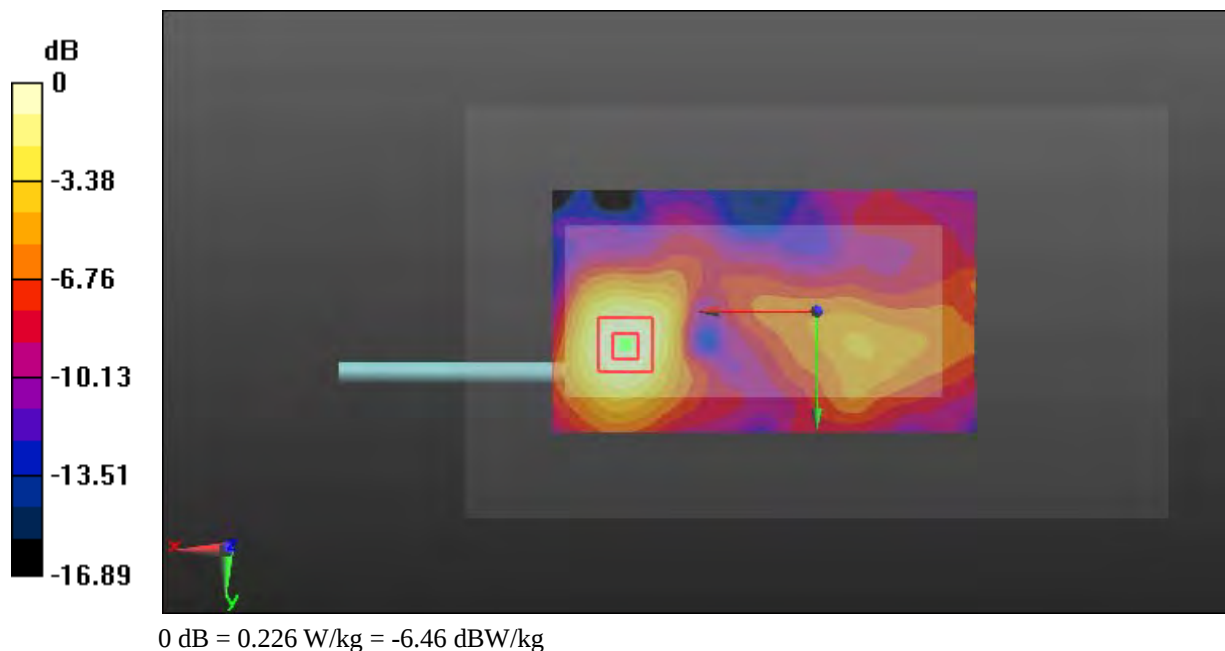

DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820

DASY5 Configuration:


- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Maximum value of SAR (interpolated) = 0.229 W/kg

Reference Value = 6.070 V/m; Power Drift = 0.05 dB

SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.246 W/kg

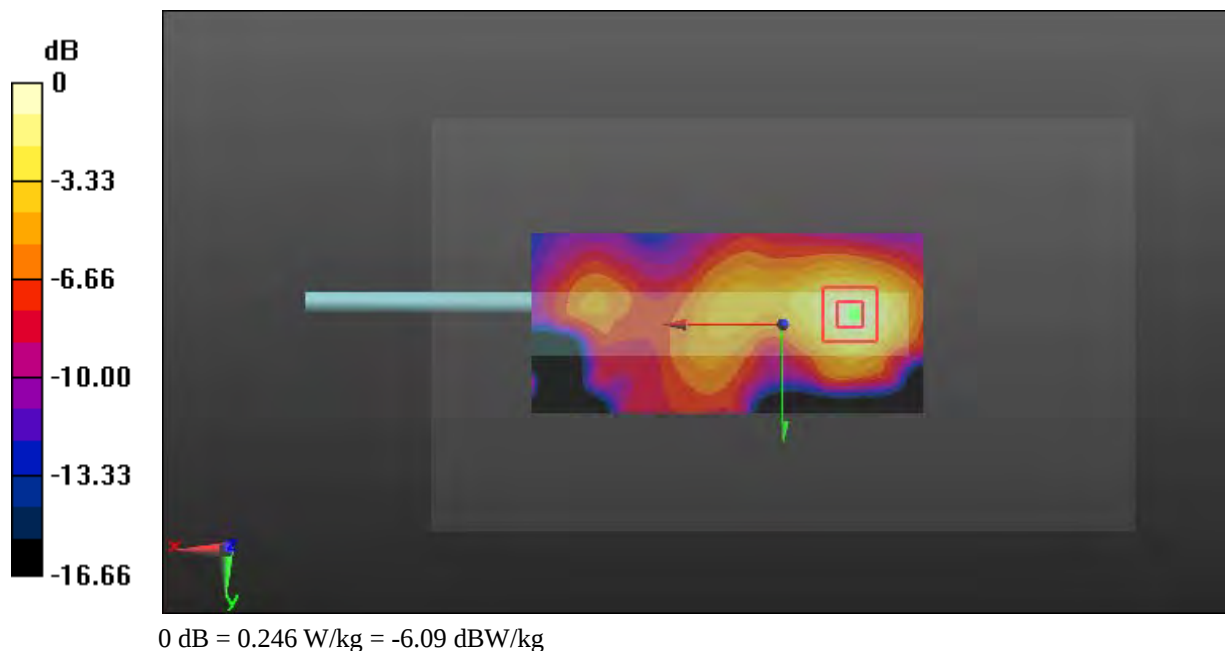

Test Plot 164#: LTE Band 7_Body Left_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 2.111$ S/m; $\epsilon_r = 52.483$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.203 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.504 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.365 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.189 W/kg

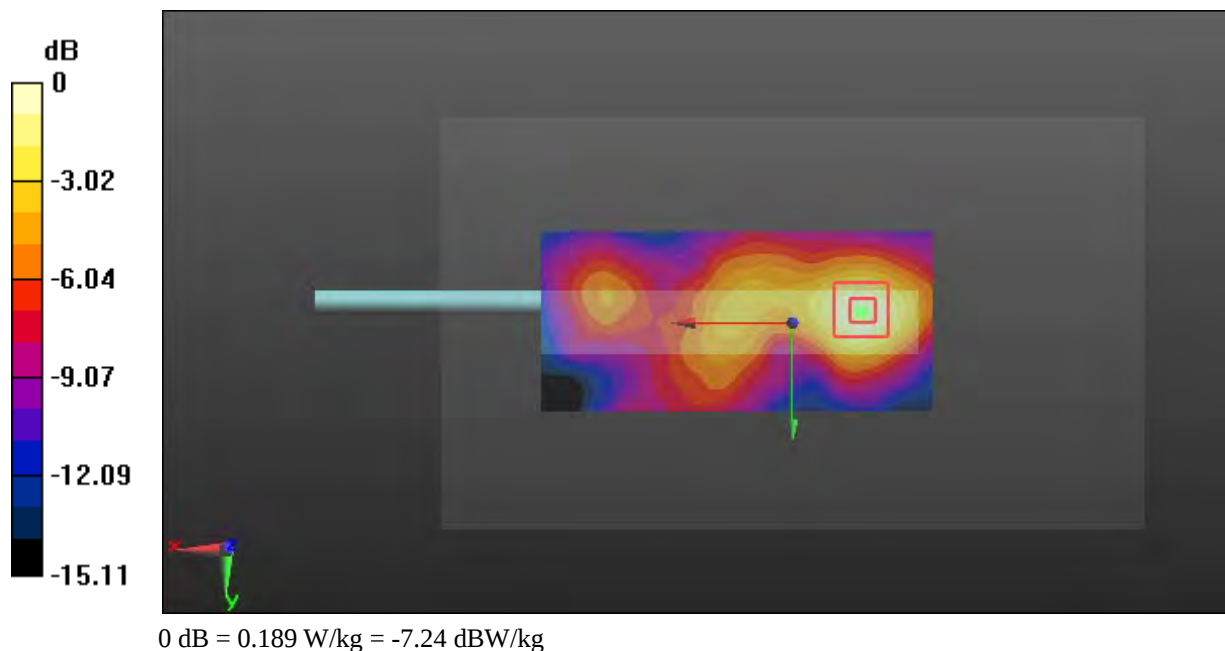

Test Plot 165#: LTE Band 7_Body Right_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 2.111$ S/m; $\epsilon_r = 52.483$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.337 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.046 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.661 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.326 W/kg

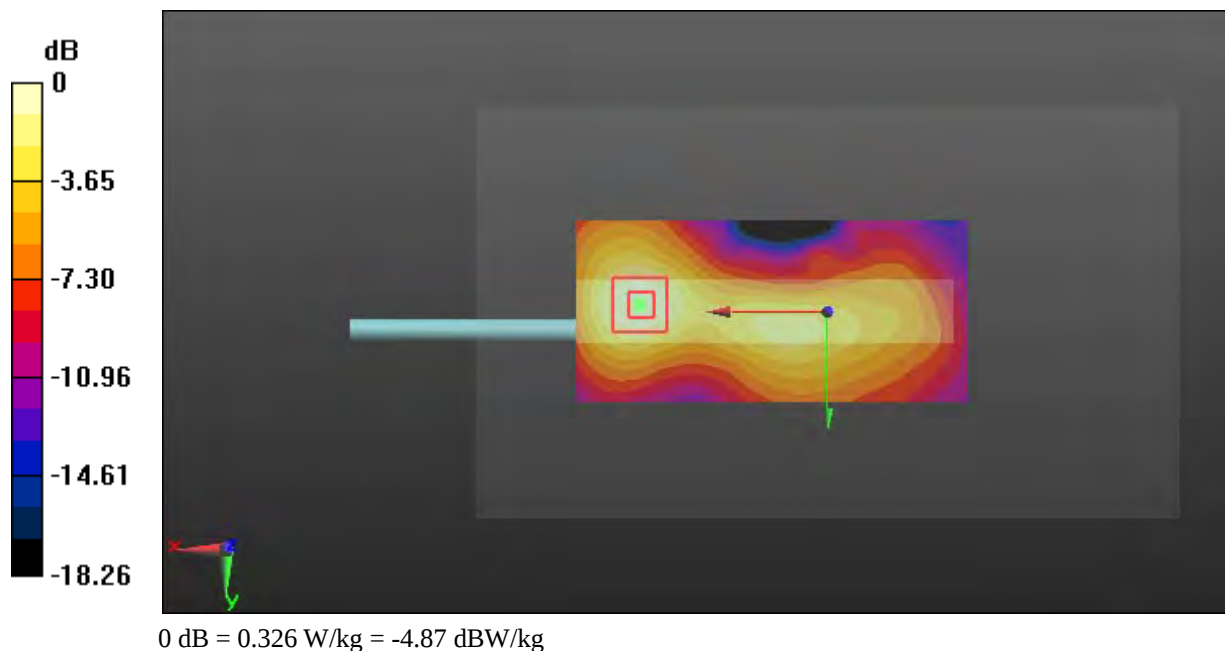

Test Plot 166#: LTE Band 7_Body Right_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 2.111$ S/m; $\epsilon_r = 52.483$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.246 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.802 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.471 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.251 W/kg

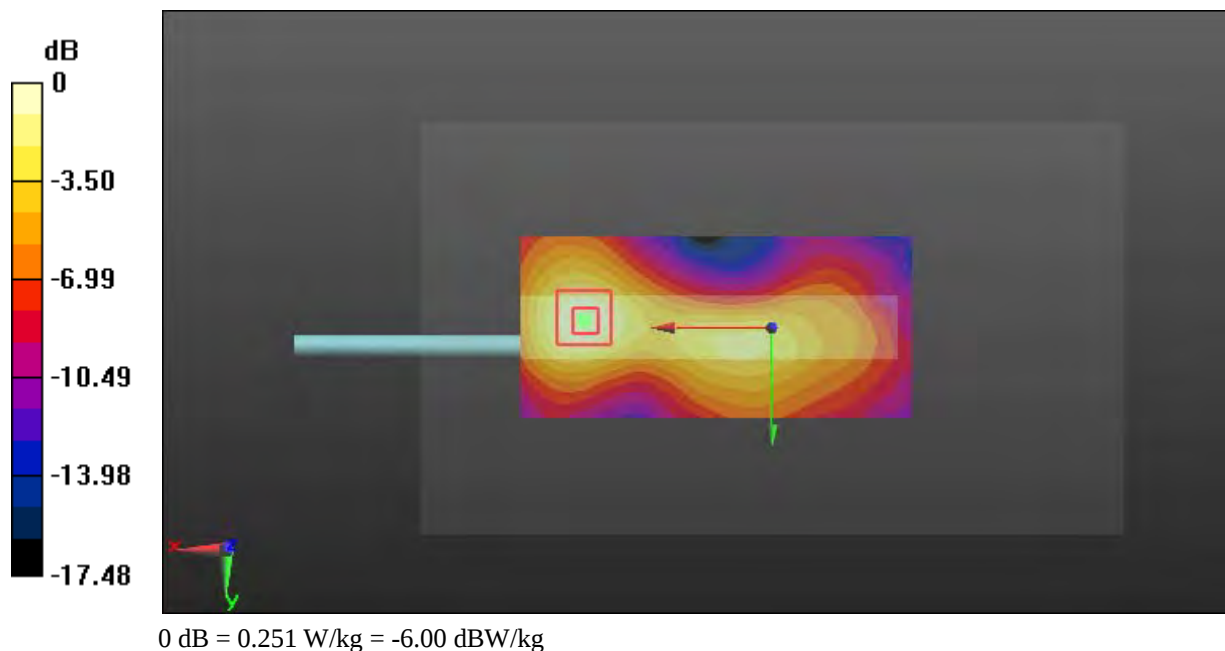

Test Plot 167#: LTE Band 7_Body Bottom_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 2.111$ S/m; $\epsilon_r = 52.483$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.209 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.010 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.225 W/kg



Test Plot 168#: LTE Band 7_Body Bottom_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 2.111$ S/m; $\epsilon_r = 52.483$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.164 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.239 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.173 W/kg

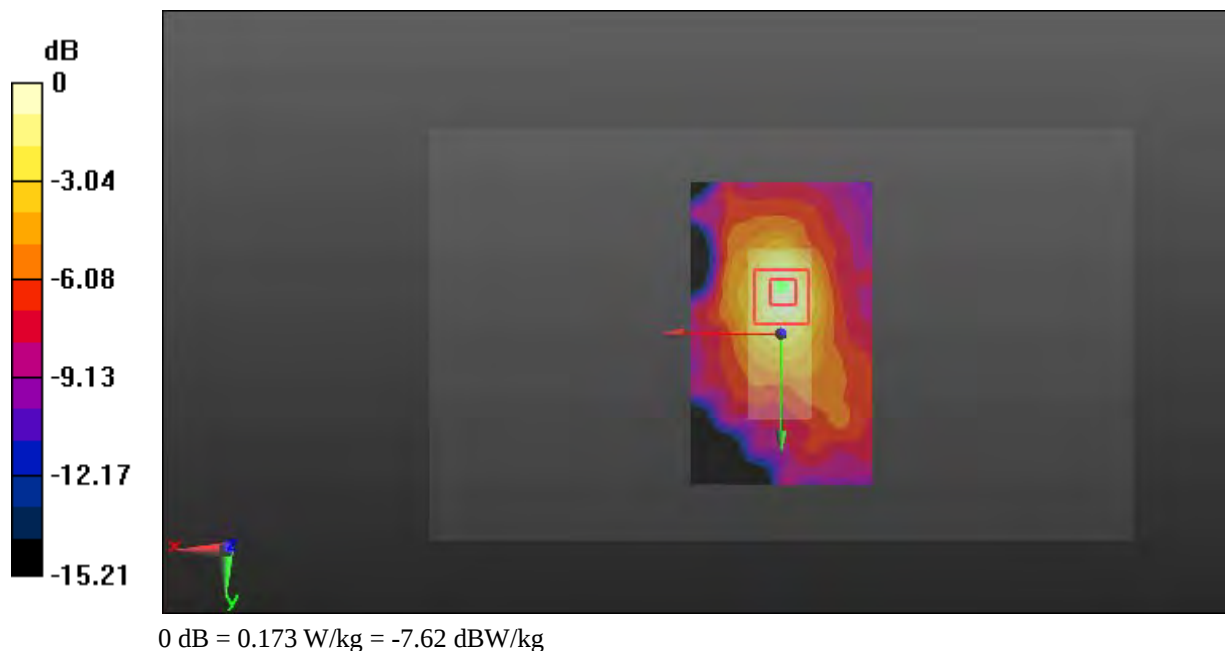

Test Plot 169#: LTE Band 12_Head Left Cheek_Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 704 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 704$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 43.011$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.206 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.221 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.209 W/kg

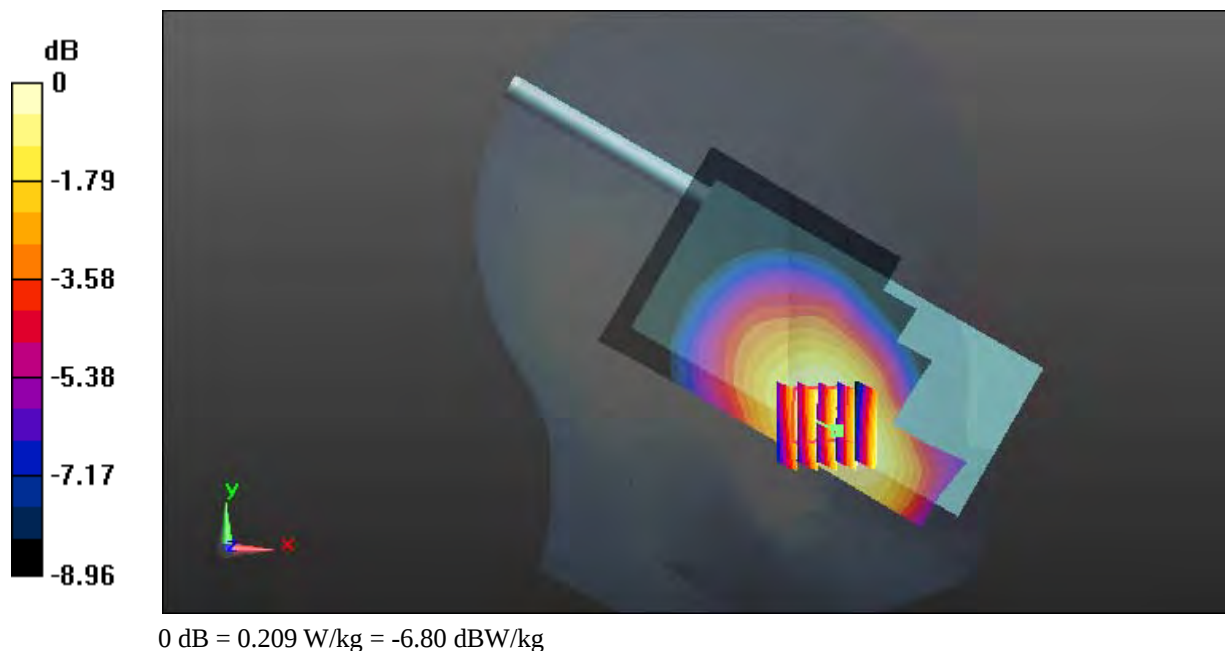

Test Plot 170#: LTE Band 12_Head Left Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.008$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.242 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.556 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.248 W/kg

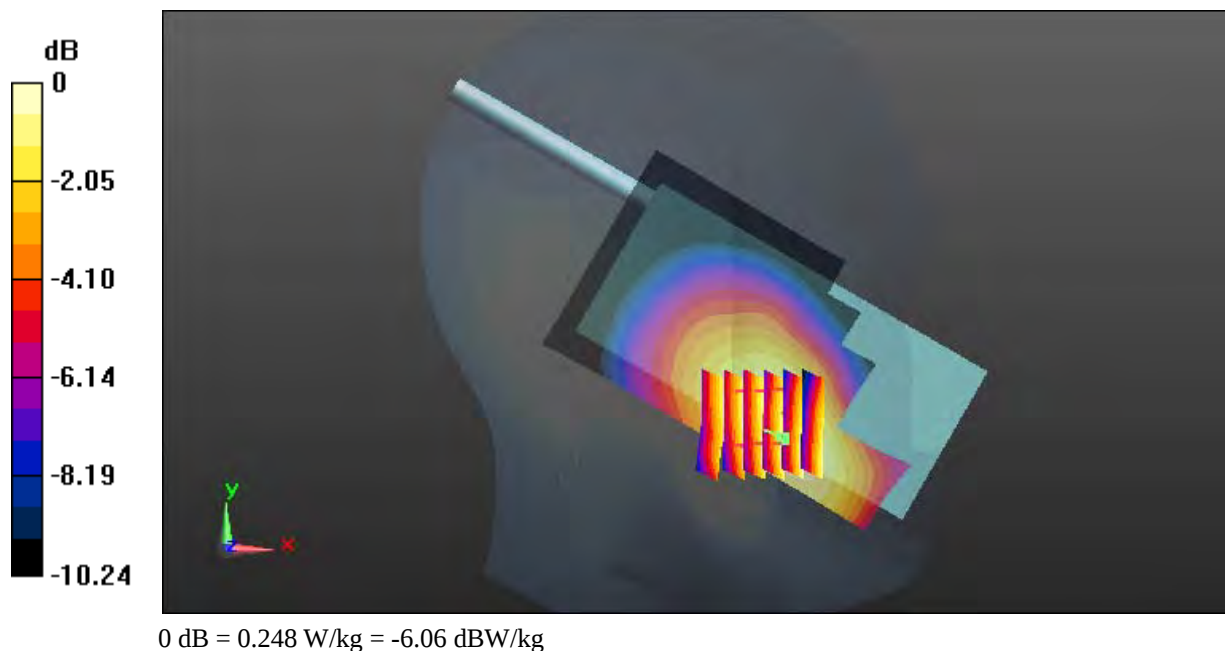

Test Plot 171#: LTE Band 12_Head Left Cheek_High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 711 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 711$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.975$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.225 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.08 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.225 W/kg

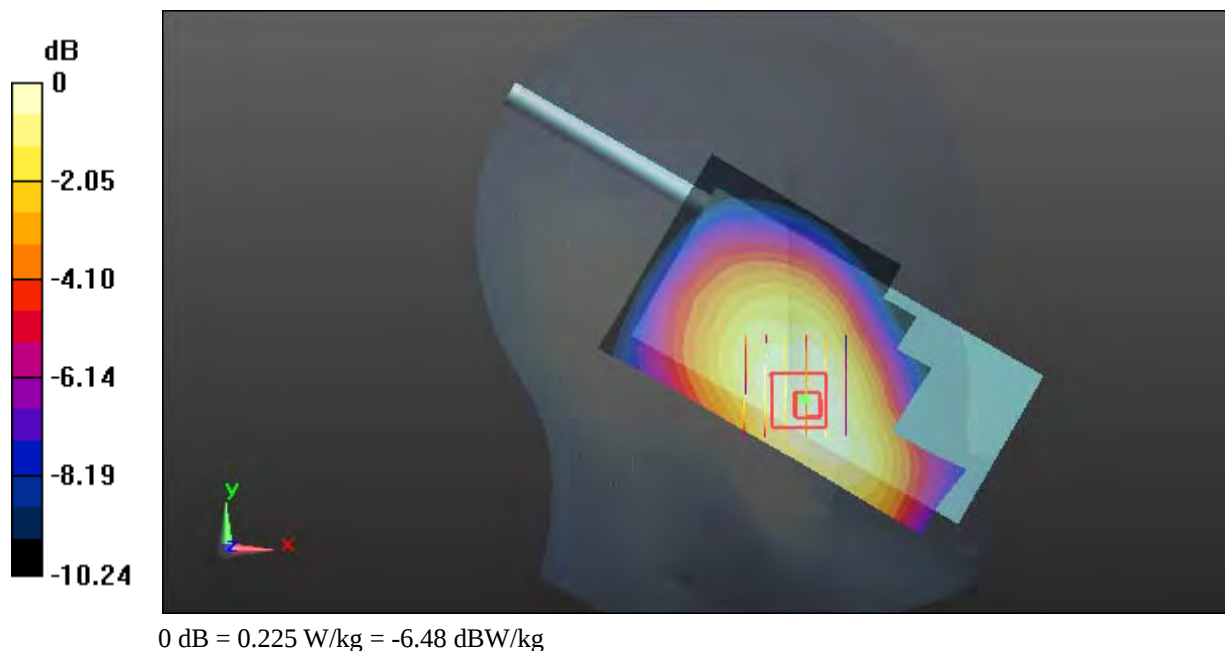

Test Plot 172#: LTE Band 12_Head Left Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.008$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.169 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.226 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

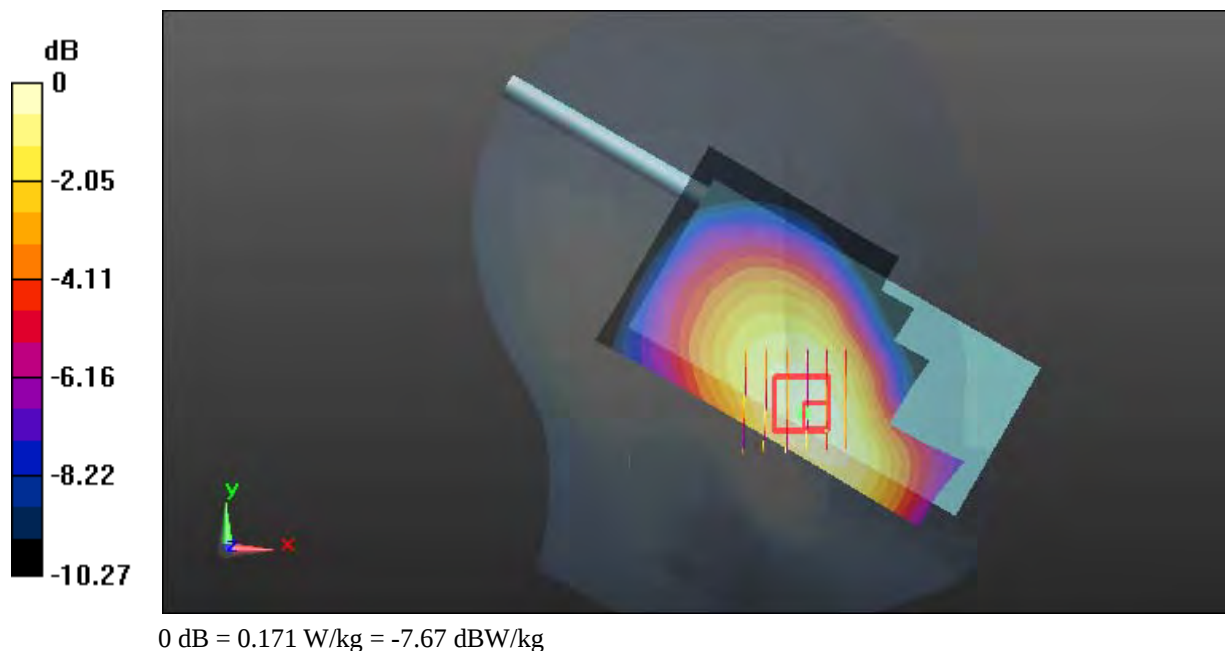

Test Plot 173#: LTE Band 12_Head Left Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.008$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0802 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.211 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0900 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.0809 W/kg

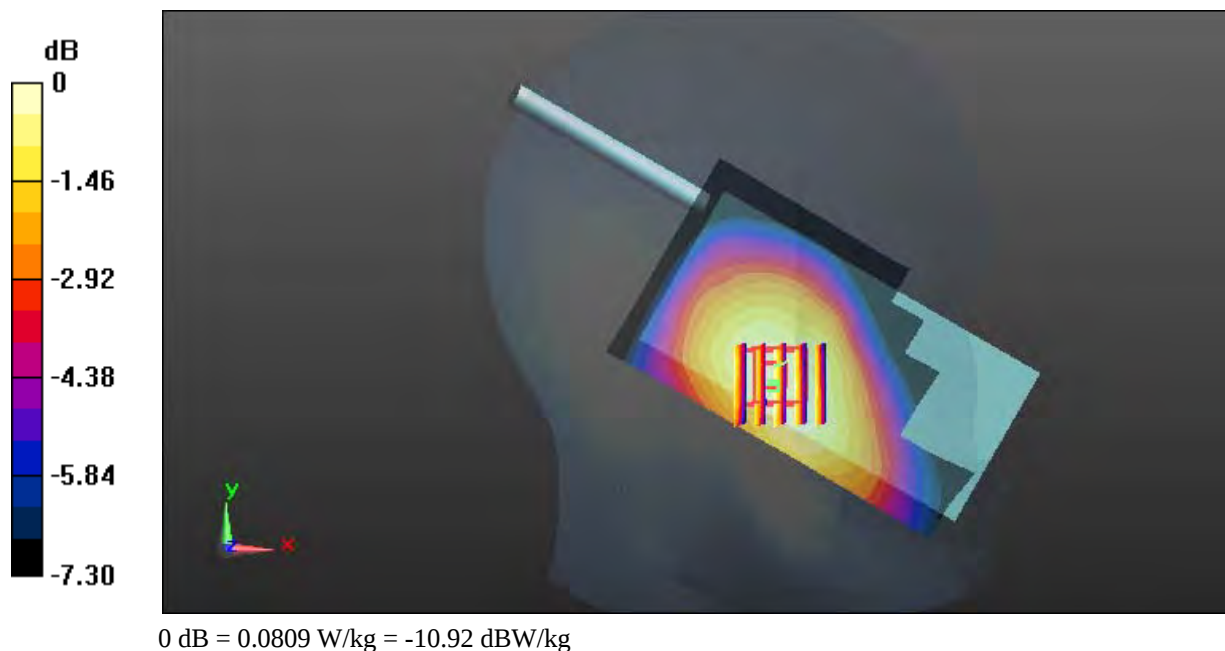

Test Plot 174#: LTE Band 12_Head Left Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.008$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0714 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.800 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0810 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0717 W/kg

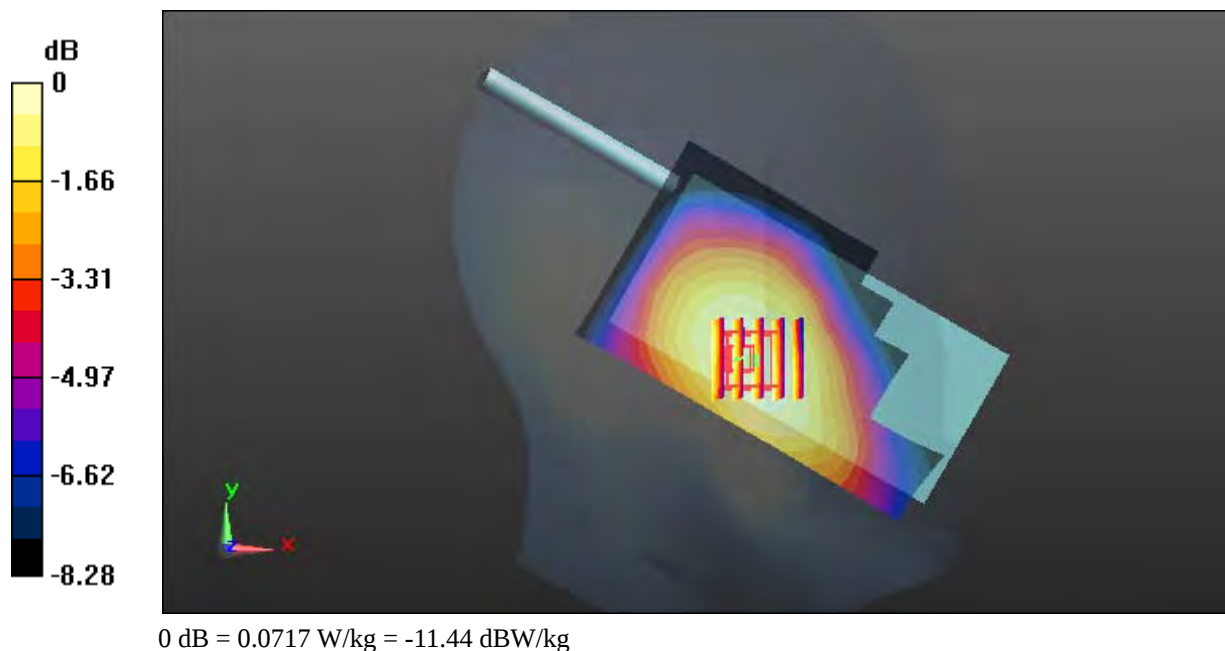

Test Plot 175#: LTE Band 12_Head Right Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.008$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.211 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.188 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.202 W/kg

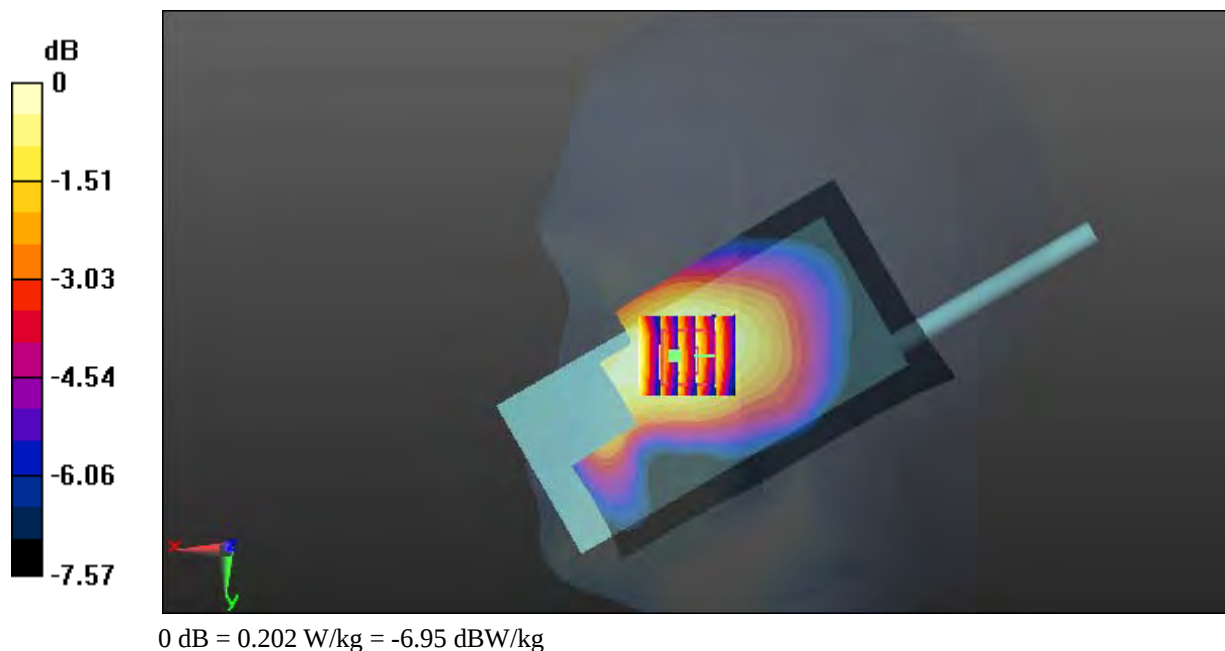

Test Plot 176#: LTE Band 12_Head Right Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.008$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.165 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.395 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.166 W/kg

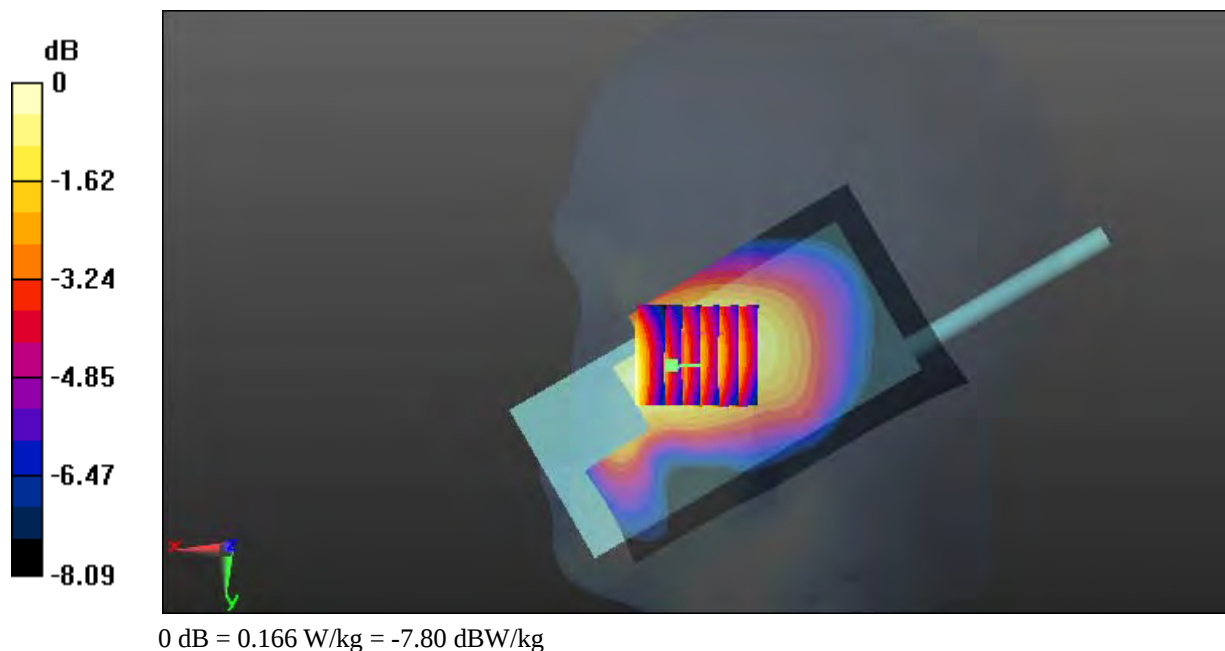

Test Plot 177#: LTE Band 12_Head Right Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.008$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0819 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.359 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.0810 W/kg

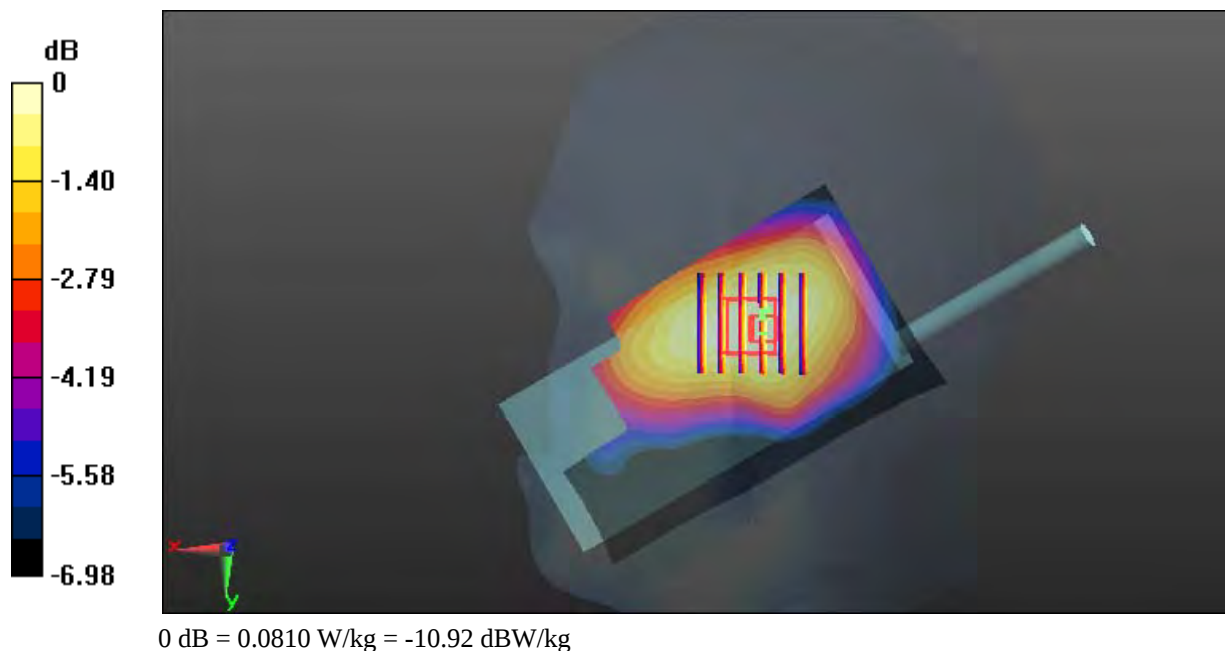

Test Plot 178#: LTE Band 12_Head Right Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.008$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0696 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.896 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0830 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.0714 W/kg

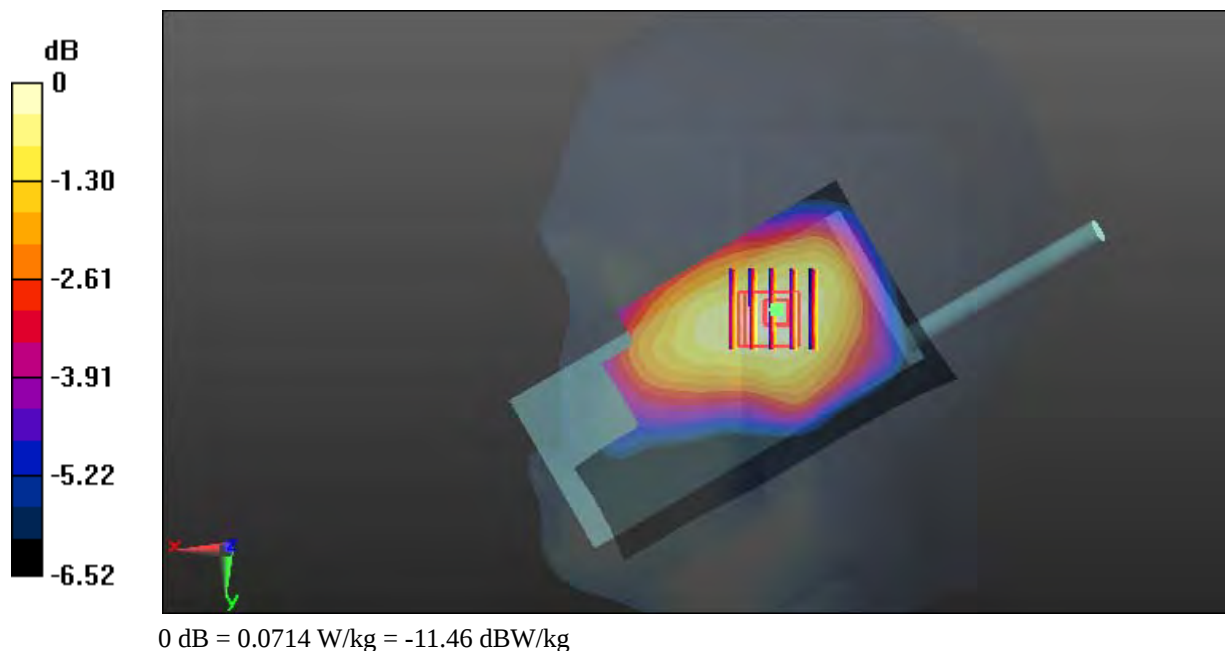

Test Plot 179#: LTE Band 12_Face Up_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.008$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0759 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.752 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0788 W/kg

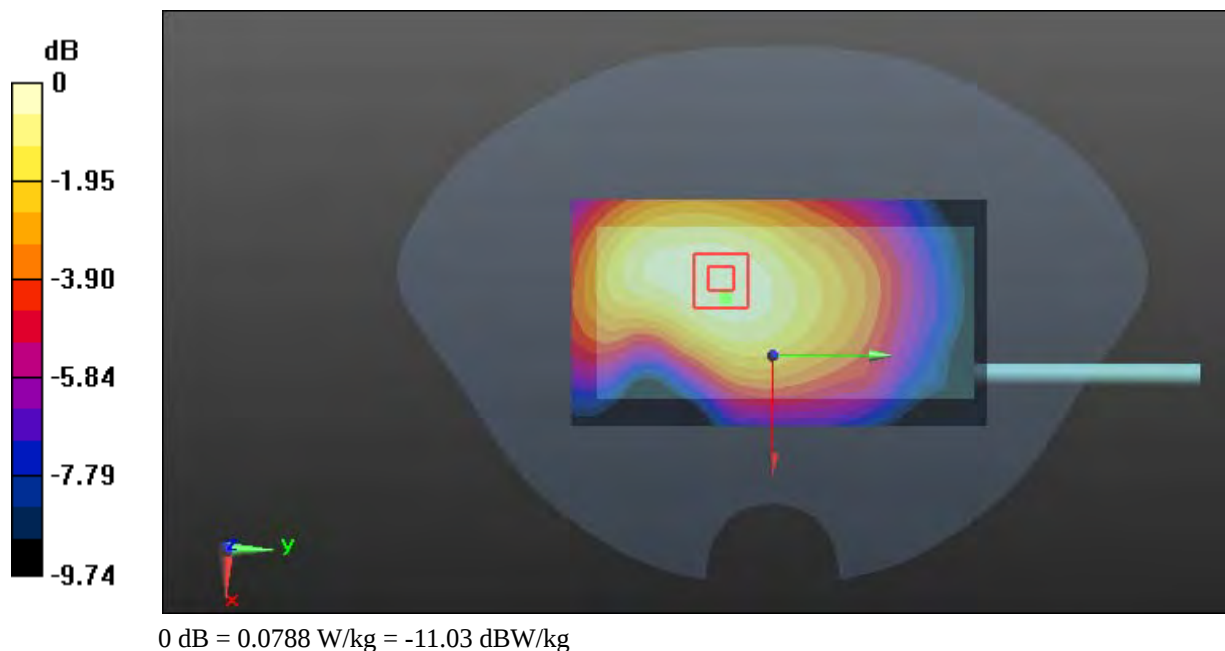

Test Plot 180#: LTE Band 12_Face Up_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.008$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0635 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.963 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0643 W/kg

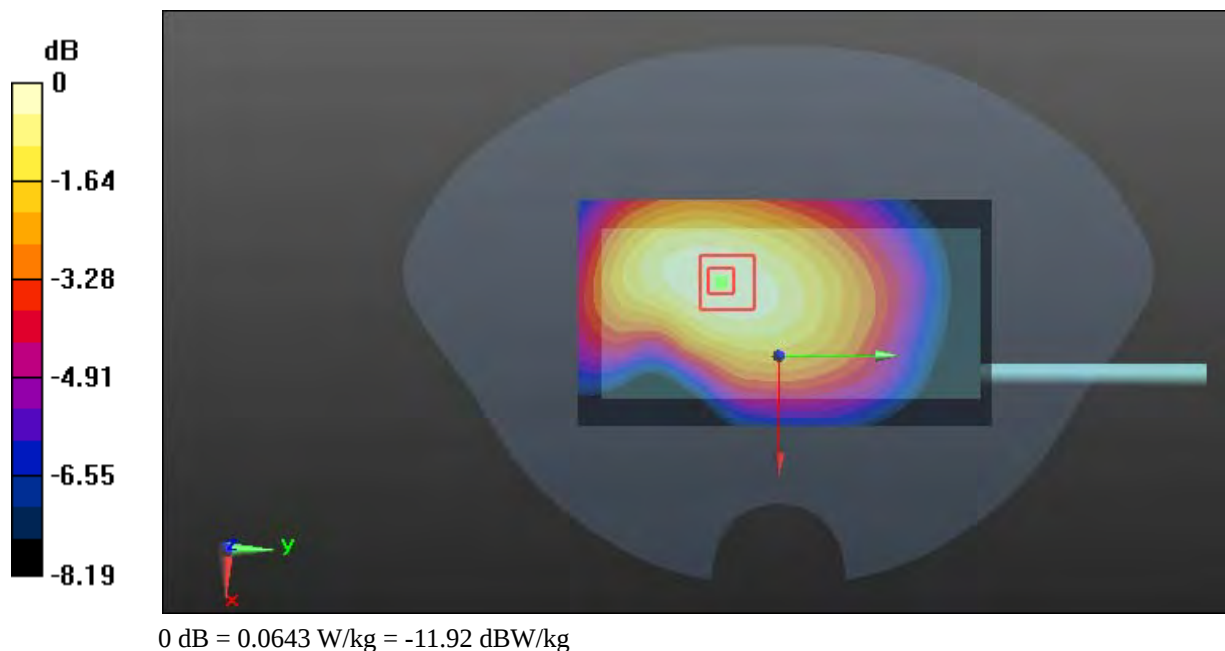

Test Plot 181#: LTE Band 12_Body Front _Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 704 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 704$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 55.173$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.272 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.89 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.269 W/kg

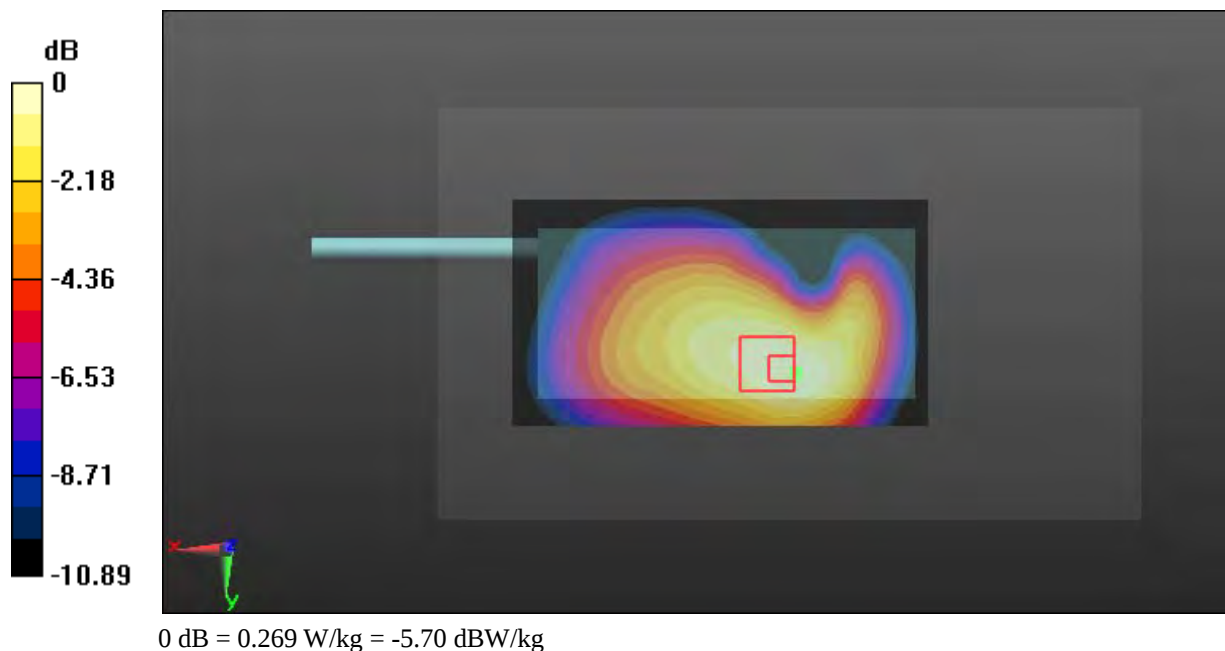

Test Plot 182#: LTE Band 12_Body Front _Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 55.172$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.334 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.75 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.427 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.331 W/kg

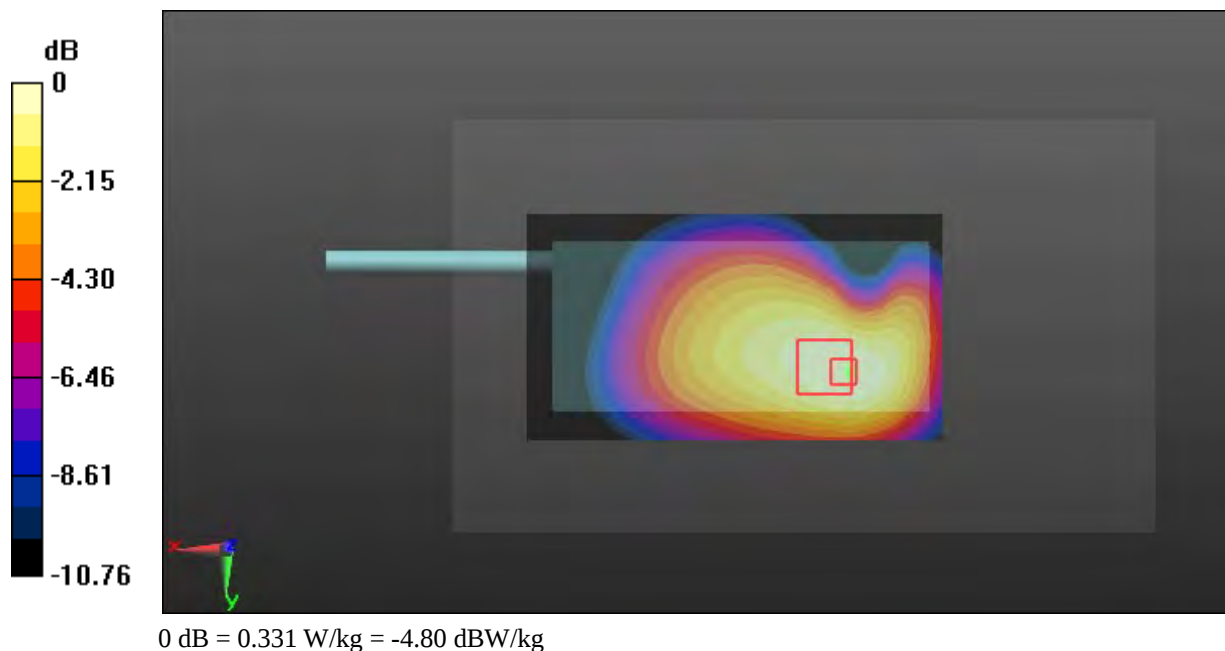

Test Plot 183#: LTE Band 12_Body Front _High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 711 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 54.997$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.296 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.56 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.299 W/kg

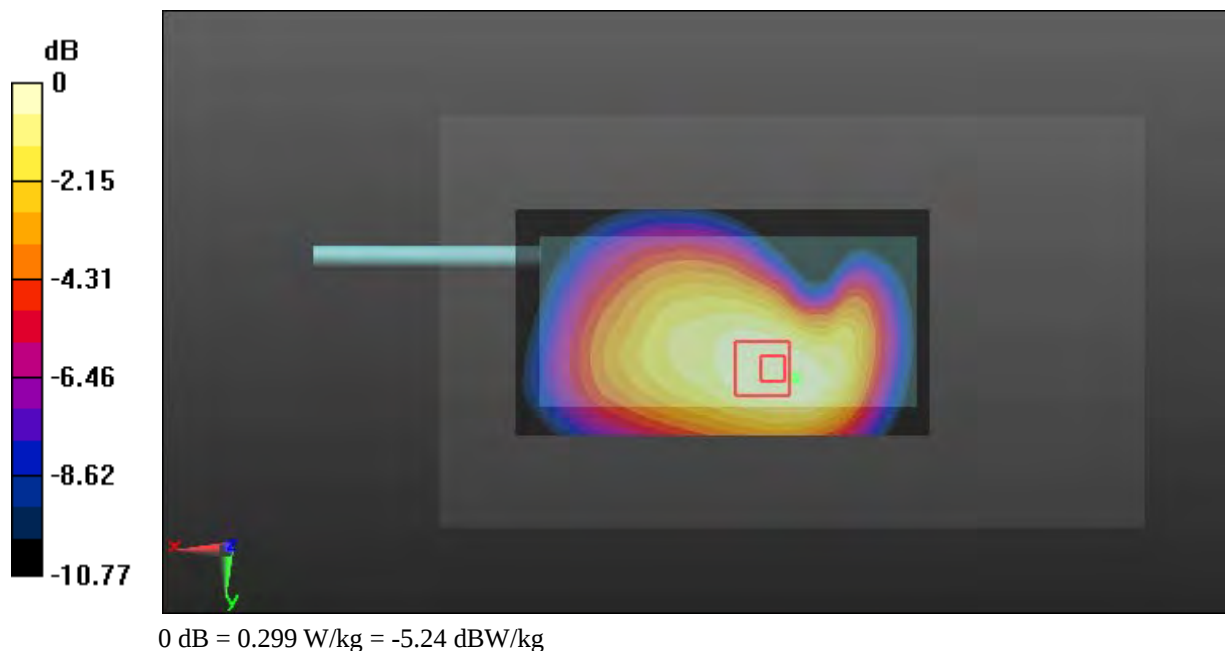

Test Plot 184#: LTE Band 12_Body Front _Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 55.172$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.266 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.19 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.264 W/kg

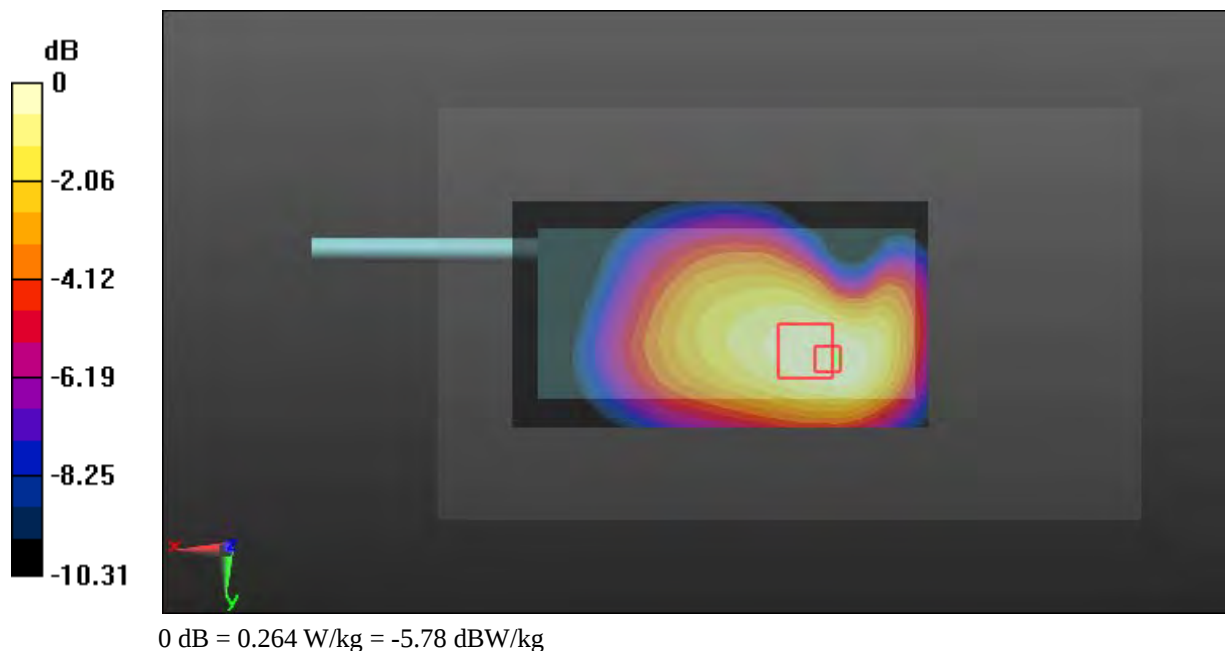

Test Plot 185#: LTE Band 12_Body Back_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 55.172$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0810 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.526 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.0823 W/kg

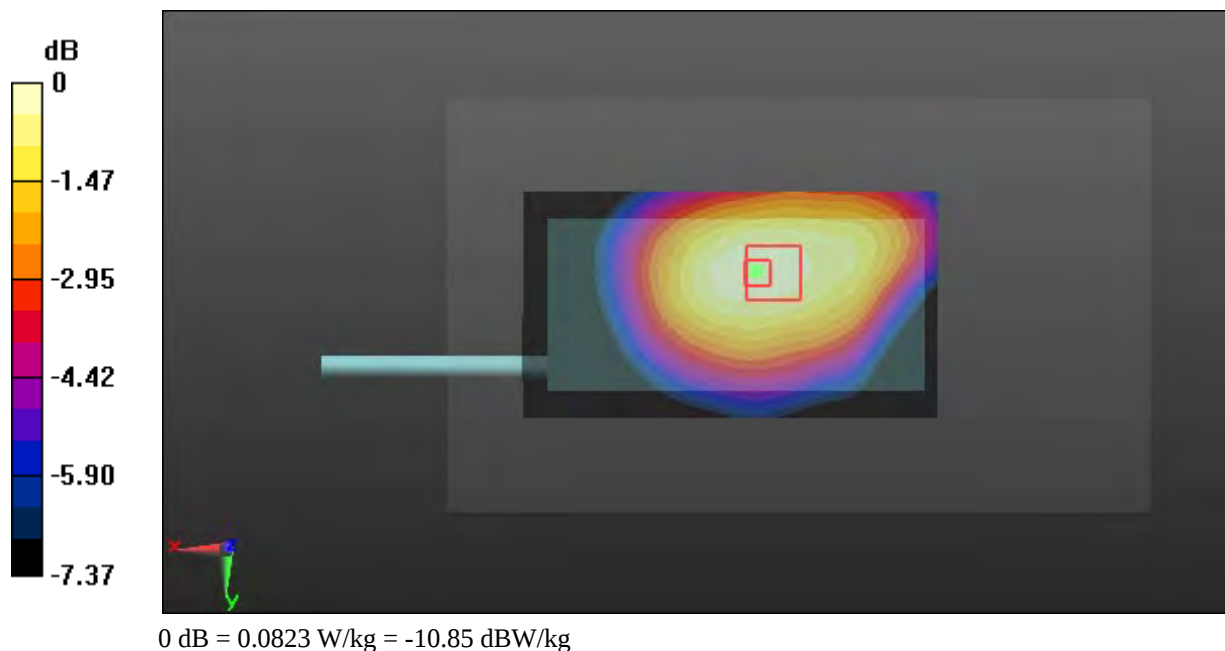

Test Plot 186#: LTE Band 12_Body Back_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 55.172$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0741 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.214 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0900 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.0738 W/kg

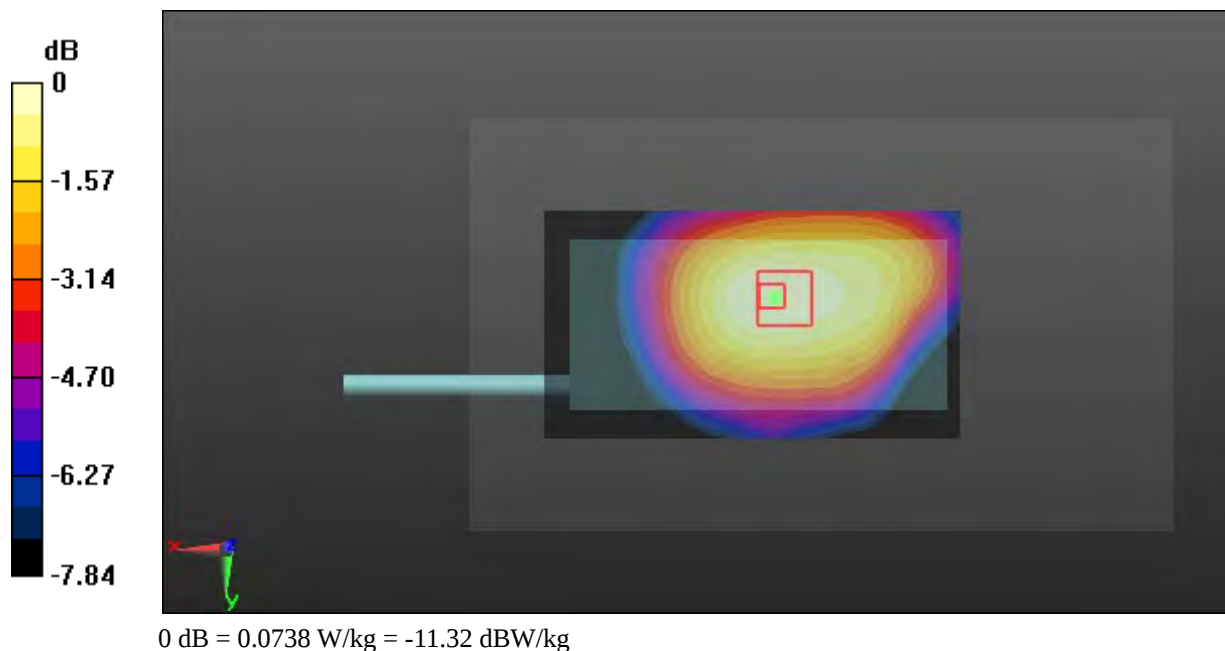

Test Plot 187#: LTE Band 12_Body Left_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 55.172$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.165 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.95 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.169 W/kg

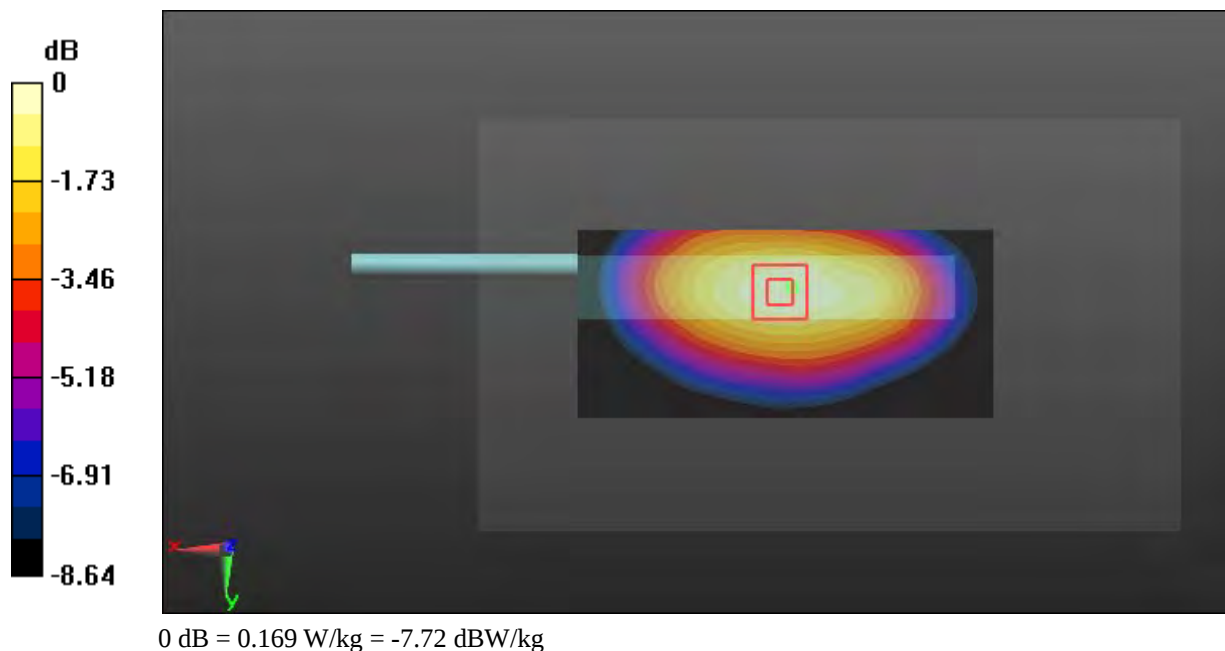

Test Plot 188#: LTE Band 12_Body Left_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 55.172$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.141 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.81 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.141 W/kg

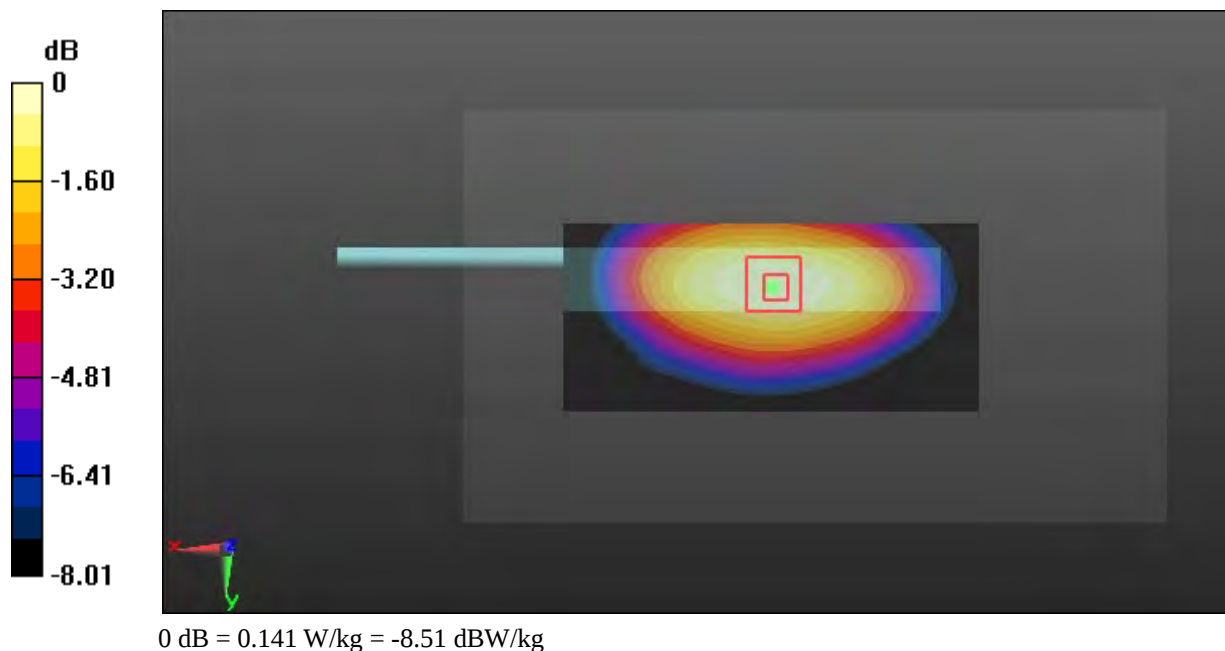

Test Plot 189#: LTE Band 12_Body Right_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 55.172$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0958 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.300 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.0899 W/kg

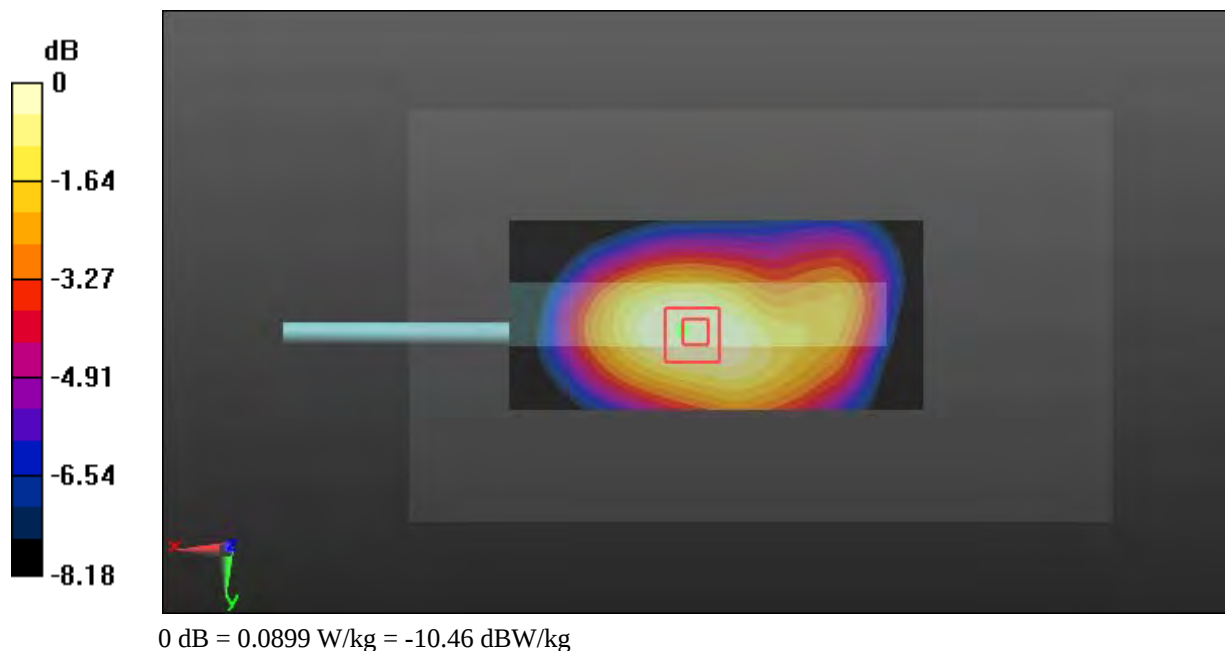

Test Plot 190#: LTE Band 12_Body Right_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 55.172$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0882 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.995 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.109 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.0885 W/kg

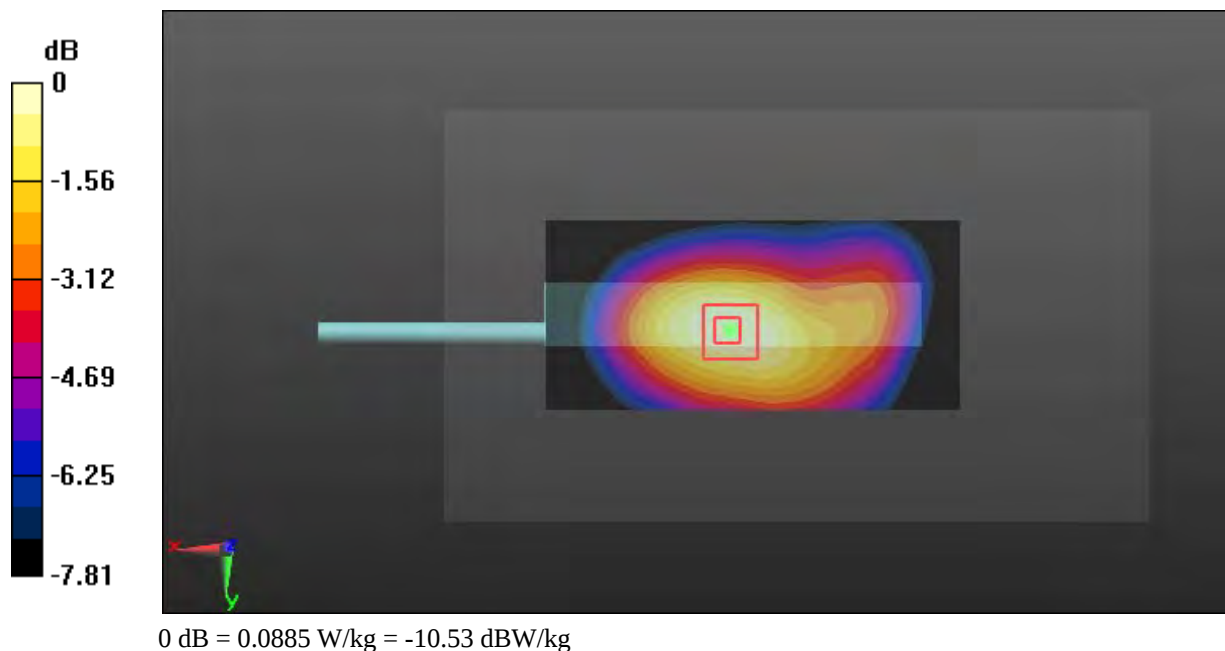

Test Plot 191#: LTE Band 12_Body Bottom_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 55.172$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0958 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.282 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.0929 W/kg

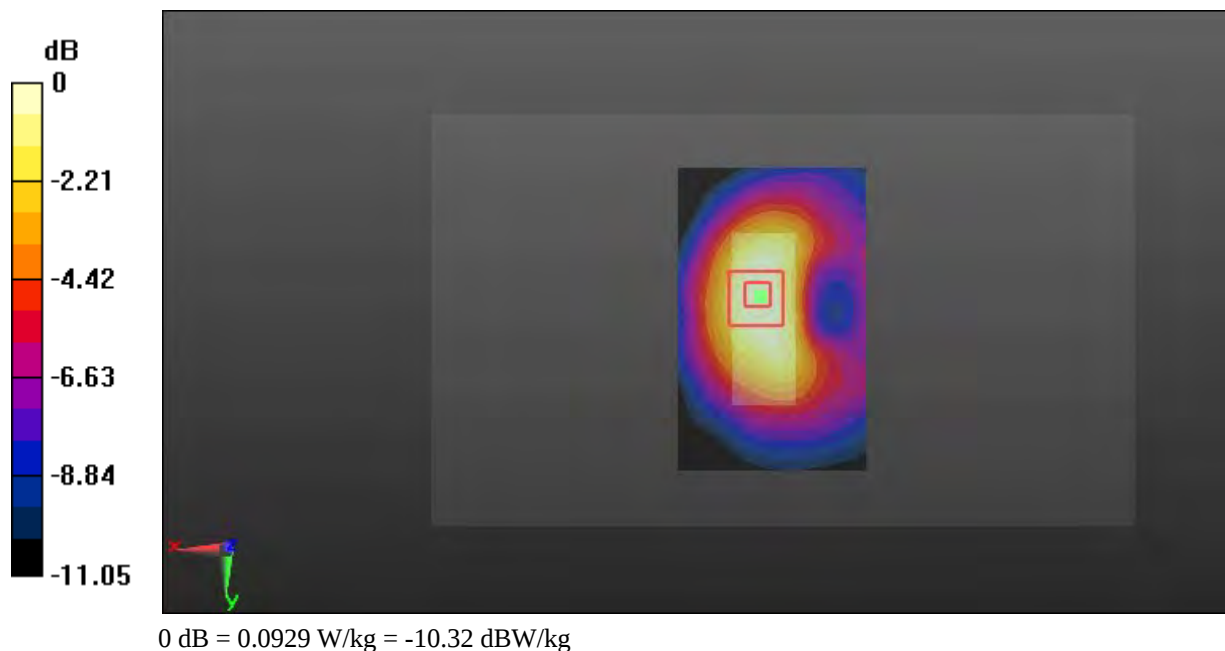

Test Plot 192#: LTE Band 12_Body Bottom_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 55.172$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0712 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.857 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0696 W/kg

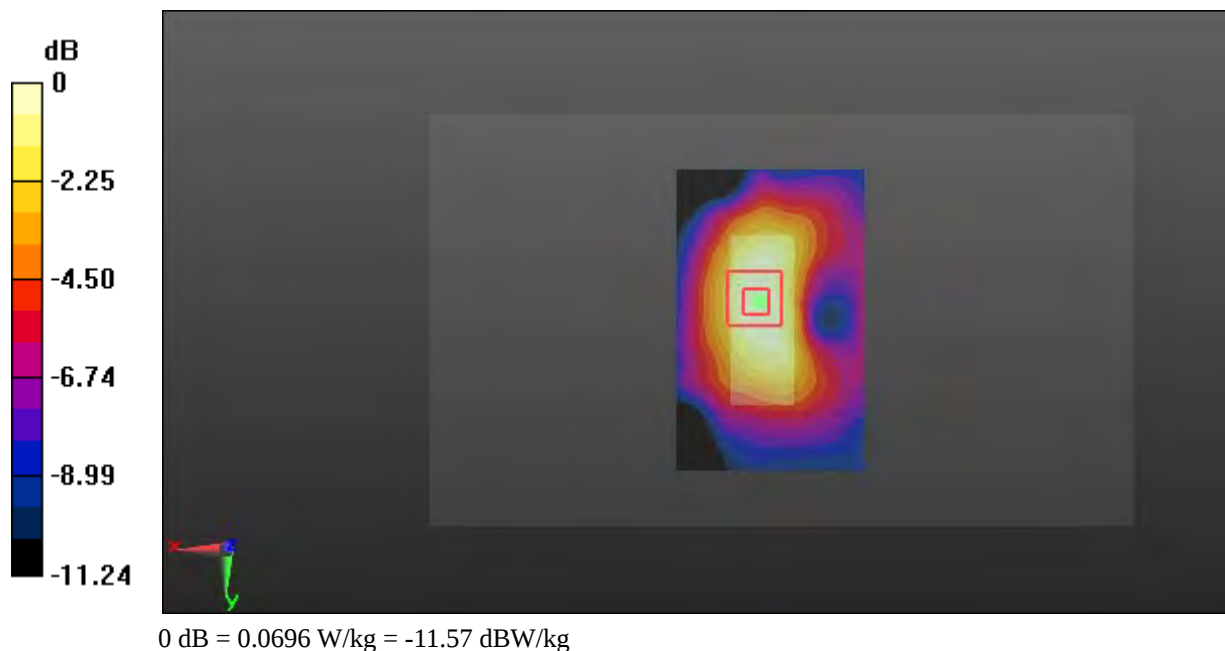


Test Plot 193#: LTE Band 13_Head Left Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 40.327$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

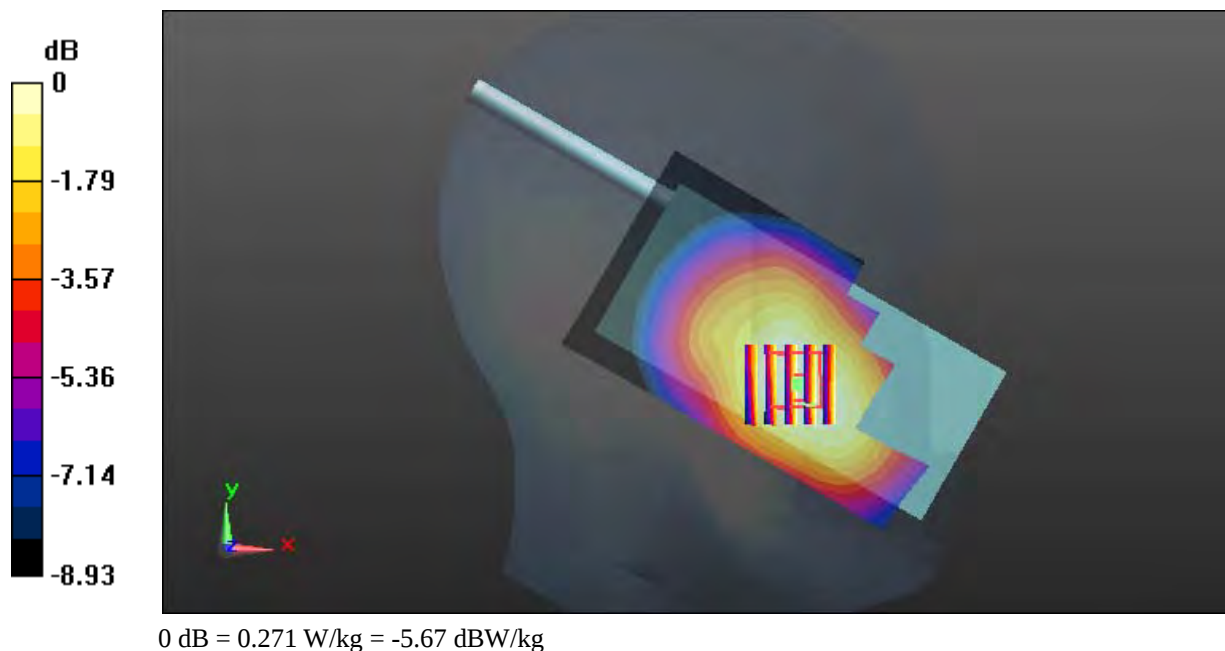Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.300 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.721 V/m ; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.336 W/kg **SAR(1 g) = 0.256 W/kg ; SAR(10 g) = 0.189 W/kg** Maximum value of SAR (measured) = 0.271 W/kg 

Test Plot 194#: LTE Band 13_Head Left Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 40.327$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.223 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.593 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.221 W/kg

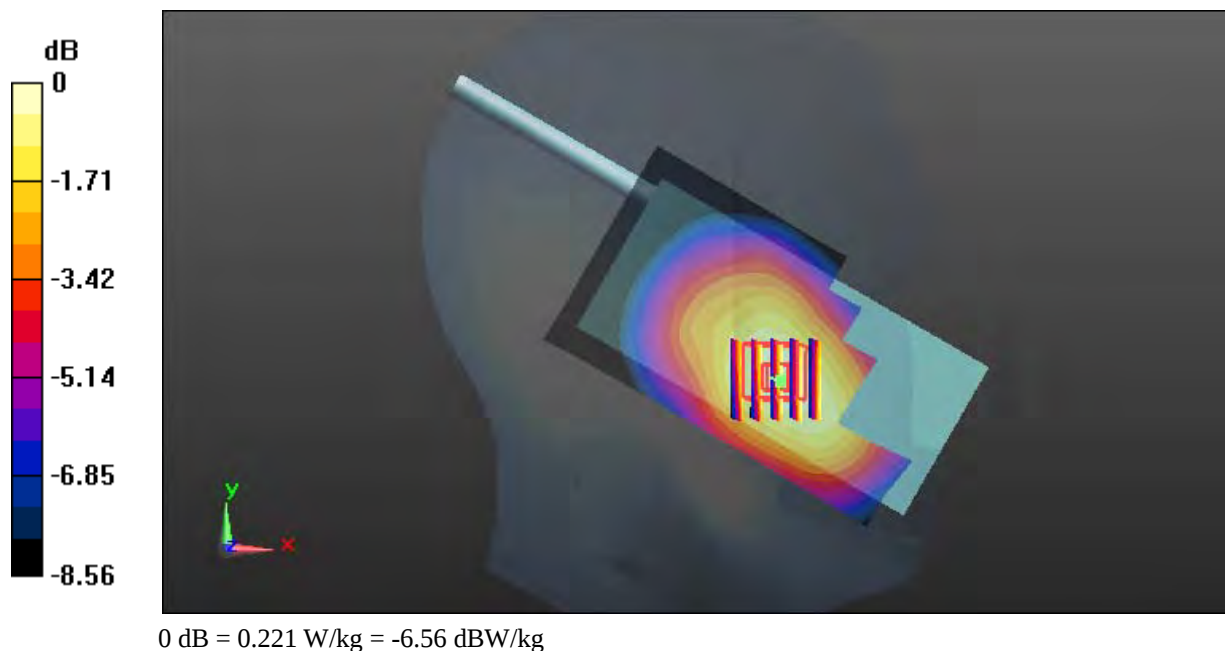


Test Plot 195#: LTE Band 13_Head Left Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 40.327$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

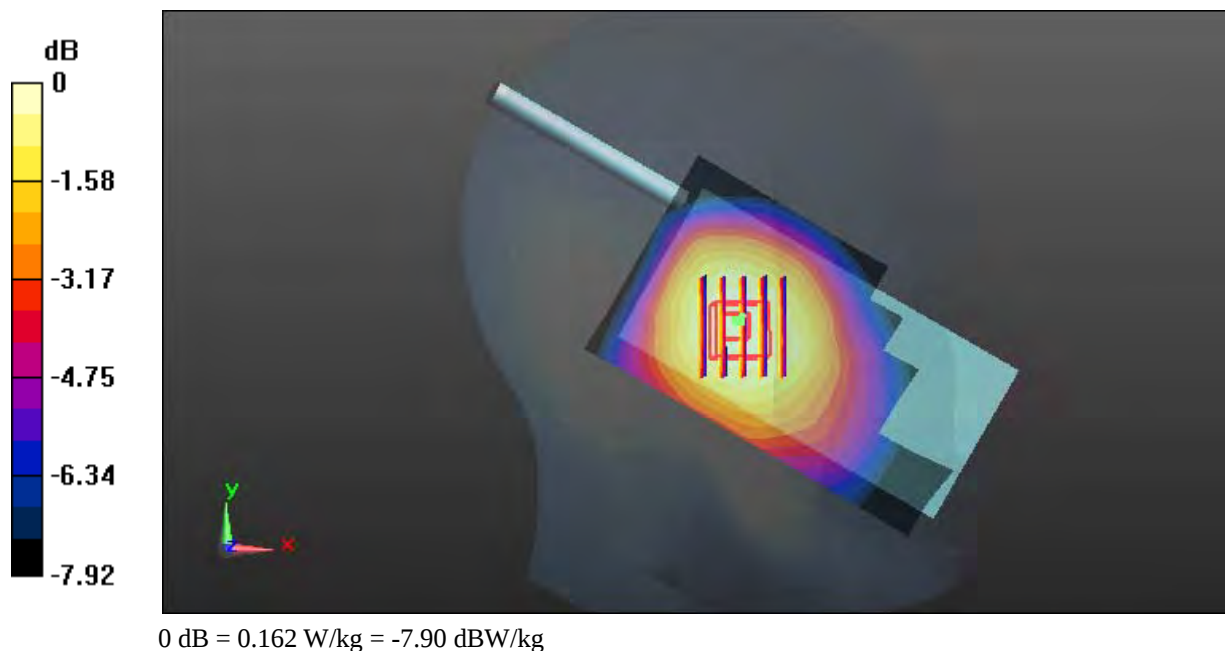Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.161 W/kg **Zoom Scan (5x6x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.76 V/m ; Power Drift = -0.11 dB Peak SAR (extrapolated) = 0.197 W/kg **SAR(1 g) = 0.155 W/kg ; SAR(10 g) = 0.121 W/kg** Maximum value of SAR (measured) = 0.162 W/kg 

Test Plot 196#: LTE Band 13_Head Left Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 40.327$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.122 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.33 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.124 W/kg

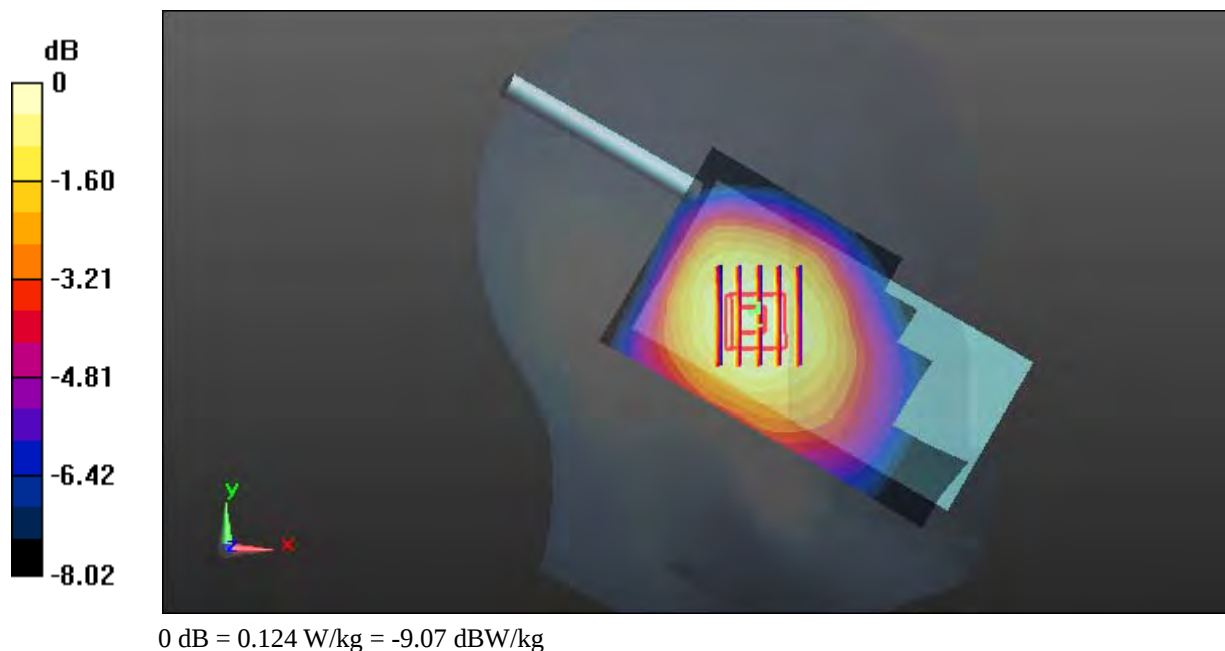


Test Plot 197#: LTE Band 13_Head Right Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 40.327$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

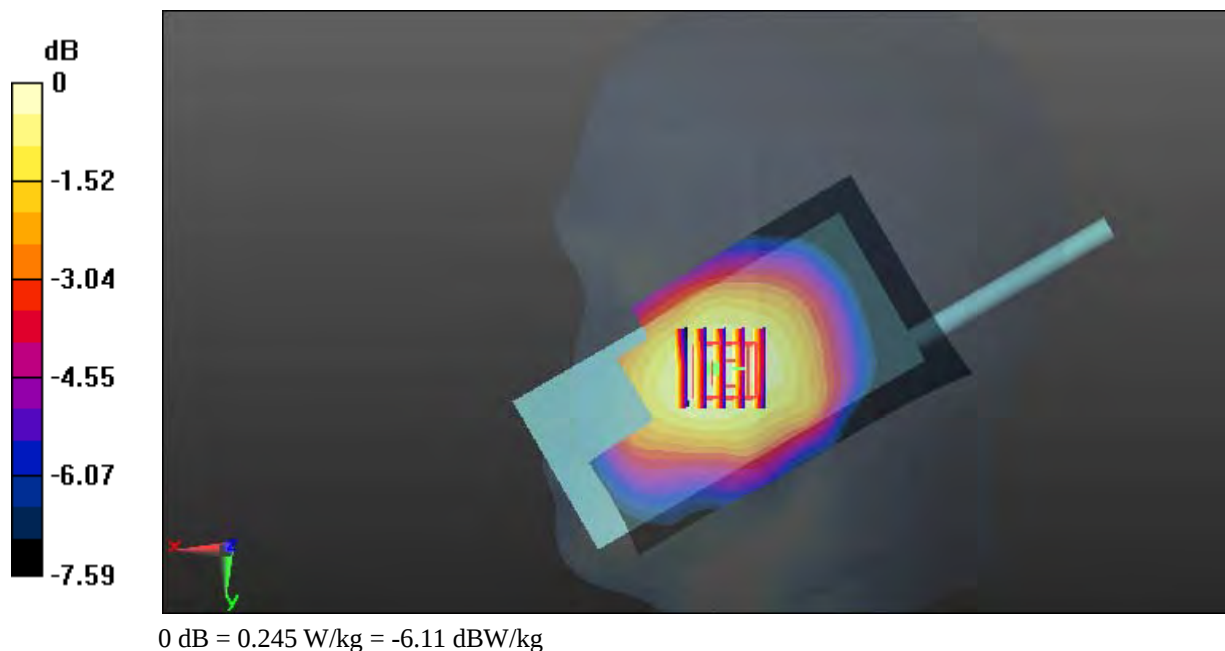
Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.240 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.005 V/m ; Power Drift = 0.16 dB Peak SAR (extrapolated) = 0.286 W/kg **SAR(1 g) = 0.234 W/kg ; SAR(10 g) = 0.183 W/kg** Maximum value of SAR (measured) = 0.245 W/kg 

Test Plot 198#: LTE Band 13_Head Right Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 40.327$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

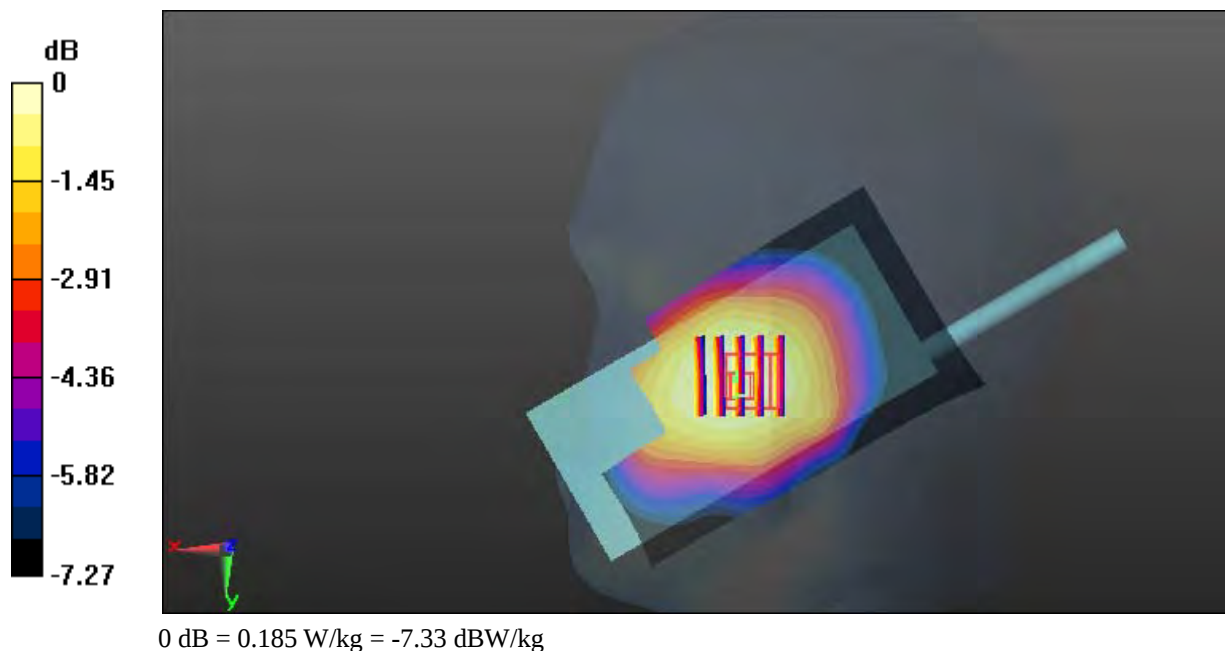
Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.184 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.215 V/m ; Power Drift = -0.12 dB Peak SAR (extrapolated) = 0.218 W/kg **SAR(1 g) = 0.177 W/kg ; SAR(10 g) = 0.139 W/kg** Maximum value of SAR (measured) = 0.185 W/kg 

Test Plot 199#: LTE Band 13_Head Right Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 40.327$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

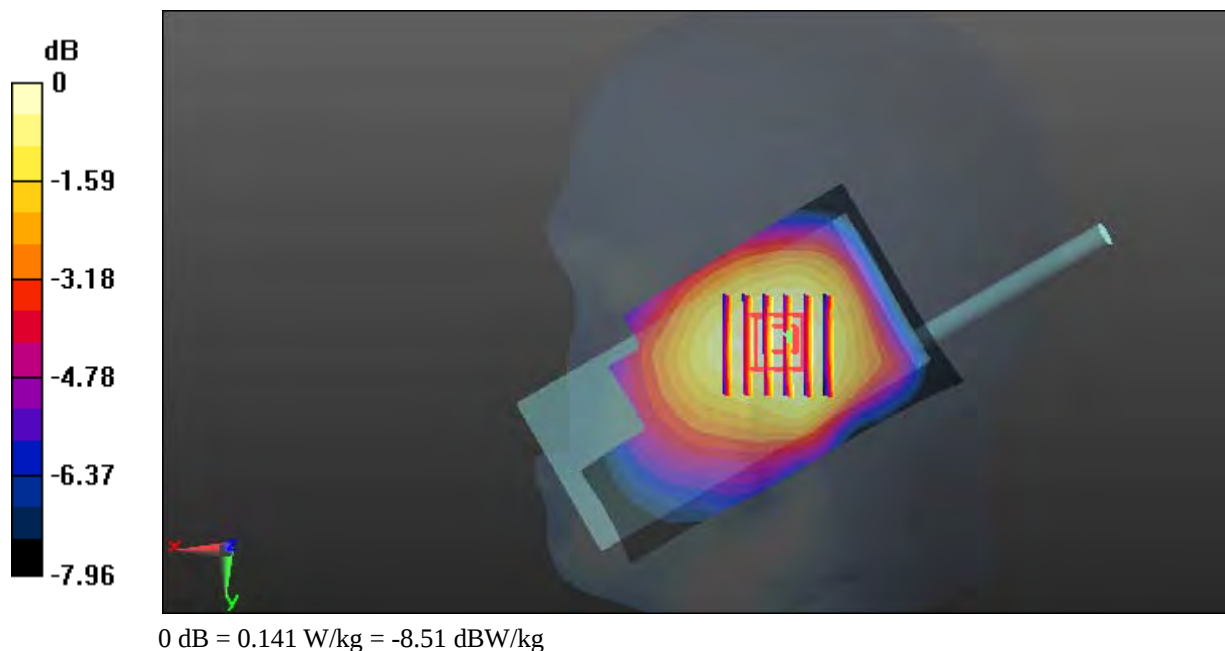
Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.141 W/kg **Zoom Scan (6x6x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.18 V/m ; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.165 W/kg **SAR(1 g) = 0.134 W/kg ; SAR(10 g) = 0.106 W/kg** Maximum value of SAR (measured) = 0.141 W/kg 

Test Plot 200#: LTE Band 13_Head Right Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 40.327$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

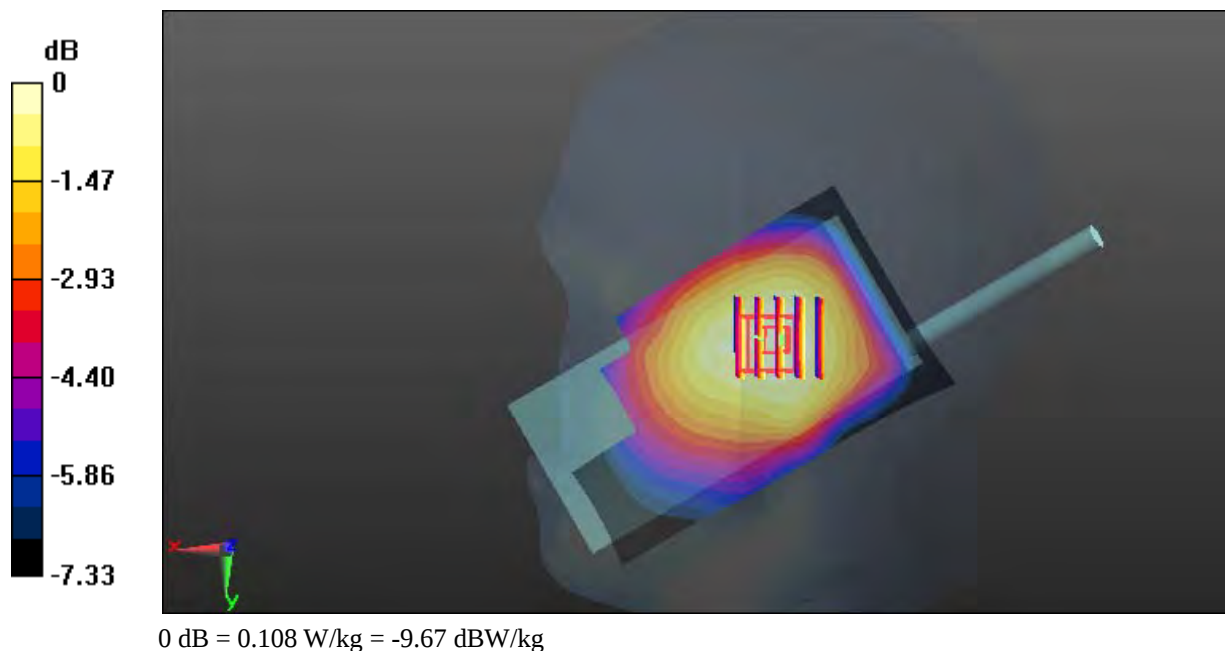
Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.109 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.953 V/m ; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.127 W/kg **SAR(1 g) = 0.104 W/kg ; SAR(10 g) = 0.083 W/kg** Maximum value of SAR (measured) = 0.108 W/kg 

Test Plot 201#: LTE Band 13_Face Up_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 40.327$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

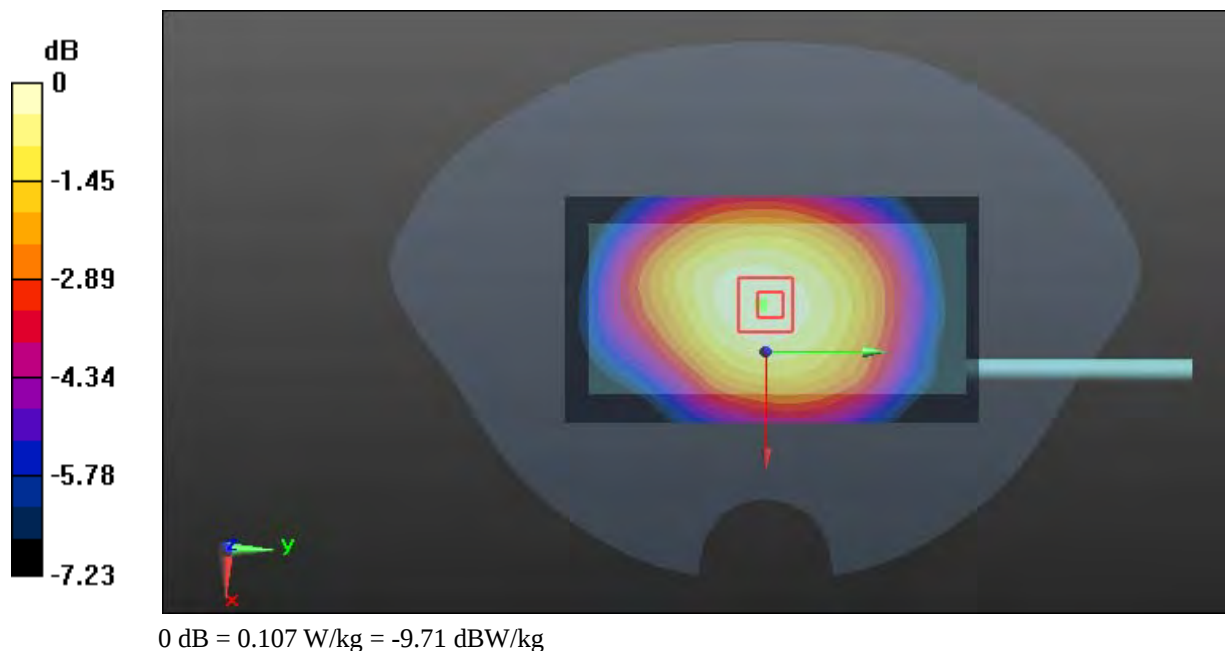Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.106 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.73 V/m ; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.128 W/kg **SAR(1 g) = 0.101 W/kg ; SAR(10 g) = 0.078 W/kg** Maximum value of SAR (measured) = 0.107 W/kg 

DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820

DASY5 Configuration:


- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Maximum value of SAR (interpolated) = 0.0819 W/kg

Reference Value = 9.536 V/m; Power Drift = 0.07 dB

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.0818 W/kg

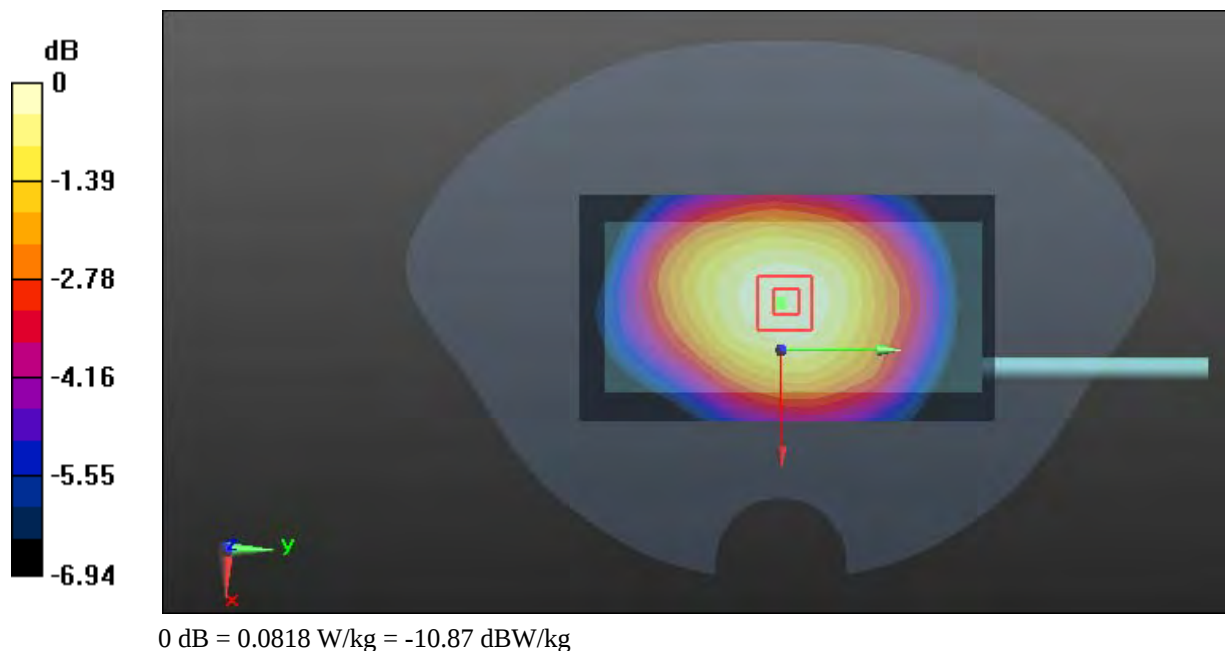

Test Plot 203#: LTE Band 13_Body Front _Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 52.79$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.334 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.13 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.353 W/kg

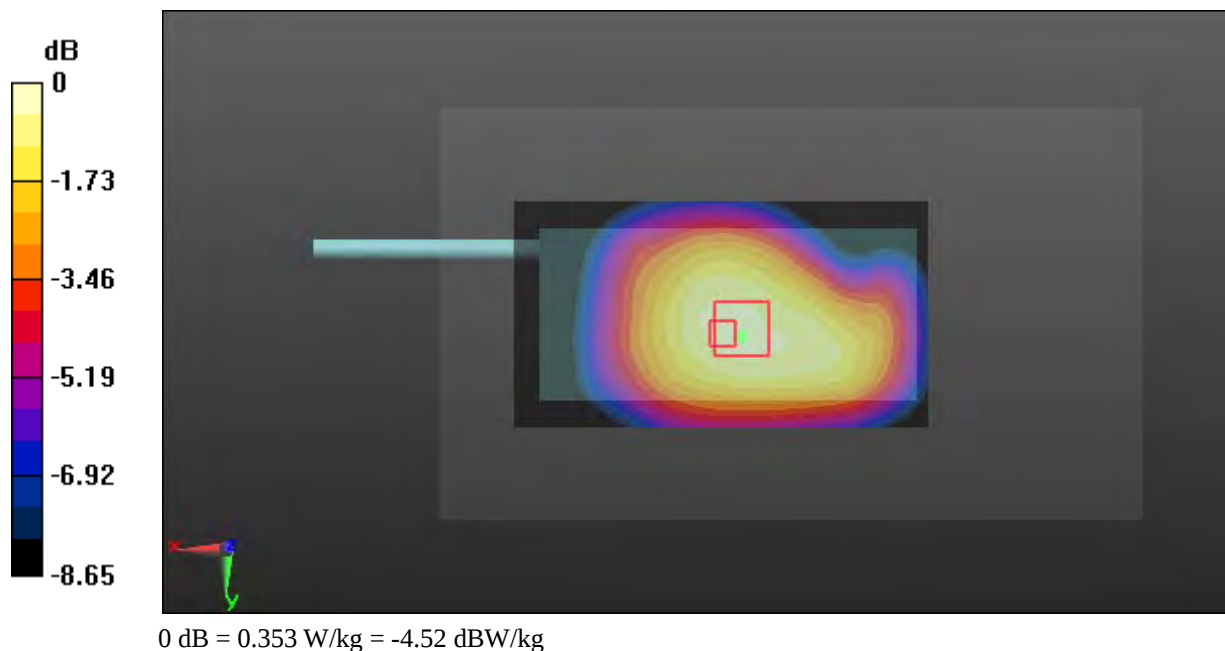


Test Plot 204#: LTE Band 13_Body Front _Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 1.009 \text{ S/m}$; $\epsilon_r = 52.79$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

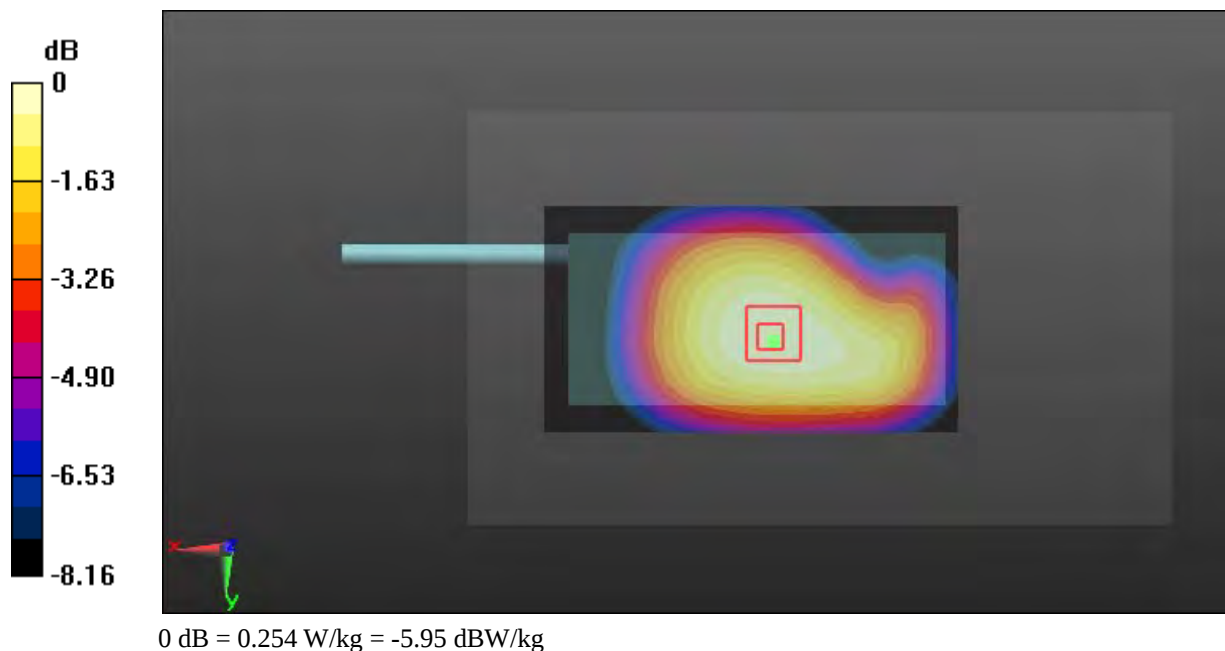Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.255 W/kg **Zoom Scan (6x6x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 15.42 V/m ; Power Drift = -0.12 dB Peak SAR (extrapolated) = 0.302 W/kg **SAR(1 g) = 0.243 W/kg ; SAR(10 g) = 0.189 W/kg** Maximum value of SAR (measured) = 0.254 W/kg 

Test Plot 205#: LTE Band 13_Body Back_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 52.79$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.176 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.63 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.173 W/kg

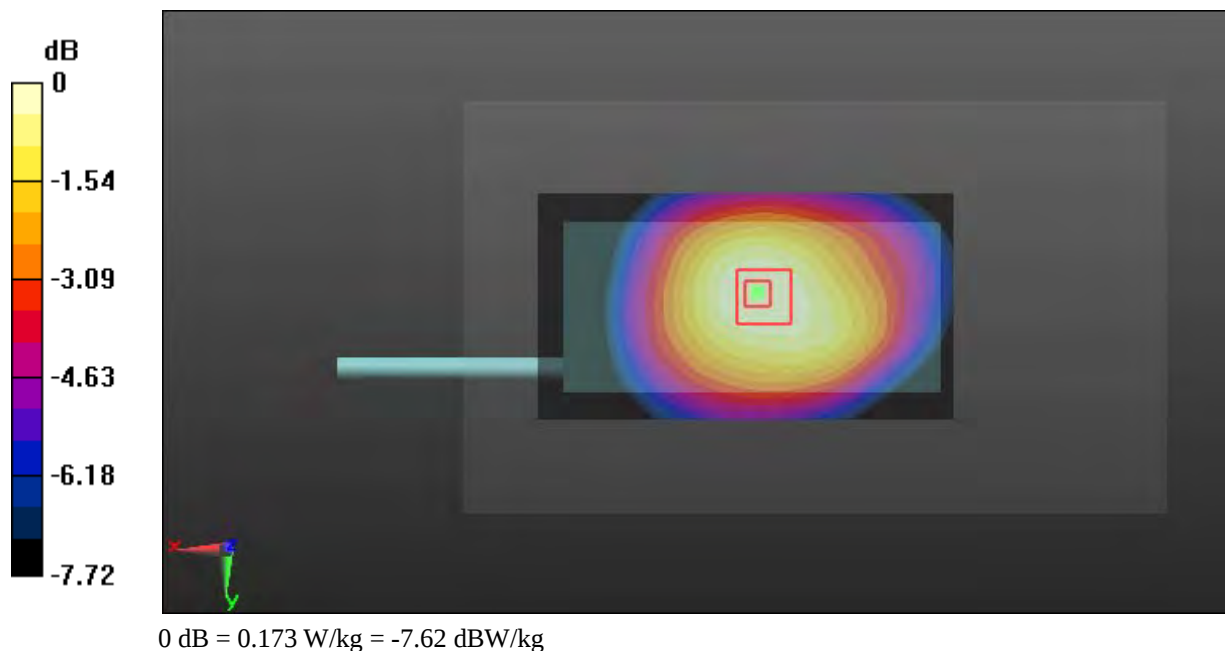

Test Plot 206#: LTE Band 13_Body Back_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 52.79$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.131 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.89 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.131 W/kg

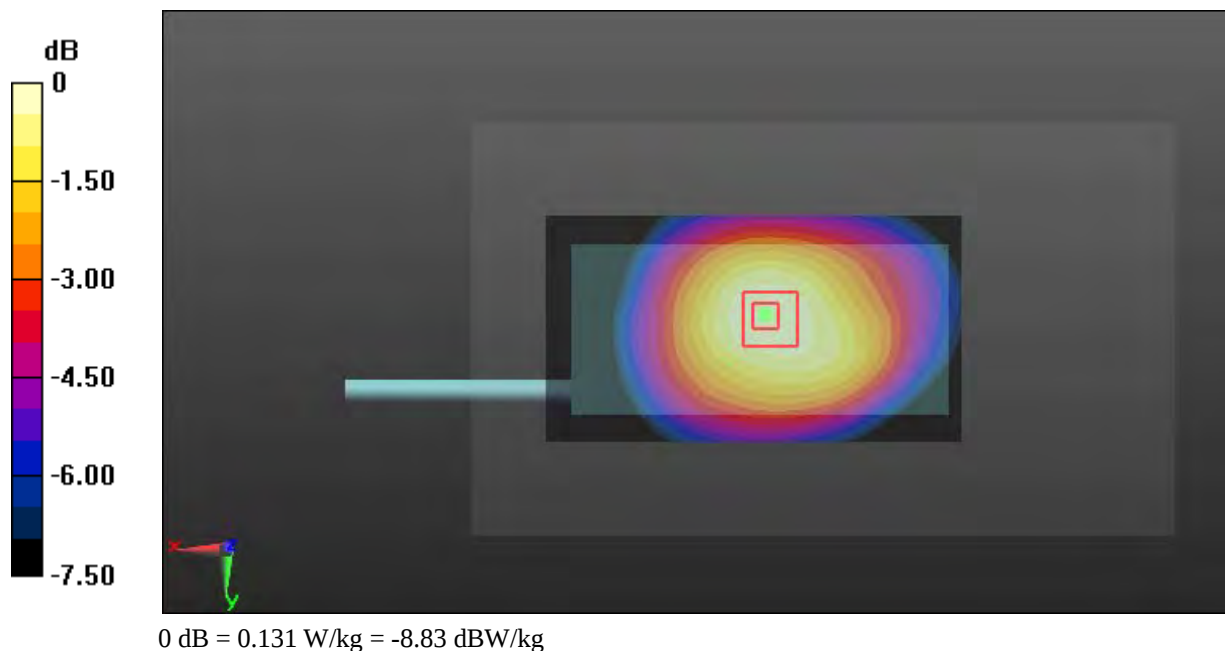

Test Plot 207#: LTE Band 13_Body Left_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 52.79$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.276 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.57 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.276 W/kg

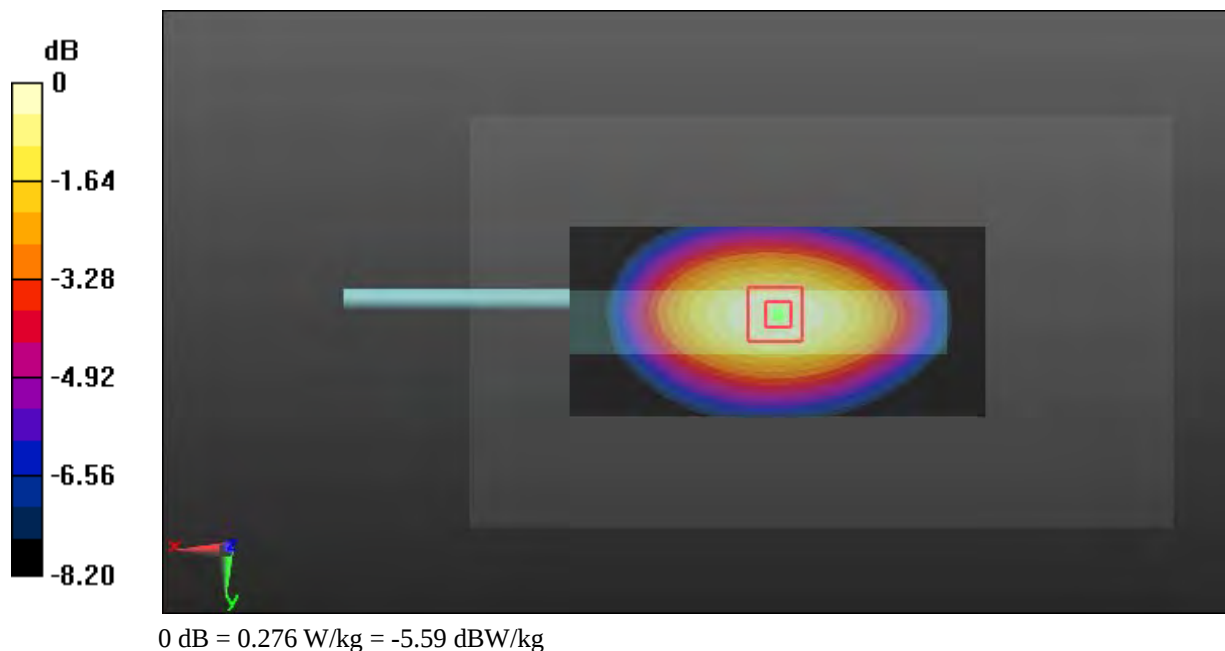

Test Plot 208#: LTE Band 13_Body Left_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 52.79$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.209 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.98 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.208 W/kg

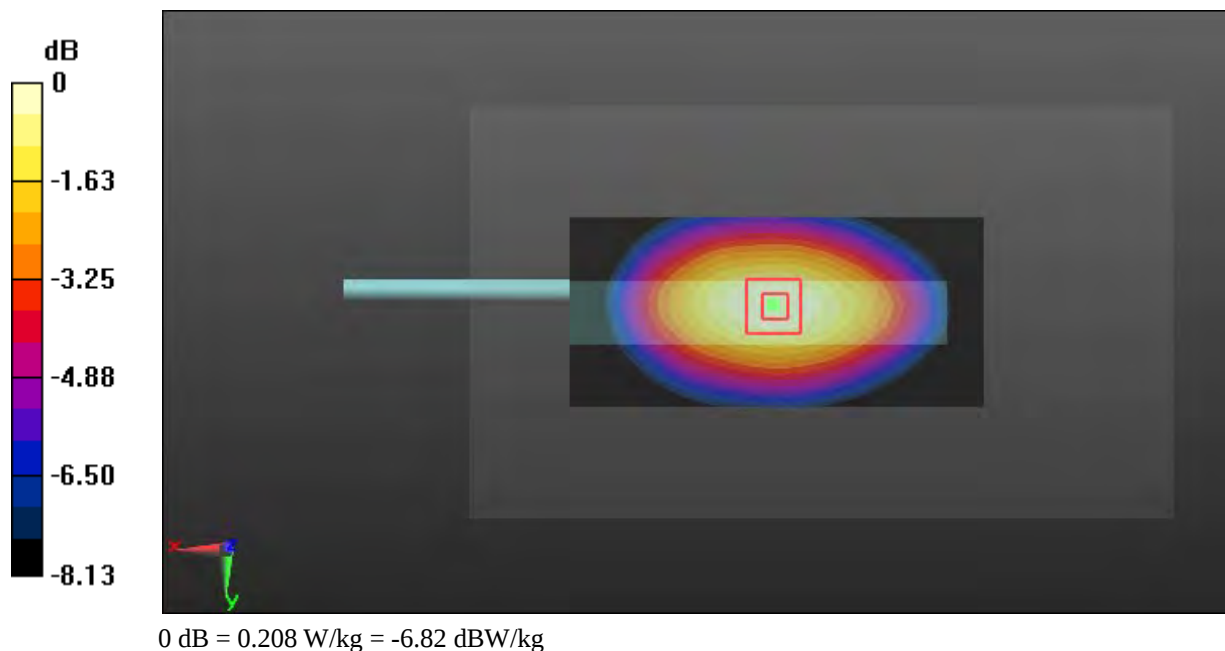

Test Plot 209#: LTE Band 13_Body Right_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 52.79$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.321 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.82 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.316 W/kg

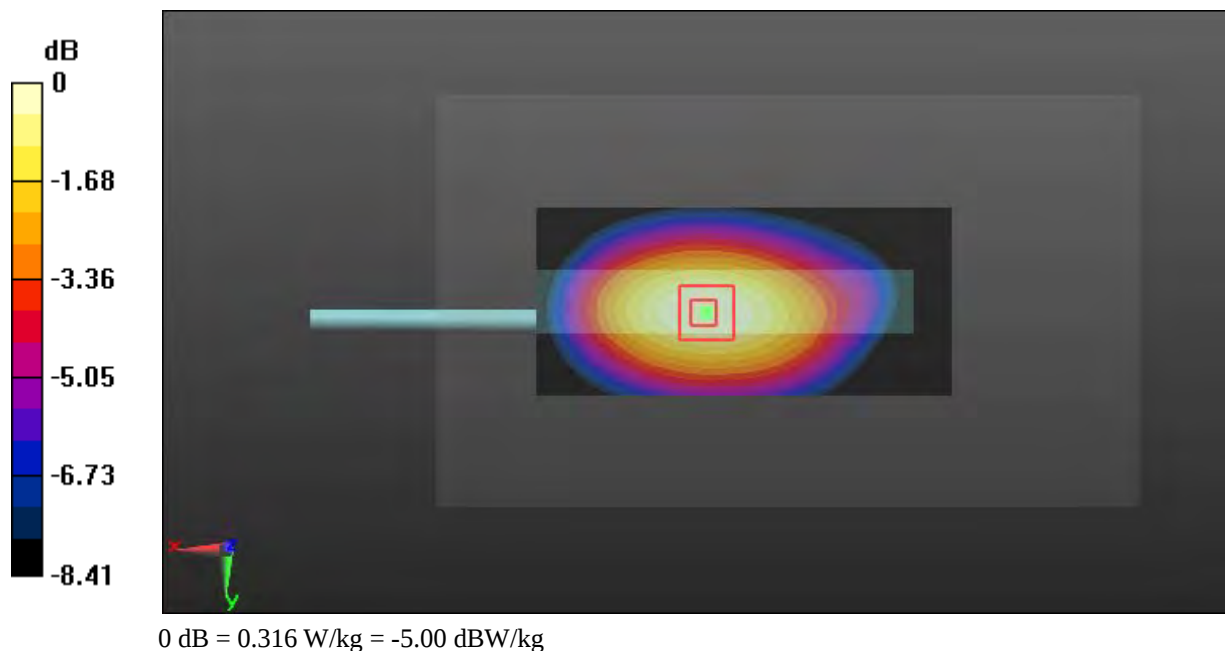

Test Plot 210#: LTE Band 13_Body Right_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 52.79$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.243 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.84 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.238 W/kg

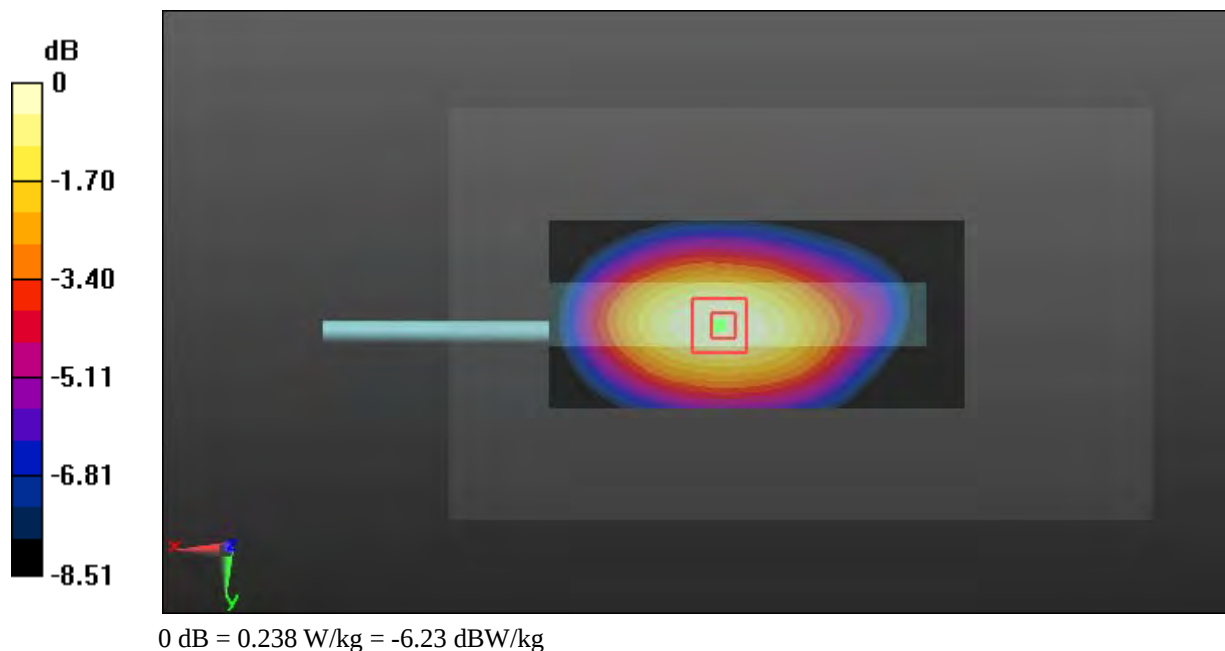

Test Plot 211#: LTE Band 13_Body Bottom_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 52.79$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0757 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.271 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.123 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0734 W/kg

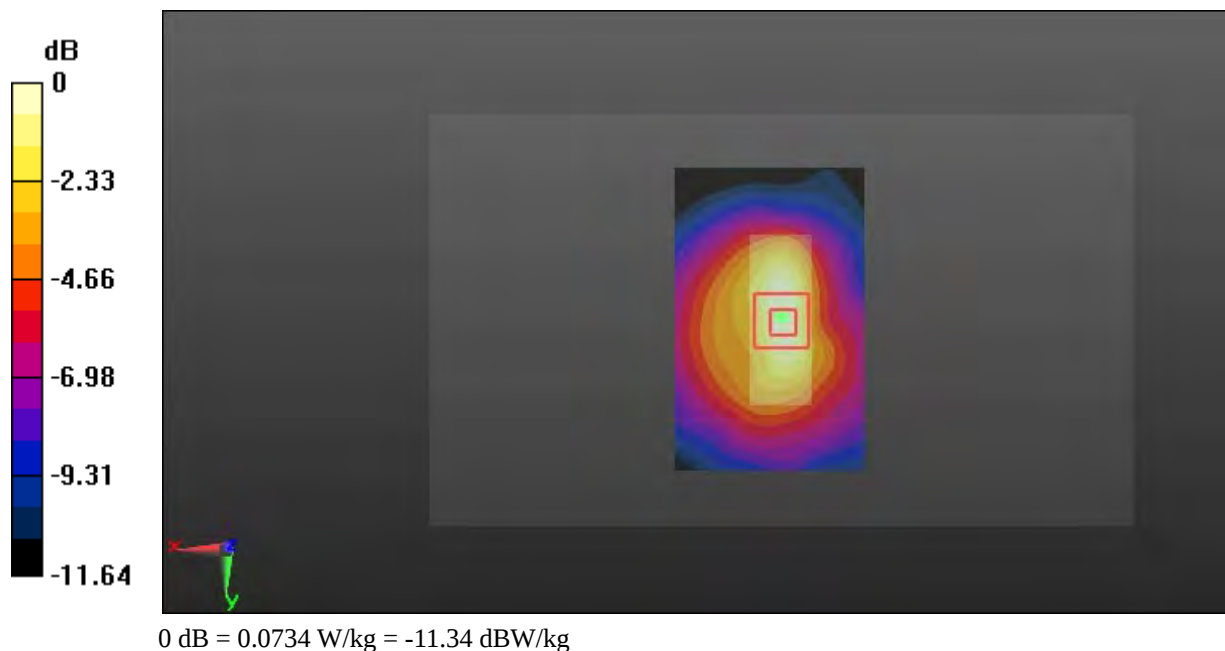


Test Plot 212#: LTE Band 13_Body Bottom_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 1.009 \text{ S/m}$; $\epsilon_r = 52.79$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

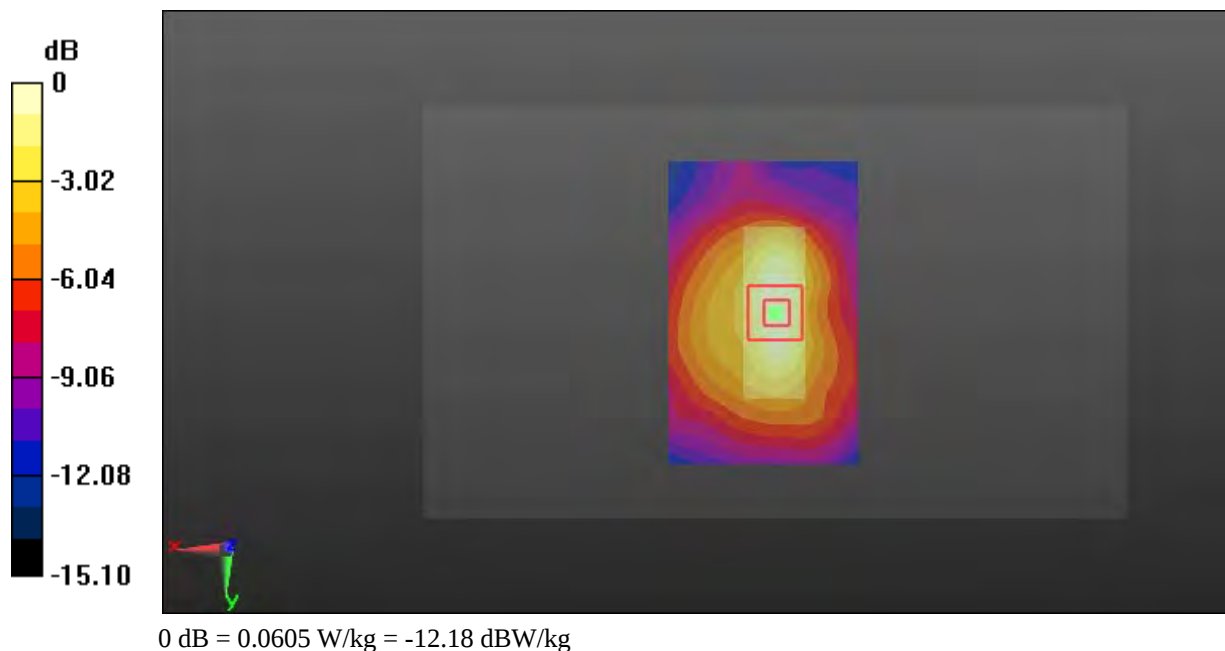Area Scan (51x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0631 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.020 V/m ; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.0980 W/kg **SAR(1 g) = 0.054 W/kg ; SAR(10 g) = 0.031 W/kg** Maximum value of SAR (measured) = 0.0605 W/kg 

Test Plot 213#: LTE Band 17_Head Left Cheek_Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 709 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 709$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 42.99$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.250 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.713 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 0.238 W/kg

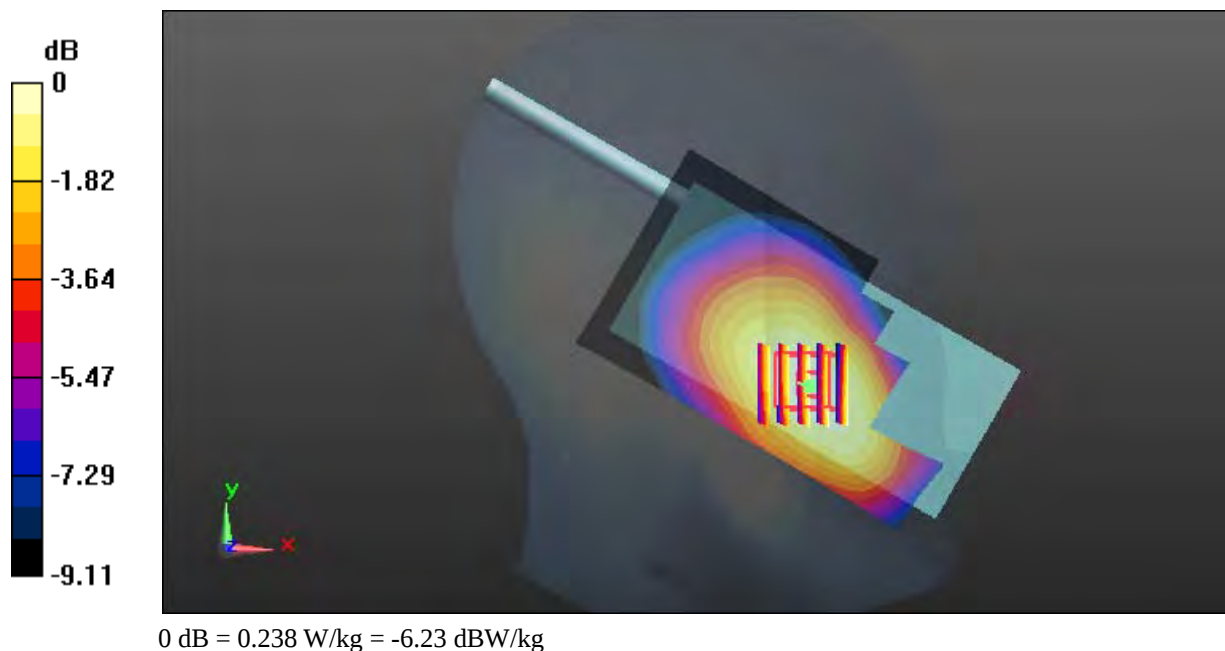

Test Plot 214#: LTE Band 17_Head Left Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.978$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.230 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.497 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.300 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.250 W/kg

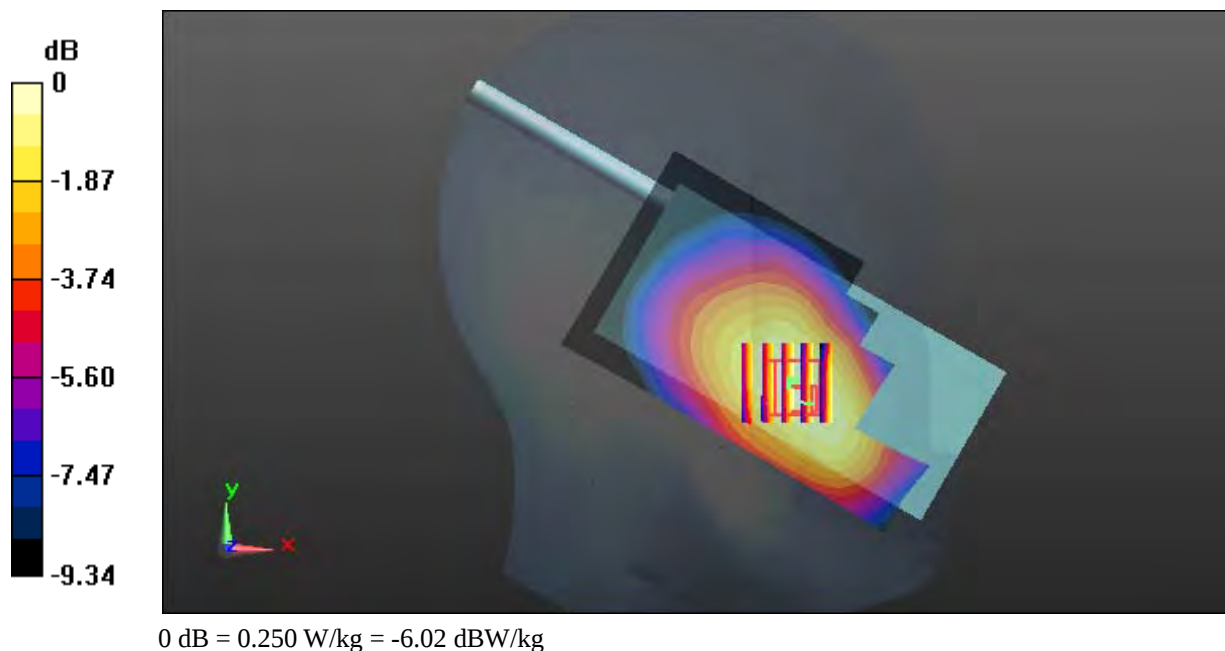

Test Plot 215#: LTE Band 17_Head Left Cheek_High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 711 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 711$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.446$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.241 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.989 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

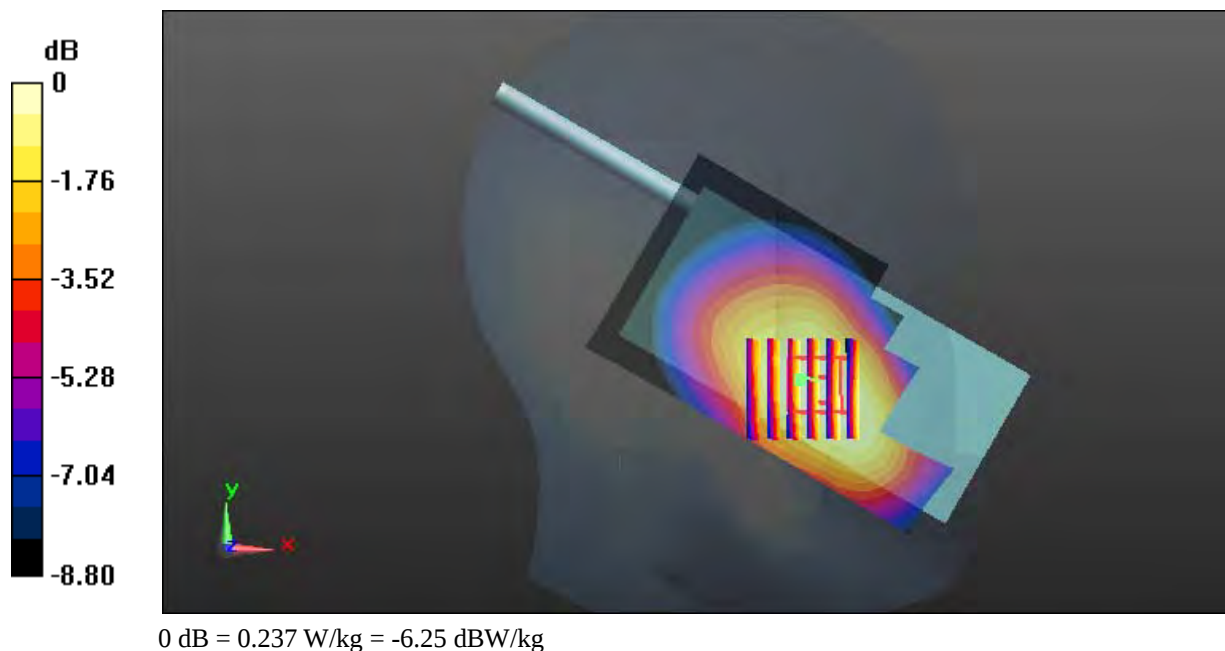

Test Plot 216#: LTE Band 17_Head Left Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.978$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.180 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.335 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.179 W/kg

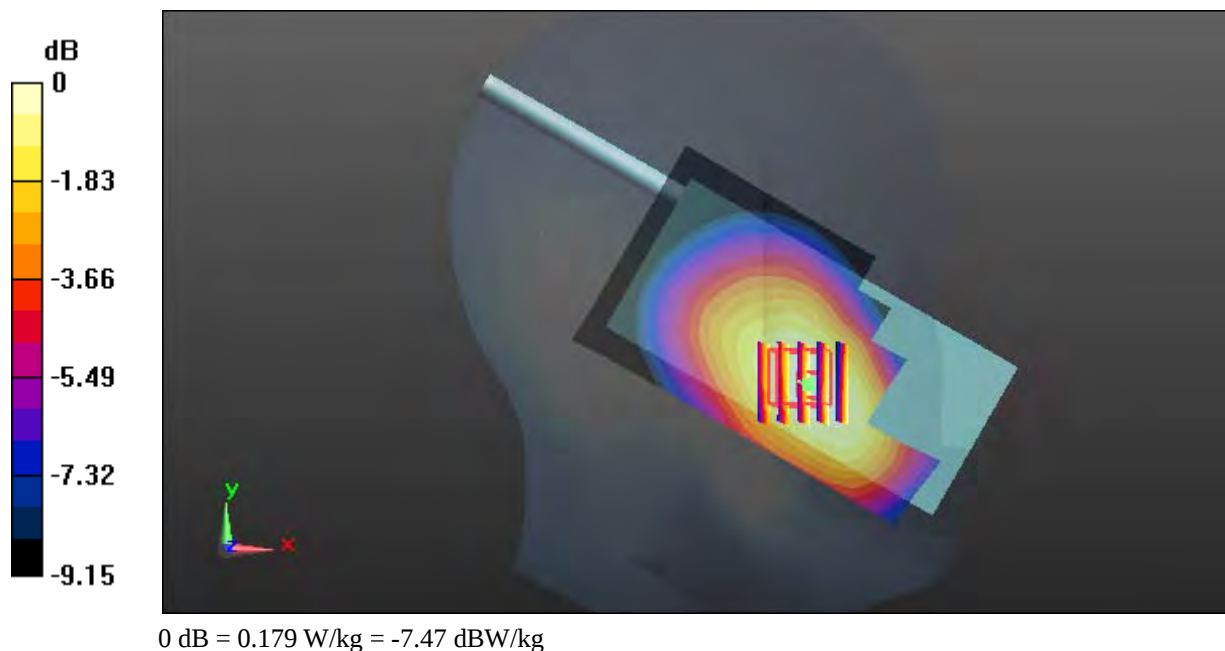

Test Plot 217#: LTE Band 17_Head Left Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.978$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0963 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.028 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.103 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.0916 W/kg

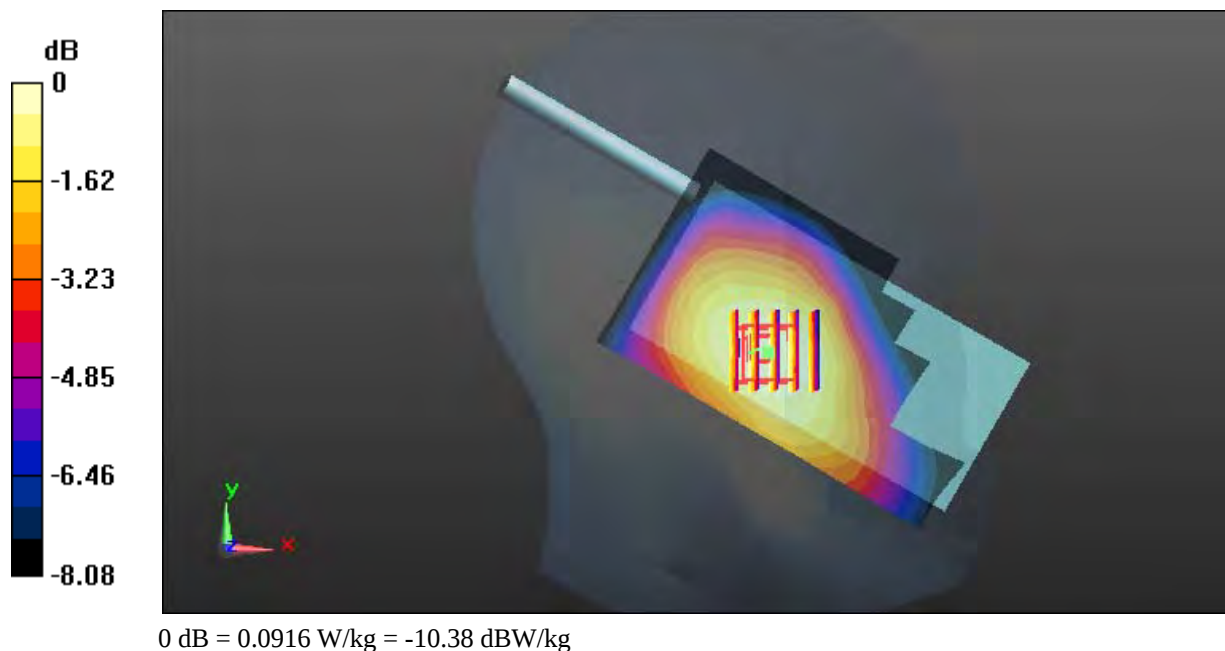

Test Plot 218#: LTE Band 17_Head Left Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.978$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0665 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.617 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.0680 W/kg

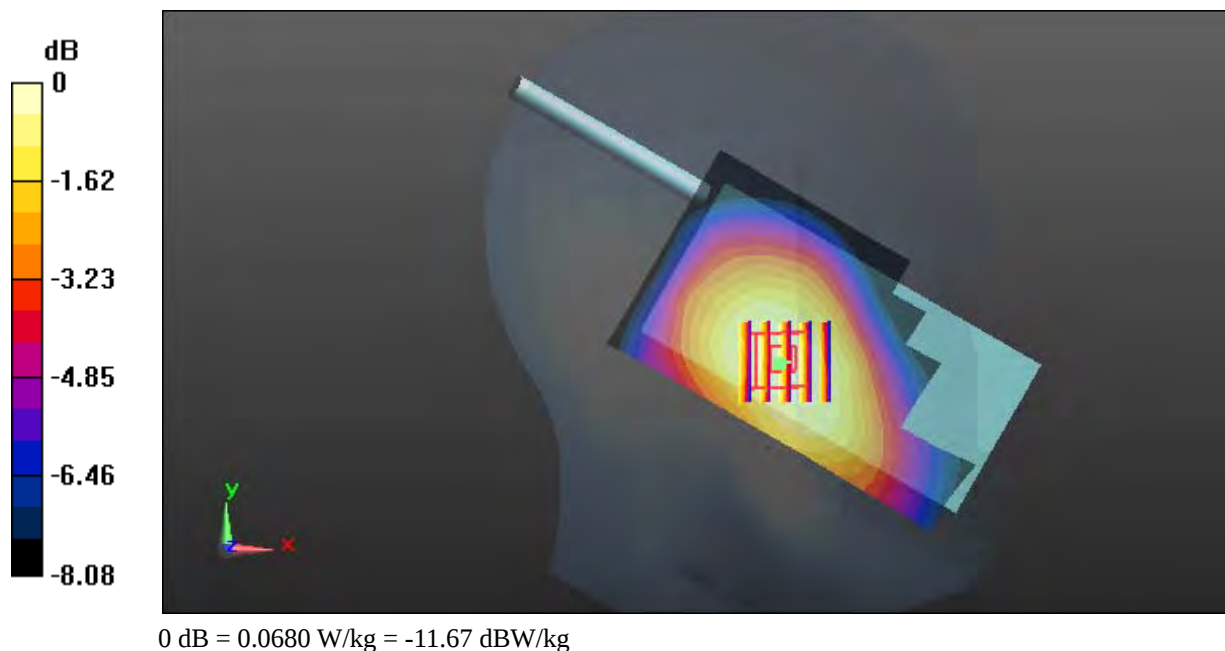

Test Plot 219#: LTE Band 17_Head Right Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.978$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.239 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.780 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 0.232 W/kg

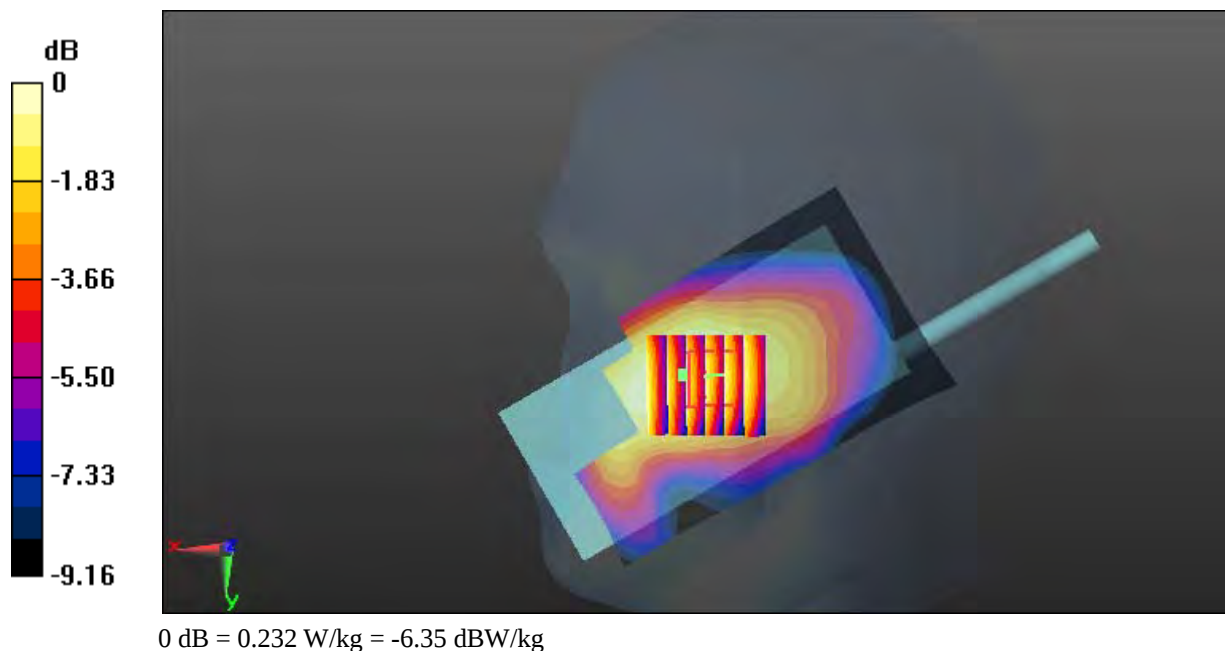

Test Plot 220#: LTE Band 17_Head Right Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.978$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.174 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.187 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

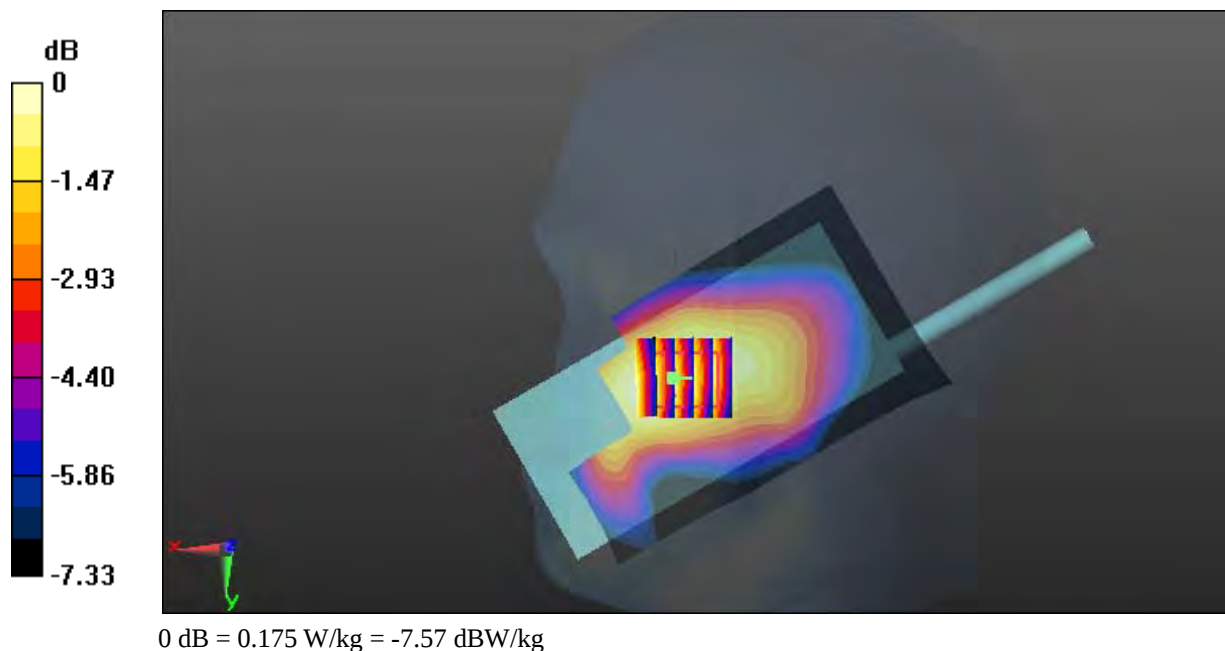

Test Plot 221#: LTE Band 17_Head Right Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.978$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0996 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.775 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

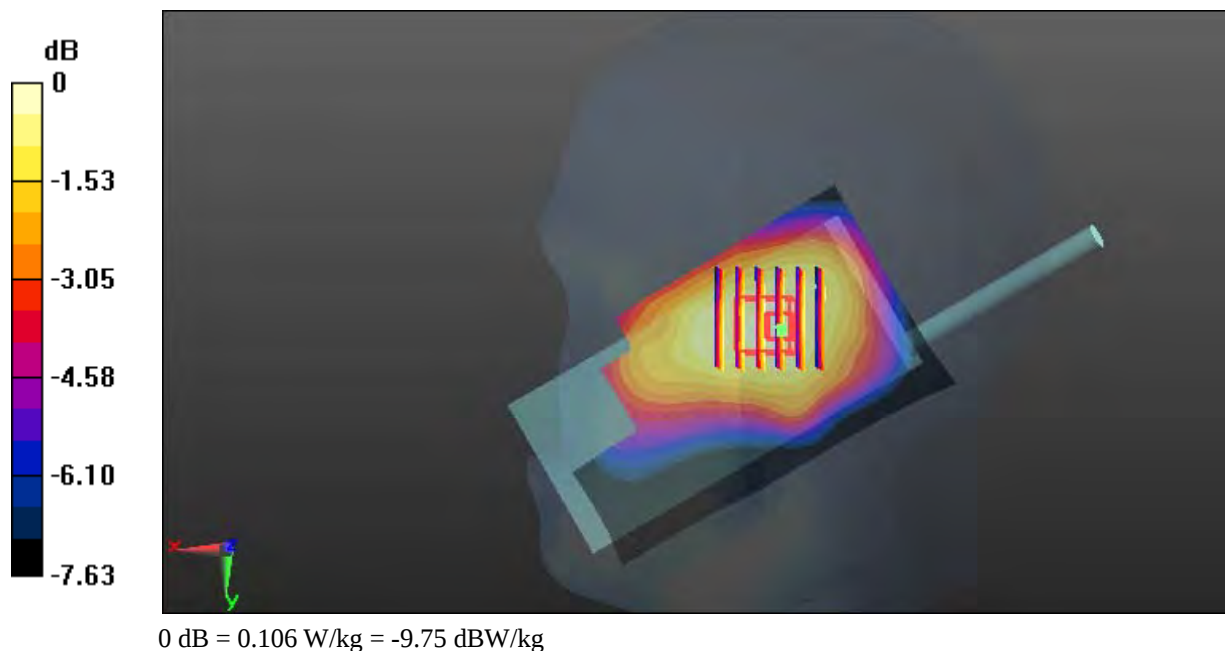

Test Plot 222#: LTE Band 17_Head Right Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.978$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0705 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.138 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0719 W/kg

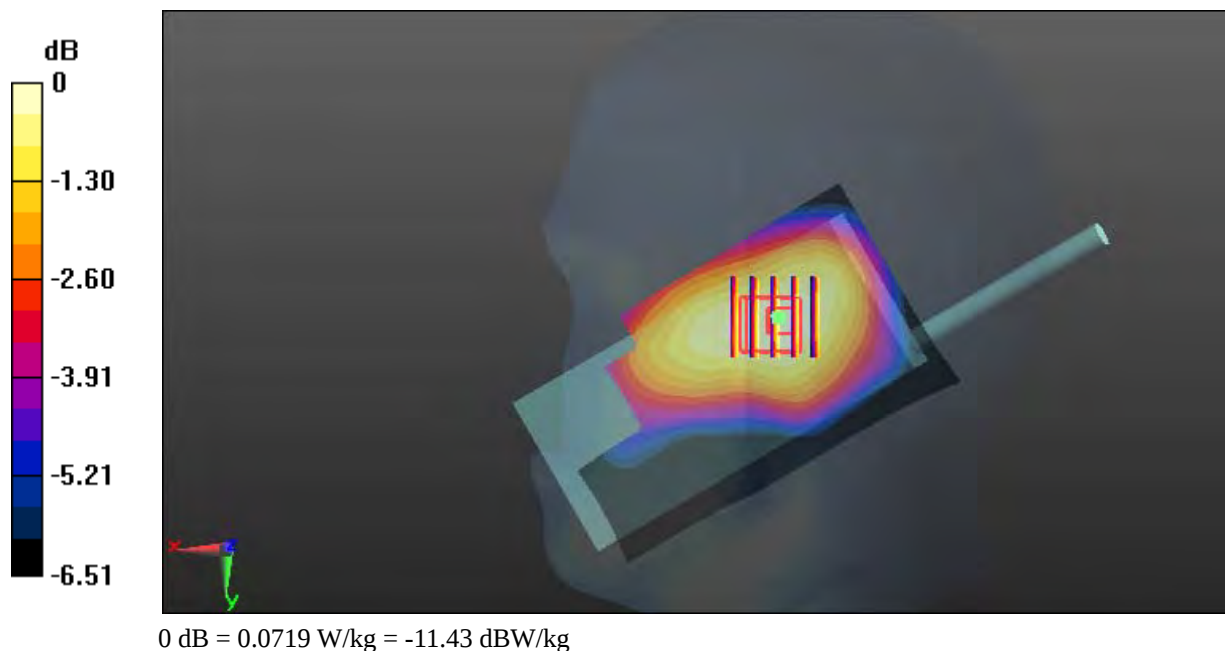

Test Plot 223#: LTE Band 17_Face Up_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.978$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.108 W/kg

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.12 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.112 W/kg



Test Plot 224#: LTE Band 17_Face Up_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.978$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0856 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.866 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.0867 W/kg

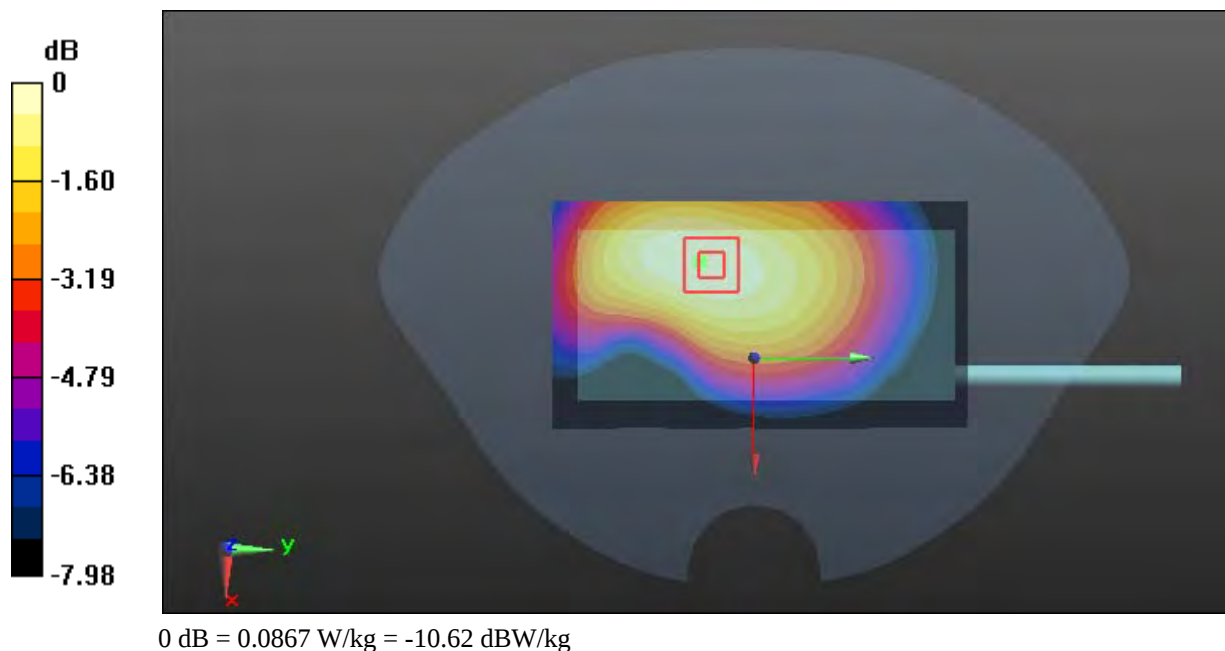

Test Plot 225#: LTE Band 17_Body Front _Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 709 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 709$ MHz; $\sigma = 0.959$ S/m; $\epsilon_r = 55.15$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.290 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.15 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.293 W/kg

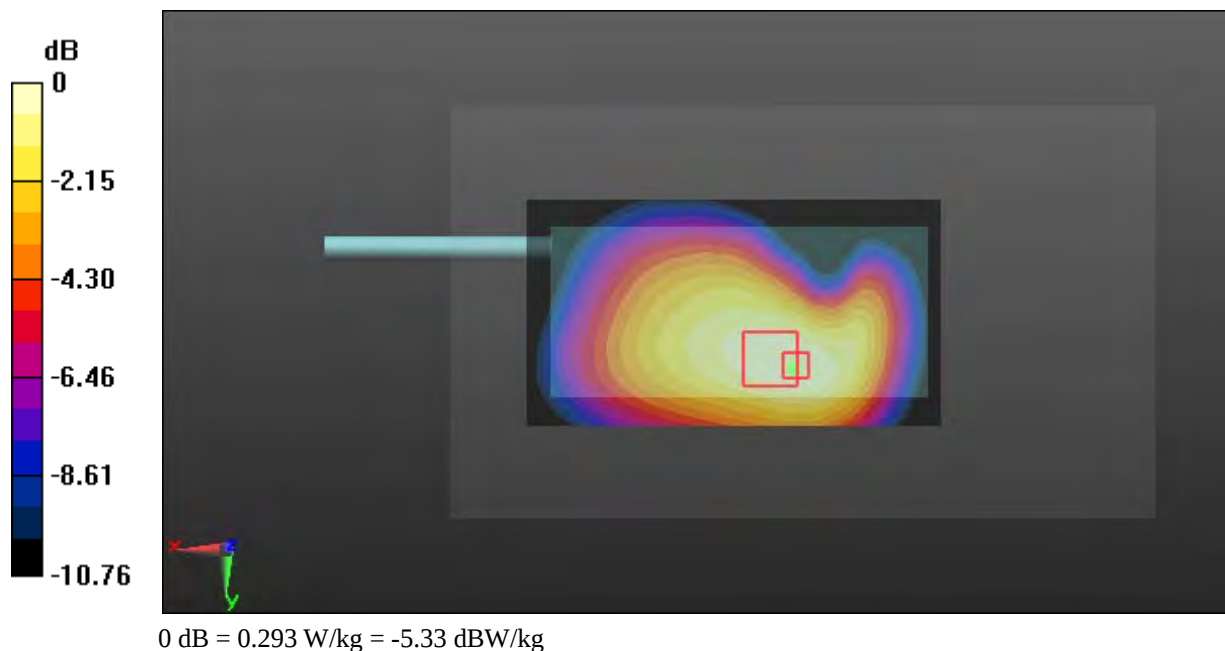

Test Plot 226#: LTE Band 17_Body Front _Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.962$ S/m; $\epsilon_r = 55.094$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.312 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.13 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.313 W/kg

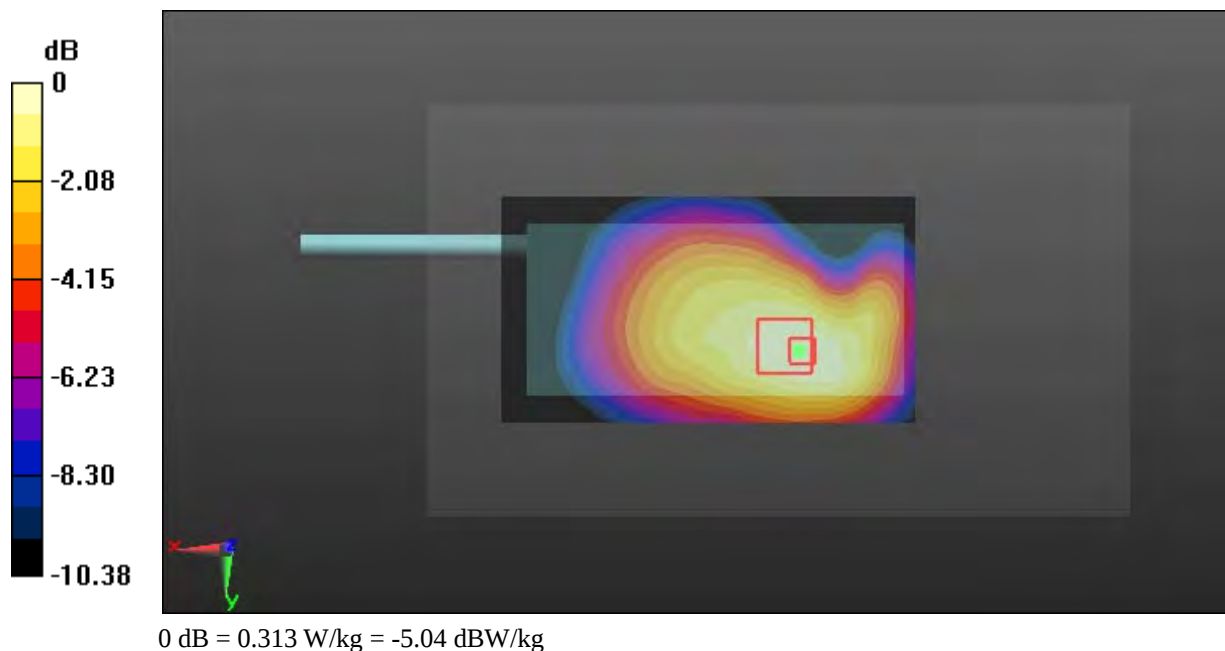

Test Plot 227#: LTE Band 17_Body Front _High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 711 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 711$ MHz; $\sigma = 0.973$ S/m; $\epsilon_r = 54.985$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.288 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.13 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.285 W/kg

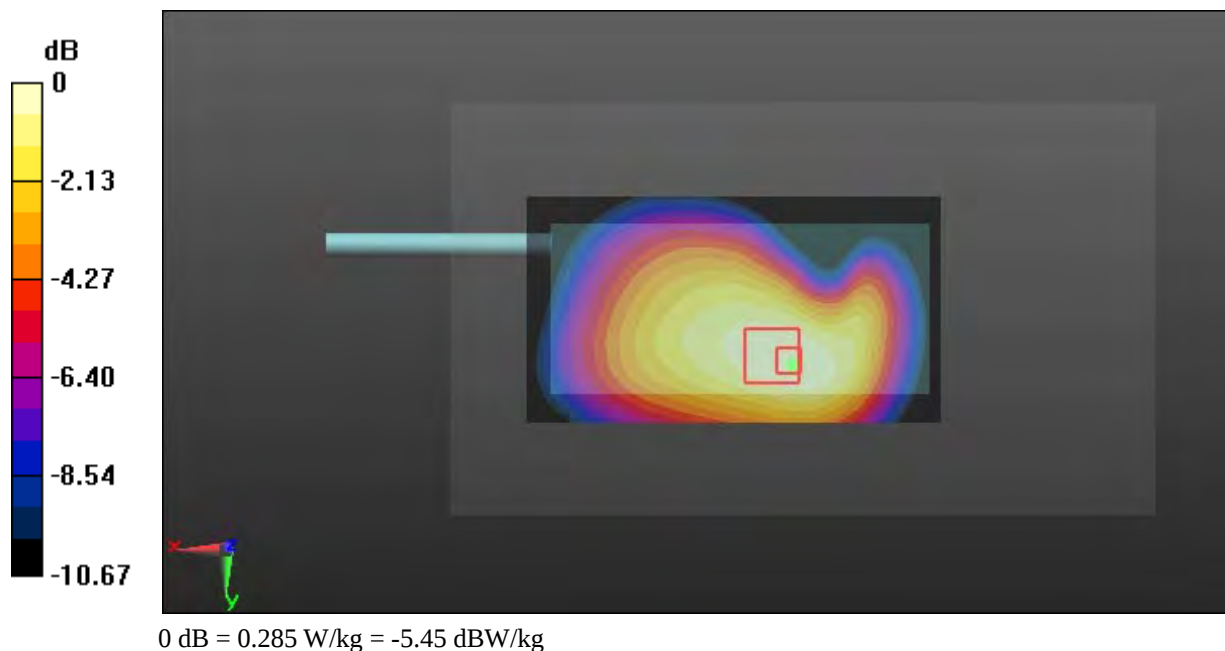

Test Plot 228#: LTE Band 17_Body Front _Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.962$ S/m; $\epsilon_r = 55.094$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.246 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.85 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.249 W/kg

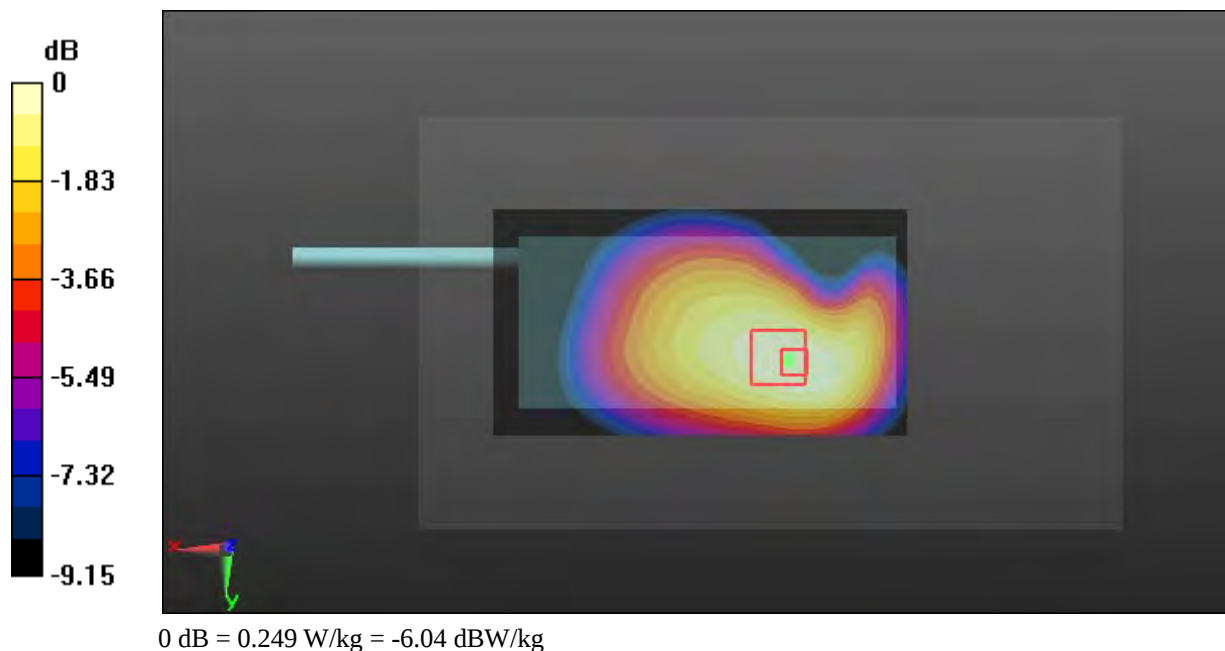

Test Plot 229#: LTE Band 17_Body Back_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.962$ S/m; $\epsilon_r = 55.094$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0974 W/kg


Zoom Scan (8x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.703 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.0949 W/kg

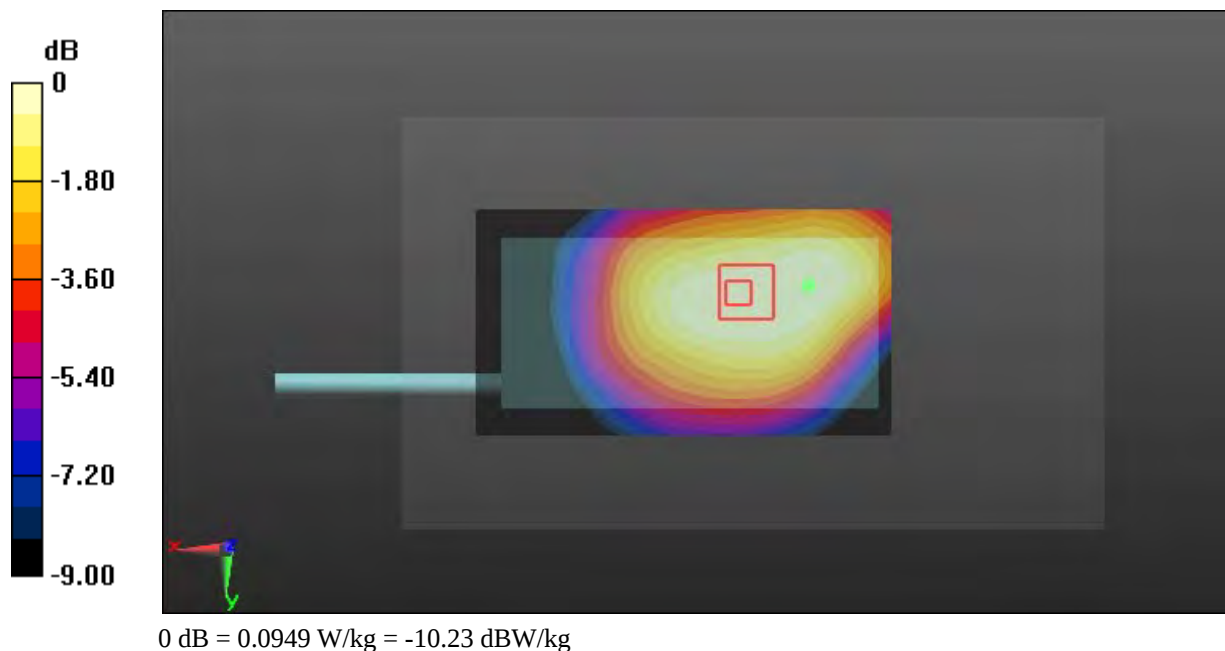

Test Plot 230#: LTE Band 17_Body Back_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.962$ S/m; $\epsilon_r = 55.094$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0793 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.929 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.0791 W/kg

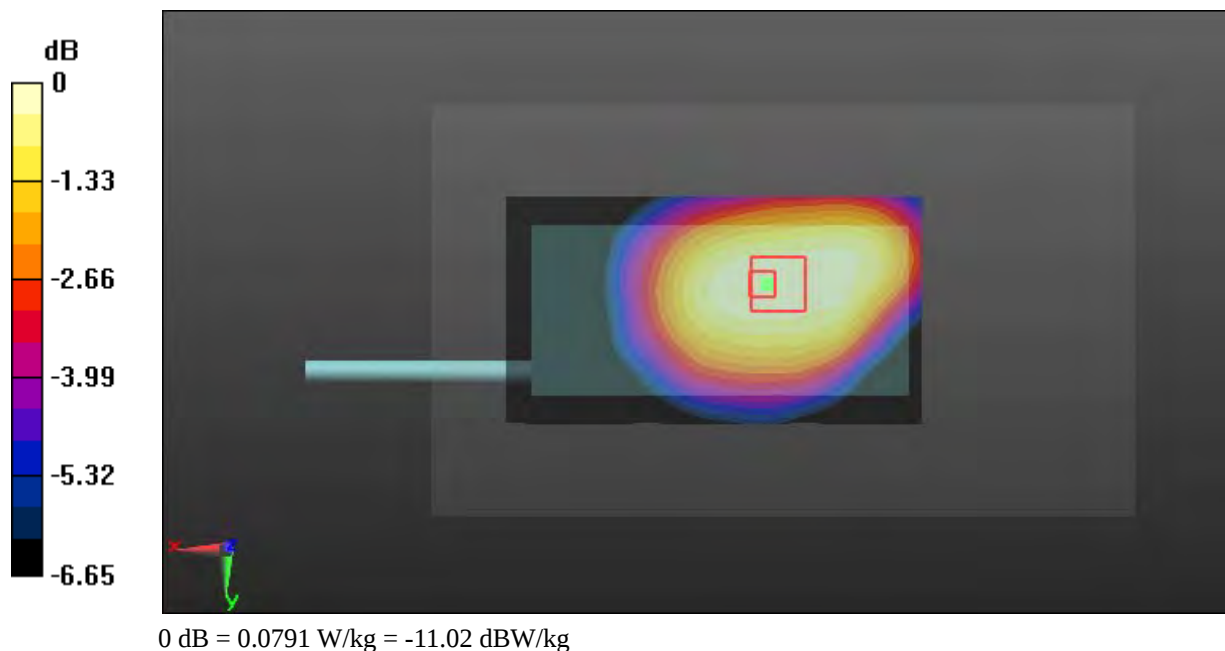

Test Plot 231#: LTE Band 17_Body Left_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.962$ S/m; $\epsilon_r = 55.094$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.186 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.05 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.195 W/kg

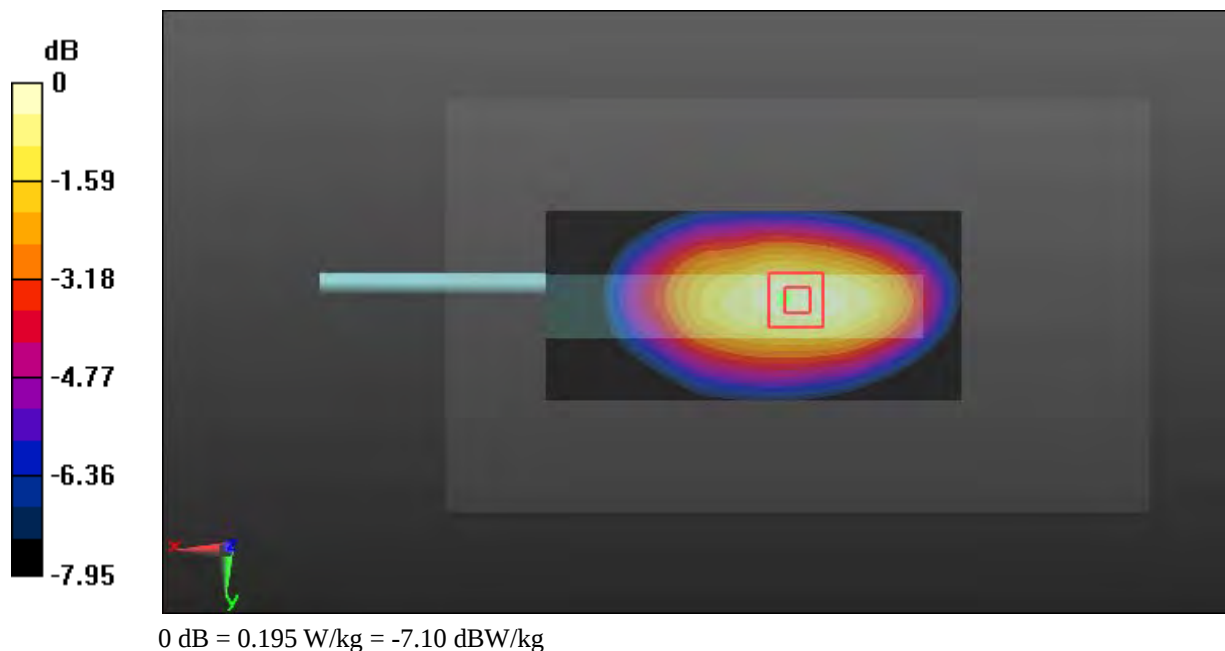

Test Plot 232#: LTE Band 17_Body Left_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.962$ S/m; $\epsilon_r = 55.094$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.161 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.96 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.160 W/kg

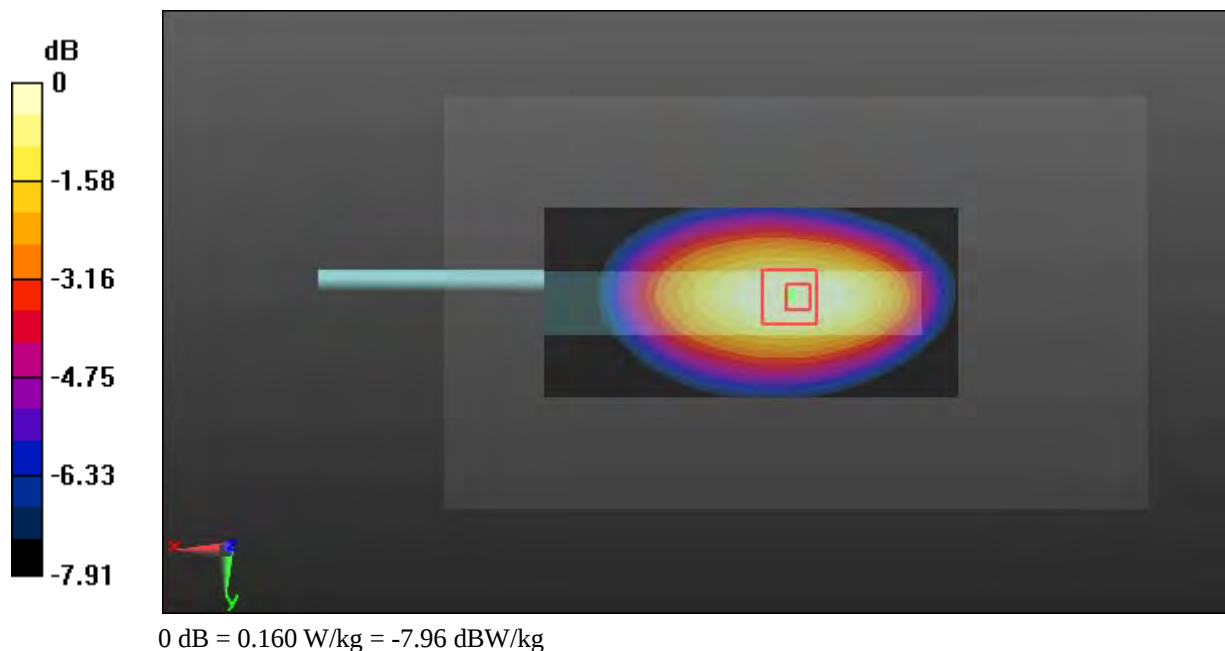

Test Plot 233#: LTE Band 17_Body Right_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.962$ S/m; $\epsilon_r = 55.094$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.116 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.041 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.115 W/kg

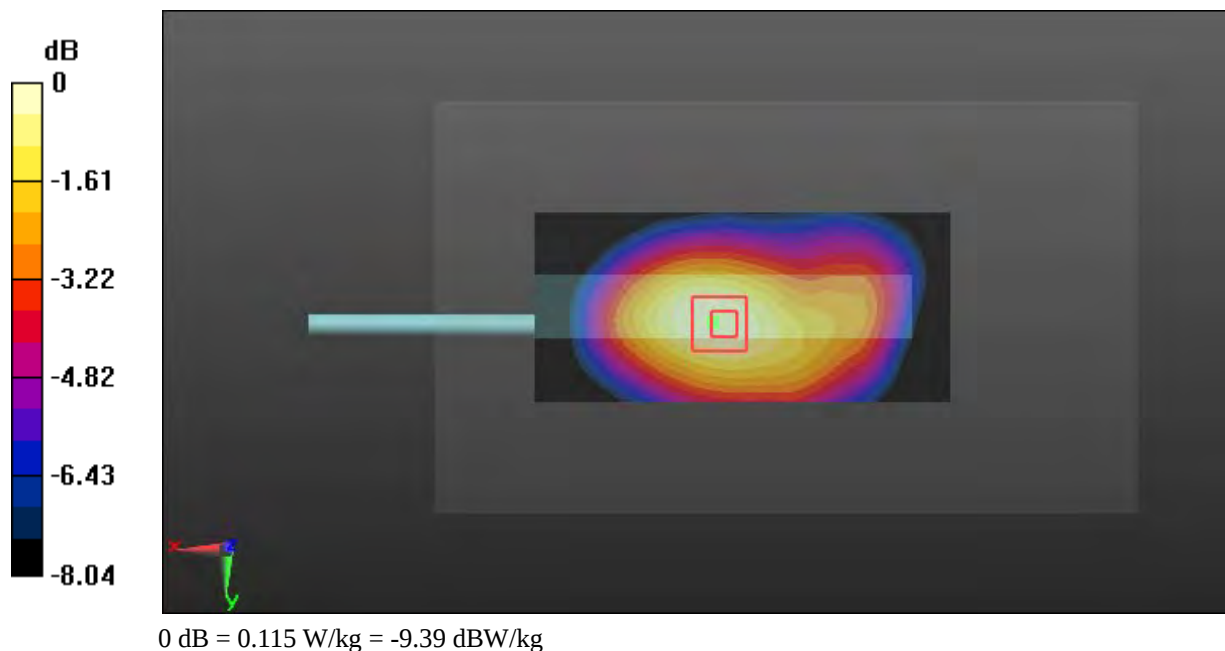

Test Plot 234#: LTE Band 17_Body Right_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.962$ S/m; $\epsilon_r = 55.094$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.102 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.591 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

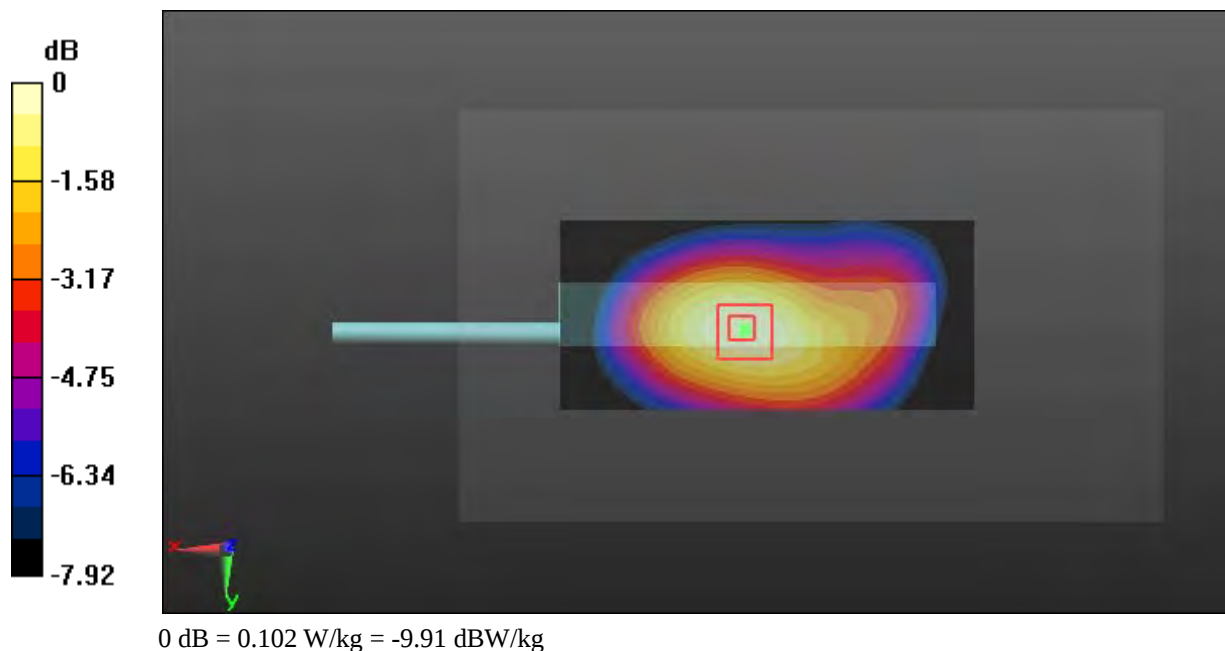

Test Plot 235#: LTE Band 17_Body Bottom_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.962$ S/m; $\epsilon_r = 55.094$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0942 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.729 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.0919 W/kg



Test Plot 236#: LTE Band 17_Body Bottom_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.962$ S/m; $\epsilon_r = 55.094$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0706 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.885 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0692 W/kg

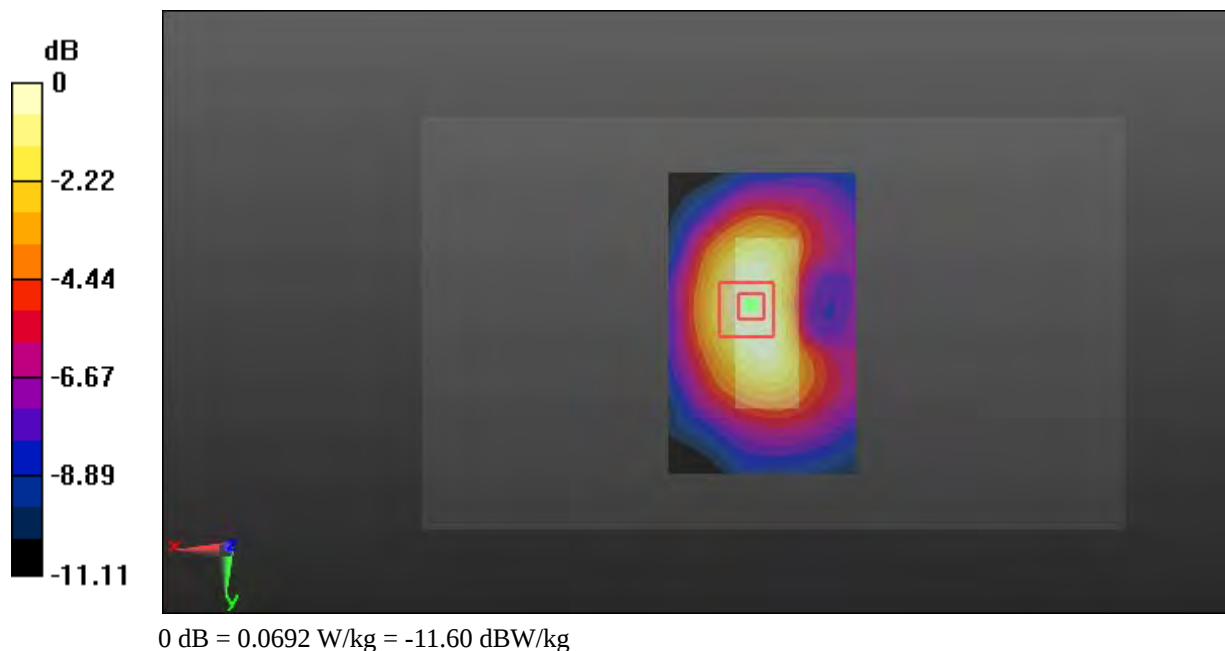

Test Plot 237#: LTE Band 25_Head Left Cheek_Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.211$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.544 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.981 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.771 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 0.527 W/kg

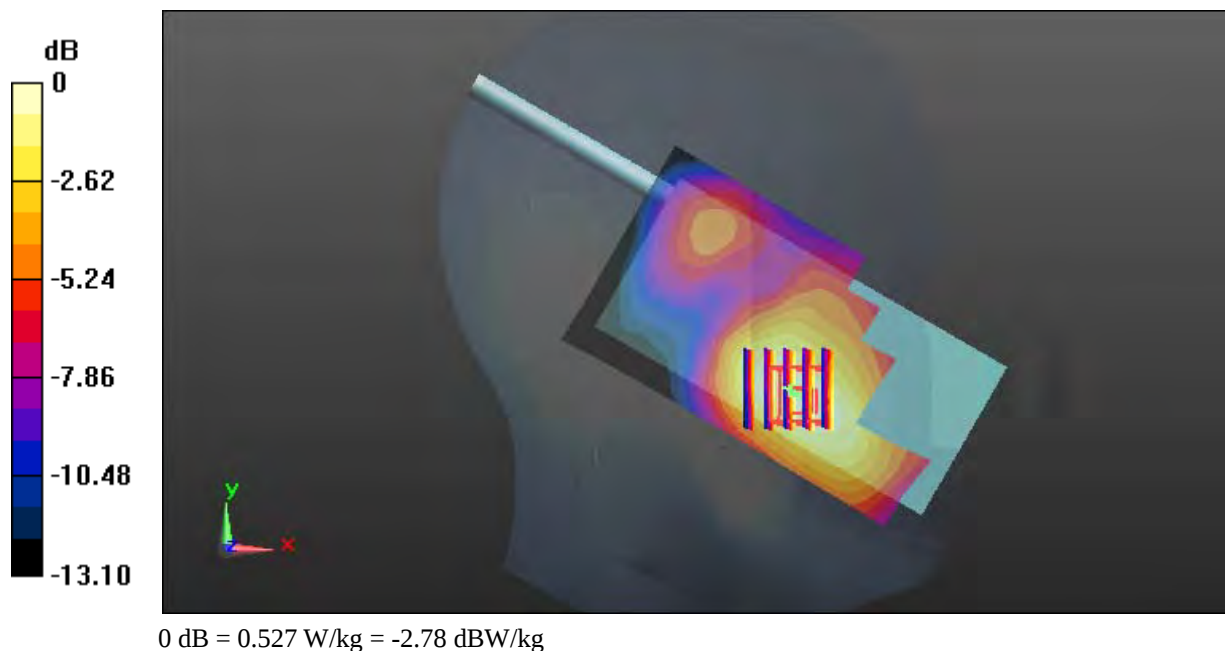

Test Plot 238#: LTE Band 25_Head Left Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.666 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.837 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.397 W/kg

Maximum value of SAR (measured) = 0.708 W/kg

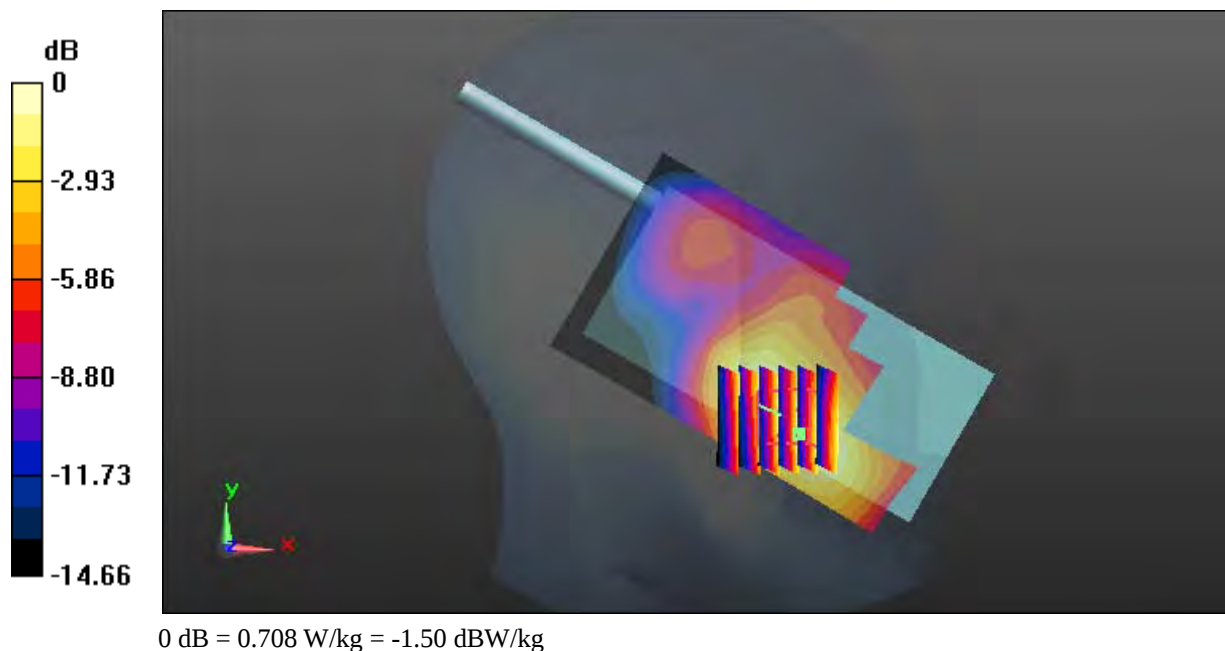

Test Plot 239#: LTE Band 25_Head Left Cheek_High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 40.407$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.551 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.736 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.852 W/kg

SAR(1 g) = 0.542 W/kg; SAR(10 g) = 0.336 W/kg

Maximum value of SAR (measured) = 0.585 W/kg

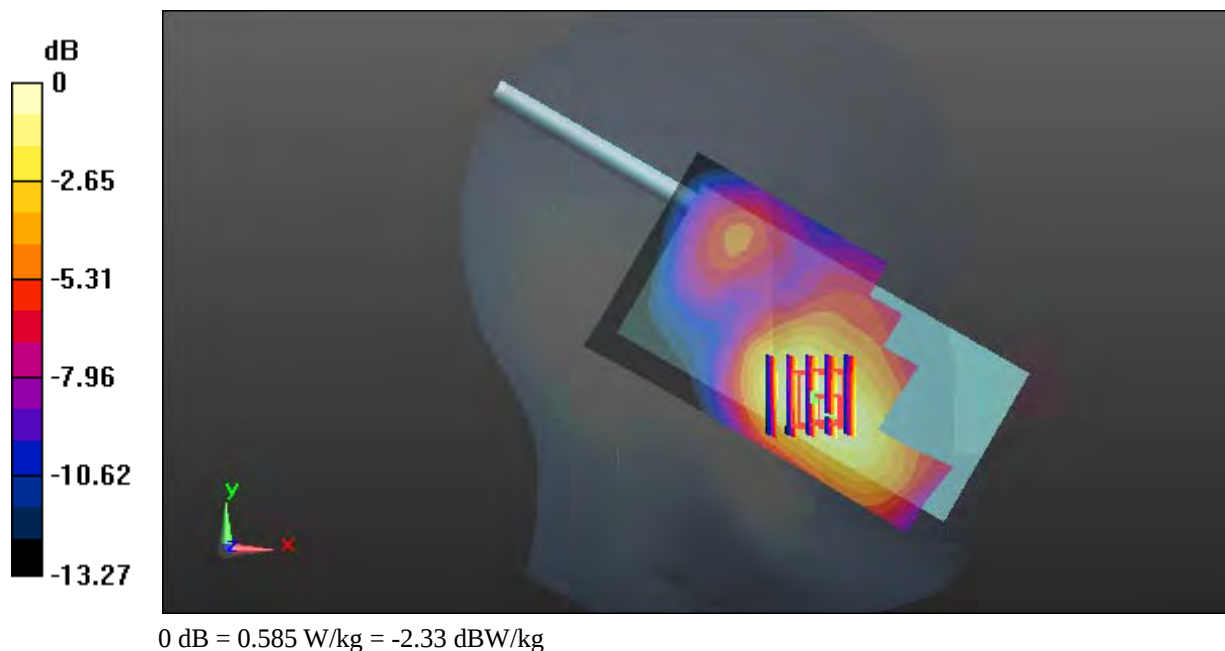

Test Plot 240#: LTE Band 25_Head Left Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.510 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.077 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.873 W/kg

SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.306 W/kg

Maximum value of SAR (measured) = 0.549 W/kg

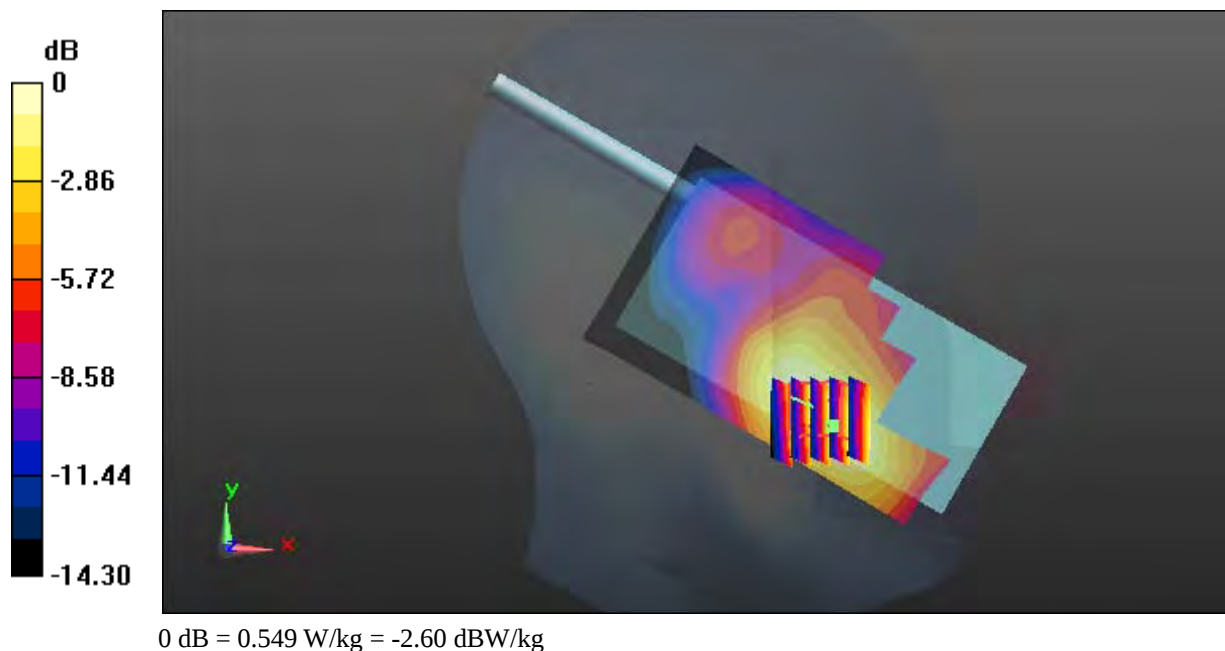

Test Plot 241#: LTE Band 25_Head Left Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.296 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.017 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.287 W/kg

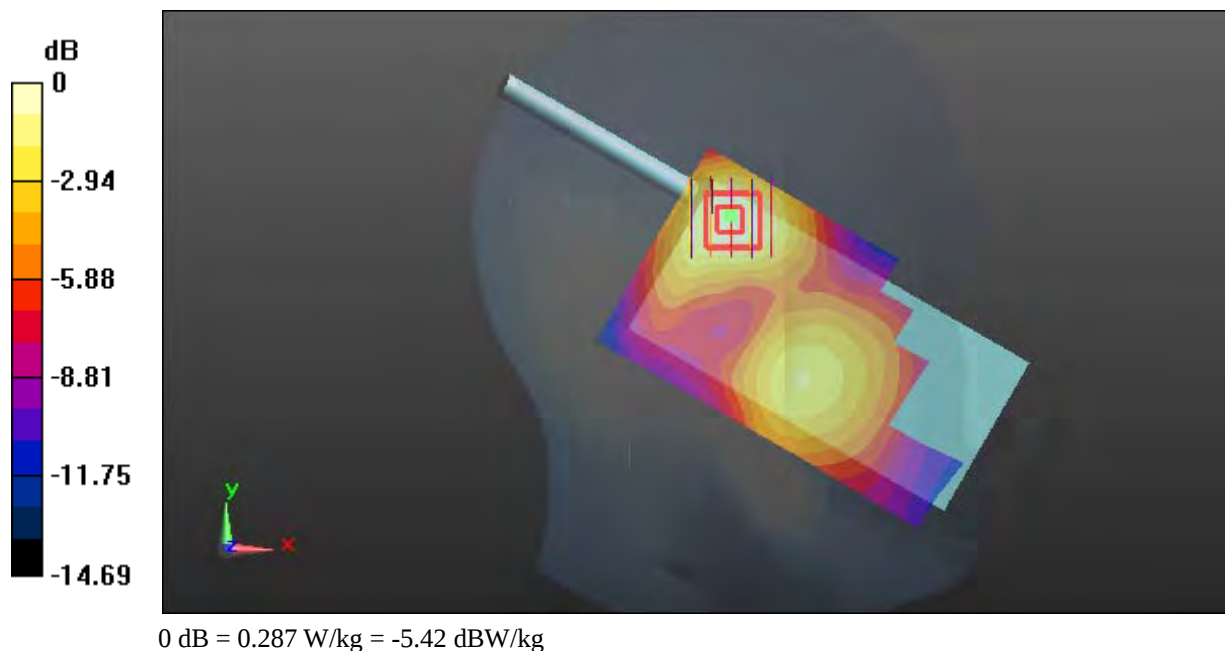

Test Plot 242#: LTE Band 25_Head Left Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.240 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.353 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

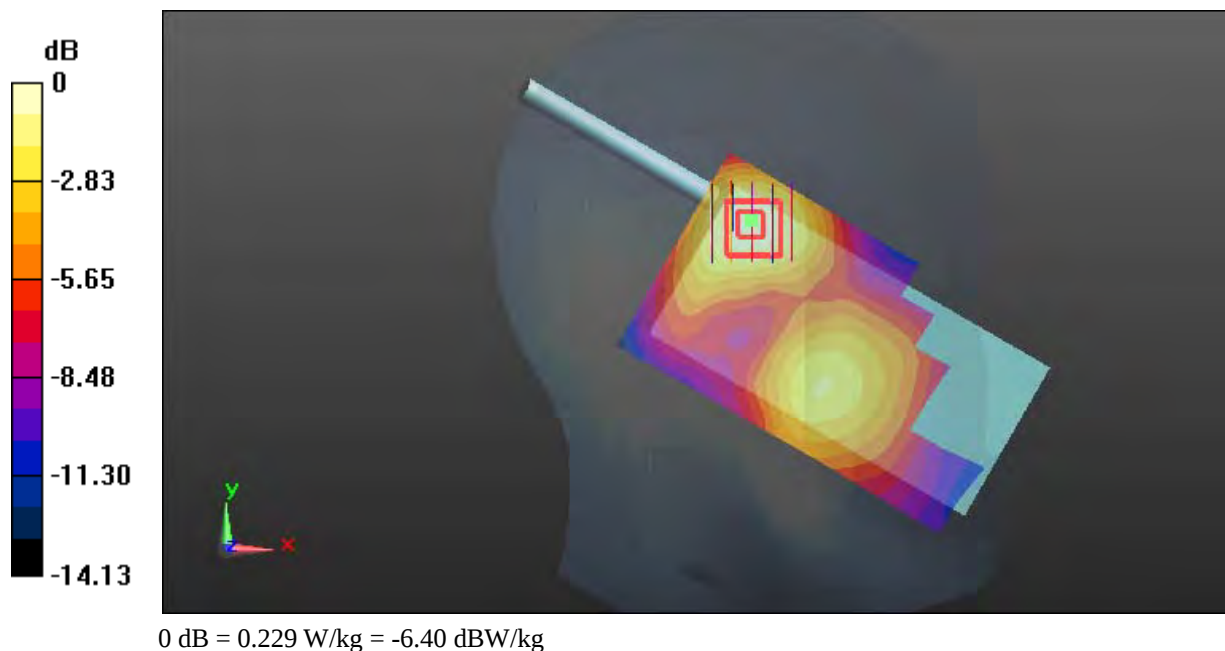

Test Plot 243#: LTE Band 25_Head Right Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.288 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.371 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.425 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.311 W/kg

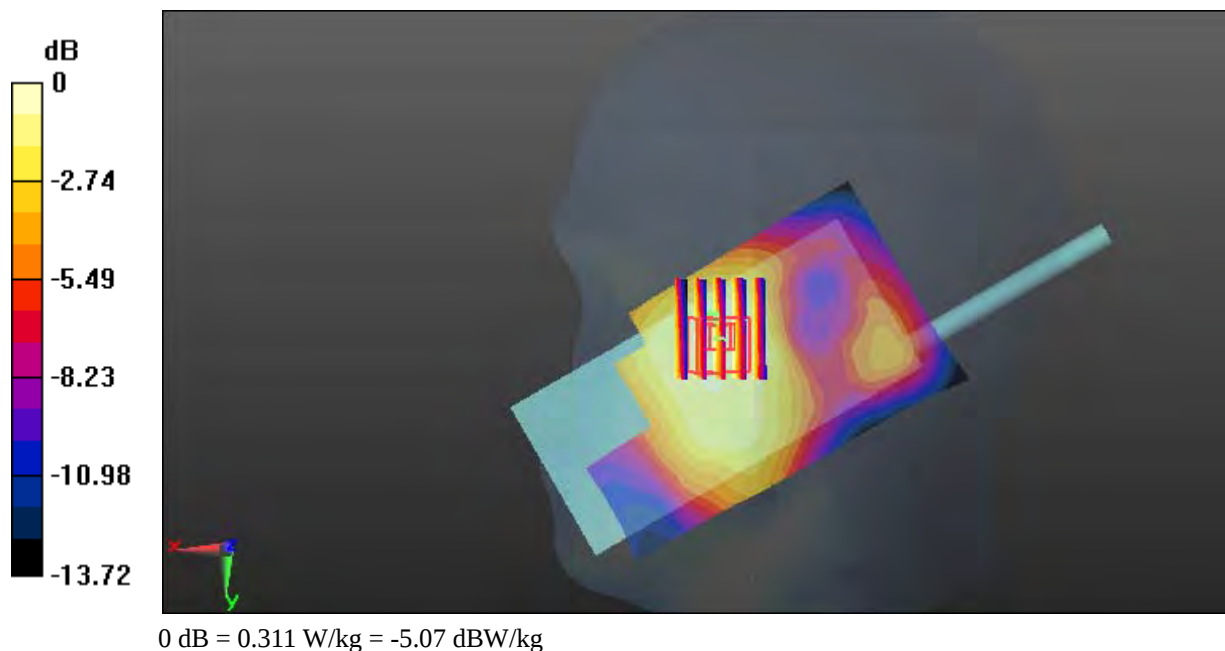

Test Plot 244#: LTE Band 25_Head Right Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.238 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.627 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.316 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

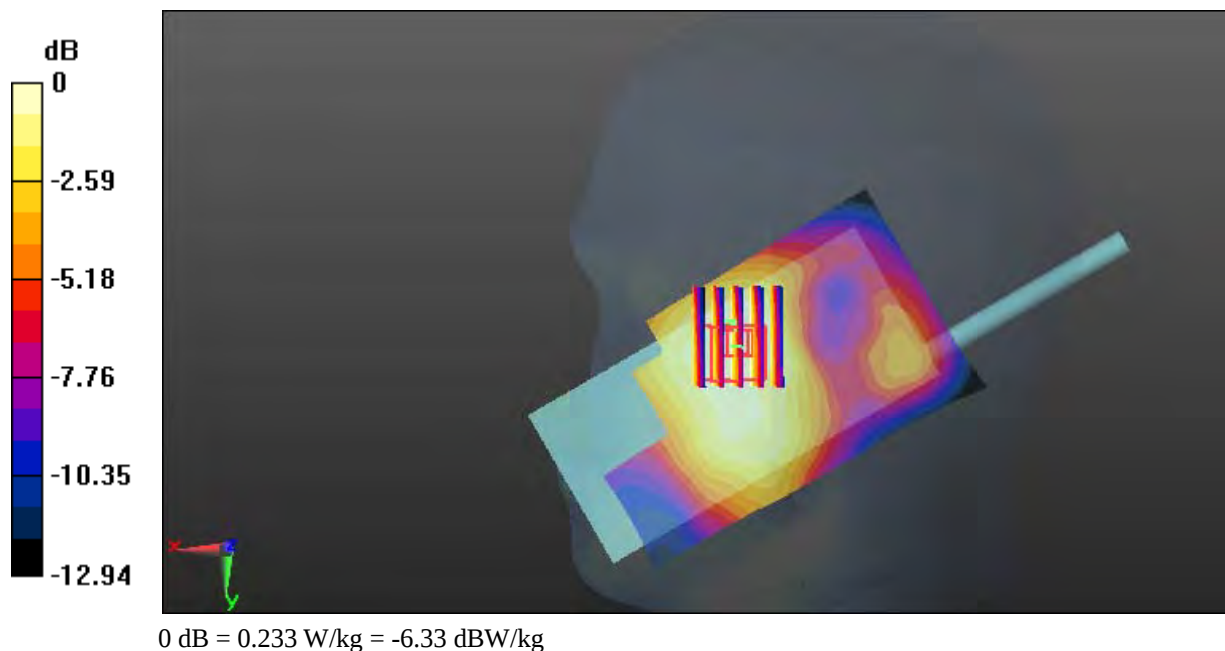

Test Plot 245#: LTE Band 25_Head Right Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.188 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.056 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.163 W/kg

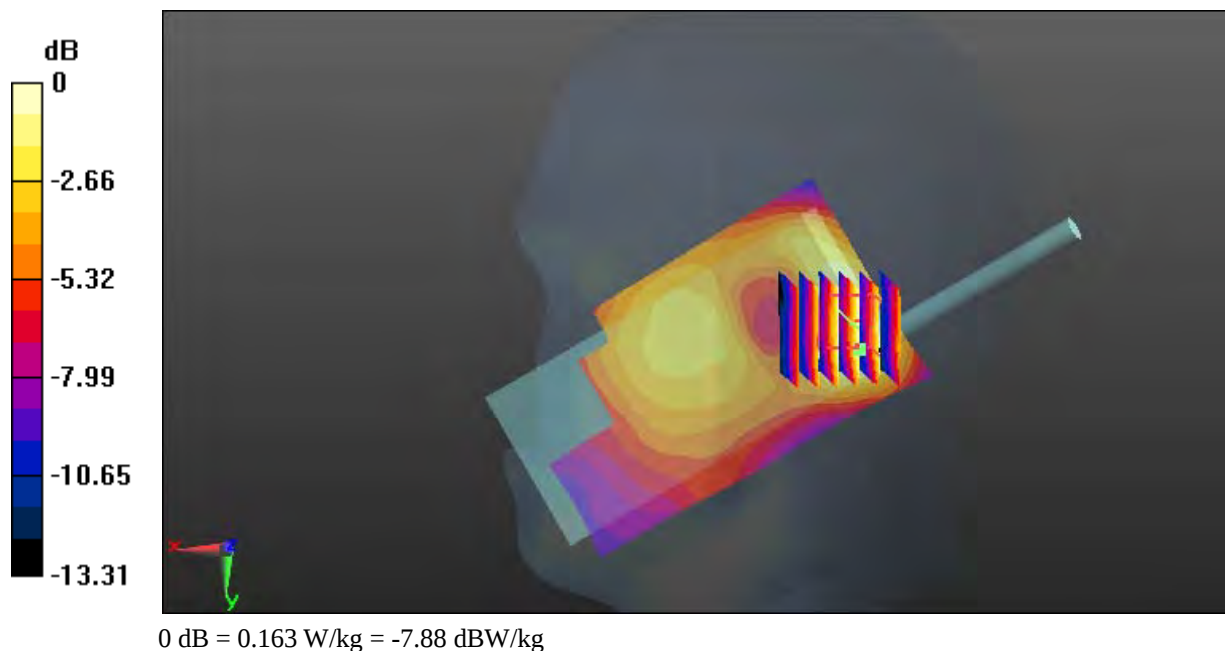

Test Plot 246#: LTE Band 25_Head Right Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.150 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.326 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.126 W/kg

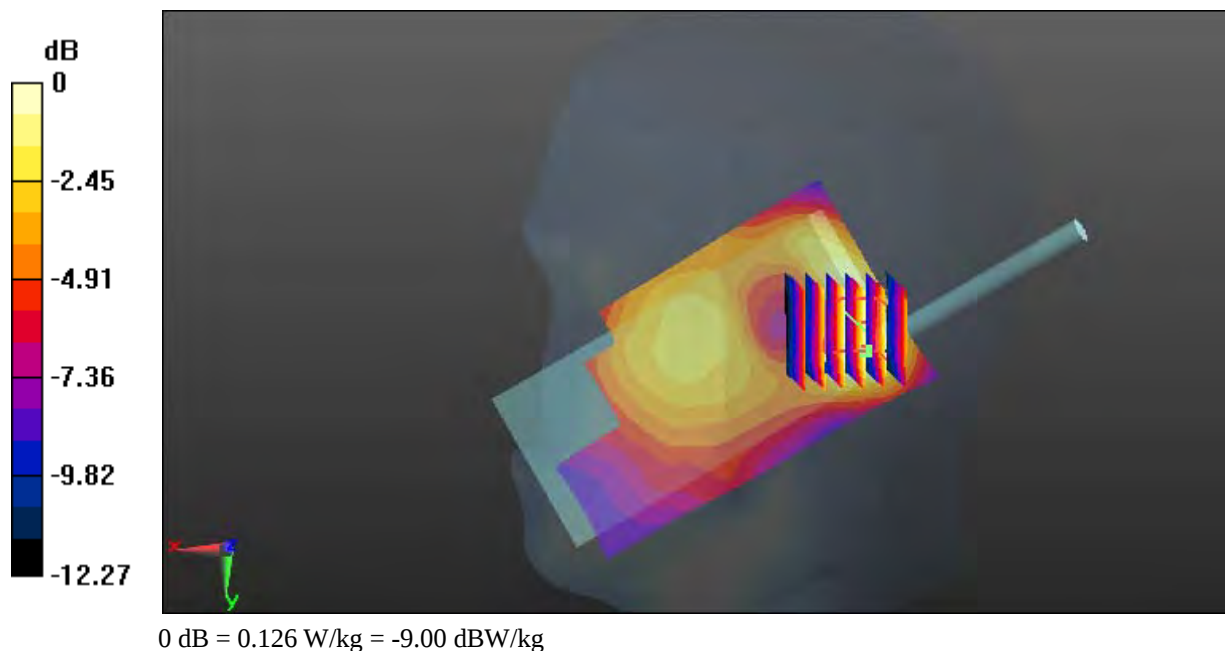

Test Plot 247#: LTE Band 25_Face Up_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.179 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.827 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.249 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.178 W/kg

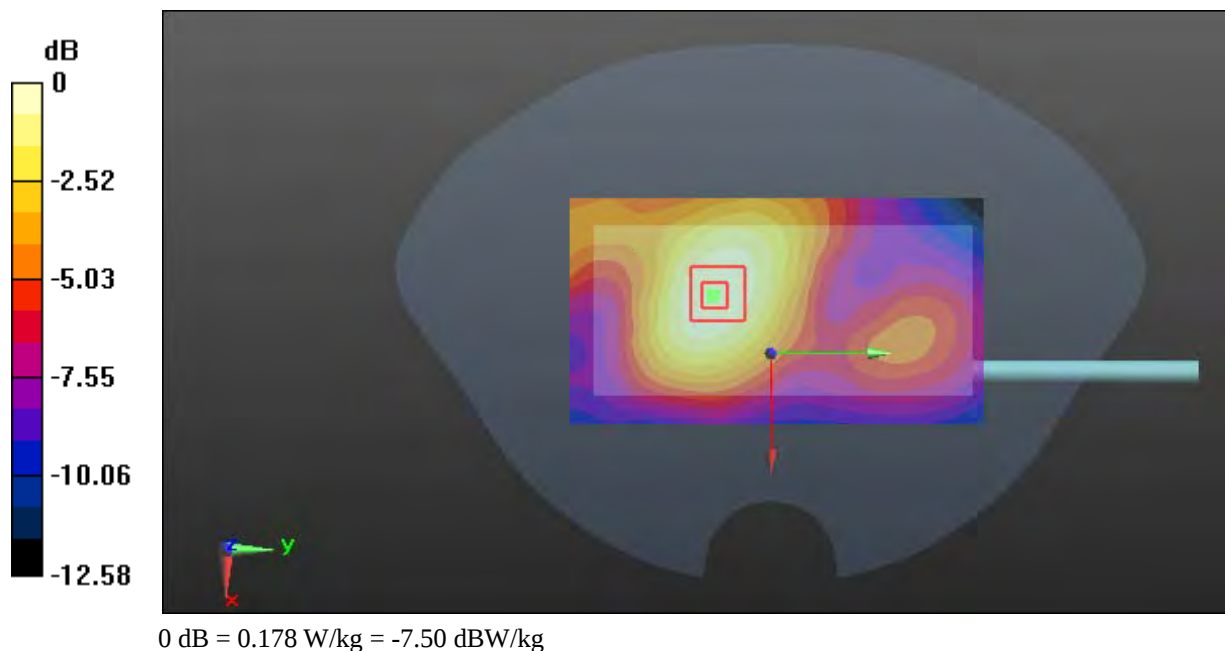

Test Plot 248#: LTE Band 25_Face Up_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.140 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.060 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

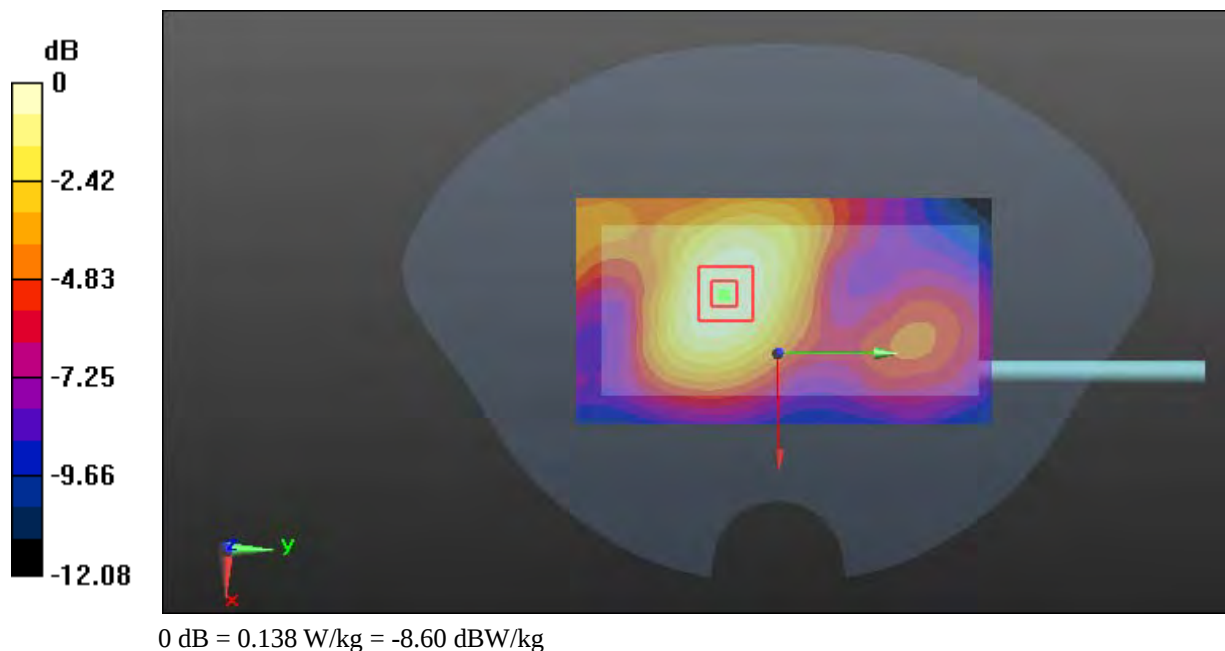

Test Plot 249#: LTE Band 25_Body Front _Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 54.066$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.409 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.70 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.417 W/kg

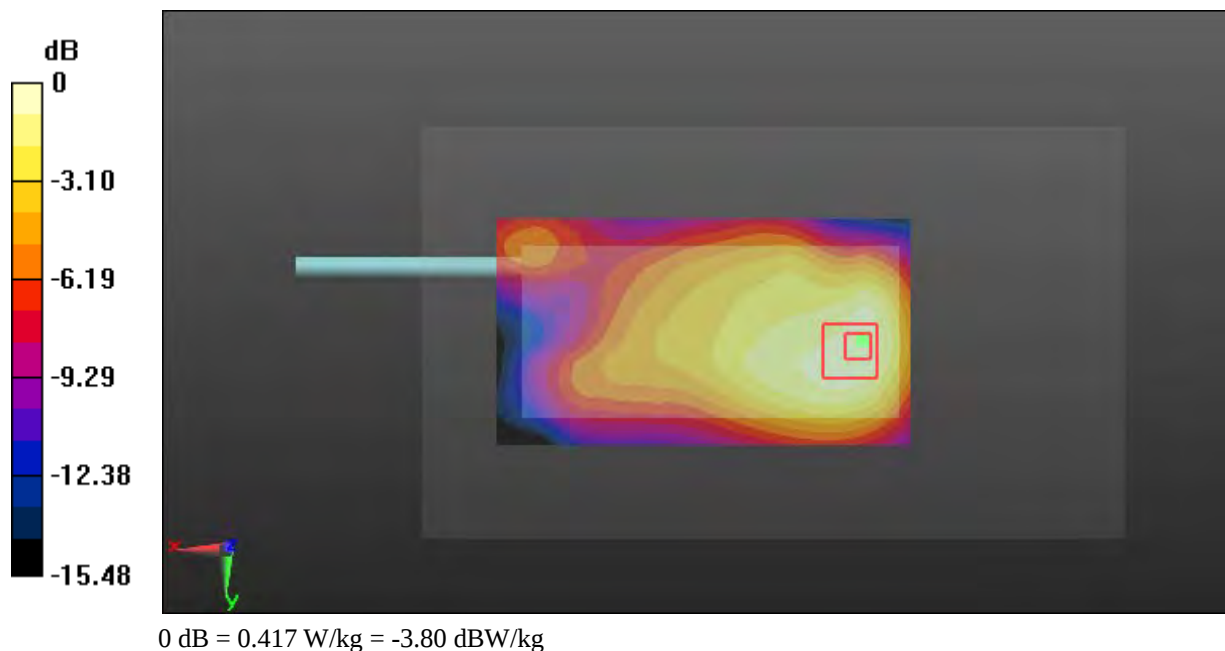

Test Plot 250#: LTE Band 25_Body Front _Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 54.066$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.329 W/kg


Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.08 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.507 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.335 W/kg

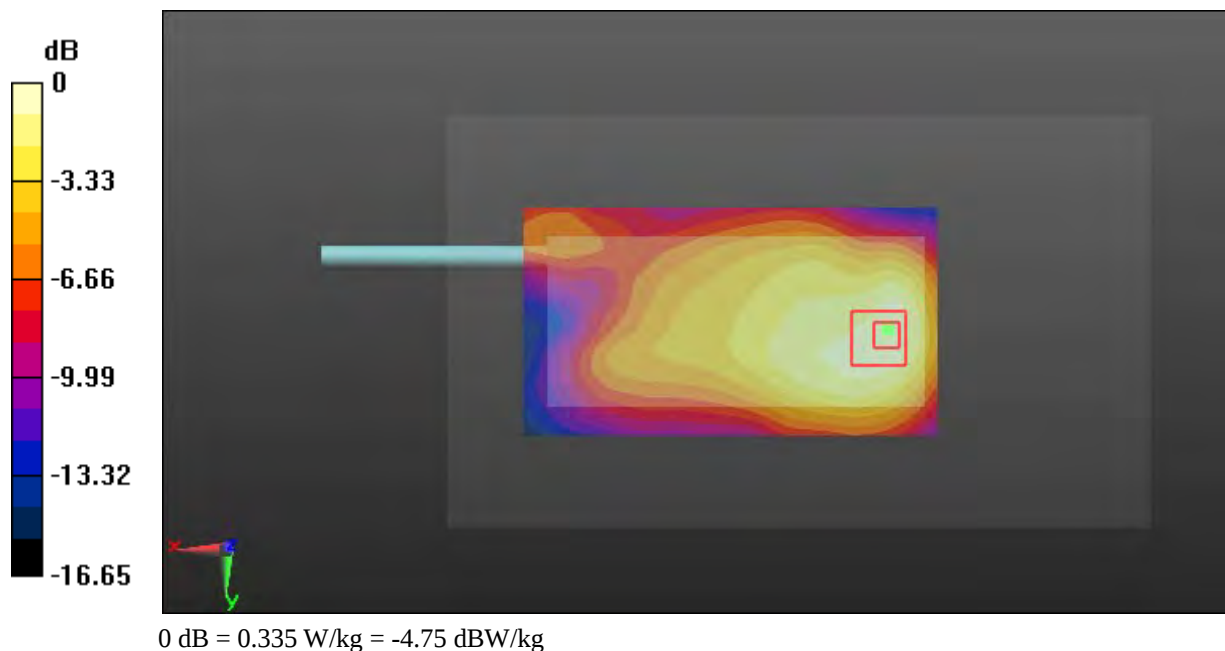

Test Plot 251#: LTE Band 25_Body Back_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 54.066$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.189 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.820 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.187 W/kg

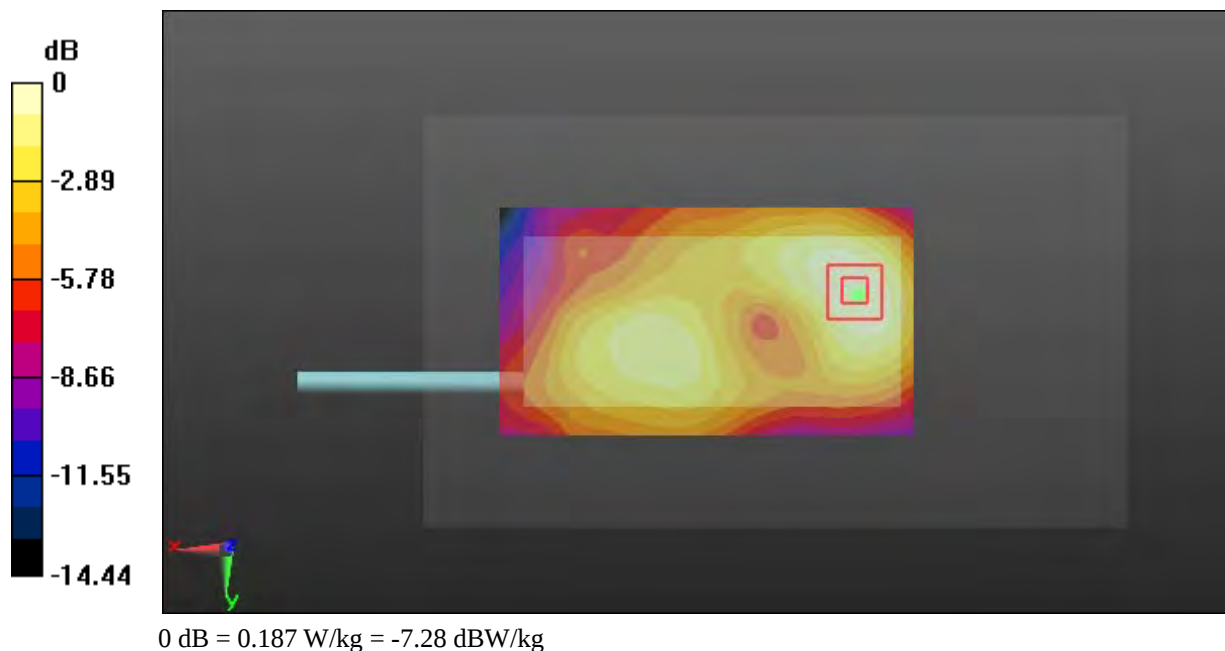

Test Plot 252#: LTE Band 25_Body Back_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 54.066$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.152 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.272 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

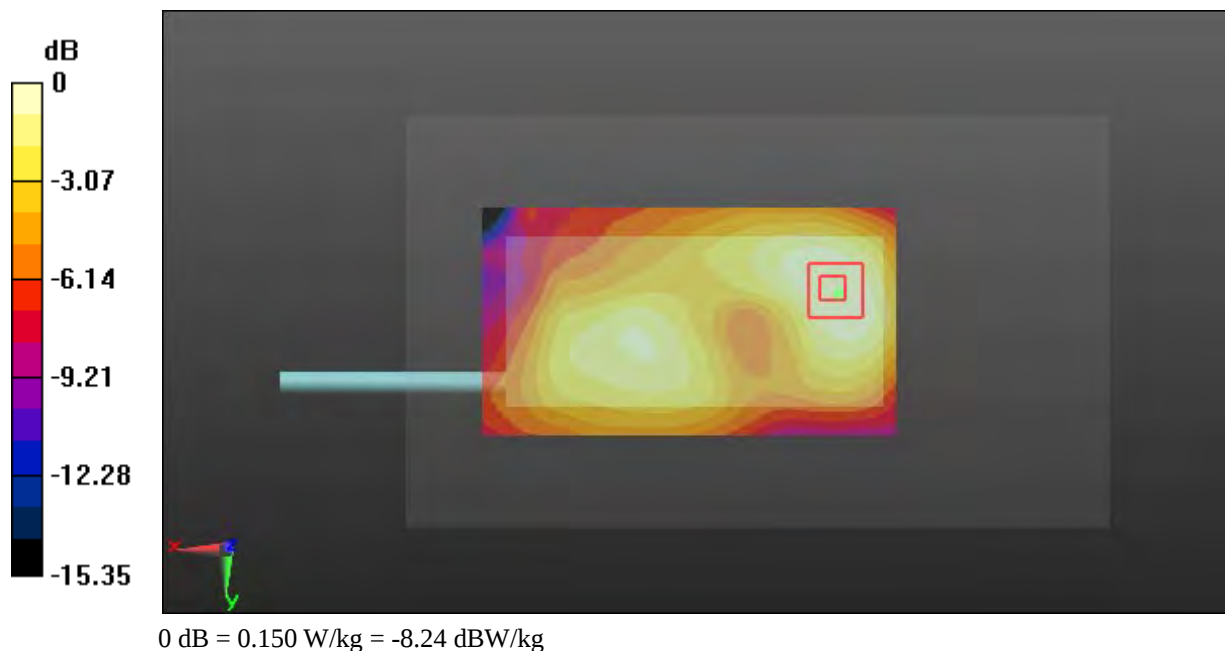

Test Plot 253#: LTE Band 25_Body Left_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 54.066$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.511 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.24 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.756 W/kg

SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.502 W/kg

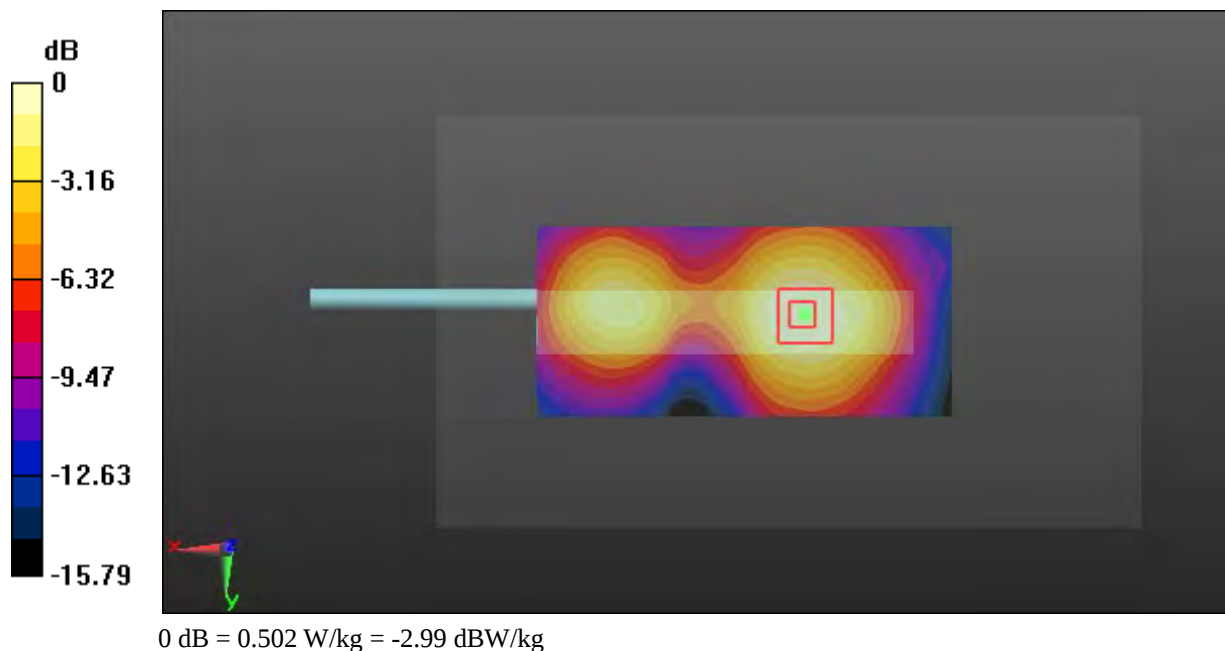

Test Plot 254#: LTE Band 25_Body Left_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 54.066$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.406 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.29 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.400 W/kg

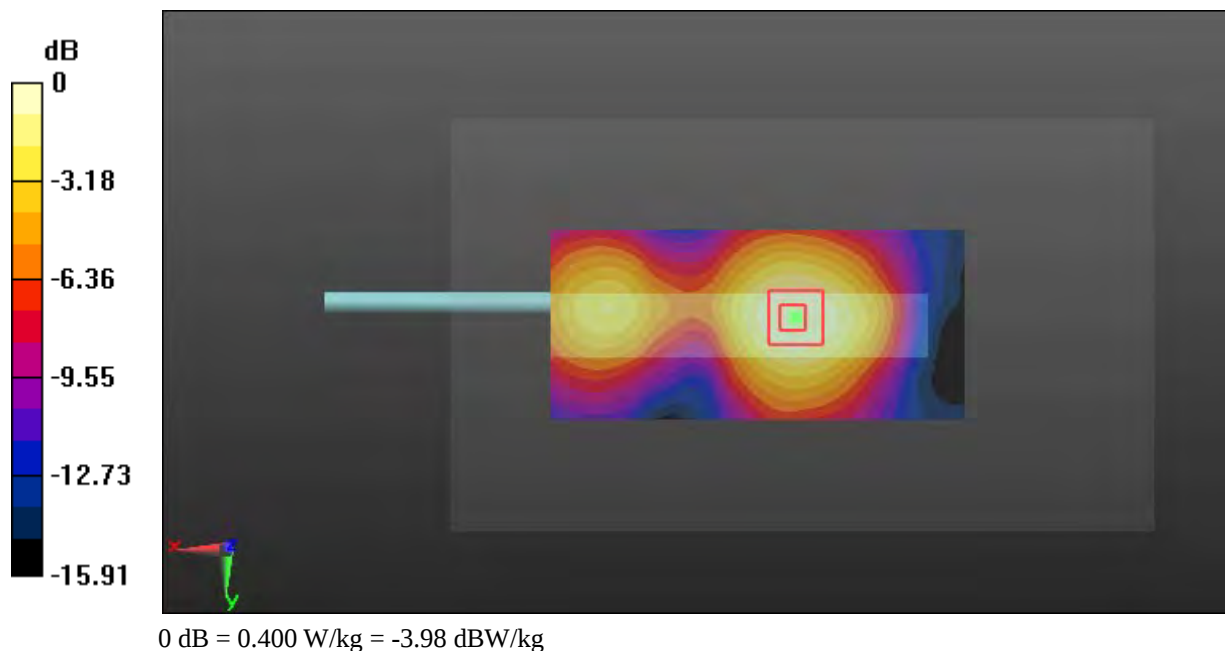

Test Plot 255#: LTE Band 25_Body Right_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 54.066$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.192 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.370 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.186 W/kg

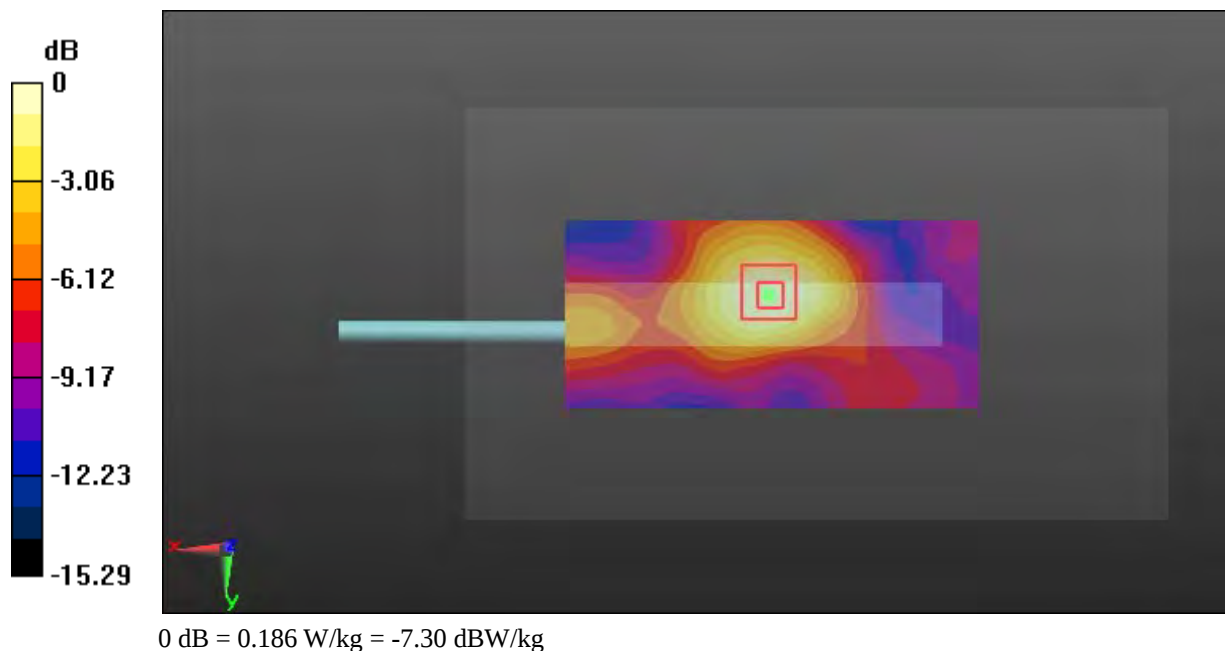

Test Plot 256#: LTE Band 25_Body Right_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 54.066$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.155 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.448 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.151 W/kg

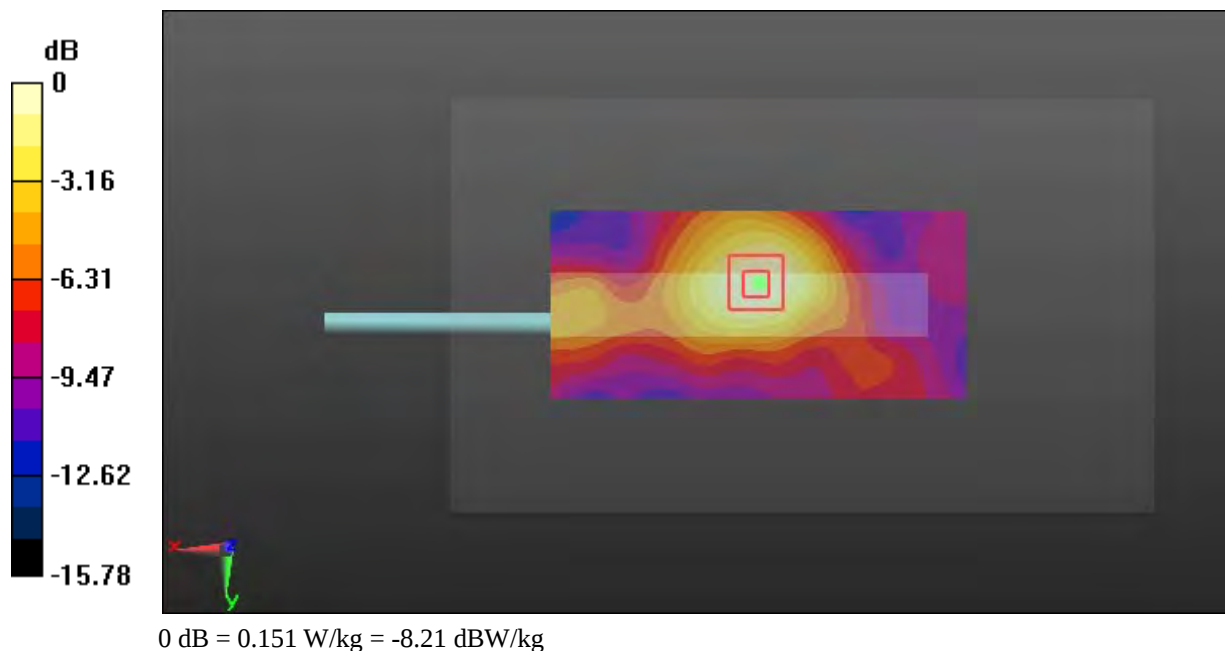

Test Plot 257#: LTE Band 25_Body Bottom_Low_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.484$ S/m; $\epsilon_r = 53.726$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.719 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.52 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.612 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 0.661 W/kg

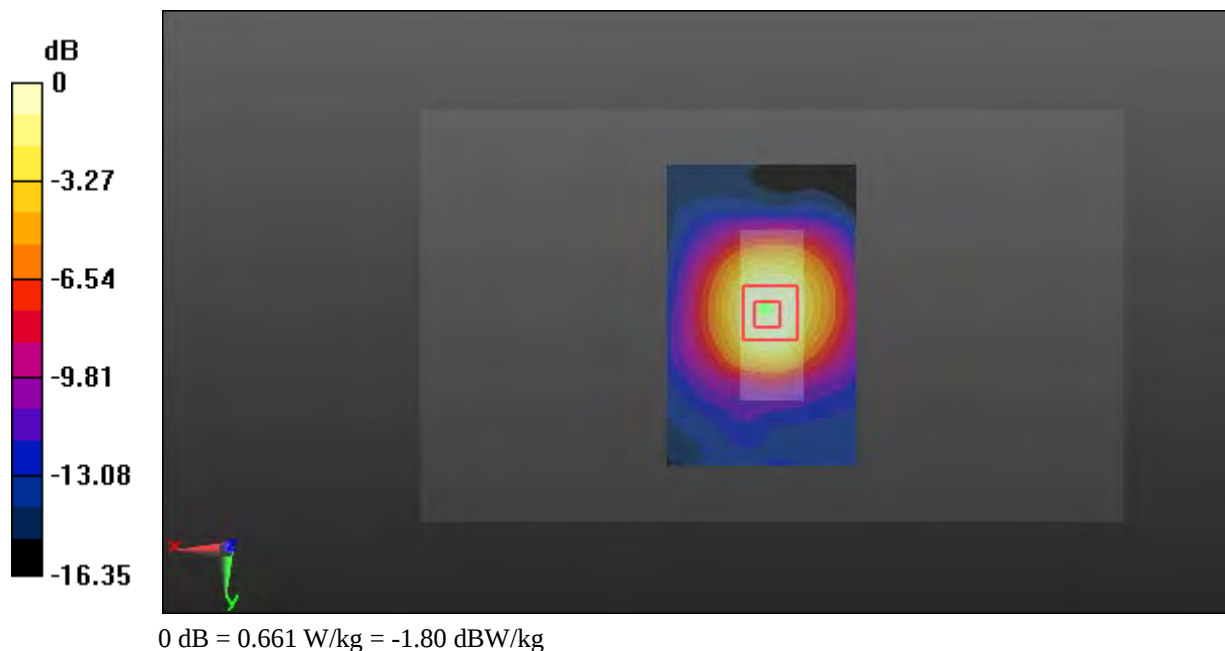

Test Plot 258#: LTE Band 25_Body Bottom_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 54.066$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.707 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.81 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.342 W/kg

Maximum value of SAR (measured) = 0.660 W/kg



Test Plot 259#: LTE Band 25_Body Bottom_High_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 54.173$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.647 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.32 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.989 W/kg

SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.592 W/kg



Test Plot 260#: LTE Band 25_Body Bottom_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 54.066$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.600 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.53 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.933 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.283 W/kg

Maximum value of SAR (measured) = 0.558 W/kg

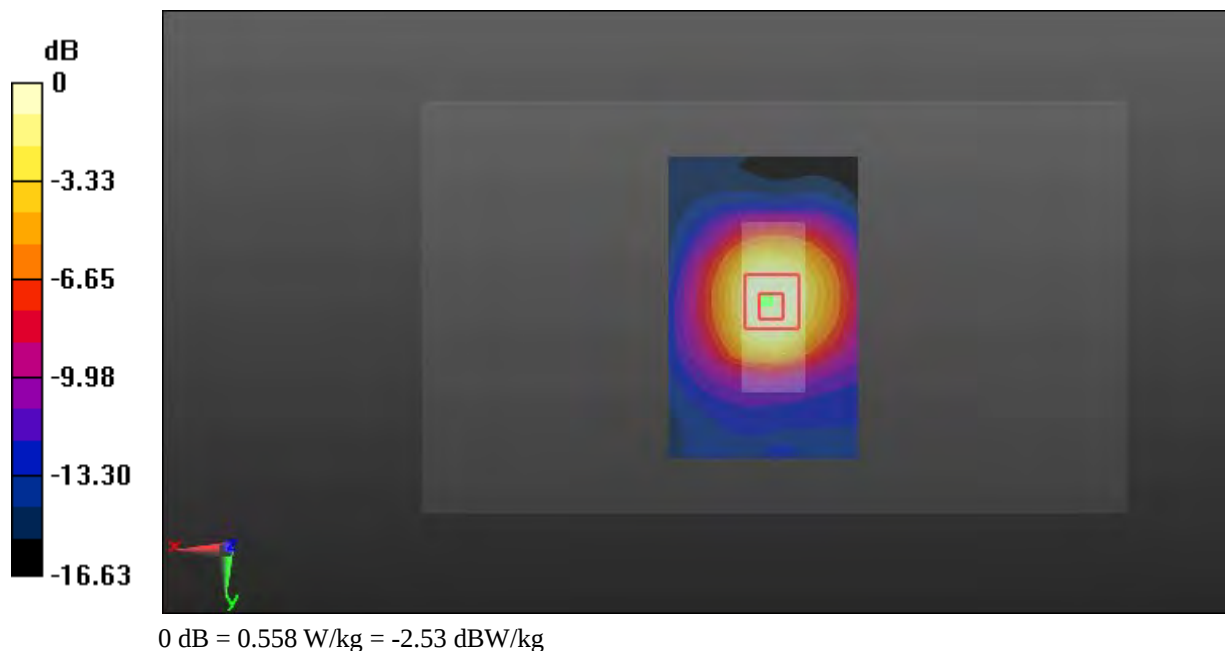

Test Plot 261#: LTE Band 41_Head Left Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 37.934$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.201 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.309 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.197 W/kg

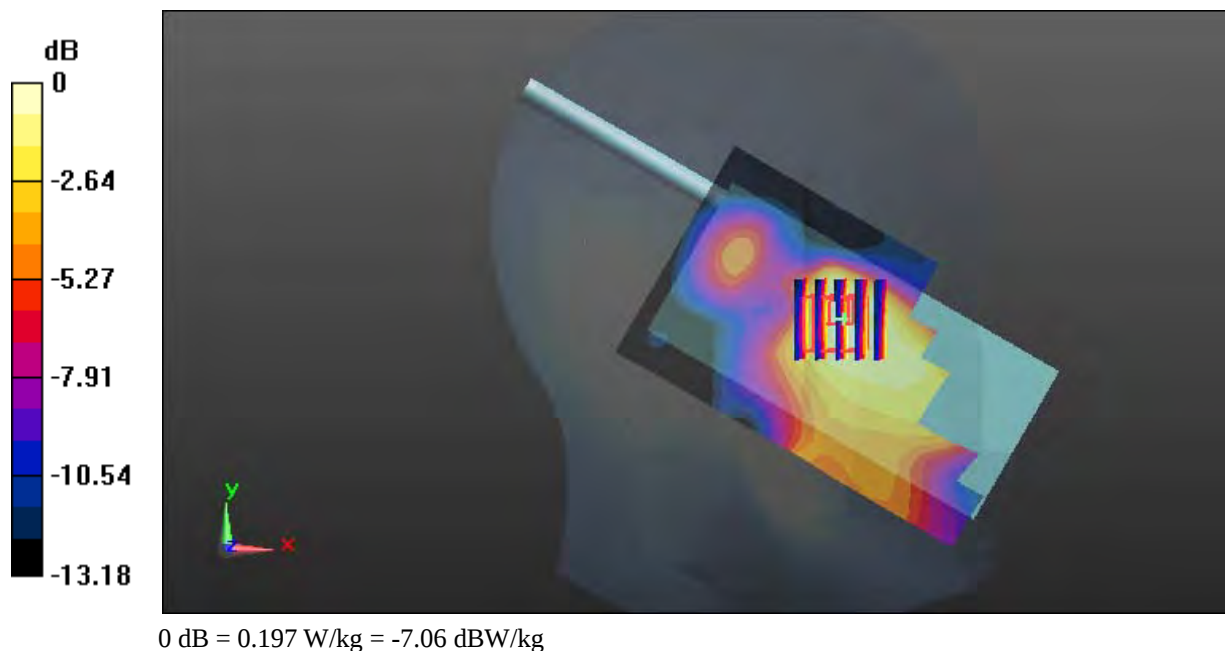

Test Plot 262#: LTE Band 41_Head Left Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 37.934$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.170 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.913 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.162 W/kg

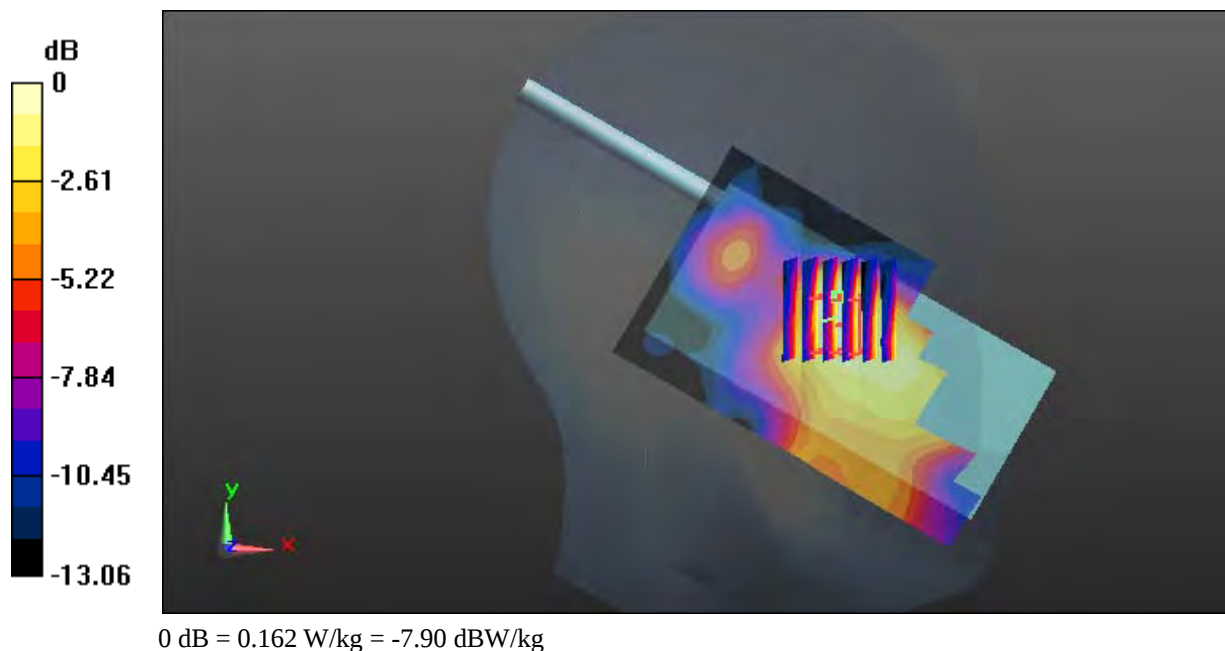

Test Plot 263#: LTE Band 41_Head Left Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 37.934$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.136 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.736 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.127 W/kg

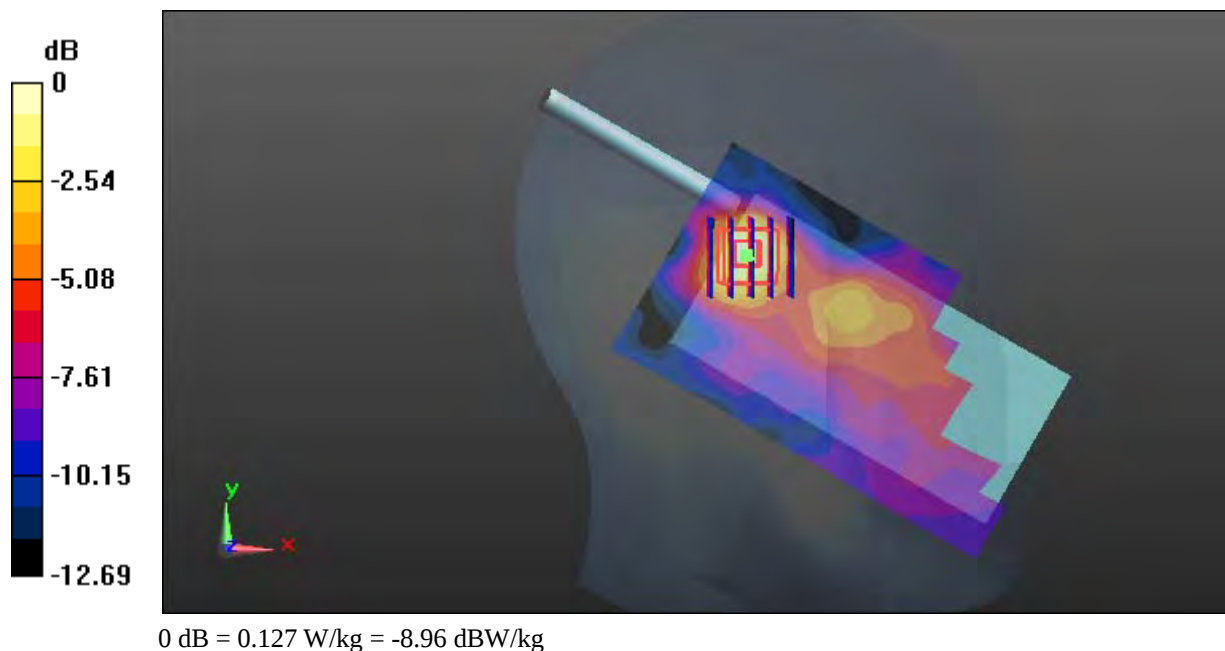

Test Plot 264#: LTE Band 41_Head Left Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 37.934$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.112 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.283 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

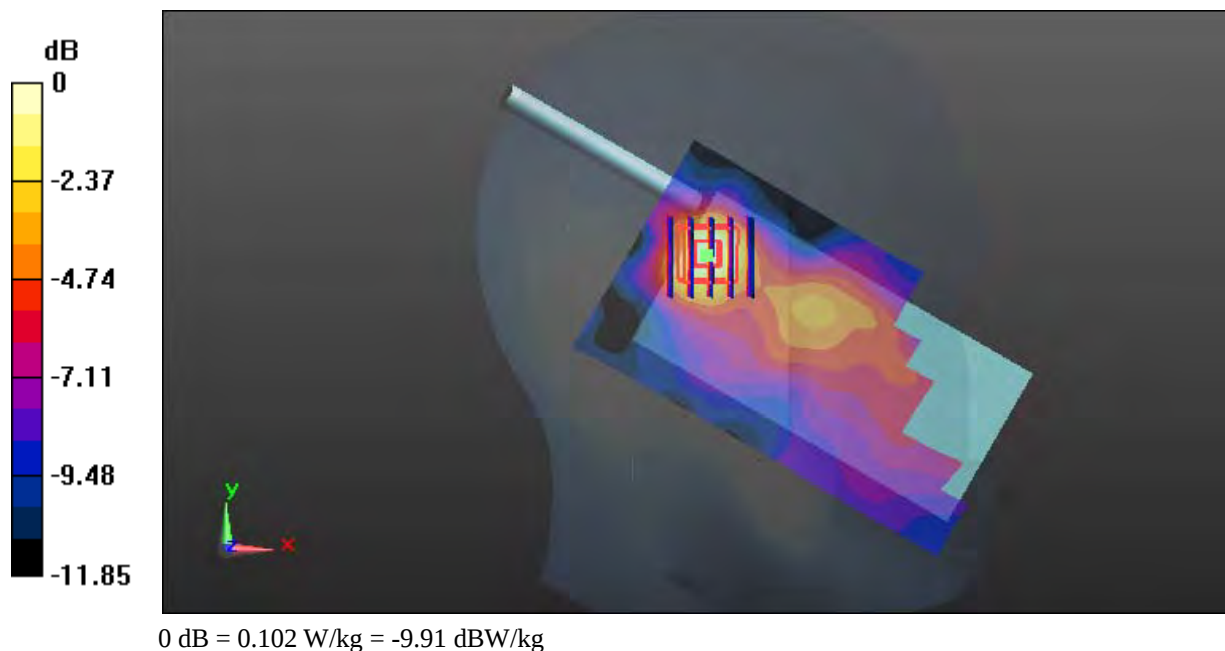

Test Plot 265#: LTE Band 41_Head Right Cheek_Low(2506MHz)_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2506 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2506$ MHz; $\sigma = 1.801$ S/m; $\epsilon_r = 40.224$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.265 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.650 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.366 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

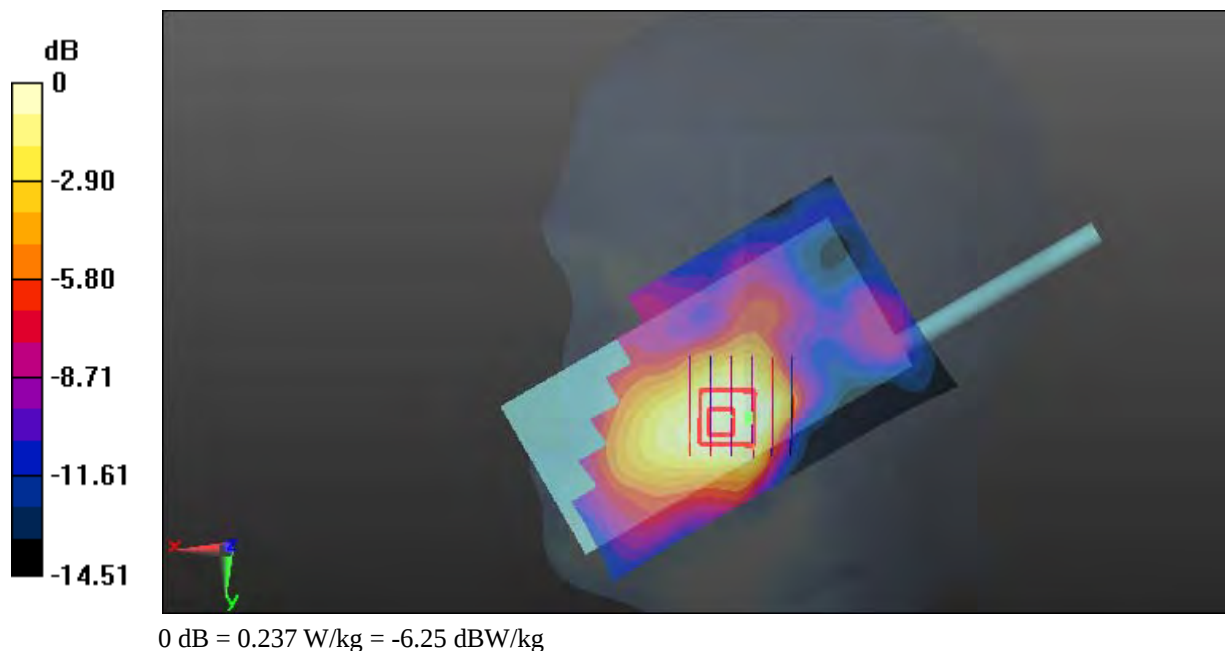

Test Plot 266#: LTE Band 41_Head Right Cheek_Low(2545MHz)_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2545 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2545$ MHz; $\sigma = 1.916$ S/m; $\epsilon_r = 39.002$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.260 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.668 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

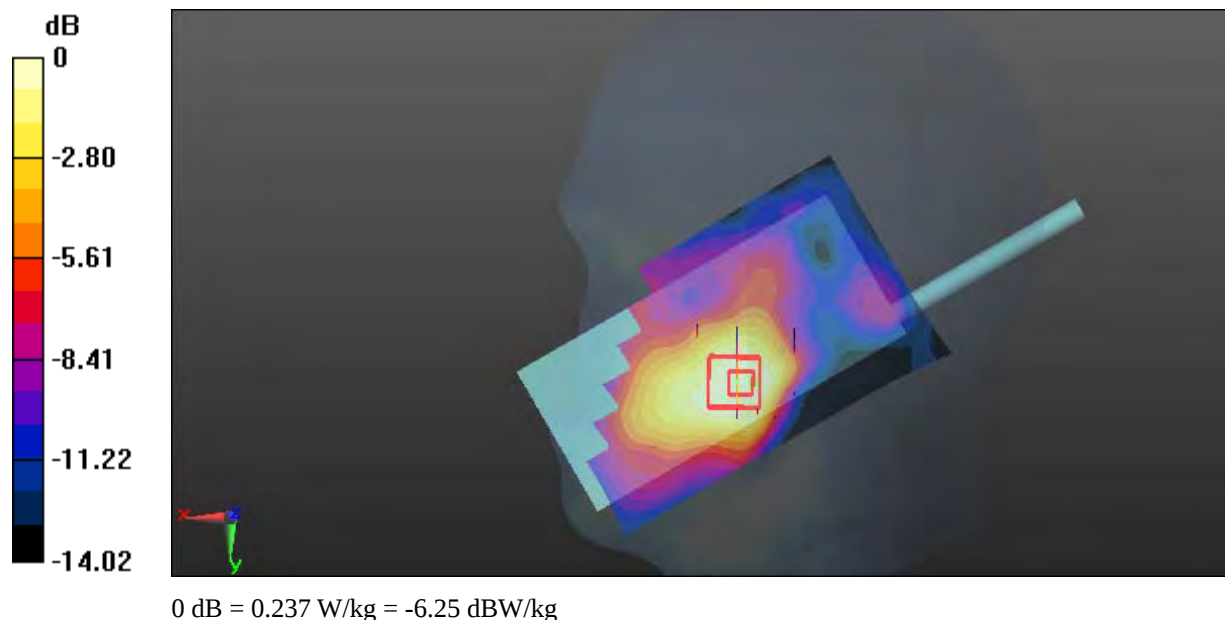

Test Plot 267#: LTE Band 41_Head Right Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 37.934$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.304 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.837 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.278 W/kg

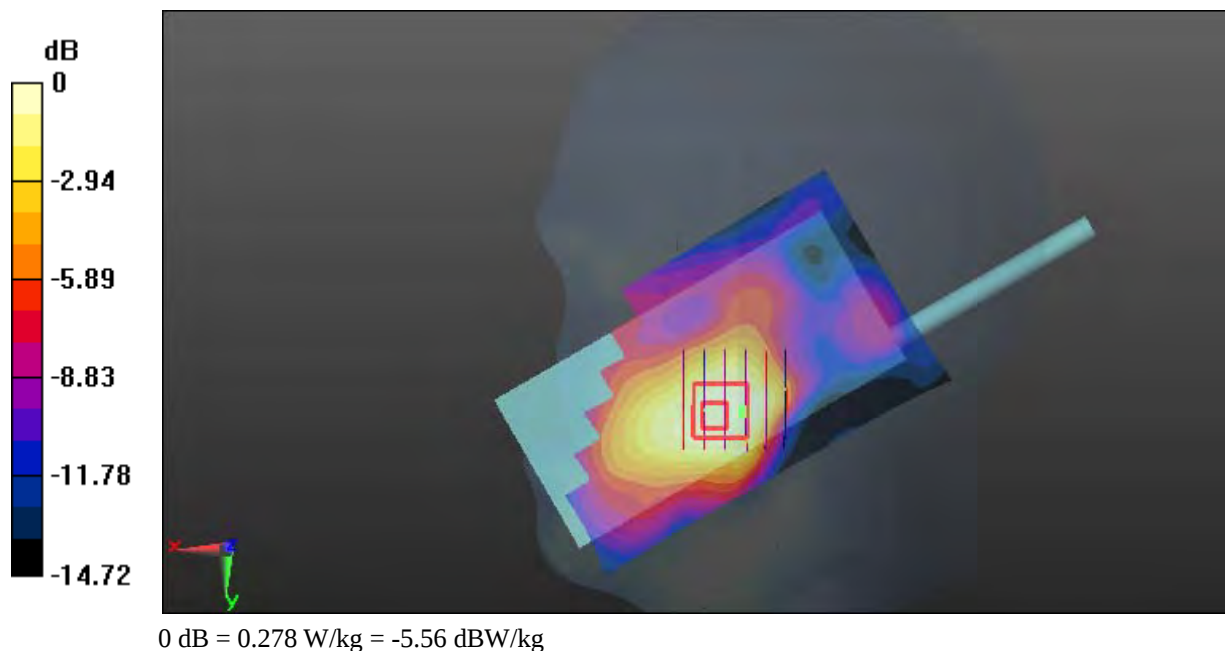

Test Plot 268#: LTE Band 41_Head Right Cheek_High(2635MHz)_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2635 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2635$ MHz; $\sigma = 2.044$ S/m; $\epsilon_r = 37.952$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.284 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.448 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.273 W/kg

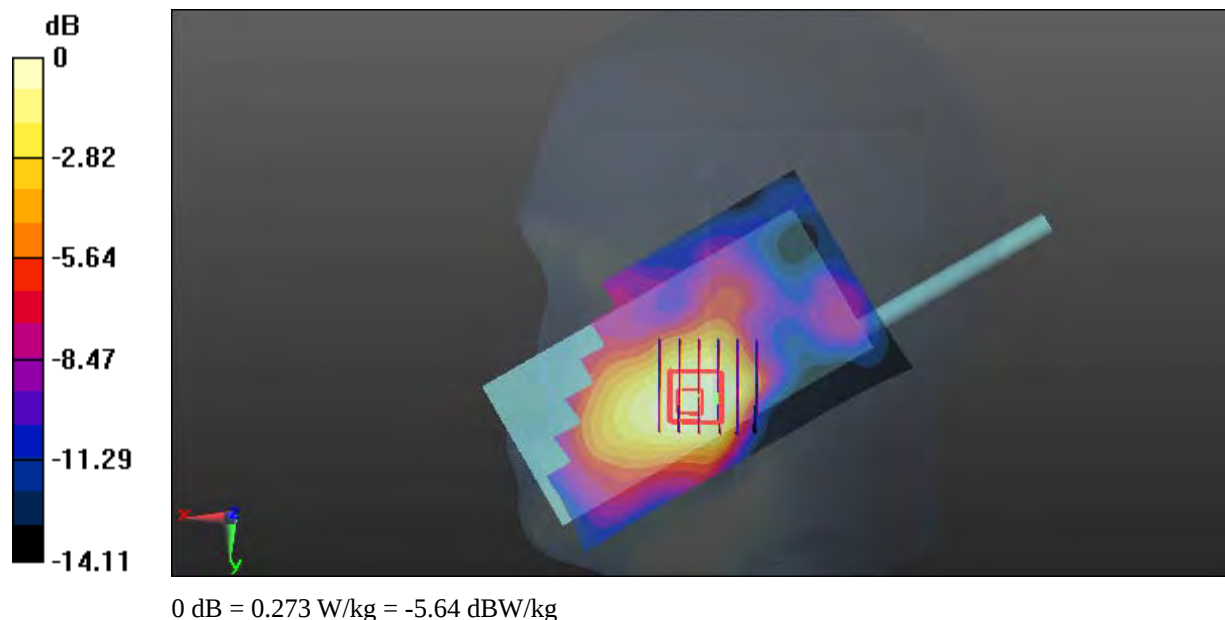

Test Plot 269#: LTE Band 41_Head Right Cheek_High(2680MHz)_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2680 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2680$ MHz; $\sigma = 2.116$ S/m; $\epsilon_r = 37.731$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.291 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.496 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.416 W/kg

SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.274 W/kg

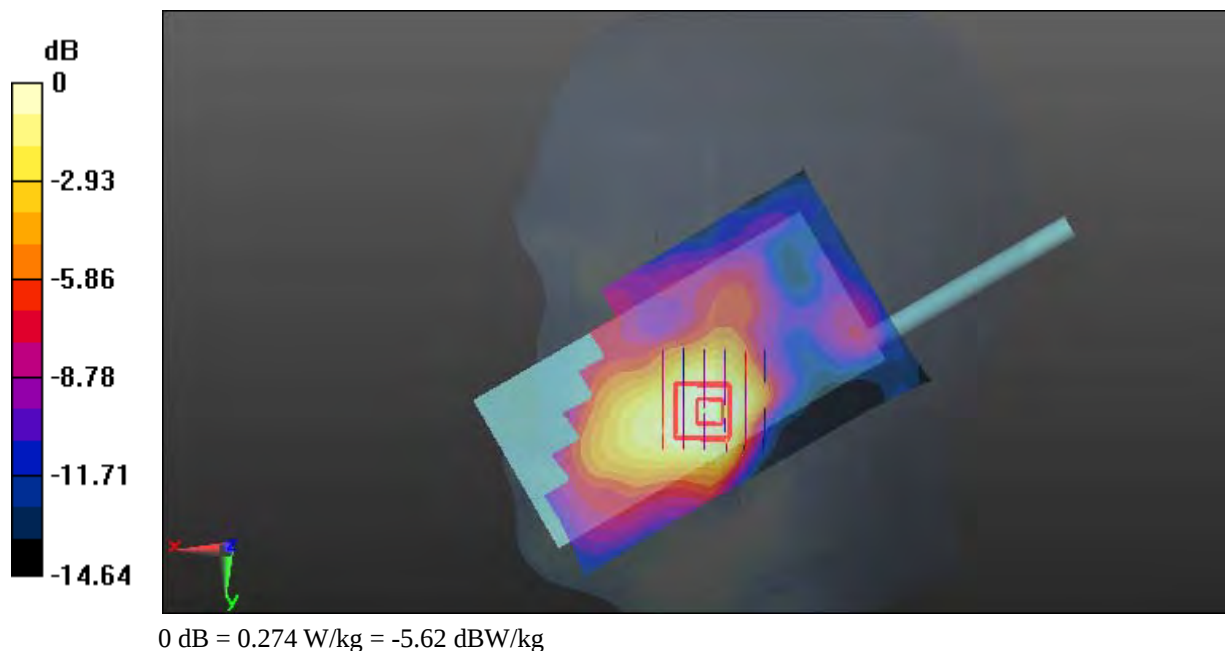

Test Plot 270#: LTE Band 41_Head Right Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 37.934$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.232 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.697 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.220 W/kg

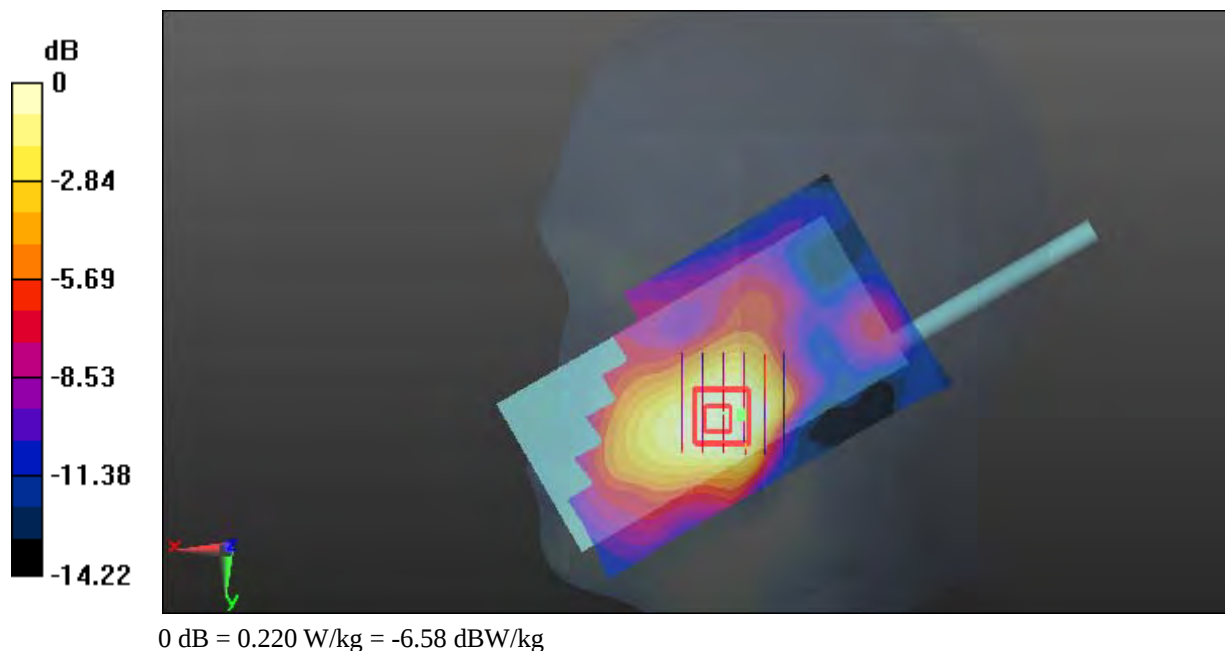

Test Plot 271#: LTE Band 41_Head Right Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 37.934$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0975 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.626 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0844 W/kg

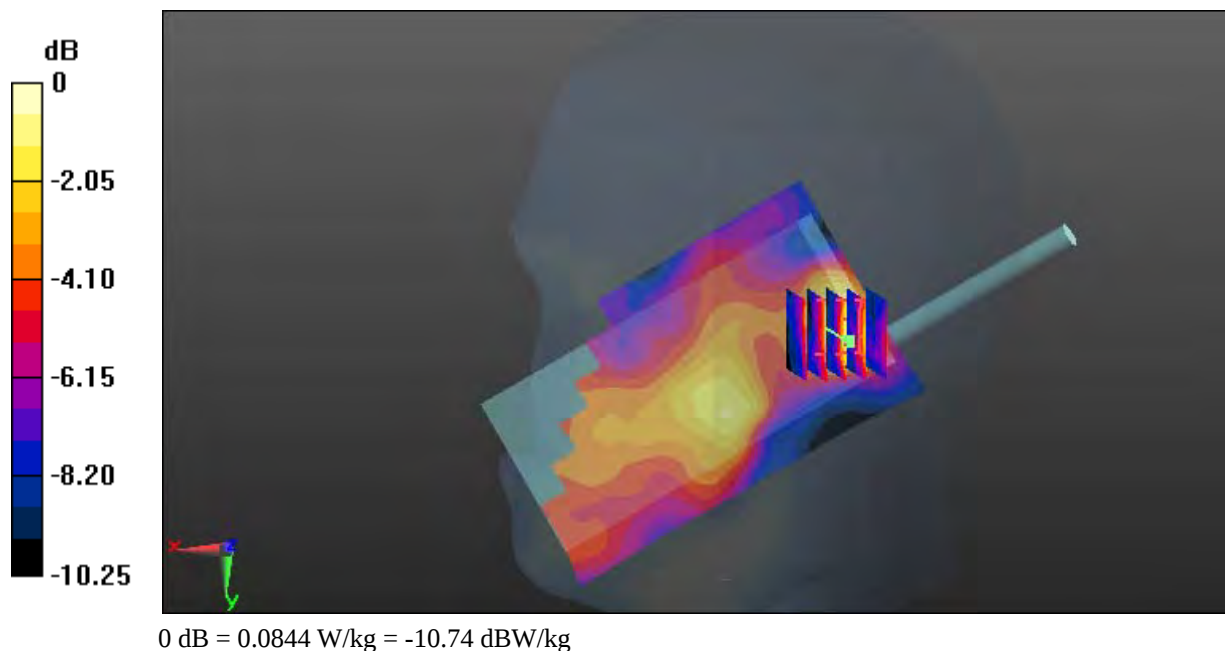

Test Plot 272#: LTE Band 41_Head Right Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 37.934$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0749 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.618 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0666 W/kg

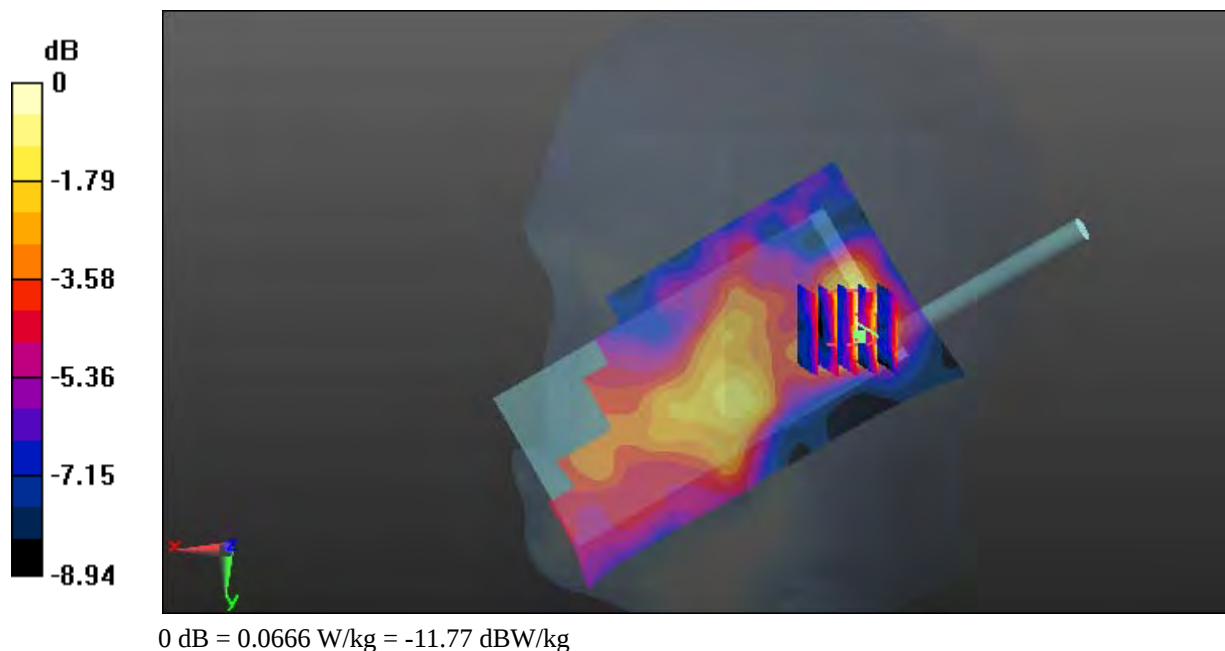

Test Plot 273#: LTE Band 41_Face Up_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 37.934$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0627 W/kg


Zoom Scan (9x11x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.615 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0561 W/kg

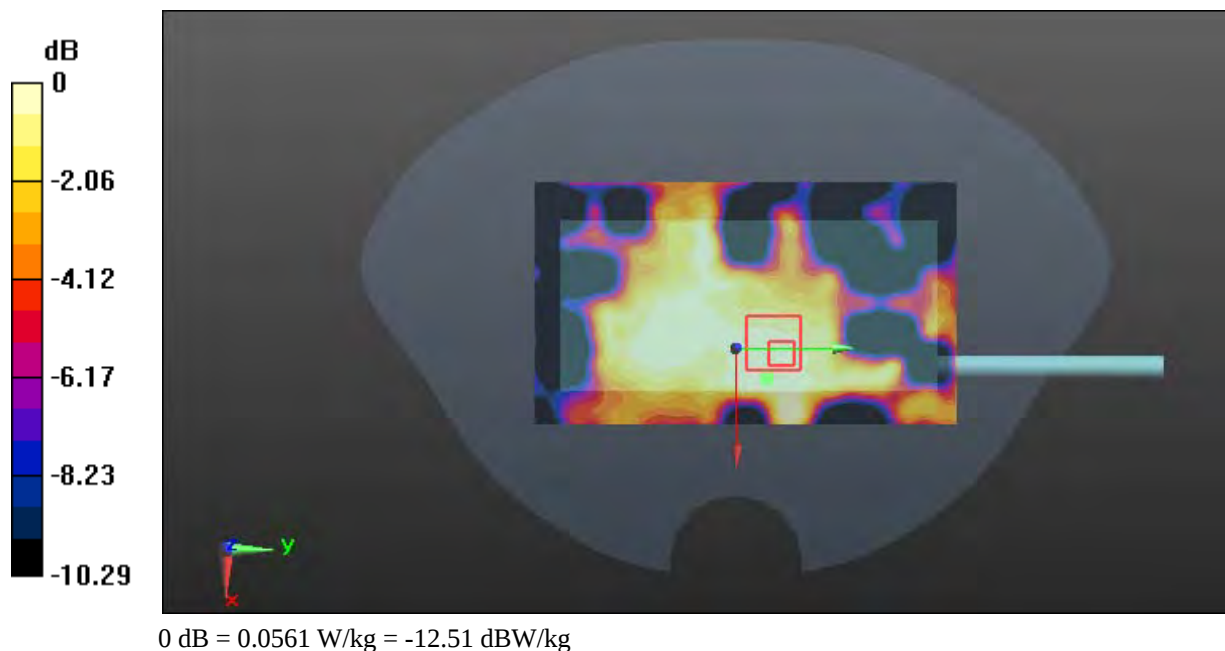

Test Plot 274#: LTE Band 41_Face Up_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 37.934$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0510 W/kg


Zoom Scan (7x10x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.247 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0442 W/kg

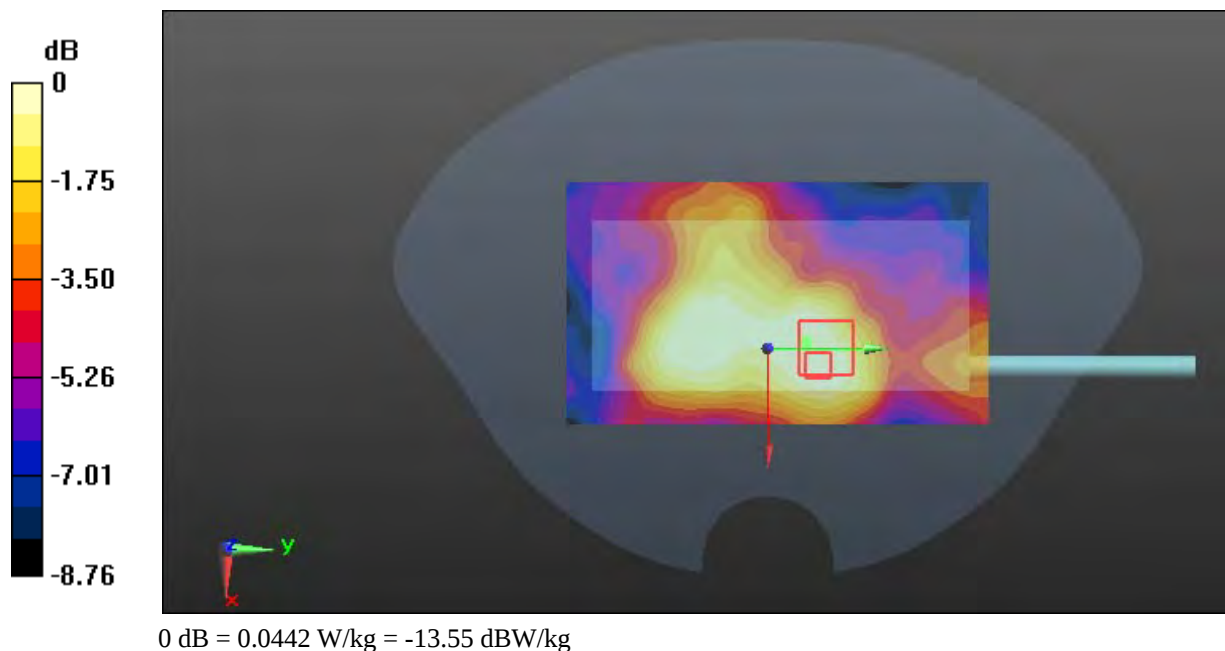

Test Plot 275#: LTE Band 41_Body Front _Low(2506MHz)_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2506 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2506$ MHz; $\sigma = 1.943$ S/m; $\epsilon_r = 52.824$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.147 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.503 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

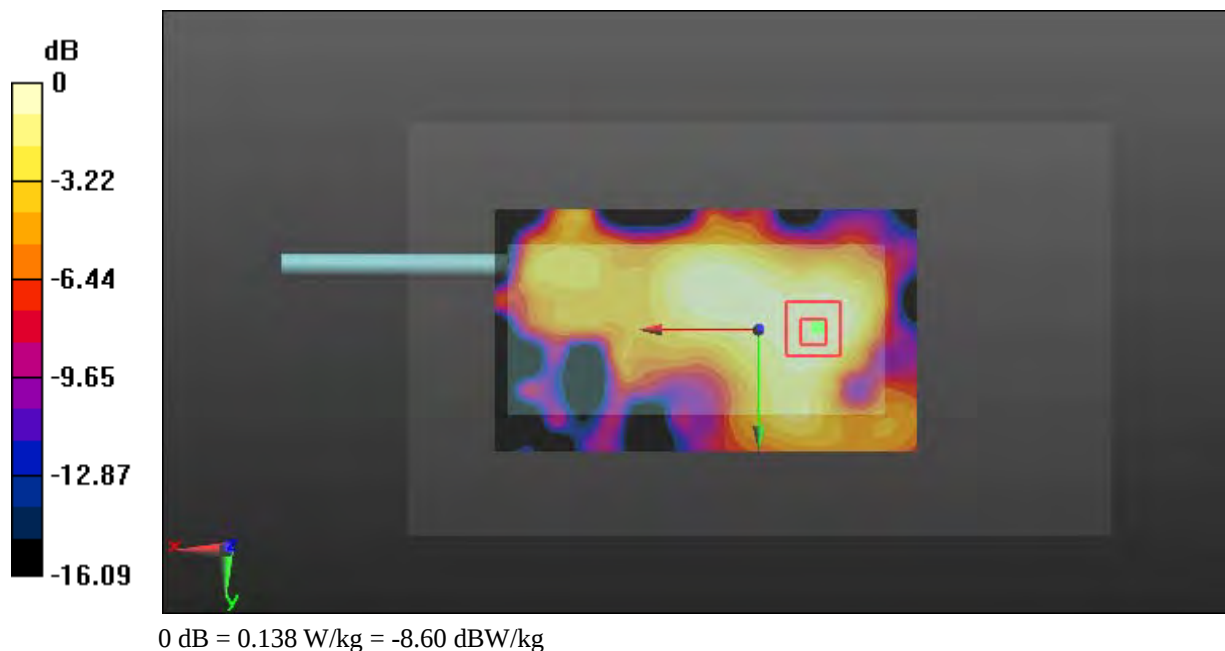

Test Plot 276#: LTE Band 41_Body Front _Low(2545MHz)_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2545 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2545$ MHz; $\sigma = 2.145$ S/m; $\epsilon_r = 52.635$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.129 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.232 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.12 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

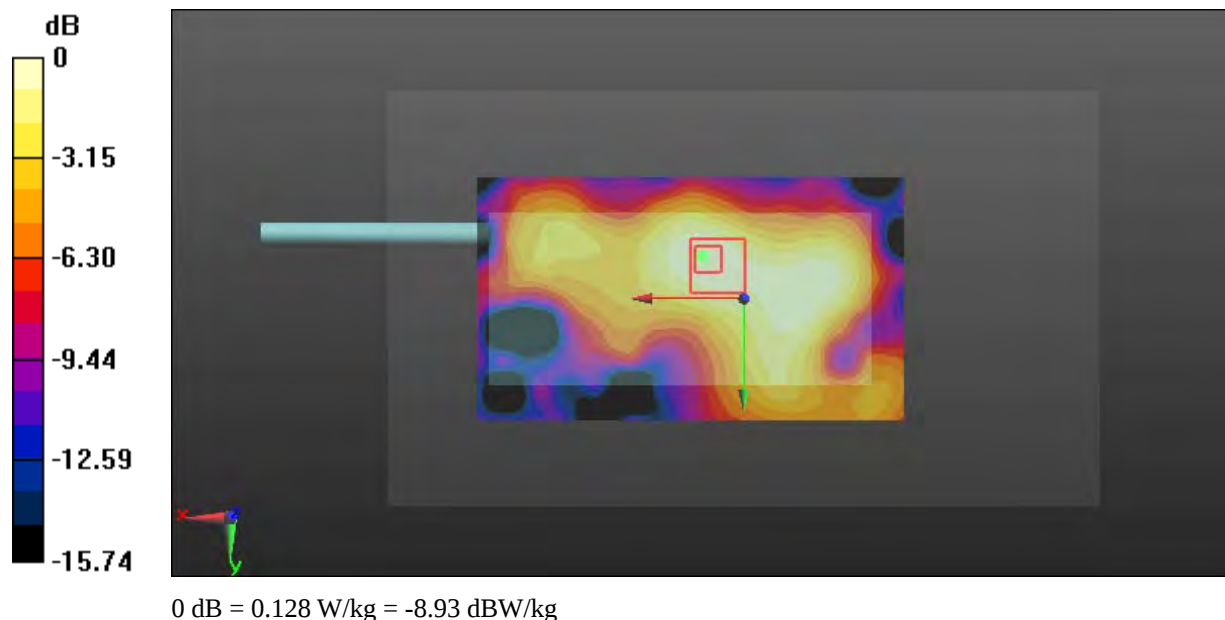

Test Plot 277#: LTE Band 41_Body Front _Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 2.212$ S/m; $\epsilon_r = 51.786$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.157 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.196 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.155 W/kg

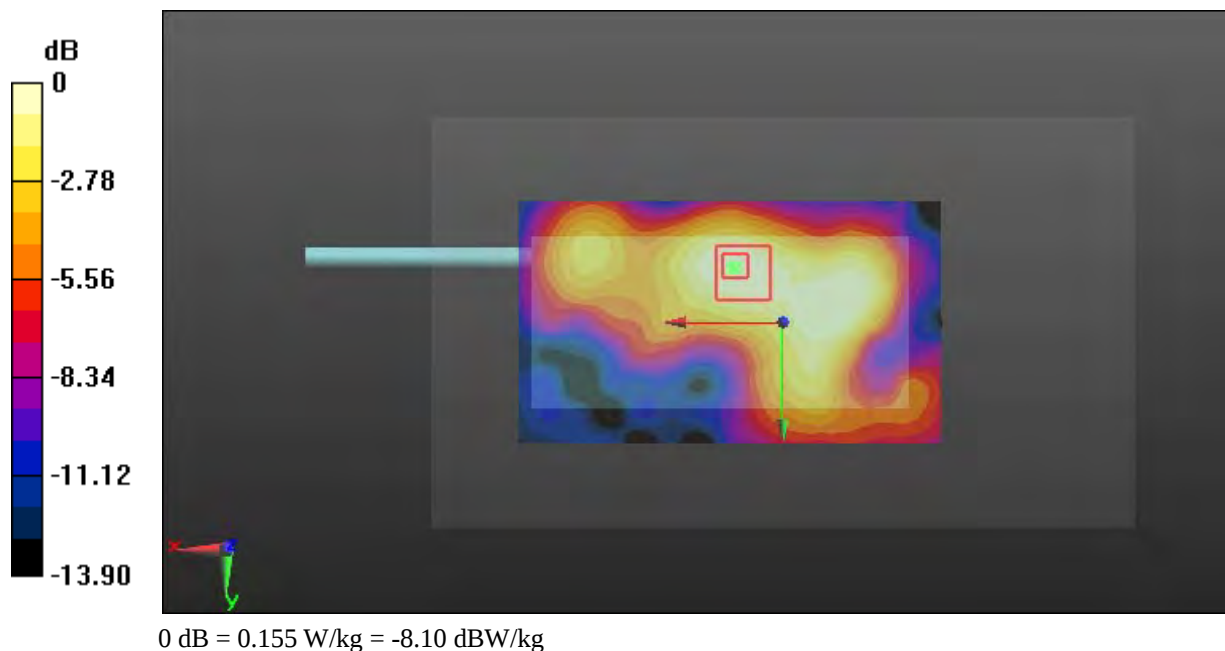

Test Plot 278#: LTE Band 41_Body Front _High(2635MHz)_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2635 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2635$ MHz; $\sigma = 2.282$ S/m; $\epsilon_r = 51.114$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.153 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.712 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

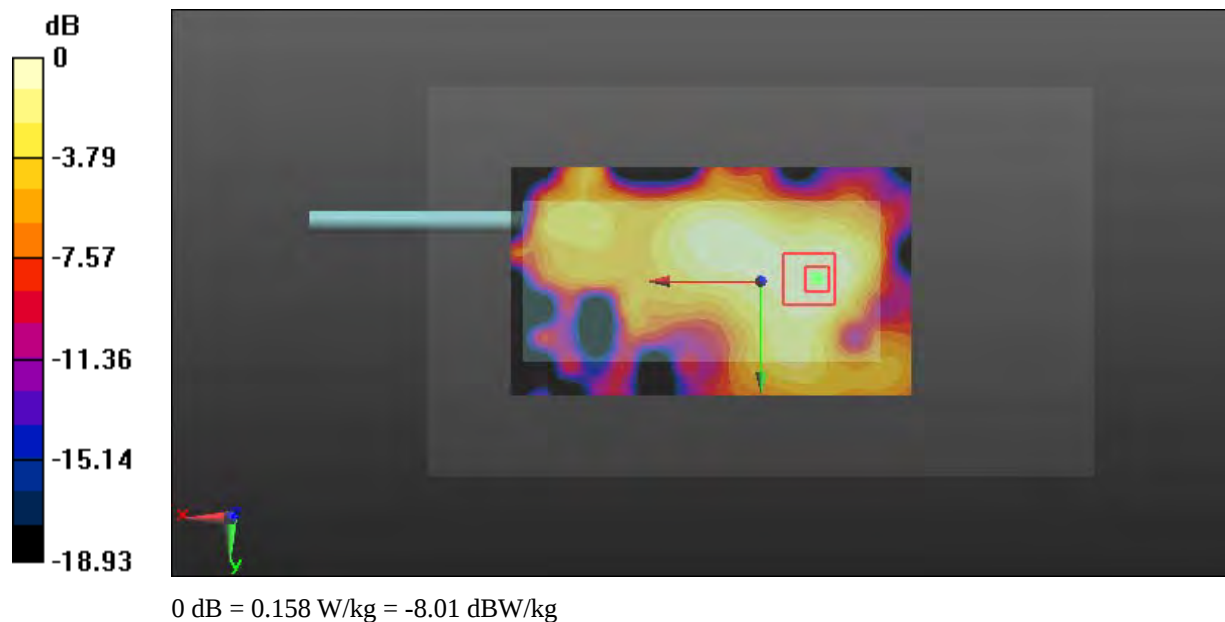

DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820

DASY5 Configuration:

- Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.788 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.283 W/kg
SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.080 W/kg
Maximum value of SAR (measured) = 0.166 W/kg



Test Plot 280#: LTE Band 41_Body Front _Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 2.212$ S/m; $\epsilon_r = 51.786$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.132 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.541 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.131 W/kg

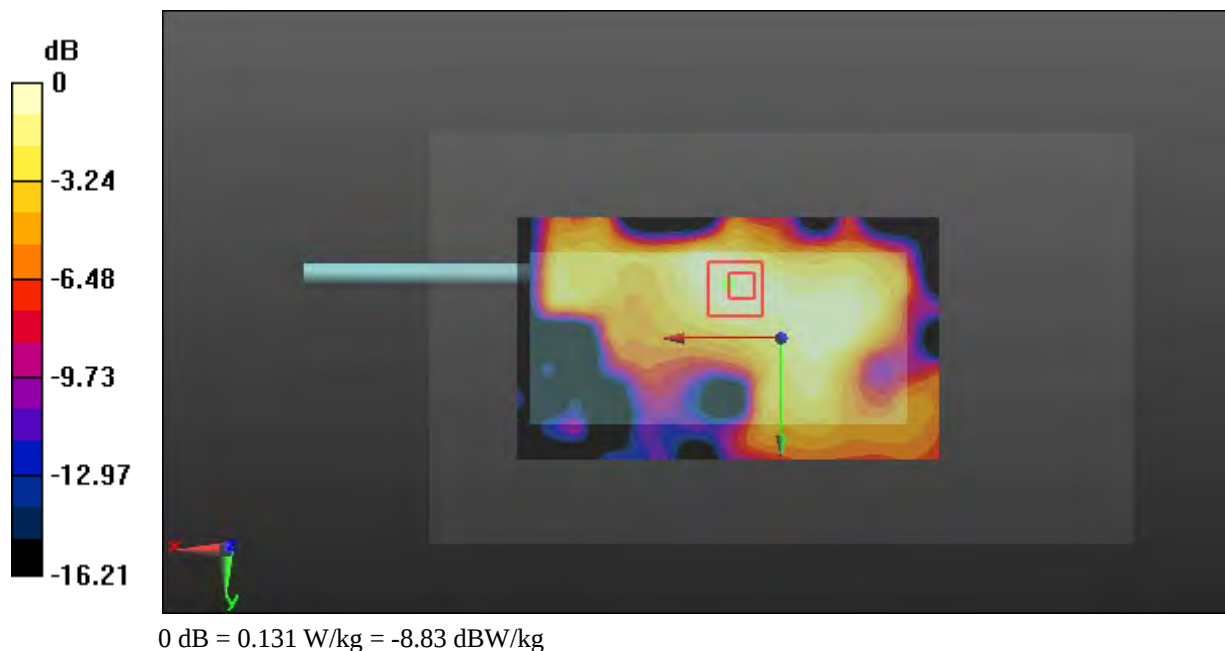

Test Plot 281#: LTE Band 41_Body Back_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 2.212$ S/m; $\epsilon_r = 51.786$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0796 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.163 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0815 W/kg

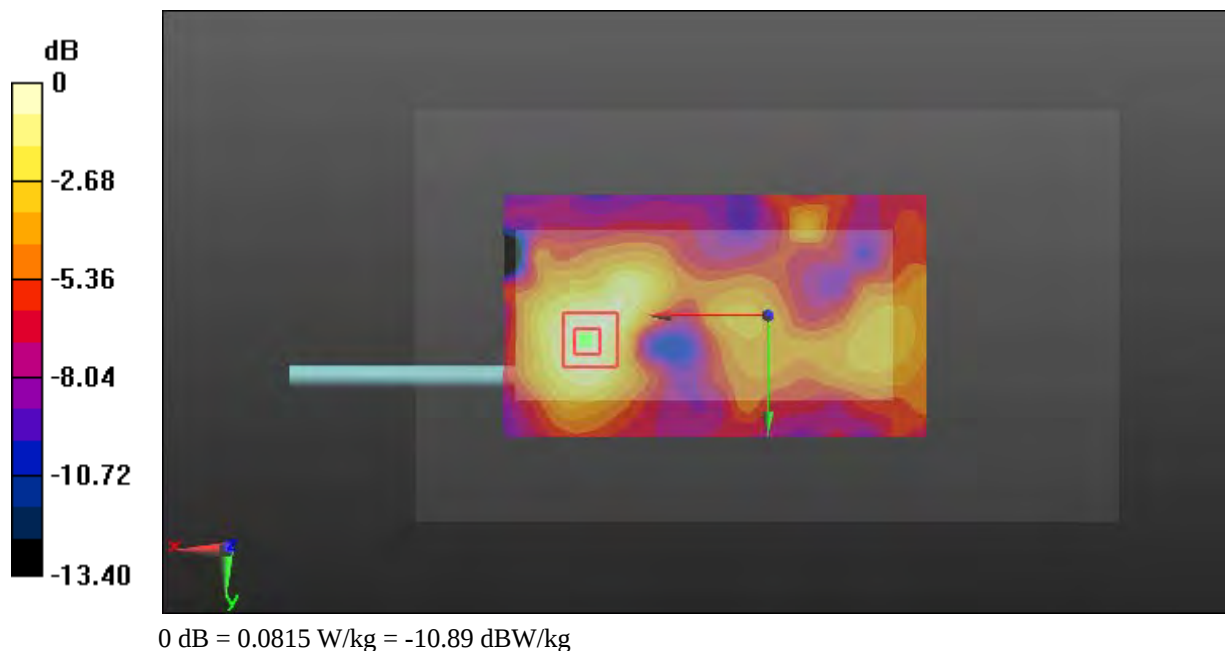

Test Plot 282#: LTE Band 41_Body Back_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 2.212$ S/m; $\epsilon_r = 51.786$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0669 W/kg


Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.643 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0635 W/kg

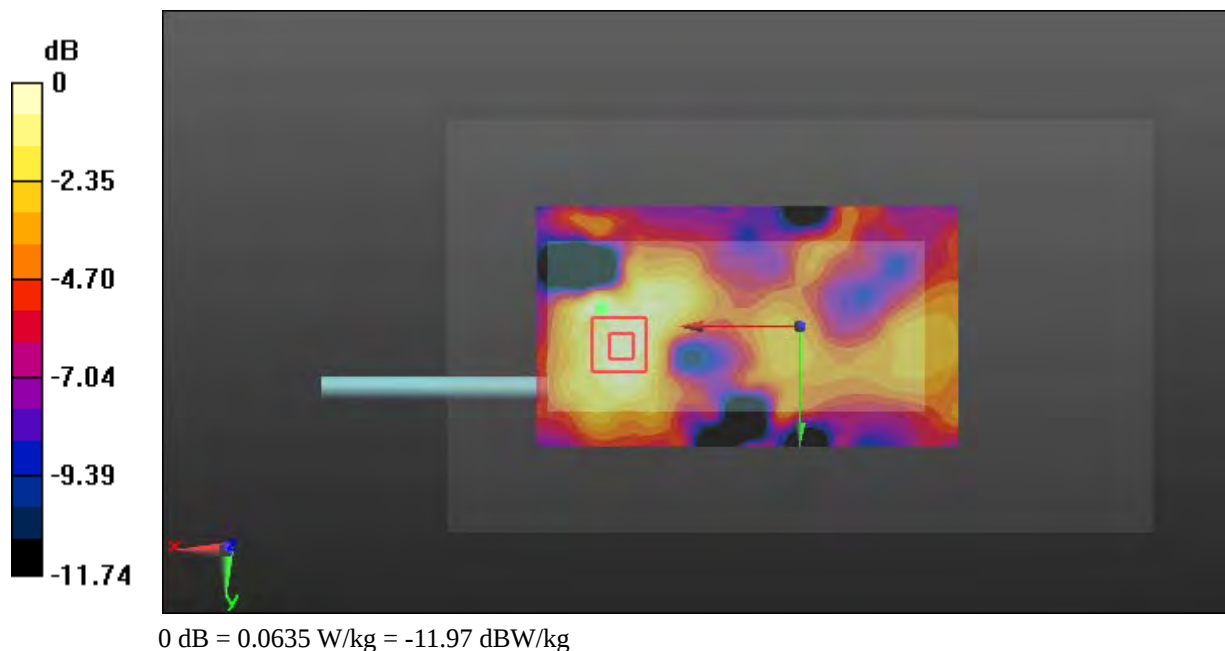

Test Plot 283#: LTE Band 41_Body Left_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 2.212$ S/m; $\epsilon_r = 51.786$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.107 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.336 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0940 W/kg

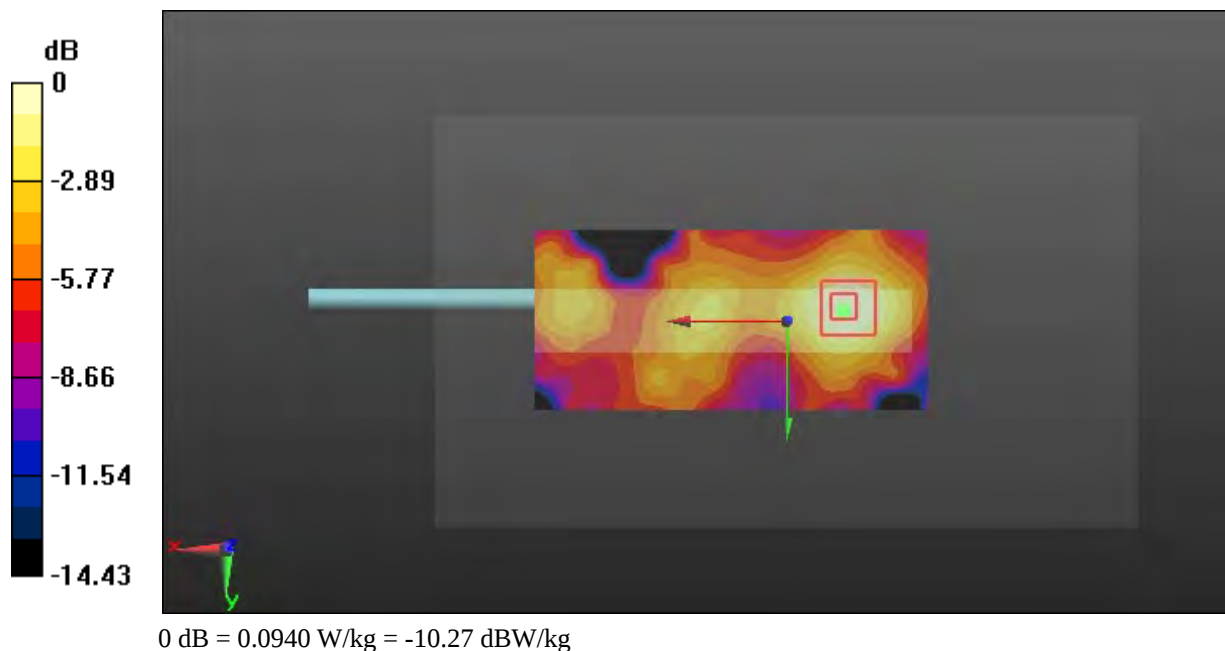

Test Plot 284#: LTE Band 41_Body Left_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 2.212$ S/m; $\epsilon_r = 51.786$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0845 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.996 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0930 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0891 W/kg

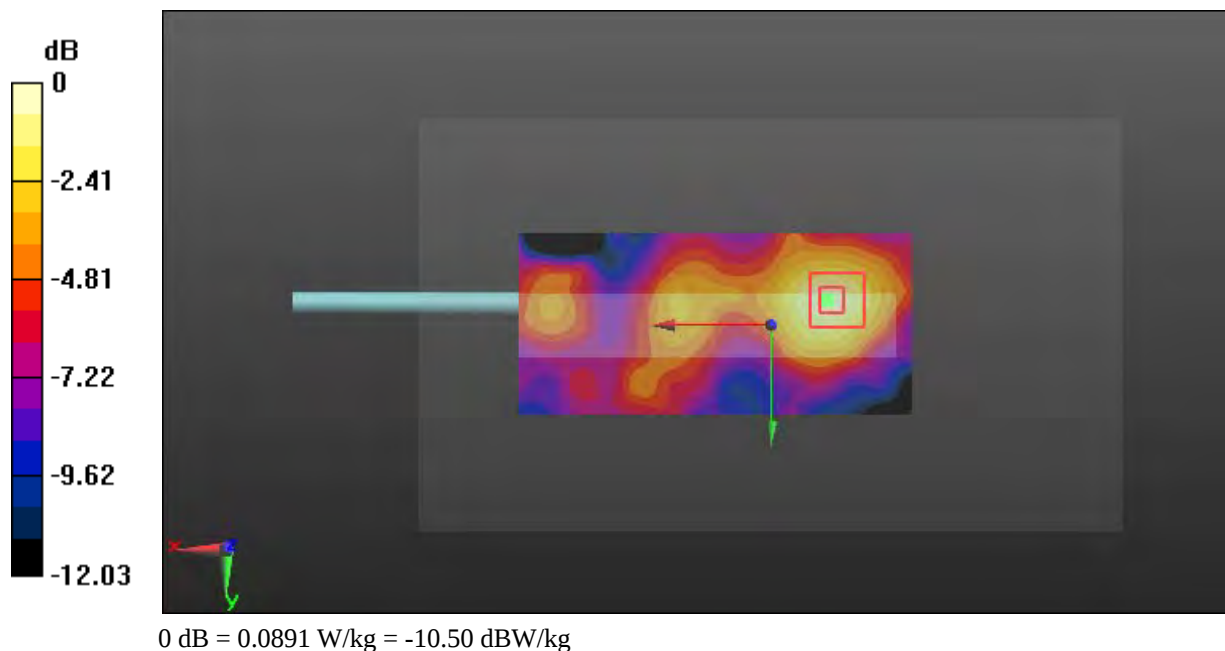

Test Plot 285#: LTE Band 41_Body Right_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 2.212$ S/m; $\epsilon_r = 51.786$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0973 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.176 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0947 W/kg

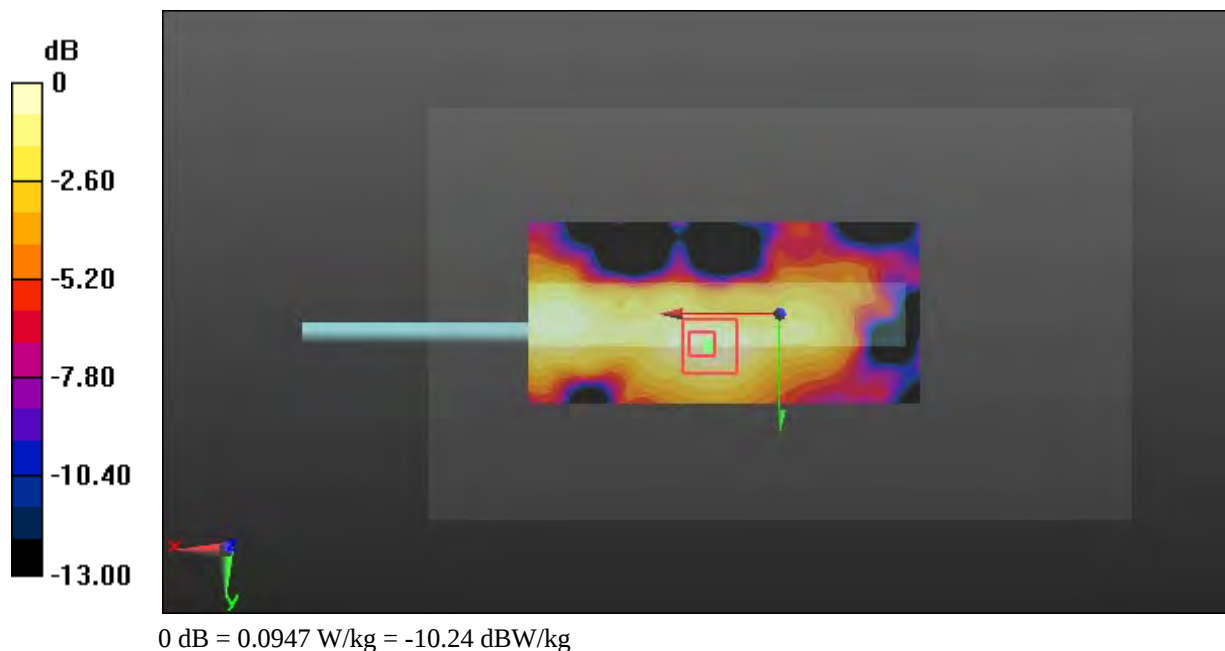

Test Plot 286#: LTE Band 41_Body Right_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 2.212$ S/m; $\epsilon_r = 51.786$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0818 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.818 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0820 W/kg

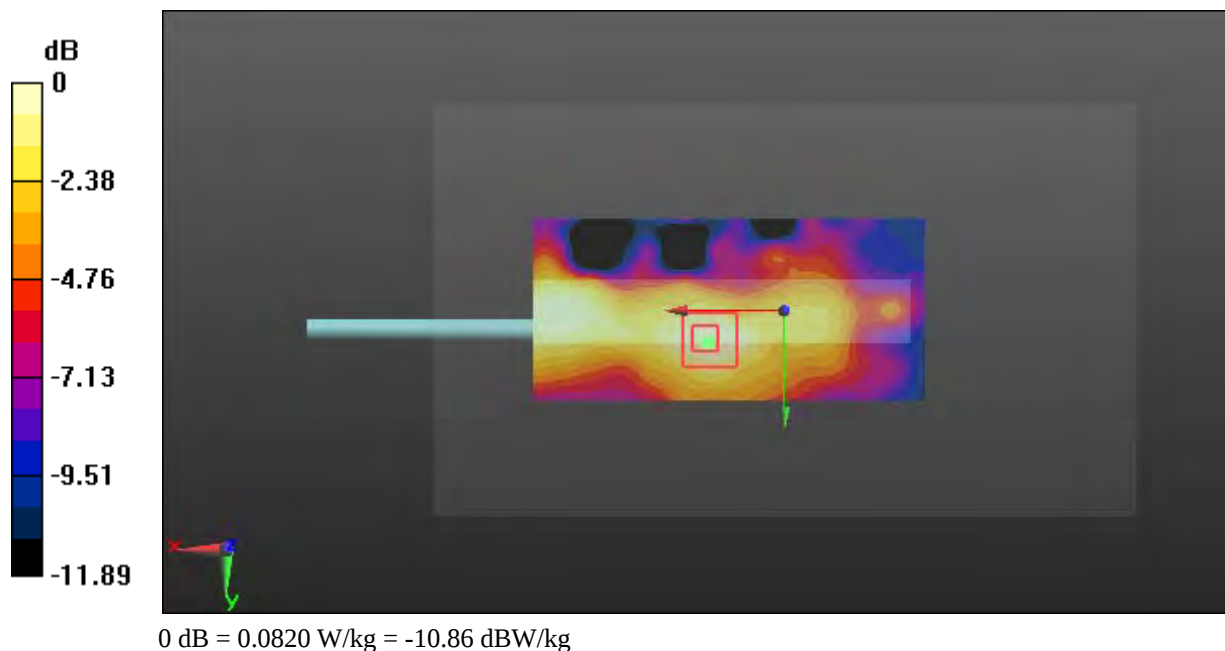

Test Plot 287#: LTE Band 41_Body Bottom_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 2.212$ S/m; $\epsilon_r = 51.786$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.107 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.031 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.166 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

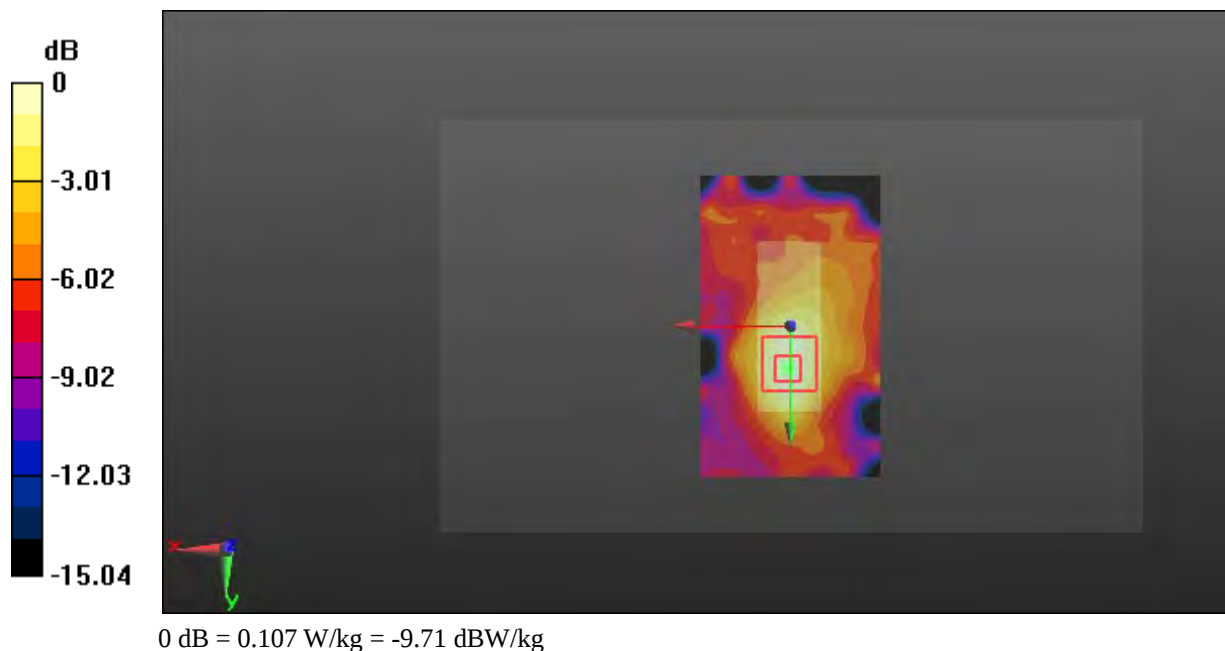

Test Plot 288#: LTE Band 41_Body Bottom_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 2.212$ S/m; $\epsilon_r = 51.786$; $\rho = 1000$ kg/m³;
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0965 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.557 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0874 W/kg



Test Plot 289#: CDMA 850(BC0)_Head Left Cheek_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 824.7$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 42.42$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.337 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.50 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.254 W/kg

Maximum value of SAR (measured) = 0.340 W/kg

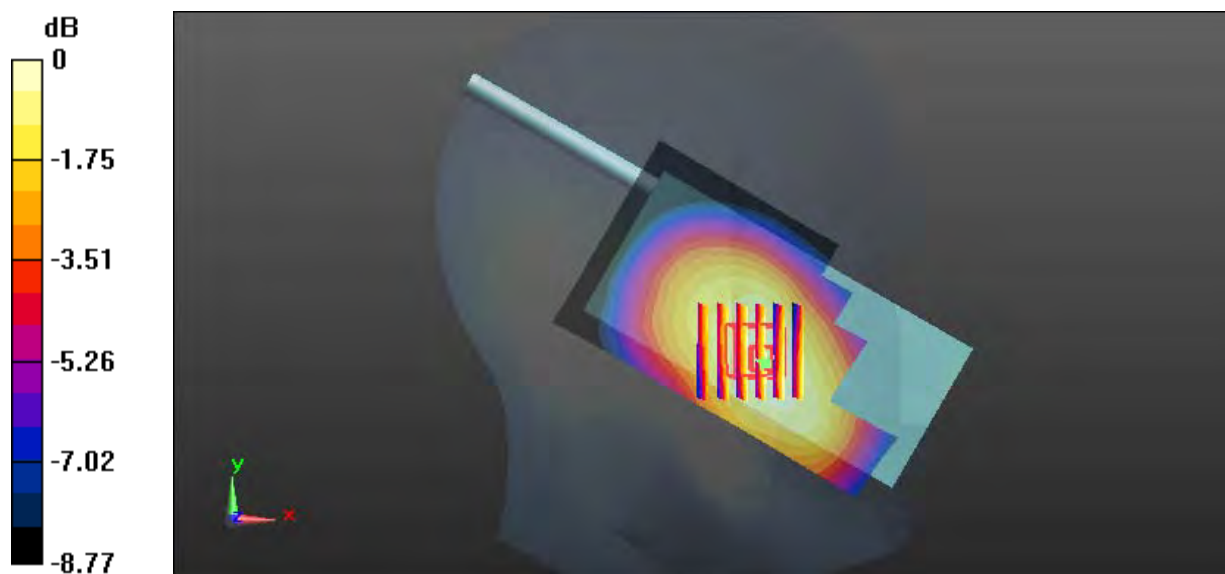

0 dB = 0.340 W/kg = -4.69 dBW/kg

Test Plot 290#: CDMA 850(BC0)_Head Left Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 42.319$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.360 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.08 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.437 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 0.365 W/kg

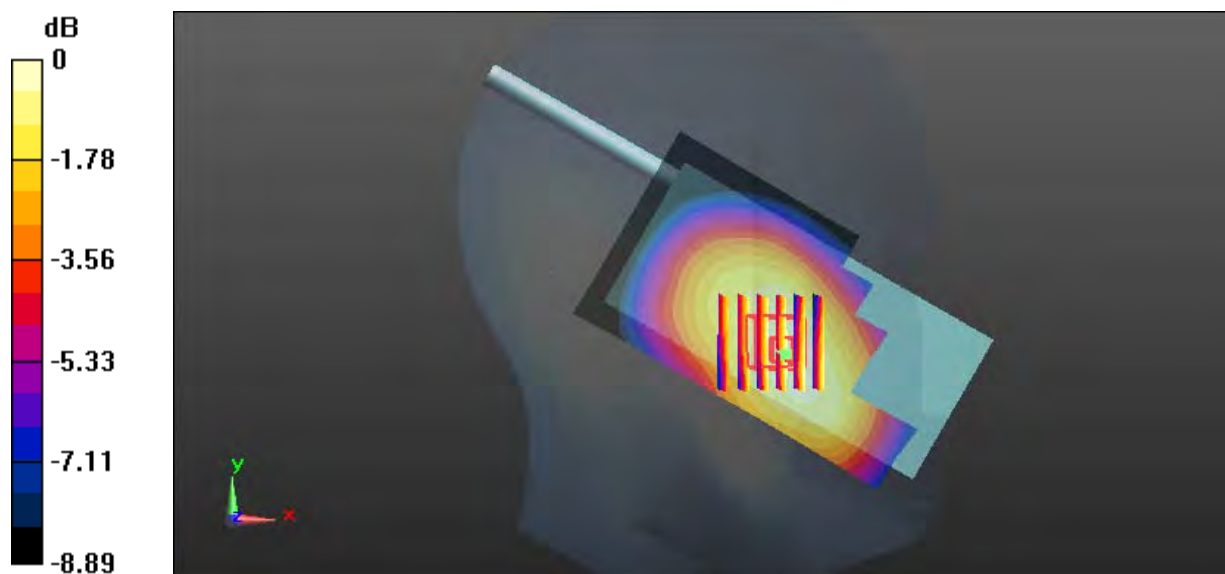

0 dB = 0.365 W/kg = -4.38 dBW/kg

Test Plot 291#: CDMA 850(BC0)_Head Left Cheek_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.073$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.395 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.44 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.475 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.297 W/kg

Maximum value of SAR (measured) = 0.401 W/kg

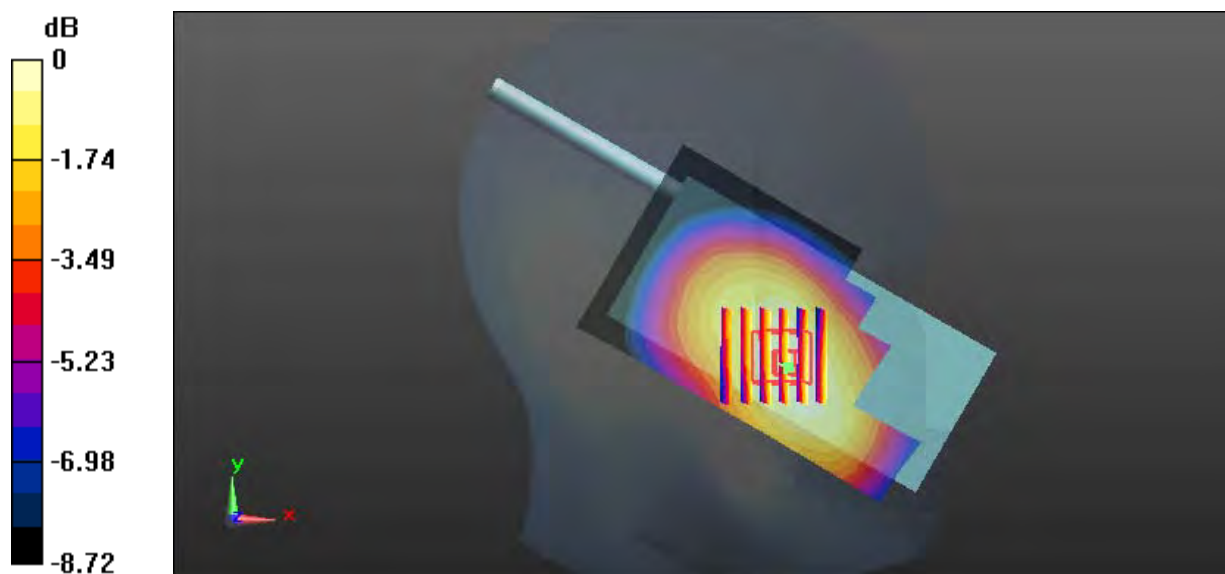

0 dB = 0.401 W/kg = -3.97 dBW/kg

Test Plot 292#: CDMA 850(BC0)_Head Left Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 42.319$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.245 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.17 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.181 W/kg

Maximum value of SAR (measured) = 0.245 W/kg

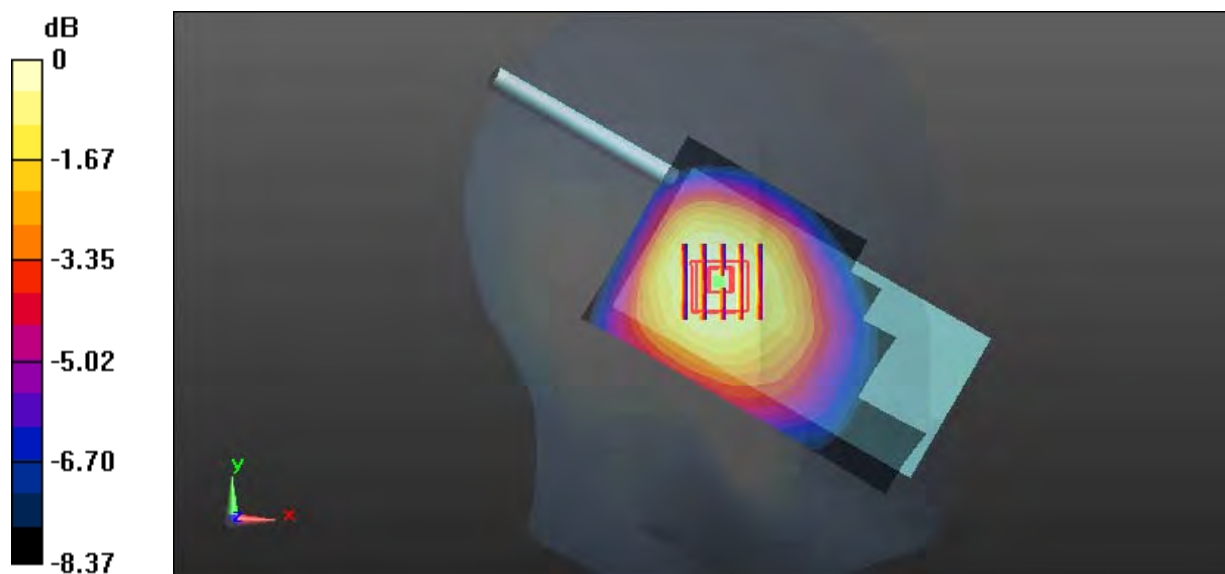

0 dB = 0.245 W/kg = -6.11 dBW/kg

Test Plot 293#: CDMA 850(BC0)_Head Right Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 42.319$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.303 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.149 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.305 W/kg

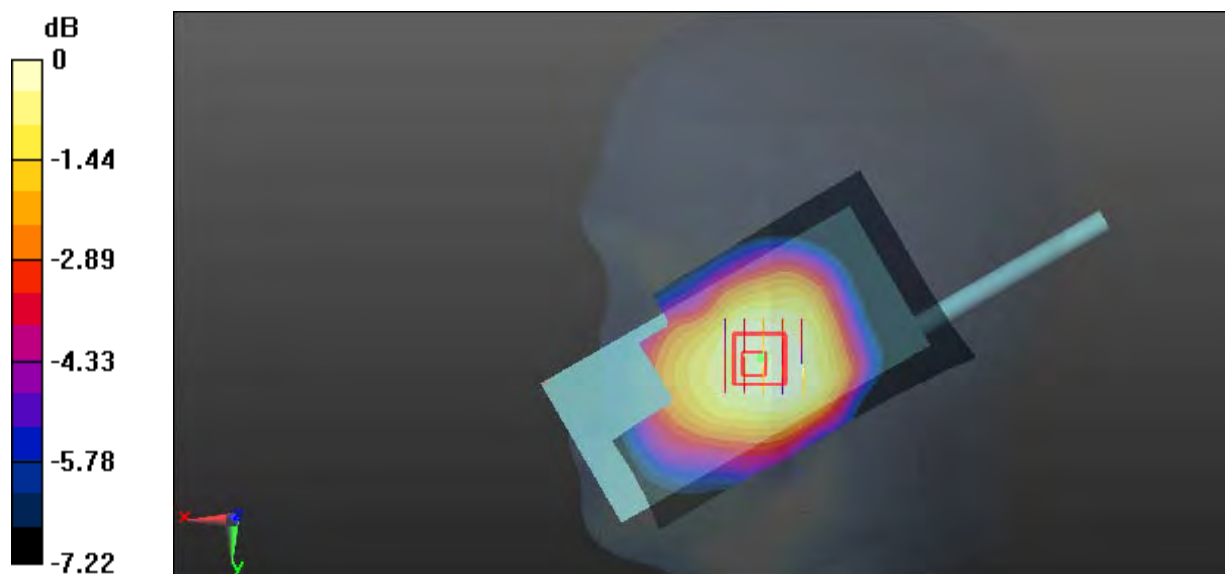

0 dB = 0.305 W/kg = -5.16 dBW/kg

Test Plot 294#: CDMA 850(BC0)_Head Right Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 42.319$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.186 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.67 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.183 W/kg

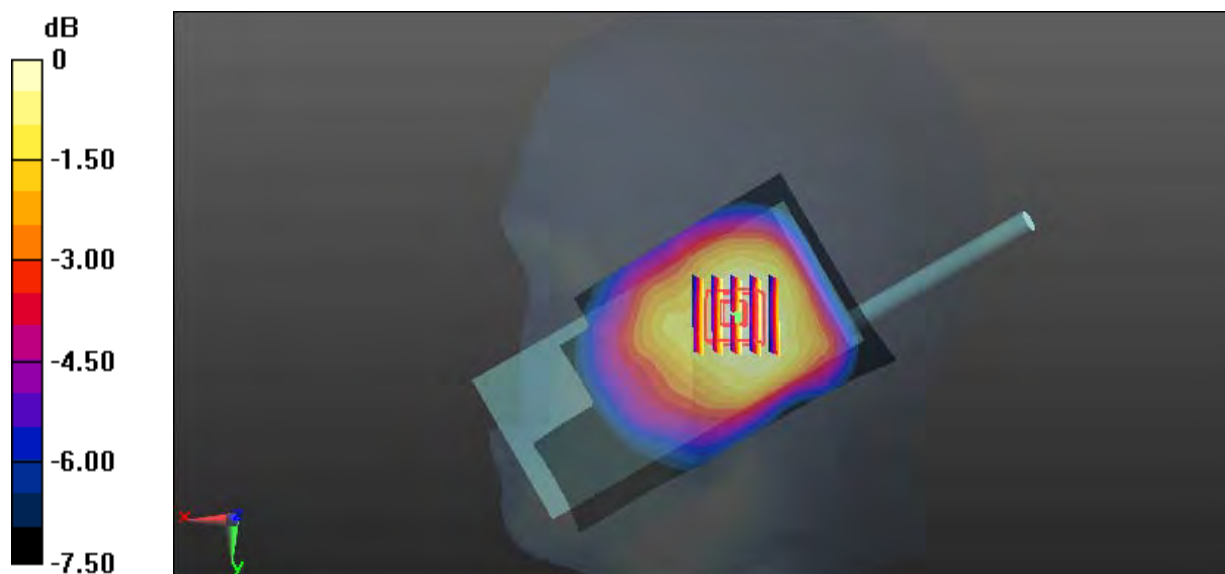

0 dB = 0.183 W/kg = -7.38 dBW/kg

Test Plot 295#: CDMA 850(BC0)_Face Up_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 42.319$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.173 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.09 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.173 W/kg



Test Plot 296#: CDMA 850(BC0)_Body Worn Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.141 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.17 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.141 W/kg

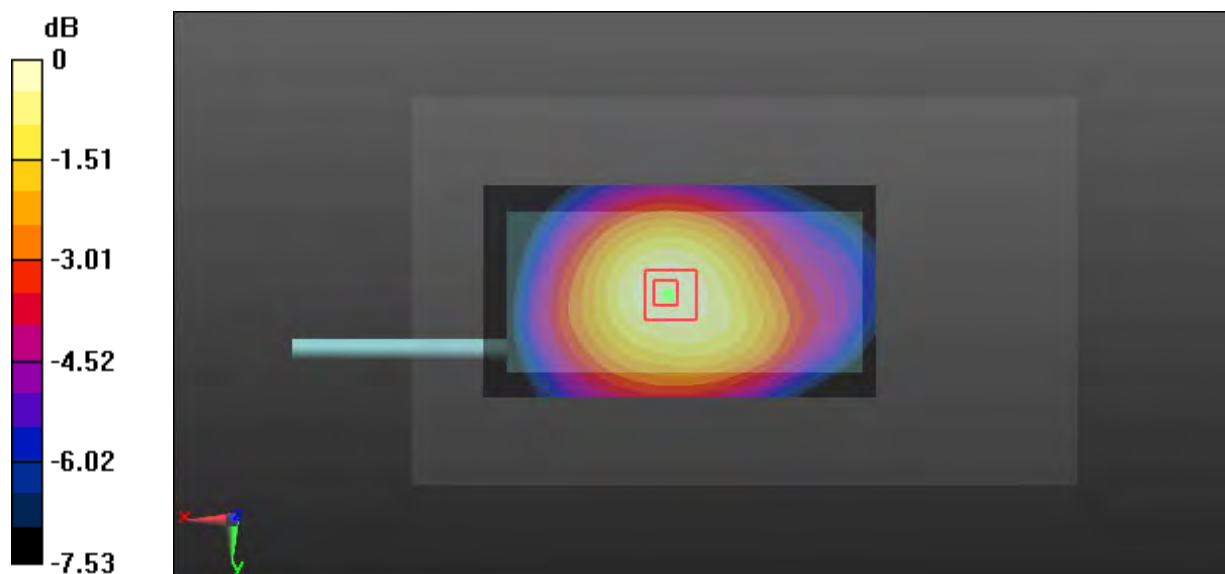

0 dB = 0.141 W/kg = -8.51 dBW/kg

Test Plot 297#: CDMA 850(BC0)_Body Front _Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 824.7$ MHz; $\sigma = 0.973$ S/m; $\epsilon_r = 56.846$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.455 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.97 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.283 W/kg

Maximum value of SAR (measured) = 0.385 W/kg

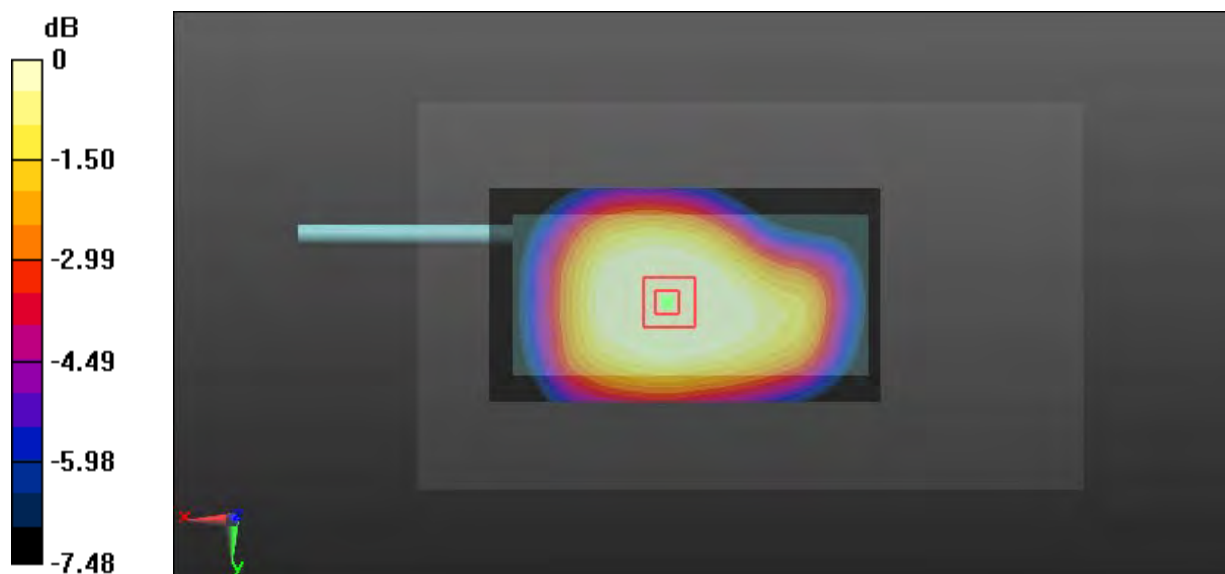

0 dB = 0.385 W/kg = -4.15 dBW/kg

Test Plot 298#: CDMA 850(BC0)_Body Front _Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.415 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.07 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.493 W/kg

SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

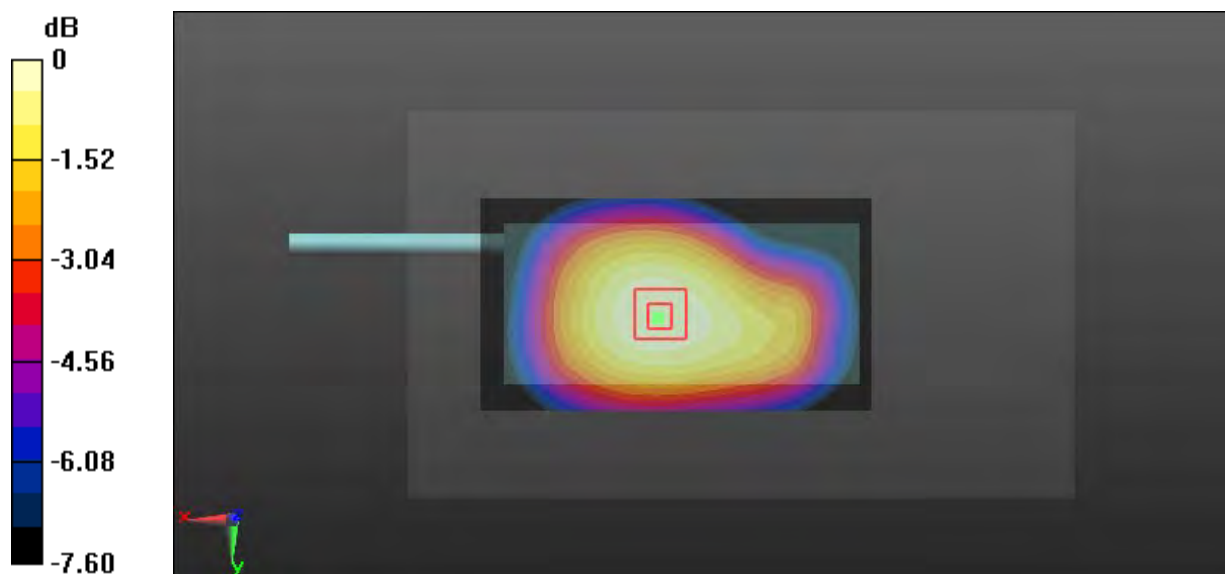

Test Plot 299#: CDMA 850(BC0)_Body Front _High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 848.31$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 56.928$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.400 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.76 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.398 W/kg

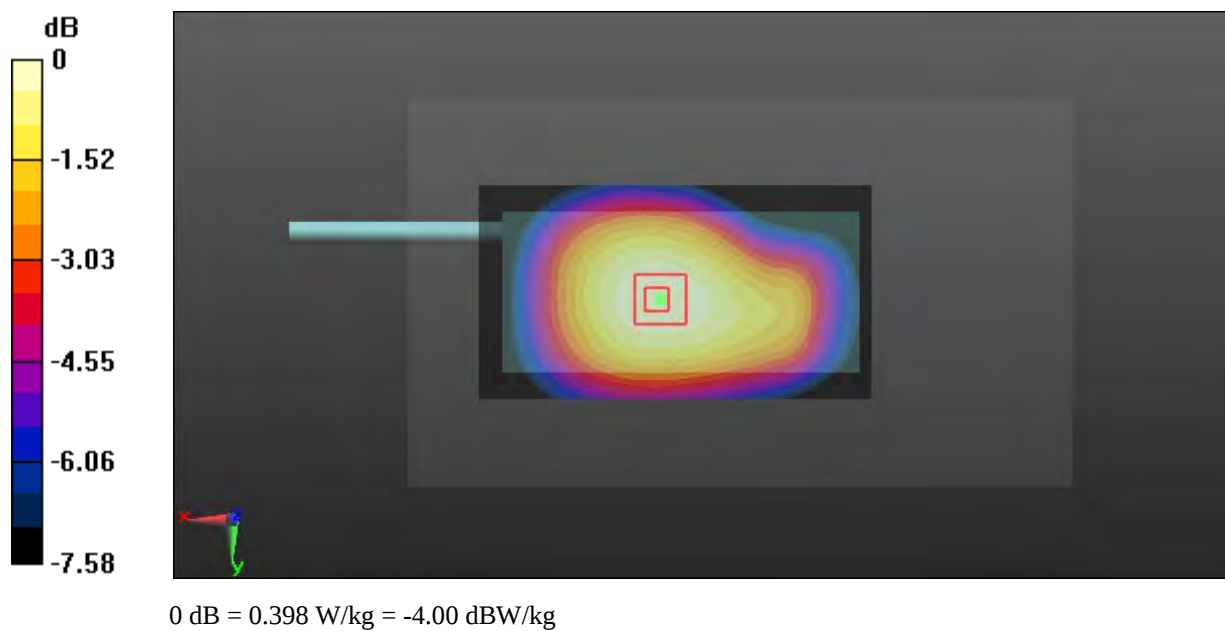

Test Plot 300#: CDMA 850(BC0)_Body Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.156 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.55 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.156 W/kg

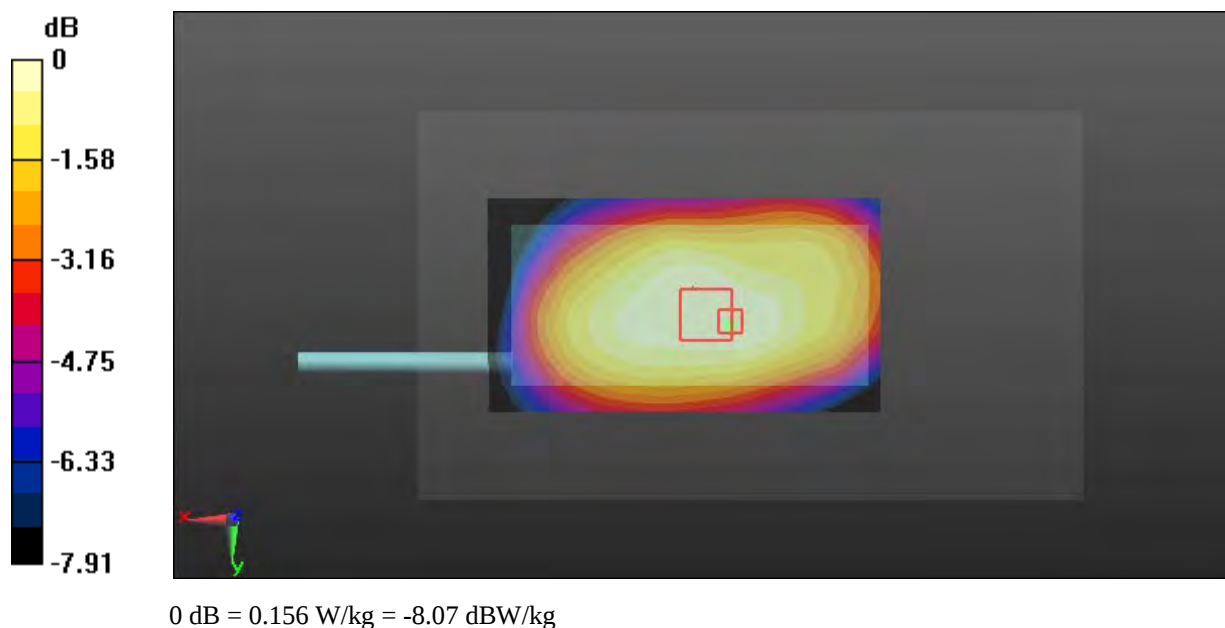

Test Plot 301#: CDMA 850(BC0)_Body Left_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.186 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.71 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.188 W/kg

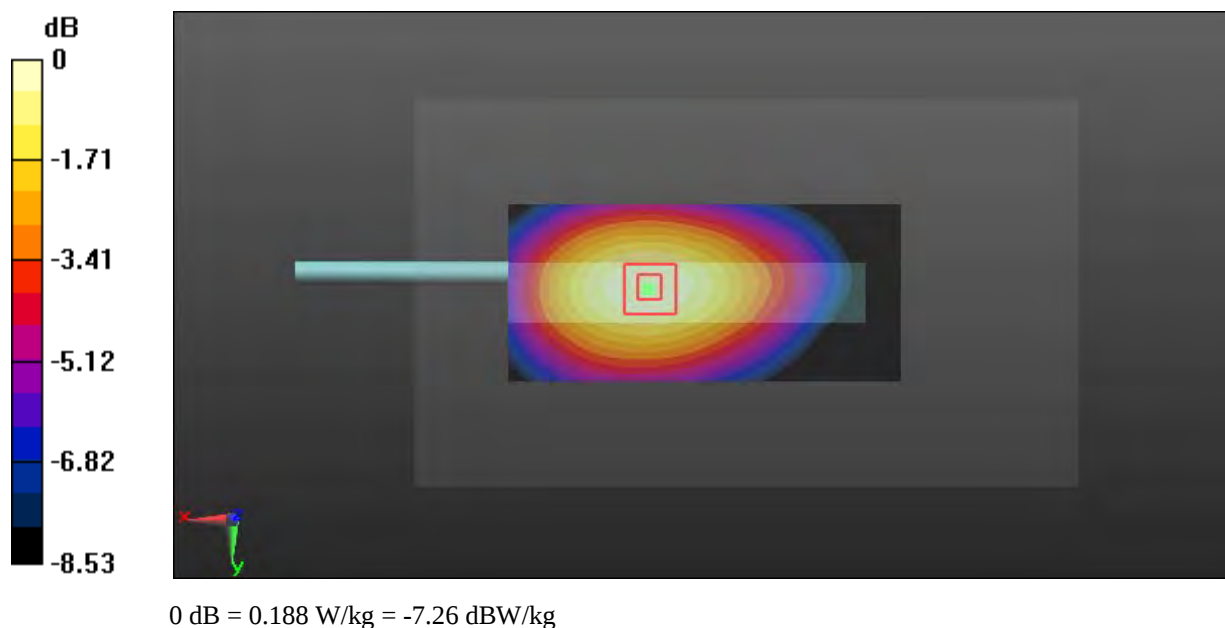

Test Plot 302#: CDMA 850(BC0)_Body Right_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.274 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.91 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.273 W/kg

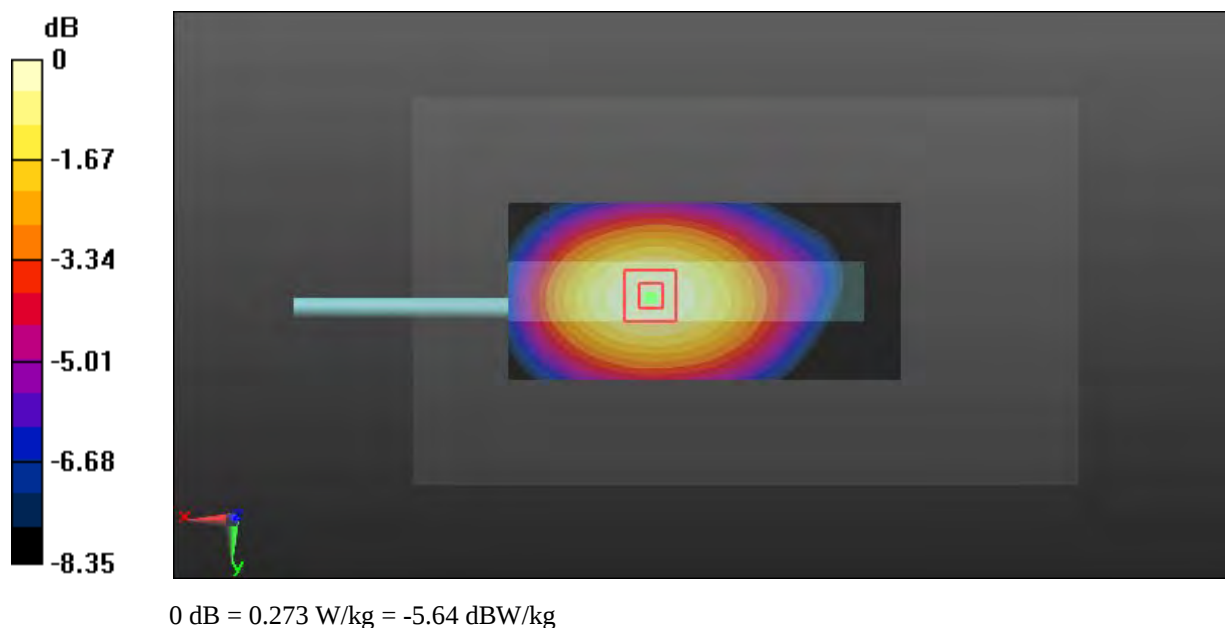

Test Plot 303#: CDMA 850(BC0)_Body Bottom_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.276$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.156 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.44 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.159 W/kg

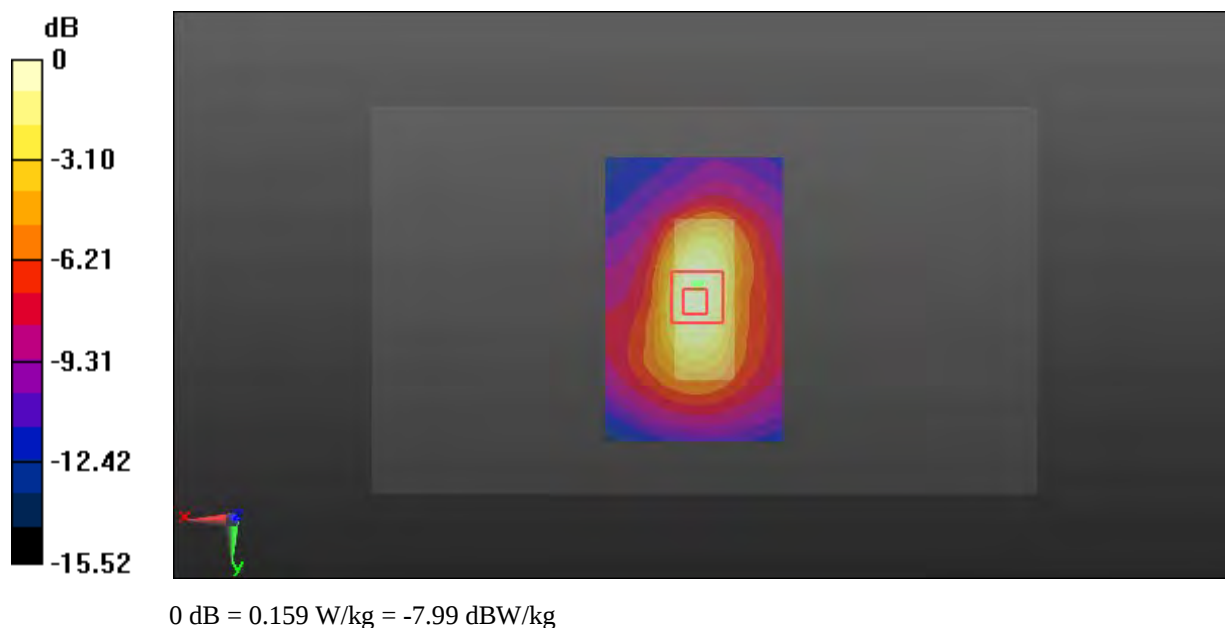

Test Plot 304#: CDMA 1900(BC1)_Head Left Cheek_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1XRTT; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1851.5 \text{ MHz}$; $\sigma = 1.344 \text{ S/m}$; $\epsilon_r = 40.728$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

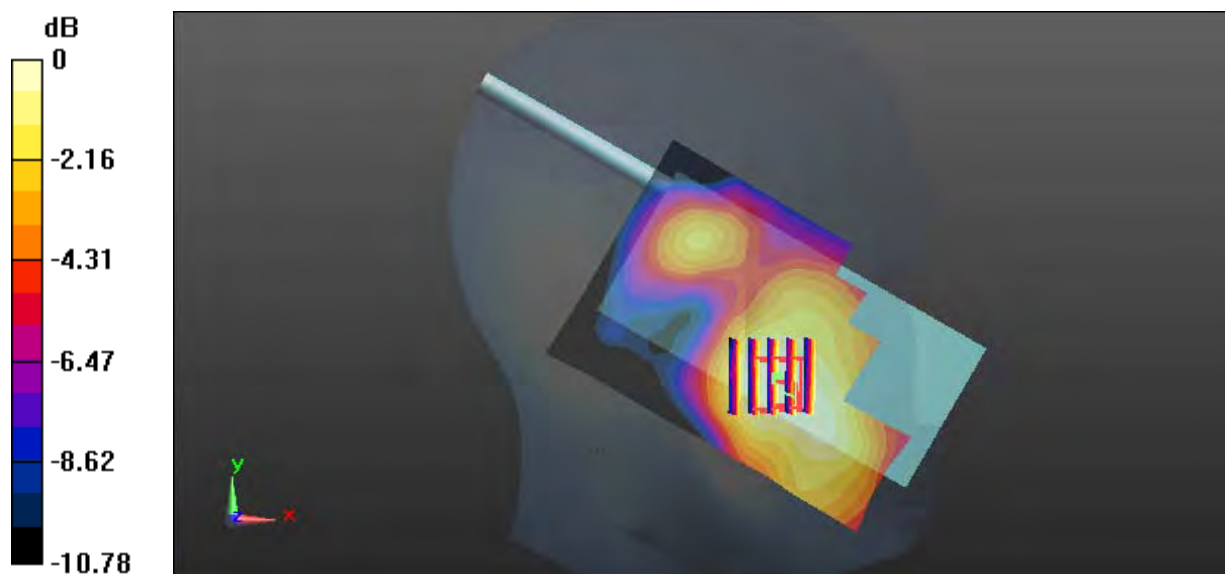Area Scan (111x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0750 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.154 V/m ; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.101 W/kg **SAR(1 g) = 0.072 W/kg ; SAR(10 g) = 0.049 W/kg** Maximum value of SAR (measured) = 0.0763 W/kg  $0 \text{ dB} = 0.0763 \text{ W/kg} = -11.17 \text{ dBW/kg}$

Test Plot 305#: CDMA 1900(BC1)_Head Left Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.36 \text{ S/m}$; $\epsilon_r = 40.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

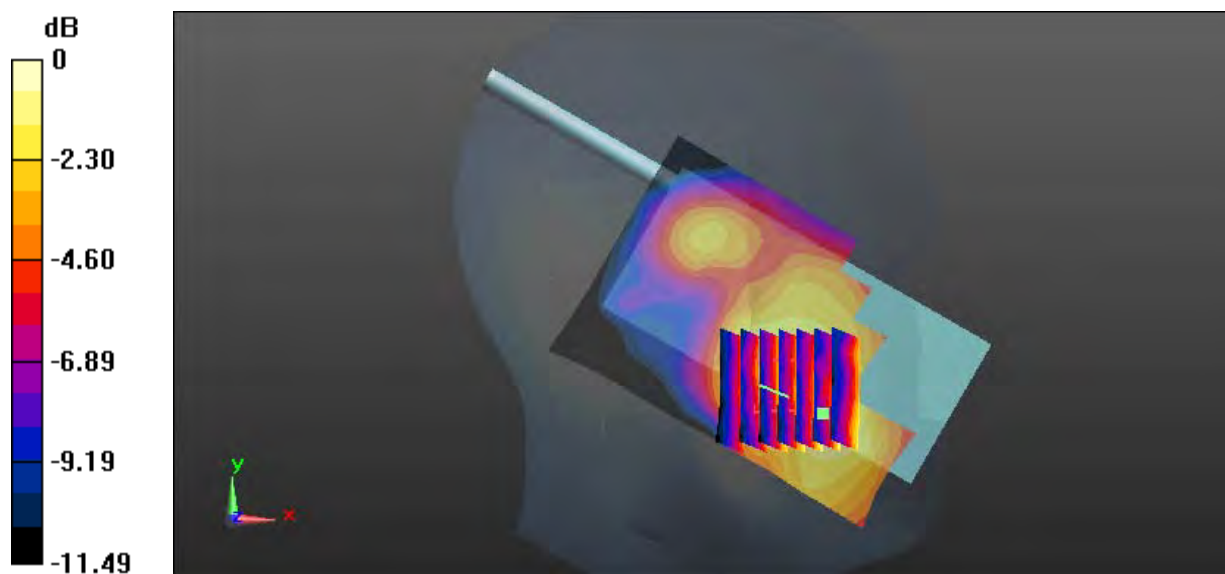Area Scan (111x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0857 W/kg **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.857 V/m ; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.123 W/kg **SAR(1 g) = 0.083 W/kg ; SAR(10 g) = 0.055 W/kg** Maximum value of SAR (measured) = 0.0878 W/kg  $0 \text{ dB} = 0.0878 \text{ W/kg} = -10.57 \text{ dBW/kg}$

Test Plot 306#: CDMA 1900(BC1)_Head Left Cheek_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908.75 \text{ MHz}$; $\sigma = 1.403 \text{ S/m}$; $\epsilon_r = 40.313$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

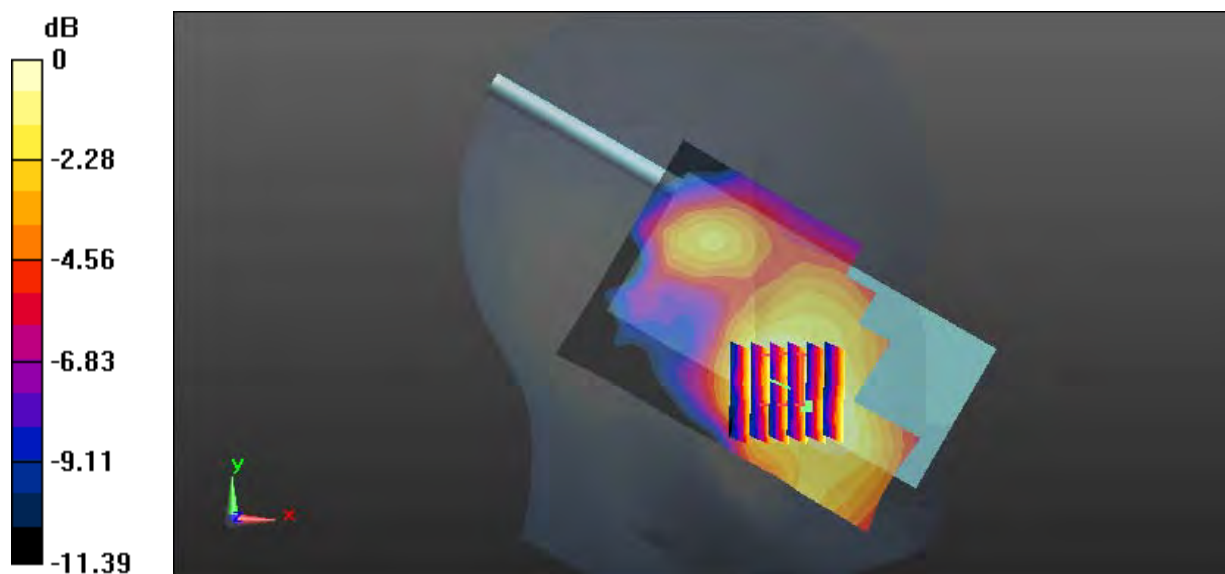Area Scan (111x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0831 W/kg **Zoom Scan (6x6x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.421 V/m ; Power Drift = 0.11 dB Peak SAR (extrapolated) = 0.122 W/kg **SAR(1 g) = 0.081 W/kg ; SAR(10 g) = 0.055 W/kg** Maximum value of SAR (measured) = 0.0866 W/kg  $0 \text{ dB} = 0.0866 \text{ W/kg} = -10.62 \text{ dBW/kg}$

Test Plot 307#: CDMA 1900(BC1)_Head Left Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.36 \text{ S/m}$; $\epsilon_r = 40.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

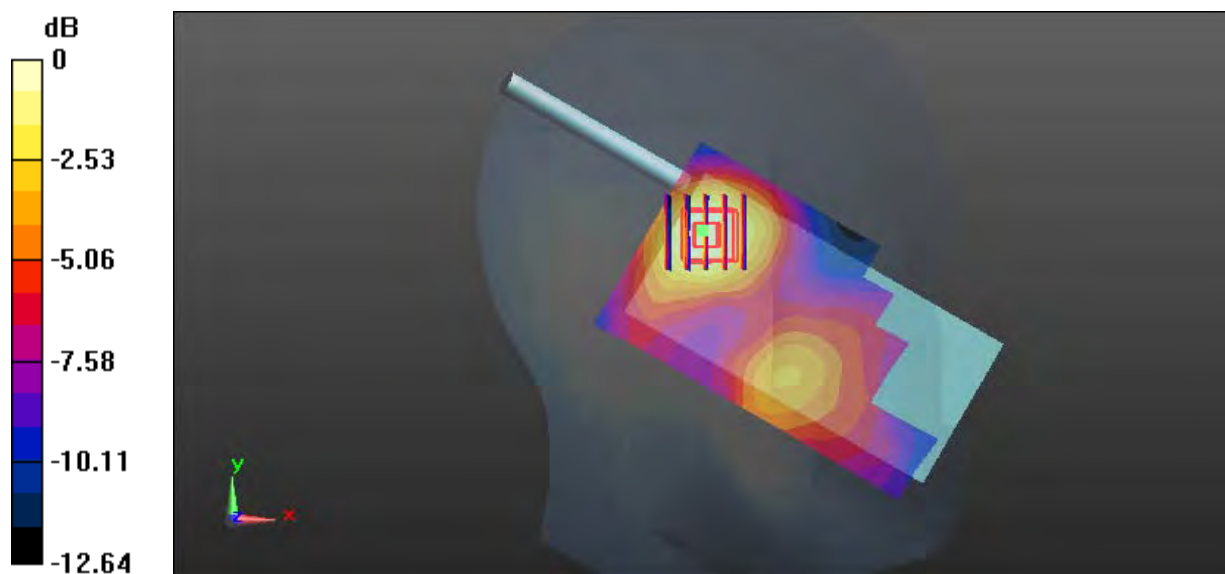Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0694 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.996 V/m ; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.0970 W/kg **SAR(1 g) = 0.061 W/kg ; SAR(10 g) = 0.037 W/kg** Maximum value of SAR (measured) = 0.0655 W/kg  $0 \text{ dB} = 0.0655 \text{ W/kg} = -11.84 \text{ dBW/kg}$

Test Plot 308#: CDMA 1900(BC1)_Head Right Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.36 \text{ S/m}$; $\epsilon_r = 40.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

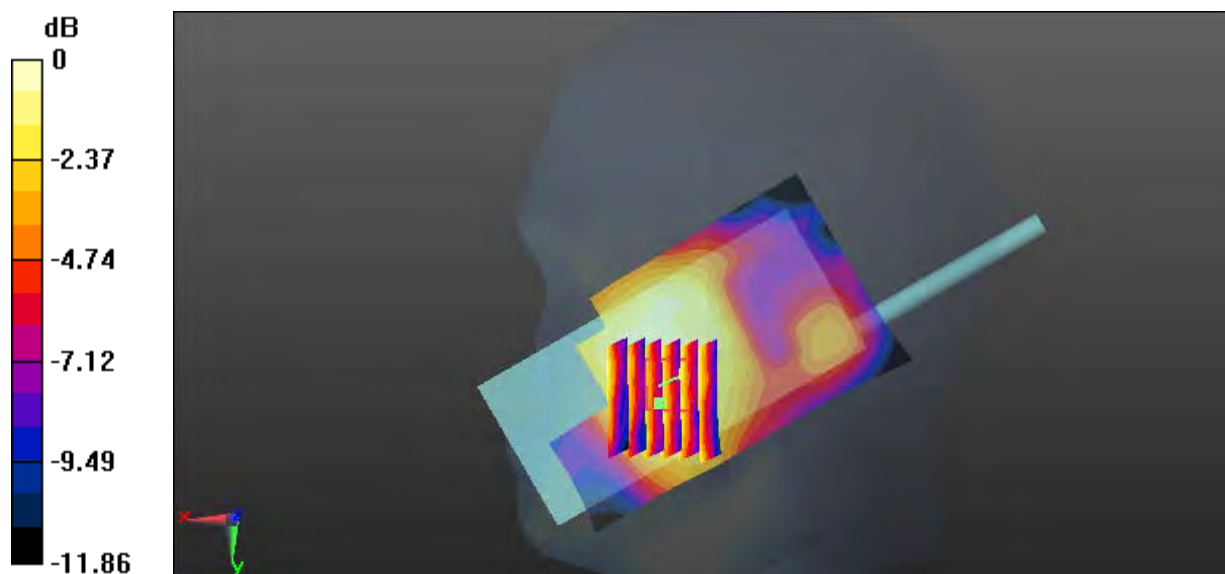Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0614 W/kg **Zoom Scan (6x7x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.895 V/m ; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.0750 W/kg **SAR(1 g) = 0.056 W/kg ; SAR(10 g) = 0.040 W/kg** Maximum value of SAR (measured) = 0.0599 W/kg  $0 \text{ dB} = 0.0599 \text{ W/kg} = -12.23 \text{ dBW/kg}$

Test Plot 309#: CDMA 1900(BC1)_Head Right Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0521 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.264 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0590 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0402 W/kg

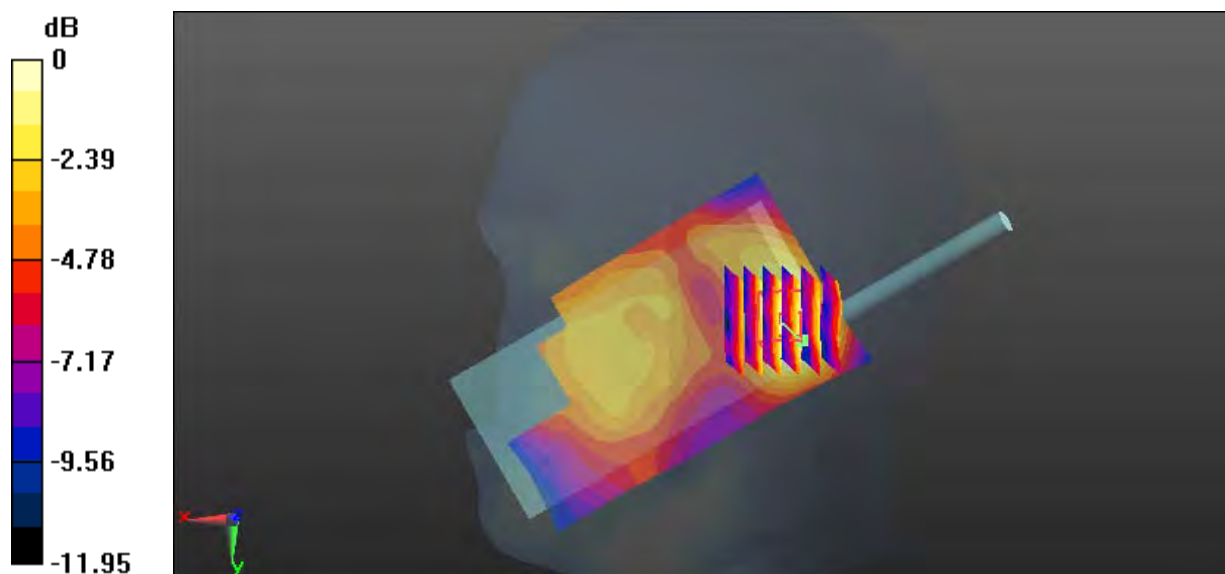

0 dB = 0.0402 W/kg = -13.96 dBW/kg

Test Plot 310#: CDMA 1900(BC1)_Face Up_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0348 W/kg


Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.253 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0315 W/kg

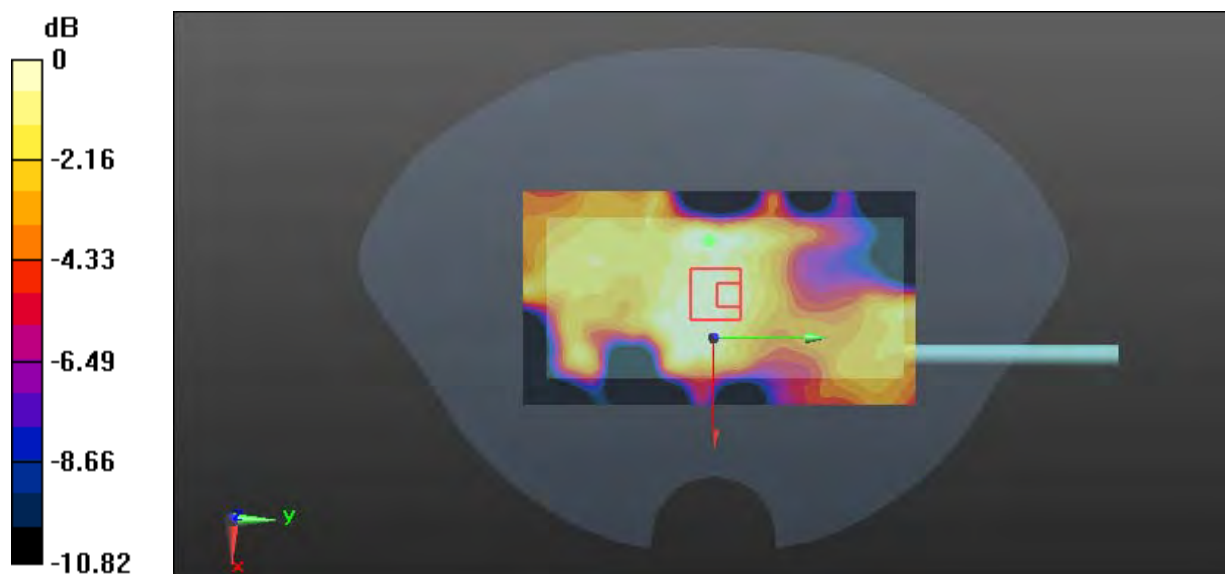

0 dB = 0.0315 W/kg = -15.02 dBW/kg

Test Plot 311#: CDMA 1900(BC1)_Body Worn Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0315 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.138 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0443 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0310 W/kg

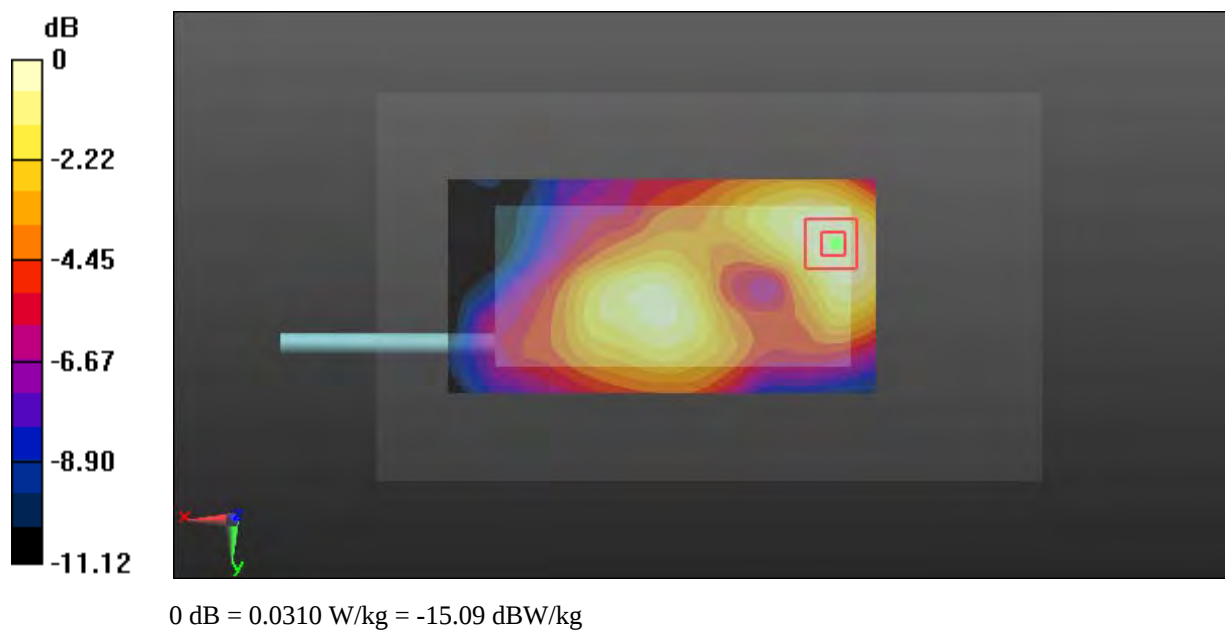

Test Plot 312#: CDMA 1900(BC1)_Body Front _Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0782 W/kg


Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.089 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.0784 W/kg

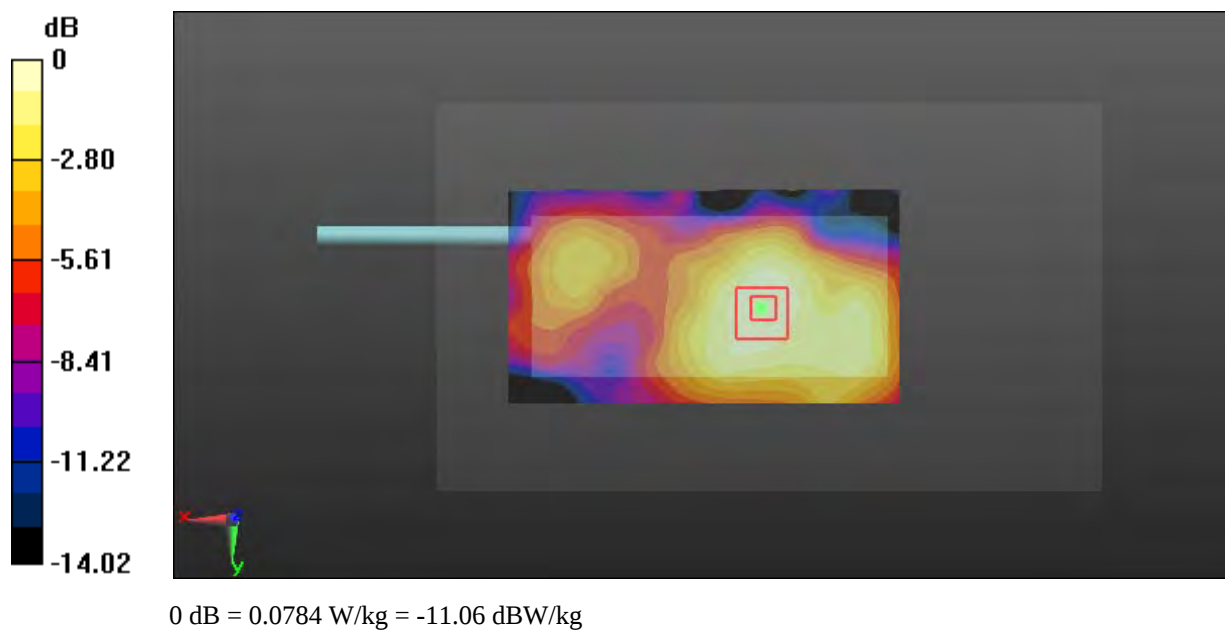

Test Plot 313#: CDMA 1900(BC1)_Body Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0438 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.341 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0421 W/kg

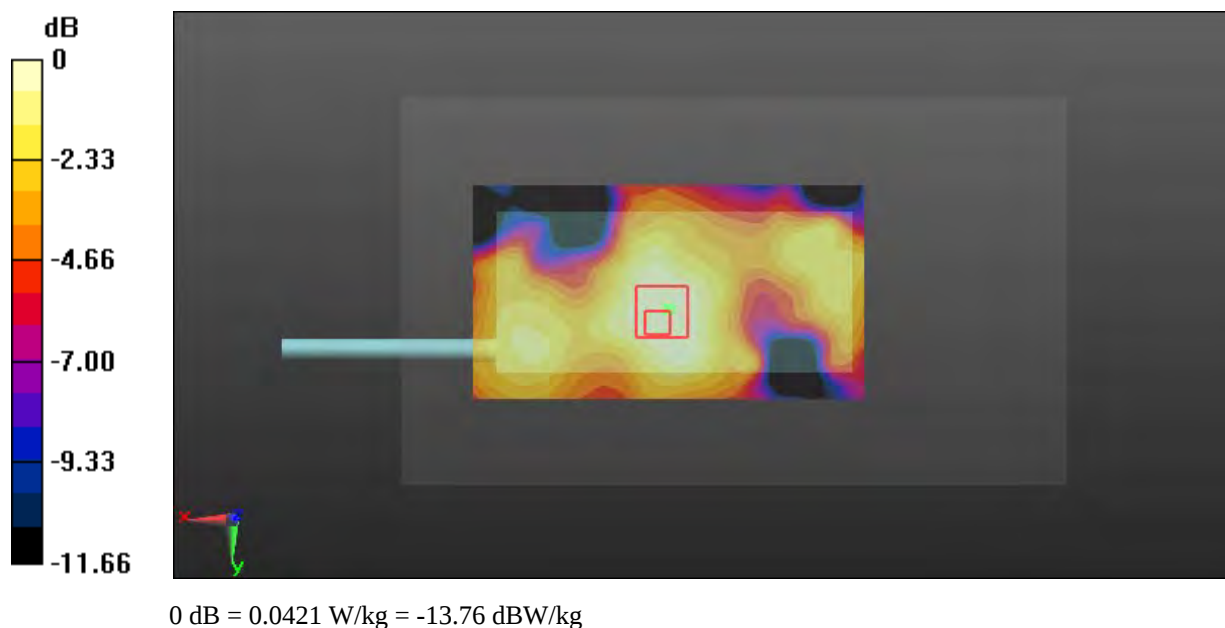

Test Plot 314#: CDMA 1900(BC1)_Body Left_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.462$ S/m; $\epsilon_r = 54.612$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0846 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.581 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0861 W/kg

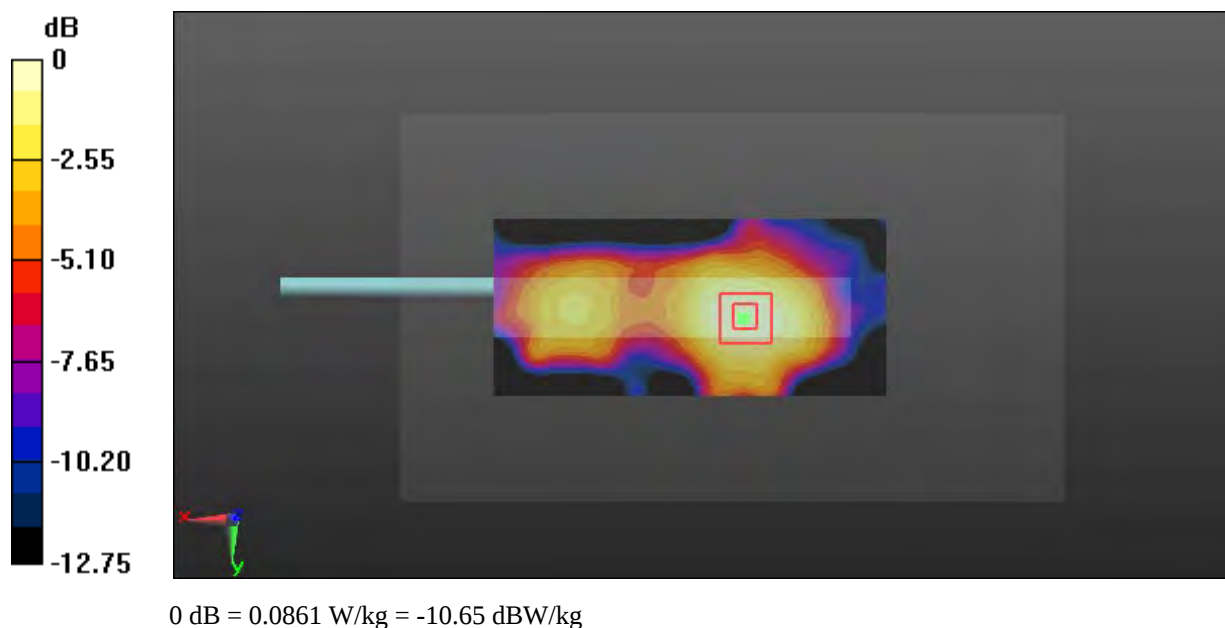

Test Plot 315#: CDMA 1900(BC1)_Body Left_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.479 \text{ S/m}$; $\epsilon_r = 54.231$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

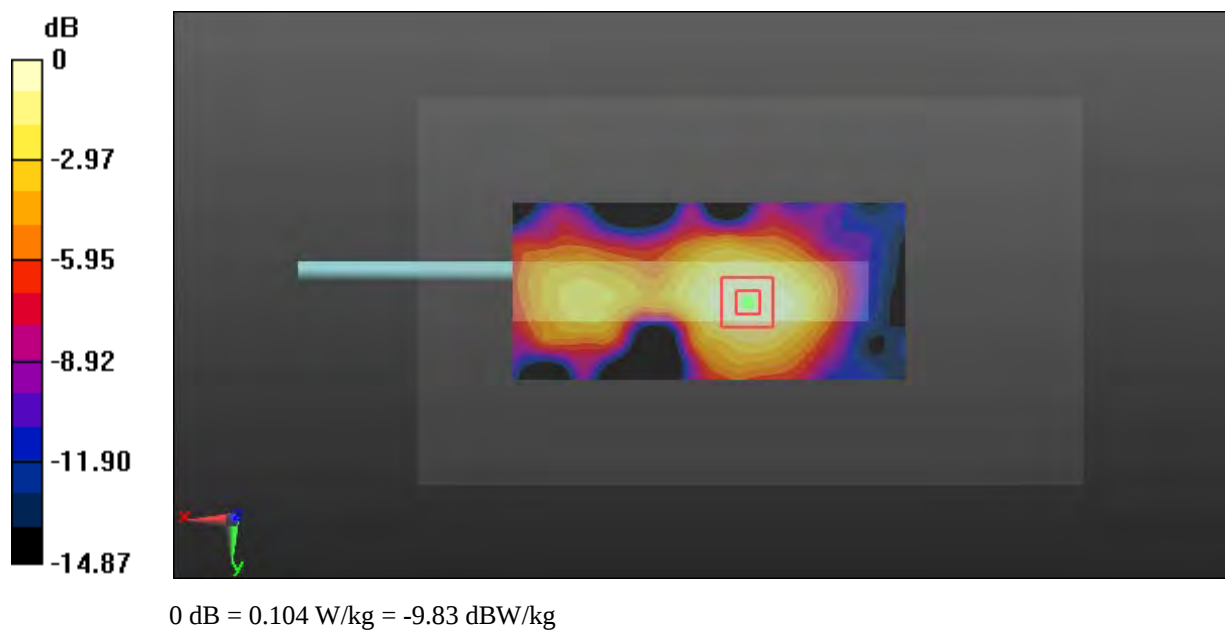Area Scan (111x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.103 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.271 V/m ; Power Drift = -0.14 dB Peak SAR (extrapolated) = 0.149 W/kg **SAR(1 g) = 0.094 W/kg ; SAR(10 g) = 0.058 W/kg** Maximum value of SAR (measured) = 0.104 W/kg 

Test Plot 316#: CDMA 1900(BC1)_Body Left_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908.75 \text{ MHz}$; $\sigma = 1.517 \text{ S/m}$; $\epsilon_r = 54.105$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

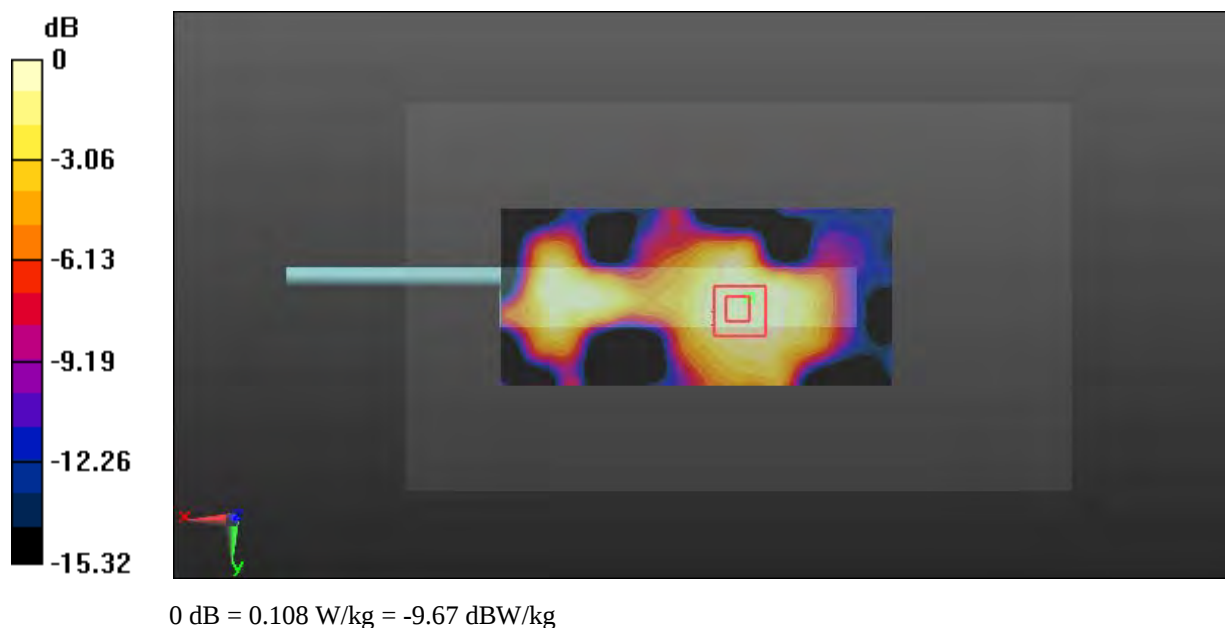Area Scan (111x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.119 W/kg **Zoom Scan (6x6x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.525 V/m ; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.160 W/kg **SAR(1 g) = 0.102 W/kg ; SAR(10 g) = 0.063 W/kg** Maximum value of SAR (measured) = 0.108 W/kg 

Test Plot 317#: CDMA 1900(BC1)_Body Right_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0510 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.349 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0600 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0319 W/kg

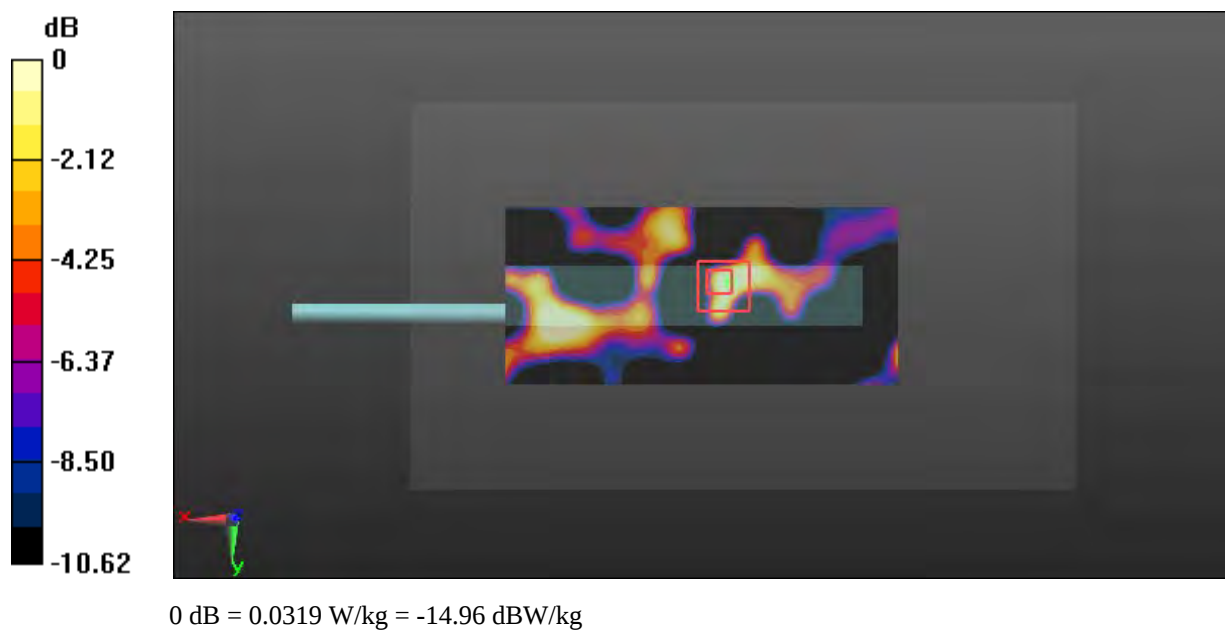

Test Plot 318#: CDMA 1900(BC1)_Body Bottom_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 54.231$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0984 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.109 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.0898 W/kg

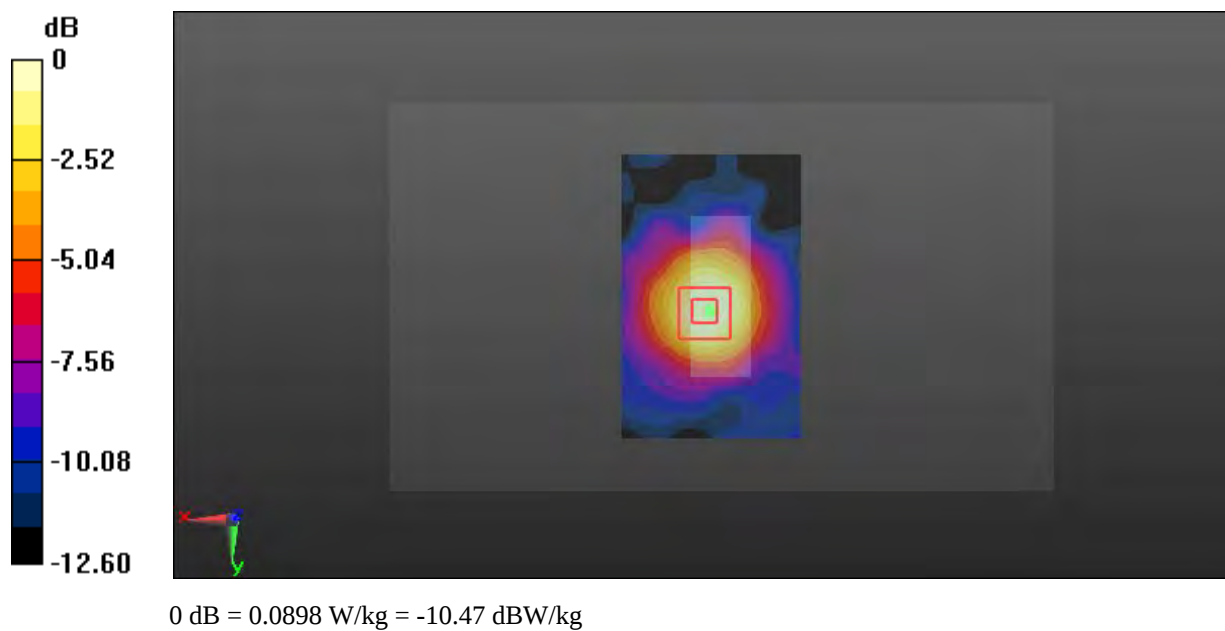

Test Plot 319#: CDMA 800(BC10)_Head Left Cheek_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1XRTT; Frequency: 817.25 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 817.25$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.478$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.299 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.88 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

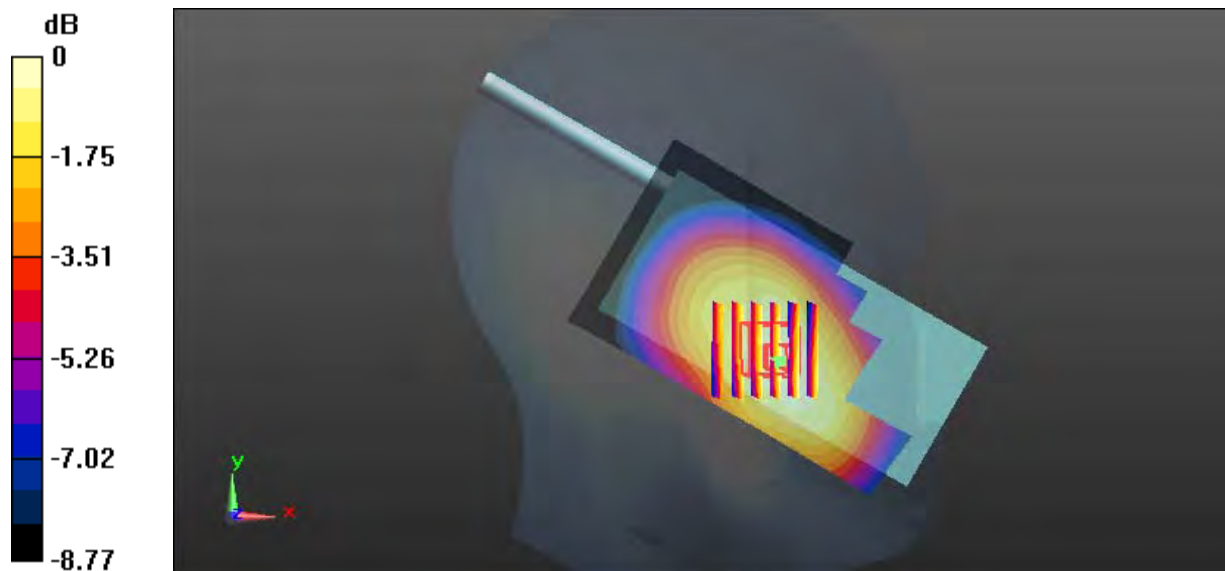

0 dB = 0.301 W/kg = -5.21 dBW/kg

Test Plot 320#: CDMA 800(BC10)_Head Left Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 820.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.386$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.316 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.28 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 0.320 W/kg

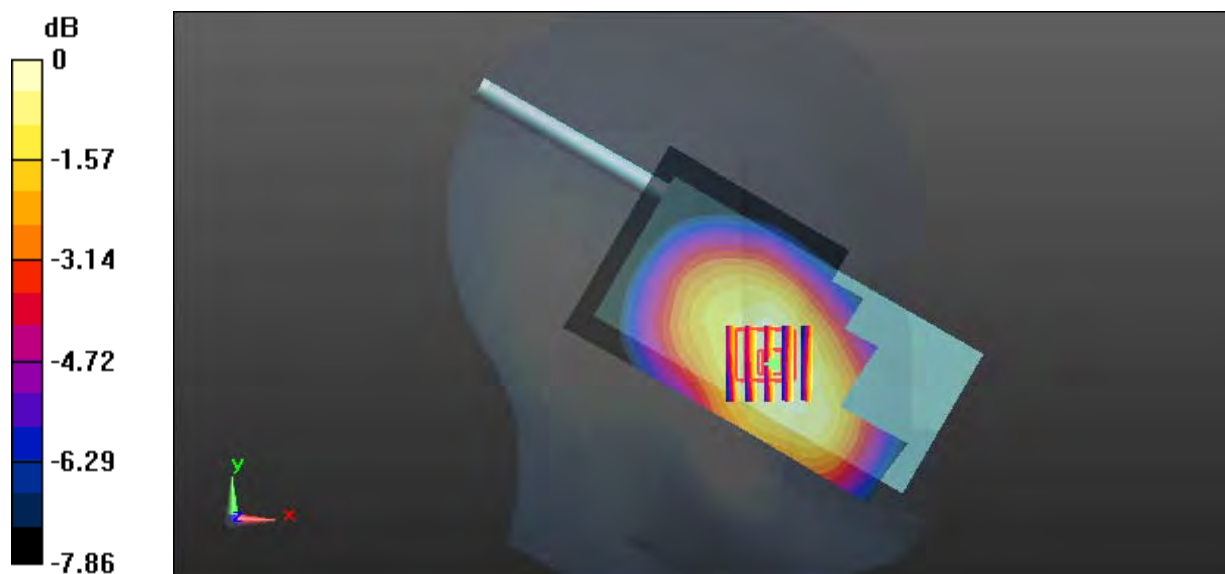

0 dB = 0.320 W/kg = -4.95 dBW/kg

Test Plot 321#: CDMA 800(BC10)_Head Left Cheek_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 822.75 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 822.75$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 42.316$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.344 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.43 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.255 W/kg

Maximum value of SAR (measured) = 0.343 W/kg

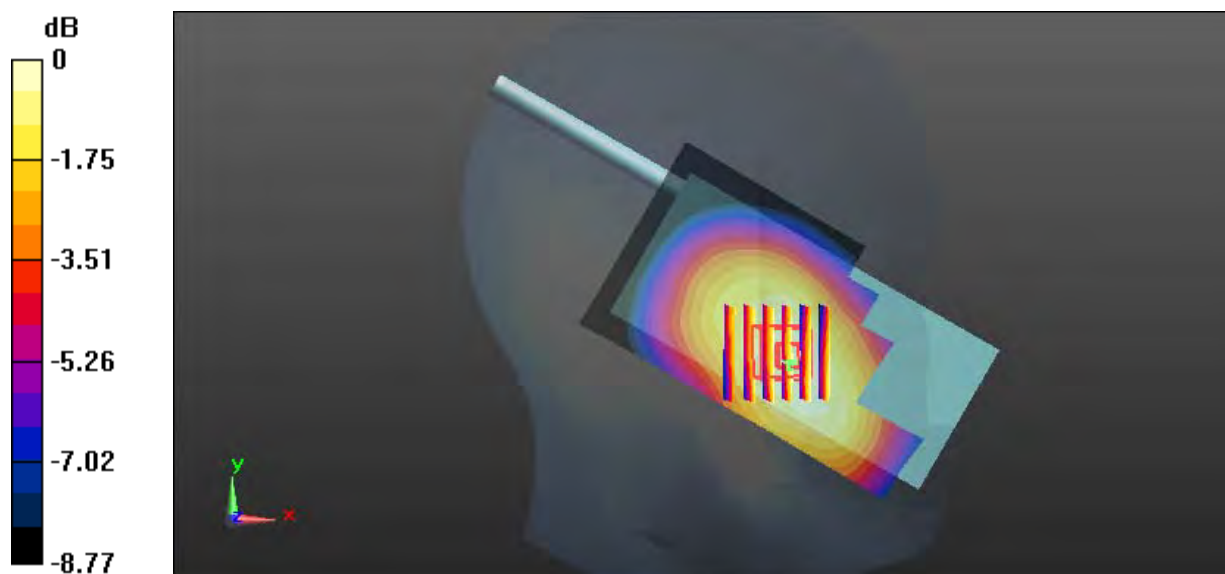

0 dB = 0.343 W/kg = -4.65 dBW/kg

Test Plot 322#: CDMA 800(BC10)_Head Left Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 820.5 \text{ MHz}$; $\sigma = 0.874 \text{ S/m}$; $\epsilon_r = 42.386$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

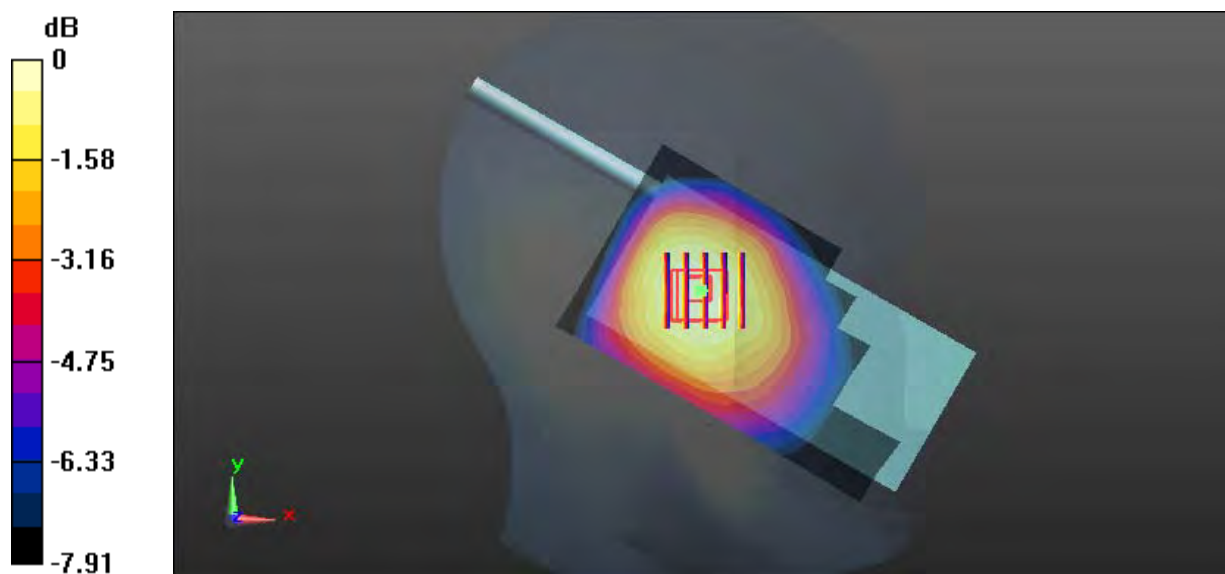Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.199 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 13.38 V/m ; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.245 W/kg **SAR(1 g) = 0.194 W/kg ; SAR(10 g) = 0.149 W/kg** Maximum value of SAR (measured) = 0.204 W/kg  $0 \text{ dB} = 0.204 \text{ W/kg} = -6.90 \text{ dBW/kg}$

Test Plot 323#: CDMA 800(BC10)_Head Right Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 820.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.386$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.267 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.685 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.265 W/kg

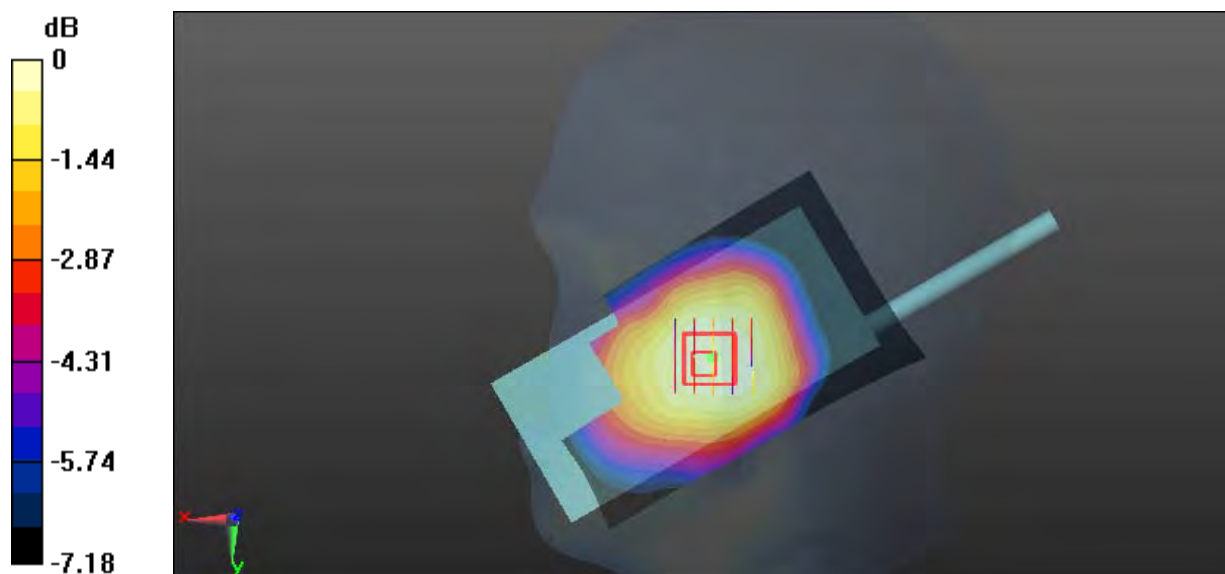

0 dB = 0.265 W/kg = -5.77 dBW/kg

Test Plot 324#: CDMA 800(BC10)_Head Right Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 820.5 \text{ MHz}$; $\sigma = 0.874 \text{ S/m}$; $\epsilon_r = 42.386$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

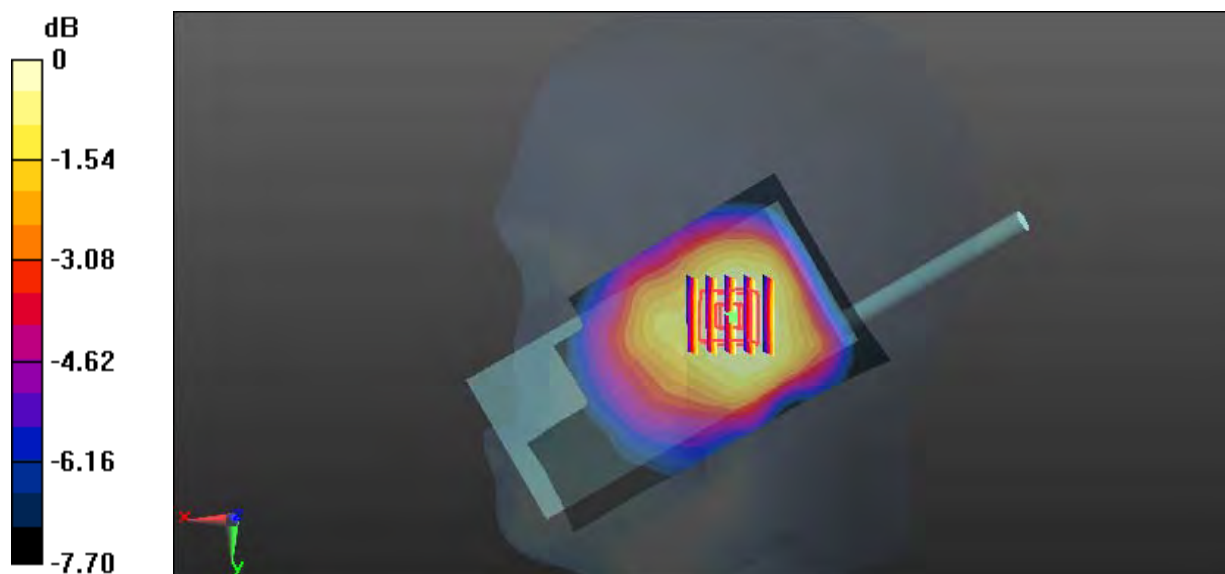Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.160 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.76 V/m ; Power Drift = -0.09 dB Peak SAR (extrapolated) = 0.186 W/kg **SAR(1 g) = 0.153 W/kg ; SAR(10 g) = 0.119 W/kg** Maximum value of SAR (measured) = 0.160 W/kg  $0 \text{ dB} = 0.160 \text{ W/kg} = -7.96 \text{ dBW/kg}$

Test Plot 325#: CDMA 800(BC10)_Face Up_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 820.5 \text{ MHz}$; $\sigma = 0.874 \text{ S/m}$; $\epsilon_r = 42.386$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

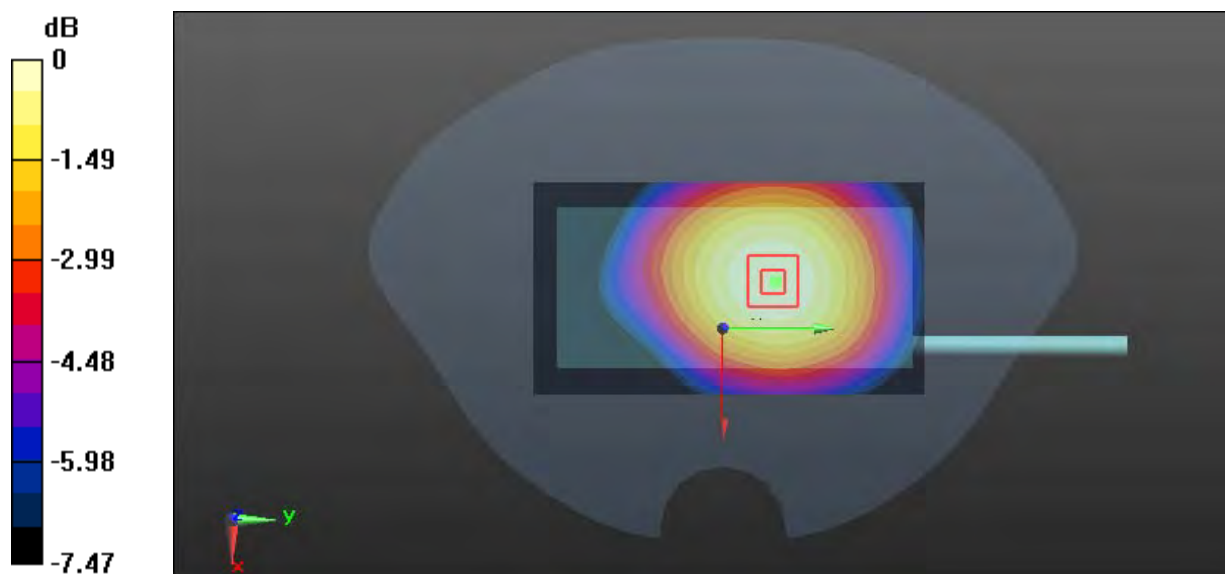Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.150 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 12.23 V/m ; Power Drift = -0.07 dB Peak SAR (extrapolated) = 0.176 W/kg **SAR(1 g) = 0.142 W/kg ; SAR(10 g) = 0.109 W/kg** Maximum value of SAR (measured) = 0.149 W/kg 0 dB = 0.149 W/kg = -8.27 dBW/kg

Test Plot 326#: CDMA 800(BC10)_Body Worn Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 820.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.121 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.02 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.118 W/kg

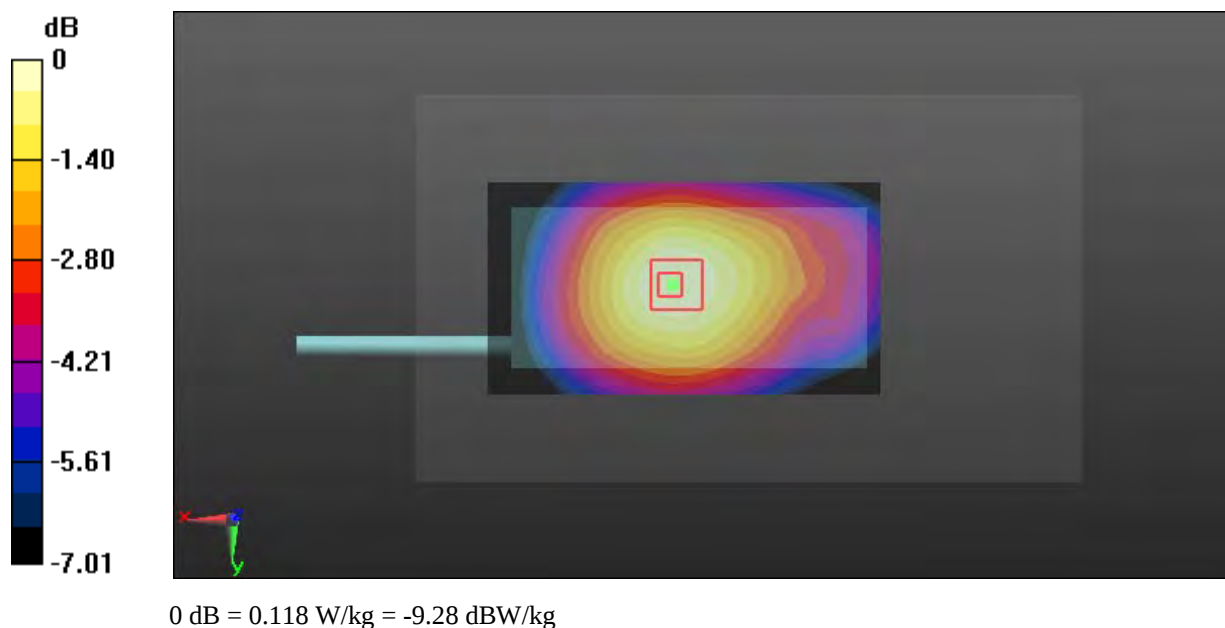

Test Plot 327#: CDMA 800(BC10)_Body Front _Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 817.25 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 817.25$ MHz; $\sigma = 0.937$ S/m; $\epsilon_r = 57.437$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.322 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.26 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.327 W/kg

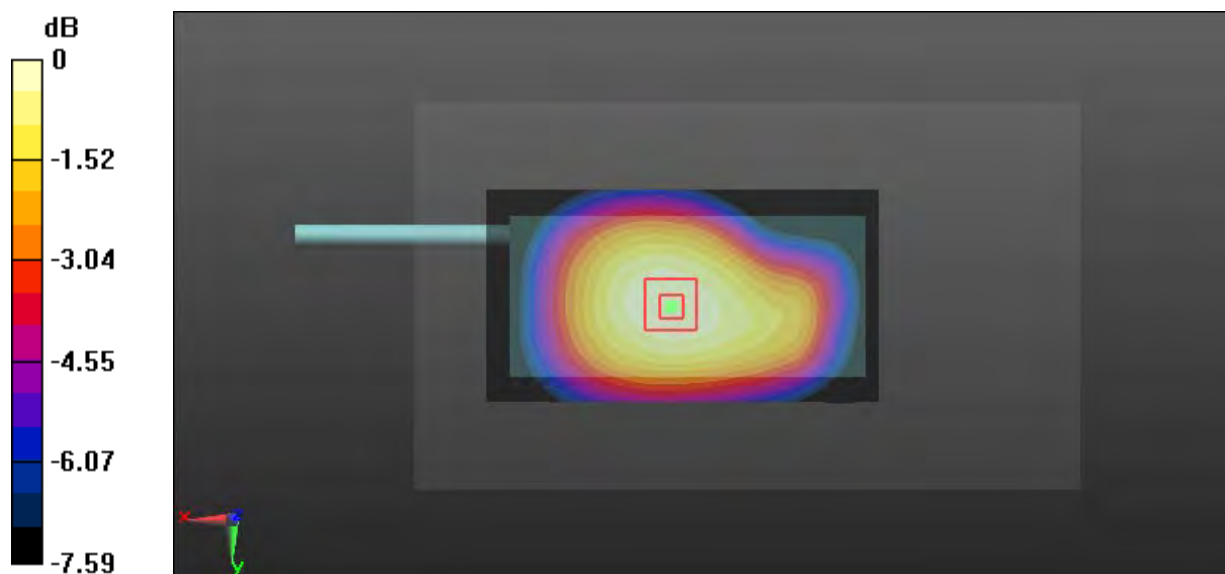

0 dB = 0.327 W/kg = -4.85 dBW/kg

Test Plot 328#: CDMA 800(BC10)_Body Front _Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 820.5 \text{ MHz}$; $\sigma = 0.955 \text{ S/m}$; $\epsilon_r = 57.323$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

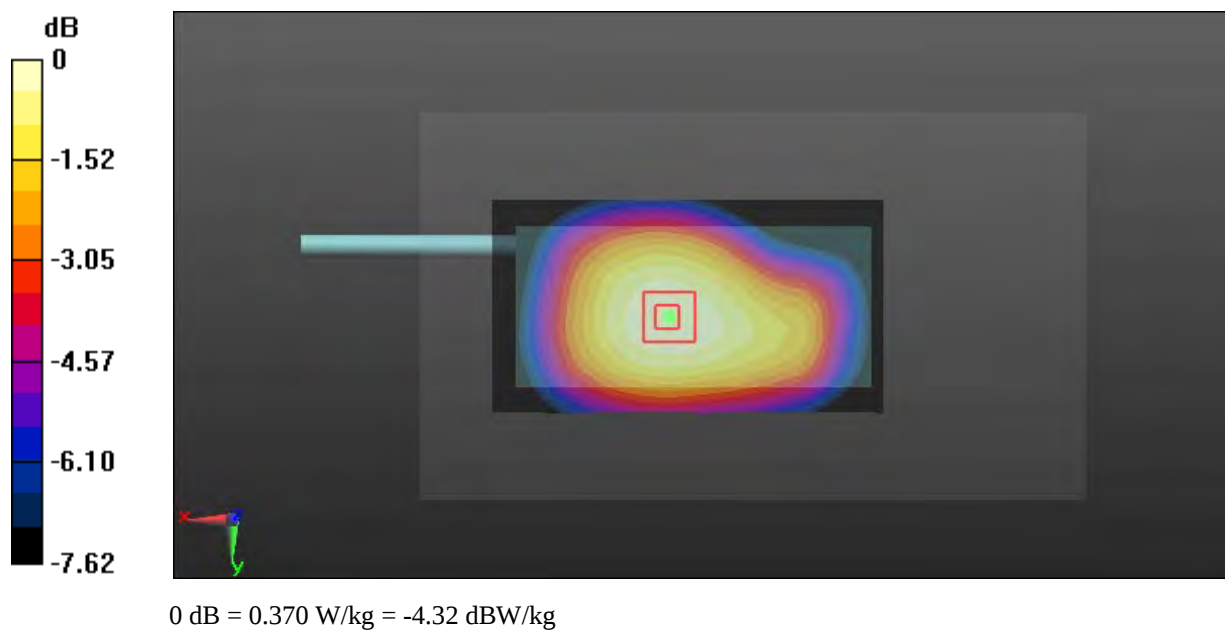Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.369 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 17.15 V/m ; Power Drift = -0.15 dB Peak SAR (extrapolated) = 0.439 W/kg **SAR(1 g) = 0.353 W/kg ; SAR(10 g) = 0.272 W/kg** Maximum value of SAR (measured) = 0.370 W/kg 

Test Plot 329#: CDMA 800(BC10)_Body Front _High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 822.75 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 822.75$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 57.26$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.325 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.90 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

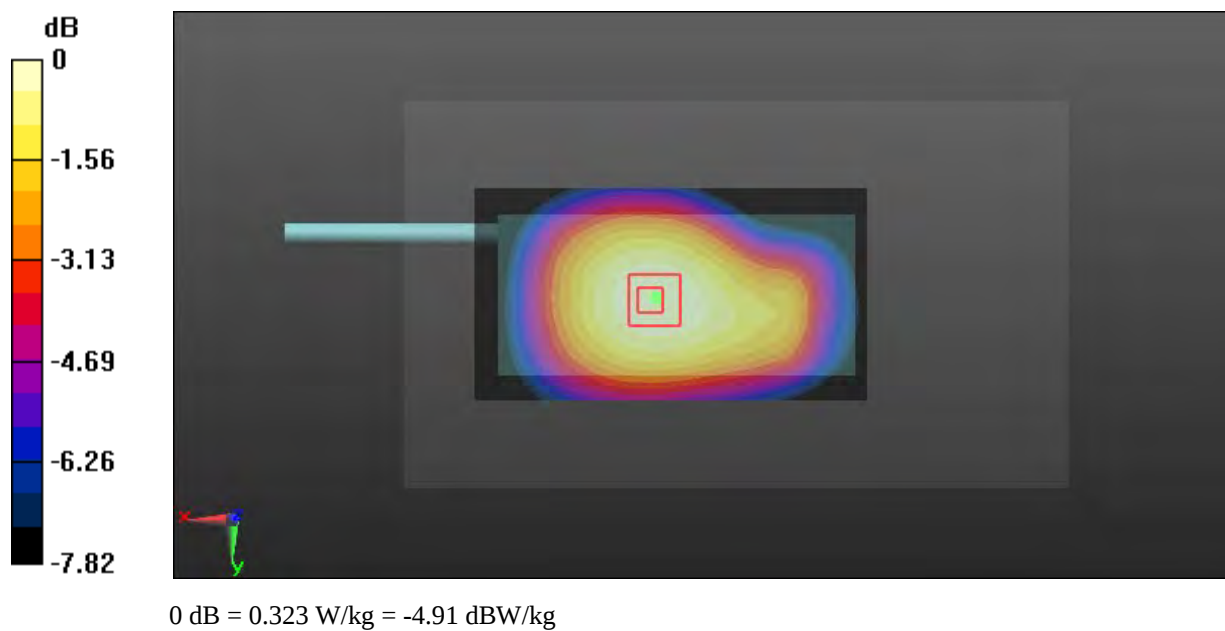

Test Plot 330#: CDMA 800(BC10)_Body Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 820.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.135 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.75 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.136 W/kg

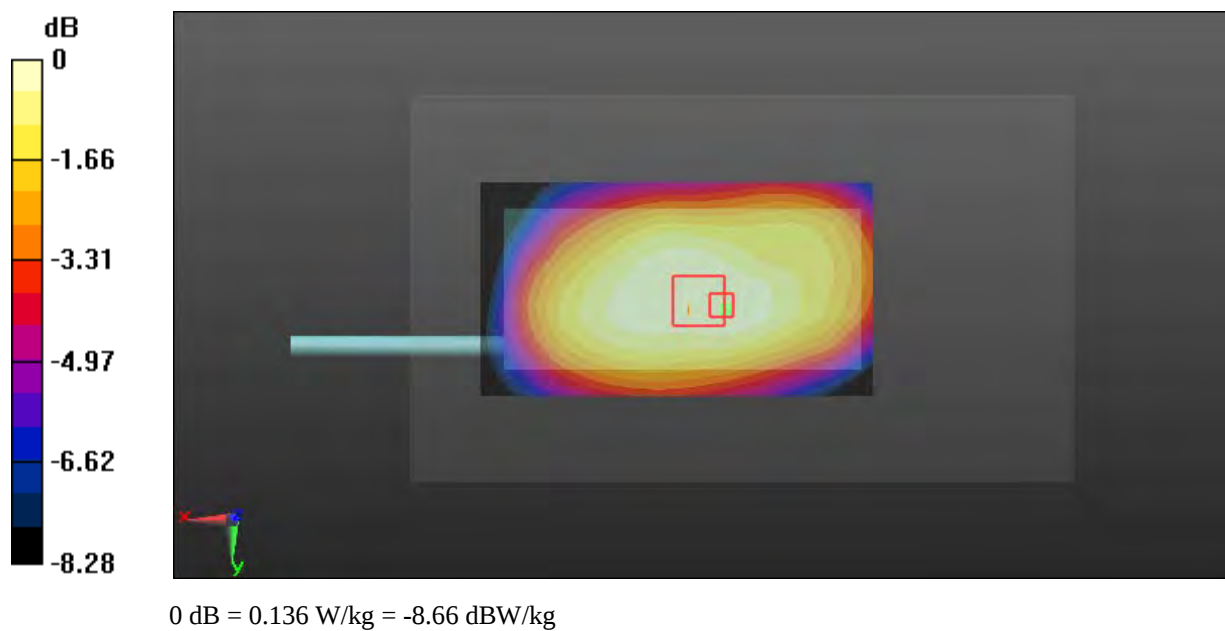

Test Plot 331#: CDMA 800(BC10)_Body Left_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 820.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.190 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.12 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.197 W/kg

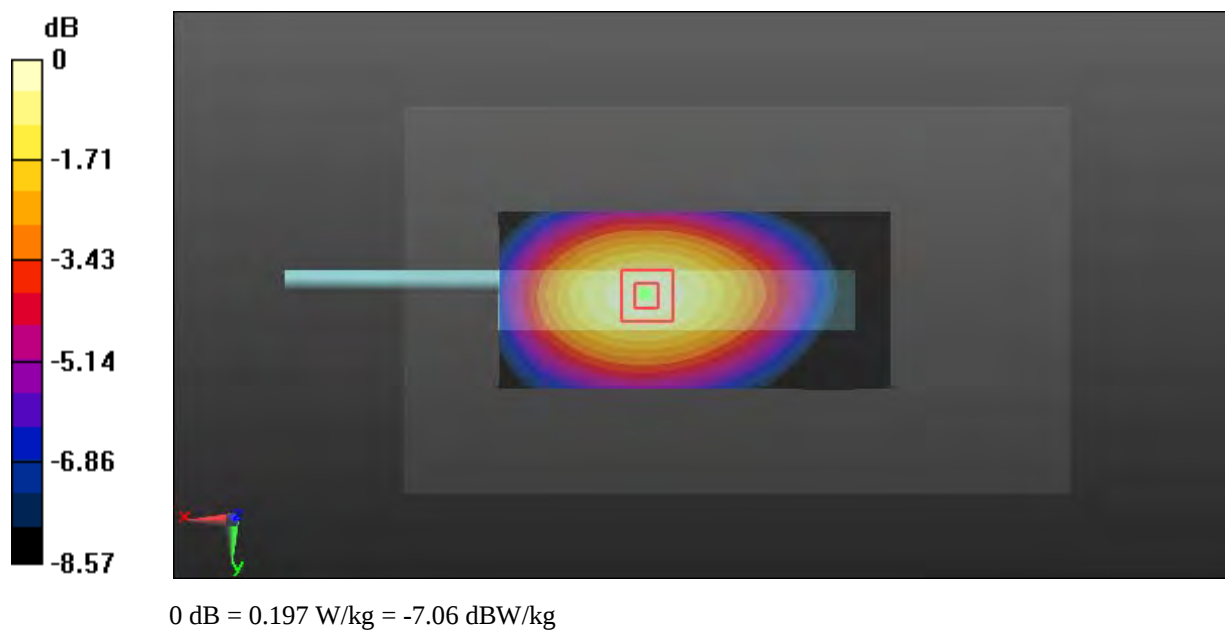

Test Plot 332#: CDMA 800(BC10)_Body Right_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 820.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.145 W/kg


Zoom Scan (8x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.17 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

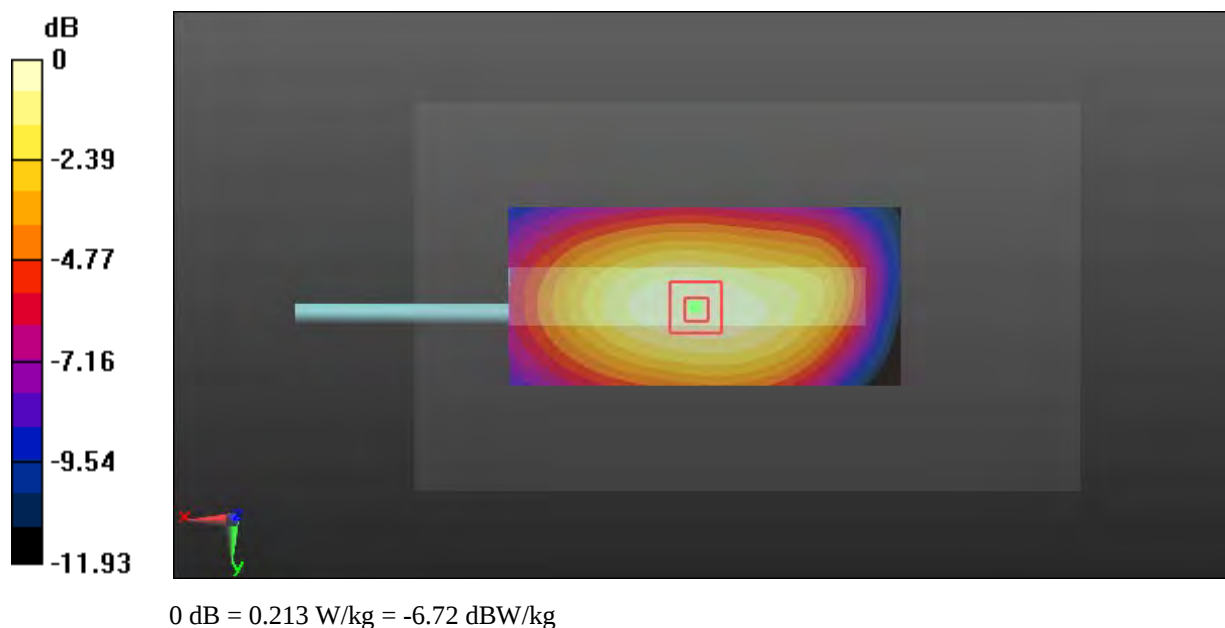

Test Plot 333#: CDMA 800(BC10)_Body Bottom_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 820.5 \text{ MHz}$; $\sigma = 0.955 \text{ S/m}$; $\epsilon_r = 57.323$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

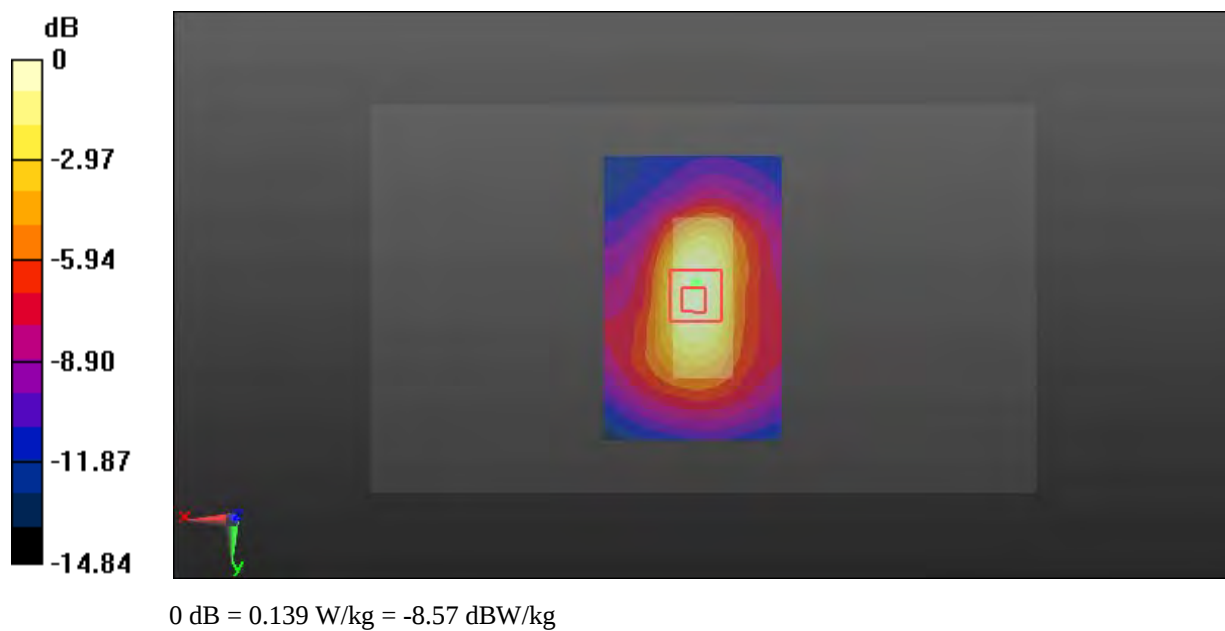Area Scan (51x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.139 W/kg **Zoom Scan (5x6x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.73 V/m ; Power Drift = -0.19 dB Peak SAR (extrapolated) = 0.226 W/kg **SAR(1 g) = 0.125 W/kg ; SAR(10 g) = 0.070 W/kg** Maximum value of SAR (measured) = 0.139 W/kg 

Test Plot 334#: WLAN 2.4G Mode b_Head Left Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.775 \text{ S/m}$; $\epsilon_r = 38.955$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

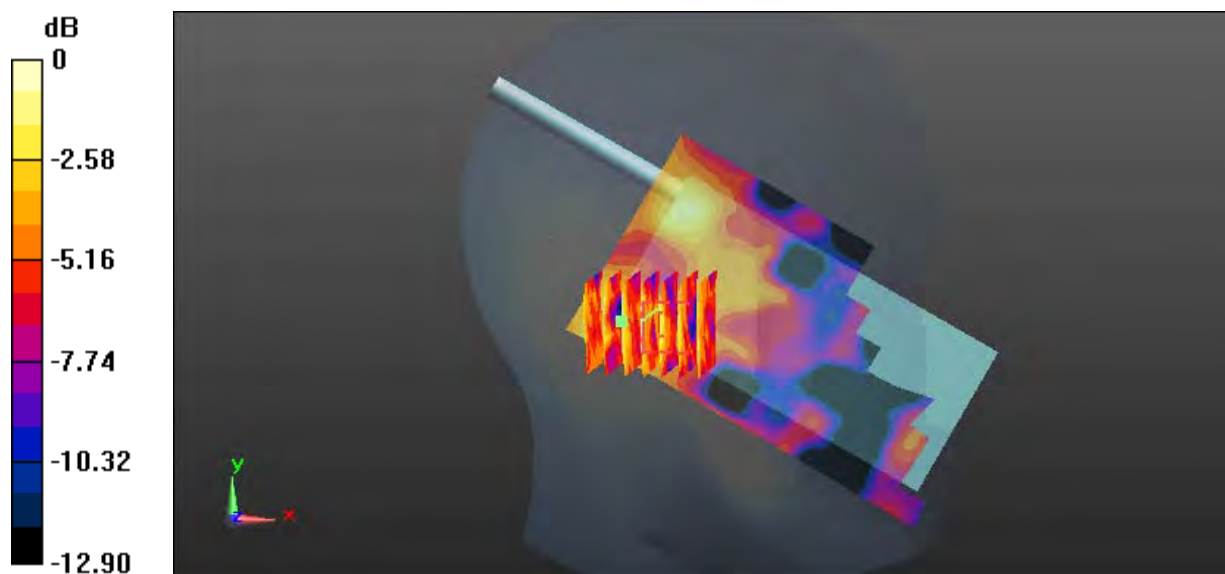Area Scan (141x81x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0409 W/kg **Zoom Scan (7x6x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.020 V/m ; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.127 W/kg **SAR(1 g) = 0.037 W/kg ; SAR(10 g) = 0.016 W/kg** Maximum value of SAR (measured) = 0.0454 W/kg  $0 \text{ dB} = 0.0454 \text{ W/kg} = -13.43 \text{ dBW/kg}$

Test Plot 335#: WLAN 2.4G Mode b_Head Left Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.775 \text{ S/m}$; $\epsilon_r = 38.955$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

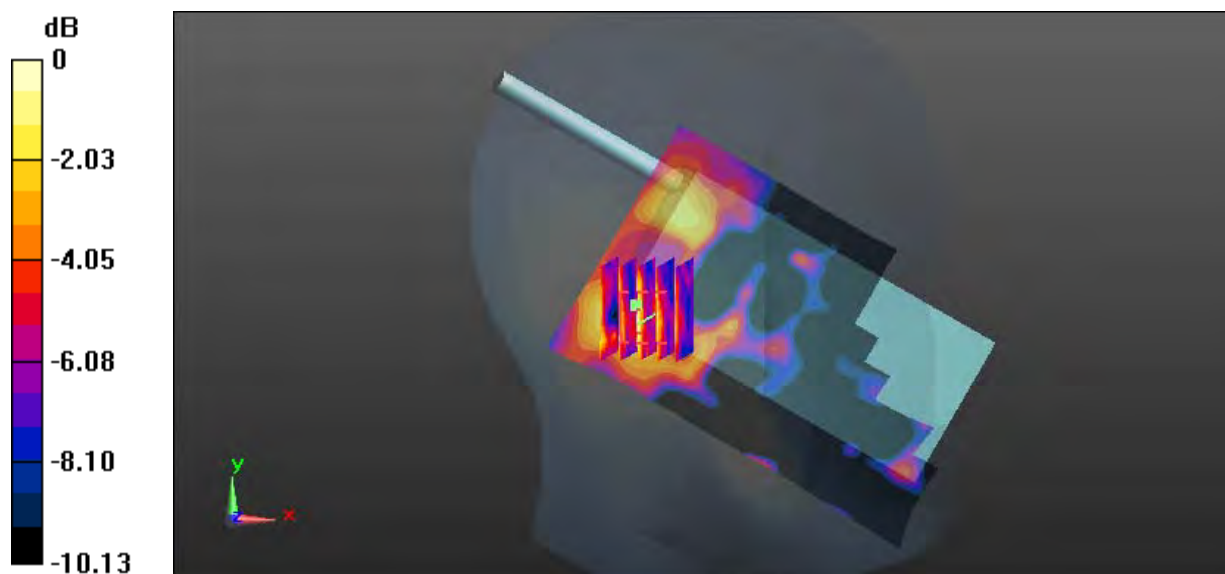Area Scan (141x91x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0485 W/kg **Zoom Scan (5x6x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.616 V/m ; Power Drift = -0.00 dB Peak SAR (extrapolated) = 0.0890 W/kg **SAR(1 g) = 0.045 W/kg ; SAR(10 g) = 0.027 W/kg** Maximum value of SAR (measured) = 0.0508 W/kg  $0 \text{ dB} = 0.0508 \text{ W/kg} = -12.94 \text{ dBW/kg}$

Test Plot 336#: WLAN 2.4G Mode b_Head Right Cheek_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.738$ S/m; $\epsilon_r = 40.245$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0783 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.798 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0764 W/kg

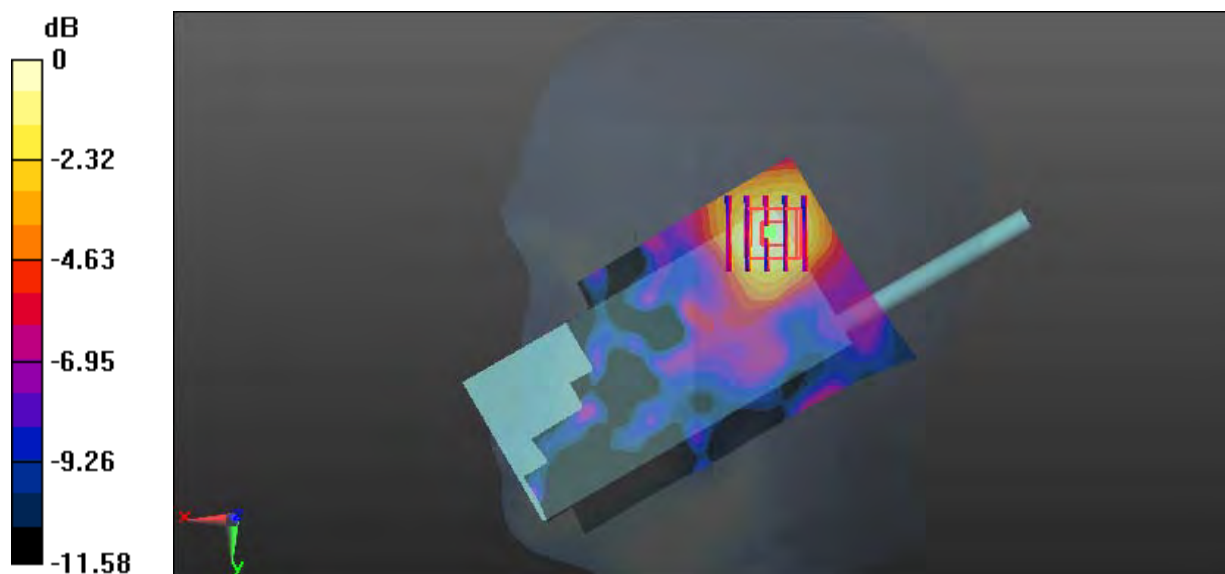

0 dB = 0.0764 W/kg = -11.17 dBW/kg

Test Plot 337#: WLAN 2.4G Mode b_Head Right Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.775 \text{ S/m}$; $\epsilon_r = 38.955$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

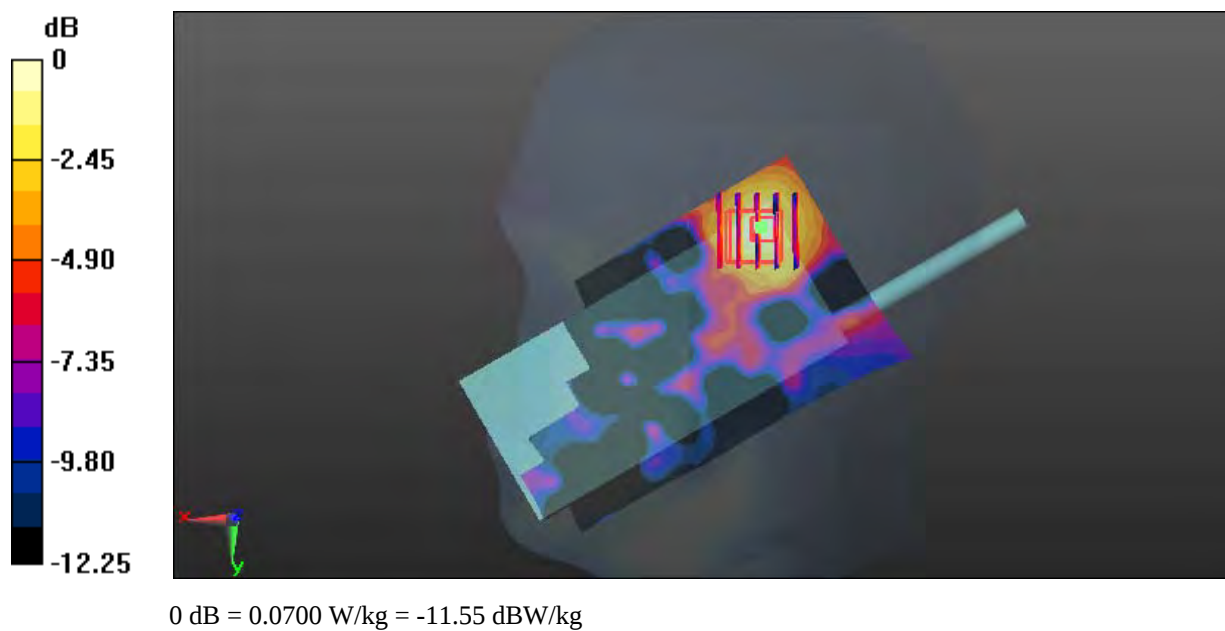Area Scan (141x81x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0653 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.214 V/m ; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.118 W/kg **SAR(1 g) = 0.061 W/kg ; SAR(10 g) = 0.033 W/kg** Maximum value of SAR (measured) = 0.0700 W/kg 

Test Plot 338#: WLAN 2.4G Mode b_Head Right Cheek_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2472 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2472$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 38.36$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0718 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.493 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0699 W/kg

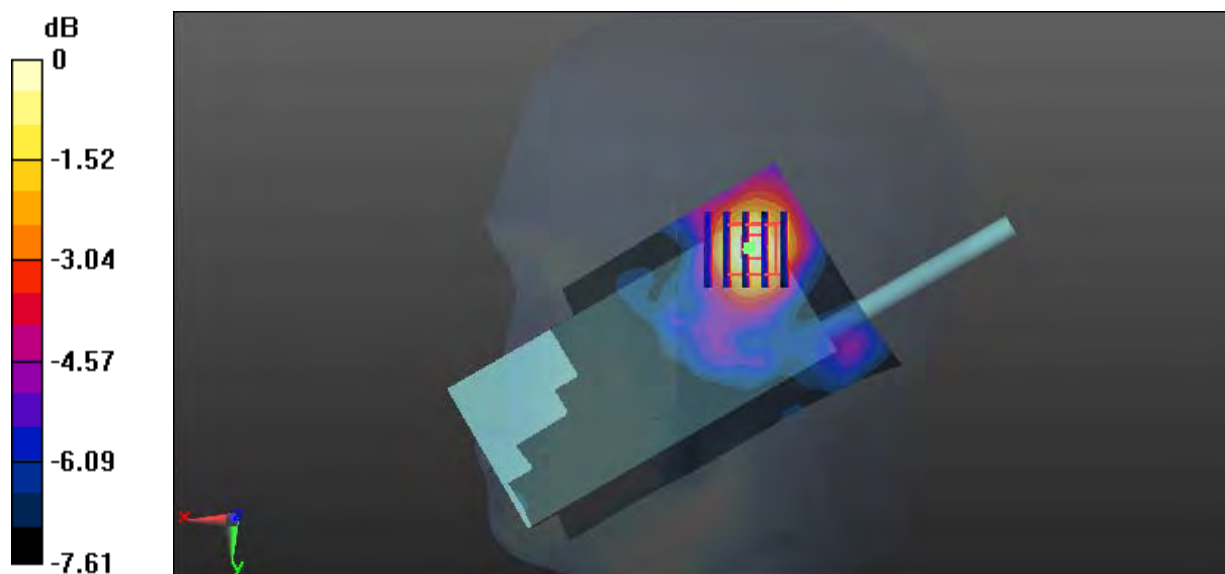

0 dB = 0.0699 W/kg = -11.56 dBW/kg

Test Plot 339#: WLAN 2.4G Mode b_Head Right Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.775 \text{ S/m}$; $\epsilon_r = 38.955$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

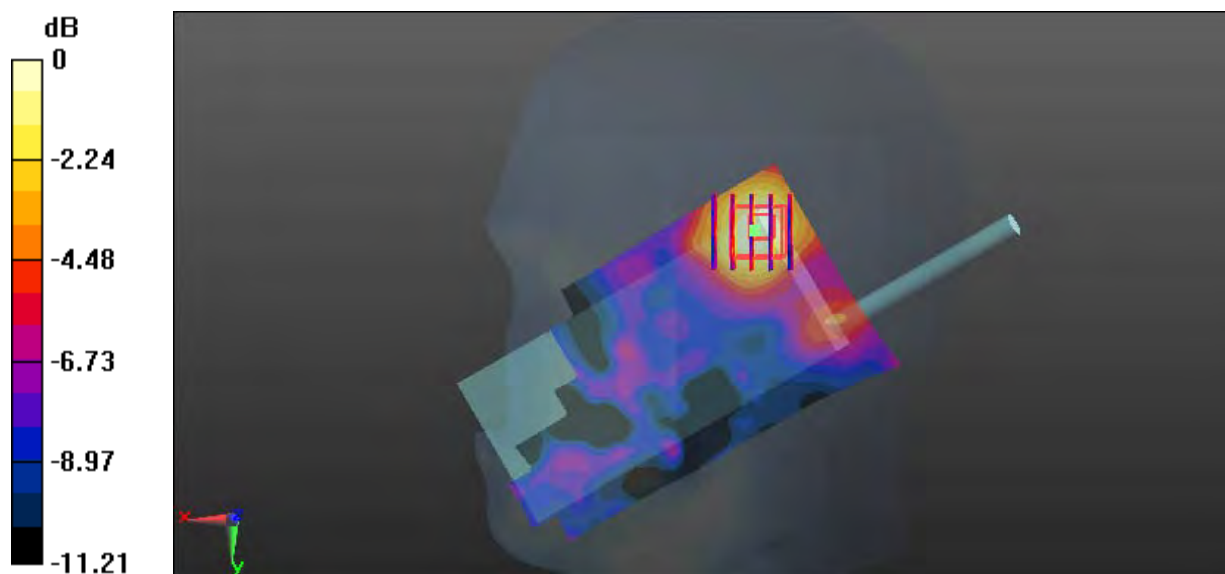Area Scan (141x81x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0638 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.388 V/m ; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.122 W/kg **SAR(1 g) = 0.060 W/kg ; SAR(10 g) = 0.035 W/kg** Maximum value of SAR (measured) = 0.0632 W/kg 0 dB = 0.0632 W/kg = -11.99 dBW/kg

Test Plot 340#: WLAN 2.4G Mode b_Face Up_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2442$ MHz; $\sigma = 1.775$ S/m; $\epsilon_r = 38.955$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0389 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.820 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.00844 W/kg; SAR(10 g) = 0.00194 W/kg

Maximum value of SAR (measured) = 0.0225 W/kg



0 dB = 0.0225 W/kg = -16.48 dBW/kg

Test Plot 341#: WLAN 2.4G Mode b_Body Back_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.905$ S/m; $\epsilon_r = 54.382$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0554 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.944 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0590 W/kg

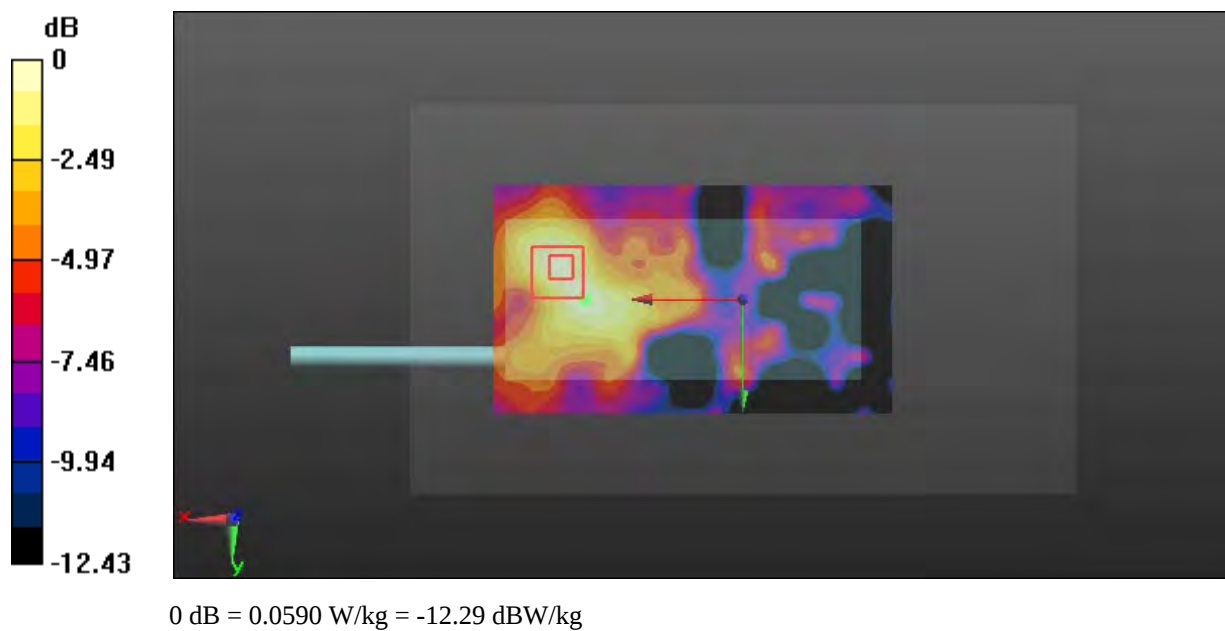

Test Plot 342#: WLAN 2.4G Mode b_Body Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2442$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 52.705$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0761 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.856 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0574 W/kg

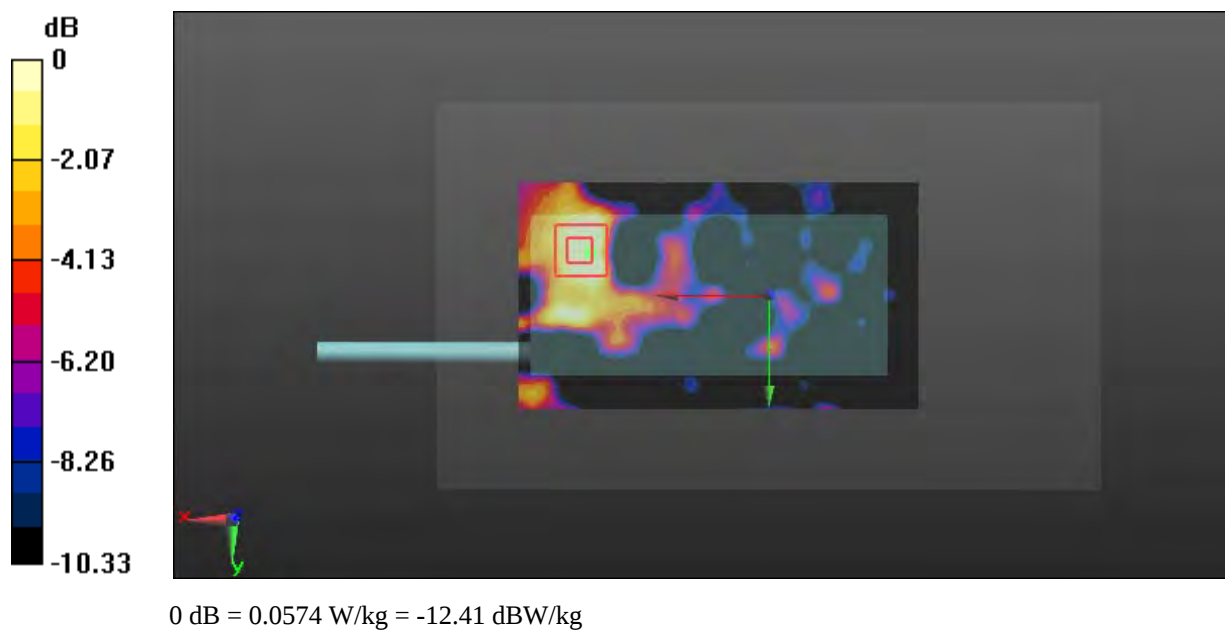

Test Plot 343#: WLAN 2.4G Mode b_Body Back_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2472 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2472$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 51.91$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0837 W/kg


Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.408 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0553 W/kg

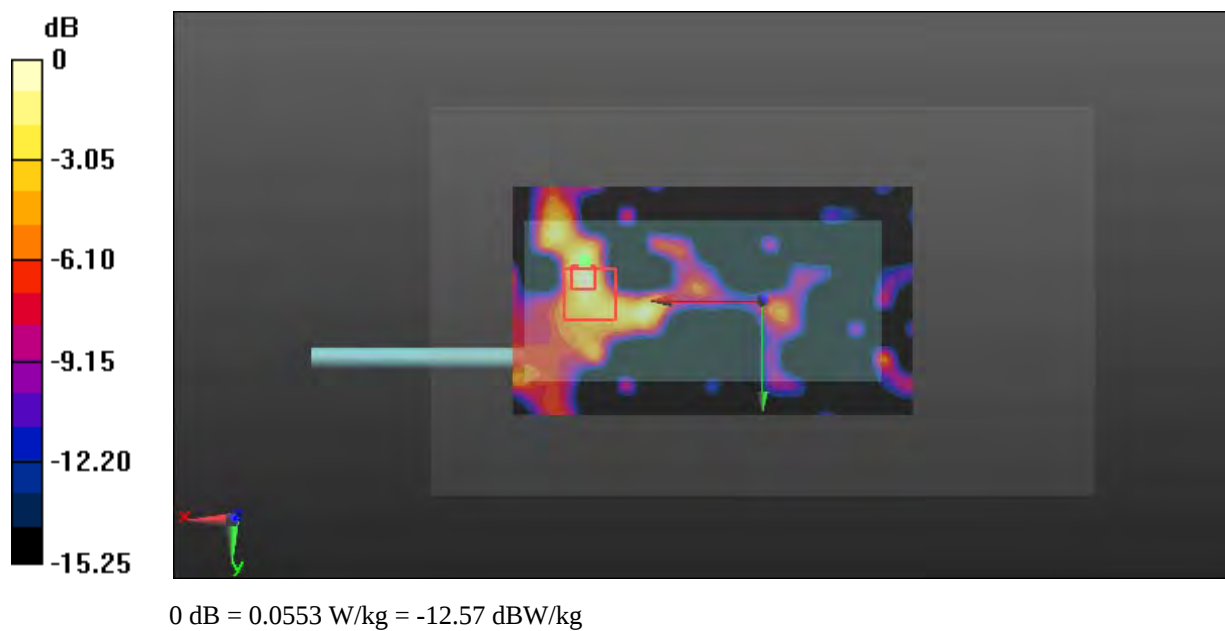

Test Plot 344#: WLAN 2.4G Mode b_Body Front_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.942 \text{ S/m}$; $\epsilon_r = 52.705$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

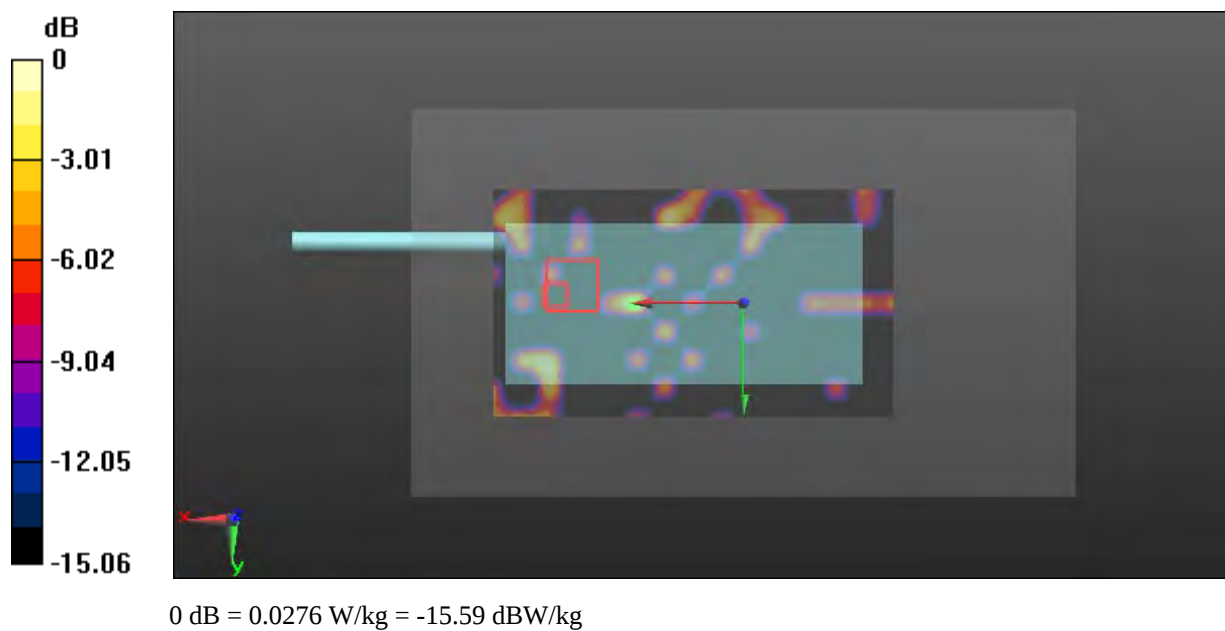Area Scan (141x81x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0288 W/kg **Zoom Scan (8x8x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.596 V/m ; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.0380 W/kg **SAR(1 g) = 0.00717 W/kg ; SAR(10 g) = 0.0023 W/kg** Maximum value of SAR (measured) = 0.0276 W/kg 

Test Plot 345#: WLAN 2.4G Mode b_Body Left_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.942 \text{ S/m}$; $\epsilon_r = 52.705$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

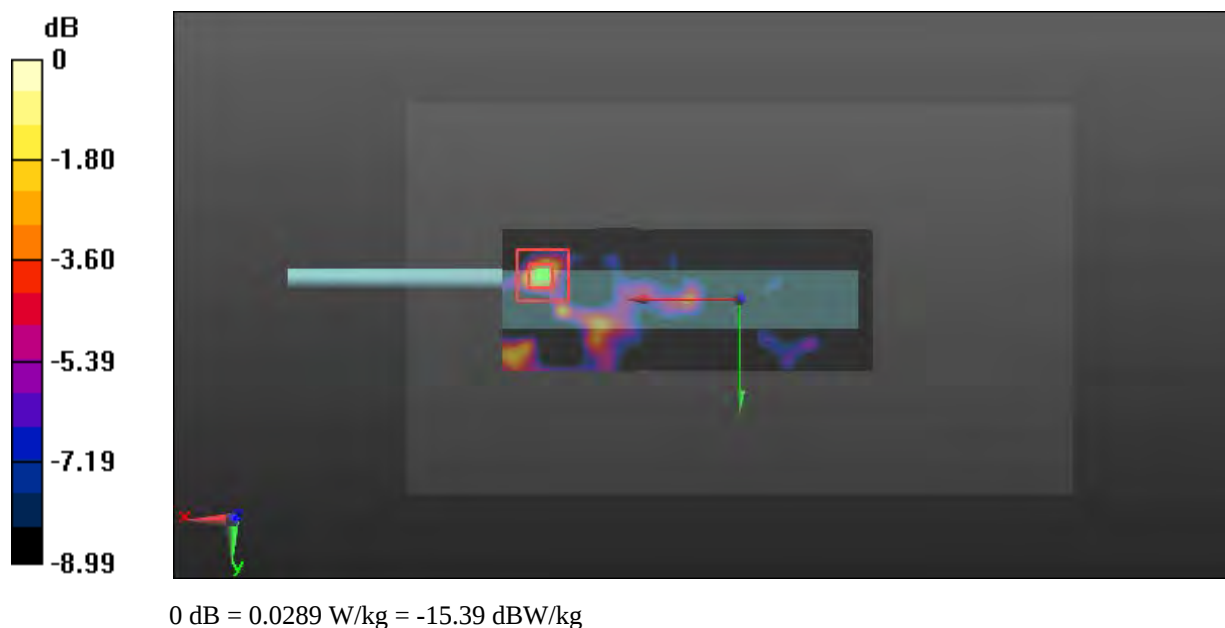Area Scan (131x51x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0390 W/kg **Zoom Scan (8x8x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.686 V/m ; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.0750 W/kg **SAR(1 g) = 0.019 W/kg ; SAR(10 g) = 0.0094 W/kg** Maximum value of SAR (measured) = 0.0289 W/kg 

Test Plot 346#: WLAN 2.4G Mode b_Body Right_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.942 \text{ S/m}$; $\epsilon_r = 52.705$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

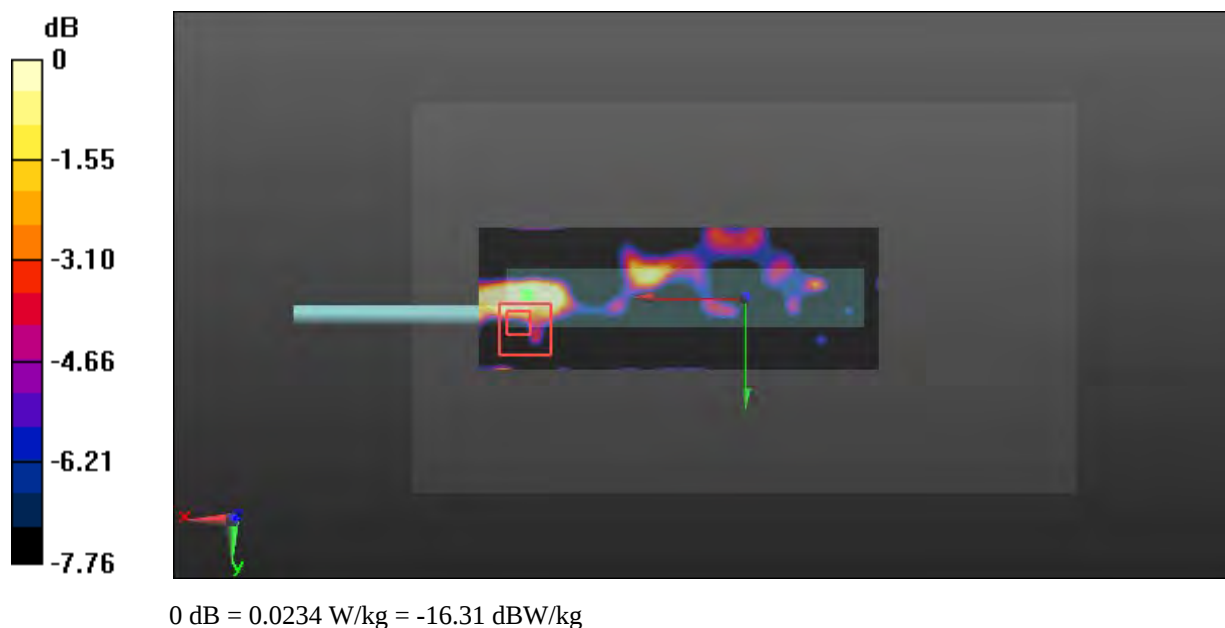Area Scan (141x51x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0556 W/kg **Zoom Scan (5x7x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.371 V/m ; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.0600 W/kg **SAR(1 g) = 0.013 W/kg ; SAR(10 g) = 0.00417 W/kg** Maximum value of SAR (measured) = 0.0234 W/kg 

Test Plot 347#: BT(8-DPSK DH5) _Head Left Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK_DH5); Frequency: 2441 MHz; Duty Cycle: 1:1.26

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.768$ S/m; $\epsilon_r = 40.139$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0238 W/kg


Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.559 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00901 W/kg

Maximum value of SAR (measured) = 0.0198 W/kg

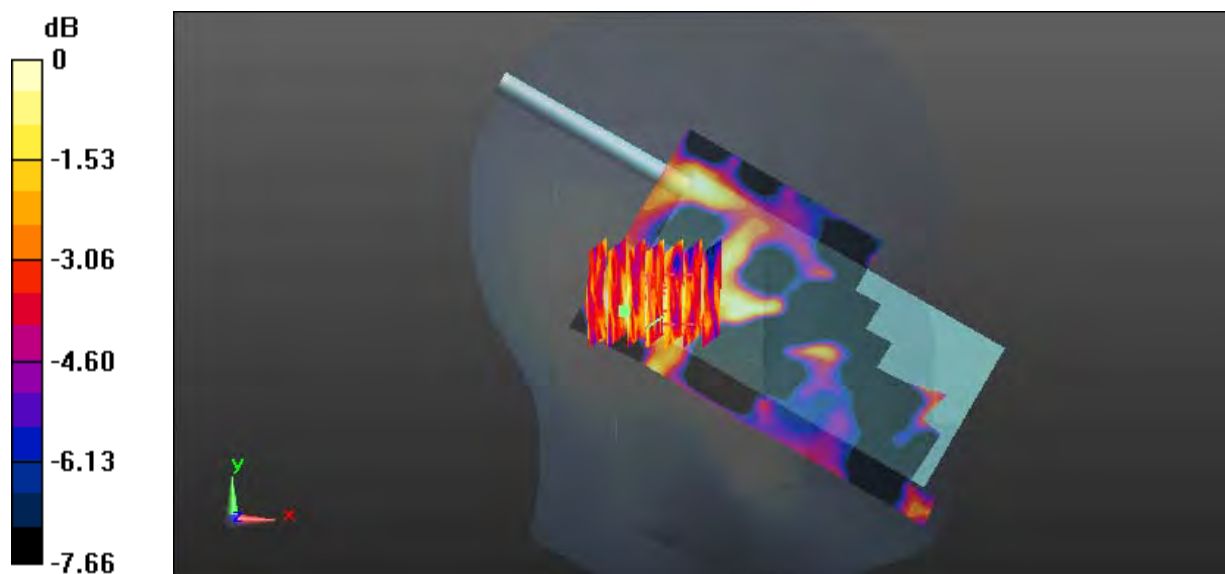

0 dB = 0.0198 W/kg = -17.03 dBW/kg

Test Plot 348#: BT(8-DPSK DH5)_Head Left Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK_DH5); Frequency: 2441 MHz; Duty Cycle: 1:1.26

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.768$ S/m; $\epsilon_r = 40.139$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0527 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.271 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0250 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00561 W/kg

Maximum value of SAR (measured) = 0.0245 W/kg

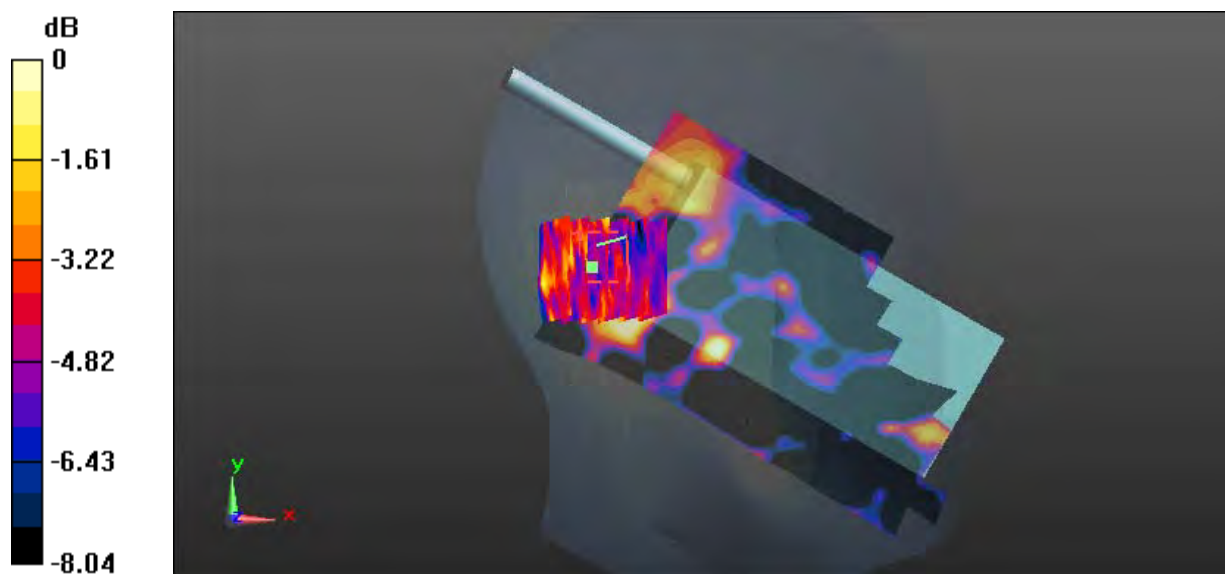

0 dB = 0.0245 W/kg = -16.11 dBW/kg

Test Plot 349#: BT(8-DPSK DH5)_Head Right Cheek_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK_DH5); Frequency: 2441 MHz; Duty Cycle: 1:1.26

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.768$ S/m; $\epsilon_r = 40.139$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0242 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.810 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0275 W/kg

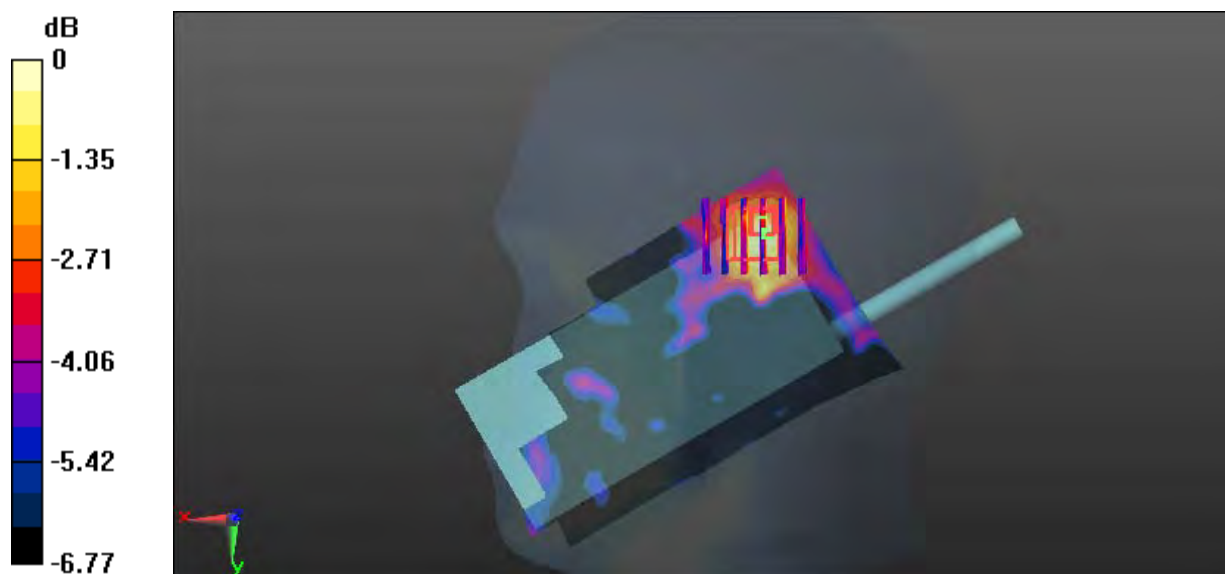

0 dB = 0.0275 W/kg = -15.61 dBW/kg

Test Plot 350#: BT(8-DPSK DH5)_Head Right Tilt_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK_DH5); Frequency: 2402 MHz; Duty Cycle: 1:1.26

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.703$ S/m; $\epsilon_r = 40.266$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0209 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.403 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0190 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0188 W/kg

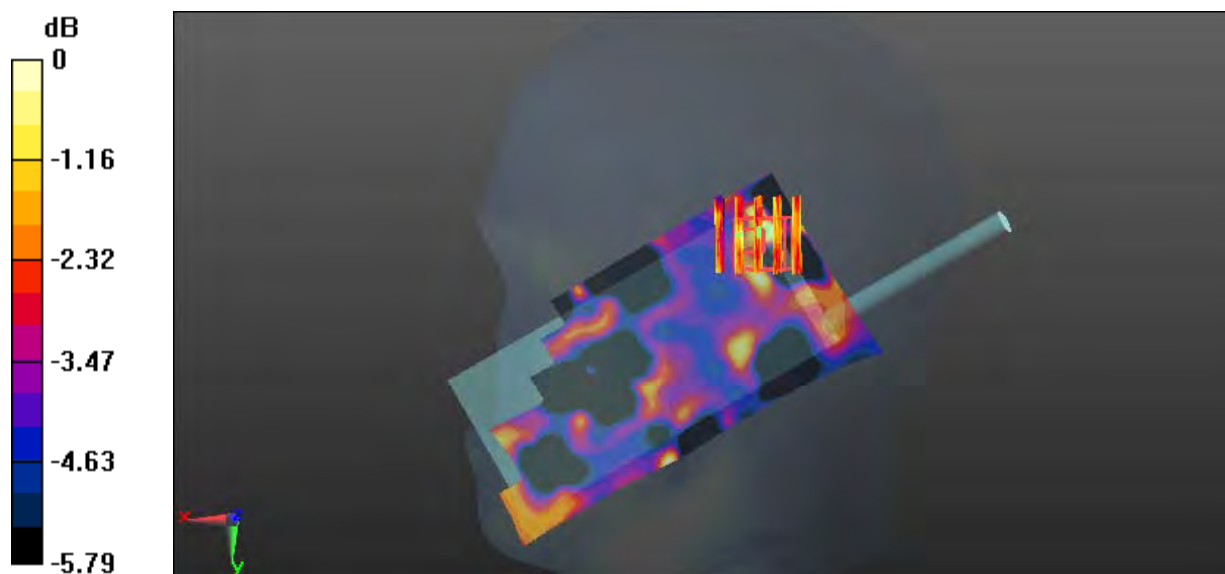

0 dB = 0.0188 W/kg = -17.26 dBW/kg

Test Plot 351#: BT(8-DPSK DH5)_Head Right Tilt_Low(2416MHz)**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: BT(8-DPSK_DH5); Frequency: 2416 MHz; Duty Cycle: 1:1.26

Medium parameters used: $f = 2416 \text{ MHz}$; $\sigma = 1.744 \text{ S/m}$; $\epsilon_r = 40.203$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

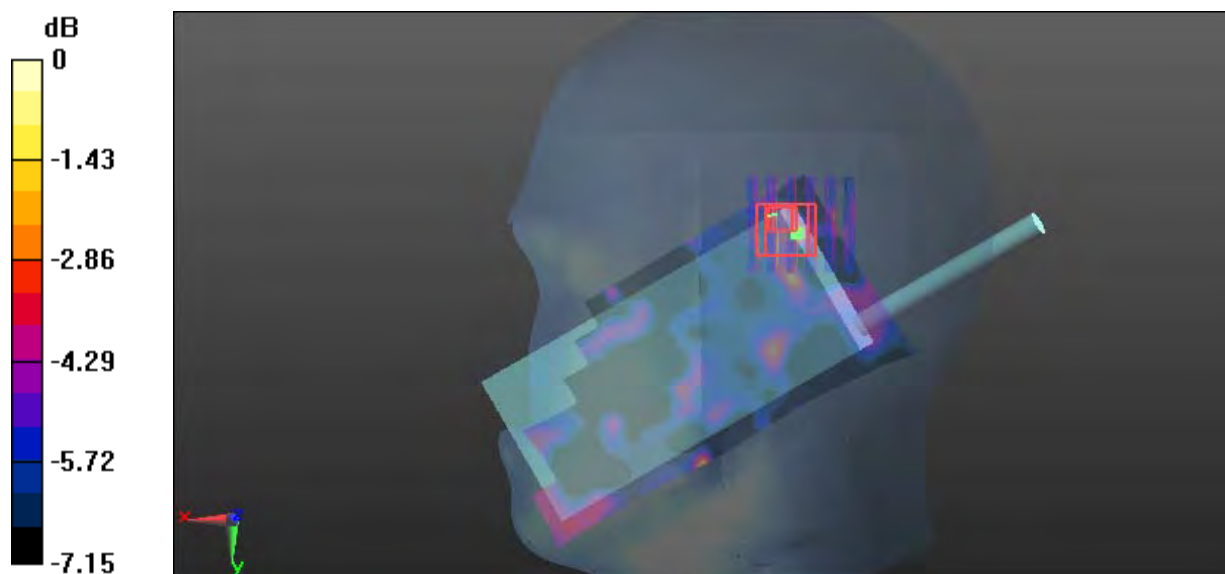Area Scan (141x81x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0273 W/kg **Zoom Scan (6x6x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.663 V/m ; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.0478 W/kg **SAR(1 g) = 0.025 W/kg ; SAR(10 g) = 0.016 W/kg** Maximum value of SAR (measured) = 0.0301 W/kg  $0 \text{ dB} = 0.0301 \text{ W/kg} = -15.21 \text{ dBW/kg}$

Test Plot 352#: BT(8-DPSK DH5)_Head Right Tilt_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK_DH5); Frequency: 2441 MHz; Duty Cycle: 1:1.26

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.768$ S/m; $\epsilon_r = 40.139$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0247 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.579 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0306 W/kg

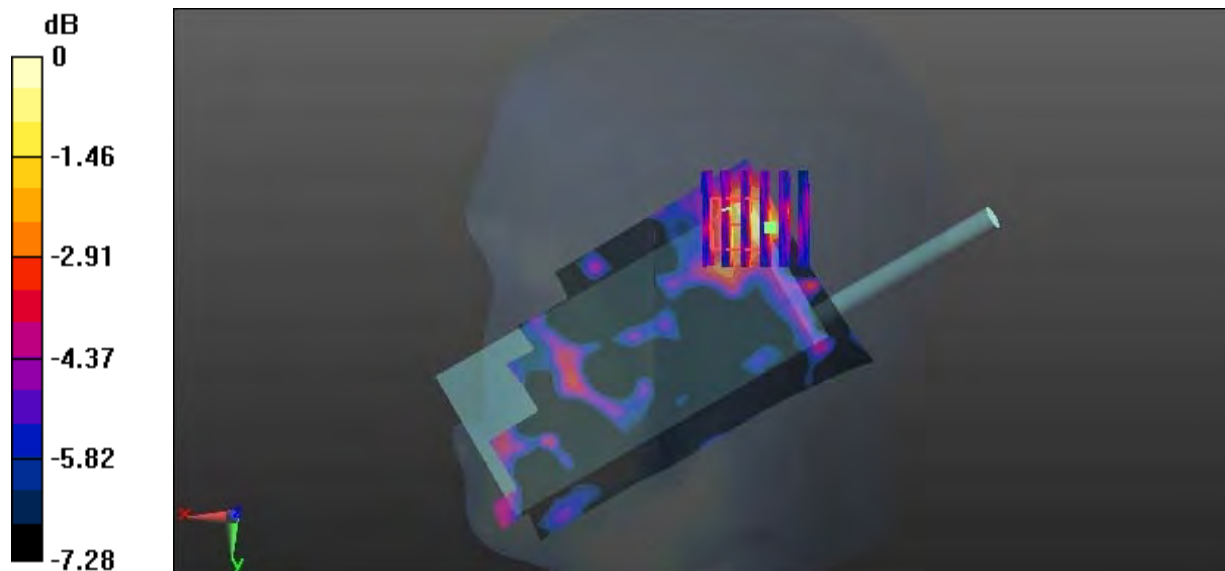

0 dB = 0.0306 W/kg = -15.14 dBW/kg

Test Plot 353#: BT(8-DPSK DH5)_Head Right Tilt_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK_DH5); Frequency: 2480 MHz; Duty Cycle: 1:1.26

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.825$ S/m; $\epsilon_r = 38.205$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0222 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.448 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0222 W/kg

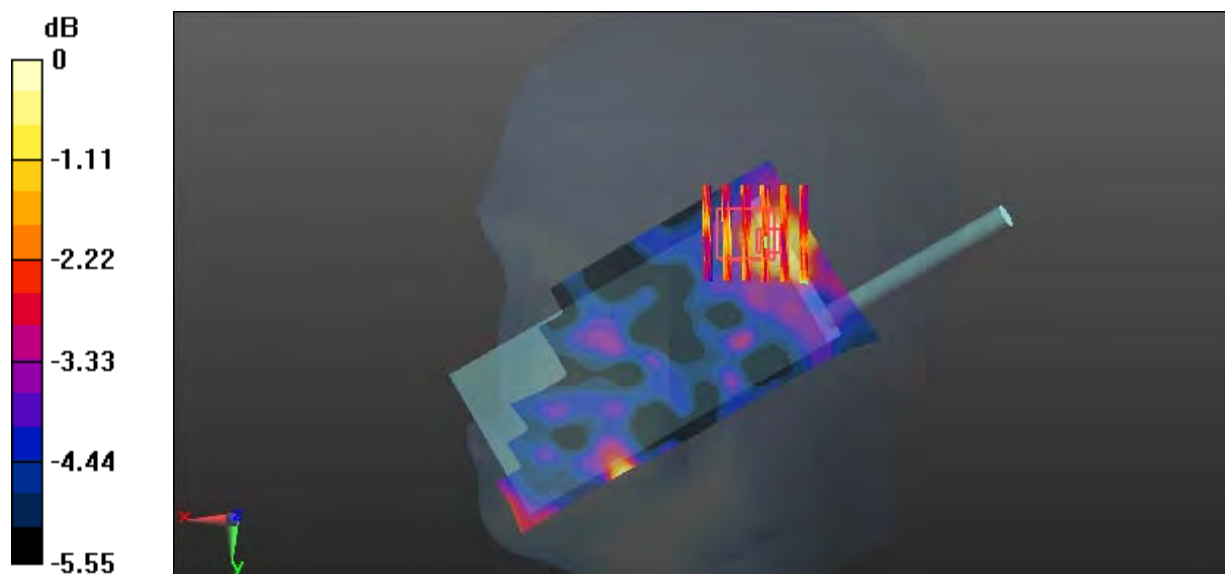

0 dB = 0.0222 W/kg = -16.54 dBW/kg

Test Plot 354#: BT(8-DPSK DH5)_Face Up_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK_DH5); Frequency: 2441 MHz; Duty Cycle: 1:1.26

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.768$ S/m; $\epsilon_r = 40.139$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0205 W/kg


Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.399 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.00525 W/kg; SAR(10 g) = 0.00153 W/kg

Maximum value of SAR (measured) = 0.0148 W/kg

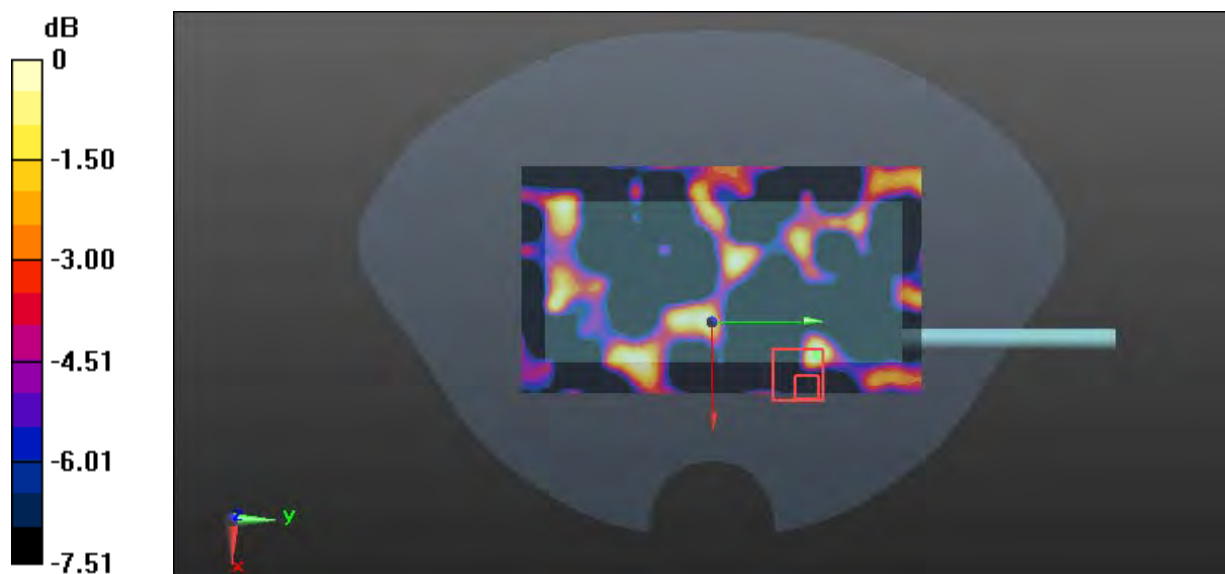

0 dB = 0.0148 W/kg = -18.30 dBW/kg

Test Plot 355#: BT(8-DPSK DH5)_Body Back_Low**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK_DH5); Frequency: 2402 MHz; Duty Cycle: 1:1.26

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.891$ S/m; $\epsilon_r = 54.434$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0207 W/kg


Zoom Scan (7x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.625 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.00684 W/kg

Maximum value of SAR (measured) = 0.0416 W/kg

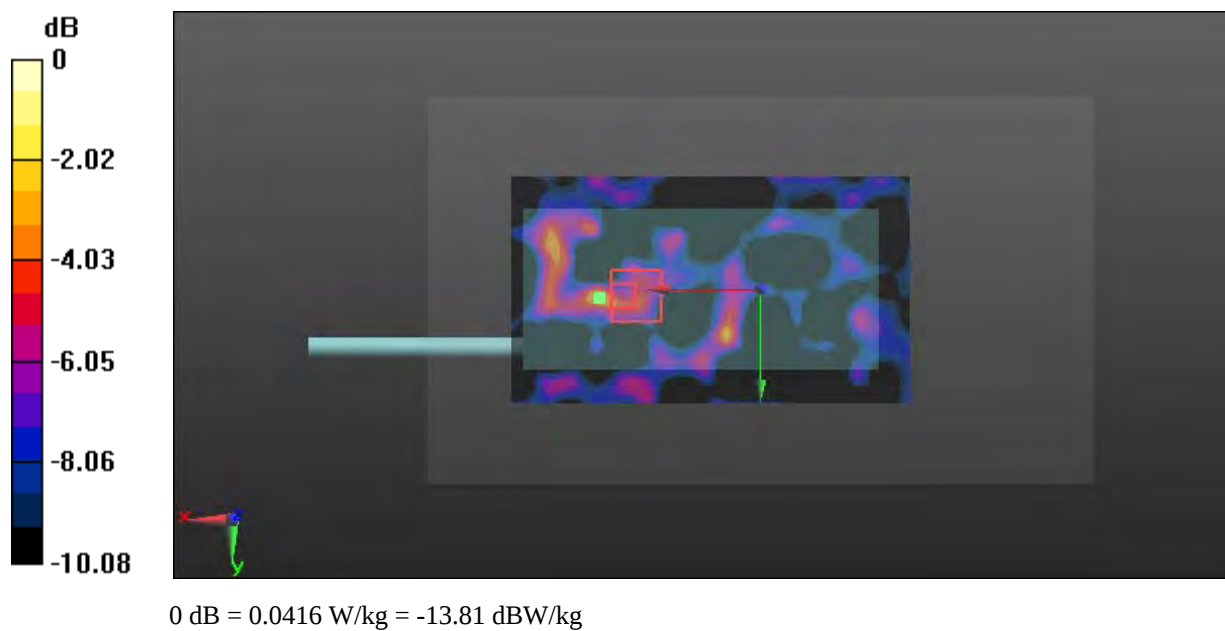

Test Plot 356#: BT(8-DPSK DH5)_Body Back_Low(2416MHz)**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: BT(8-DPSK_DH5); Frequency: 2416 MHz; Duty Cycle: 1:1.26

Medium parameters used: $f = 2416 \text{ MHz}$; $\sigma = 1.911 \text{ S/m}$; $\epsilon_r = 54.302$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

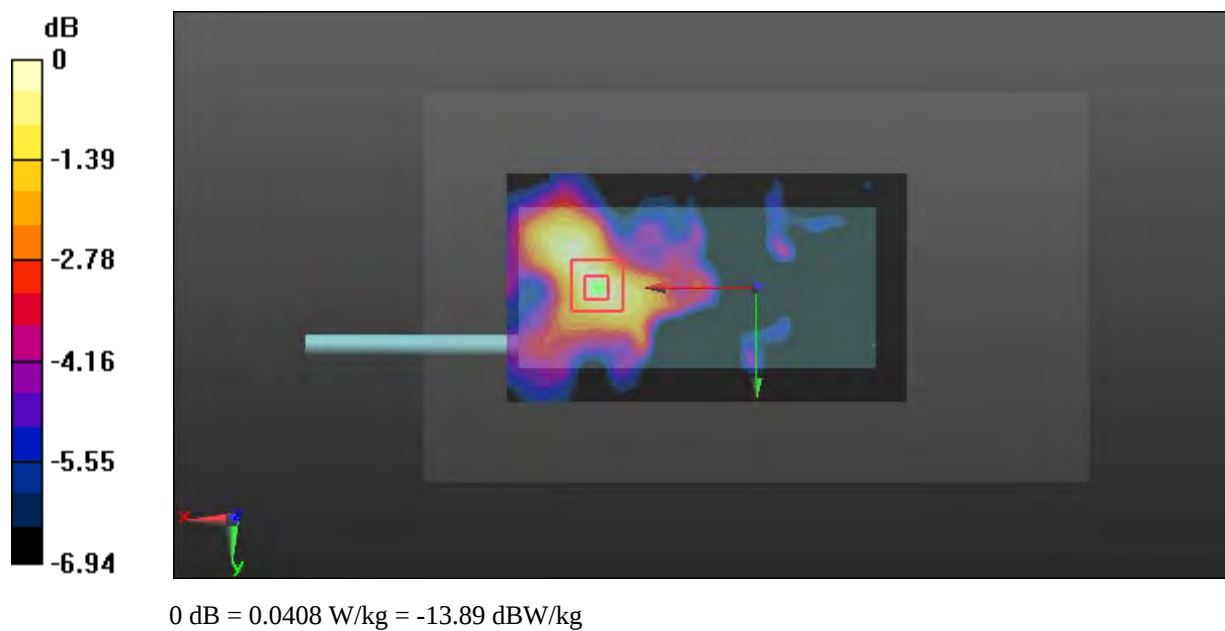Area Scan (141x81x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0528 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.662 V/m ; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.0610 W/kg **SAR(1 g) = 0.028 W/kg ; SAR(10 g) = 0.0142 W/kg** Maximum value of SAR (measured) = 0.0408 W/kg 

Test Plot 357#: BT(8-DPSK DH5)_Body Back_Middle**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK_DH5); Frequency: 2441 MHz; Duty Cycle: 1:1.26

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.933$ S/m; $\epsilon_r = 54.189$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0263 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.623 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0310 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00712 W/kg

Maximum value of SAR (measured) = 0.0204 W/kg

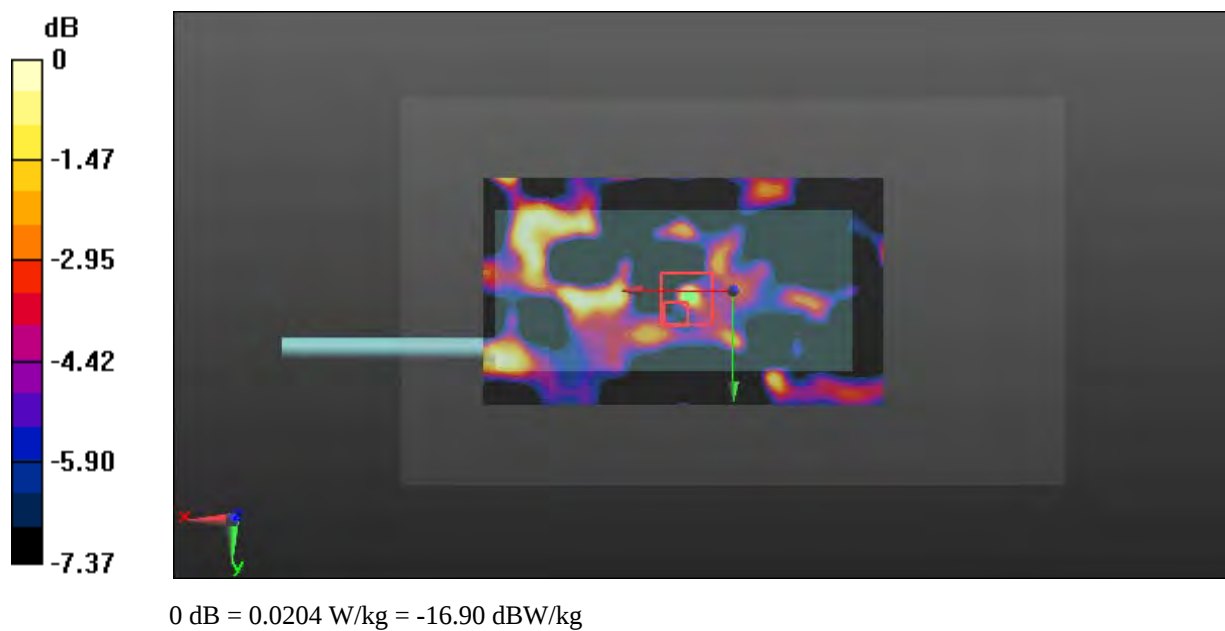

Test Plot 358#: BT(8-DPSK DH5)_Body Back_High**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK_DH5); Frequency: 2480 MHz; Duty Cycle: 1:1.26

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 51.578$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0516 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.298 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0450 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0324 W/kg

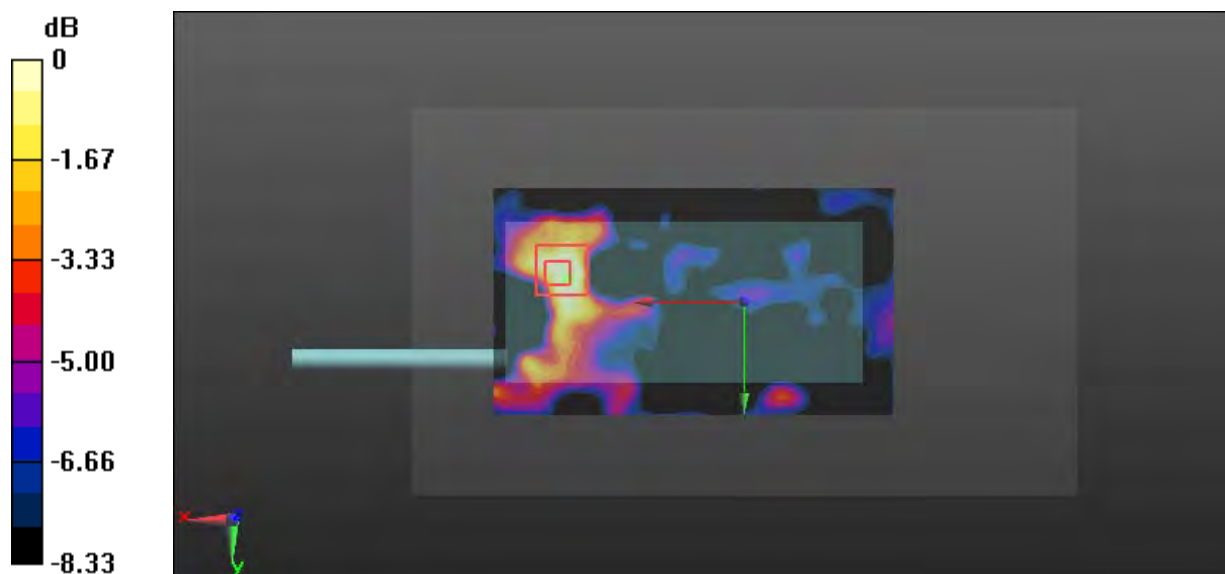

Test Plot 359#: LTE Band 26_Head Left Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.386$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.217 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.533 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.224 W/kg

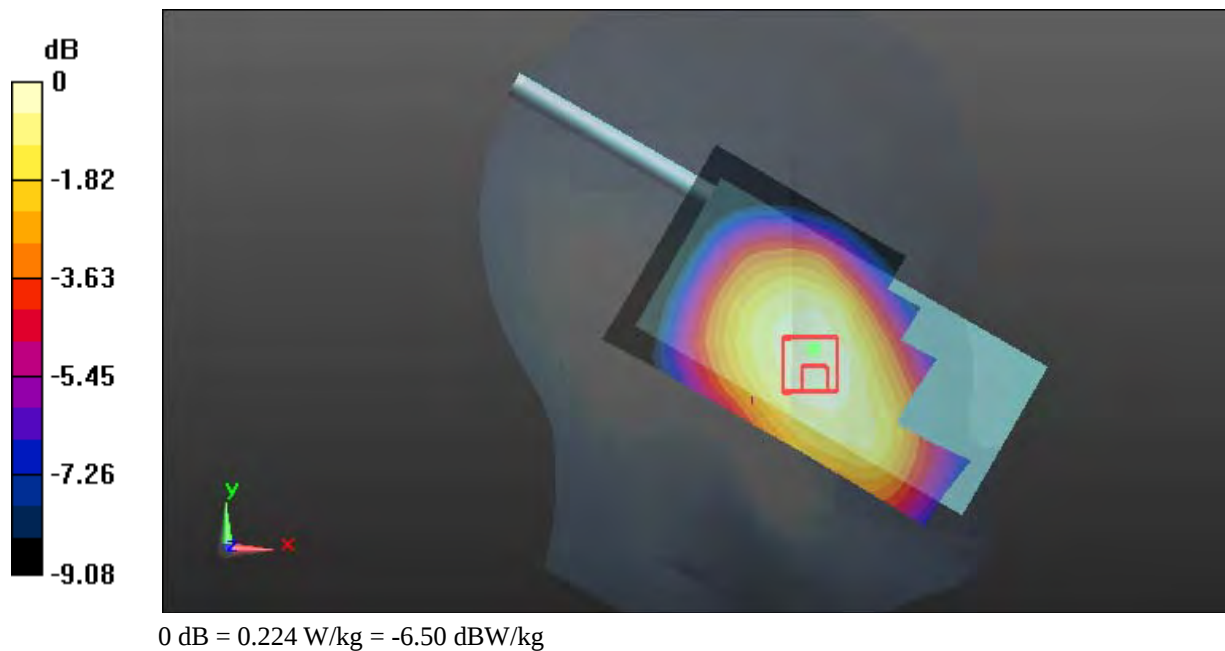

Test Plot 360#: LTE Band 26_Head Left Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.386$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.176 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.333 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.173 W/kg

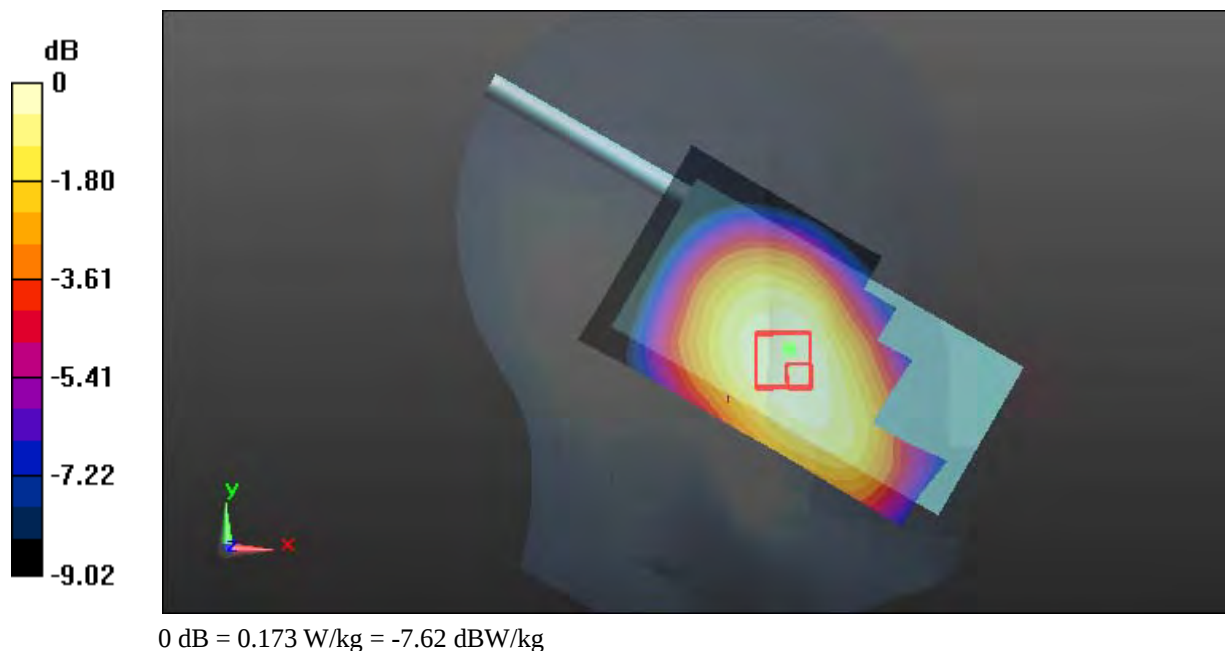

Test Plot 361#: LTE Band 26_Head Left Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.386$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.141 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.975 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.139 W/kg

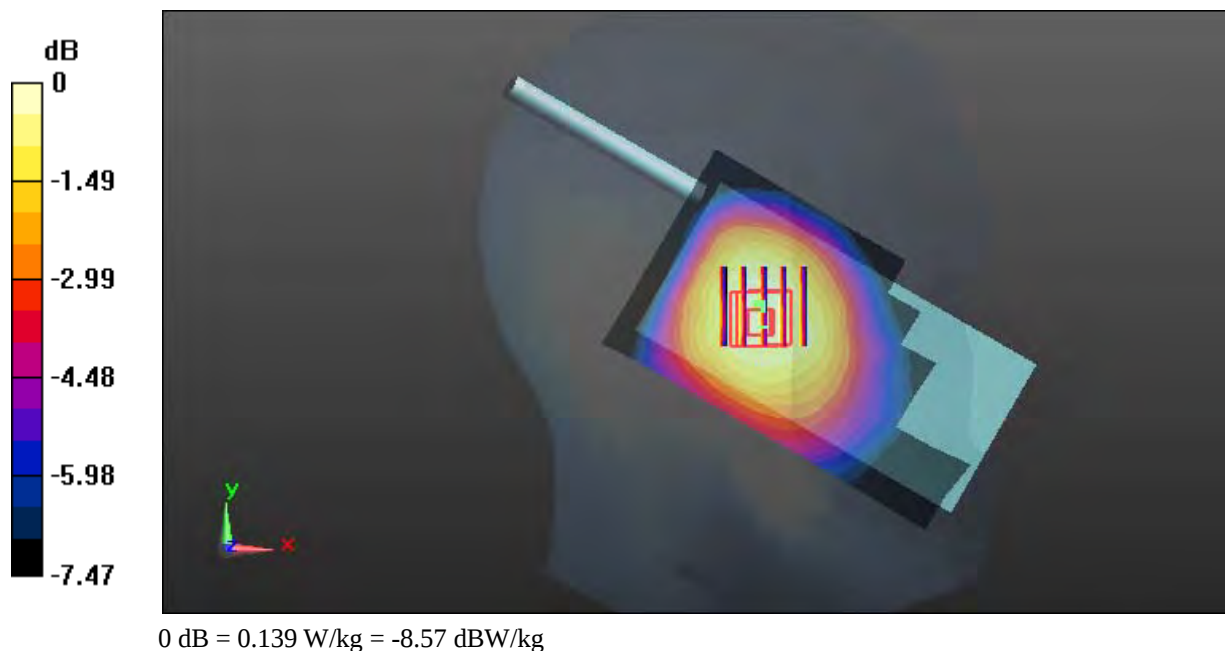

Test Plot 362#: LTE Band 26_Head Left Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.386$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.109 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.243 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.123 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.108 W/kg

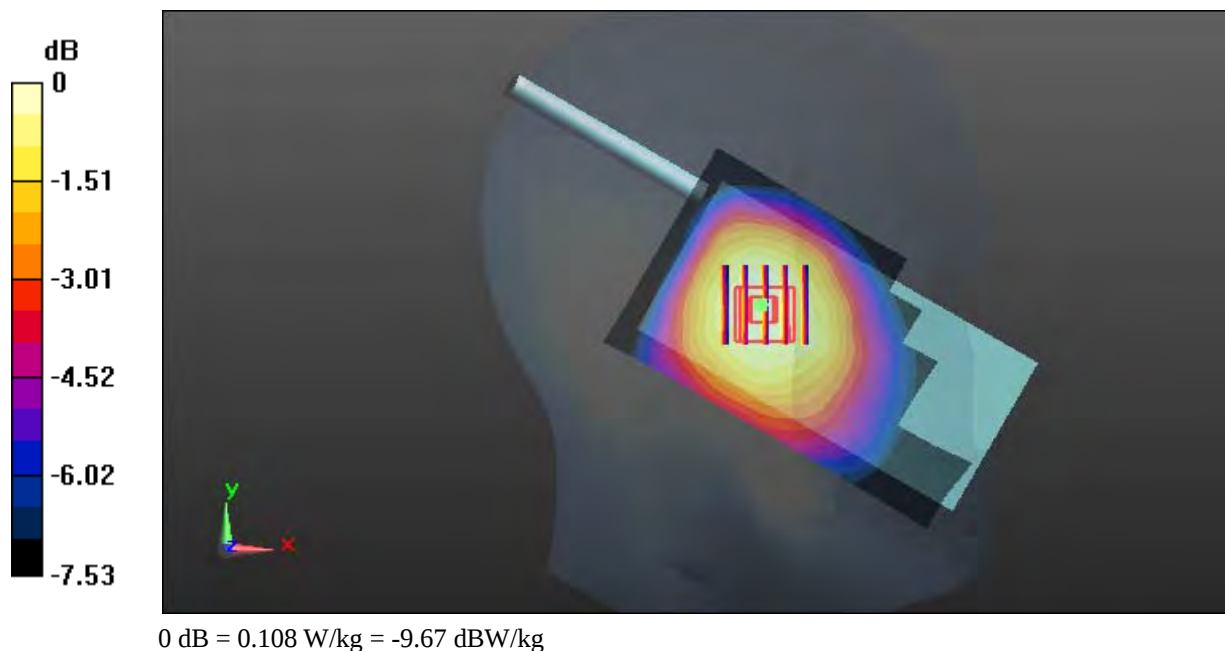

Test Plot 363#: LTE Band 26_Head Right Cheek_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.386$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.221 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.450 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.216 W/kg

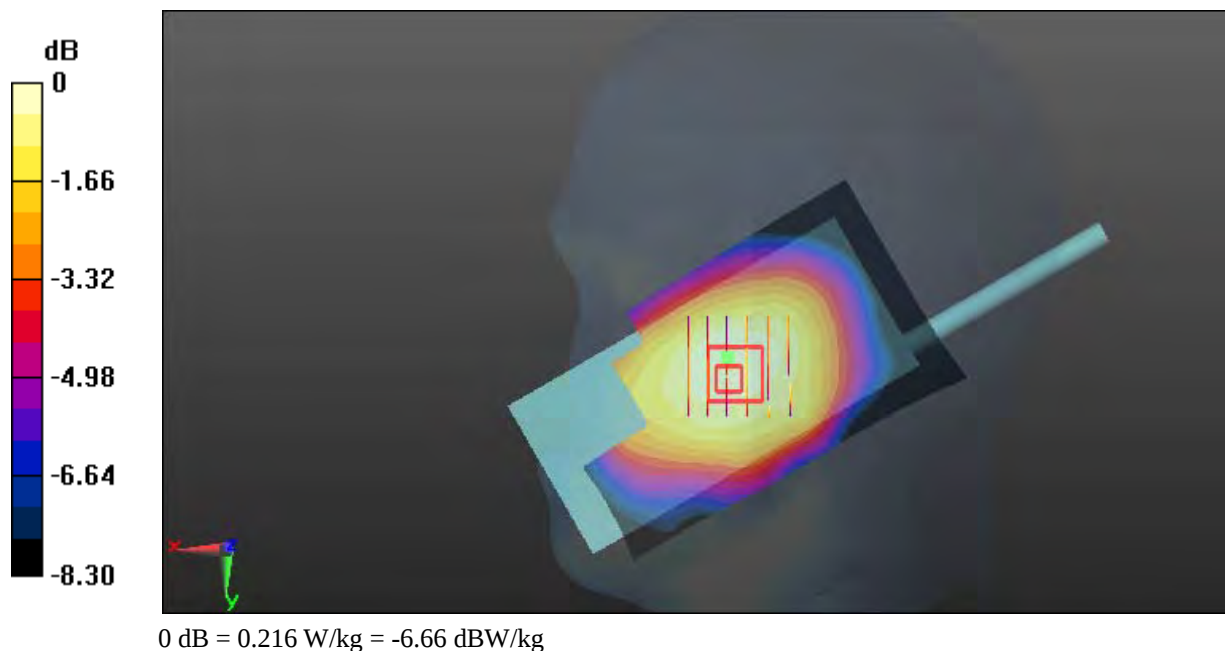

Test Plot 364#: LTE Band 26_Head Right Cheek_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.386$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.179 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.420 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.202 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.174 W/kg

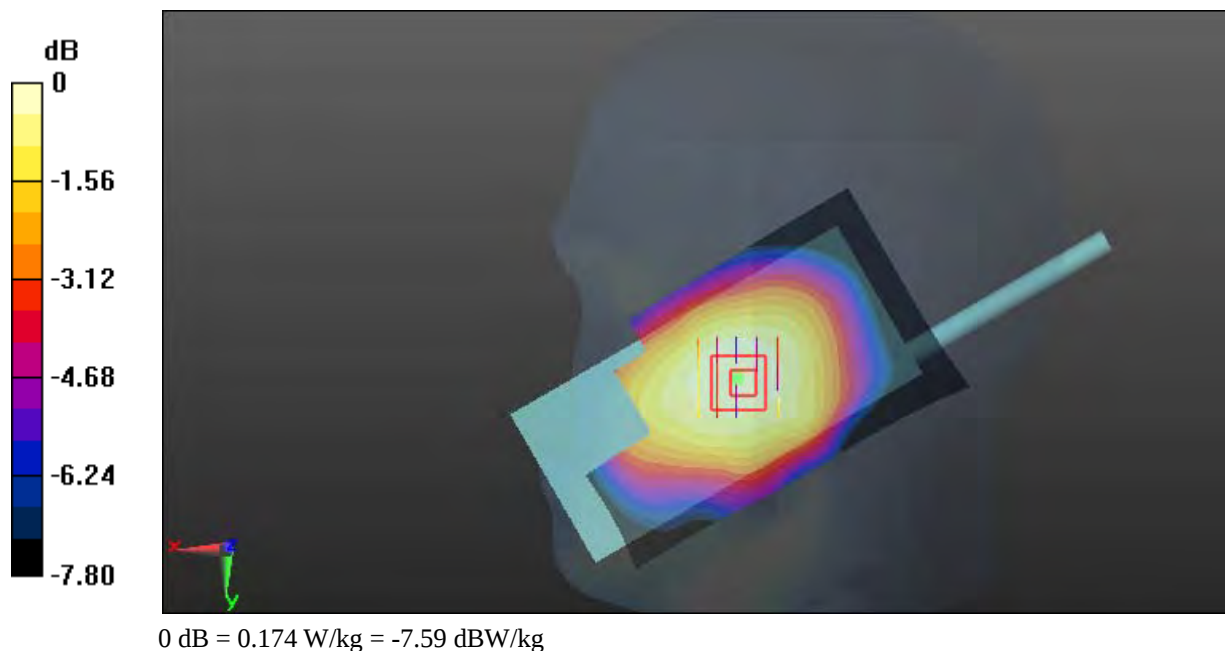

Test Plot 365#: LTE Band 26_Head Right Tilt_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.386$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.133 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.09 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.134 W/kg

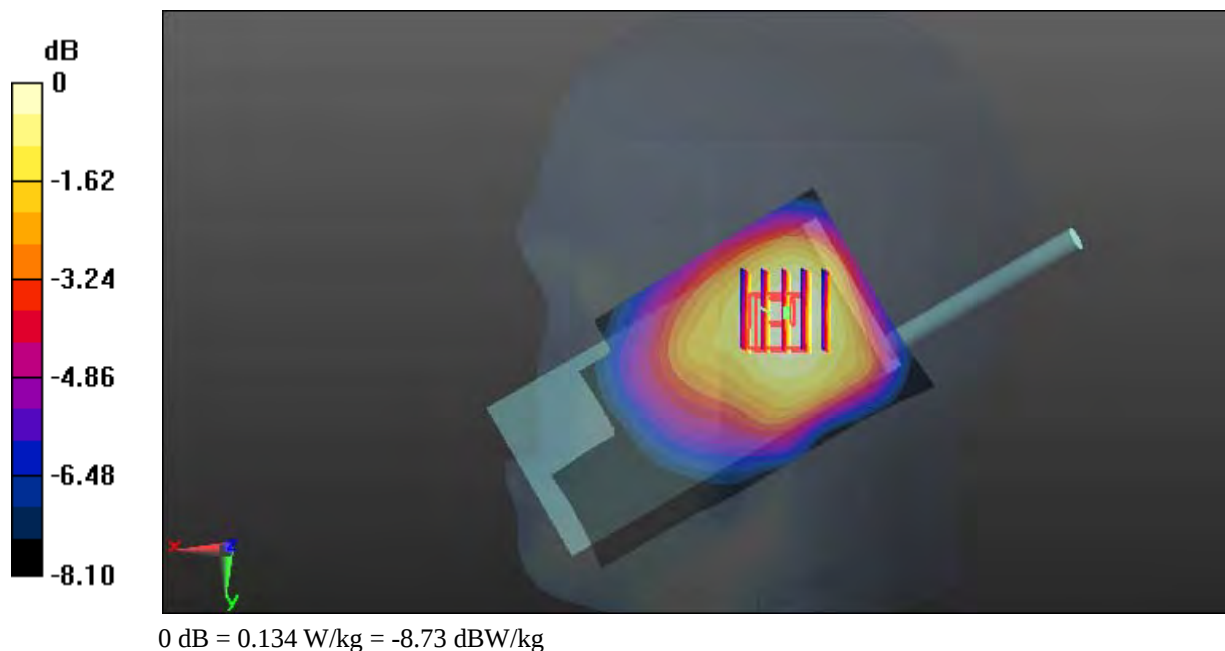


Test Plot 366#: LTE Band 26_Head Right Tilt_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819 \text{ MHz}$; $\sigma = 0.874 \text{ S/m}$; $\epsilon_r = 42.386$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

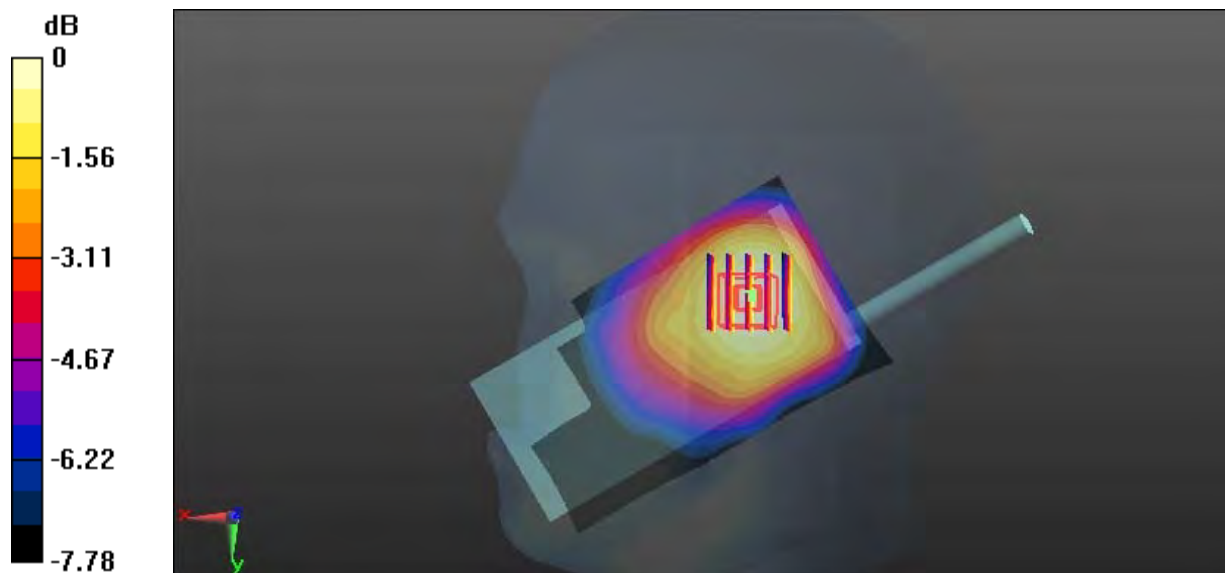Area Scan (111x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.108 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.77 V/m ; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.125 W/kg **SAR(1 g) = 0.102 W/kg ; SAR(10 g) = 0.079 W/kg** Maximum value of SAR (measured) = 0.107 W/kg  $0 \text{ dB} = 0.107 \text{ W/kg} = -9.71 \text{ dBW/kg}$

Test Plot 367#: LTE Band 26_Body Face Up_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0606 W/kg


Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.245 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0760 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0598 W/kg

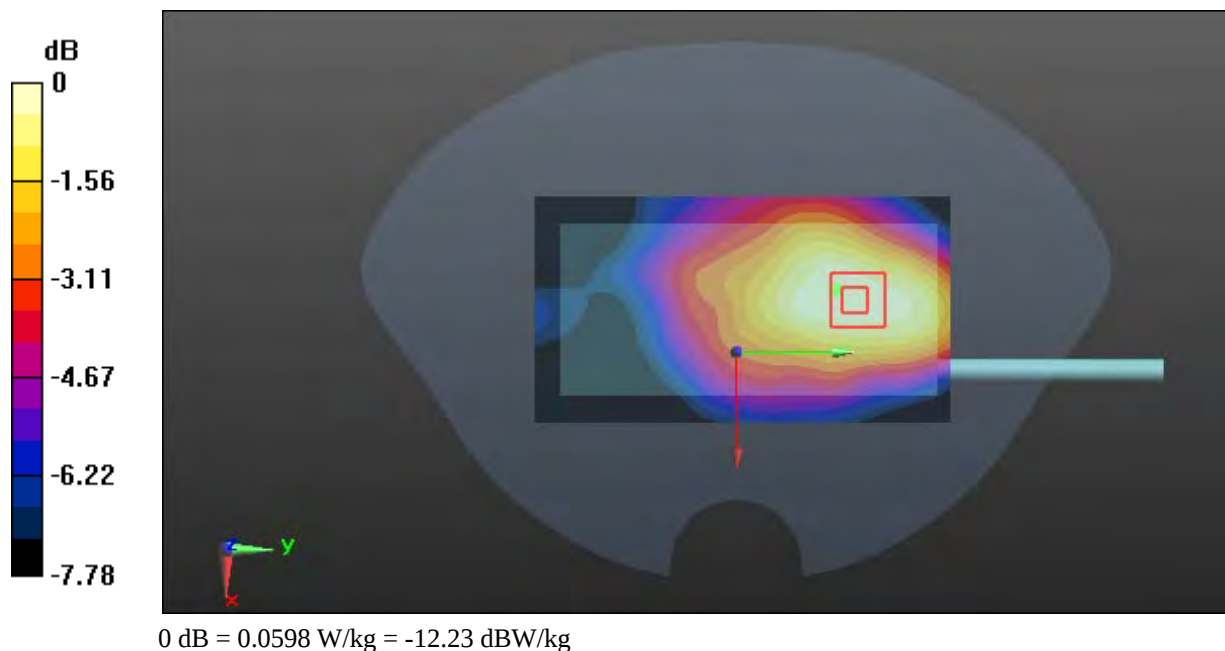

Test Plot 368#: LTE Band 26_Face Up_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0481 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.676 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0473 W/kg

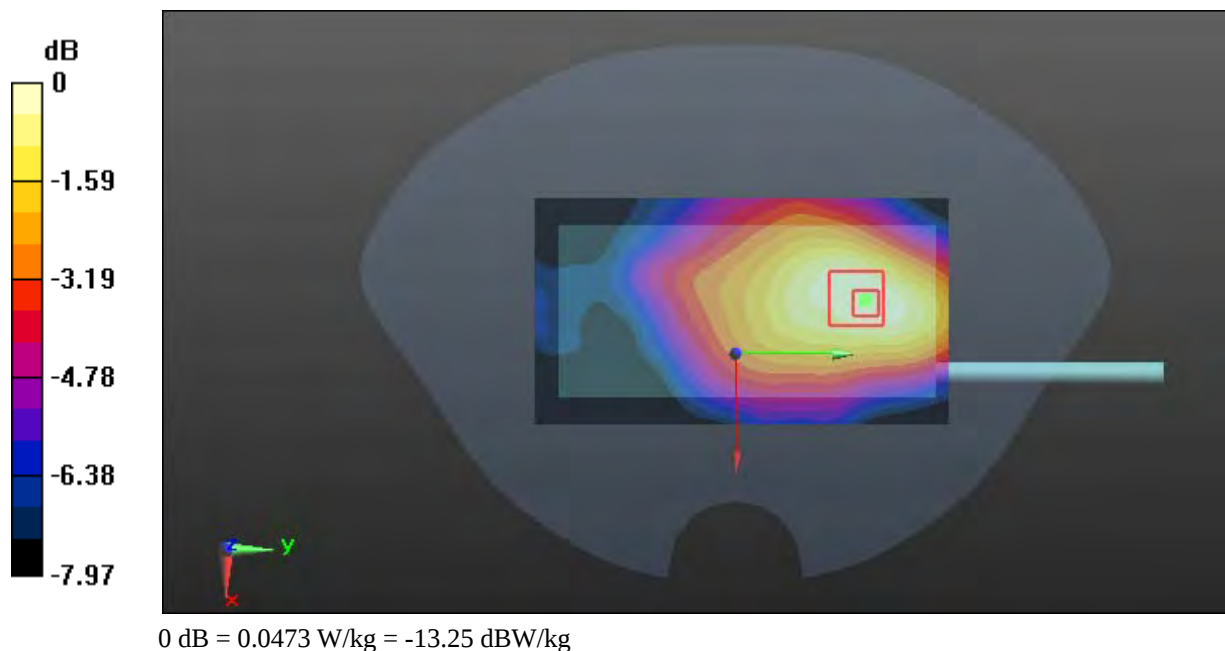

Test Plot 369#: LTE Band 26_Body Front_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.431 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.85 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.403 W/kg; SAR(10 g) = 0.314 W/kg

Maximum value of SAR (measured) = 0.436 W/kg

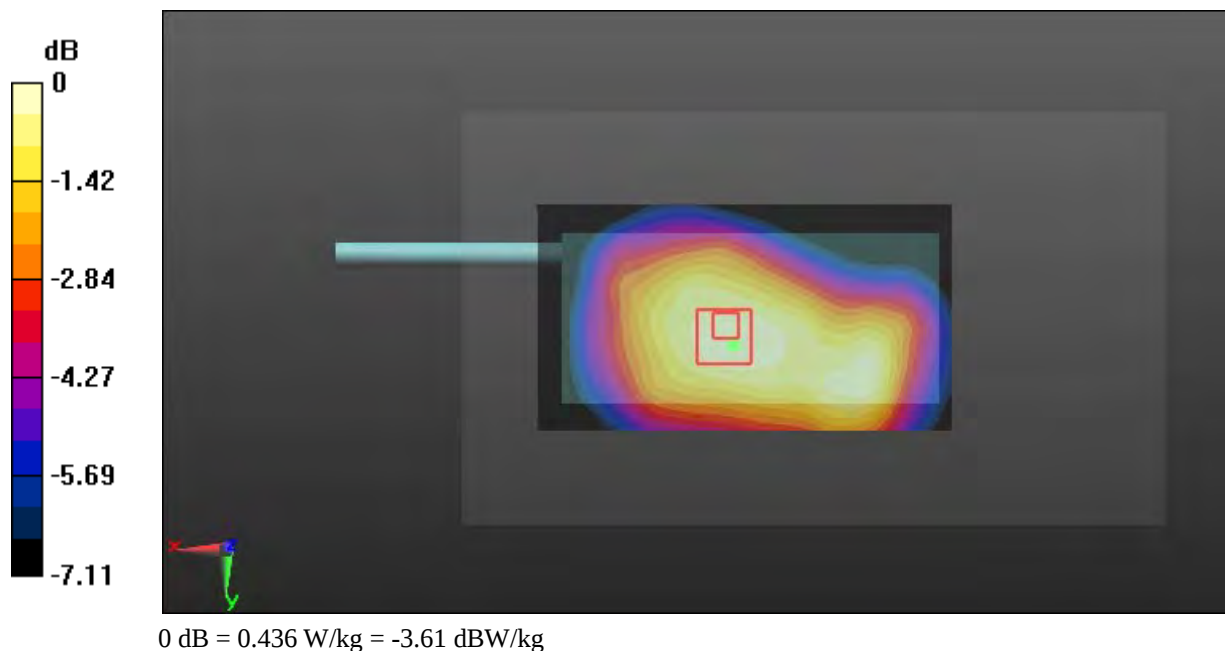

Test Plot 370#: LTE Band 26_Body Front_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.312 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.89 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.306 W/kg

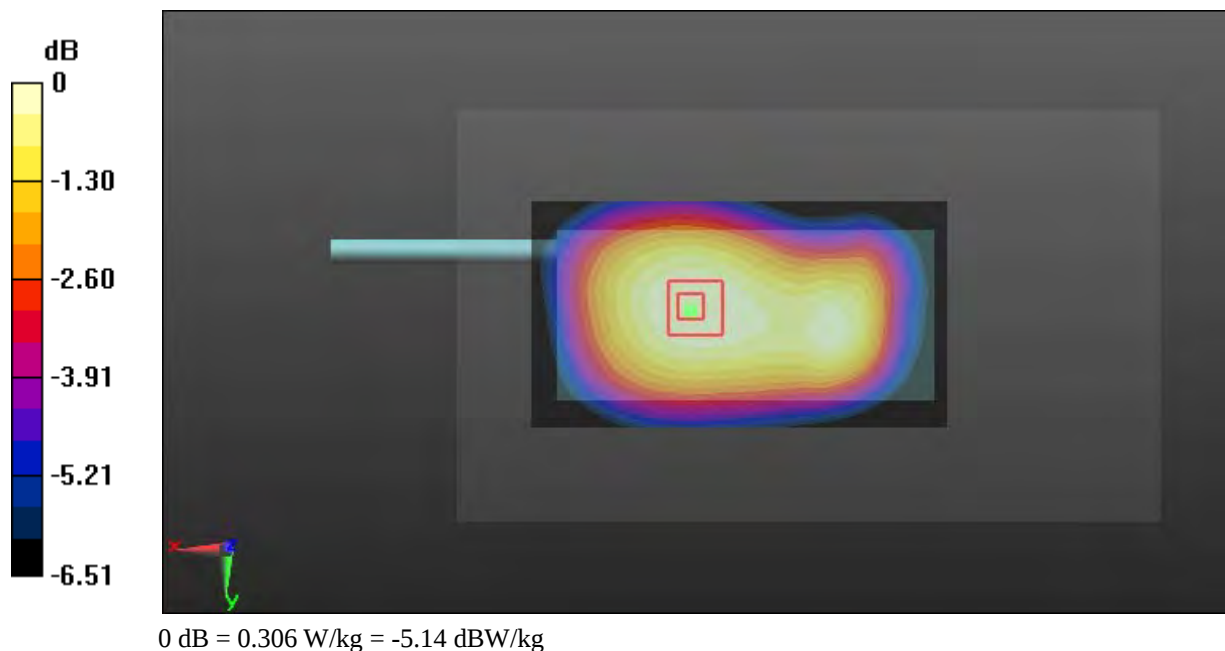

Test Plot 371#: LTE Band 26_Body Back_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.214 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.47 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.214 W/kg

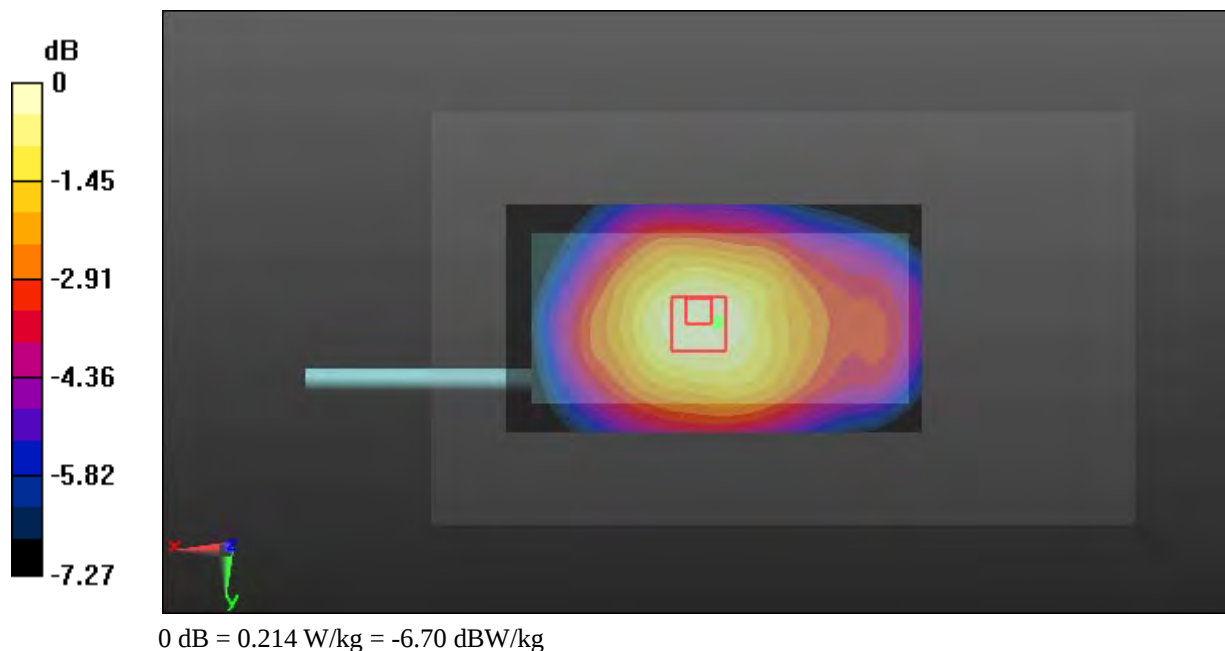

Test Plot 372#: LTE Band 26_Body Back_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.168 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.10 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.168 W/kg

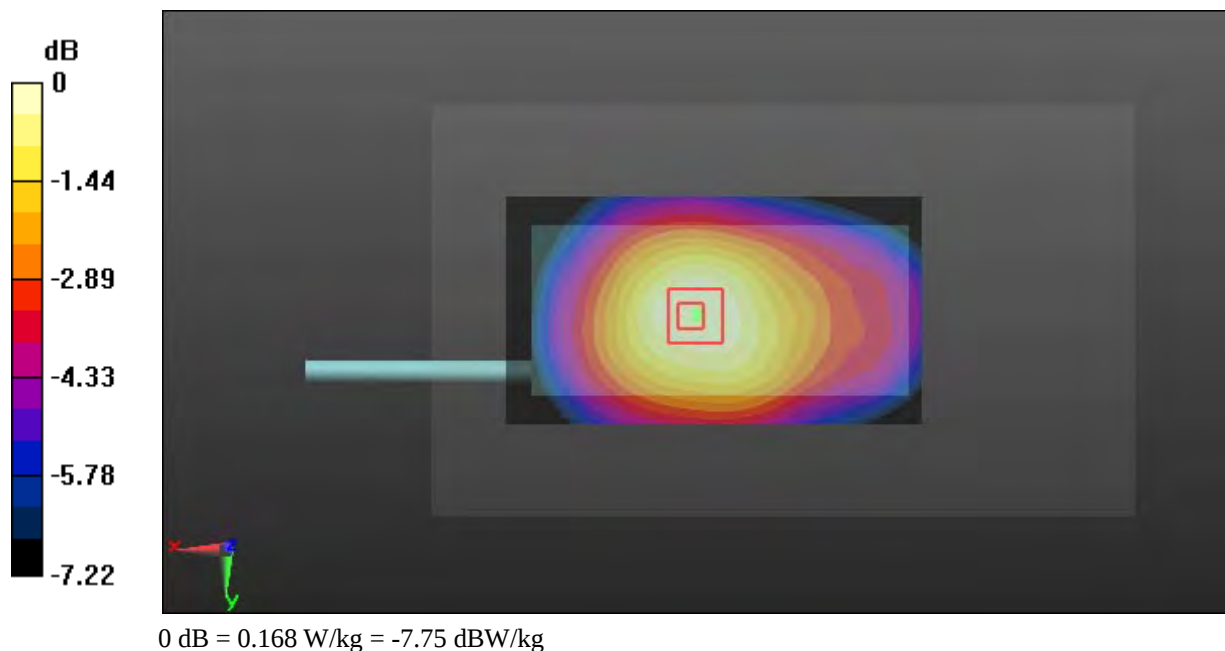

Test Plot 373#: LTE Band 26_Body Left_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.270 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.61 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 0.271 W/kg

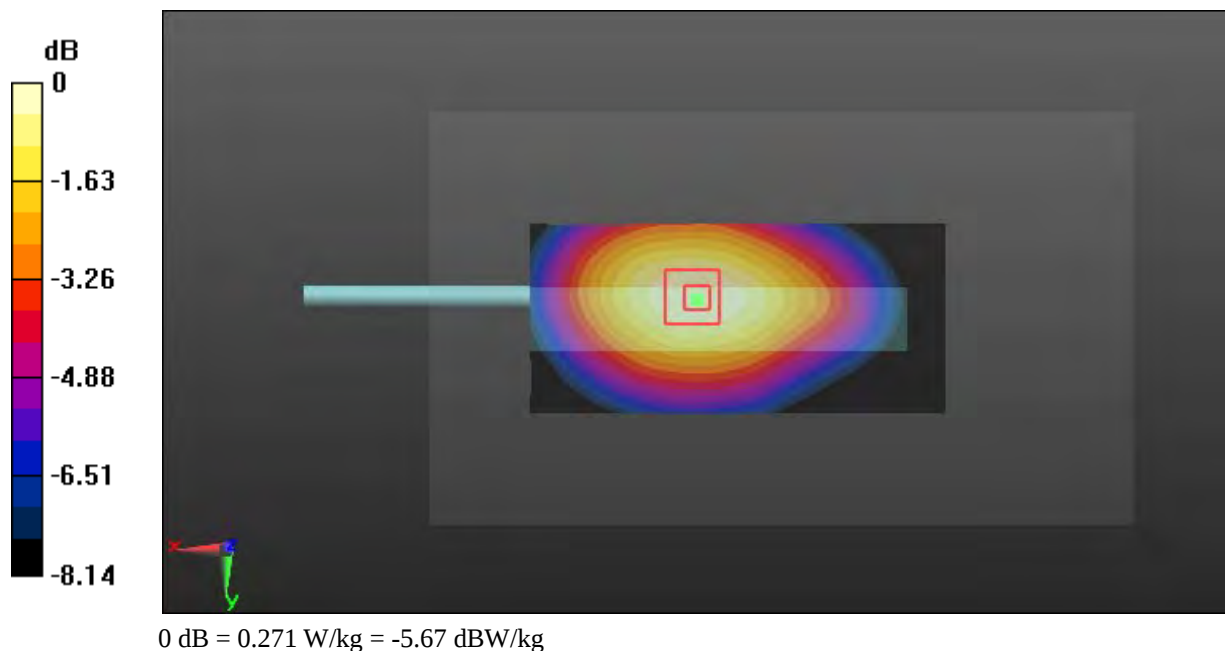

Test Plot 374#: LTE Band 26_Body Left_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.214 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.20 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.150 W/kg

Maximum value of SAR (measured) = 0.211 W/kg

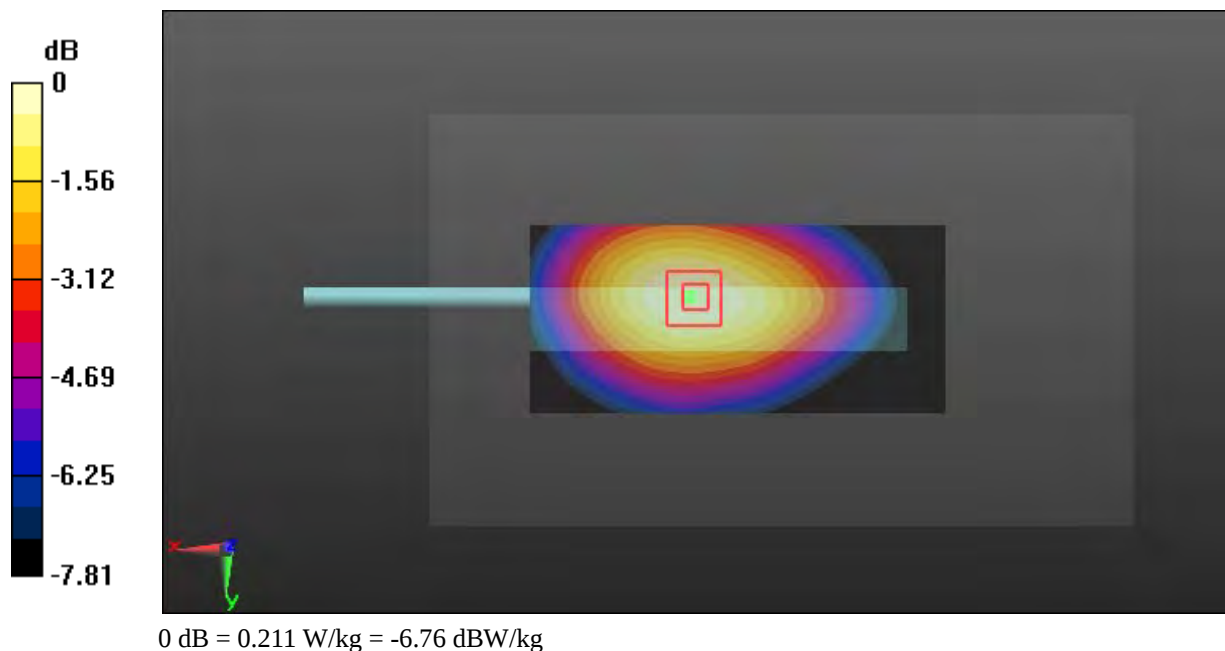

Test Plot 375#: LTE Band 26_Body Right_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.320 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.61 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.374 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.313 W/kg

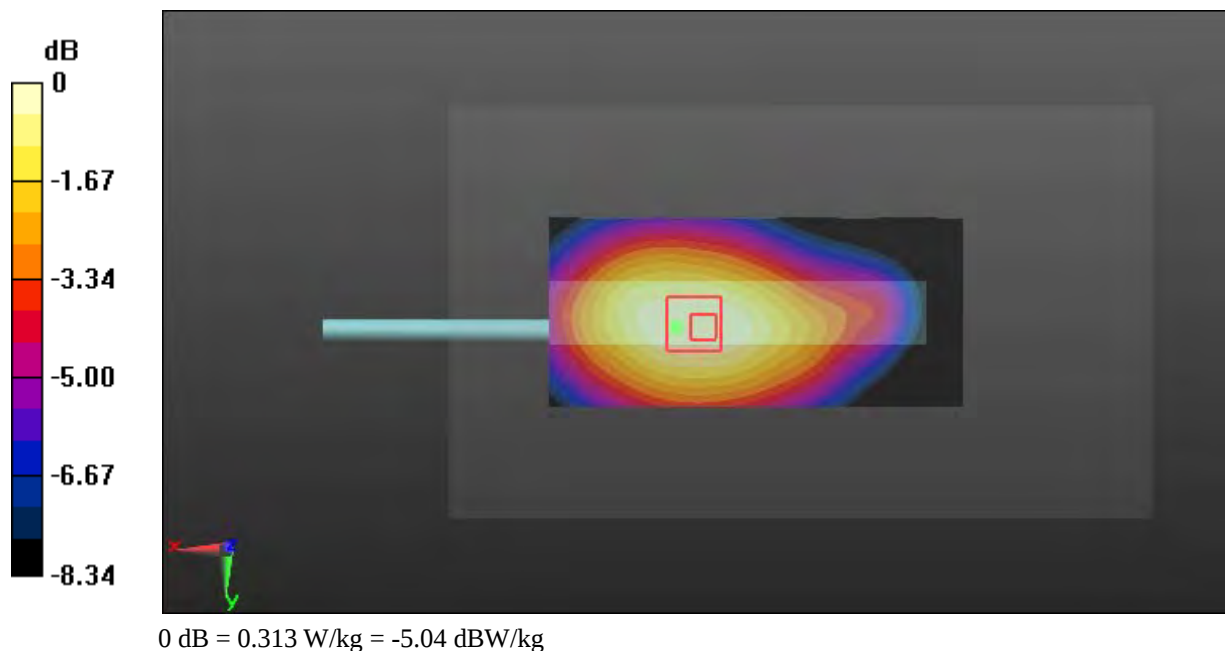

Test Plot 376#: LTE Band 26_Body Right_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.258 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.77 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.255 W/kg

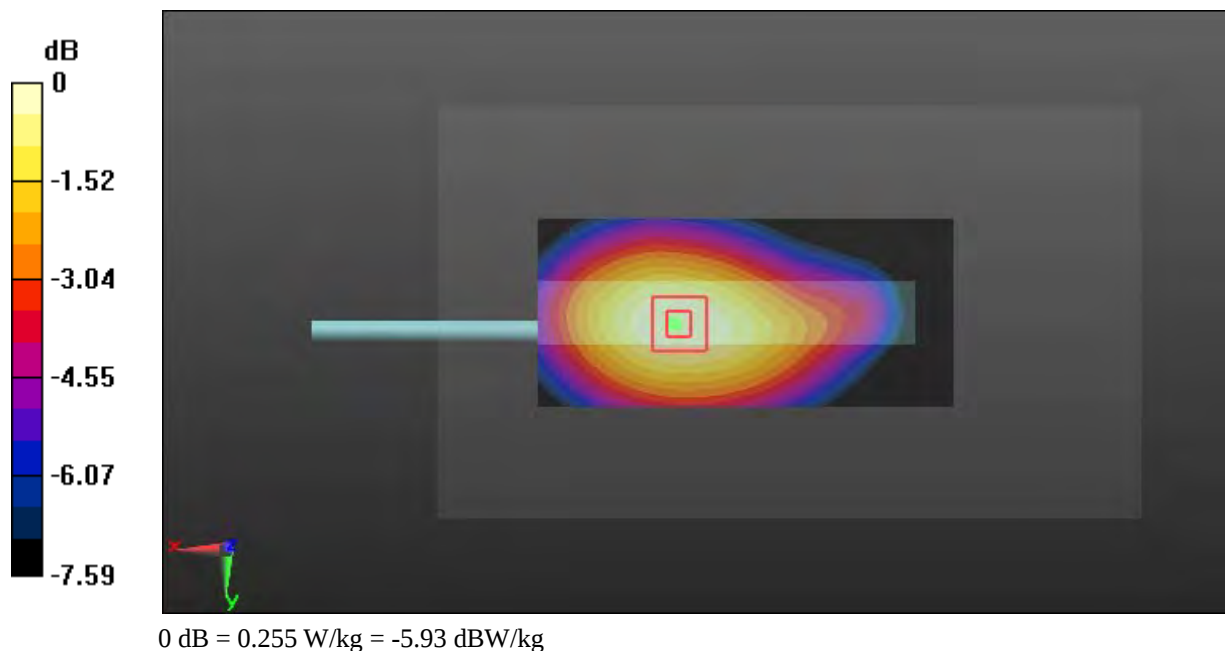

Test Plot 377#: LTE Band 26_Body Bottom_Middle_1RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.161 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.37 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.160 W/kg



Test Plot 378#: LTE Band 26_Body Bottom_Middle_50%RB**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 819$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 57.323$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.133 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.24 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.126 W/kg

