



FCC PART 15.407

TEST REPORT

For

Hytera Communications Corporation Limited

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen,
518057 China

FCC ID:YAMPNC380B9

Report Type: Original Report	Product Name: PoC Radio
Report Number:	RDG200109003-00D
Report Date:	2020-02-26
Reviewed By:	Ivan Cao Assistant manager 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY.....	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE.....	7
EQUIPMENT MODIFICATIONS.....	9
SUPPORT CABLE LIST AND DETAILS.....	9
BLOCK DIAGRAM OF TEST SETUP.....	10
SUMMARY OF TEST RESULTS.....	11
FCC §15.2407 (f) & §1.1310 & §2.1093 RF EXPOSURE.....	12
APPLICABLE STANDARD.....	12
TEST RESULT.....	12
FCC §15.203- ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD.....	13
ANTENNA CONNECTOR CONSTRUCTION.....	13
FCC §15.207(a)– CONDUCTED EMISSIONS.....	14
APPLICABLE STANDARD.....	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST PROCEDURE.....	15
TEST DATA.....	16
FCC §15.209, §15.205 , §15.407(b) –UNWANTED EMISSION.....	19
APPLICABLE STANDARD.....	19
EUT SETUP.....	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	21
TEST PROCEDURE.....	21
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	22
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA.....	23
FCC §15.407(a)(e)–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	38
APPLICABLE STANDARD.....	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST PROCEDURE.....	38
TEST DATA.....	38
FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER.....	65
APPLICABLE STANDARD.....	65

TEST EQUIPMENT LIST AND DETAILS.....66
TEST PROCEDURE66
TEST DATA66

FCC §15.407(a) - POWER SPECTRAL DENSITY68

APPLICABLE STANDARD68
TEST PROCEDURE69
TEST EQUIPMENT LIST AND DETAILS.....69
TEST DATA69

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	PoC Radio
EUT Model:	PNC380
Supports Operation Mode:	802.11a/ n ht20/n ht40
Operation Frequency:	5150-5250 MHz 5470-5725 MHz 5725-5850 MHz
Maximum Output Power (Conducted):	5150-5250 MHz:10.37 dBm 5470-5725 MHz:10.44 dBm 5725-5850 MHz:10.53 dBm
Modulation Type:	OFDM
Rated Input Voltage:	DC3.85V from Battery or DC5V from adapter
Adapter Information	Model: S010WV0500200
	Input: 100-240V~50/60Hz 0.4A
	Output: DC5V; 2000mA
Serial Number:	RDG200109003-RF-S3
EUT Received Date:	2020.01.09

Objective

This type approval report is prepared on behalf of *Hytera Communications Corporation Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 22H, 24E,27,90 PCF submissions with FCC ID: YAMPNC380B9.
 FCC Part 15C DSS submissions with FCC ID: YAMPNC380B9.
 FCC Part 15C DTS submissions with FCC ID: YAMPNC380B9.
 FCC Part 15C DXX submissions with FCC ID: YAMPNC380B9.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions,conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “△”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The system support 802.11a/n ht20/ n ht40 in 5GHz band.

For 5150~5250 MHz band, 6 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240

For 802.11a, 802.11n ht20 Channel 36, 40 and 48 was tested, for 802.11n ht40 Channel 38, 46 were tested.

For 5470~5725 MHz band, 16 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	116	5580	132	5660
102	5510	118	5590	134	5670
104	5520	120	5600	136	5680
108	5540	124	5620	140	5700
110	5550	126	5630	/	/
112	5560	128	5640	/	/

For 802.11a, 802.11n ht20 Channel 100, 116 and 140 were tested, for 802.11n ht40 Channel 102, 110 and 134 were tested.

For 5725~5850MHz band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
157	5785	/	/

For 802.11a, 802.11n ht20 Channel 149, 157 and 165 was tested, for 802.11n ht40 Channel 151, 159 was tested.

EUT Exercise Software


The software “QRCT” was used for testing, which was provided by manufacturer. The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. The maximum power was configured as below table, that provided by the manufacturer:

Band	Mode	Channel	Frequency (MHz)	Data rate	Power level
5150 - 5250 MHz	802.11a	Low	5180	6 Mbps	13
		Middle	5200	6 Mbps	13
		High	5240	6 Mbps	12
	802.11n ht20	Low	5180	MCS0	13
		Middle	5200	MCS0	13
		High	5240	MCS0	12
	802.11n ht40	Low	5190	MCS0	13
		High	5230	MCS0	13
	5470 - 5725 MHz	802.11 a	Low	5500	6 Mbps
Middle			5580	6 Mbps	13
High			5700	6 Mbps	12
802.11 n20		Low	5500	MCS0	13
		Middle	5580	MCS0	13
		High	5700	MCS0	12
802.11 n40		Low	5510	MCS0	12
		Middle	5550	MCS0	14
		High	5670	MCS0	13
5725 - 5850 MHz	802.11a	Low	5745	6 Mbps	12
		Middle	5785	6 Mbps	12
		High	5825	6 Mbps	15
	802.11n ht20	Low	5745	MCS0	12
		Middle	5785	MCS0	12
		High	5825	MCS0	15
	802.11n ht40	Low	5755	MCS0	13
		High	5795	MCS0	13

The duty cycle as below:


Mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle(x) (%)	Duty Cycle Factor (10*log(1/x)) (dB)
802.11 a	1.422	1.560	91.15	0.40
802.11n ht20	1.330	1.444	92.11	0.36
802.11n ht40	0.669	0.838	79.83	0.98

802.11a

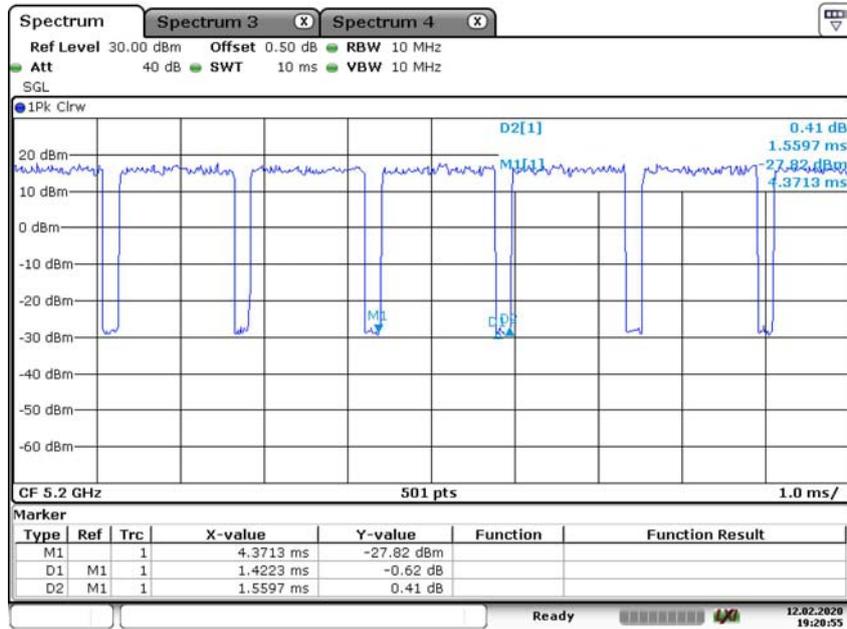


Date: 12.FEB.2020 19:20:56

802.11n ht20

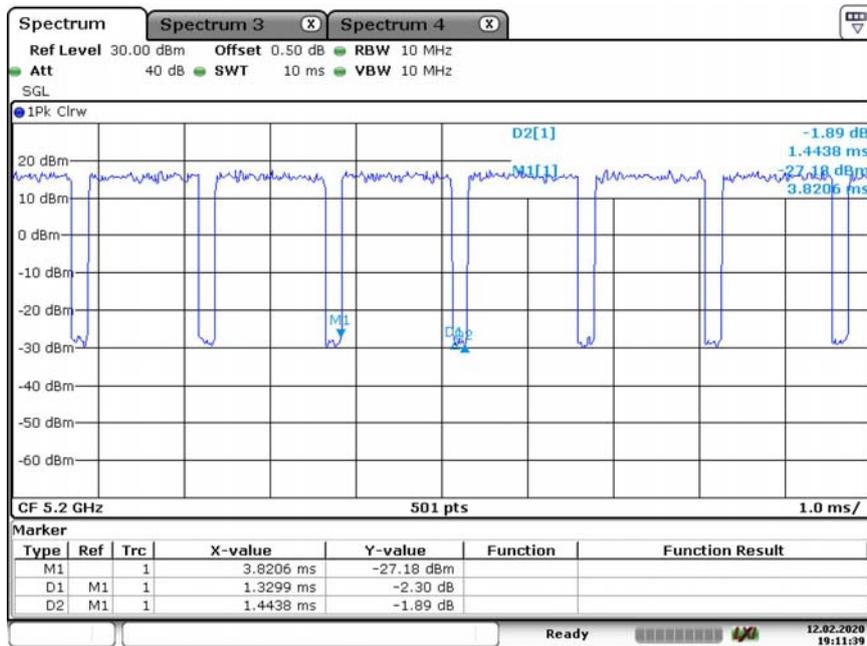

Date: 12.FEB.2020 19:11:39

802.11n ht40

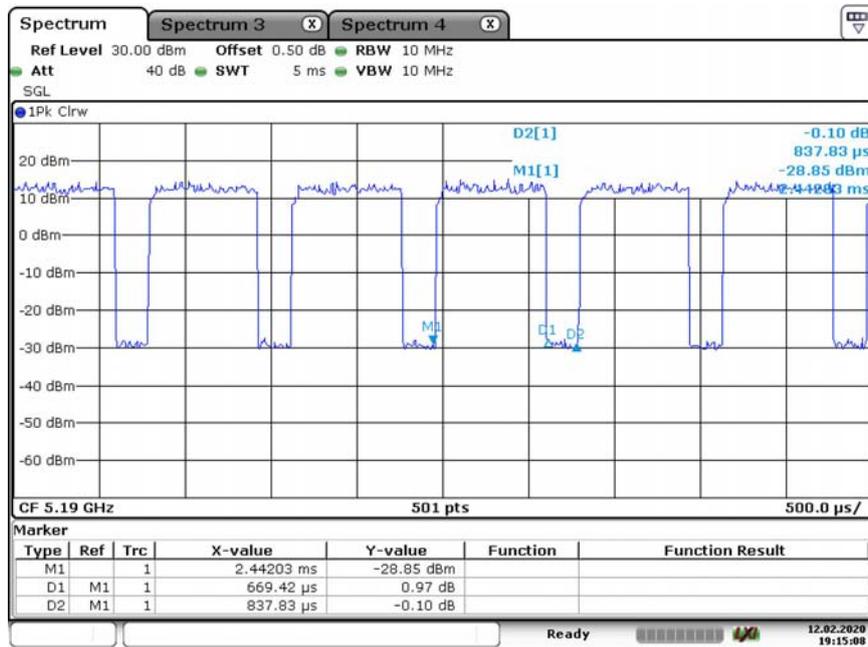

Date: 12.FEB.2020 19:15:09


Equipment Modifications

No modification was made to the EUT.

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
USB Cable	Yes	No	1	Adapter	EUT
Earphone Cable	Yes	No	1	EUT	Earphone

Block Diagram of Test Setup

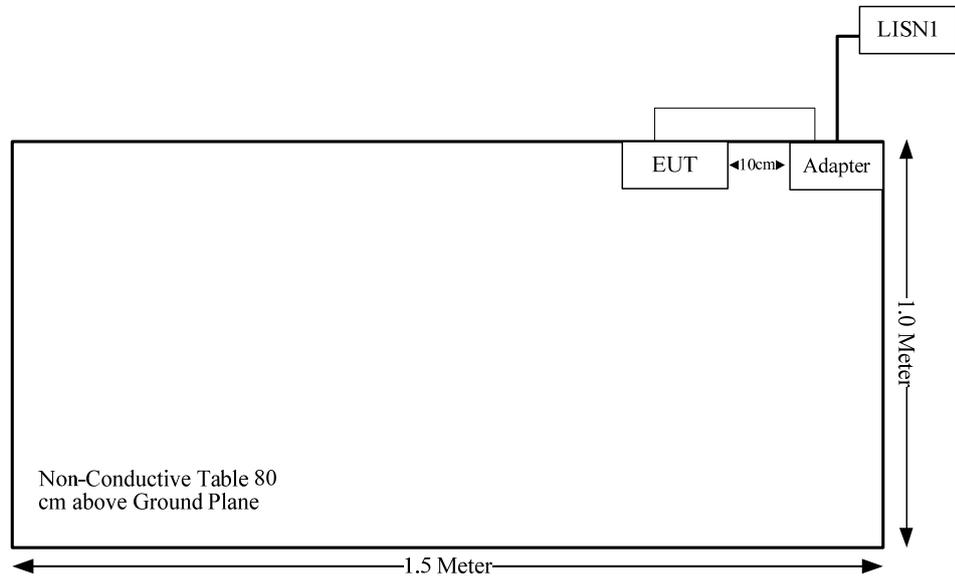

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1093	RF Exposure	Compliance
FCC§15.203,	Antenna Requirement	Compliance
FCC§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
FCC§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliance
FCC§15.407(b)	Out Of Band Emissions	Compliance
FCC§15.407(a) (e)	Emission Bandwidth	Compliance
FCC§15.407(a) RSS-247 Clause 6.2	Conducted Transmitter Output Power	Compliance
FCC§15.407 (a),	Power Spectral Density	Compliance
FCC§15.407 (h)	Dynamic Frequency Selection(DFS)	Compliance*

Compliance*: Please refer to the DFS report: RDG200109003-00F.

FCC §15.2407 (f) & §1.1310 & §2.1093 RF EXPOSURE**Applicable Standard**

According to §15.407(f), §1.1310 and §2.1093.

Body Region	Average SAR (W/Kg)	Averaging Time (minutes)	Mass Average (g)
Whole Body	0.08	6	Whole Body
Localized Head, Neck and Trunk	1.6	6	1
Localized Limbs	4	6	10

Test Result

Compliant, please refer to the SAR report: RDG200109003-SAA.

FCC §15.203- ANTENNA REQUIREMENT

Applicable Standard

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has one internal FPC antenna arrangement for BT/WLAN, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
FPC	50	0 dBi/2.4~2.5GHz 0 dBi/5.15~5.85GHz


Result: Compliance.

FCC §15.207(a)– CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (6).

EUT Setup

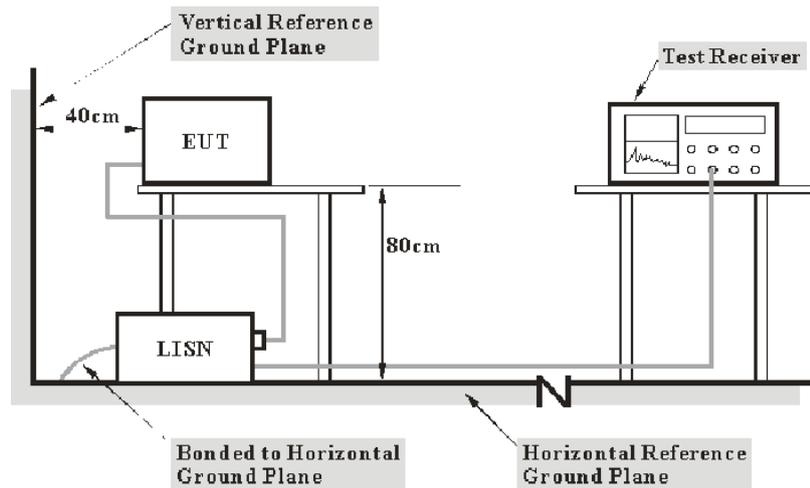

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2019-09-05	2020-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2019-09-12	2020-09-12
R&S	EMI Test Receiver	ESCI	101121	2019-05-09	2020-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the EUT was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Data


Environmental Conditions

Temperature:	18.3 °C
Relative Humidity:	59 %
ATM Pressure:	102.1 kPa
Tester:	Sern Xiang
Test Date:	2020-02-20

Test Result: Compliance

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

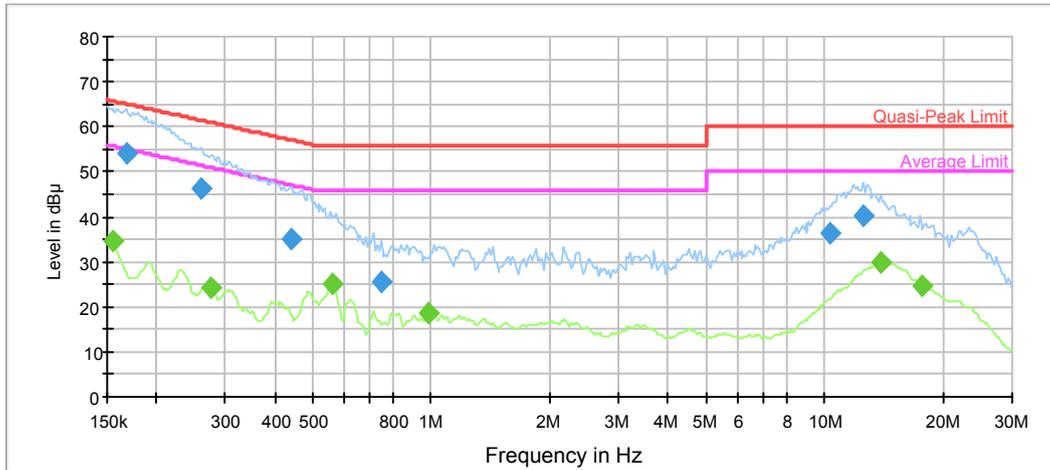

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.167350	54.0	9.000	L1	9.7	11.1	65.1
0.259279	46.1	9.000	L1	9.7	15.4	61.5
0.439339	35.2	9.000	L1	9.7	21.9	57.1
0.744445	25.7	9.000	L1	9.7	30.3	56.0
10.296163	36.4	9.000	L1	10.0	23.6	60.0
12.563275	40.2	9.000	L1	10.1	19.8	60.0

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154545	34.6	9.000	L1	9.7	21.2	55.8
0.275230	24.2	9.000	L1	9.7	26.8	51.0
0.557844	25.0	9.000	L1	9.7	21.0	46.0
0.983629	18.5	9.000	L1	9.7	27.5	46.0
13.877672	29.9	9.000	L1	10.2	20.1	50.0
17.797171	24.5	9.000	L1	10.2	25.5	50.0

AC120 V, 60 Hz, Neutral:

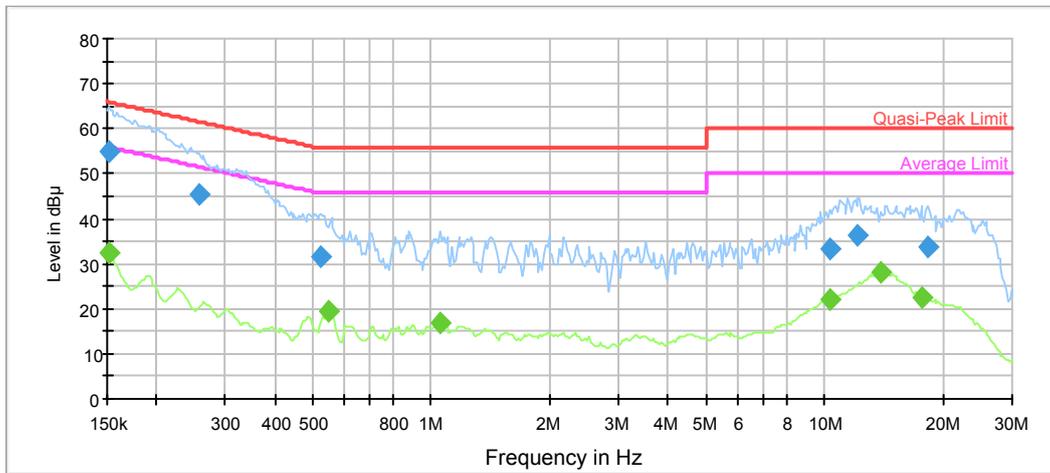

requecy (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.151500	55.0	9.000	N	9.7	11.0	65.9
0.256712	45.4	9.000	N	9.7	16.1	61.5
0.525514	31.6	9.000	N	9.6	24.4	56.0
10.296163	33.4	9.000	N	9.8	26.6	60.0
12.193791	36.3	9.000	N	9.9	23.7	60.0
18.336443	33.7	9.000	N	10.1	26.3	60.0

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.151500	32.3	9.000	N	9.7	23.7	55.9
0.546852	19.4	9.000	N	9.6	26.6	46.0
1.054583	16.7	9.000	N	9.6	29.3	46.0
10.296163	22.0	9.000	N	9.8	28.0	50.0
13.877672	28.2	9.000	N	9.9	21.8	50.0
17.797171	22.5	9.000	N	10.1	27.5	50.0

FCC §15.209, §15.205 , §15.407(b) –UNWANTED EMISSION

Applicable Standard

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.


(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


(7) The provisions of §15.205 apply to intentional radiators operating under this section.

EUT Setup


Below 1 GHz:

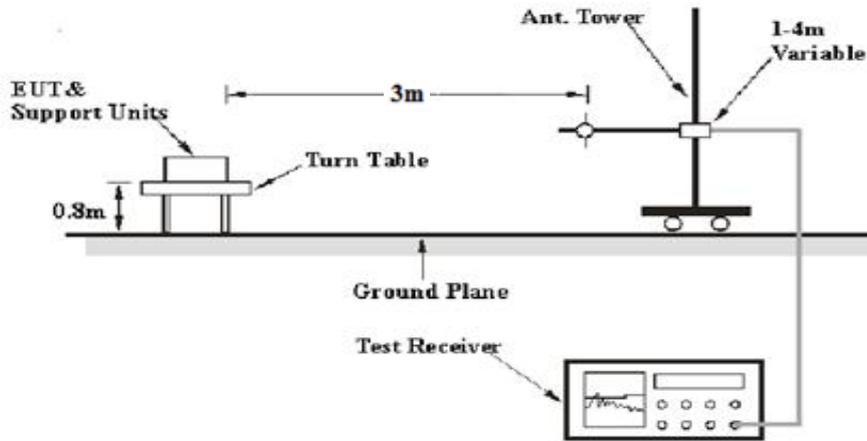

1-26.5 GHz:

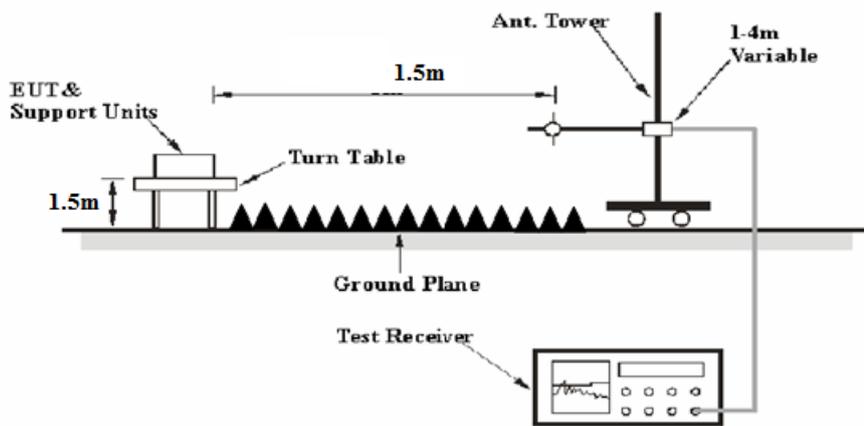

26.5-40 GHz:

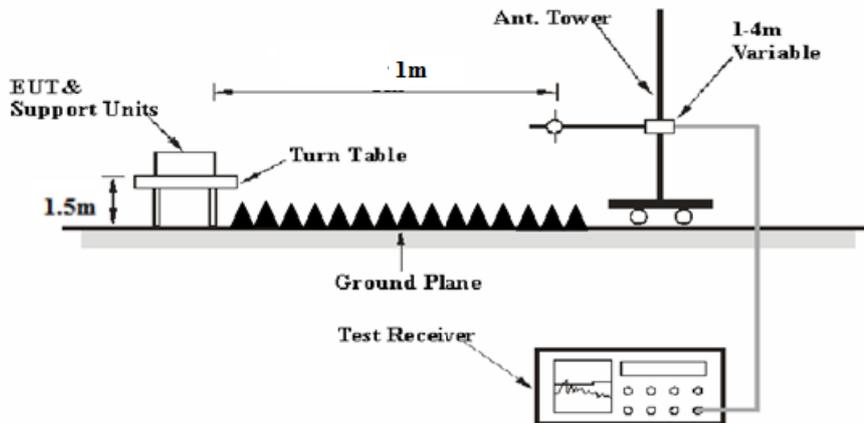

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A , above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1.5m])$ dB= 6.02 dB

or

Distance extrapolation factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1m])$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation factor. The basic equation is as follows:

$$\begin{aligned} &\text{Corrected Amplitude} \\ &= \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} - \text{Distance extrapolation factor} \end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2019-09-12	2020-09-12
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2020-01-04	2021-01-04
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2017-12-06	2020-12-05
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2017-12-06	2020-12-05
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2019-09-05	2020-09-05
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2019-09-05	2020-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
Sinoscite	Bandstop Filters	BSF5150-5850MN- 0899-003	0899003	2019-05-06	2020-05-06
Mini Circuits	High Pass Filter	VHF-6010+	31118	2019-06-16	2020-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	23°C	23°C
Relative Humidity:	52 %	45%
ATM Pressure:	101.7kPa	101.6kPa
Tester:	Jackson Zhang	Felix Wang
Test Date:	2020-02-25	2020-02-22

Test Mode: Transmitting


1) Below 1GHz(802.11a 5825 MHz was the worst):

Horizontal

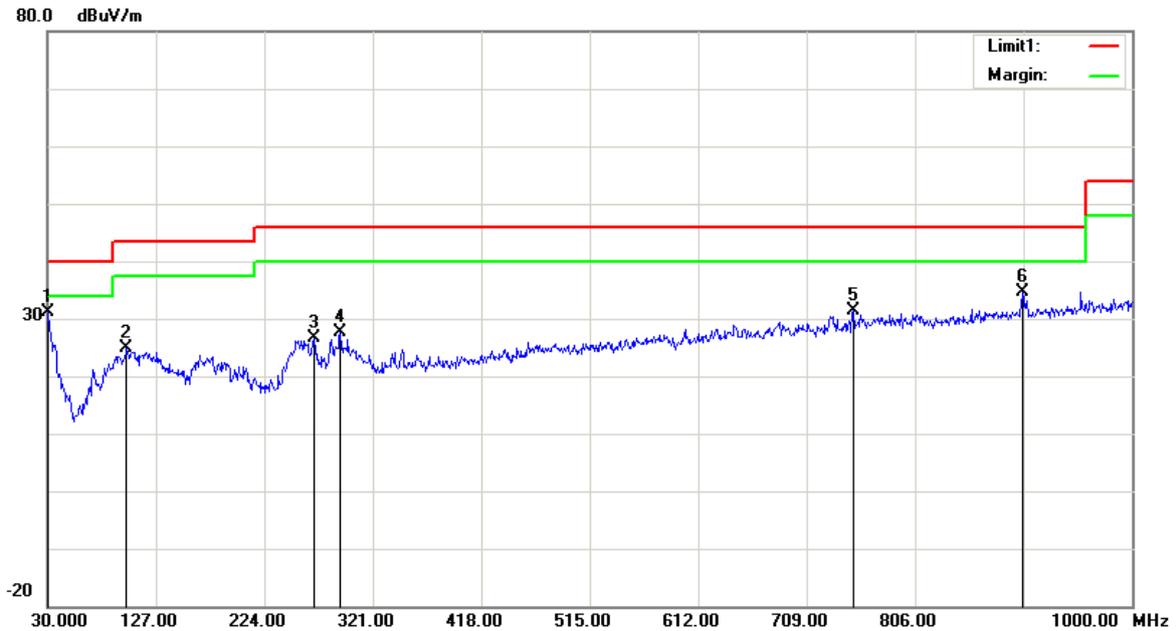

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.9700	30.21	peak	0.91	31.12	40.00	8.88
100.8100	33.57	peak	-8.60	24.97	43.50	18.53
268.6200	30.92	peak	-4.40	26.52	46.00	19.48
291.9000	31.67	peak	-4.01	27.66	46.00	18.34
750.7100	27.66	peak	3.66	31.32	46.00	14.68
902.0300	34.59	peak	0.14	34.73	46.00	11.27

Vertical

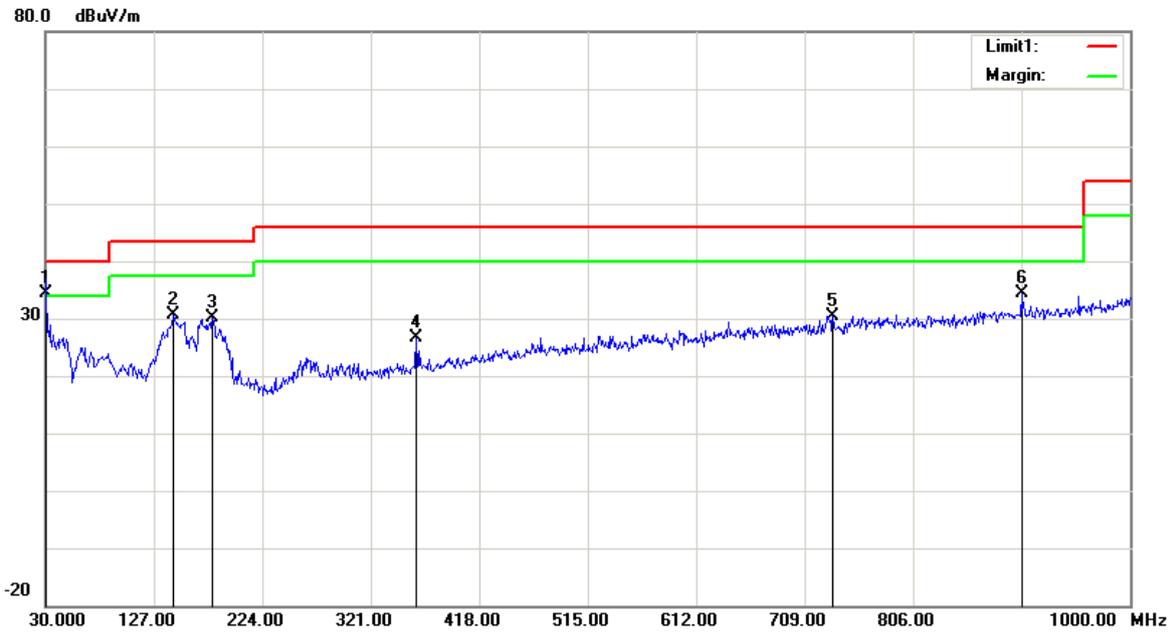

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	32.78	QP	1.72	34.50	40.00	5.50
144.4600	36.59	peak	-5.98	30.61	43.50	12.89
179.3800	37.20	peak	-7.12	30.08	43.50	13.42
361.7400	29.32	peak	-2.80	26.52	46.00	19.48
734.2200	27.23	peak	3.23	30.46	46.00	15.54
903.0000	34.18	peak	0.16	34.34	46.00	11.66

**2) 1GHz-40GHz:
5150-5250MHz
802.11a**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	68.78	PK	H	33.59	3.58	0.00	105.95	99.93	N/A	N/A
5180.00	59.43	AV	H	33.59	3.58	0.00	96.60	90.58	N/A	N/A
5180.00	71.13	PK	V	33.59	3.58	0.00	108.30	102.28	N/A	N/A
5180.00	62.06	AV	V	33.59	3.58	0.00	99.23	93.21	N/A	N/A
5150.00	28.63	PK	V	33.54	3.56	0.00	65.73	59.71	74.00	14.29
5150.00	16.30	AV	V	33.54	3.56	0.00	53.40	47.38	54.00	6.62
10360.00	35.62	PK	V	38.17	6.29	25.46	54.62	48.6	68.20	19.60
15540.00	36.03	PK	V	38.06	8.85	24.27	58.67	52.65	74.00	21.35
15540.00	24.53	AV	V	38.06	8.85	24.27	47.17	41.15	54.00	12.85
Middle Channel: 5200 MHz										
5200.00	68.55	PK	H	33.62	3.60	0.00	105.77	99.75	N/A	N/A
5200.00	59.23	AV	H	33.62	3.60	0.00	96.45	90.43	N/A	N/A
5200.00	71.36	PK	V	33.62	3.60	0.00	108.58	102.56	N/A	N/A
5200.00	62.25	AV	V	33.62	3.60	0.00	99.47	93.45	N/A	N/A
10400.00	35.38	PK	V	38.18	6.32	25.46	54.42	48.4	68.20	19.80
15600.00	36.07	PK	V	38.00	8.83	24.31	58.59	52.57	74.00	21.43
15600.00	24.56	AV	V	38.00	8.83	24.31	47.08	41.06	54.00	12.94
High Channel: 5240 MHz										
5240.00	67.79	PK	H	33.68	3.52	0.00	104.99	98.97	N/A	N/A
5240.00	58.14	AV	H	33.68	3.52	0.00	95.34	89.32	N/A	N/A
5240.00	70.07	PK	V	33.68	3.52	0.00	107.27	101.25	N/A	N/A
5240.00	60.76	AV	V	33.68	3.52	0.00	97.96	91.94	N/A	N/A
5350.00	27.67	PK	V	33.86	3.52	0.00	65.05	59.03	74.00	14.97
5350.00	15.80	AV	V	33.86	3.52	0.00	53.18	47.16	54.00	6.84
10480.00	35.55	PK	V	38.20	6.37	25.47	54.65	48.63	68.20	19.57
15720.00	36.11	PK	V	37.88	8.79	24.39	58.39	52.37	74.00	21.63
15720.00	24.59	AV	V	37.88	8.79	24.39	46.87	40.85	54.00	13.15

802.11n ht20

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	67.29	PK	H	33.59	3.58	0.00	104.46	98.44	N/A	N/A
5180.00	57.97	AV	H	33.59	3.58	0.00	95.14	89.12	N/A	N/A
5180.00	71.15	PK	V	33.59	3.58	0.00	108.32	102.3	N/A	N/A
5180.00	61.52	AV	V	33.59	3.58	0.00	98.69	92.67	N/A	N/A
5150.00	28.92	PK	V	33.54	3.56	0.00	66.02	60	74.00	14.00
5150.00	16.12	AV	V	33.54	3.56	0.00	53.22	47.2	54.00	6.80
10360.00	35.34	PK	V	38.17	6.29	25.46	54.34	48.32	68.20	19.88
15540.00	35.88	PK	V	38.06	8.85	24.27	58.52	52.5	74.00	21.50
15540.00	23.57	AV	V	38.06	8.85	24.27	46.21	40.19	54.00	13.81
Middle Channel: 5200 MHz										
5200.00	67.75	PK	H	33.62	3.60	0.00	104.97	98.95	N/A	N/A
5200.00	58.11	AV	H	33.62	3.60	0.00	95.33	89.31	N/A	N/A
5200.00	71.90	PK	V	33.62	3.60	0.00	109.12	103.1	N/A	N/A
5200.00	62.05	AV	V	33.62	3.60	0.00	99.27	93.25	N/A	N/A
10400.00	35.87	PK	V	38.18	6.32	25.46	54.91	48.89	68.20	19.31
15600.00	35.93	PK	V	38.00	8.83	24.31	58.45	52.43	74.00	21.57
15600.00	23.46	AV	V	38.00	8.83	24.31	45.98	39.96	54.00	14.04
High Channel: 5240 MHz										
5240.00	66.56	PK	H	33.68	3.52	0.00	103.76	97.74	N/A	N/A
5240.00	57.63	AV	H	33.68	3.52	0.00	94.83	88.81	N/A	N/A
5240.00	70.71	PK	V	33.68	3.52	0.00	107.91	101.89	N/A	N/A
5240.00	61.62	AV	V	33.68	3.52	0.00	98.82	92.8	N/A	N/A
5350.00	27.61	PK	V	33.86	3.52	0.00	64.99	58.97	74.00	15.03
5350.00	15.61	AV	V	33.86	3.52	0.00	52.99	46.97	54.00	7.03
10480.00	35.66	PK	V	38.20	6.37	25.47	54.76	48.74	68.20	19.46
15720.00	36.15	PK	V	37.88	8.79	24.39	58.43	52.41	74.00	21.59
15720.00	23.88	AV	V	37.88	8.79	24.39	46.16	40.14	54.00	13.86

802.11n ht40

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Extrapolation result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5190 MHz										
5190.00	65.33	PK	H	33.60	3.59	0.00	102.52	96.5	N/A	N/A
5190.00	54.90	AV	H	33.60	3.59	0.00	92.09	86.07	N/A	N/A
5190.00	68.45	PK	V	33.60	3.59	0.00	105.64	99.62	N/A	N/A
5190.00	58.61	AV	V	33.60	3.59	0.00	95.80	89.78	N/A	N/A
5150.00	36.08	PK	V	33.54	3.56	0.00	73.18	67.16	74.00	6.84
5150.00	20.19	AV	V	33.54	3.56	0.00	57.29	51.27	54.00	2.73
10380.00	36.55	PK	V	38.18	6.31	25.46	55.58	49.56	68.20	18.64
15570.00	36.11	PK	V	38.03	8.84	24.29	58.69	52.67	74.00	21.33
15570.00	24.22	AV	V	38.03	8.84	24.29	46.80	40.78	54.00	13.22
High Channel: 5230 MHz										
5230.00	64.22	PK	H	33.67	3.54	0.00	101.43	95.41	N/A	N/A
5230.00	54.03	AV	H	33.67	3.54	0.00	91.24	85.22	N/A	N/A
5230.00	67.35	PK	V	33.67	3.54	0.00	104.56	98.54	N/A	N/A
5230.00	57.73	AV	V	33.67	3.54	0.00	94.94	88.92	N/A	N/A
5350.00	27.33	PK	V	33.86	3.52	0.00	64.71	58.69	74.00	15.31
5350.00	15.95	AV	V	33.86	3.52	0.00	53.33	47.31	54.00	6.69
10460.00	36.46	PK	V	38.19	6.36	25.47	55.54	49.52	68.20	18.68
15690.00	35.99	PK	V	37.91	8.80	24.37	58.33	52.31	74.00	21.69
15690.00	24.14	AV	V	37.91	8.80	24.37	46.48	40.46	54.00	13.54

**5470-5725MHz:
802.11a**

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBµV/m	Extrapolation result dBµV/m	Limit dBµV/m	Margin dB
	Reading dBµV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
Low Channel: 5500 MHz										
5500.00	71.14	PK	H	34.10	3.54	0.00	108.78	102.76	N/A	N/A
5500.00	61.15	AV	H	34.10	3.54	0.00	98.79	92.77	N/A	N/A
5500.00	69.52	PK	V	34.10	3.54	0.00	107.16	101.14	N/A	N/A
5500.00	59.84	AV	V	34.10	3.54	0.00	97.48	91.46	N/A	N/A
5460.00	31.28	PK	V	34.05	3.56	0.00	68.89	62.87	74.00	11.13
5460.00	16.26	AV	V	34.05	3.56	0.00	53.87	47.85	54.00	6.15
11000.00	36.75	PK	V	38.50	6.57	25.45	56.37	50.35	74.00	23.65
11000.00	23.94	AV	V	38.50	6.57	25.45	43.56	37.54	54.00	16.46
16500.00	36.39	PK	V	38.20	8.63	24.27	58.95	52.93	68.20	15.27
Middle Channel: 5580 MHz										
5580.00	70.32	PK	H	34.13	3.56	0.00	108.01	101.99	N/A	N/A
5580.00	61.17	AV	H	34.13	3.56	0.00	98.86	92.84	N/A	N/A
5580.00	69.51	PK	V	34.13	3.56	0.00	107.20	101.18	N/A	N/A
5580.00	59.84	AV	V	34.13	3.56	0.00	97.53	91.51	N/A	N/A
11160.00	36.63	PK	V	38.66	6.58	25.47	56.40	50.38	74.00	23.62
11160.00	23.81	AV	V	38.66	6.58	25.47	43.58	37.56	54.00	16.44
16740.00	36.22	PK	V	39.16	8.67	24.12	59.93	53.91	68.20	14.29
High Channel: 5700 MHz										
5700.00	67.67	PK	H	34.18	3.68	0.00	105.53	99.51	N/A	N/A
5700.00	58.24	AV	H	34.18	3.68	0.00	96.10	90.08	N/A	N/A
5700.00	66.50	PK	V	34.18	3.68	0.00	104.36	98.34	N/A	N/A
5700.00	57.12	AV	V	34.18	3.68	0.00	94.98	88.96	N/A	N/A
5725.00	34.75	PK	V	34.19	3.69	0.00	72.63	66.61	68.20	1.59
11400.00	36.65	PK	V	38.90	6.59	25.50	56.64	50.62	74.00	23.38
11400.00	23.86	AV	V	38.90	6.59	25.50	43.85	37.83	54.00	16.17
17100.00	36.06	PK	V	40.78	8.75	23.85	61.74	55.72	68.20	12.48

802.11n ht20

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBµV	PK/QP/AV	H/V	dB/m	dB	dB	dBµV/m	dBµV/m	dBµV/m	dB
Low Channel: 5500 MHz										
5500.00	70.54	PK	H	34.10	3.54	0.00	108.18	102.16	N/A	N/A
5500.00	60.96	AV	H	34.10	3.54	0.00	98.60	92.58	N/A	N/A
5500.00	70.16	PK	V	34.10	3.54	0.00	107.80	101.78	N/A	N/A
5500.00	61.26	AV	V	34.10	3.54	0.00	98.90	92.88	N/A	N/A
5460.00	31.95	PK	V	34.05	3.56	0.00	69.56	63.54	74.00	10.46
5460.00	16.72	AV	V	34.05	3.56	0.00	54.33	48.31	54.00	5.69
11000.00	36.04	PK	V	38.50	6.57	25.45	55.66	49.64	74.00	24.36
11000.00	23.41	AV	V	38.50	6.57	25.45	43.03	37.01	54.00	16.99
16500.00	35.69	PK	V	38.20	8.63	24.27	58.25	52.23	68.20	15.97
Middle Channel: 5580 MHz										
5580.00	69.59	PK	H	34.13	3.56	0.00	107.28	101.26	N/A	N/A
5580.00	60.43	AV	H	34.13	3.56	0.00	98.12	92.1	N/A	N/A
5580.00	67.84	PK	V	34.13	3.56	0.00	105.53	99.51	N/A	N/A
5580.00	58.79	AV	V	34.13	3.56	0.00	96.48	90.46	N/A	N/A
11160.00	36.01	PK	V	38.66	6.58	25.47	55.78	49.76	74.00	24.24
11160.00	23.32	AV	V	38.66	6.58	25.47	43.09	37.07	54.00	16.93
16740.00	35.78	PK	V	39.16	8.67	24.12	59.49	53.47	68.20	14.73
High Channel: 5700 MHz										
5700.00	70.12	PK	H	34.18	3.68	0.00	107.98	101.96	N/A	N/A
5700.00	60.08	AV	H	34.18	3.68	0.00	97.94	91.92	N/A	N/A
5700.00	68.11	PK	V	34.18	3.68	0.00	105.97	99.95	N/A	N/A
5700.00	58.74	AV	V	34.18	3.68	0.00	96.60	90.58	N/A	N/A
5725.00	35.22	PK	V	34.19	3.69	0.00	73.10	67.08	68.20	1.12
11400.00	36.22	PK	V	38.90	6.59	25.50	56.21	50.19	74.00	23.81
11400.00	23.76	AV	V	38.90	6.59	25.50	43.75	37.73	54.00	16.27
17100.00	35.83	PK	V	40.78	8.75	23.85	61.51	55.49	68.20	12.71

802.11n ht40

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBµV/m	Extrapolation result dBµV/m	Limit dBµV/m	Margin dB
	Reading dBµV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
Low Channel: 5510 MHz										
5510.00	66.93	PK	H	34.10	3.54	0.00	104.57	98.55	N/A	N/A
5510.00	57.60	AV	H	34.10	3.54	0.00	95.24	89.22	N/A	N/A
5510.00	63.71	PK	V	34.10	3.54	0.00	101.35	95.33	N/A	N/A
5510.00	52.35	AV	V	34.10	3.54	0.00	89.99	83.97	N/A	N/A
5460.00	36.66	PK	V	34.05	3.56	0.00	74.27	68.25	74.00	5.75
5460.00	20.14	AV	V	34.05	3.56	0.00	57.75	51.73	54.00	2.27
11020.00	35.60	PK	V	38.52	6.57	25.45	55.24	49.22	74.00	24.78
11020.00	23.25	AV	V	38.52	6.57	25.45	42.89	36.87	54.00	17.13
16530.00	36.01	PK	V	38.32	8.64	24.25	58.72	52.7	68.20	15.50
Middle Channel: 5550 MHz										
5550.00	68.85	PK	H	34.12	3.56	0.00	106.53	100.51	N/A	N/A
5550.00	59.19	AV	H	34.12	3.56	0.00	96.87	90.85	N/A	N/A
5550.00	66.94	PK	V	34.12	3.56	0.00	104.62	98.6	N/A	N/A
5550.00	57.15	AV	V	34.12	3.56	0.00	94.83	88.81	N/A	N/A
11100.00	35.77	PK	V	38.60	6.57	25.46	55.48	49.46	74.00	24.54
11100.00	23.36	AV	V	38.60	6.57	25.46	43.07	37.05	54.00	16.95
16650.00	36.05	PK	V	38.80	8.66	24.17	59.34	53.32	68.20	14.88
High Channel: 5670 MHz										
5670.00	67.94	PK	H	34.17	3.65	0.00	105.76	99.74	N/A	N/A
5670.00	59.12	AV	H	34.17	3.65	0.00	96.94	90.92	N/A	N/A
5670.00	66.35	PK	V	34.17	3.65	0.00	104.17	98.15	N/A	N/A
5670.00	56.50	AV	V	34.17	3.65	0.00	94.32	88.3	N/A	N/A
5725.00	35.10	PK	V	34.19	3.69	0.00	72.98	66.96	68.20	1.24
5725.00	18.51	AV	V	34.19	3.69	0.00	56.39	50.37	54.00	3.63
11340.00	35.69	PK	V	38.84	6.58	25.49	55.62	49.6	74.00	24.40
11340.00	23.28	AV	V	38.84	6.58	25.49	43.21	37.19	54.00	16.81
17010.00	36.13	PK	V	40.26	8.72	23.94	61.17	55.15	68.20	13.05

**5725-5850MHz
802.11a**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	69.27	PK	H	34.20	3.69	0.00	107.16	101.14	N/A	N/A
5745.00	59.79	AV	H	34.20	3.69	0.00	97.68	91.66	N/A	N/A
5745.00	66.90	PK	V	34.20	3.69	0.00	104.79	98.77	N/A	N/A
5745.00	57.76	AV	V	34.20	3.69	0.00	95.65	89.63	N/A	N/A
5725.00	46.47	PK	V	34.19	3.69	0.00	84.35	78.33	122.20	43.87
5720.00	37.09	PK	V	34.19	3.69	0.00	74.97	68.95	110.80	41.85
5700.00	27.48	PK	V	34.18	3.68	0.00	65.34	59.32	105.20	45.88
5650.00	28.12	PK	V	34.16	3.63	0.00	65.91	59.89	68.20	8.31
11490.00	35.24	PK	V	38.99	6.59	25.51	55.31	49.29	74.00	24.71
11490.00	23.11	AV	V	38.99	6.59	25.51	43.18	37.16	54.00	16.84
17235.00	35.86	PK	V	41.56	8.78	23.72	62.48	56.46	68.20	11.74
Middle Channel: 5785 MHz										
5785.00	65.89	PK	H	34.21	3.71	0.00	103.81	97.79	N/A	N/A
5785.00	56.37	AV	H	34.21	3.71	0.00	94.29	88.27	N/A	N/A
5785.00	65.70	PK	V	34.21	3.71	0.00	103.62	97.6	N/A	N/A
5785.00	55.83	AV	V	34.21	3.71	0.00	93.75	87.73	N/A	N/A
11570.00	35.82	PK	V	39.00	6.61	25.46	55.97	49.95	74.00	24.05
11570.00	23.53	AV	V	39.00	6.61	25.46	43.68	37.66	54.00	16.34
17355.00	36.14	PK	V	42.26	8.81	23.60	63.61	57.59	68.20	10.61
High Channel: 5825 MHz										
5825.00	64.55	PK	H	34.23	3.73	0.00	102.51	96.49	N/A	N/A
5825.00	54.85	AV	H	34.23	3.73	0.00	92.81	86.79	N/A	N/A
5825.00	65.64	PK	V	34.23	3.73	0.00	103.60	97.58	N/A	N/A
5825.00	56.25	AV	V	34.23	3.73	0.00	94.21	88.19	N/A	N/A
5850.00	27.60	PK	V	34.24	3.75	0.00	65.59	59.57	122.20	62.63
5855.00	26.31	PK	V	34.24	3.75	0.00	64.30	58.28	110.80	52.52
5875.00	26.85	PK	V	34.25	3.77	0.00	64.87	58.85	105.20	46.35
5925.00	26.83	PK	V	34.27	3.80	0.00	64.90	58.88	68.20	9.32
11650.00	35.57	PK	V	39.00	6.64	25.41	55.80	49.78	74.00	24.22
11650.00	23.33	AV	V	39.00	6.64	25.41	43.56	37.54	54.00	16.46
17475.00	36.04	PK	V	42.96	8.84	23.48	64.36	58.34	68.20	9.86

802.11n ht20




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	66.75	PK	H	34.20	3.69	0.00	104.64	98.62	N/A	N/A
5745.00	57.27	AV	H	34.20	3.69	0.00	95.16	89.14	N/A	N/A
5745.00	67.25	PK	V	34.20	3.69	0.00	105.14	99.12	N/A	N/A
5745.00	57.41	AV	V	34.20	3.69	0.00	95.30	89.28	N/A	N/A
5725.00	43.35	PK	V	34.19	3.69	0.00	81.23	75.21	122.20	46.99
5720.00	36.03	PK	V	34.19	3.69	0.00	73.91	67.89	110.80	42.91
5700.00	28.86	PK	V	34.18	3.68	0.00	66.72	60.7	105.20	44.50
5650.00	27.71	PK	V	34.16	3.63	0.00	65.50	59.48	68.20	8.72
11490.00	35.77	PK	V	38.99	6.59	25.51	55.84	49.82	74.00	24.18
11490.00	23.53	AV	V	38.99	6.59	25.51	43.60	37.58	54.00	16.42
17235.00	35.96	PK	V	41.56	8.78	23.72	62.58	56.56	68.20	11.64
Middle Channel: 5785 MHz										
5785.00	62.88	PK	H	34.21	3.71	0.00	100.80	94.78	N/A	N/A
5785.00	52.75	AV	H	34.21	3.71	0.00	90.67	84.65	N/A	N/A
5785.00	63.36	PK	V	34.21	3.71	0.00	101.28	95.26	N/A	N/A
5785.00	53.72	AV	V	34.21	3.71	0.00	91.64	85.62	N/A	N/A
11570.00	35.77	PK	V	39.00	6.61	25.46	55.92	49.9	74.00	24.10
11570.00	23.46	AV	V	39.00	6.61	25.46	43.61	37.59	54.00	16.41
17355.00	35.85	PK	V	42.26	8.81	23.60	63.32	57.3	68.20	10.90
High Channel: 5825 MHz										
5825.00	64.17	PK	H	34.23	3.73	0.00	102.13	96.11	N/A	N/A
5825.00	54.26	AV	H	34.23	3.73	0.00	92.22	86.2	N/A	N/A
5825.00	65.31	PK	V	34.23	3.73	0.00	103.27	97.25	N/A	N/A
5825.00	55.31	AV	V	34.23	3.73	0.00	93.27	87.25	N/A	N/A
5850.00	30.34	PK	V	34.24	3.75	0.00	68.33	62.31	122.20	59.89
5855.00	27.56	PK	V	34.24	3.75	0.00	65.55	59.53	110.80	51.27
5875.00	27.51	PK	V	34.25	3.77	0.00	65.53	59.51	105.20	45.69
5925.00	27.00	PK	V	34.27	3.80	0.00	65.07	59.05	68.20	9.15
11650.00	35.63	PK	V	39.00	6.64	25.41	55.86	49.84	74.00	24.16
11650.00	23.41	AV	V	39.00	6.64	25.41	43.64	37.62	54.00	16.38
17475.00	36.13	PK	V	42.96	8.84	23.48	64.45	58.43	68.20	9.77


802.11n ht40

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5755 MHz										
5755.00	64.92	PK	H	34.20	3.70	0.00	102.82	96.8	N/A	N/A
5755.00	55.22	AV	H	34.20	3.70	0.00	93.12	87.1	N/A	N/A
5755.00	66.56	PK	V	34.20	3.70	0.00	104.46	98.44	N/A	N/A
5755.00	56.47	AV	V	34.20	3.70	0.00	94.37	88.35	N/A	N/A
5725.00	46.12	PK	V	34.19	3.69	0.00	84.00	77.98	122.20	44.22
5720.00	45.13	PK	V	34.19	3.69	0.00	83.01	76.99	110.80	33.81
5700.00	33.94	PK	V	34.18	3.68	0.00	71.80	65.78	105.20	39.42
5650.00	28.15	PK	V	34.16	3.63	0.00	65.94	59.92	68.20	8.28
11510.00	35.51	PK	V	39.00	6.59	25.50	55.60	49.58	74.00	24.42
11510.00	23.43	AV	V	39.00	6.59	25.50	43.52	37.5	54.00	16.50
17265.00	35.17	PK	V	41.74	8.79	23.69	62.01	55.99	68.20	12.21
High Channel: 5795 MHz										
5795.00	63.87	PK	H	34.22	3.71	0.00	101.80	95.78	N/A	N/A
5795.00	52.89	AV	H	34.22	3.71	0.00	90.82	84.8	N/A	N/A
5795.00	65.74	PK	V	34.22	3.71	0.00	103.67	97.65	N/A	N/A
5795.00	54.96	AV	V	34.22	3.71	0.00	92.89	86.87	N/A	N/A
5850.00	29.31	PK	V	34.24	3.75	0.00	67.30	61.28	122.20	60.92
5855.00	28.43	PK	V	34.24	3.75	0.00	66.42	60.4	110.80	50.40
5875.00	28.83	PK	V	34.25	3.77	0.00	66.85	60.83	105.20	44.37
5925.00	27.98	PK	V	34.27	3.80	0.00	66.05	60.03	68.20	8.17
11590.00	35.52	PK	V	39.00	6.62	25.45	55.69	49.67	74.00	24.33
11590.00	23.59	AV	V	39.00	6.62	25.45	43.76	37.74	54.00	16.26
17385.00	35.63	PK	V	42.43	8.82	23.57	63.31	57.29	68.20	10.91

Test Plots(For worst mode 802.11n ht20 5825MHz)
Horizontal



Fundamental
Test with Band
Rejection Filter

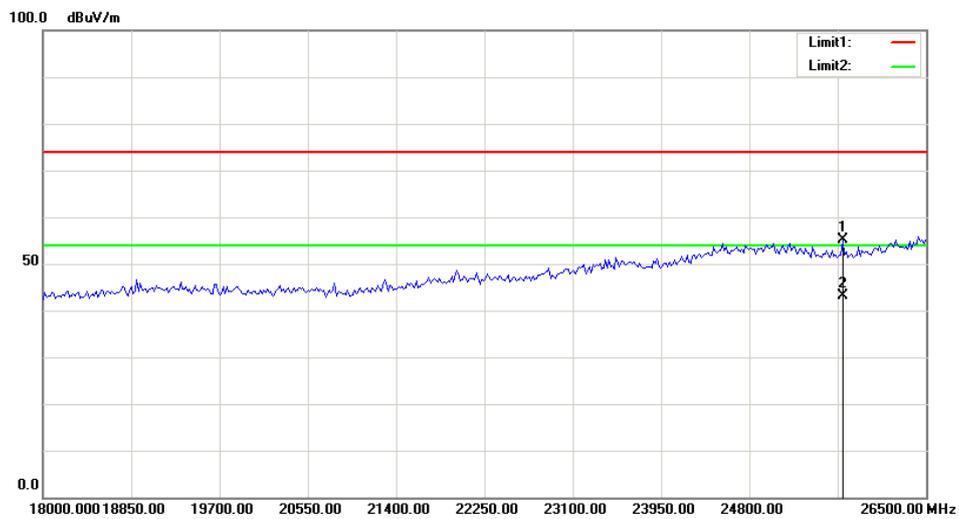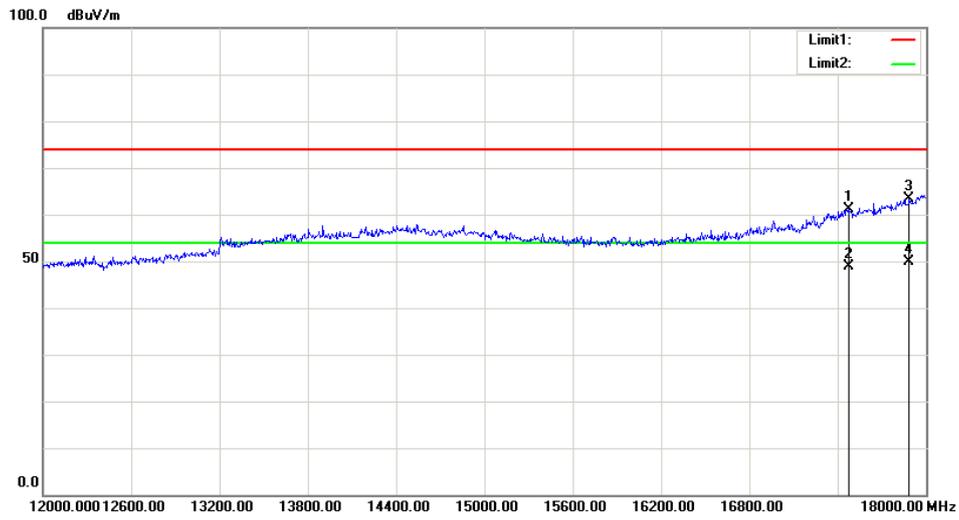
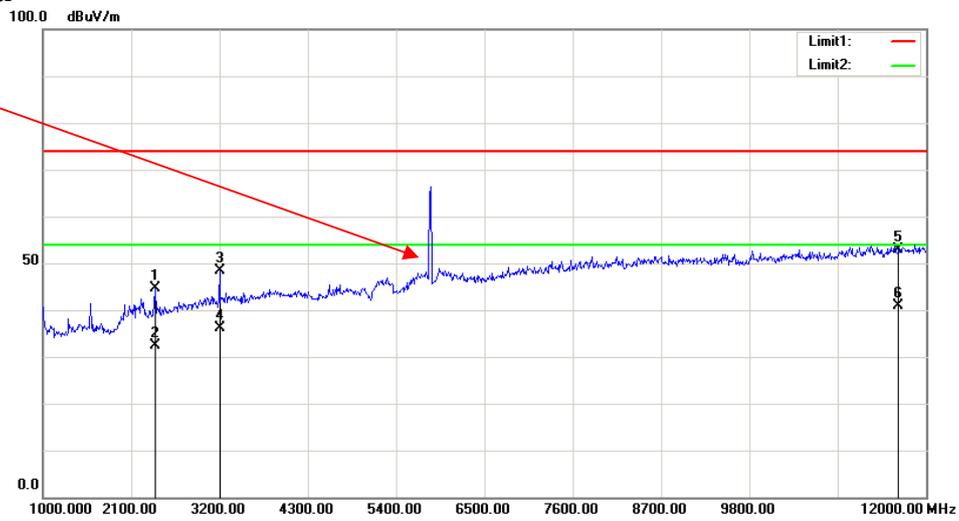


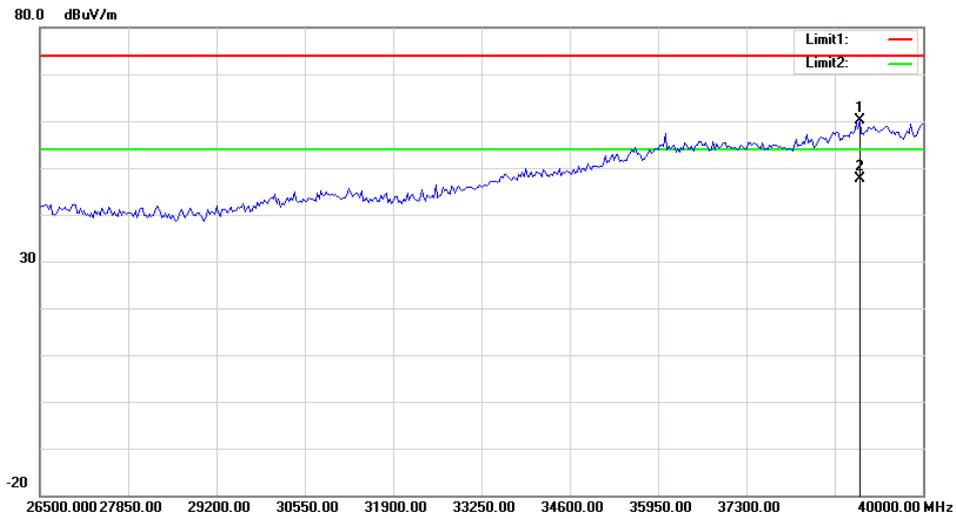

Vertical

Fundamental Test with Band Rejection Filter

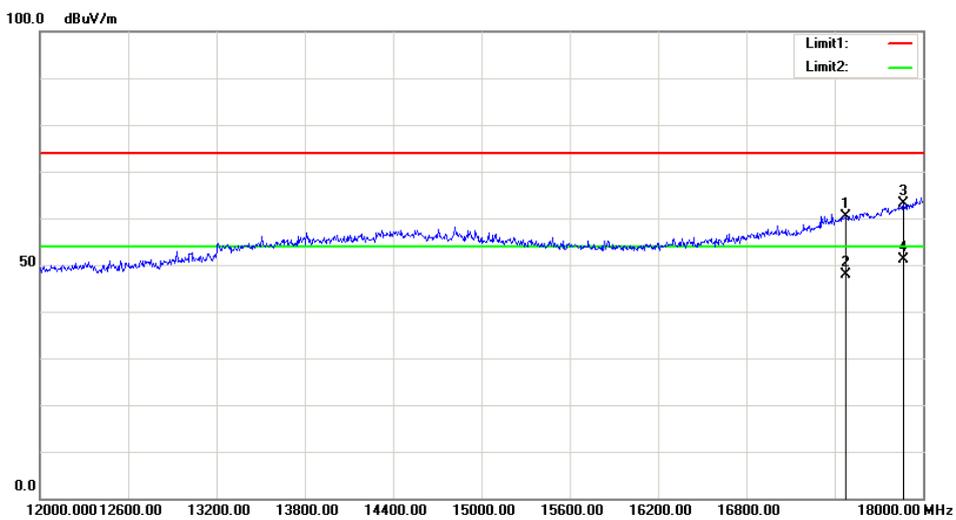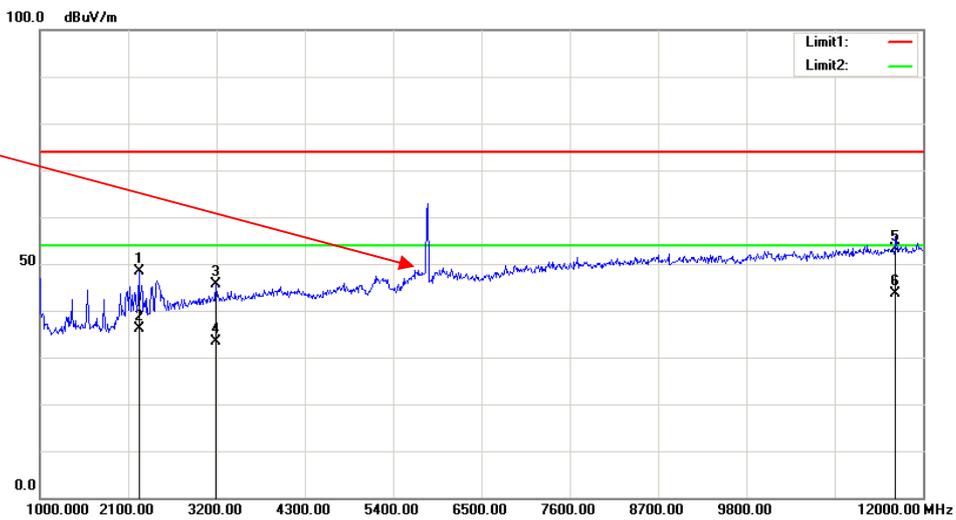

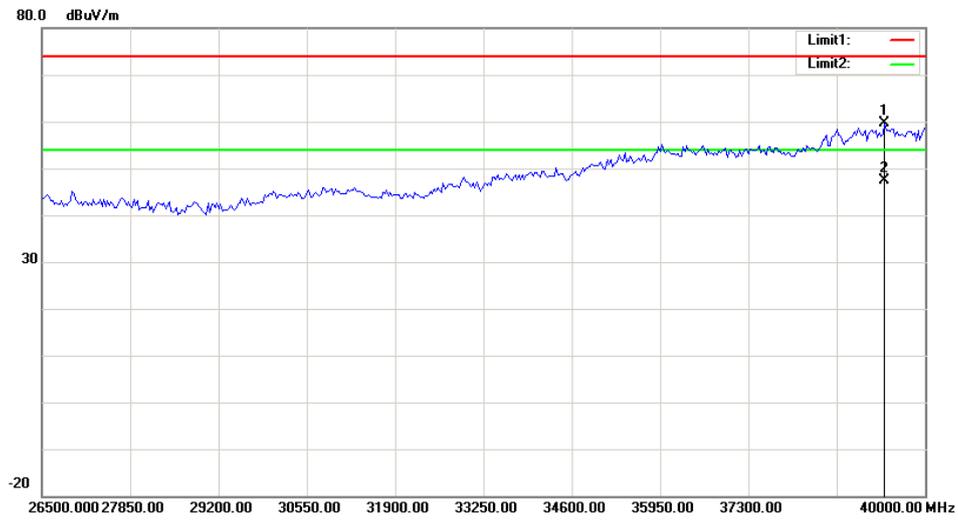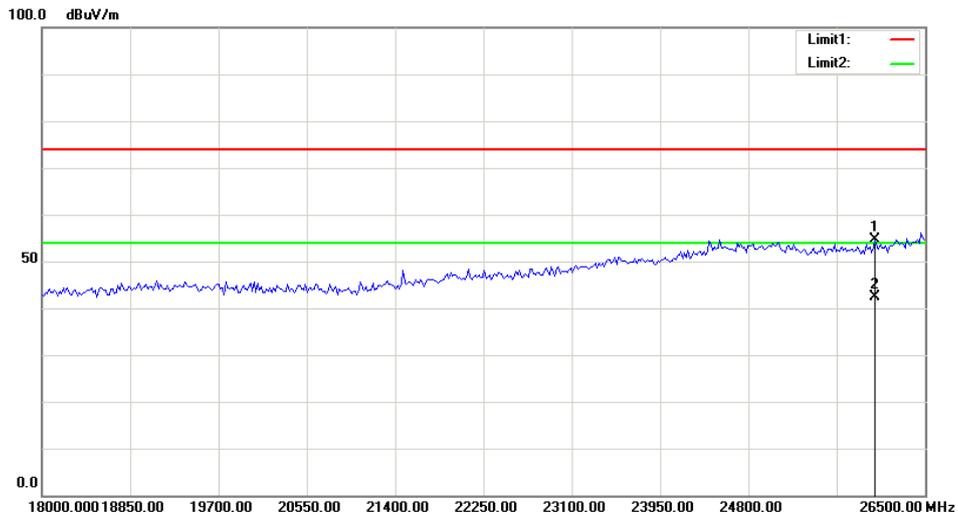

FCC §15.407(a)(e)–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH

Applicable Standard

15.407(a) (e).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2020-01-09	2021-01-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	21.4°C
Relative Humidity:	64 %
ATM Pressure:	102.4 kPa
Tester:	Fay Hu
Test Date:	2020-02-12

Test Result: Pass.

Please refer to the following tables and plots.

Test mode: Transmitting

5150-5250MHz:

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5180	26.800	17.725
	5200	28.400	18.044
	5240	26.240	17.645
802.11n ht20	5180	27.360	18.523
	5200	29.040	18.762
	5240	28.960	18.523
802.11n ht40	5190	50.240	38.004
	5230	54.240	38.004

5470-5725MHz:


Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5500	28.640	17.964
	5580	30.320	17.964
	5700	30.720	18.044
802.11n ht20	5500	31.120	18.603
	5580	30.720	18.842
	5700	31.520	18.762
802.11n ht40	5510	56.800	38.802
	5550	60.160	38.643
	5670	58.720	39.760

5725-5850MHz:

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	6 dB Emission Bandwidth Limits (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5745	16.480	≥0.5	17.884
	5785	16.480	≥0.5	17.884
	5825	16.480	≥0.5	17.964
802.11n ht20	5745	17.680	≥0.5	18.683
	5785	17.680	≥0.5	18.603
	5825	17.760	≥0.5	18.762
802.11n ht40	5755	35.840	≥0.5	40.080
	5795	35.520	≥0.5	39.441


5150-5250MHz:
26dB Emission Bandwidth:

802.11a Low Channel

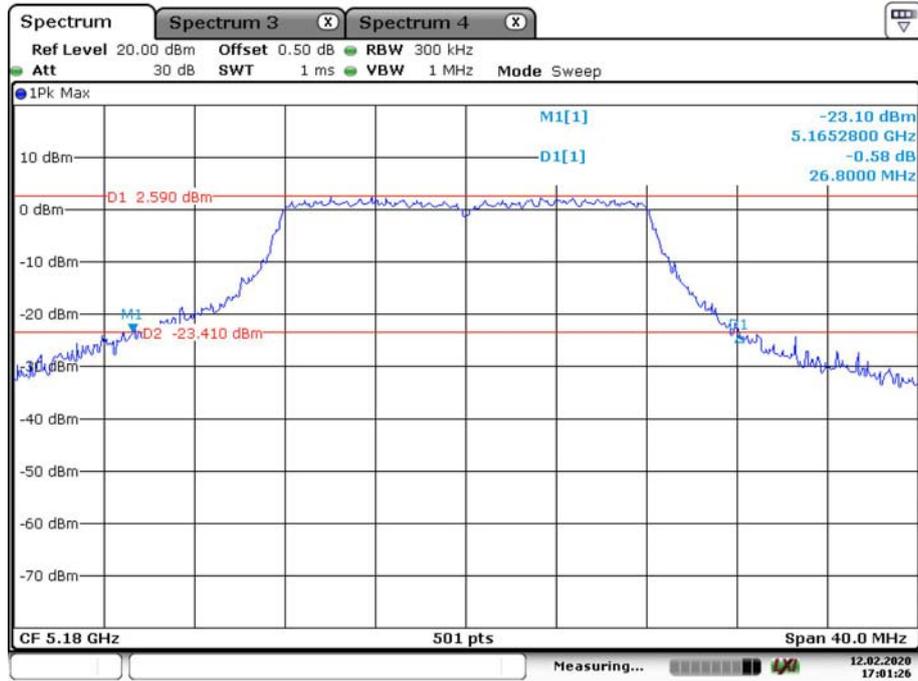


Date: 12.FEB.2020 17:01:26

802.11a Middle Channel

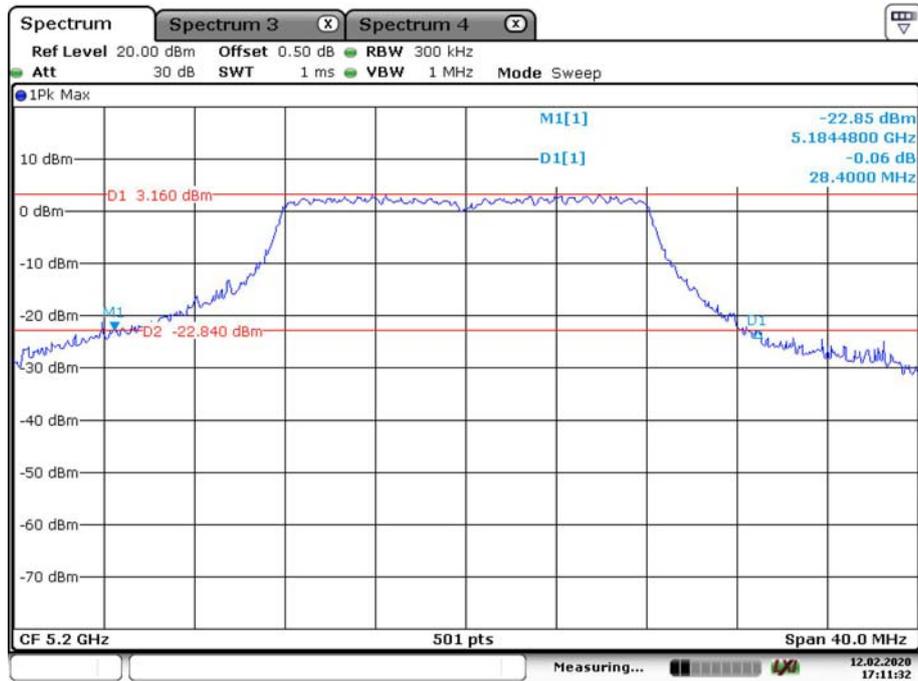


Date: 12.FEB.2020 17:11:32

802.11a High Channel

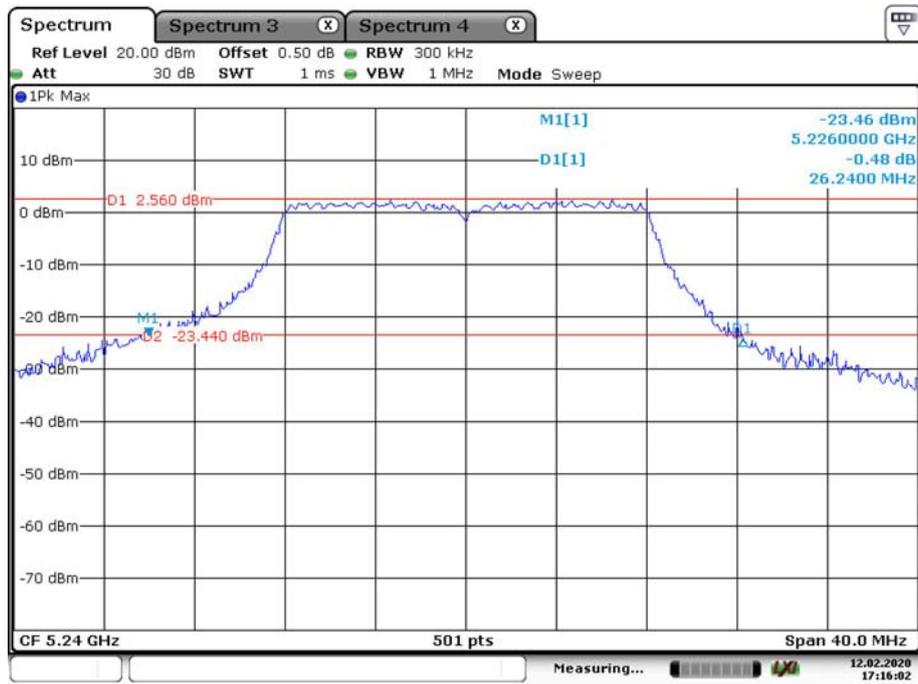

Date: 12.FEB.2020 17:16:03

802.11n ht20 Low Channel

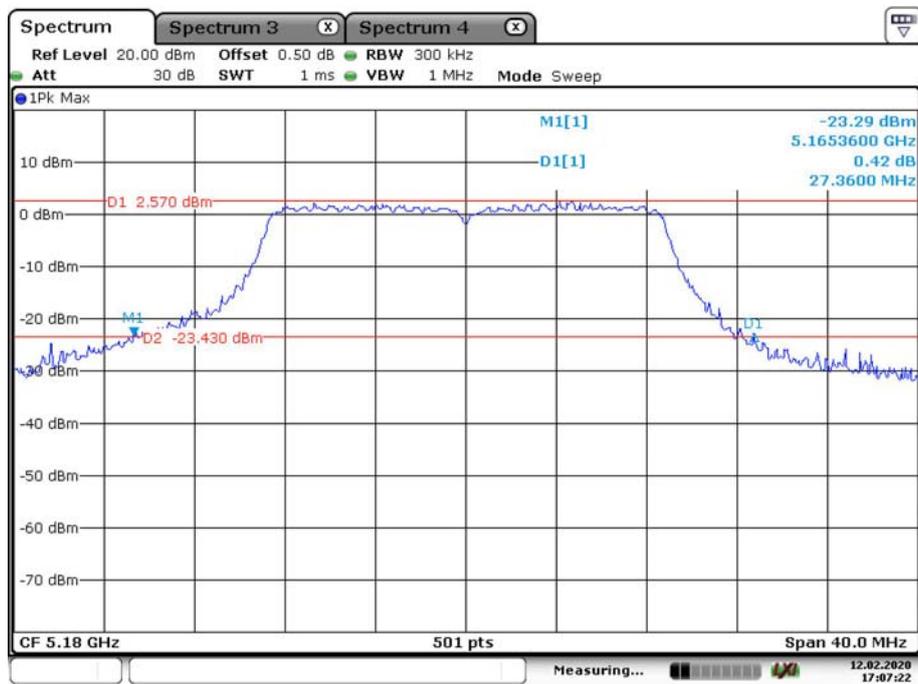


Date: 12.FEB.2020 17:07:22

802.11n ht20 Middle Channel




Date: 12.FEB.2020 17:13:31

802.11n ht20 High Channel

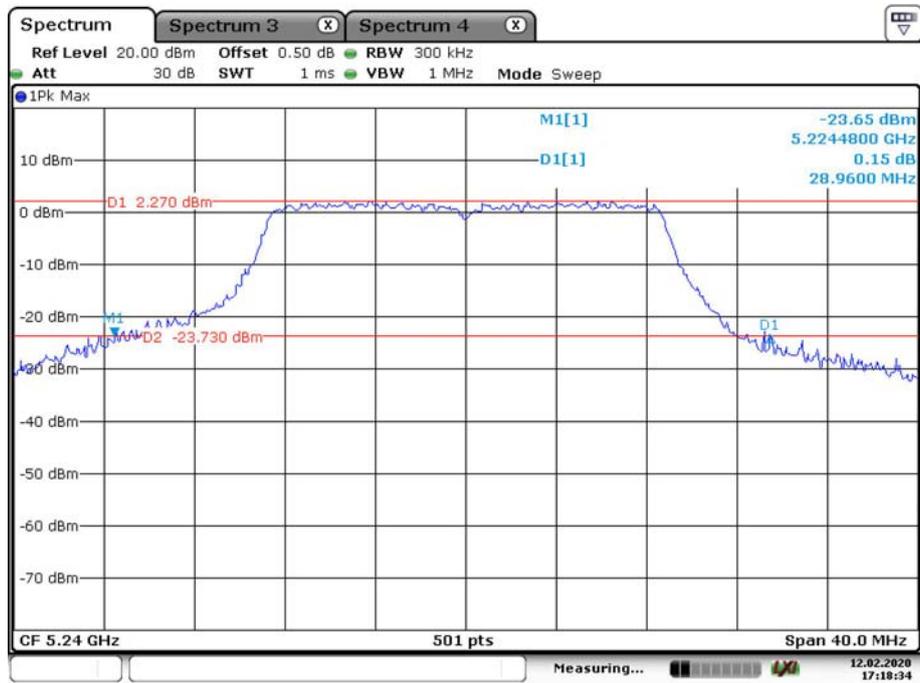


Date: 12.FEB.2020 17:18:34

802.11n ht40 Low Channel

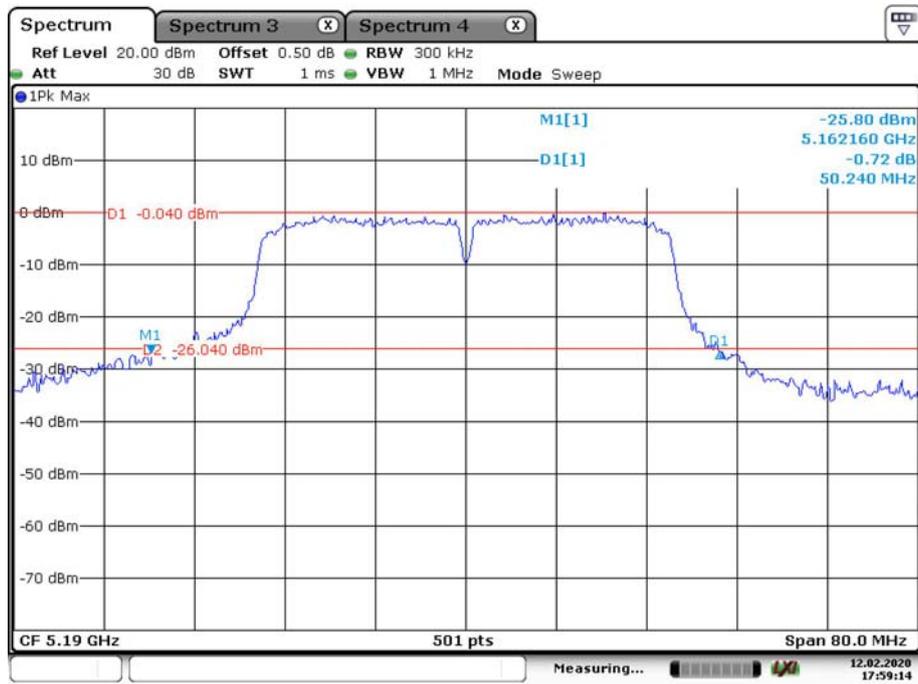

Date: 12.FEB.2020 17:59:15


802.11n ht40 High Channel

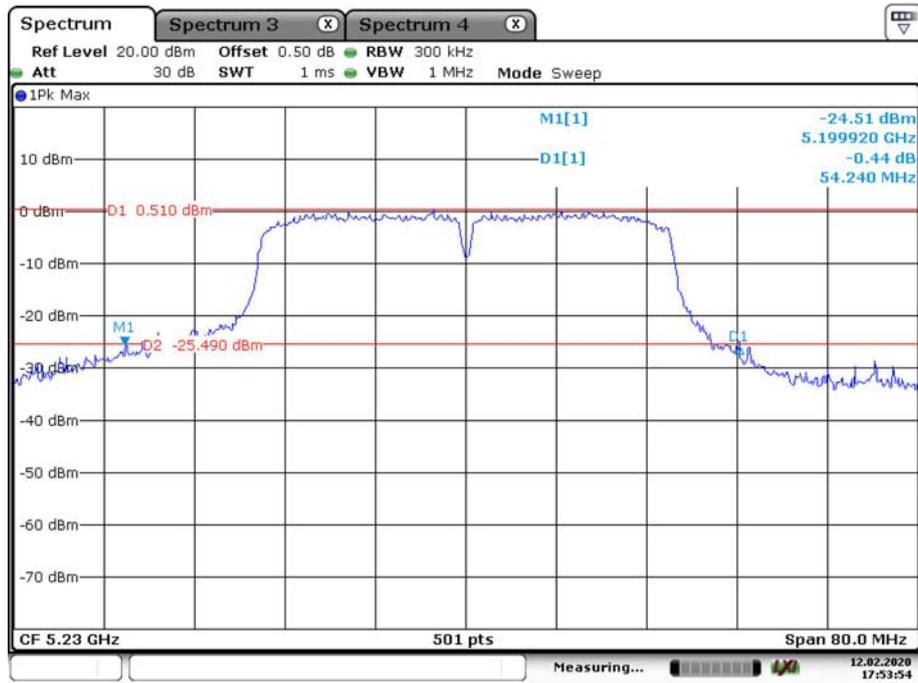

Date: 12.FEB.2020 17:53:54

99% Occupied Bandwidth:

802.11a Low Channel

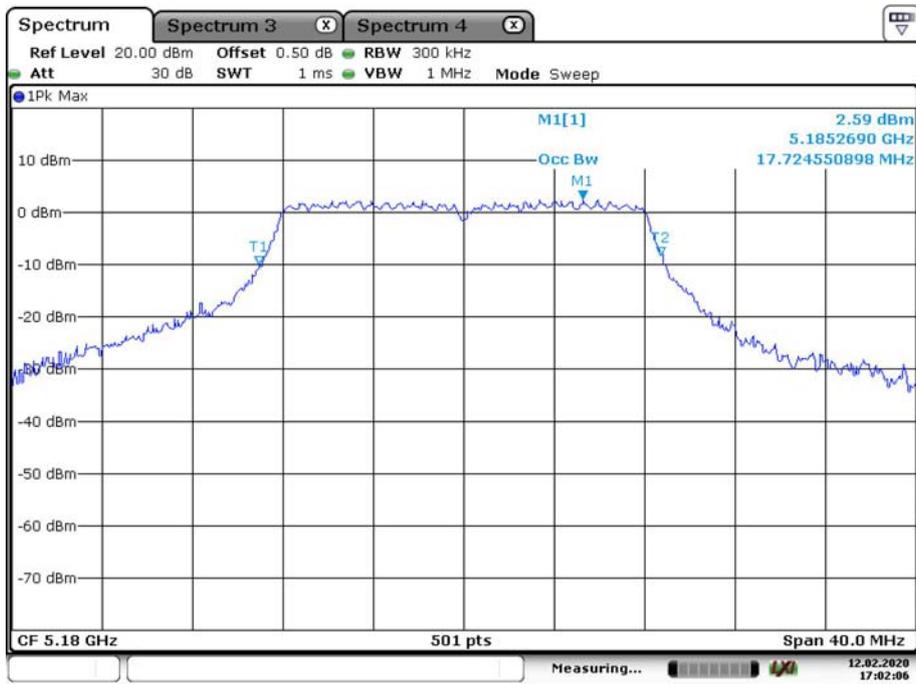


Date: 12.FEB.2020 17:02:06

802.11a Middle Channel




Date: 12.FEB.2020 17:12:06

802.11a High Channel

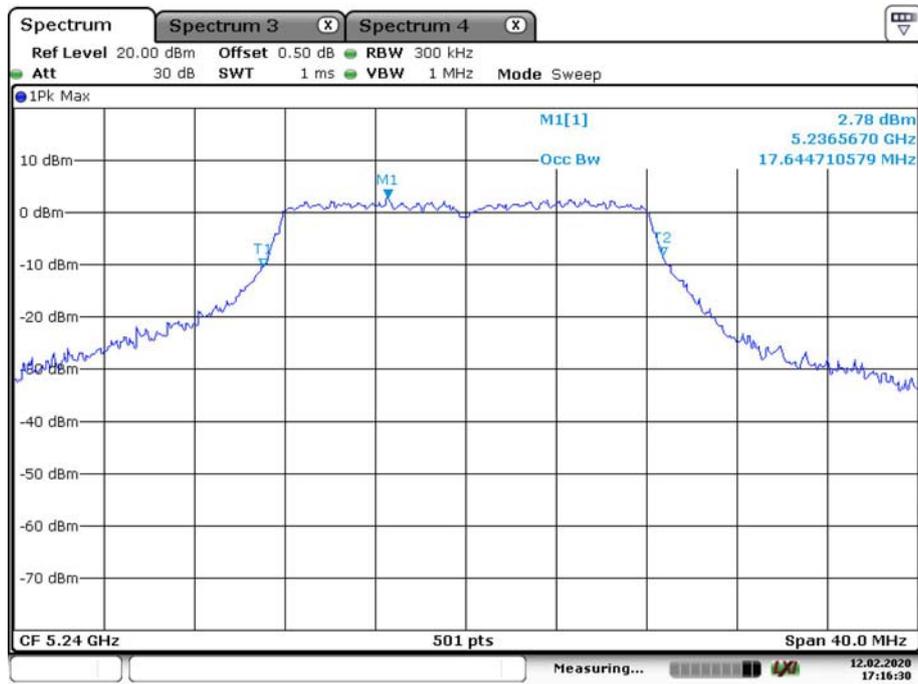


Date: 12.FEB.2020 17:16:30

802.11n ht20 Low Channel

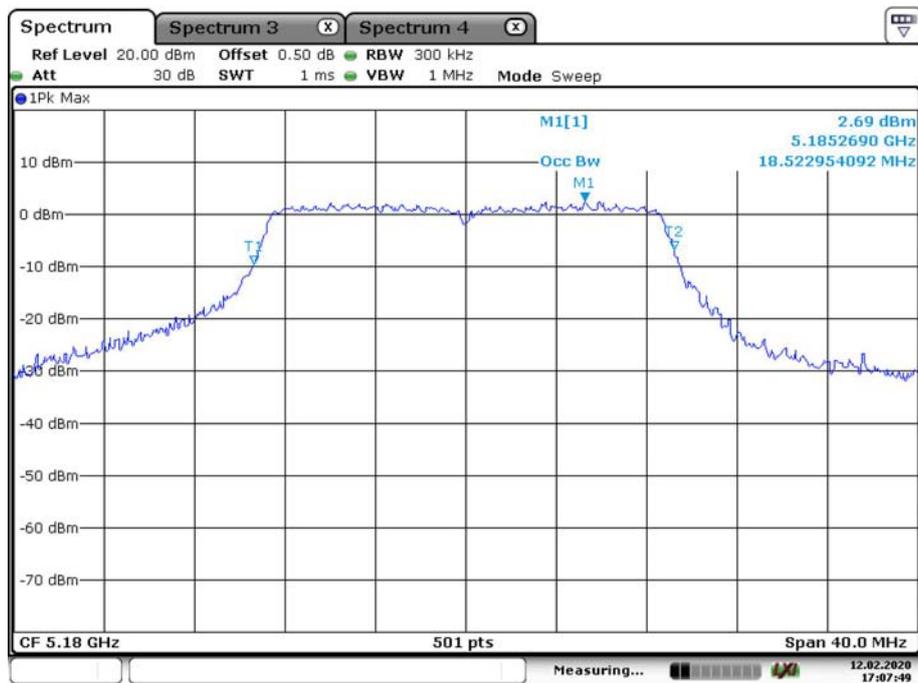


Date: 12.FEB.2020 17:07:49

802.11n ht20 Middle Channel

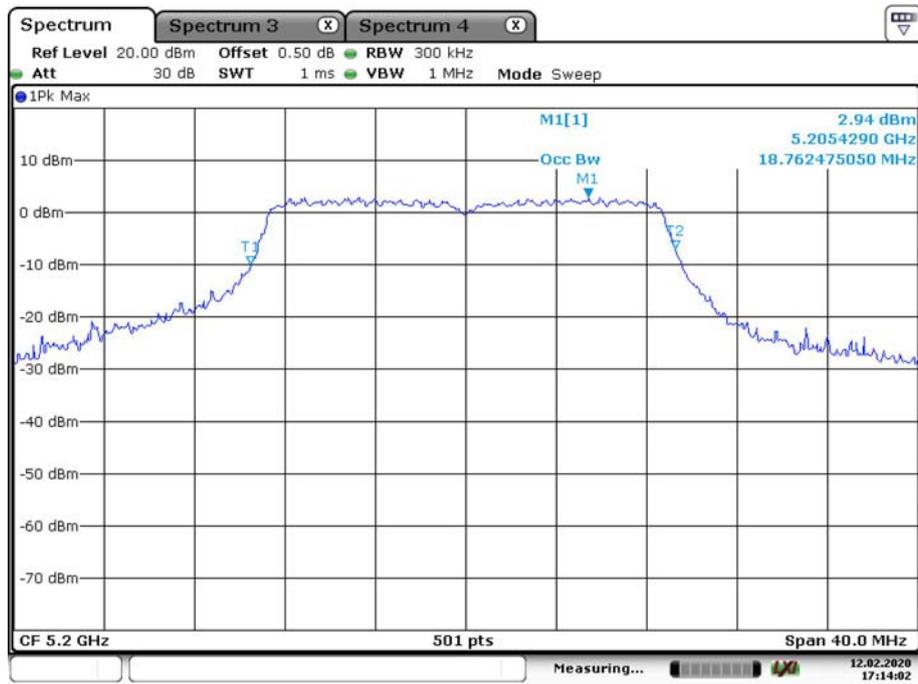

Date: 12.FEB.2020 17:14:02

802.11n ht20 High Channel

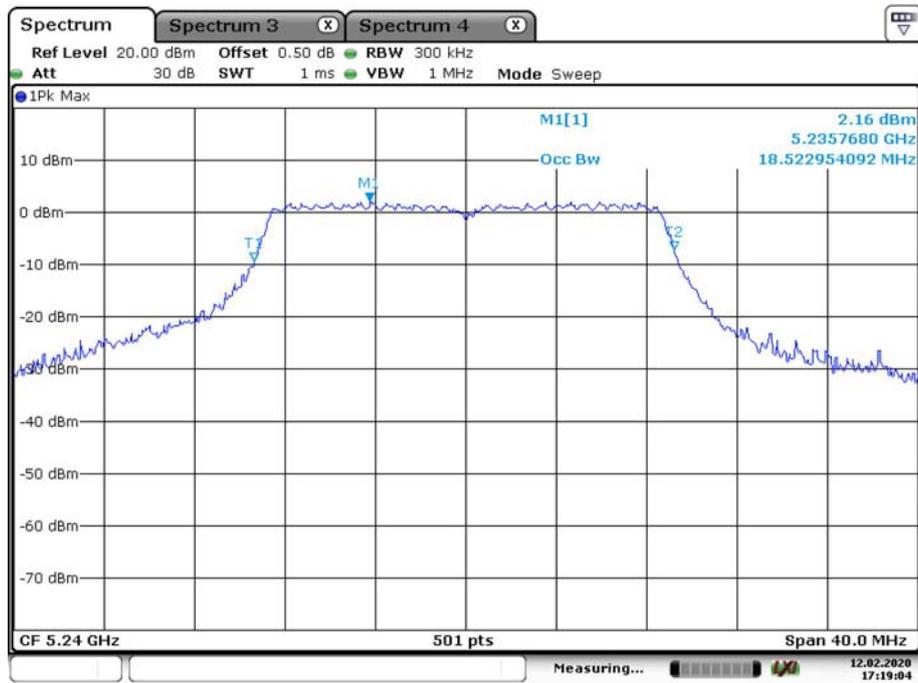


Date: 12.FEB.2020 17:19:04

802.11n ht40 Low Channel



Date: 12.FEB.2020 17:56:22


802.11n ht40 High Channel

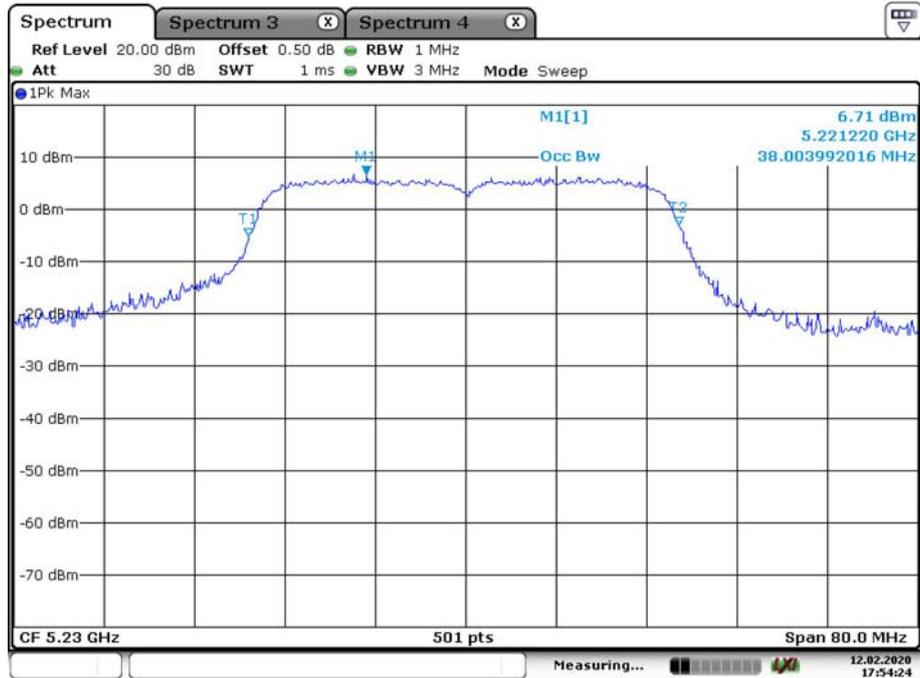

Date: 12.FEB.2020 17:54:25


5470-5725MHz:
26dB Emission Bandwidth:

802.11a Low Channel

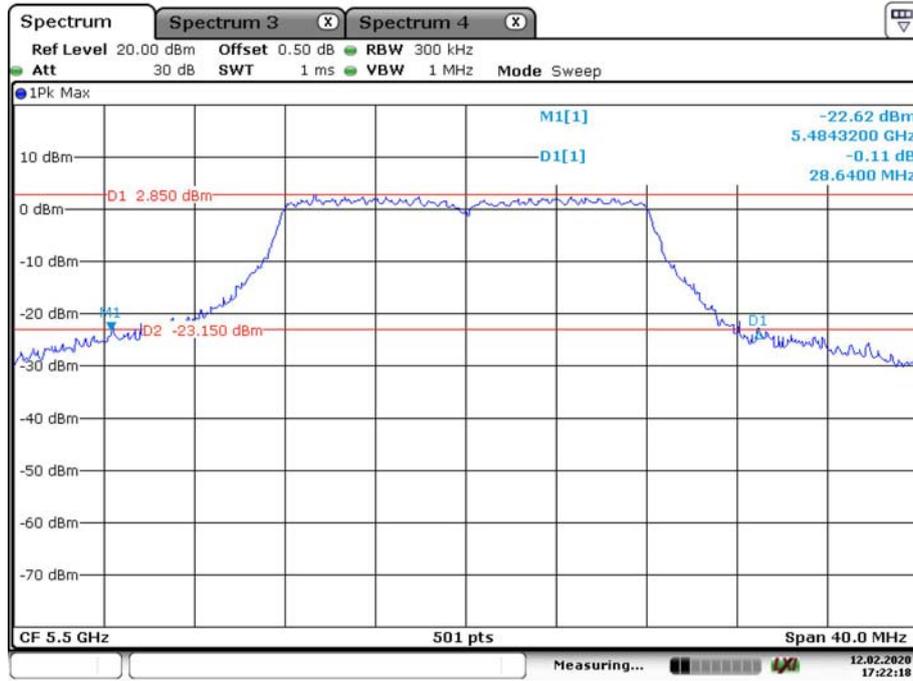


Date: 12.FEB.2020 17:22:19

802.11a Middle Channel

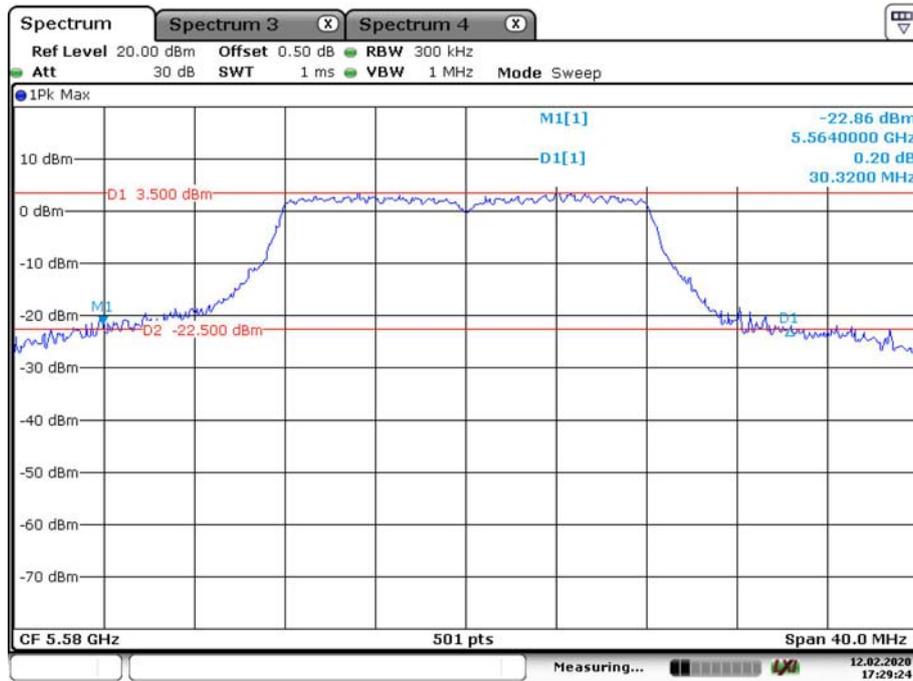


Date: 12.FEB.2020 17:29:25

802.11a High Channel

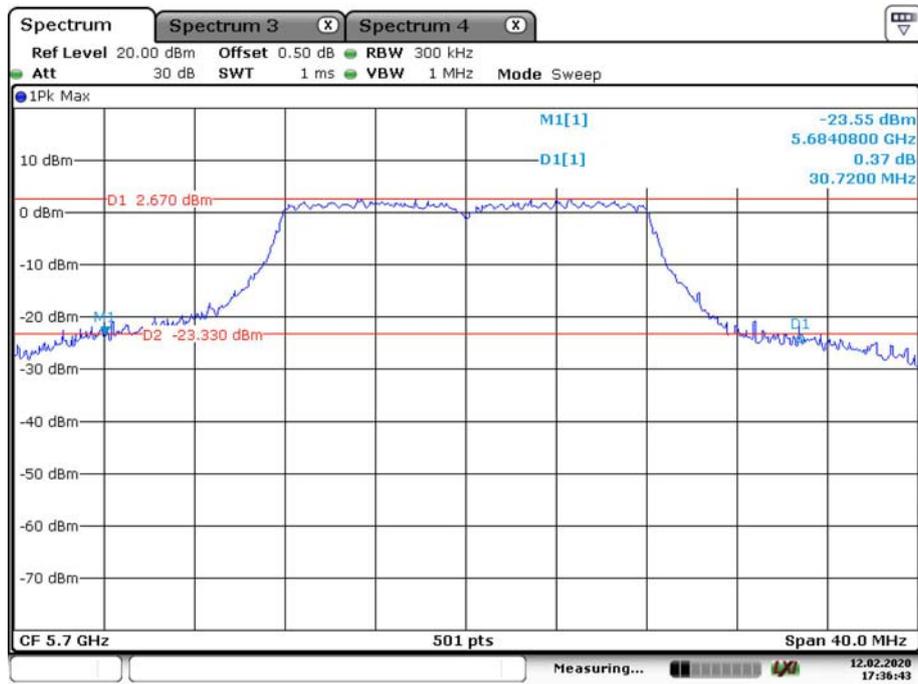


Date: 12.FEB.2020 17:36:43

802.11n ht20 Low Channel

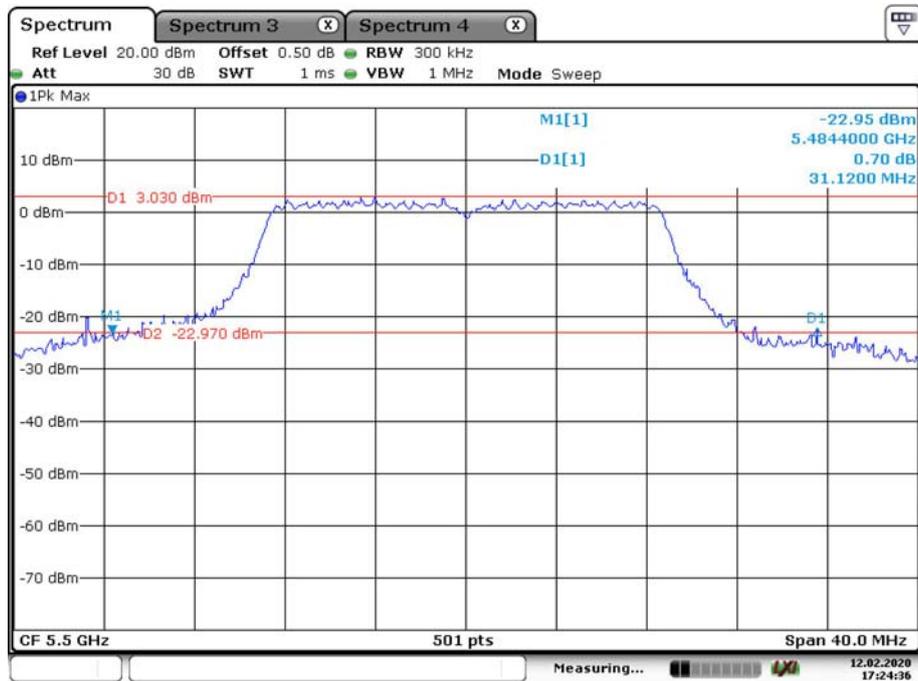


Date: 12.FEB.2020 17:24:36

802.11n ht20 Middle Channel

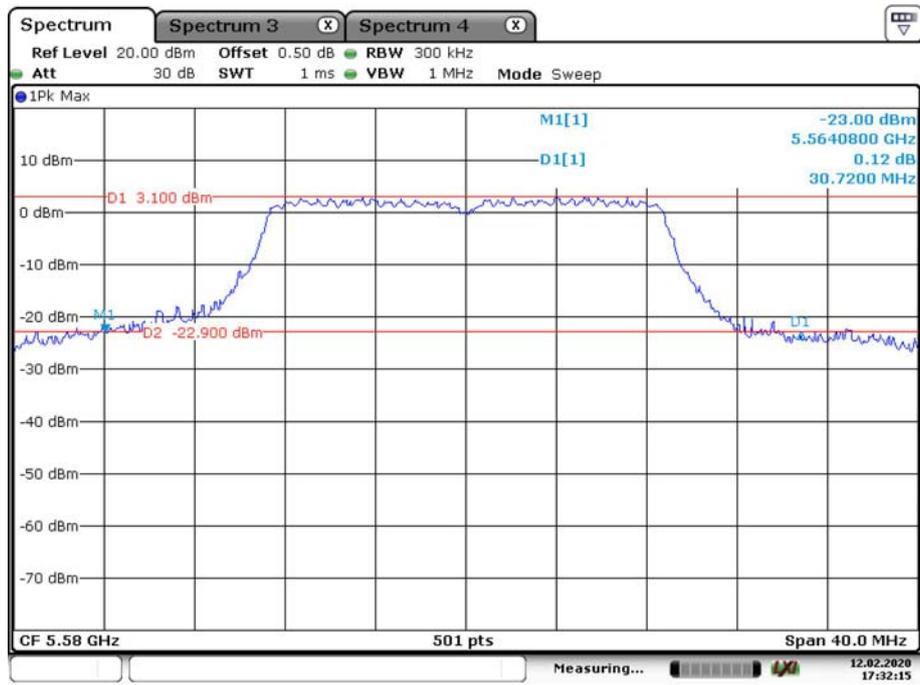


Date: 12.FEB.2020 17:32:16

802.11n ht20 High Channel

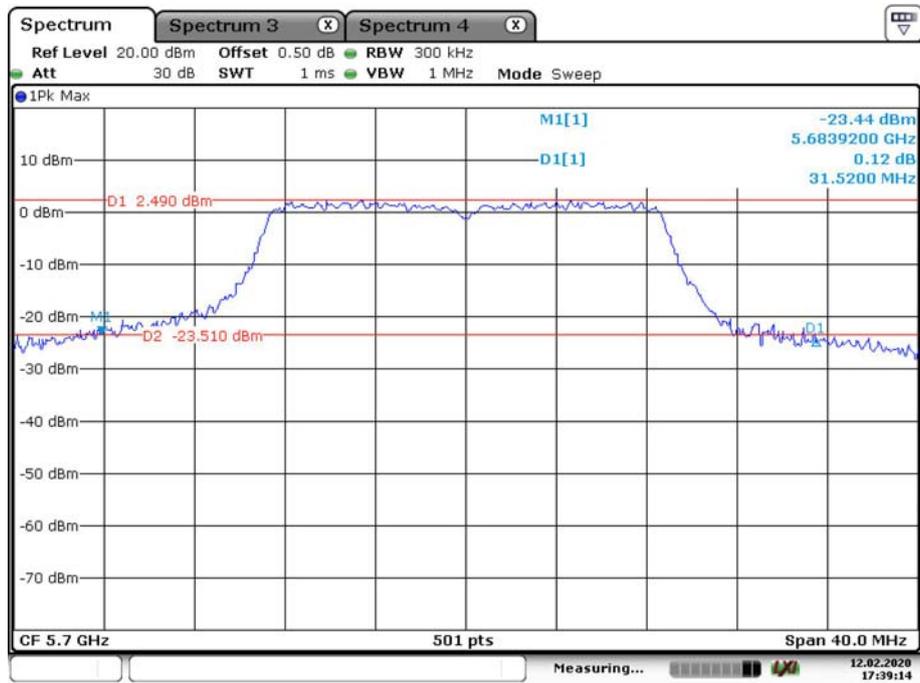


Date: 12.FEB.2020 17:39:15

802.11n ht40 Low Channel

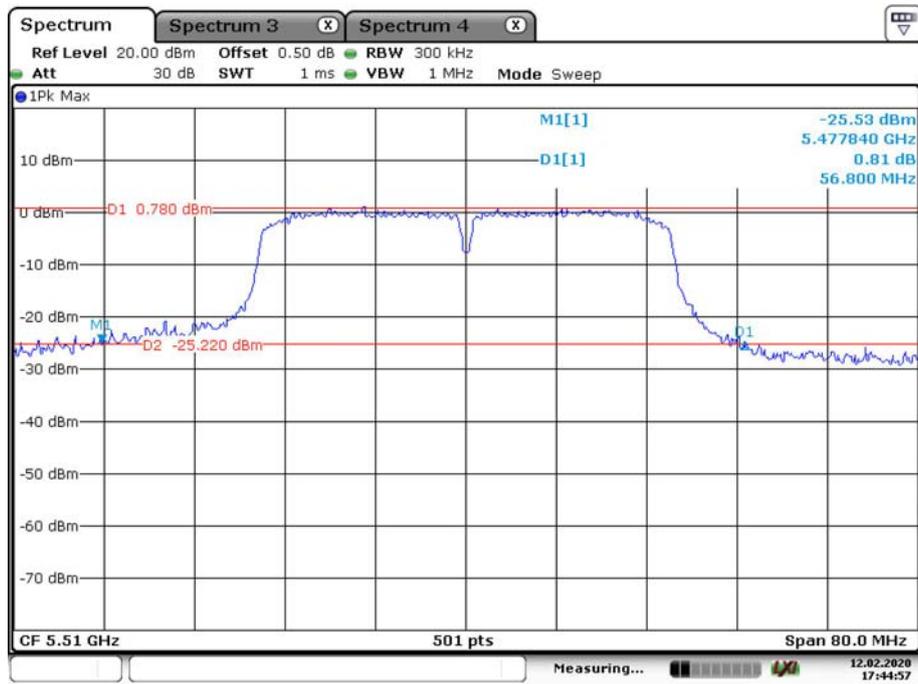

Date: 12.FEB.2020 17:44:57

802.11n ht40 Middle Channel

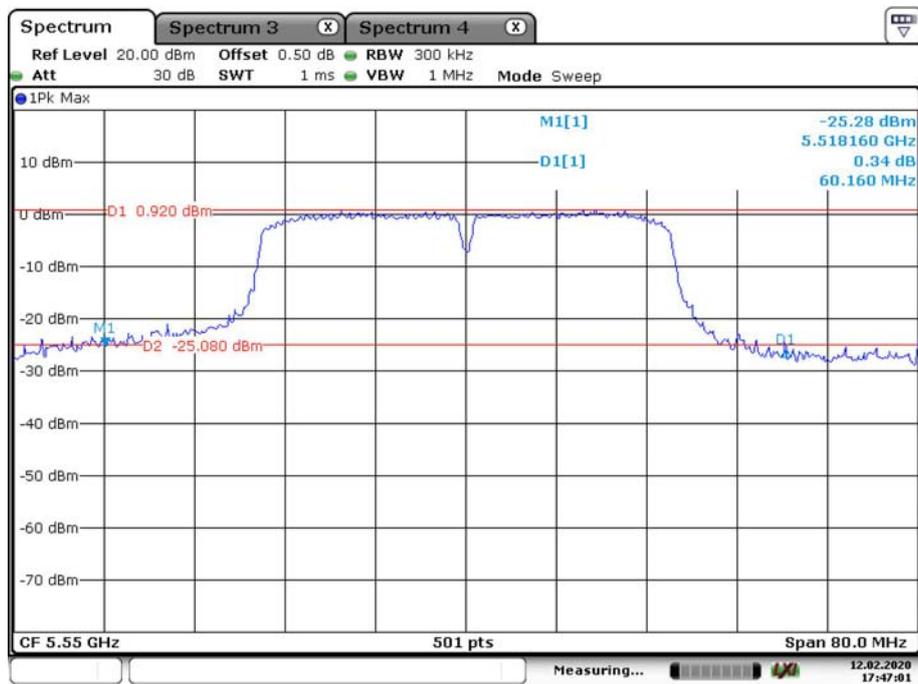

Date: 12.FEB.2020 17:47:02


802.11n ht40 High Channel



Date: 12.FEB.2020 17:49:18


99% Occupied Bandwidth:

802.11a Low Channel

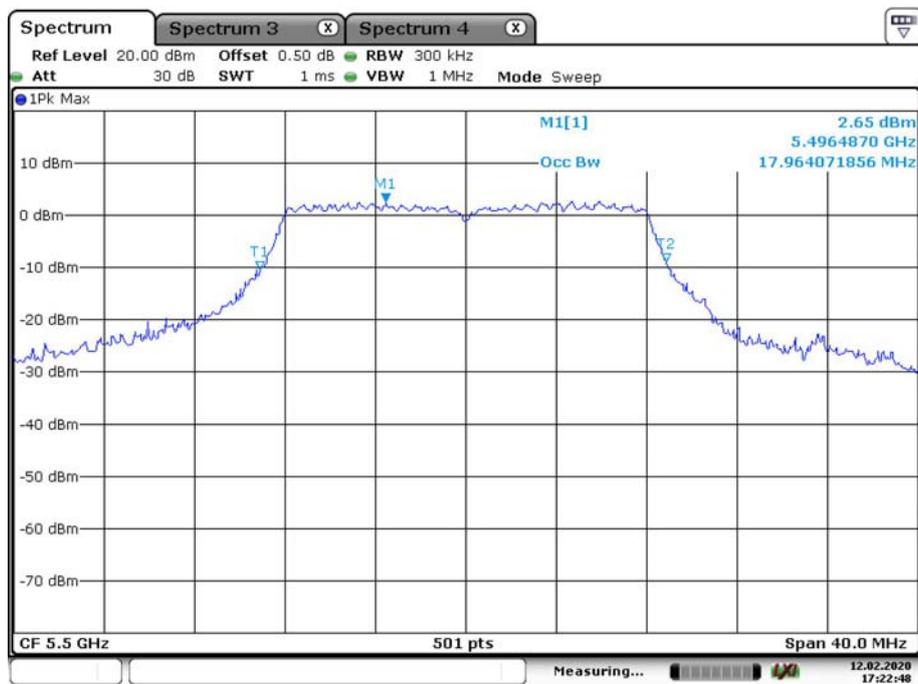


Date: 12.FEB.2020 17:22:49

802.11a Middle Channel

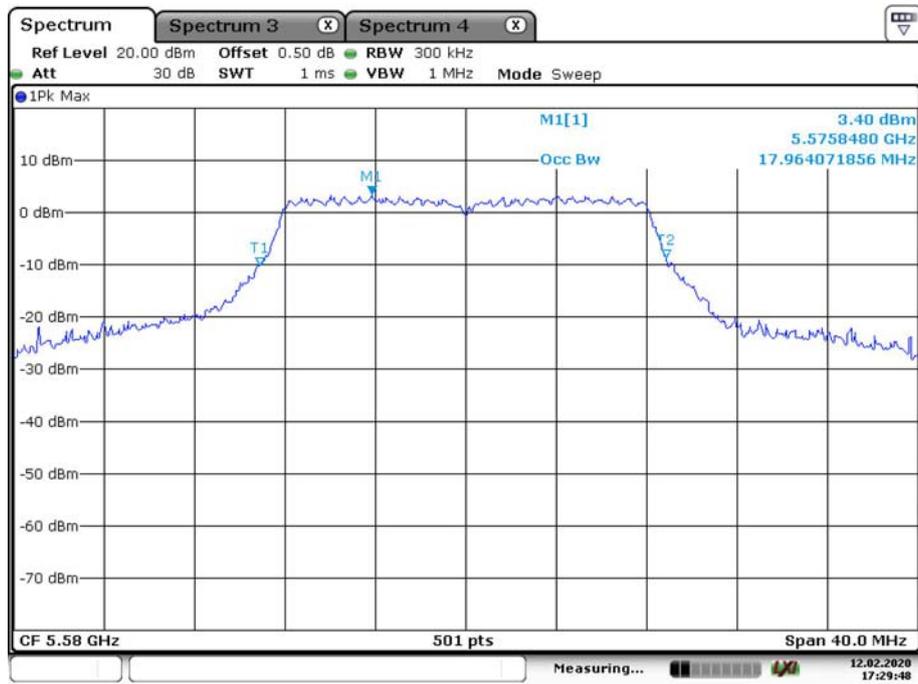


Date: 12.FEB.2020 17:29:48

802.11a High Channel

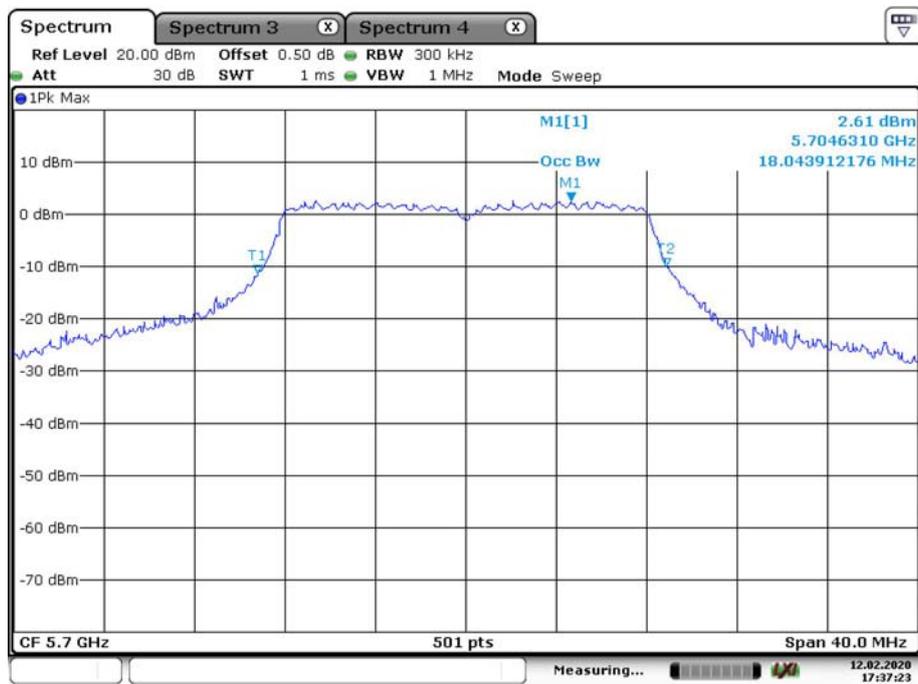


Date: 12.FEB.2020 17:37:23

802.11n ht20 Low Channel

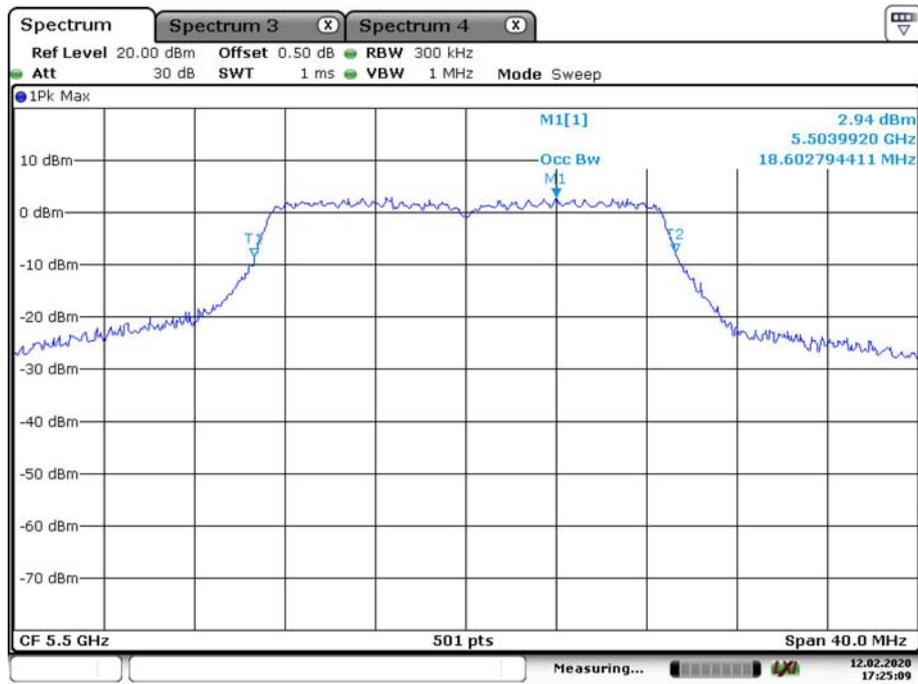


Date: 12.FEB.2020 17:25:09

802.11n ht20 Middle Channel

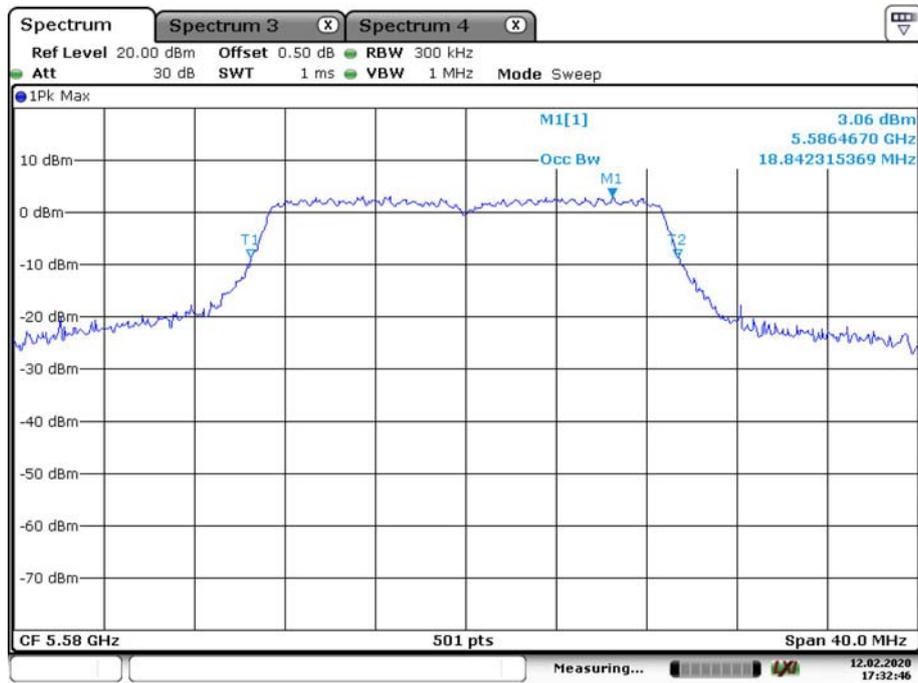

Date: 12.FEB.2020 17:32:46

802.11n ht20 High Channel

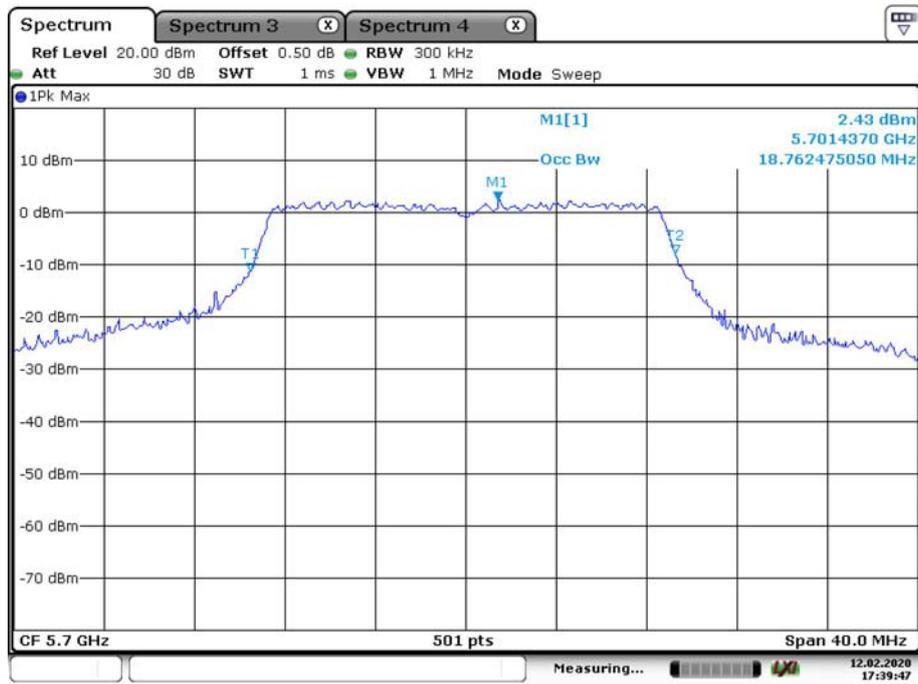

Date: 12.FEB.2020 17:39:48

802.11n ht40 Low Channel




Date: 12.FEB.2020 17:45:28

802.11n ht40 Middle Channel



Date: 12.FEB.2020 17:47:38


802.11n ht40 High Channel

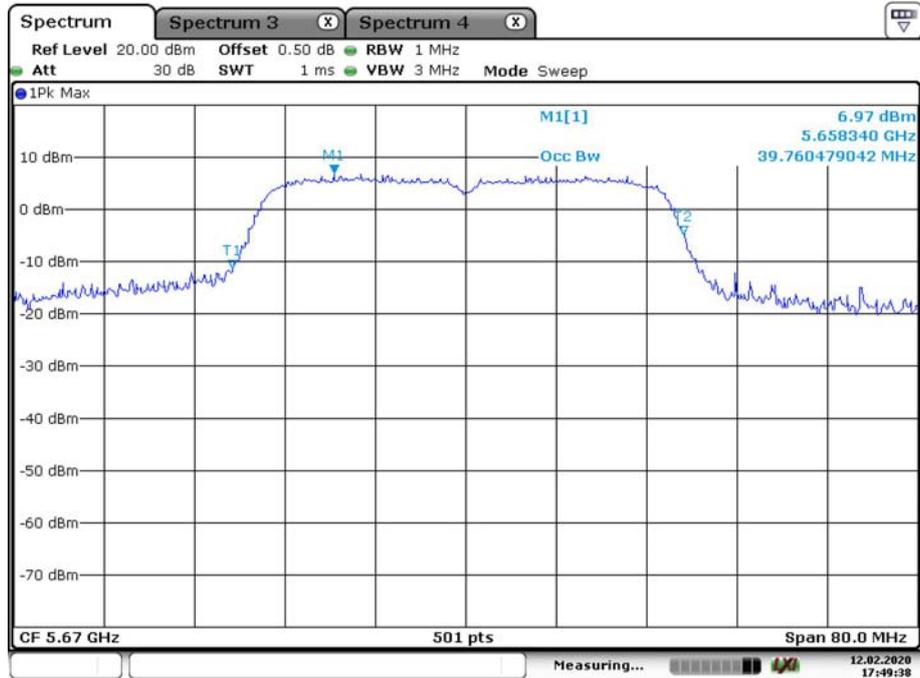


Date: 12.FEB.2020 17:49:39

**5725-5850MHz:
6dB Emission Bandwidth:**


802.11a Low Channel

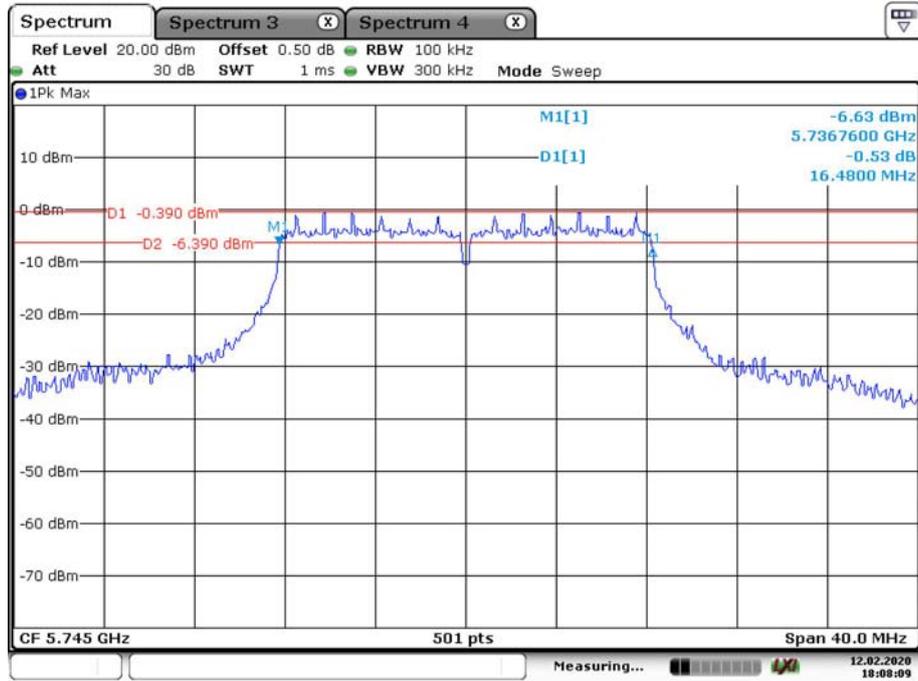

802.11a Middle Channel

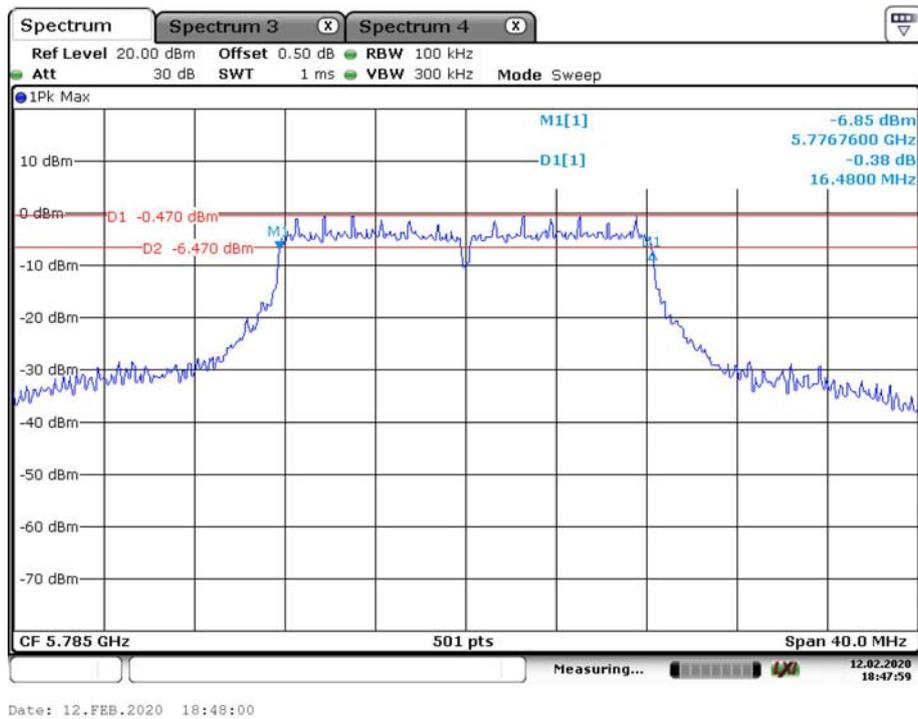


802.11a High Channel

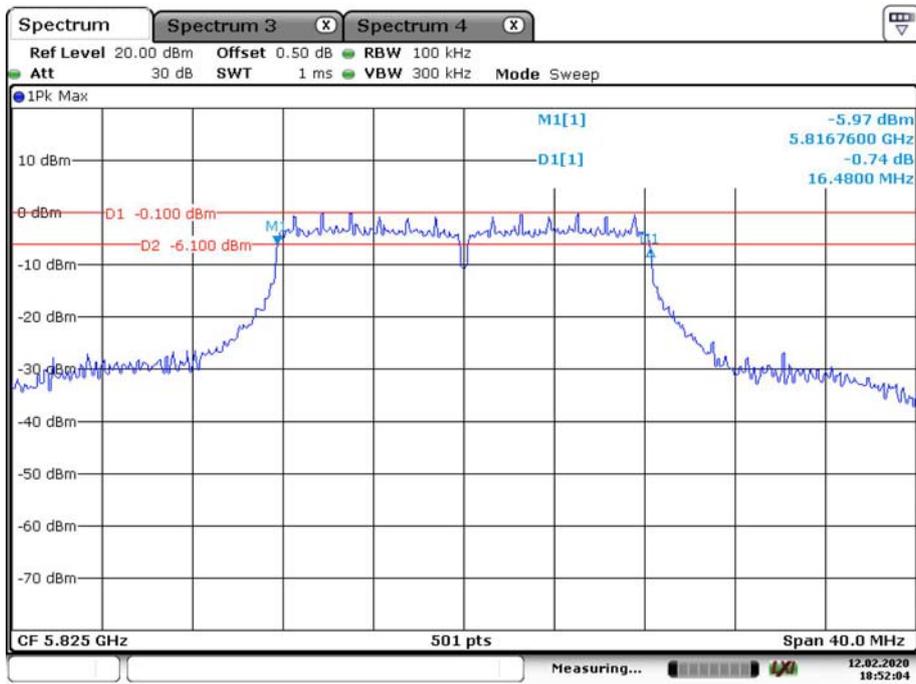


Date: 12.FEB.2020 18:52:05

802.11n ht20 Low Channel

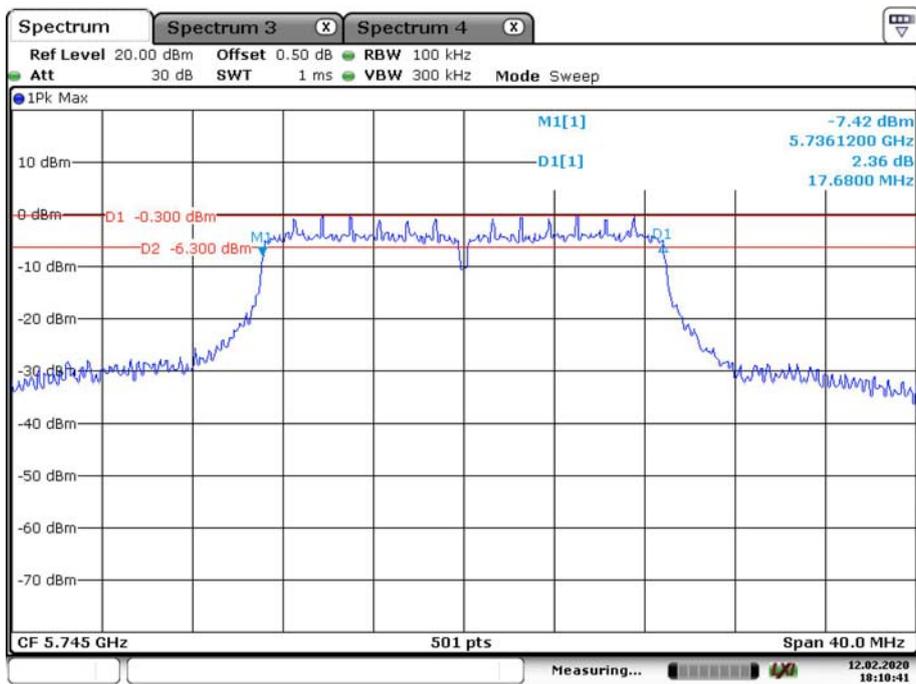


Date: 12.FEB.2020 18:10:41

802.11n ht20 Middle Channel

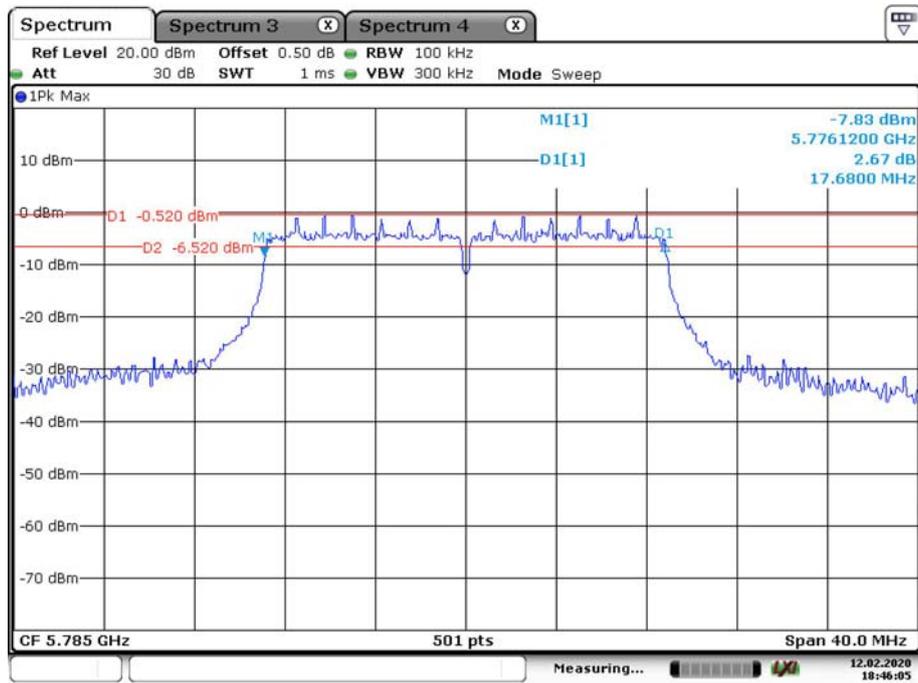


Date: 12.FEB.2020 18:46:06

802.11n ht20 High Channel

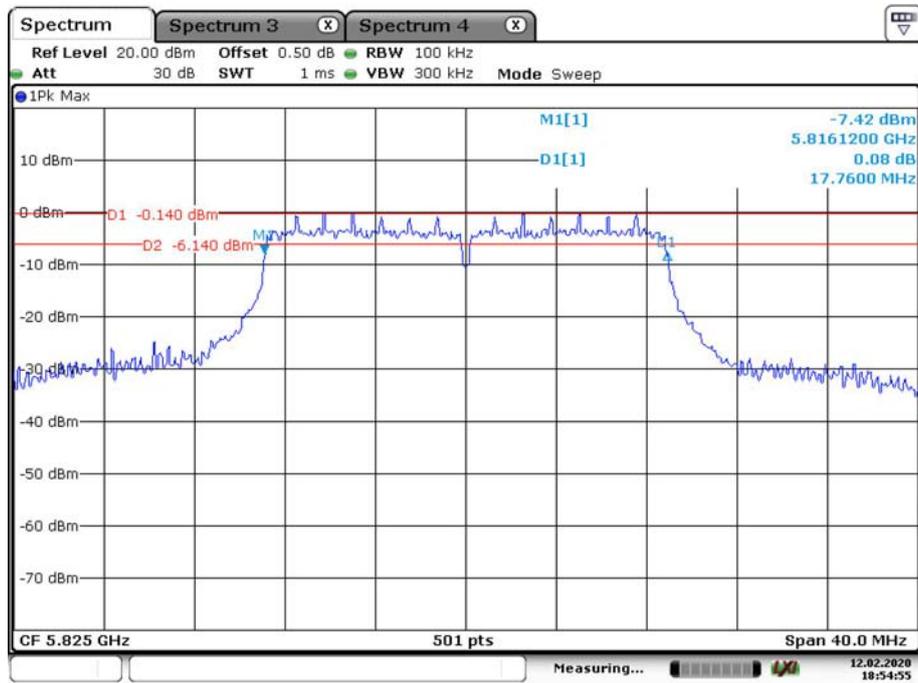


Date: 12.FEB.2020 18:54:56

802.11n ht40 Low Channel

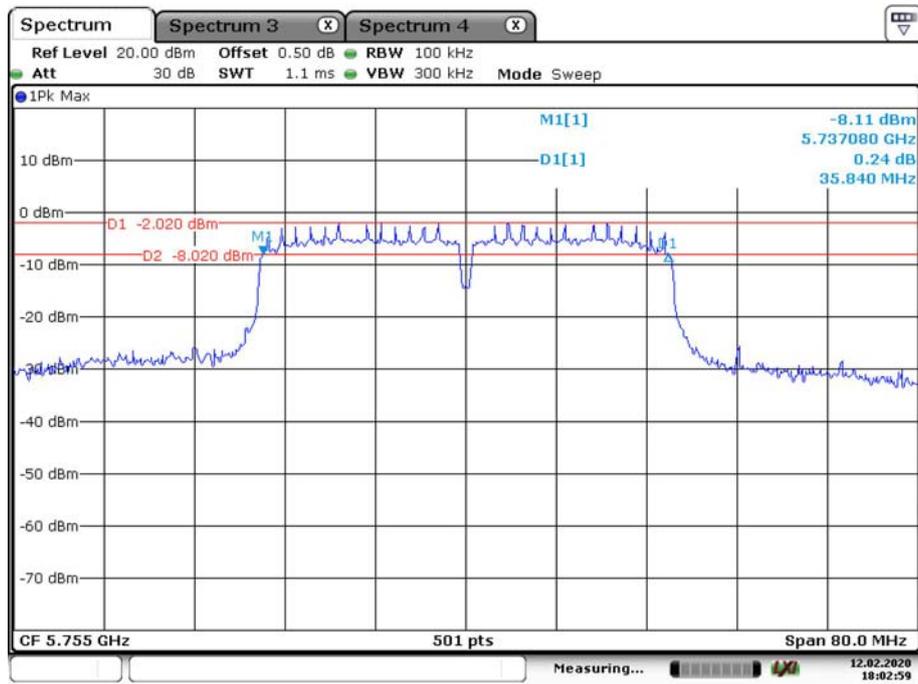

Date: 12.FEB.2020 18:02:59


802.11n ht40 High Channel

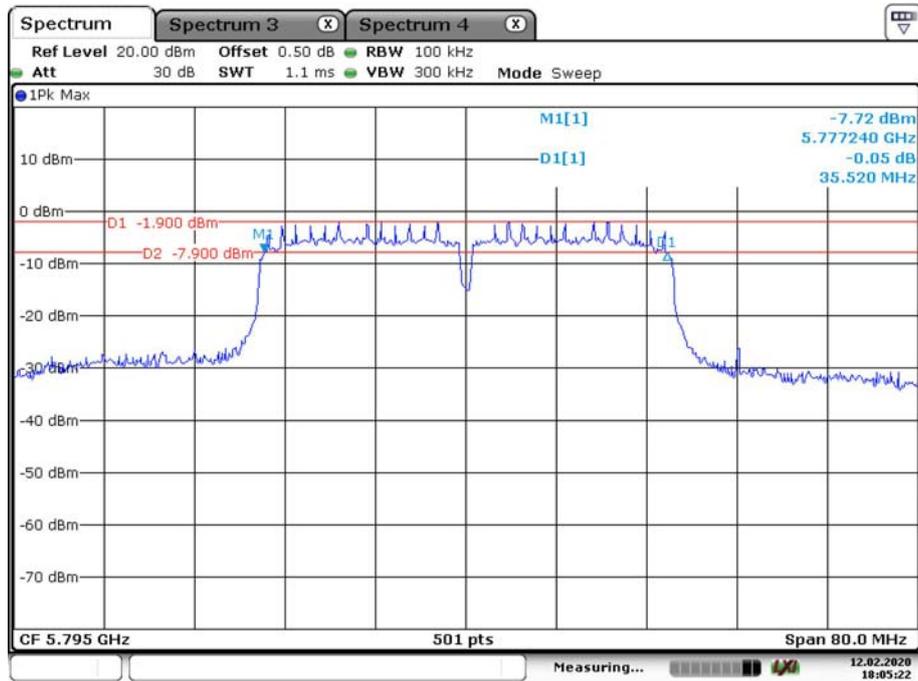

Date: 12.FEB.2020 18:05:23


99% Occupied Bandwidth:

802.11a Low Channel

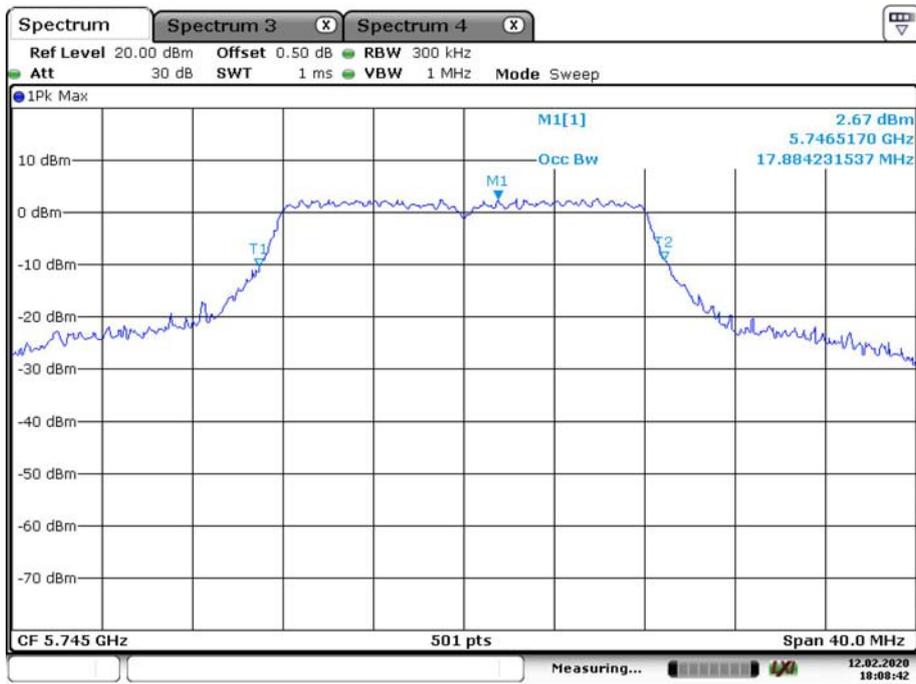


Date: 12.FEB.2020 18:08:43

802.11a Middle Channel

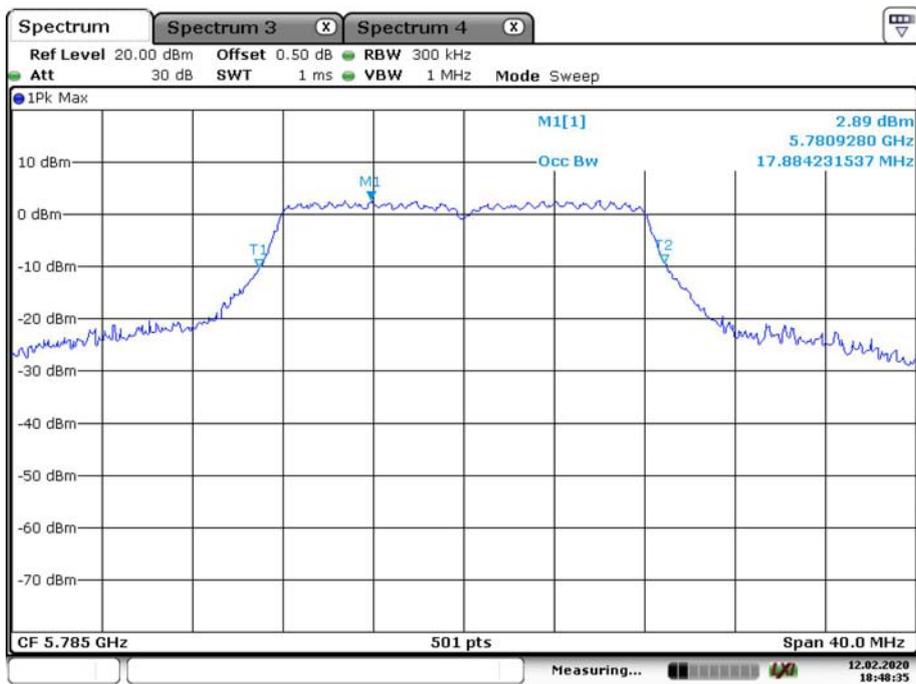


Date: 12.FEB.2020 18:48:36

802.11a High Channel

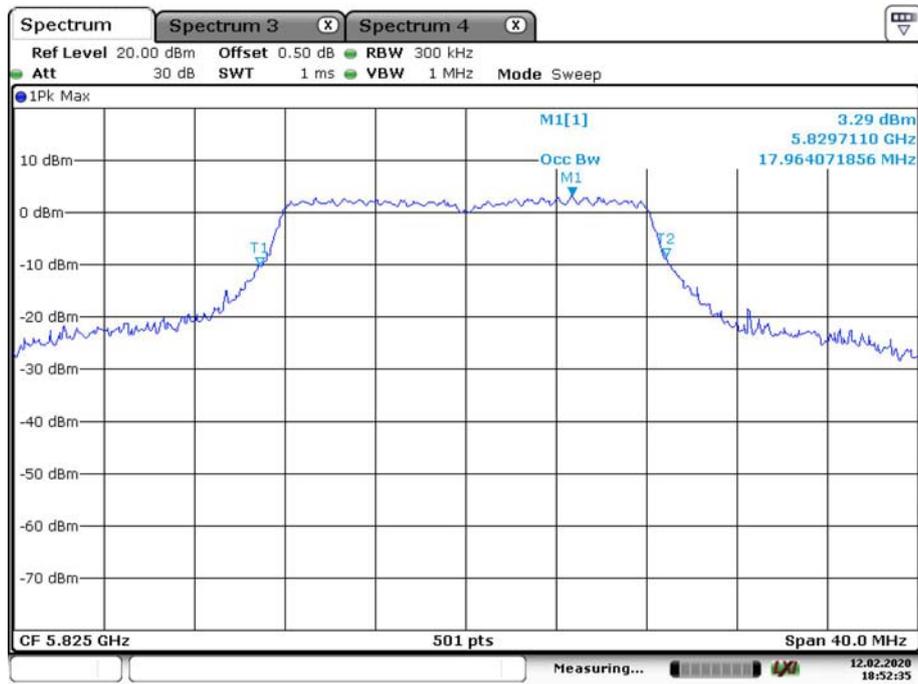


Date: 12.FEB.2020 18:52:35

802.11n ht20 Low Channel

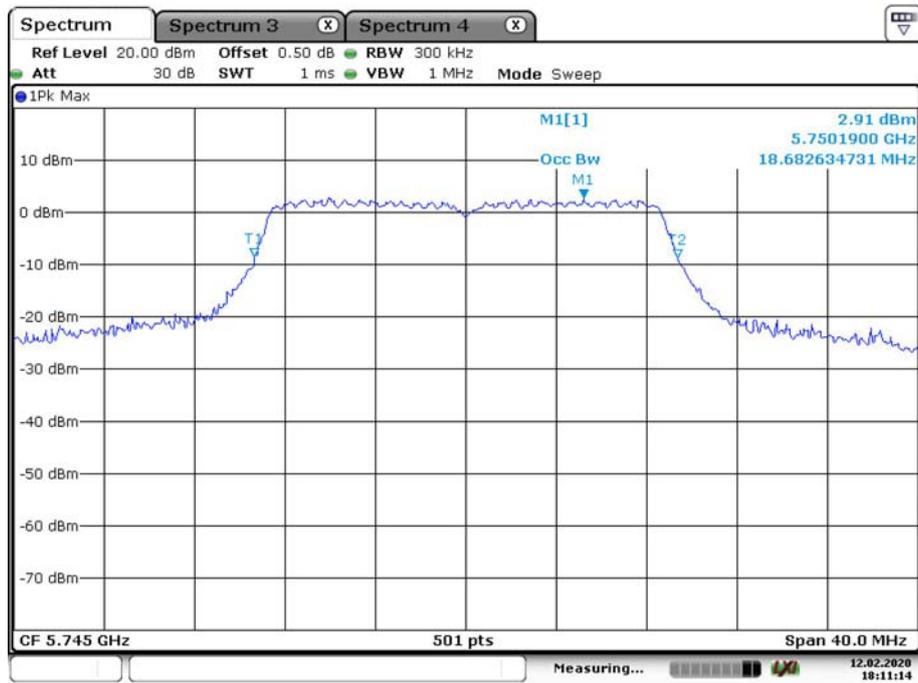


Date: 12.FEB.2020 18:11:14

802.11n ht20 Middle Channel

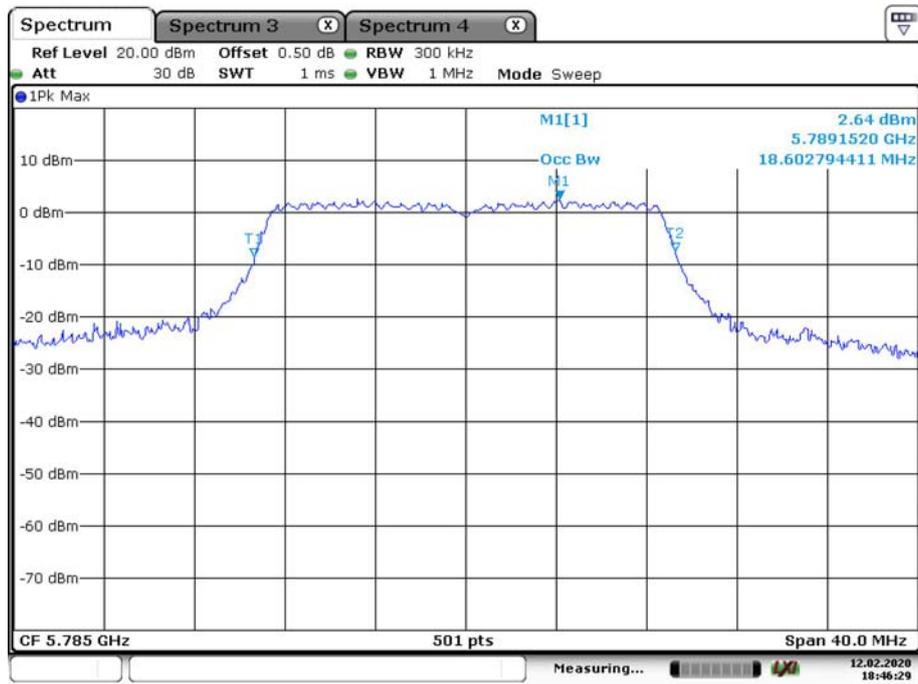

Date: 12.FEB.2020 18:46:29

802.11n ht20 High Channel

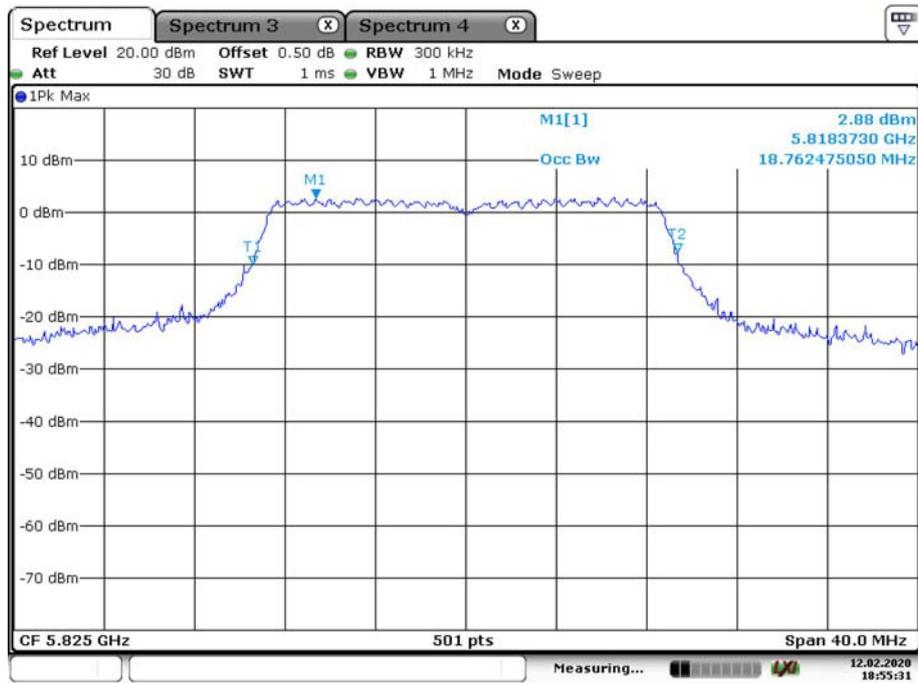

Date: 12.FEB.2020 18:55:32

802.11n ht40 Low Channel



Date: 12.FEB.2020 18:03:32

802.11n ht40 High Channel



Date: 12.FEB.2020 18:05:50

FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	Each time	N/A
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2019-09-23	2020-09-23
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	21.4 °C
Relative Humidity:	64 %
ATM Pressure:	102.4 kPa
Tester:	Fay Hu
Test Date:	2020-02-12

Test Mode: Transmitting

5150-5250 MHz:

Bands	Mode	Frequency (MHz)	Conducted Average Output Power (dBm)		Result
			Result	Limit	
5150 - 5250 MHz	802.11a	5180	9.61	24	PASS
		5200	10.20	24	PASS
		5240	9.58	24	PASS
	802.11n ht20	5180	9.73	24	PASS
		5200	10.37	24	PASS
		5240	9.58	24	PASS
	802.11n ht40	5190	9.96	24	PASS
		5230	9.88	24	PASS
	5470 - 5725 MHz	802.11a	5500	10.39	24
5580			10.38	24	PASS
5700			9.81	24	PASS
802.11n ht20		5500	10.44	24	PASS
		5580	9.82	24	PASS
		5700	9.12	24	PASS
802.11n ht40		5510	10.32	24	PASS
		5550	10.39	24	PASS
		5670	10.38	24	PASS
5725 - 5850 MHz	802.11a	5745	10.07	30	PASS
		5785	10.00	30	PASS
		5825	10.52	30	PASS
	802.11n ht20	5745	10.08	30	PASS
		5785	10.03	30	PASS
		5825	10.53	30	PASS
	802.11n ht40	5755	10.17	30	PASS
		5795	10.14	30	PASS

Note: the duty cycle factor have been calculated into the Conducted power result.

FCC §15.407(a) - POWER SPECTRAL DENSITY

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	21.4 °C
Relative Humidity:	64 %
ATM Pressure:	102.4 kPa
Tester:	Fay Hu
Test Date:	2020-02-12

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plot.

5150-5250MHz:

Mode	Frequency (MHz)	Conducted Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)
802.11a	5180	4.38	11
	5200	5.05	11
	5240	4.42	11
802.11n ht20	5180	4.20	11
	5200	4.83	11
	5240	3.89	11
802.11n ht40	5190	1.90	11
	5230	2.80	11

5470-5725 MHz:

Mode	Frequency (MHz)	Conducted Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)
802.11a	5500	4.80	11
	5580	5.24	11
	5700	4.69	11
802.11n ht20	5500	4.62	11
	5580	4.78	11
	5700	4.15	11
802.11n ht40	5510	2.59	11
	5550	2.60	11
	5670	2.66	11

5725-5850 MHz:

Mode	Frequency (MHz)	Reading (dBm/300kHz)	Conducted Power Spectral Density (dBm/500kHz)	Conducted Power Spectral Density Limit (dBm/500kHz)
802.11a	5745	2.10	4.32	30
	5785	1.84	4.06	30
	5825	2.28	4.5	30
802.11n ht20	5745	1.74	3.96	30
	5785	1.45	3.67	30
	5825	1.51	3.73	30
802.11n ht40	5755	0.04	2.26	30
	5795	0.24	2.46	30


Note:

For 5.8GHz band, If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.


5150-5250MHz

802.11a Low Channel

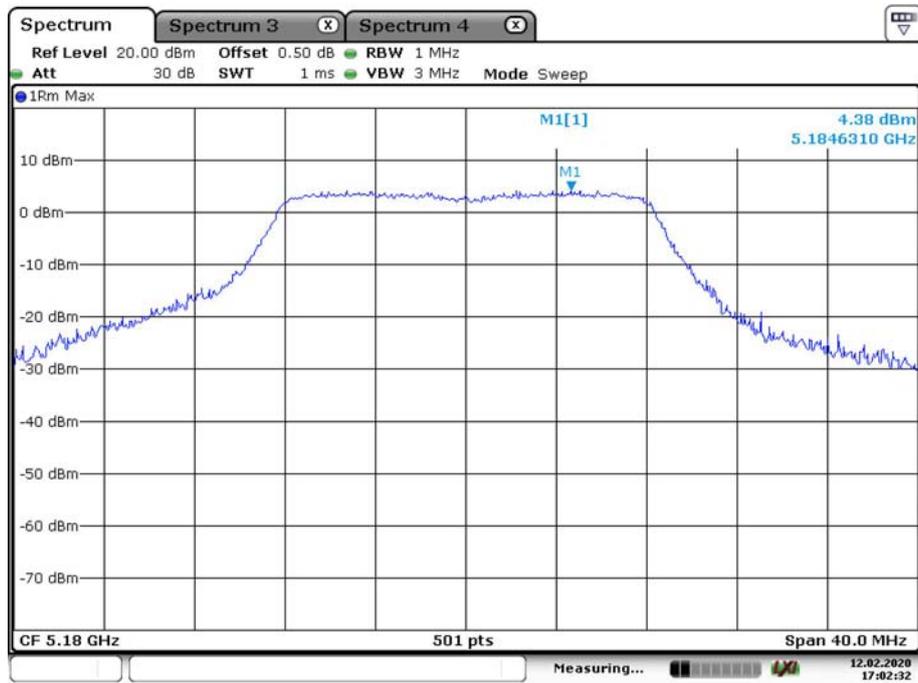


Date: 12.FEB.2020 17:02:32

802.11a Middle Channel

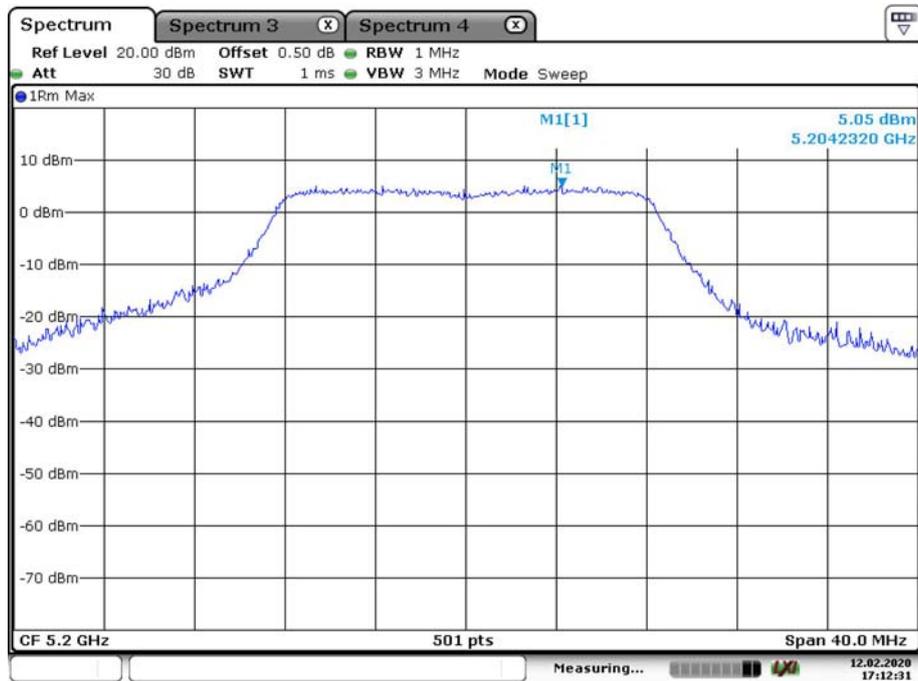


Date: 12.FEB.2020 17:12:31

802.11a High Channel

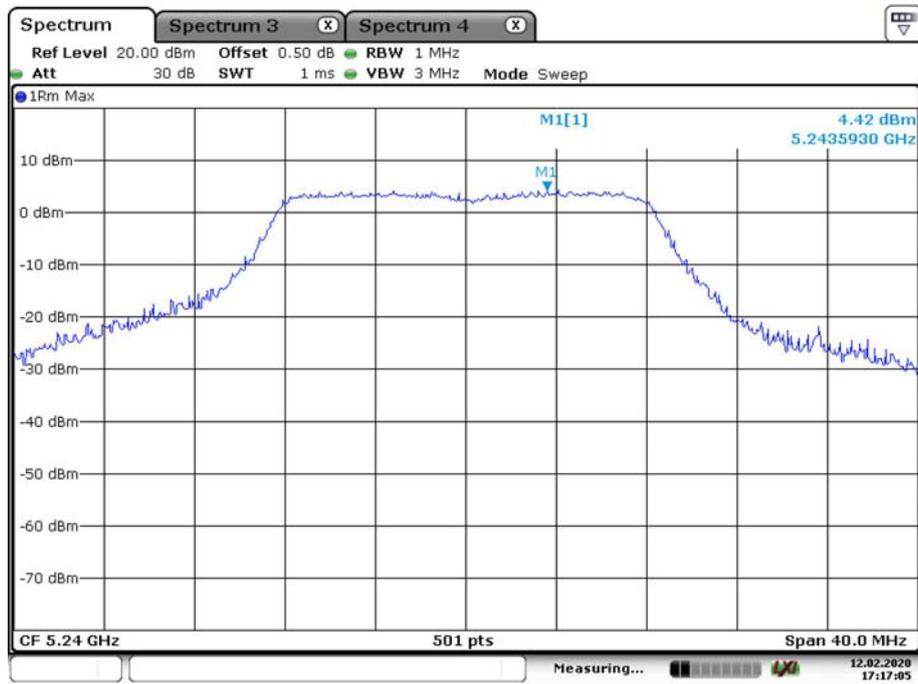


Date: 12.FEB.2020 17:17:05

802.11n ht20 Low Channel

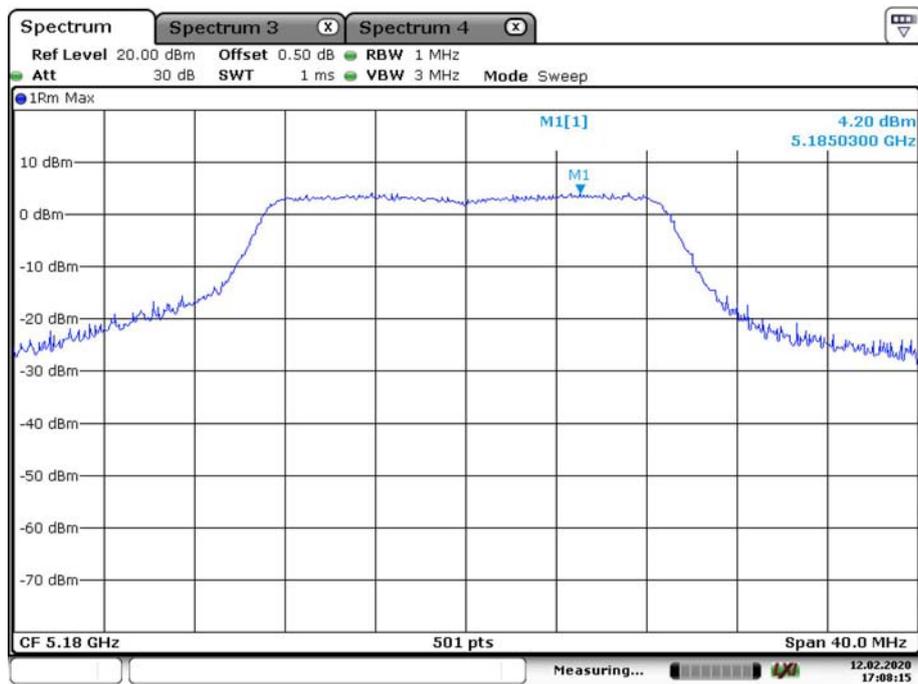


Date: 12.FEB.2020 17:08:15

802.11n ht20 Middle Channel

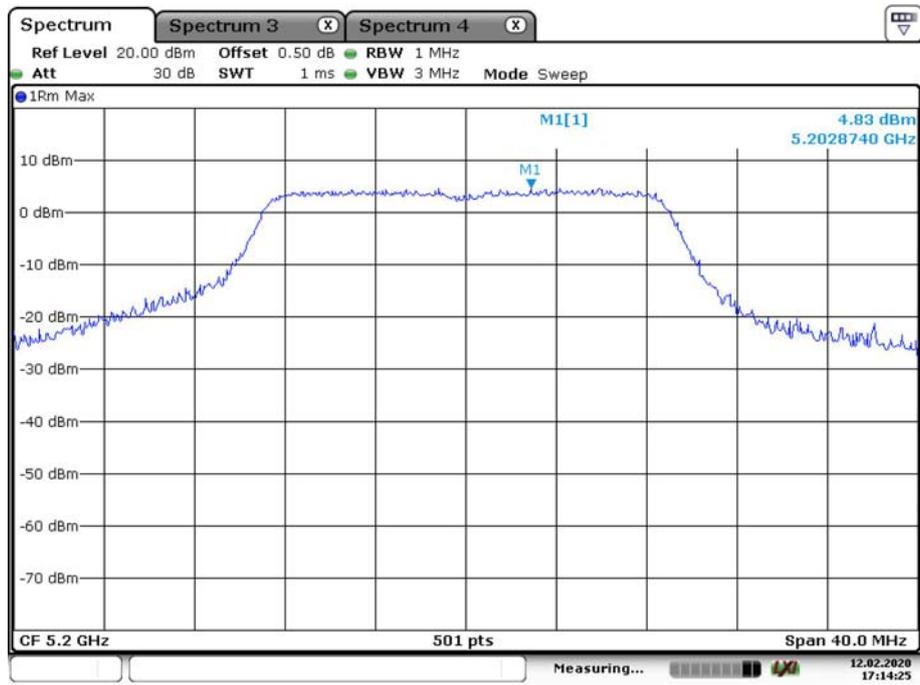


Date: 12.FEB.2020 17:14:25

802.11n ht20 High Channel

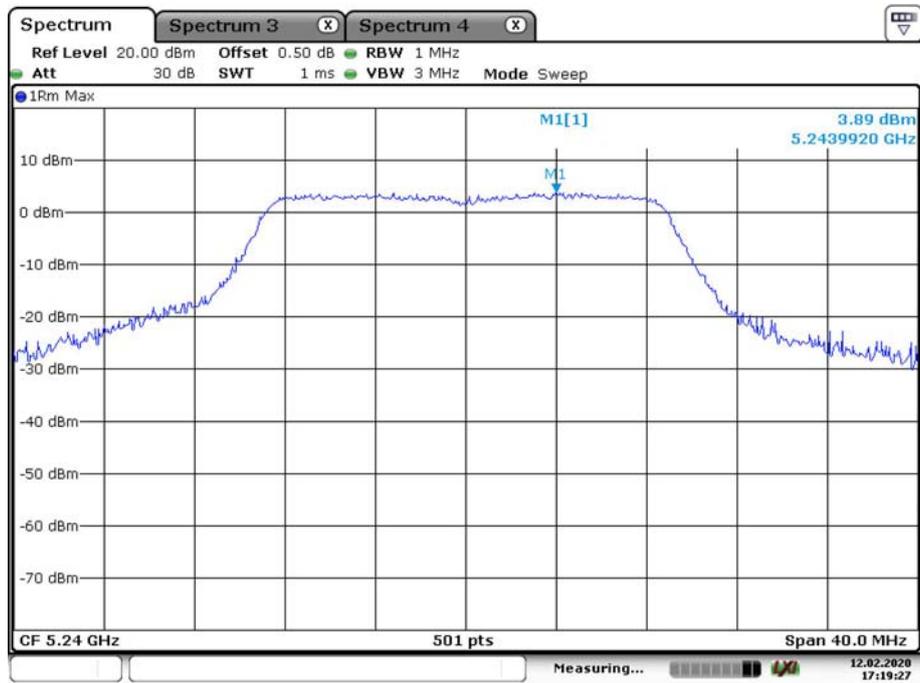


Date: 12.FEB.2020 17:19:27

802.11n ht40 Low Channel

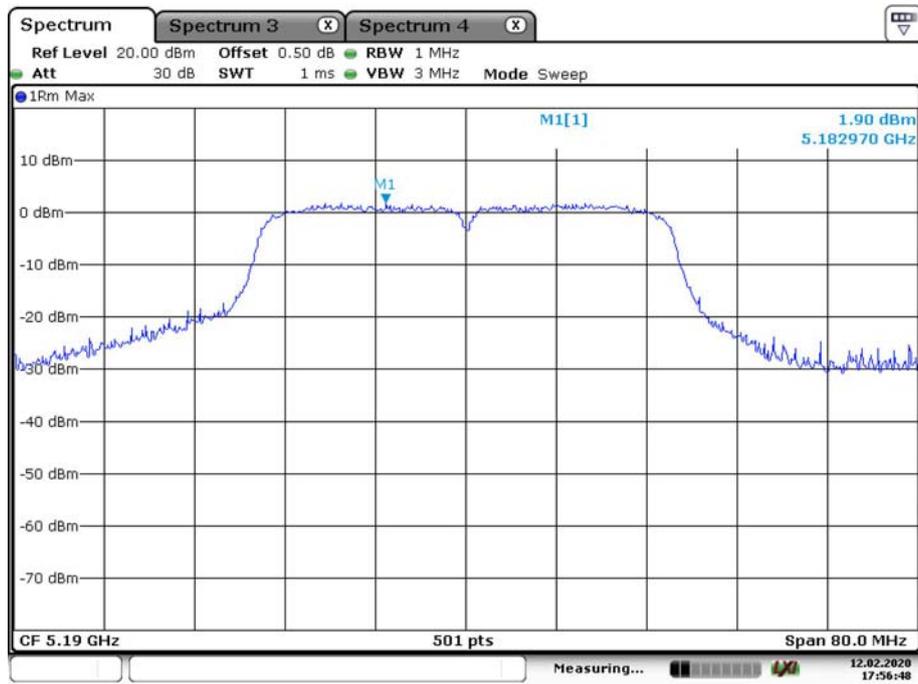

Date: 12.FEB.2020 17:56:49


802.11n ht40 High Channel

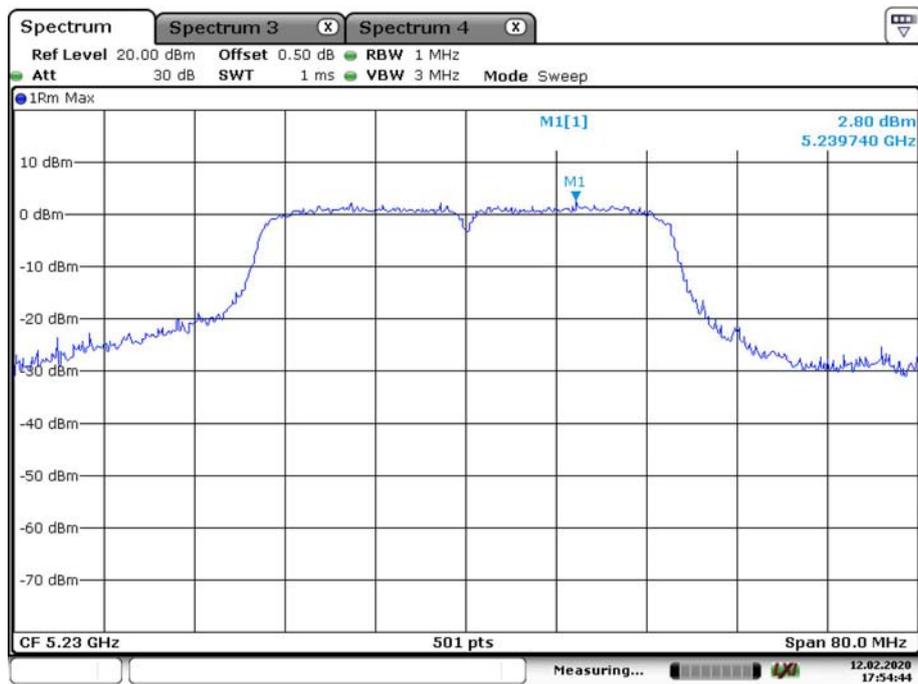

Date: 12.FEB.2020 17:54:44


5470-5725MHz

802.11a Low Channel

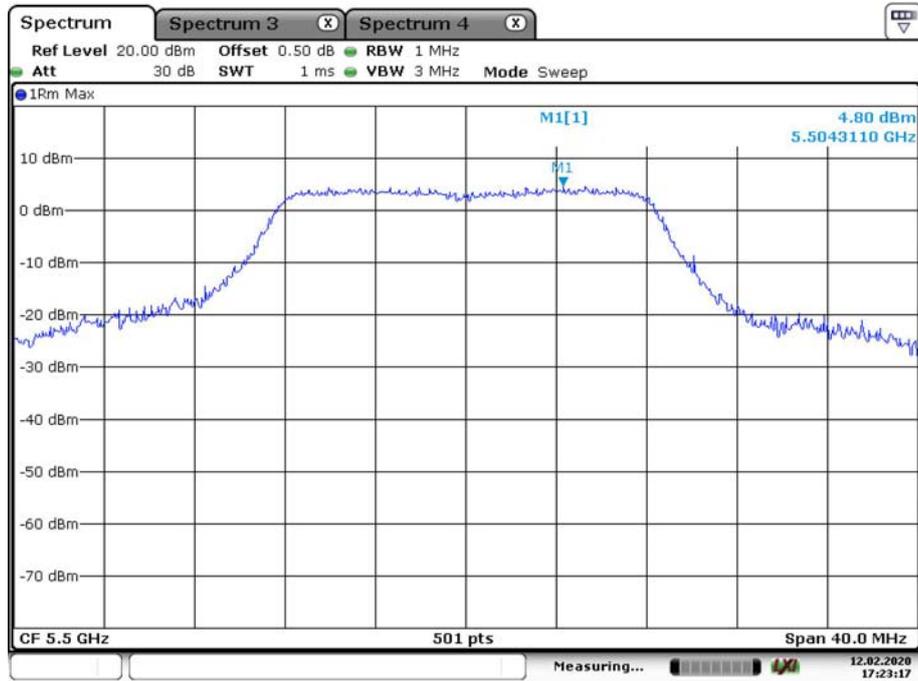


Date: 12.FEB.2020 17:23:18

802.11a Middle Channel

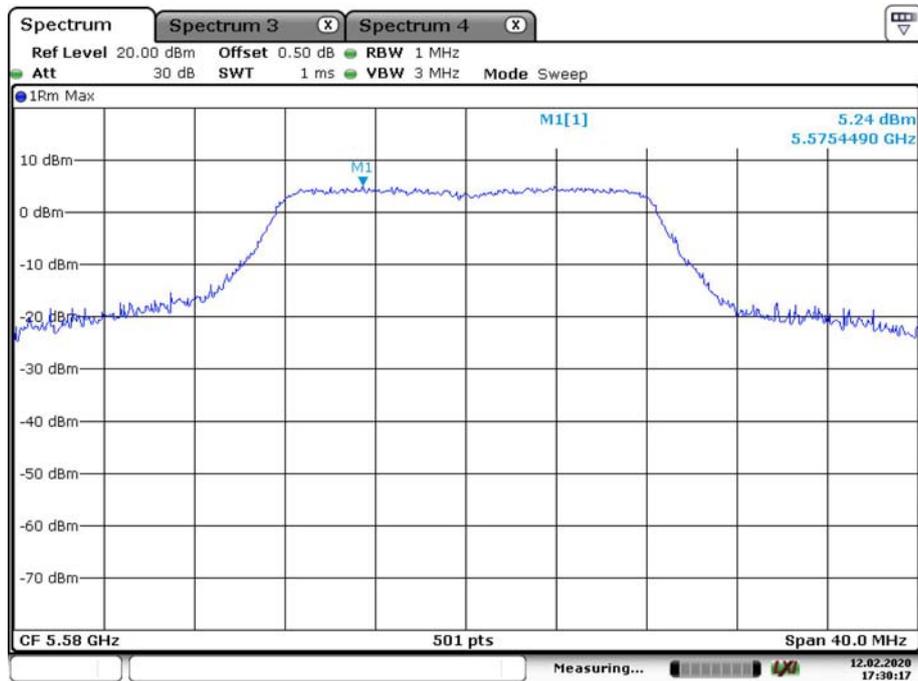


Date: 12.FEB.2020 17:30:17

802.11a High Channel

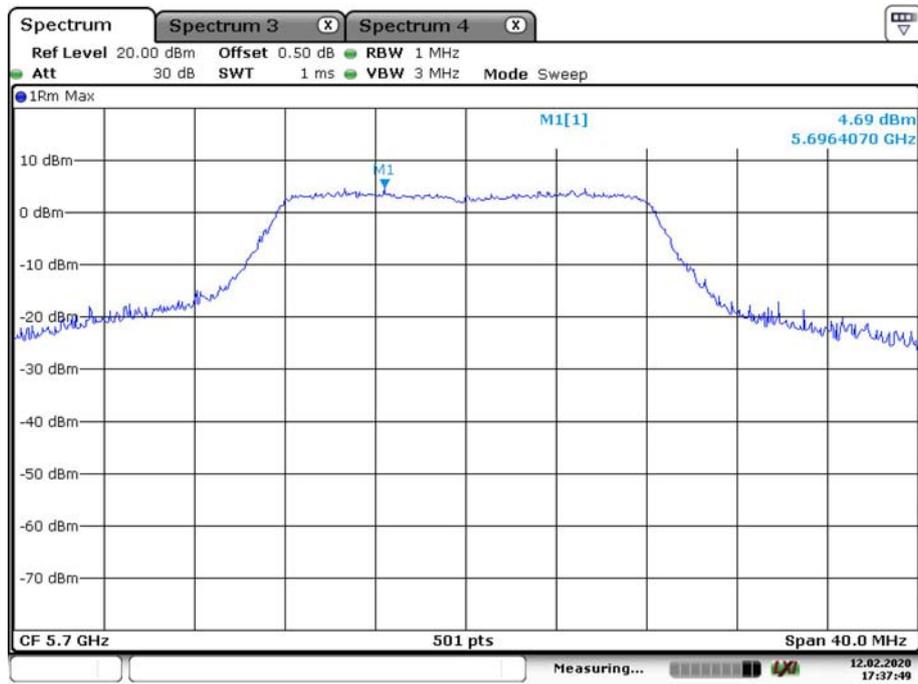


Date: 12.FEB.2020 17:37:50

802.11n ht20 Low Channel

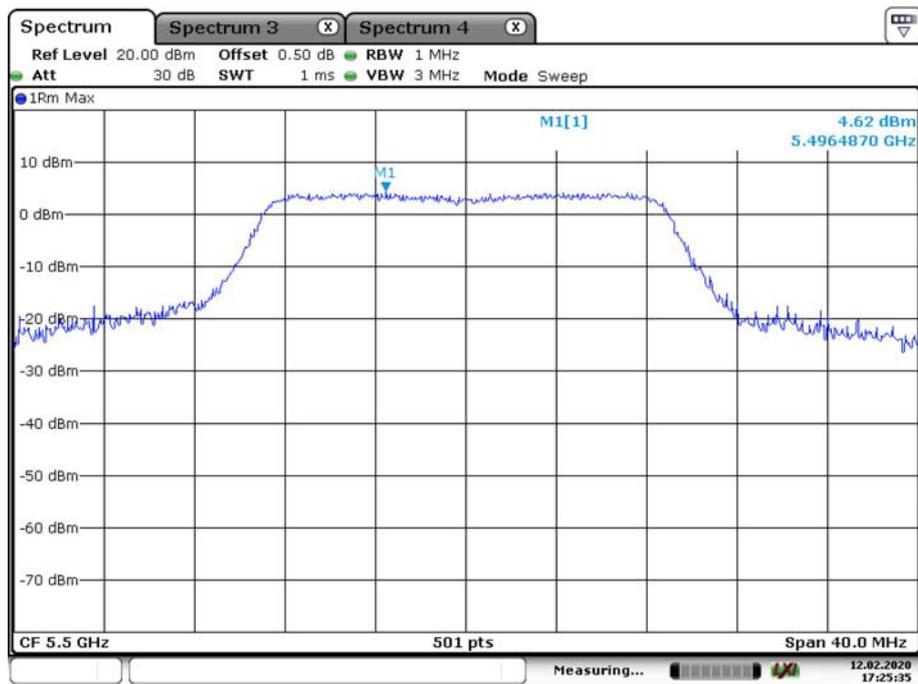


Date: 12.FEB.2020 17:25:36

802.11n ht20 Middle Channel

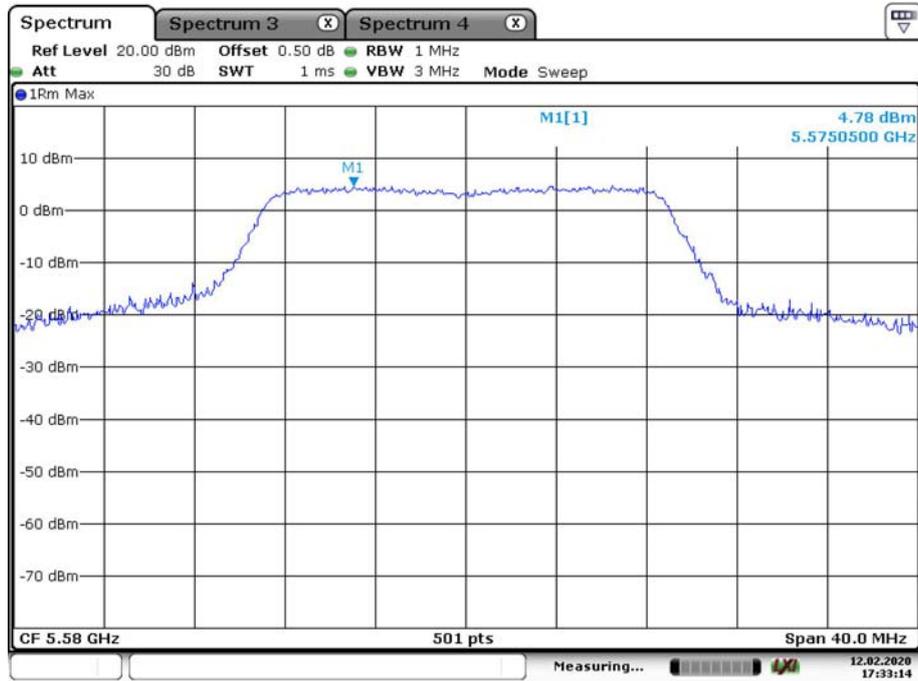


Date: 12.FEB.2020 17:33:15

802.11n ht20 High Channel

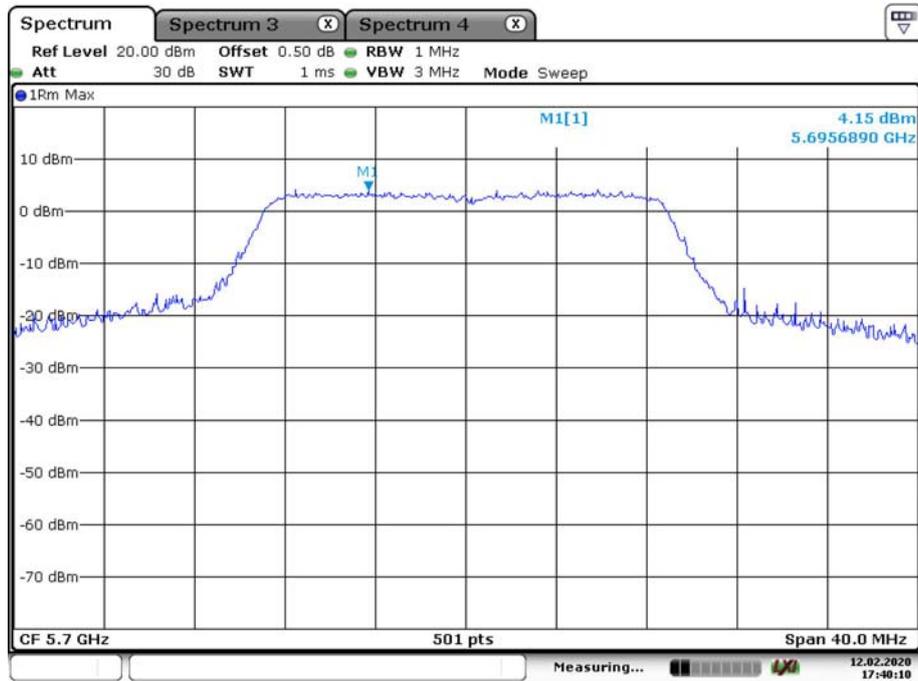


Date: 12.FEB.2020 17:40:11

802.11n ht40 Low Channel

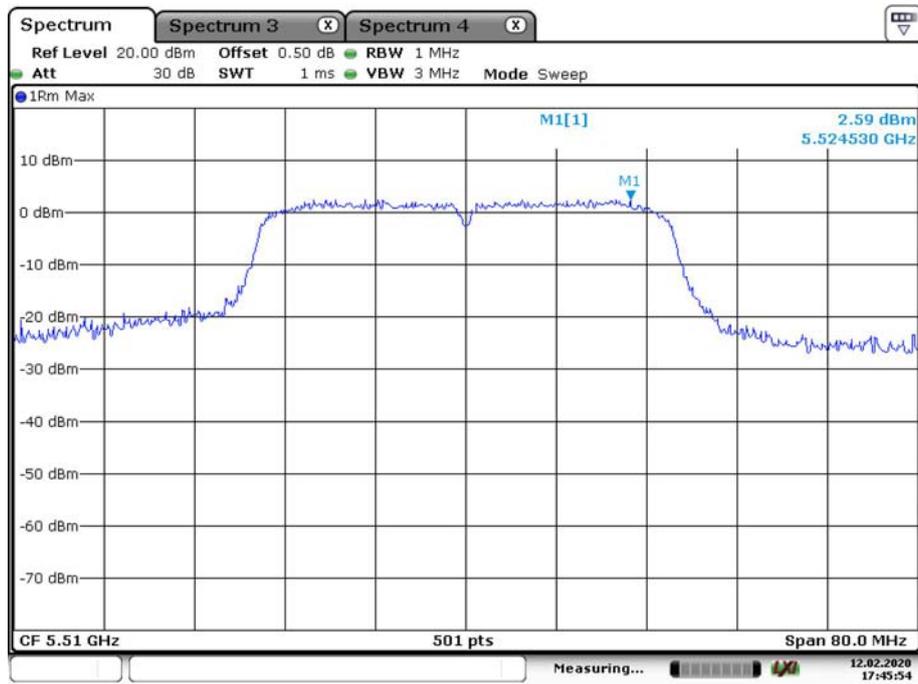


Date: 12.FEB.2020 17:45:54

802.11n ht40 Middle Channel

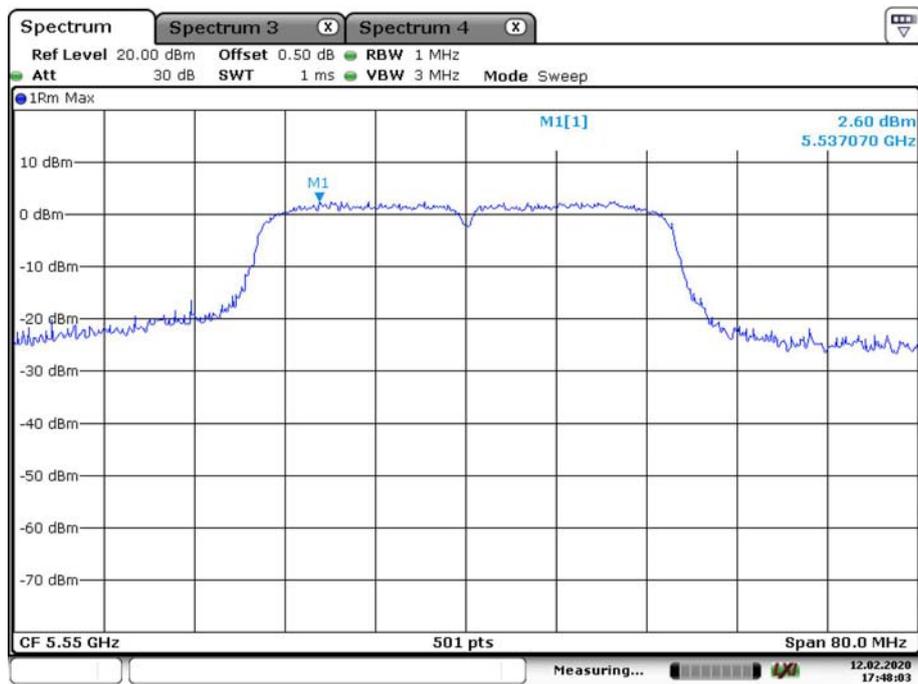

Date: 12.FEB.2020 17:48:04


802.11n ht40 High Channel

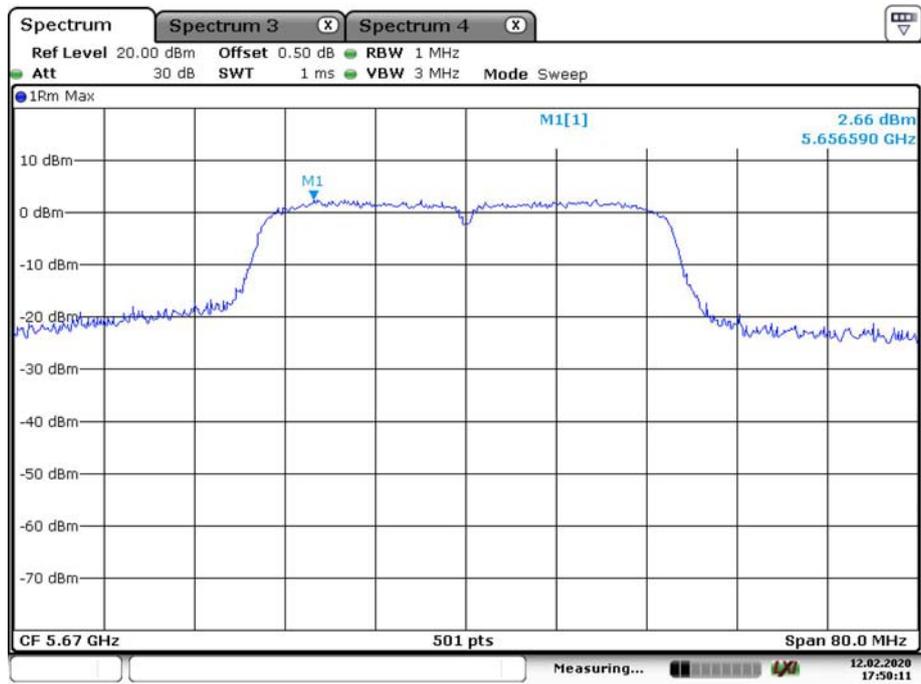


Date: 12.FEB.2020 17:50:11

5725-5850MHz


802.11a Low Channel

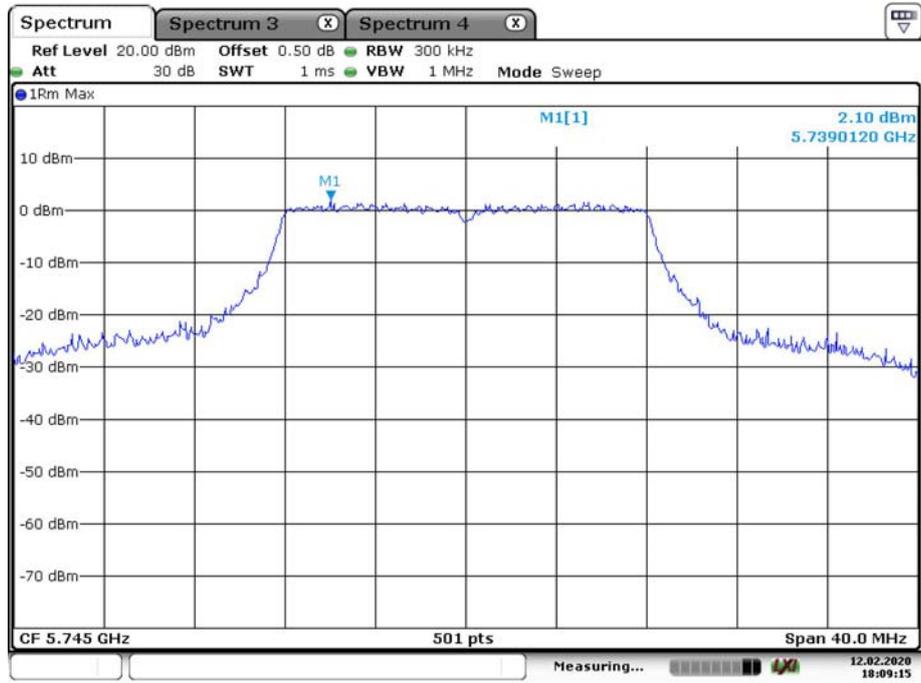


802.11a Middle Channel

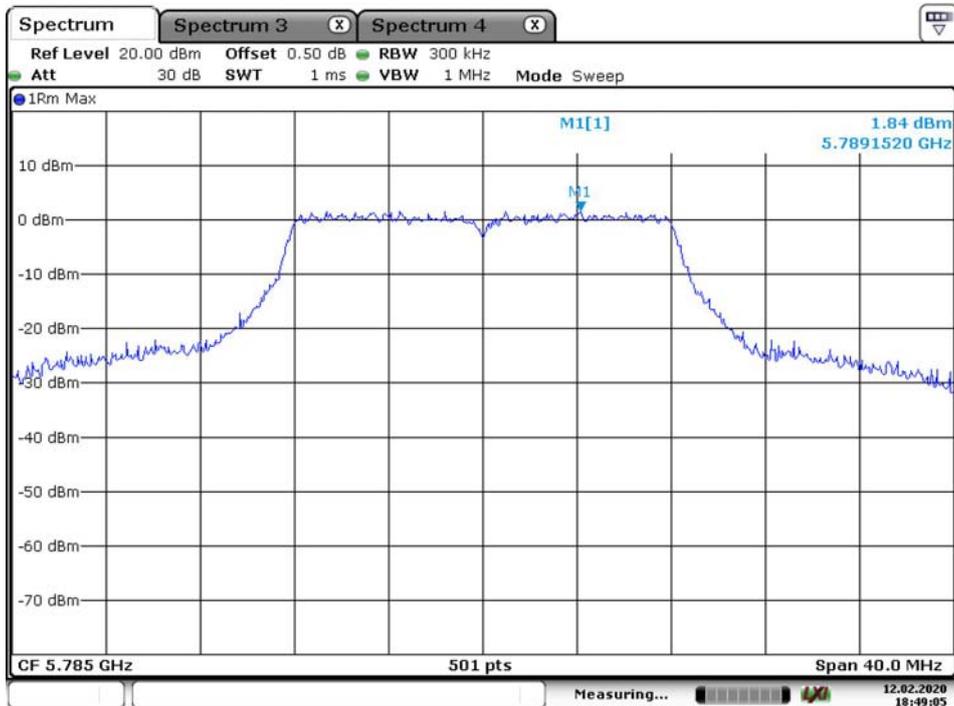


802.11a High Channel

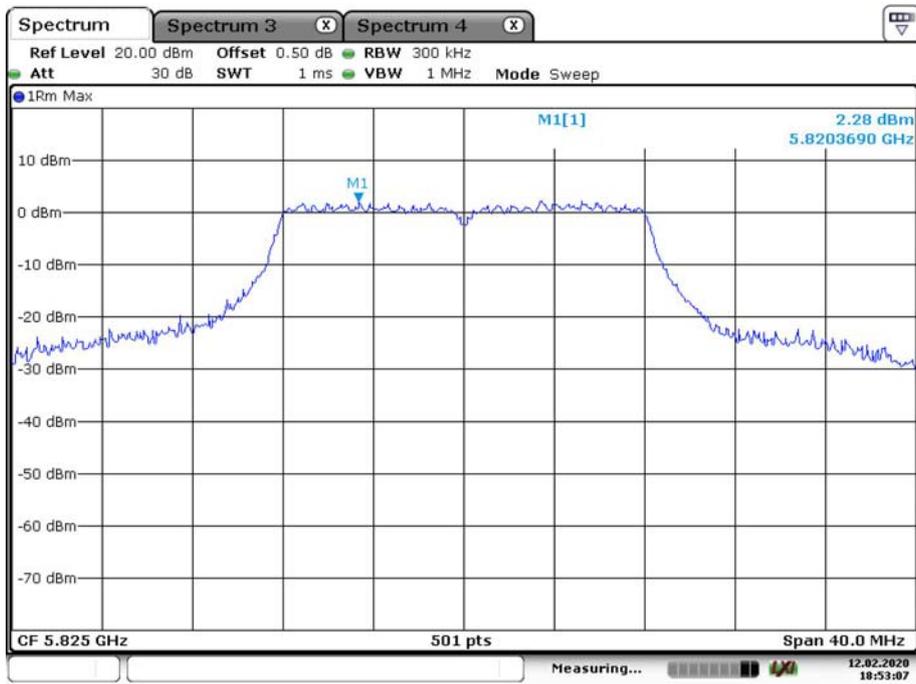

802.11n ht20 Low Channel

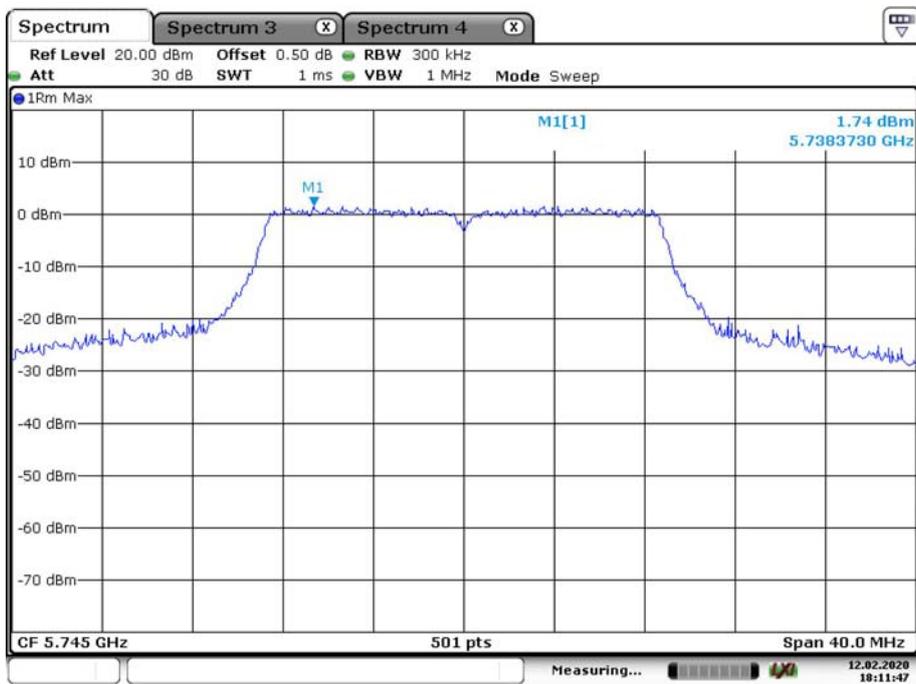


802.11n ht20 Middle Channel

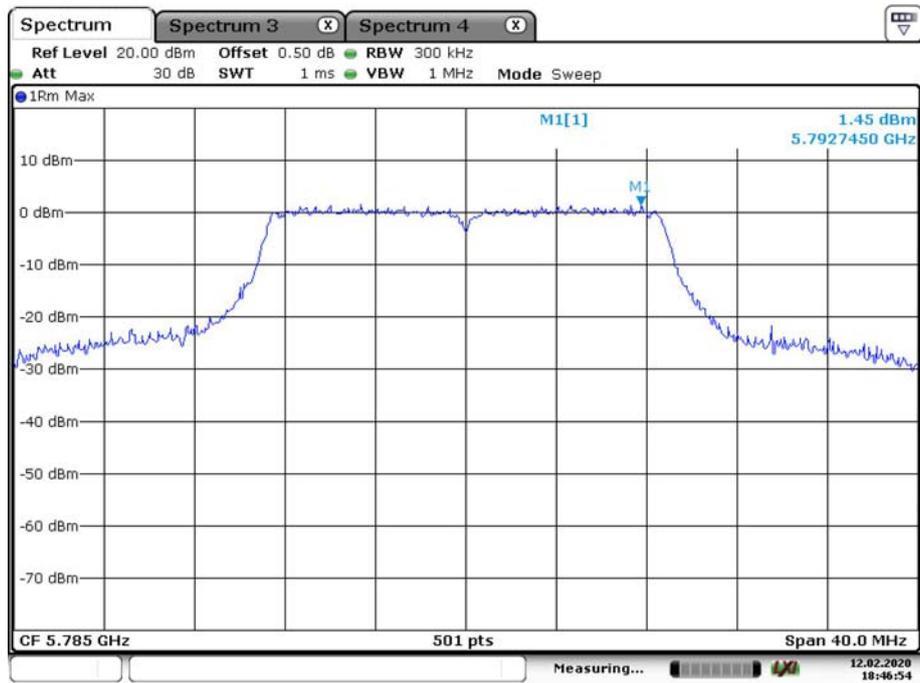


Date: 12.FEB.2020 18:46:55

802.11n ht20 High Channel

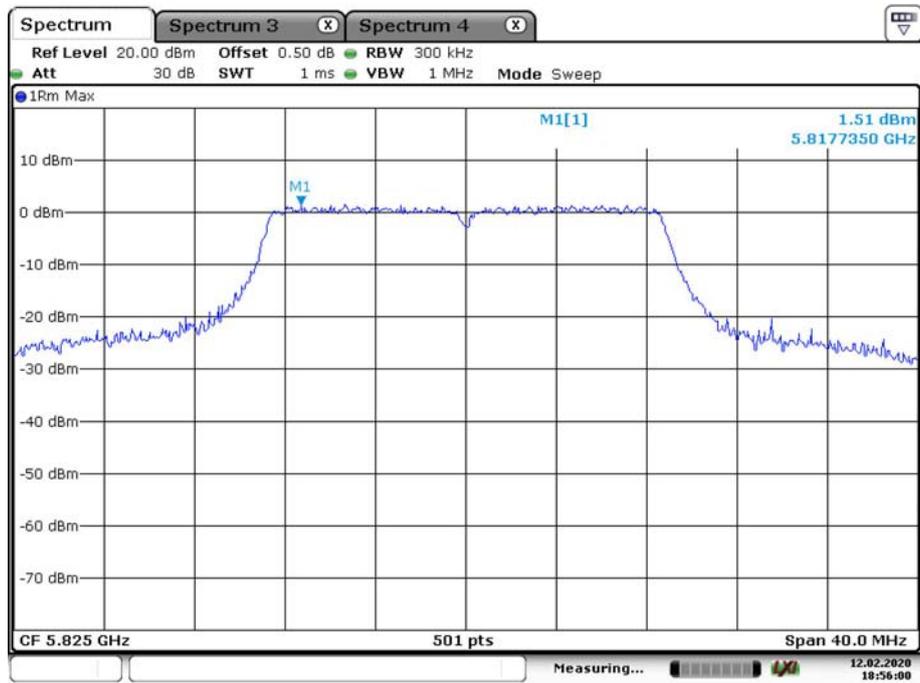


Date: 12.FEB.2020 18:56:01

802.11n ht40 Low Channel

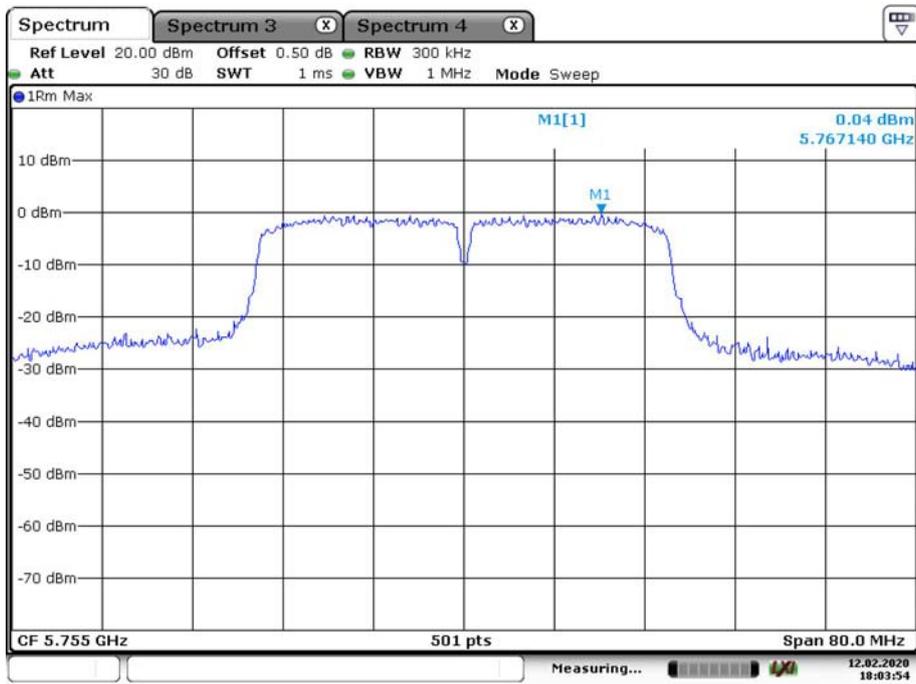

Date: 12.FEB.2020 18:03:55

802.11n ht40 High Channel

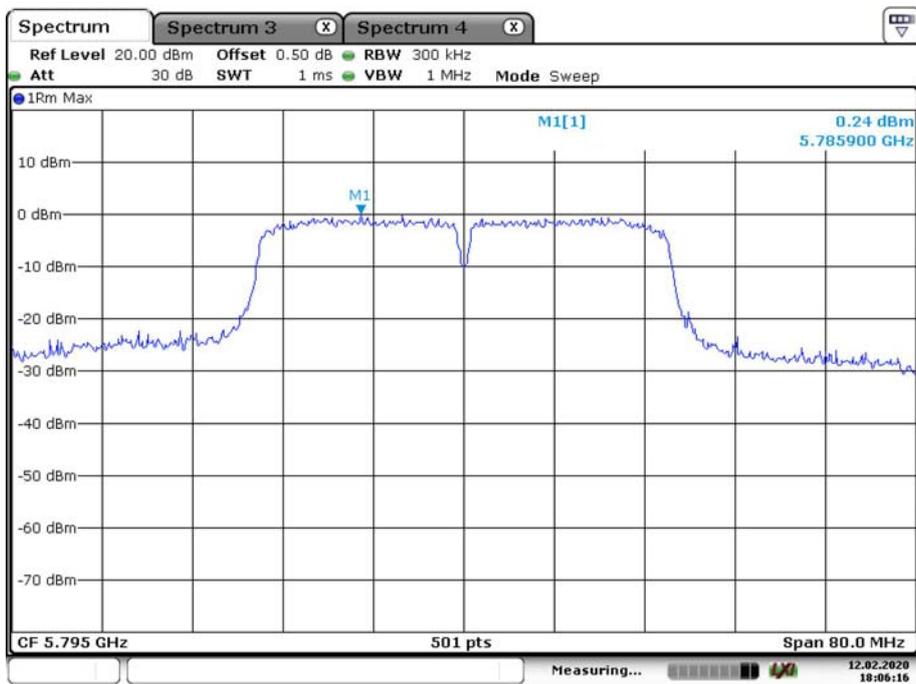

Date: 12.FEB.2020 18:06:16

**** END OF REPORT ****