

SAR EVALUATION REPORT

For

Hytera Communications Corporation Limited

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, 518057 China

FCC ID: YAMZ1PF4

Report Type: Product Type: TETRA Terminal Original Report Wilson then **Test Engineer:** Wilson Chen Report Number: RDG160321003-20A **Report Date:** 2016-04-20 Bell Hu BeilHu **Reviewed By:** SAR Engineer Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Prepared By: Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

Attestation of Test Results							
Compa			ny Name	Hytera Communications Corporation Limited			
		EUT Description		TETRA Terminal			
EU Inform		FCC ID		YAMZ1PF4			
		Model	Number	Z1p F4			
		r	Test Date	2016-04-05			
Frequency (MHz)	Mode		M	lax. SAR Level(s) Reported	Limit (W/Kg)		
450-470	TETRA	25k		1.300 W/kg rn: 1.576 W/kg	8.0		
Simultaneous	PTT+F	ВТ		Face up: 1.353 W/kg Body-Back: 1.841 W/kg			
	ANSI / IEEE C95.1: 2005 IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fileds, 3 kHz to 300 GHz.						
	ANSI / IEEE C95.3: 2002 IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to SuchFields,100 kHz—300 GHz.						
Applicable Standards	Human expos communication Part 2: Proceed	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body.					
	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques						
	KDB procedures KDB 447498 D01 v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies. KDB 865664 D01v01r04: SAR measurement 100 MHz to 6 GHz v01. KDB 643646D01 v01r03: SAR test Reduction Considerations for Occupational PTT Radios.						

Report No: RDG160321003-20A

Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for Occupational /Controlled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.

The results and statements contained in this report pertain only to the device(s) evaluated.

SAR Evaluation Report 2 of 64

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
EUT DESCRIPTION	5
TECHNICAL SPECIFICATION	5
REFERENCE, STANDARDS, AND GUILDELINES	6
SAR LIMITS	7
FACILITIES	8
DESCRIPTION OF TEST SYSTEM	9
EQUIPMENT LIST AND CALIBRATION	16
EQUIPMENTS LIST & CALIBRATION INFORMATION	
SAR MEASUREMENT SYSTEM VERIFICATION	
Liquid Verification	
System Accuracy Verification	18
SAR SYSTEM VALIDATION DATA	
EUT TEST STRATEGY AND METHODOLOGY	23
CONDUCTED OUTPUT POWER MEASUREMENT	25
PROVISION APPLICABLE	
TEST PROCEDURE	
TEST RESULTS:	
SAR MEASUREMENT RESULTS	27
SAR TEST DATA	27
TEST RESULT:	27
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	29
SAR PLOTS (SUMMARY OF THE HIGHEST SAR VALUES)	31
APPENDIX A – MEASUREMENT UNCERTAINTY	35
APPENDIX B – PROBE CALIBRATION CERTIFICATES	37
APPENDIX C – DIPOLE CALIBRATION CERTIFICATES	47
LIQUID DEPTH 15CM	
FACE-UP 2.5 CM SEPARATION TO FLAT PHANTOMBODY-BACK 0.0 CM SEPARATION TO FLAT PHANTOM	
APPENDIX E – EUT PHOTOS	
EUT – FRONT VIEWEUT – BACK VIEW	
EUT-LEFT VIEW	
EUT-RIGHT VIEW	
EUT-Top View EUT-Bottom View	
EUT-UNCOVER VIEW	
Battery(BL1401) View	61
BATTERY(BL1809) VIEW	
EUT – BELT FRONT EUT – BELT REAR	
EUT – Antenna	
APPENDIX D – INFORMATIVE REFERENCES	64

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RDG160321003-20A	Original Report	2016-04-20

SAR Evaluation Report 4 of 64

EUT DESCRIPTION

This report has been prepared on behalf of Hytera Communications Corporation Limited and their product and their product, FCC ID: YAMZ1PF4, Model: Z1p F4 or the EUT (Equipment Under Test) as referred to in the rest of this report.

Report No: RDG160321003-20A

Technical Specification

Product Type:	Portable		
Exposure Category:	Occupational/Controlled Exposure		
Antenna Type(s):	External Antenna		
Body-Worn Accessories:	Belt Clip, Headset Cable		
Face-Head Accessories:	None		
Modulation Types	TETRA: /4- DQPSK		
Modulation Type:	Bluetooth: GFSK, /4- DQPSK, 8-DPSK		
Enguenay Danda	TETRA:450-470 MHz		
Frequency Band:	Bluetooth:2402-2480 MHz		
Conducted DE Domesia	TETRA:34.36 dBm		
Conducted RF Power:	Bluetooth:7.60 dBm		
Dimensions (L*W*H):	126 mm (L) × 61 mm (W) × 23 mm (H)(with BL1401 battery)		
(not contain antenna)	126 mm (L) × 61 mm (W) × 26 mm (H)(with BL1809 battery)		
Power Source:	7.4V Rechargeable Li-ION Battery		
Normal Operation:	Face Up and Body-worn		

SAR Evaluation Report 5 of 64

REFERENCE, STANDARDS, AND GUILDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

Report No: RDG160321003-20A

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Evaluation Report 6 of 64

SAR Limits

FCC Limit (1g Tissue)

Report No: RDG160321003-20A

	SAR (W/kg)			
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)		
Spatial Average (averaged over the whole body)	0.08	0.4		
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0		
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0		

CE Limit (10g Tissue)

	SAR (W/kg)			
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)		
Spatial Average (averaged over the whole body)	0.08	0.4		
Spatial Peak (averaged over any 10 g of tissue)	2.0	10		
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0		

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

Occupational/Controlled environments Spatial Peak limit 8.0W/kg (FCC/IC) & 10 W/kg (CE) applied to the EUT.

SAR Evaluation Report 7 of 64

FACILITIES

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 6/F, the 3rd Phase of WanLi Industrial Building, Shi Hua Road, Fu Tian Free Trade Zone, Shenzhen, Guangdong, P.R. of China

SAR Evaluation Report 8 of 64

DESCRIPTION OF TEST SYSTEM

These measurements were performed with ALSAS 10 Universal Integrated SAR Measurement system from APREL Laboratories.

ALSAS-10U System Description

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller. ALSAS-10U uses the latest methodologies. And FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently available up-to 6 GHz in simulated tissue.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm2 step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.



Report No: RDG160321003-20A

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m3 is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 35mm in the Z axis.

SAR Evaluation Report 9 of 64

ALSAS-10U Interpolation and Extrapolation Uncertainty


The overall uncertainty for the methodology and algorithms the used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:

$$f_3(x,y,z) = A \frac{a^2}{\frac{a^2}{4} + {x'}^2 + {y'}^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a+2z)^2} \right)$$

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

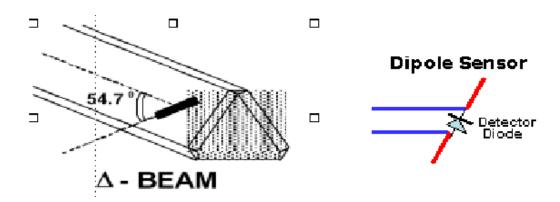

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

SAR Evaluation Report 10 of 64

Isotropic E-Field Probe Specification

Calibration Method	Frequency Dependent Below 1 GHz Calibration in air performed in a TEM Cell
Campi ation Method	Above 1 GHz Calibration in air performed in a TEM Central Above 1 GHz Calibration in air performed in waveguide
Sensitivity	$0.70 \ \mu V/(V/m)^2$ to $0.85 \ \mu V/(V/m)^2$
Dynamic Range	0.0005 W/kg to 100 W/kg
Isotropic Response	Better than 0.1 dB
Diode Compression Point (DCP)	Calibration for Specific Frequency
Probe Tip Diameter	< 2.9 mm
Sensor Offset	1.56 (+/- 0.02 mm)
Probe Length	289 mm
Video Bandwidth	@ 500 Hz: 1 dB @ 1.02 kHz: 3 dB
Boundary Effect	Less than 2.1% for distance greater than 0.58 mm
	The spatial resolution uncertainty is less than 1.5% for 4.9mm
Spatial Resolution	diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe

Report No: RDG160321003-20A

Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from $5\mu V$ to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

ADC	12 Bit
Amplifier Range	20 mV to 200 mV and 150 mV to 800 mV
Field Integration	Local Co-Processor utilizing proprietary integration algorithms
Number of Input Channels	4 in total 3 dedicated and 1 spare
Communication	Packet data via RS232

SAR Evaluation Report 11 of 64

Axis Articulated Robot

ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.

Report No: RDG160321003-20A



Robot/Controller Manufacturer	Thermo CRS	
Number of Axis	Six independently controlled axis	
Positioning Repeatability	0.05 mm	
Controller Type	Single phase Pentium based C500C	
Robot Reach	710 mm	
Communication	RS232 and LAN compatible	

ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the of aid cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.

SAR Evaluation Report 12 of 64




Phantom Types

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.

APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

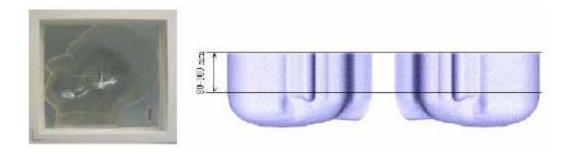

SAR Evaluation Report 13 of 64

APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 30MHz to 6GHz and numerically using XFDTD numerical software.

The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



SAR Evaluation Report 14 of 64

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Report No: RDG160321003-20A

Ingredients	Frequency (MHz)									
(% by weight)	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (Nacl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Recommended Tissue Dielectric Parameters for Head and Body

Frequency	Head	Tissue	Body Tissue		
(MHz)	Er	O' (S/m)	Er	O'(S/m)	
150	52.3	0.76	61.9	0.80	
300	45.3	0.87	58.2	0.92	
450	43.5	0.87	56.7	0.94	
835	41.5	0.90	55.2	0.97	
900	41.5	0.97	55.0	1.05	
915	41.5	0.98	55.0	1.06	
1450	40.5	1.20	54.0	1.30	
1610	40.3	1.29	53.8	1.40	
1800-2000	40.0	1.40	53.3	1.52	
2450	39.2	1.80	52.7	1.95	
3000	38.5	2.40	52.0	2.73	
5800	35.3	5.27	48.2	6.00	

SAR Evaluation Report 15 of 64

EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information


Equipment	Model	Calibration Date	Calibration Due Date	S/N
CRS F3 robot	ALS-F3	N/A	N/A	RAF0805352
CRS F3 Software	ALS-F3-SW	N/A	N/A	N/A
CRS C500C controller	ALS-C500	N/A	N/A	RCF0805379
Probe mounting device & Boundary Detection Sensor System	ALS-PMDPS-3	N/A	N/A	120-00270
Universal Work Station	ALS-UWS	N/A	N/A	100-00157
Data Acquisition Package	ALS-DAQ-PAQ-3	2015-12-14	2016-12-14	110-00212
Miniature E-Field Probe	ALS-E-020	2015-12-14	2016-12-14	500-00283
Dipole, 450 MHz	ALS-D-450-S-2	2013-10-08	2016-10-08	175-00503
Device holder/Positioner	ALS-H-E-SET-2	N/A	N/A	170-00510
Left ear SAM phantom	ALS-P-SAM-L	N/A	N/A	130-00311
Right ear SAM phantom	ALS-P-SAM-R	N/A	N/A	140-00359
UniPhantom	ALS-UM-FLAT	N/A	N/A	153-00104
Simulated Tissue 450 MHz Head	ALS-TS-450-H	Each Time	Each Time	260-01106
Simulated Tissue 450 MHz Body	ALS-TS-450-B	Each Time	Each Time	260-02108
Power Amplifier	5S1G4	N/A	N/A	71377
Attenuator	3dB	N/A	N/A	5402
Dielectric probe kit	HP85070B	2015-06-13	2016-06-13	US33020324
Network analyzer	8752C	2015-06-03	2016-06-03	3410A02356
Synthesized Sweeper	HP 8341B	2015-06-03	2016-06-03	2624A00116
Directional couple	DC6180A	2015-06-13	2016-06-13	0325849
EMI Test Receiver	ESCI	2015-06-13	2016-06-13	101746
TETRA Signal Analyzer	2310	2016-03-11	2017-03-10	231001/173

Report No: RDG160321003-20A

SAR Evaluation Report 16 of 64

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

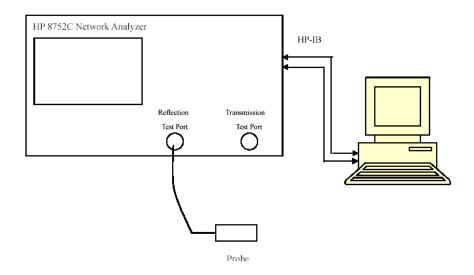

Liquid Verification Setup Block Diagram

Liquid Verification Results

Evaguanav	Liquid Parameter Target Value		Delta	a (%)	Tolerance			
Frequency (MHz)	Liquid Type	£ _r	O (S/m)	ε _r	O (S/m)	$\mathbf{\epsilon_r}$	O' (S/m)	(%)
450.0125	Head	44.12	0.88	43.50	0.87	1.425	1.149	±5
450.0125	Body	57.05	0.94	56.70	0.94	0.617	0.000	±5
460.0125	Head	43.68	0.87	43.50	0.87	0.414	0.000	±5
400.0123	Body	56.94	0.94	56.70	0.94	0.423	0.000	±5
460,0075	Head	43.21	0.88	43.50	0.87	-0.667	1.149	±5
469.9875	Body	57.06	0.93	56.70	0.94	0.635	-1.064	±5


^{*}Liquid Verification was performed on 2016-04-05.

SAR Evaluation Report 17 of 64

System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Verification Setup Block Diagram

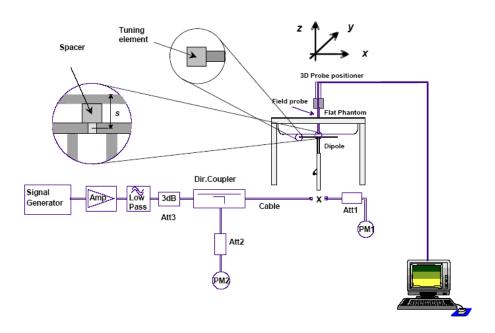

System Accuracy Check Results

Date	Frequency (MHz)	Liquid Type	Measured SAR (W/Kg)		Target Value (W/Kg)	Delta (%)	Tolerance (%)
2016 04 05	450	Head	1g	4.645	4.572	1.597	±10
2016-04-05	450	Body	1g	4.811	4.508	6.721	±10

^{*}All SAR values are normalized to 1 Watt forward power.

SAR Evaluation Report 18 of 64

SAR SYSTEM VALIDATION DATA

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Report No: RDG160321003-20A

System Performance Check 450 MHz Liquid

Dipole 450 MHz; Type: ALS-D-450-S-2; S/N: 175-00503

Product Data

Device Name : Dipole 450 MHz
Serial No. : 175-00503
Type : Dipole

Model : ALS-D-450-S-2

Frequency Band : 450
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 3.328 W/kg
Power Drift-Finish : 3.401 W/kg
Power Drift (%) : 2.193

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Phantom Data

Tissue Data

Type : Head Serial No. : 260-01106 Frequency : 450.00MHz Last Calib. Date : 05-Apr-2016 : 20.00°C Temperature : 21.00 °C Ambient Temp. : 56.00 RH% Humidity : 43.86 F/m Epsilon Sigma : 0.87 S/m

Density : 1000.00 kg/cu. m

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Dec-2015

Frequency Band : 450 Duty Cycle Factor : 1 Conversion Factor : 5.7

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 21.00 °C Ambient Temp. : 21.00 °C

Area Scan : 9x15x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 19 of 64

1 gram SAR value : 4.645 W/kg 10 gram SAR value : 3.128 W/kg Area Scan Peak SAR : 4.853 W/kg Zoom Scan Peak SAR : 7.056 W/kg

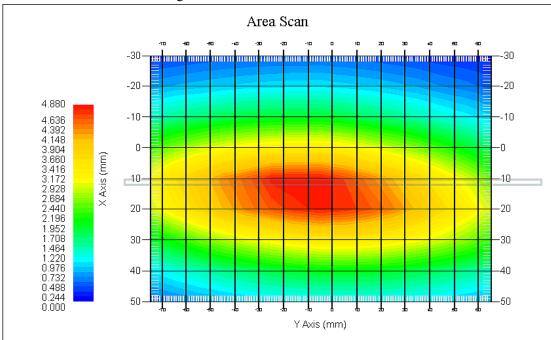

450 MHz System Verification with Head Tissue

SAR Evaluation Report 20 of 64

Report No: RDG160321003-20A

System Performance Check 450 MHz Liquid

Dipole 450 MHz; Type: ALS-D-450-S-2; S/N: 175-00503

Product Data

Device Name : Dipole 450 MHz Serial No. : 175-00503 Type : Dipole

Model : ALS-D-450-S-2

Frequency Band : 450
Max. Transmit Pwr
Drift Time : 3 min(s)
Power Drift-Start : 3.382 W/kg
Power Drift-Finish
Power Drift (%) : -1.656

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Phantom Data

Tissue Data

: Body Type : 260-01106 Serial No. : 450.00MHz Frequency Last Calib. Date : 05-Apr-2016 Temperature : 20.00 °C : 21.00 °C Ambient Temp. : 56.00 RH% Humidity : 57.36 F/m Epsilon Sigma : 0.94 S/m Density : 1000.00 kg/cu. m

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Dec-2015

Frequency Band : 450 Duty Cycle Factor : 1 Conversion Factor : 5.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 21.00 °C Ambient Temp. : 21.00 °C

Area Scan : 9x15x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 21 of 64

1 gram SAR value : 4.811 W/kg 10 gram SAR value : 3.076 W/kg Area Scan Peak SAR : 4.893 W/kg Zoom Scan Peak SAR : 7.767 W/kg

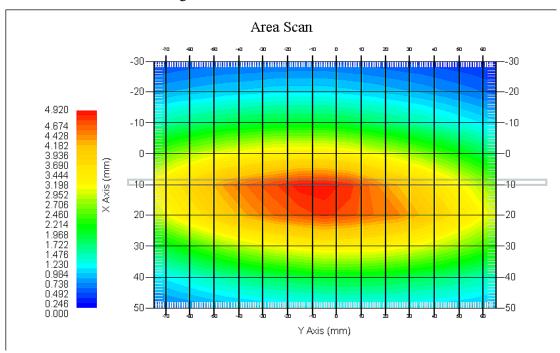

450 MHz System Verification with Body Tissue


SAR Evaluation Report 22 of 64

EUT TEST STRATEGY AND METHODOLOGY

Test Positions for front-of-face configurations

A typical example of a front-of-face device is a two-way radio that is held at a distance from the face of the user when transmitting. In these cases the device under test shall be positioned at the distance to the phantom surface that corresponds to the intended use as specified by the manufacturer in the user instructions. If the intended use is not specified, a separation distance of 25 mm5 between the phantom surface and the device shall be used.

Report No: RDG160321003-20A

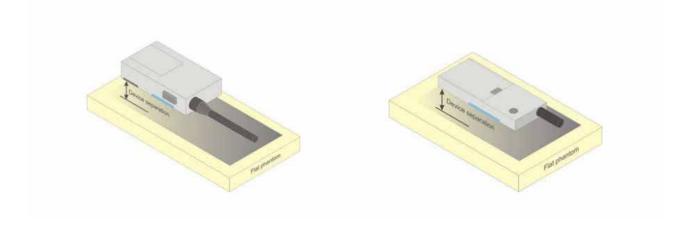

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

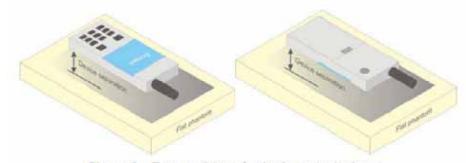


Figure 5 – Test positions for body-worn devices

SAR Evaluation Report 23 of 64

For EUT Positioning Procedures

The EUT is a portable device operational at the body and face. The intended operating positions are "at the face" with the EUT at least 2.5cm from the mouth, and "at the body" by means of the offered body worn accessories. Body worn audio and PTT operation is accompished by means of optional remote accessories that are connected to the radio.

Report No: RDG160321003-20A

Body

The EUT was positioned in normal use configuration against the phantom with the offered body worn accessory with the offered audio accessories as applicable

Head

Not applicable

Face

The EUT was positioned with its' front side separated 2.5cm from the phantom

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

- Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.
- Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 10 mm x 10 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.
- Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:
 - 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

Test methodology

IEC62209-2:2010 IEEE1528:2013 KDB 447498 D01 v06 KDB 865664 D01 v01r04 KDB 643646 D01 v01r03

SAR Evaluation Report 24 of 64


CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the Signal Analyzer through sufficient attenuation.



Report No: RDG160321003-20A

Maximum Output Power among production units

Max. tune-up tolerance power limit for Production Unit (dBm)						
PTT/Mode	Frequency(450-470)MHz					
TETRA-25k/DMO	34.77					
TETRA-25k/TMO	34.77					
Mada/Dand		Channel				
Mode/Band	Low	Middle	High			
Bluetooth3.0	8.00 8.00 8.00					
BLE	7.50	7.50	7.50			

Test Results:

Mode	Frequency Spacing (kHz)	Frequency (MHz)	Output(dBm)	Output(mW)
		450.0125	34.19	2.624
TETRA/DMO	25K	460.0125	34.19	2.624
		469.9875	34.36	2.729
		450.0125	34.19	2.624
TETRA/TMO	25K	460.0125	34.19	2.624
		469.9875	34.36	2.729

SAR Evaluation Report 25 of 64

Bluetooth:

Mode	Channel	Frequency (MHz)	Reading power (dBm)	Power output (mW)
	0	2402	6.74	4.721
BDR(GFSK)	39	2441	7.60	5.754
	78	2480	7.30	5.370
	0	2402	5.66	3.681
EDR(π/4-DQPSK)	39	2441	6.61	4.581
	78	2480	5.66	3.681
	0	2402	5.99	3.972
EDR(8-DPSK)	39	2441	6.99	5.000
	78	2480	6.16	4.130
	0	2402	6.43	4.395
BLE	19	2440	7.36	5.445
	38	2480	6.80	4.786

SAR Evaluation Report 26 of 64

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	50%
ATM Pressure:	1002 mbar

^{*} Testing was performed by Wilson Chen on 2016-04-05

Test Result:

DMO (Modulation: /4 DQPSK; Channel Spacing 25 kHz):

Frequency	Power Drift	Max. Meas.	Max. Rated		1 g SAR Va	nlue(W/Kg)	
(MHz)	(%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
			Face up (2.5	cm)			
450.0125	1.764	34.21	34.77	1.138	1.132	1.288	/
460.0125	1.312	34.25	34.77	1.127	1.153	1.300	1#
469.9875	1.409	34.30	34.77	1.114	1.089	1.213	/
		Body-E	Back with Belt	Clip(0.0cm))		
450.0125	1.616	34.21	34.77	1.138	1.356	1.543	/
460.0125	0.819	34.25	34.77	1.127	1.276	1.438	/
469.9875	0.963	34.30	34.77	1.114	1.414	1.576	2#

Report No: RDG160321003-20A

TMO (Modulation: /4 DQPSK; Channel Spacing 25 kHz):

Frequency	Power Drift	Max. Meas.	Max. Rated		1 g SAR Va	alue(W/Kg)	
(MHz)	(%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
			Face up (2.5	cm)			
450.0125	-0.577	34.19	34.77	1.143	0.988	1.129	/
460.0125	-1.527	34.19	34.77	1.143	1.092	1.248	3#
469.9875	1.406	34.36	34.77	1.099	1.113	1.223	/
		Body-E	Back with Belt	Clip(0.0cm)		
450.0125	-2.351	34.19	34.77	1.143	1.235	1.411	/
460.0125	-0.666	34.19	34.77	1.143	1.151	1.315	/
469.9875	1.433	34.36	34.77	1.099	1.322	1.453	4#

SAR Evaluation Report 27 of 64

Note:

1. When the 1-g SAR tested using the default battery and default accessories is $\leq 3.5W/Kg$, testing for other channels are optional.

Report No: RDG160321003-20A

- 2. Passive body-worn and audio accessories generally do not apply to the head SAR of PTT radios.
- 3. The device support full-duplex, for full-duplex mode, it is no need to correct by Multiplying 50% for PTT.
- 4. For full-duplex mode, it is no need to correct by Multiplying 50% for PTT.
- 5. Since the two types of battery don't influence the test distance, we only select the higher capacity battery(type:BL1809) to test
- 6. The whole antenna and radiating structures that may contribute to the measured SAR or influence the SAR distribution has been included in the area scan.

SAR Evaluation Report 28 of 64


SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

KDB 447498D01 General RF Exposure Guidance v06

Stand-alone and simultaneous SAR evaluation for a PTT with multiple transmitters is base on the antennas distance of each radio.

Report No: RDG160321003-20A

BT and PTT Antenna Location:

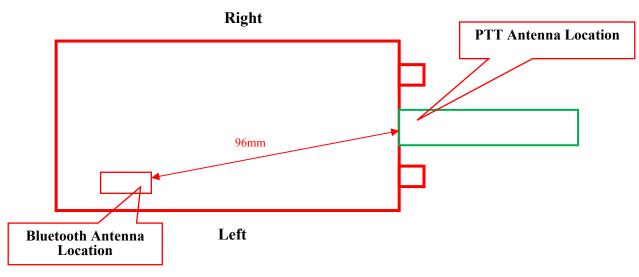

Antenna Information:

Description of Simultaneo	Antonnas Distanas (mm)		
Transmitter Combination	Simultaneous?	Antennas Distance (mm)	
PTT + Bluetooth	V	96	

Standalone SAR test exclusion considerations

Mode	Frequency (GHz)	Test Position	P_{avg} (dBm)	P _{avg} (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
Bluetooth	2.48	Face up	8.00	6.31	25	0.4	3.0	Yes
Bluetooth	2.48	Body-Back	8.00	6.31	0	2.0	3.0	Yes

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot \sqrt{f(GHz)} \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

SAR Evaluation Report 29 of 64

Standalone SAR estimation:

Mode	Frequency (GHz)	Distance (mm)	P _{avg} (dBm)	P _{avg} (mW)	Estimated 1-g (W/kg)
Bluetooth Face up	2.480	25	8.00	6.31	0.053
Bluetooth Body-Back	2.480	0	8.00	6.31	0.265

Report No: RDG160321003-20A

Note:

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

[(max. power of channel, including **tune-up tolerance**, mW)/(min. test separation distance,mm)]·[$\sqrt{f(GHz)/x}$] W/kg for test separation distances ≤ 50 mm; where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

Simultaneous SAR test exclusion considerations:

Dog!#ion	Reported SA	AR (W/kg)	ΣSAR
Position	TETRA	ВТ	< 8.0 W/kg
Face up (25mm)	1.300	0.053	1.353
Body-Back	1.576	0.265	1.841

Conclusion:

ΣSAR < 8 W/kg therefore simultaneous transmission SAR with Volume Scans is **not** required.

SAR Evaluation Report 30 of 64

SAR Plots (Summary of the Highest SAR Values)

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

DMO mode, Face-Up 2.5cm (TDMA 25k-460.0125 MHz)

Measurement Data

Modulation mode : $\pi/4$ -DQPSK

Crest Factor : 4

Scan Type : Complete

Area Scan : 9x13x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 1.015 W/kg Power Drift-Finish : 1.028 W/kg Power Drift (%) : 1.312

Tissue Data

Type : Head

Frequency : 460.0125 MHz
Epsilon : 43.68 F/m
Sigma : 0.87 S/m
Density : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283
Frequency Band : 450
Duty Cycle Factor : 4
Conversion Factor : 5.7

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 1.153 W/kg 10 gram SAR value : 0.913 W/kg Area Scan Peak SAR : 1.195 W/kg Zoom Scan Peak SAR : 1.689 W/kg

Plot 1#

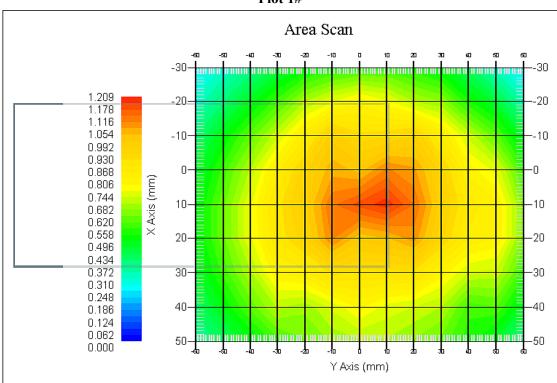

SAR Evaluation Report 31 of 64

DMO mode, Body-worn 2.5cm (TDMA 25k-469.9875 MHz)

Measurement Data

Modulation mode : π/4-DQPSK

Crest Factor : 4

Scan Type : Complete

Area Scan : 9x13x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 1.286 W/kg Power Drift-Finish : 1.297 W/kg Power Drift (%) : 0.963

Tissue Data

Type : Body

: 469.9875 MHz Frequency Epsilon : 57.06 F/m Sigma : 0.93 S/m Density : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 450 **Duty Cycle Factor** : 4 Conversion Factor : 5.8

: 1.20 1.20 1.20 Probe Sensitivity $\mu V/(V/m)2$

: 95.00 mV **Compression Point** Offset : 1.56 mm

1 gram SAR value : 1.414 W/kg 10 gram SAR value : 1.104 W/kg Area Scan Peak SAR : 1.426 W/kg Zoom Scan Peak SAR : 2.077 W/kg

Plot 2#

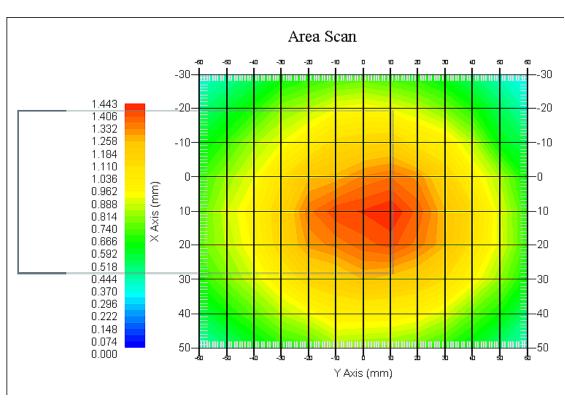

SAR Evaluation Report 32 of 64

DMO mode, Face-Up 2.5cm (TDMA 25k-460.0125 MHz)

Measurement Data

Modulation mode : $\pi/4$ -DQPSK

Crest Factor : 4

Scan Type : Complete

Area Scan : 9x13x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 1.051 W/kg Power Drift-Finish : 1.035 W/kg Power Drift (%) : -1.527

Tissue Data

Type : Head

Frequency : 460.0125 MHz
Epsilon : 43.68 F/m
Sigma : 0.87 S/m
Density : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 450 Duty Cycle Factor : 4 Conversion Factor : 5.7

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 1.092 W/kg 10 gram SAR value : 0.866 W/kg Area Scan Peak SAR : 1.157 W/kg Zoom Scan Peak SAR : 1.579 W/kg

Plot 3#

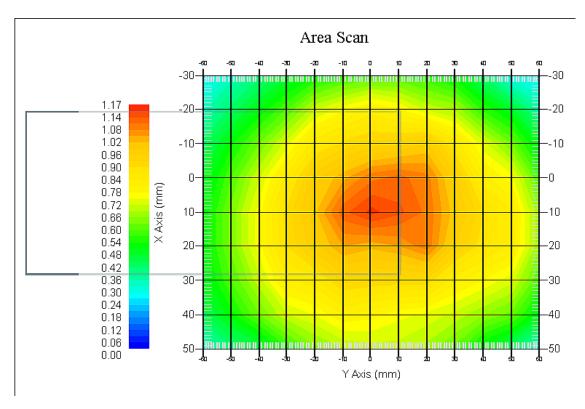

SAR Evaluation Report 33 of 64

DMO mode, Body-worn 2.5cm (TDMA 25k-469.9875 MHz)

Measurement Data

Modulation mode : $\pi/4$ -DQPSK

Crest Factor : 4

Scan Type : Complete

Area Scan : 9x13x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 1.267 W/kg Power Drift-Finish : 1.285 W/kg Power Drift (%) : 1.433

Tissue Data

Type : Body

 Frequency
 : 469.9875 MHz

 Epsilon
 : 57.06 F/m

 Sigma
 : 0.93 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283
Frequency Band : 450
Duty Cycle Factor : 4
Conversion Factor : 5.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 1.322 W/kg 10 gram SAR value : 1.050 W/kg Area Scan Peak SAR : 1.383 W/kg Zoom Scan Peak SAR : 1.992 W/kg

Plot 4#

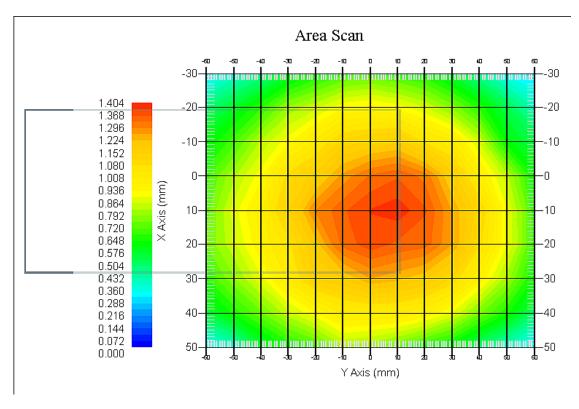

SAR Evaluation Report 34 of 64

APPENDIX A – MEASUREMENT UNCERTAINTY

According to IEEE1528:2013, the uncertainty budget has been determined for the Head SAR measurement system and is given in the following Table.

Report No: RDG160321003-20A

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c _i ¹ (1-g)	c _i ¹ (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %				
Measurement System											
Probe Calibration	3.5	normal	1	1	1	3.5	3.5				
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^1$	1.5	1.5				
Hemispherical Isotropy	10.9	rectangular	$\sqrt{3}$	√ср	√ср	4.4	4.4				
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6				
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7				
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6				
Readout Electronics	1.0	normal	1	1	1	1.0	1.0				
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5				
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0				
RF Ambient Condition -Noise	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3				
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7				
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2				
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7				
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1				
Test sample related											
Test sample positioning	2.0	normal	1	1	1	2.0	2.0				
Device Holder Uncertainty	4.0	normal	1	1	1	6.215	6.215				
Drift of Output Power	5.0	rectangular	$\sqrt{3}$	1	1	2.67	2.67				
Phantom and Setup											
Phantom Uncertainty	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0				
SAR correction in permittivity and conductivity	1.2	normal	1	1	0.85	1.2	1.0				
Liquid conductivity measurement	5.0	normal	1	0.78	0.71	3.9	3.6				
Liquid permittivity measurement	5.0	normal	1	0.25	0.29	1.3	1.5				
conductivity—temperat ure	1.1	rectangular	$\sqrt{3}$	0.78	0.71	0.5	0.5				
permittivity—temperatu re	1.3	rectangular	$\sqrt{3}$	0.23	0.23	0.2	0.2				
Combined Uncertainty		RSS				10.78	10.55				
Expanded uncertainty (coverage factor=2)		Normal(k=2)				21.56	21.10				

SAR Evaluation Report 35 of 64

According to IEC62209-2:2010, the uncertainty budget has been determined for the Body SAR measurement system and is given in the following Table.

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c _i ¹ (1-g)	c _i ¹ (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %				
Measurement System											
Probe Calibration	3.5	normal	1	1	1	3.5	3.5				
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	1	1	1.5	1.5				
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6				
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7				
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6				
Readout Electronics	1.0	normal	1	1	1	1.0	1.0				
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5				
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0				
RF Ambient Condition -Noise	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3				
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7				
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2				
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7				
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1				
		Test sar	nple relate	ed							
Test sample positioning	2.0	normal	1	1	1	2.0	2.0				
Device Holder Uncertainty	4.0	normal	1	1	1	6.215	6.215				
Drift of Output Power	5.0	rectangular	$\sqrt{3}$	1	1	2.67	2.67				
		Phantor	n and Setu	ıp							
Phantom Uncertainty	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0				
SAR correction in permittivity and conductivity	1.2	normal	1	1	0.84	1.2	1.0				
Liquid conductivity measurement	5.0	normal	1	0.78	0.71	3.9	3.6				
Liquid permittivity measurement	5.0	normal	1	0.23	0.26	1.3	1.5				
conductivity—temperat ure	1.1	rectangular	$\sqrt{3}$	0.78	0.71	0.5	0.5				
permittivity—temperatu re	1.3	rectangular	$\sqrt{3}$	0.23	0.26	0.2	0.2				
Combined Uncertainty		RSS				9.58	9.49				
Expanded uncertainty (coverage factor=2)		Normal(k=2)				19.16	18.98				

SAR Evaluation Report 36 of 64

APPENDIX B – PROBE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Report No: RDG160321003-20A

Calibration File No.: PC-1654

Task No: BACL-5805

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

> Equipment: Miniature Isotropic RF Probe Record of Calibration Head and Body Manufacturer: APREL Inc. Model No.: ALS-E020

Serial No.: 500-00283

Calibration Procedure: D01-032-E020-V2, D22-012-Tissue, D28-002-Dipole

Project No: BACL-5805

Calibrated: 12th December 2015 Released on: 14th December 2015

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr. OTTAWA, ONTARIO CANADA K2K3J1 Division of APREL Lab. TEL: (613) 435-8300 FAX: (613) 435-8306

SAR Evaluation Report 37 of 64

Division of APREL Inc.

Introduction

This Calibration Report reproduces the results of the calibration performed in line with the references listed below. Calibration is performed using accepted methodologies as per the references listed below. Probes are calibrated for air, and tissue and the values reported are the results from the physical quantification.

Report No: RDG160321003-20A

Calibration Method

Probes are calibrated using the following methods.

<800 MHz

TEM Cell for sensitivity in air

Standard phantom using temperature transfer method for sensitivity in tissue

>800 MHz

Waveguide* method to determine sensitivity in air and tissue

*Waveguide is numerically (simulation) assessed to determine the field distribution and power

The boundary effect for the probe is assessed using a standard flat phantom where the probe output is compared against a numerically simulated series of data points

References

- IEEE Standard 1528:2013
 - IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- o IEC 62209-1:2006
 - Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices Human models. instrumentation, and procedures Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices
- o IEC 62209-2:2010
 - Human exposure to RF fields from hand-held and body-mounted wireless devices Human models, instrumentation, and procedures Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz 6 GHz)
- o TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Page 2 of 10 Probe S/N 500-00283

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 38 of 64

Division of APREL Inc.

Conditions

Probe 500-00283 was a recalibration.

Ambient Temperature of the Laboratory: 20 $^{\circ}$ C +/- 1.5 $^{\circ}$ C Temperature of the Tissue: 21 $^{\circ}$ C +/- 1.5 $^{\circ}$ C Relative Humidity: < 60%

Primary Measurement Standards

 Instrument
 Serial Number
 Cal due date

 Power Meter Tektronix USB
 11C940
 Apr 2, 2017

 Signal Generator Agilent E4438C
 MY45094463
 Dec 11, 2017

Secondary Measurement Standards

Network Analyzer Anritsu 37347C 002106 Feb. 4, 2017

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Dan Brooks, Test Engineer

Page 3 of 10 Probe S/N 500-00283

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 39 of 64

Division of APREL Inc.

Probe Summary

Probe Type: E-Field Probe E-020

Serial Number: 500-00283

Frequency: As presented on page 5

Sensor Offset: 1.56 Sensor Length: 2.5

Tip Enclosure: Composite*

Tip Diameter: < 2.9 mm

Tip Length: 55 mm Total Length: 289 mm **Diode Compression Point:** 95 mV

Sensitivity in Air

Frequency Range	Channel X, μV/(V/m) ²	Channel Y, μV/(V/m) ²	Channel Z, $\mu V/(V/m)^2$	Tolerance, μV/(V/m)²
450 MHz	1.212	1.205	1.199	±0.004
750 MHz, 835 MHz 900 MHz	1.212	1.21	1.209	±0.004
1 GHz – 4 GHz	1.21	1.21	1.207	±0.004
5 GHz – 6 GHz	1.2	1.192	1.19	±0.005

Page 4 of 10
This page has been reviewed for content and attested to on Page 2 of this document. Probe S/N 500-00283

40 of 64 SAR Evaluation Report

^{*}Resistive to recommended tissue recipes per IEEE-1528

Division of APREL Inc.

Calibration for Tissue (Head H, Body B)

Frequency	Tissue Type	Measured Epsilon	Measured Sigma	Standard Uncertainty (%)	Calibration Frequency Range (MHz)	Conversion Factor
450 H	Head	43.5	0.84	3.5	±50	5.7
450 B	Body	56.77	0.93	3.5	±50	5.8
750 H	Head	42.92	0.92	3.5	±50	6.0
750 B	Body	55.57	0.93	3.5	±50	5.9
835 H	Head	43.44	0.94	3.5	±50	5.9
835 B	Body	54.91	1.00	3.5	±50	5.9
900 H	Head	41.05	1.01	3.5	±50	6.0
900 B	Body	54.86	1.04	3.5	±50	5.9
1450 H	Head	X	X	X	X	Х
1450 B	Body	X	X	X	X	Х
1500 H	Head	X	X	X	X	X
1500 B	Body	×	X	X	×	X
1640 H	Head	X	X	X	×	X
1640 B	Body	X	×	×	X	X
1750 H	Head	38.58	1.36	3.5	±75	5.4
1750 B	Body	51.5	1.52	3.5	±75	5.3
1800 H	Head	x	X	X	X	X
1800 B	Body	х	X	X	X	х
1900 H	Head	40.72	1.37	3.5	±75	4.8
1900 B	Body	52.29	1.58	3.5	±75	4.8
2000 H	Head	×	×	X	×	×
2000 B	Body	X	X	X	X	×
2100 H	Head	X	X	X	×	X
2100 B	Body	x	X	×	×	×
2300 H	Head	x	×	X	X	×
2300 B	Body	X	X	X	X	X
2450 H	Head	37.35	1.85	3.5	±75	4.8
2450B	Body	53.26	1.96	3.5	±75	4.3
3000 H	Head	X	X	X	X	X
3000 B	Body	×	X	X	×	×
3600 H	Head	37.24	3.14	3.5	±100	4.4
3600 B	Body	50.23	3.81	3.5	±100	4.1
5250 H	Head	35.05	4.65	3.5	±100	3.1
5250 B	Body	46.24	5.11	3.5	±100	2.9
5600 H	Head	34.95	5.06	3.5	±100	3.0
5600 B	Body	45.95	5.73	3.5	±100	2.4
5800 H	Head	34.57	5.27	3.5	±100	3.1
5800 B	Body	46.01	6.10	3.5	±100	2.6

Probe S/N 500-00283

Page 5 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 41 of 64

Division of APREL Inc.

Boundary Effect:

Uncertainty resulting from the boundary effect is less than 2.1% for the distance between the tip of the probe and the tissue boundary, when less than 0.58mm.

Report No: RDG160321003-20A

Spatial Resolution:

The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe.

DAQ-PAQ Contribution

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 M Ω .

Probe Calibration Uncertainty

Uncertainty component	Tolerance (±%)	Probability distribution	Divisor	Standard uncertainty (±%)
Incident or forward power	2.5	R	√3	1.44
Reflected power	2	R	√3	1.15
Liquid conductivity measurement	1	R	√3	0.58
Liquid permittivity measurement	1	R	√3	0.58
Liquid conductivity deviation	1.5	R	√3	0.87
Liquid permittivity deviation	1.5	R	√3	0.87
Frequency deviation	2.25	R	√3	1.30
Field homogeneity	2.5	R	√3	1.44
Field-probe positioning	2.5	R	√3	1.44
Field-probe linearity	1.55	R	√3	0.89
Combined standard uncertainty		RSS		3.50


Page 6 of 10 Probe S/N 500-00283

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 42 of 64

Division of APREL Inc.


Receiving Pattern Air

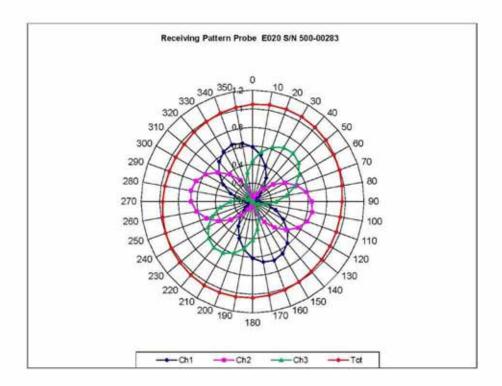



Page 7 of 10
This page has been reviewed for content and attested to on Page 2 of this document. Probe S/N 500-00283

SAR Evaluation Report 43 of 64

Division of APREL Inc.



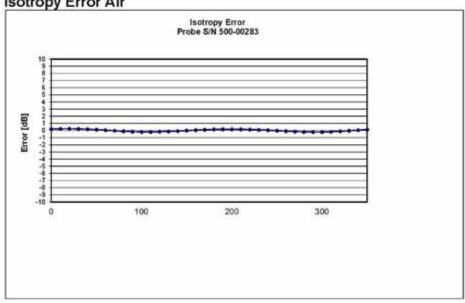

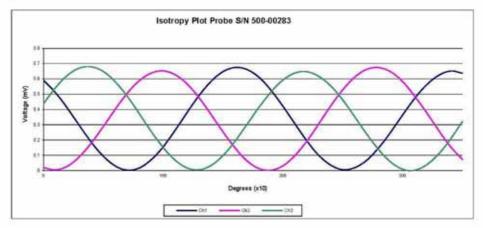


Page 8 of 10
This page has been reviewed for content and attested to on Page 2 of this document. Probe S/N 500-00283

SAR Evaluation Report 44 of 64


Division of APREL Inc.

Dynamic Range

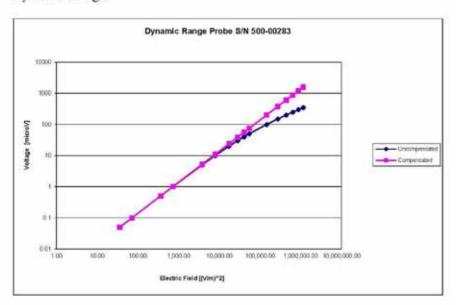

Video Bandwidth

Probe Frequency Characteristics

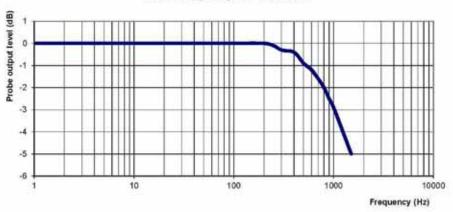

Video Bandwidth at 500 Hz 1 dB Video Bandwidth at 1.02 KHz: 3 dB

Page 9 of 10 Probe S/N 500-00283

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 45 of 64

ANNEX

Report No: RDG160321003-20A

PROBE ALS-E020 S/N 500-00283 CALIBRATION

Conditions

 $\begin{array}{lll} \mbox{Ambient Temperature of the laboratory:} & 20 \ ^{\circ}\mbox{C} \ +/- \ 1.5 \ ^{\circ}\mbox{C} \\ \mbox{Temperature of the Tissue:} & 21 \ ^{\circ}\mbox{C} \ +/- \ 1.5 \ ^{\circ}\mbox{C} \\ \mbox{Relative Humidity:} & < 55 \% \end{array}$

Frequency	Tissue Type	Measured Epsilon	Measured Sigma	Standard Uncertainty (%)	Calibration Frequency Range (MHz)	Conversion Factor
150 H	Head	50.6	0.78	3.5	±50	6.0
150 B	Body	60.8	0.82	3.5	±50	6.0

Probe Calibration Uncertainty

Uncertainty component	Tolerance (± %)	Probability distribution	Divisor	Standard uncertainty (± %)
Incident or forward power	2.5	R	√3	1.44
Reflected power	2	R	√3	1.15
Liquid conductivity measurement	1	R	√3	0.58
Liquid permittivity measurement	1	R	√3	0.58
Liquid conductivity deviation	1.5	R	√3	0.87
Liquid permittivity deviation	1.5	R	√3	0.87
Frequency deviation	2.25	R	√3	1.30
Field homogeneity	2.5	R	√3	1.44
Field-probe positioning	2.5	R	√3	1.44
Field-probe linearity	1.55	R	√3	0.89
Combined standard uncertainty		RSS		3.50

SAR Evaluation Report 46 of 64

APPENDIX C – DIPOLE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Report No: RDG160321003-20A

Calibration File No: DC-1534 Project Number: BACL-5745

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole

Manufacturer: APREL Laboratories Part number: ALS-D-450-S-2 Frequency: 450 MHz Serial No: **175-00503**

Customer: Bay Area Compliance Head and Body Calibration

Calibrated: 8th October 2013 Released on: 8th October 2013

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

303 Terry Fox Drive, Suite 102 Kanata, Ontario CANADA K2K 3J1

Division of APREL TEL: (613) 435-8300 FAX: (613) 435-8306

SAR Evaluation Report 47 of 64

Division of APREL Laboratories.

Conditions

Dipole 175-00503 was taken from stock for an original calibration..

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C Temperature of the Tissue: 21 °C +/- 0.5°C

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Dan Brooks, Test Engineer

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions

Length: 270.0 mm **Height**: 166.7 mm

Electrical Specification

	Head	Body
Return Loss	-30.726 dB	-33.258 dB
SWR	1.061 U	1.049 U
Impedance	50.600 Ω	48.155 Ω


This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 48 of 64

Division of APREL Laboratories.


System Validation Results Head

Frequ	uency	1 Gram	10 Gram	Peak
450	MHz	4.572	2.952	6.746



System Validation Results Body

Frequency	1 Gram	10 Gram	Peak
450 MHz	4.508	2.959	6.656



This page has been reviewed for content and attested to by signature within this document.

3

SAR Evaluation Report 49 of 64

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole RFE-362. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 130 MHz to 26 GHz E-Field Probe Serial Number 212.

References

SSI-TP-018-ALSAS Dipole Calibration Procedure
SSI-TP-016 Tissue Calibration Procedure
IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average
Specific Absorption Rate (SAR) in the Human Body Due to Wireless
Communications Devices: Experimental Techniques"

Conditions

Original calibration.

Ambient Temperature of the Laboratory: $22 \degree \text{C} + /- 0.5 \degree \text{C}$ Temperature of the Tissue: $20 \degree \text{C} + /- 0.5 \degree \text{C}$

4

Report No: RDG160321003-20A

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 50 of 64

Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

APREL Length	APREL Height	Measured Length	Measured Height	
280.0 mm	166.7 mm	280.0 mm	166.0 mm	1

Tissue Validation

Body Tissue 450MHz	Measured Head	Measured Body
Dielectric constant, ε _r	43.98	57.07
Conductivity, σ [S/m]	0.9	0.92

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical	1%
Positioning Error	1.22%
Electrical	1.7%
Tissue	2.2%
Dipole Validation	2.2%

TOTAL 8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

5

SAR Evaluation Report 51 of 64


Division of APREL Laboratories.

Electrical Calibration

Test	Result Head	Result Body
S11 R/L	-30.726 dB	-33.258 dB
SWR	1.061 U	1.049 U
Impedance	50.600 Ω	48.155 Ω

The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

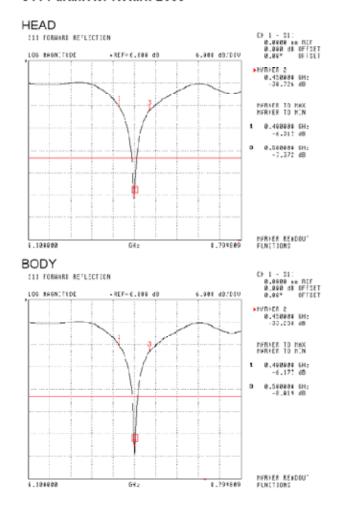


This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 52 of 64


0

NCL Calibration Laboratories Division of APREL Laboratories.

SWR



BODY




This page has been reviewed for content and attested to by signature within this document.

7

Division of APREL Laboratories.

Smith Chart Dipole Impedance

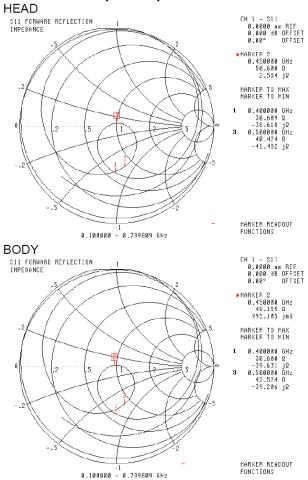

This page has been reviewed for content and attested to by signature within this document.

8

Division of APREL Laboratories.

Test Equipment


The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2012.

9

This page has been reviewed for content and attested to by signature within this document.


SAR Evaluation Report 55 of 64

APPENDIX D – EUT TEST POSITION PHOTOS






Face-Up 2.5 cm Separation to Flat Phantom

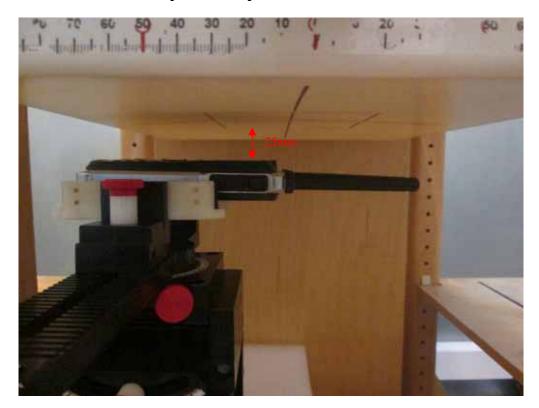

SAR Evaluation Report 56 of 64

Body-Back 0.0 cm Separation to Flat Phantom

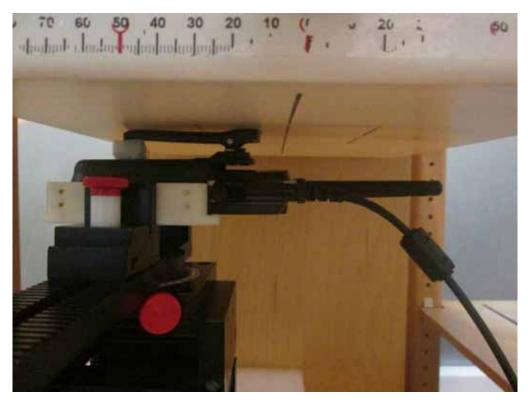

57 of 64 SAR Evaluation Report

APPENDIX E – EUT PHOTOS





EUT – Back View



SAR Evaluation Report 58 of 64

EUT-Left View



EUT-Right View



SAR Evaluation Report 59 of 64

EUT-Top View




EUT-Bottom View



SAR Evaluation Report 60 of 64

EUT-Uncover View

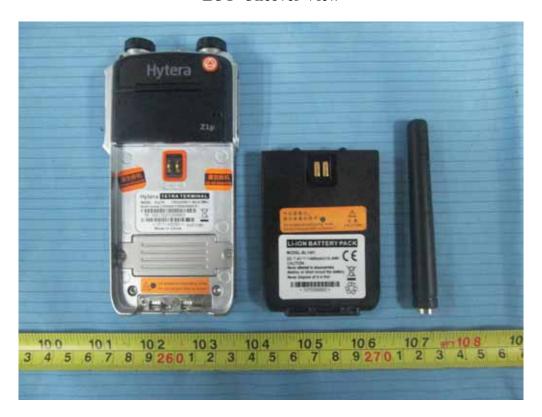

Battery(BL1401) View



SAR Evaluation Report 61 of 64

Battery(BL1809) View



EUT – Belt Front



SAR Evaluation Report 62 of 64

EUT - Belt Rear



EUT - Antenna



SAR Evaluation Report 63 of 64

APPENDIX D – INFORMATIVE REFERENCES

[1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.

Report No: RDG160321003-20A

- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, O ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-_eld scanning system for dosimetricPage 64 of 64 assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph K.astle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645 (652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM _ 97, Dubrovnik, October 15 {17, 1997, pp. 120-24.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23 {25 June, 1996, pp. 172-175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865-1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992. Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainity in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10.
- [15] FCC OET KDB643646 SAR Test Reduction Considerations for Occupational PTT Radios.

***** END OF REPORT *****

SAR Evaluation Report 64 of 64