

# FCC REPORT

**Applicant:** Shenzhen Contel Electronics Technology Co., Ltd.  
**Address of Applicant:** 3/F, R2-A, High-tech Industrial Park, Nanshan District, Shenzhen, China

## Equipment Under Test (EUT)

**Product Name:** 7 Inch Tablet  
**Model No.:** TAB-735, TAB-735G, TAB-735\_G, TAB-740, TAB-740G, TAB-740\_G, TAB-740H  
**FCC ID:** YAPTAB740  
**Applicable standards:** FCC CFR Title 47 Part 15 Subpart B  
**Date of sample receipt:** 20 May., 2013  
**Date of Test:** 27 May to 08 Aug., 2013  
**Date of report issued:** 09 Aug., 2013  
**Test Result :** Pass \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Version No.	Date	Description
00	09 Aug., 2013	<i>Original</i>

Prepared by:



Date:

09 Aug., 2013

Report Clerk

Reviewed by:



Date:

09 Aug., 2013

Project Engineer

### 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION .....	5
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF E.U.T .....	5
5.3 OPERATING MODES .....	5
5.4 DESCRIPTION OF SUPPORT UNITS .....	6
5.5 LABORATORY FACILITY .....	6
5.6 LABORATORY LOCATION .....	6
5.7 TEST INSTRUMENTS LIST .....	7
6 TEST RESULT AND MEASUREMENT DATA .....	8
6.1 CONDUCTED EMISSION .....	8
6.2 RADIATED EMISSION .....	11
7 TEST SETUP PHOTO .....	17
8 EUT CONSTRUCTIONAL DETAILS .....	18

## 4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part15.107	Pass
Radiated Emission	Part15.109	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

## 5 General Information

### 5.1 Client Information

Applicant:	Shenzhen Contel Electronics Technology Co., Ltd.
Address of Applicant:	3/F, R2-A, High-tech Industrial Park, Nanshan District, Shenzhen, China
Manufacturer:	Dongguan Contel Cloud Terminal System CO.,LTD
Address of Manufacturer:	Waijing Industrial Park, Gaolong road, GaobuTown, Dongguan, GuangDong

### 5.2 General Description of E.U.T.

Product Name:	7 Inch Tablet
Model No.:	TAB-735, TAB-735G, TAB-735_G, TAB-740, TAB-740G, TAB-740_G, TAB-740H
AC adapter:	Model: SW-050200A Input: AC 100-240V, 50/60Hz 0.68A Output: DC 5.0V, 2.0A
Power supply:	Rechargeable Li-ion Battery DC3.7V/2700mAh
Remark:	The model No. TAB-735, TAB-735G, TAB-735_G, TAB-740, TAB-740G, TAB-740_G and TAB-740H were identical wiring , the electrical circuit design , layout, components used and internal wiring , with only difference being with only difference being model name.We selected TAB-735 to perform the full tests.

### 5.3 Operating Modes

Operating mode	Detail description
PC mode	Keep the EUT in Downloading and charging mode (Worst case)
Video Playing mode	Keep the EUT in Video Playing and charging mode
Recording mode	Keep the EUT in recording and charging mode

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in test results of the following pages.

#### 5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
DELL	PC	OPTIPLEX745	N/A	DoC
DELL	MONITOR	E178FPC	N/A	DoC
DELL	KEYBOARD	SK-8115	N/A	DoC
DELL	MOUSE	MOC5UO	N/A	DoC
HP	Printer	CB495A	05257893	DoC

#### 5.5 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.

● **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

#### 5.6 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
Address: No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,  
Bao'an District, Shenzhen, Guangdong, China  
Tel: 0755-23118282  
Fax: 0755-23116366

## 5.7 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	June 09 2013	June 08 2014
2	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	Apr.01 2013	Mar. 31 2014
3	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	June 04 2012	June 03 2014
4	Double-ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	May 30 2012	May. 29 2014
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
6	Coaxial Cable	CCIS	N/A	CCIS0016	Apr. 01 2013	Mar. 31 2014
7	Coaxial Cable	CCIS	N/A	CCIS0017	Apr. 01 2013	Mar. 31 2014
8	Coaxial cable	CCIS	N/A	CCIS0018	Apr. 01 2013	Mar. 31 2014
9	Coaxial Cable	CCIS	N/A	CCIS0019	Apr. 01 2013	Mar. 31 2014
10	Coaxial Cable	CCIS	N/A	CCIS0087	Apr. 01 2013	Mar. 31 2014
11	Amplifier(10kHz-1.3GHz)	HP	8447D	CCIS0003	Apr. 01 2013	Mar. 31 2014
12	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	June 09 2012	June 08 2014
13	Spectrum analyzer	Rohde & Schwarz	FSP	CCIS0023	May 29 2012	May 28 2014
14	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
15	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	June 09 2013	June 08 2014
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	May 25 2012	May. 24 2014
3	LISN	CHASE	MN2050D	CCIS0074	Apr. 01 2013	Mar. 31 2014
4	Coaxial Cable	CCIS	N/A	CCIS0086	Apr. 01 2013	Mar. 31 2014

## 6 Test result and Measurement Data


### 6.1 Conducted Emission

Test Requirement:	FCC Part15 B Section 15.107																
Test Method:	ANSI C63.4:2003																
Test Frequency Range:	150kHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9kHz, VBW=30kHz																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>0.5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dB $\mu$ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	0.5-30	60	50
Frequency range (MHz)	Limit (dB $\mu$ V)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
0.5-30	60	50															
Test setup:	<p style="text-align: center;"><b>Reference Plane</b></p> <p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>																
Test procedure	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). They provide a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</li> </ol>																
Test environment:	Temp.:	23 °C	Humid.:	56%	Press.:	1 01kPa											
Measurement Record:						Uncertainty: 3.28dB											
Test Instruments:	Refer to section 5.7 for details																
Test mode:	Refer to section 5.3 for details																
Test results:	Pass																

**Measurement data:**

PC mode:


Line:

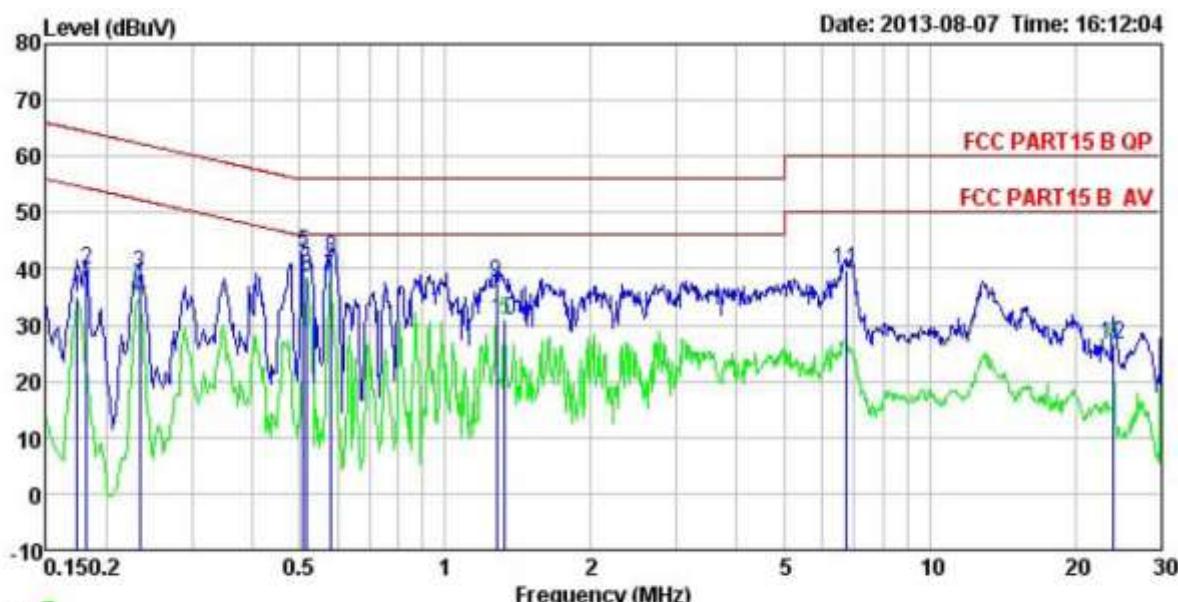

Site : CCIS Conducted Test Site  
 Condition : FCC PART15 B QP LISN LINE  
 Job No. : 138RF  
 EUT : 7" Tablet  
 Model : TAB-735  
 Test Mode : PC mode  
 Power Rating : AC 120V/60Hz  
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa  
 Test Engineer: Winner

Freq	Read	LISN	Cable	Limit	Over	Remark	
	Freq	Level	Factor				
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.174	23.85	10.23	0.77	34.85	54.77	-19.92 Average
2	0.182	28.87	10.22	0.77	39.86	64.42	-24.56 QP
3	0.234	28.27	10.23	0.75	39.25	62.30	-23.05 QP
4	0.234	23.77	10.23	0.75	34.75	52.30	-17.55 Average
5	0.510	31.85	10.26	0.76	42.87	56.00	-13.13 QP
6	0.518	27.61	10.26	0.76	38.63	46.00	-7.37 Average
7	0.579	27.35	10.23	0.76	38.34	46.00	-7.66 Average
8	0.582	30.68	10.23	0.76	41.67	56.00	-14.33 QP
9	1.276	26.37	10.23	0.90	37.50	56.00	-18.50 QP
10	1.331	20.07	10.24	0.59	30.90	46.00	-15.10 Average
11	6.698	28.77	10.27	0.81	39.85	60.00	-20.15 QP
12	24.015	15.25	10.51	0.88	26.64	50.00	-23.36 Average

Neutral:


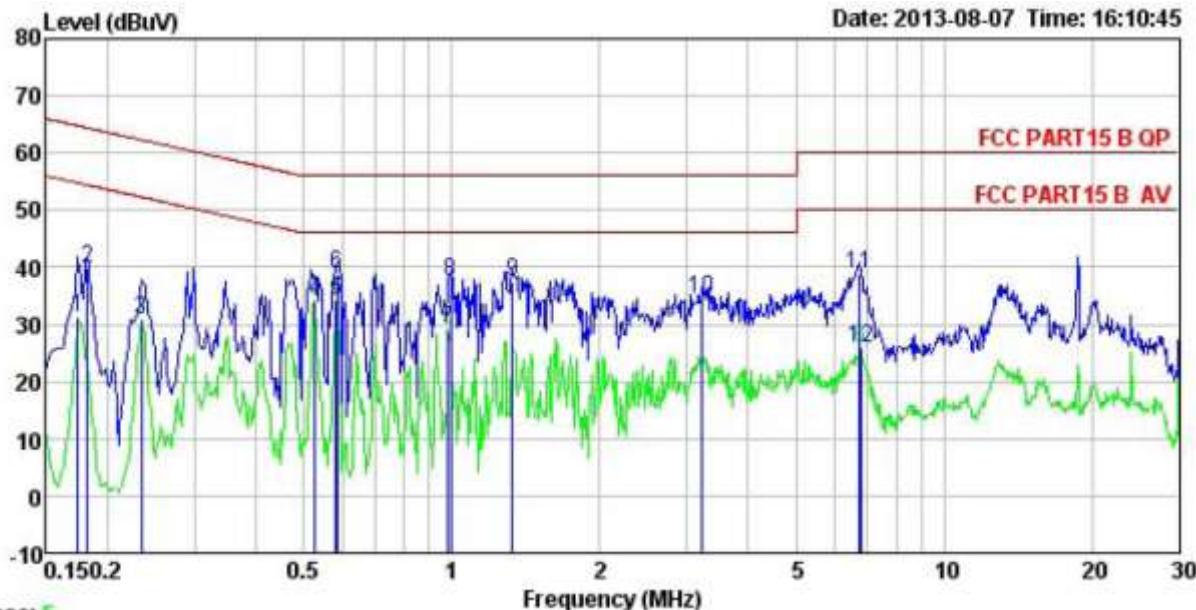


Freq	Read	LISN	Cable	Limit	Over	Remark
	Level	Factor	Loss	Level	Line	
MHz	dBuV	dB	dB	dBuV	dBuV	dB
1	0.174	20.28	10.25	0.77	31.30	54.77 -23.47 Average
2	0.182	28.77	10.24	0.77	39.78	64.42 -24.64 QP
3	0.234	19.79	10.23	0.75	30.77	52.30 -21.53 Average
4	0.527	23.15	10.26	0.76	34.17	46.00 -11.83 Average
5	0.582	23.26	10.23	0.76	34.25	46.00 -11.75 Average
6	0.585	27.79	10.22	0.76	38.77	56.00 -17.23 QP
7	0.984	17.98	10.20	0.87	29.05	46.00 -16.95 Average
8	0.994	26.42	10.20	0.87	37.49	56.00 -18.51 QP
9	1.331	26.26	10.23	0.91	37.40	56.00 -18.60 QP
10	3.224	23.45	10.28	0.91	34.64	56.00 -21.36 QP
11	6.698	27.82	10.26	0.81	38.89	60.00 -21.11 QP
12	6.769	14.82	10.26	0.80	25.88	50.00 -24.12 Average

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

## 6.2 Radiated Emission

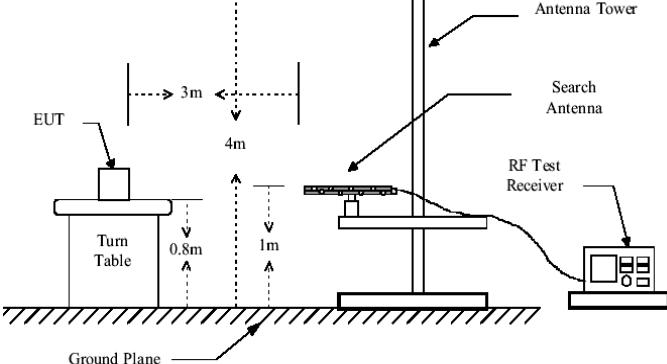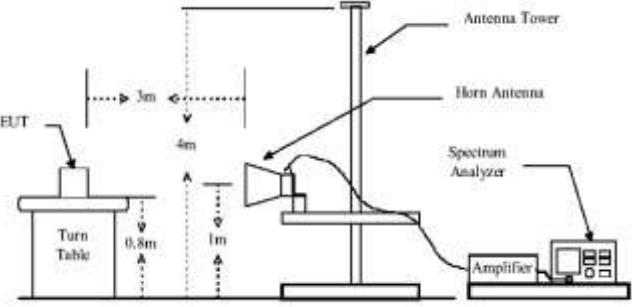
Test Requirement:	FCC Part15 B Section 15.109				
Test Method:	ANSI C63.4:2003				
Test Frequency Range:	30MHz to 6000MHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
	Peak	1MHz	10Hz		Average Value
Limit:	Frequency	Limit (dBuV/m @ 3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p> 				

Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Test environment:	Temp.:	25 °C	Humid.:	55%	Press.:	1 01kPa
Measurement Record:	Uncertainty: 4.88dB					
Test Instruments:	Refer to section 5.7 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Passed					

## Measurement Data

PC mode:


Horizontal:

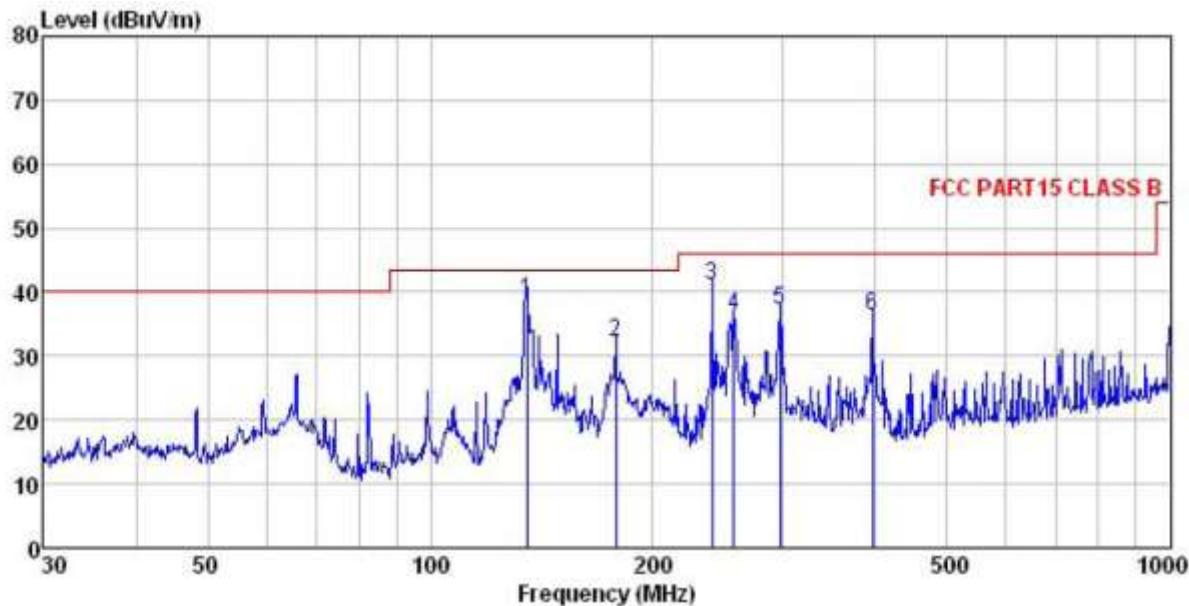

Site : 3m chamber  
Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL  
Job No. : 138RF  
EUT : 7" Tablet  
Model : TAB-735  
Test mode : PC mode  
Power Rating : AC 120V/60Hz  
Environment : Temp:25'C Huni:55% Atmos:101Kpa  
Test Engineer: Winner  
Remark :

Freq	ReadAntenna		Cable Preamp		Limit Level	Over Line	Over Limit	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	135.032	57.16	8.56	2.34	29.45	38.61	43.50	-4.89 QP
2	178.133	46.96	9.55	2.71	26.96	32.26	43.50	-11.24 QP
3	239.987	55.91	12.09	2.82	29.64	41.18	46.00	-4.82 QP
4	257.422	50.99	12.06	2.83	29.57	36.31	46.00	-9.69 QP
5	297.224	50.69	13.00	2.93	29.44	37.18	46.00	-8.82 QP
6	396.242	48.08	14.97	3.08	29.88	36.25	46.00	-9.75 QP

Vertical:

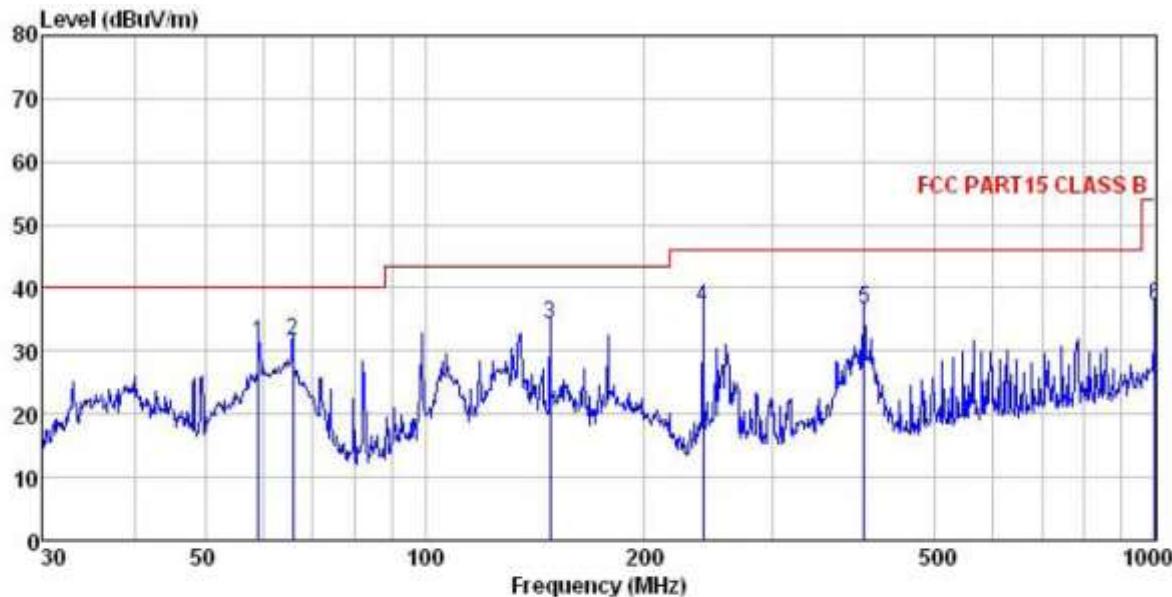


Site : 3m chamber  
Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL  
Job No. : 138RF  
EUT : 7" Tablet  
Model : TAB-735  
Test mode : PC mode  
Power Rating : AC 120V/60Hz  
Environment : Temp:25°C Huni:55% Atmos:101Kpa  
Test Engineer: Winner  
Remark :

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark
	Level	Factor	Loss	Level			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	59.232	46.24	12.75	1.38	29.15	31.22	40.00 -8.78 QP
2	66.034	49.56	10.30	1.41	29.78	31.49	40.00 -8.51 QP
3	148.441	52.79	8.25	2.50	29.25	34.29	43.50 -9.21 QP
4	239.987	51.78	12.09	2.82	29.64	37.05	46.00 -8.95 QP
5	399.030	48.39	15.06	3.08	29.89	36.64	46.00 -9.36 QP
6	1000.000	40.79	21.74	4.47	29.76	37.24	54.00 -16.76 QP

Above 1 GHz

PC mode:


Horizontal:

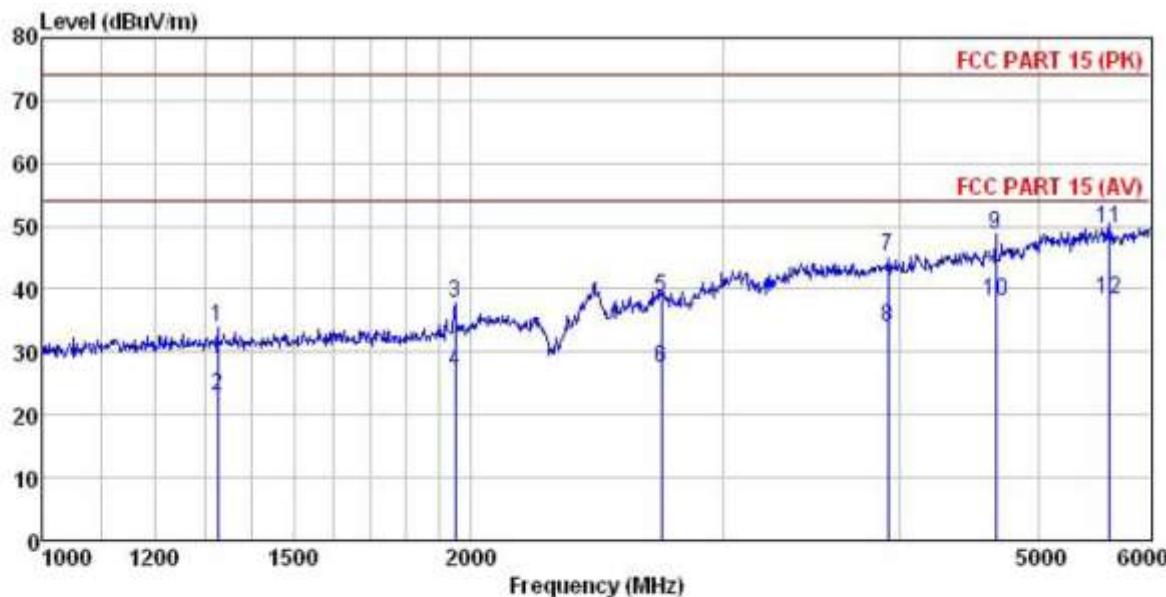

Site : 3m chamber  
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL  
 Job No. : 138RF  
 EUT : 7" Tablet  
 Model : TAB-735  
 Test mode : PC mode  
 Power Rating : AC 120V/60Hz  
 Environment : Temp:25°C Huni:55% Atmos:101Kpa  
 Test Engineer: Winner  
 Remark :

Freq	ReadAntenna		Cable		Preamp	Limit	Over	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1327.235	45.70	25.65	3.63	40.92	34.06	74.00	-39.94 Peak
2	1327.235	34.80	25.65	3.63	40.92	23.16	54.00	-30.84 Average
3	1947.477	47.87	25.93	4.79	40.88	37.71	74.00	-36.29 Peak
4	1947.477	36.94	25.93	4.79	40.88	26.78	54.00	-27.22 Average
5	2717.743	44.84	28.19	6.05	40.45	38.63	74.00	-35.37 Peak
6	2717.743	33.68	28.19	6.05	40.45	27.47	54.00	-26.53 Average
7	3924.004	48.66	29.77	7.59	40.94	45.08	74.00	-28.92 Peak
8	3924.004	37.53	29.77	7.59	40.94	33.95	54.00	-20.05 Average
9	4668.852	49.18	31.24	8.74	40.43	48.73	74.00	-25.27 Peak
10	4668.852	38.41	31.24	8.74	40.43	37.96	54.00	-16.04 Average
11	5615.128	48.57	32.10	9.22	40.39	49.50	74.00	-24.50 Peak
12	5615.128	37.54	32.10	9.22	40.39	38.47	54.00	-15.53 Average

Vertical:

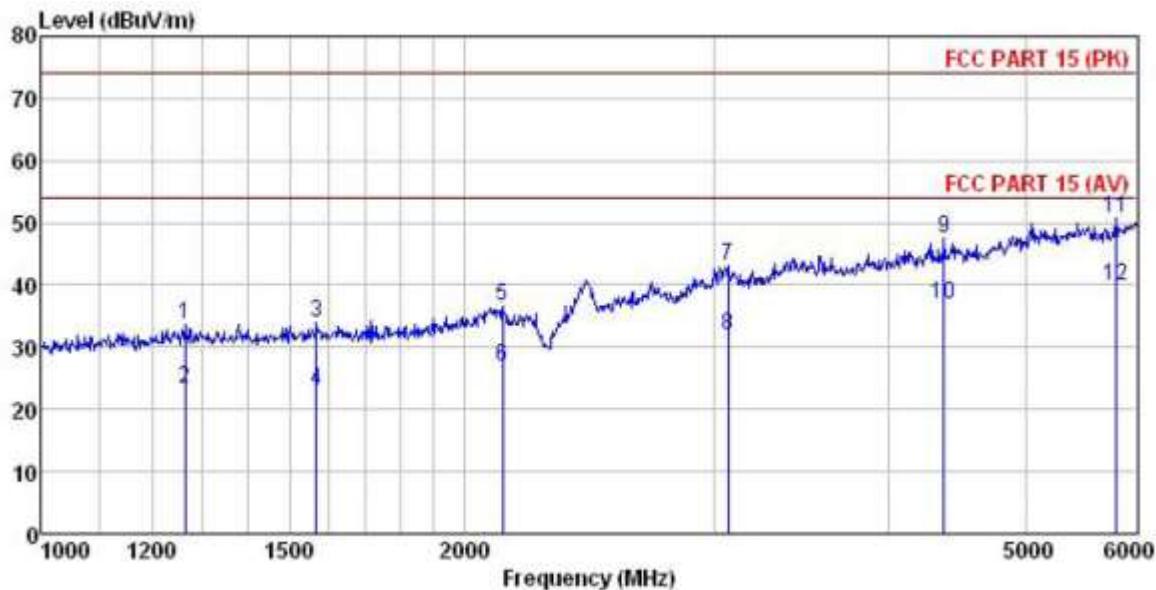

Site : 3m chamber  
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL  
 Job No. : 138RF  
 EUT : 7" Tablet  
 Model : TAB-735  
 Test mode : PC mode  
 Power Rating : AC 120V/60Hz  
 Environment : Temp:25°C Huni:55% Atmos:101Kpa  
 Test Engineer: Winner  
 Remark :

Freq	ReadAntenna		Cable Preamp		Limit Level	Over Line	Over Limit	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1264.555	45.37	25.50	3.57	40.91	33.53	74.00	-40.47 Peak
2	1264.555	35.22	25.50	3.57	40.91	23.38	54.00	-30.62 Average
3	1567.891	45.76	25.07	4.01	40.96	33.88	74.00	-40.12 Peak
4	1567.891	34.87	25.07	4.01	40.96	22.99	54.00	-31.01 Average
5	2126.188	44.72	27.34	5.08	40.45	36.69	74.00	-37.31 Peak
6	2126.188	34.87	27.34	5.08	40.45	26.84	54.00	-27.16 Average
7	3075.395	48.99	28.68	5.98	40.59	43.06	74.00	-30.94 Peak
8	3075.395	37.69	28.68	5.98	40.59	31.76	54.00	-22.24 Average
9	4377.203	49.57	30.52	8.33	40.78	47.64	74.00	-26.36 Peak
10	4377.203	38.75	30.52	8.33	40.78	36.82	54.00	-17.18 Average
11	5799.177	49.42	32.54	9.34	40.62	50.68	74.00	-23.32 Peak
12	5799.177	38.68	32.54	9.34	40.62	39.94	54.00	-14.06 Average