



FCC PART 15B, CLASS B MEASUREMENT AND TEST REPORT

For

Shenzhen Contel Electronics Technology Co., Ltd.

3/F, R2-A, High-tech Industrial Park, Nanshan District, Shenzhen, China

FCC ID: YAPTAB840

Report Type: Original Report	Product Type: 8" Tablet
Test Engineer: <u>Henry Ding</u>	<i>Henry Ding</i>
Report Number: <u>RSZ121224006-00</u>	
Report Date: <u>2013-02-20</u>	
Reviewed By: <u>Sula Huang</u> <u>RF Engineer</u>	<i>Sula Huang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk ★

TABLE OF CONTENTS

GENERAL INFORMATION.....	.3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3
OBJECTIVE3
RELATED SUBMITTAL(S)/GRANT(S).....	.3
TEST FACILITY.....	.3
SYSTEM TEST CONFIGURATION.....	.5
DESCRIPTION OF TEST CONFIGURATION5
EUT EXERCISE SOFTWARE5
EQUIPMENT MODIFICATIONS5
SUPPORT EQUIPMENT LIST AND DETAILS7
EXTERNAL I/O CABLE.....	.7
BLOCK DIAGRAM OF TEST SETUP8
SUMMARY OF TEST RESULTS9
FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....	.10
MEASUREMENT UNCERTAINTY10
EUT SETUP10
EMI TEST RECEIVER SETUP.....	.11
TEST EQUIPMENT LIST AND DETAILS.....	.11
TEST PROCEDURE11
TEST RESULTS SUMMARY11
TEST DATA11
FCC §15.109 - RADIATED EMISSIONS14
MEASUREMENT UNCERTAINTY14
EUT SETUP14
EMI TEST RECEIVER SETUP.....	.15
TEST PROCEDURE15
TEST EQUIPMENT LIST AND DETAILS.....	.15
CORRECTED AMPLITUDE & MARGIN CALCULATION15
TEST RESULTS SUMMARY16
TEST DATA16
PRODUCT SIMILARITY DECLARATION LETTER.....	.17

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Shenzhen Contel Electronics Technology Co., Ltd.*'s product, model number: *TAB-840 (FCC ID: YAPTAB840)* or the "EUT" as referred to in this report was a *8" Tablet*, which was measured approximately: 20.0 cm (L) x 15.5 cm (W) x 1.0 cm (H), rated with input voltage: 3.7V rechargeable Li-ion battery and DC 5.0V adapter for charging. The highest Operating Frequency is 1.5 GHz.

Adapter Information:

Model: SW-050200A;

Input: 100-240V~50/60Hz 0.68A Max.

Output: 5.0V 2000mA

**Note: The serial products model TAB-840 and TAB-840G, they are electrically identical, only different in model No.. Model TAB-840 was selected for full testing, which was explained for details in the attached declaration letter.*

** All measurement and test data in this report was gathered from production sample serial number: 1212142 (Assigned by BACL, Shenzhen). The EUT was received on 2012-12-24.*

Objective

This report is prepared on behalf of *Shenzhen Contel Electronics Technology Co., Ltd.* in accordance with Part 2, Subpart J, Part 15- Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15B, Class B.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS and Part 15.247 DSS submissions with FCC ID: YAPTAB840.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical mode which is provided by manufacturer.

EUT operation mode: Downloading (data transforms with computer)


EUT Exercise Software

“winthrax” exercise software was used for downloading mode testing.

Equipment Modifications

Modification was made to the EUT by the supplier, details as below:


1. Around the display connector and the camera connector were shielded with conductive fabric. (As shown in the picture below)

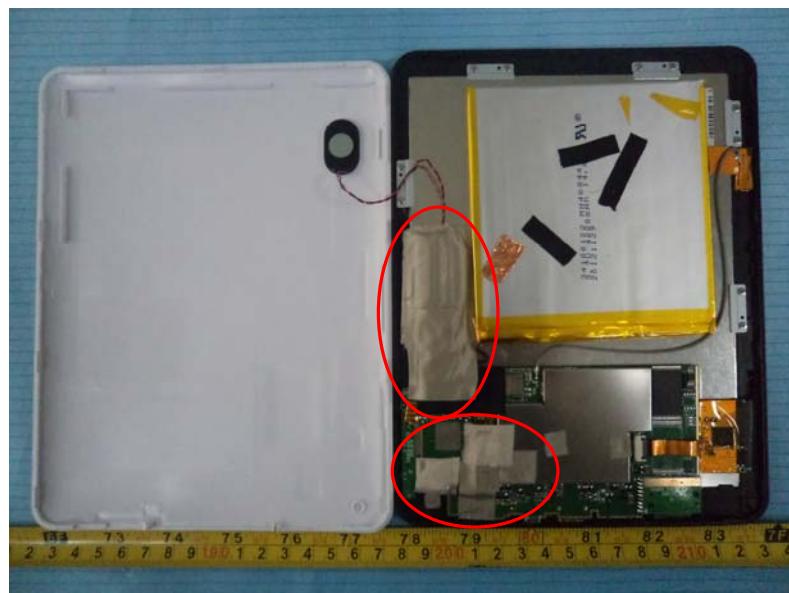

2. Both the display cable and the camera cable were shielded with conductive fabric.
(As shown in the picture below)



3. The filter circuit of HDMI port and USB port were shielded with copper foil.
(As shown in the picture below)

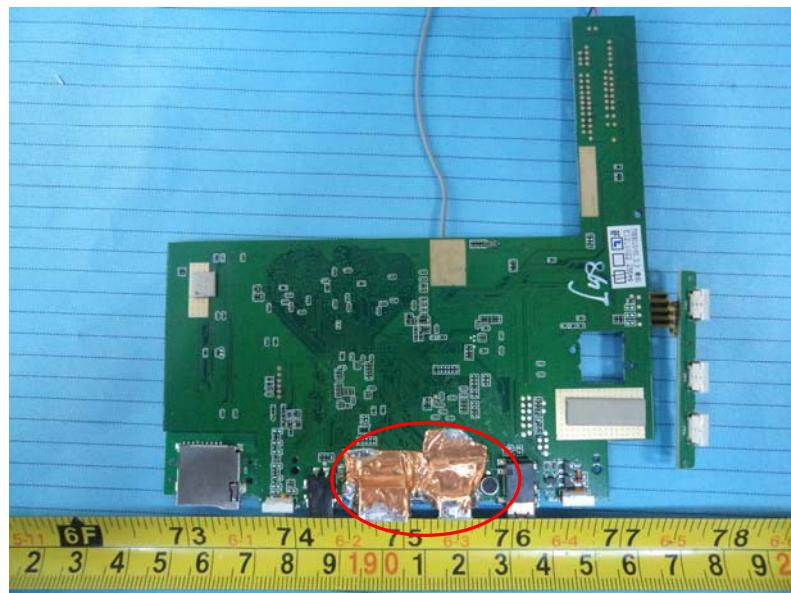


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	PC	VOSTRO 220S	127BP2X
DELL	Keyboard	L100	CNORH656658907BL04TY
DELL	Mouse	MOC5UO	G1B0096D
DELL	LCD Monitor	E178WFPC	CN-OWY564-64180-7C4-2SQH
ECOM	Modem	5600pbs	N/A
SAMSUNG	LCD Monitor	225MS	CR22HV2P401073M
N/A	Earphone	N/A	N/A

External I/O Cable

Cable Description	Length (m)	From/Port	To
Shielding Detachable K/B Cable	1.5	Host PC	Keyboard
Shielding Detachable Mouse Cable	1.5	Host PC	Mouse
Shielding Detachable Serial Cable	1.2	Host PC	Modem
Shielding Detachable VGA Cable	1.5	Host PC	Monitor
Unshielding Detachable USB Cable	1.2	Host PC	EUT
Unshielding Detachable DC Power Cable	1.2	EUT	Adapter
Shielding Detachable HDMI Cable with two cores	1.0	EUT	LCD Monitor

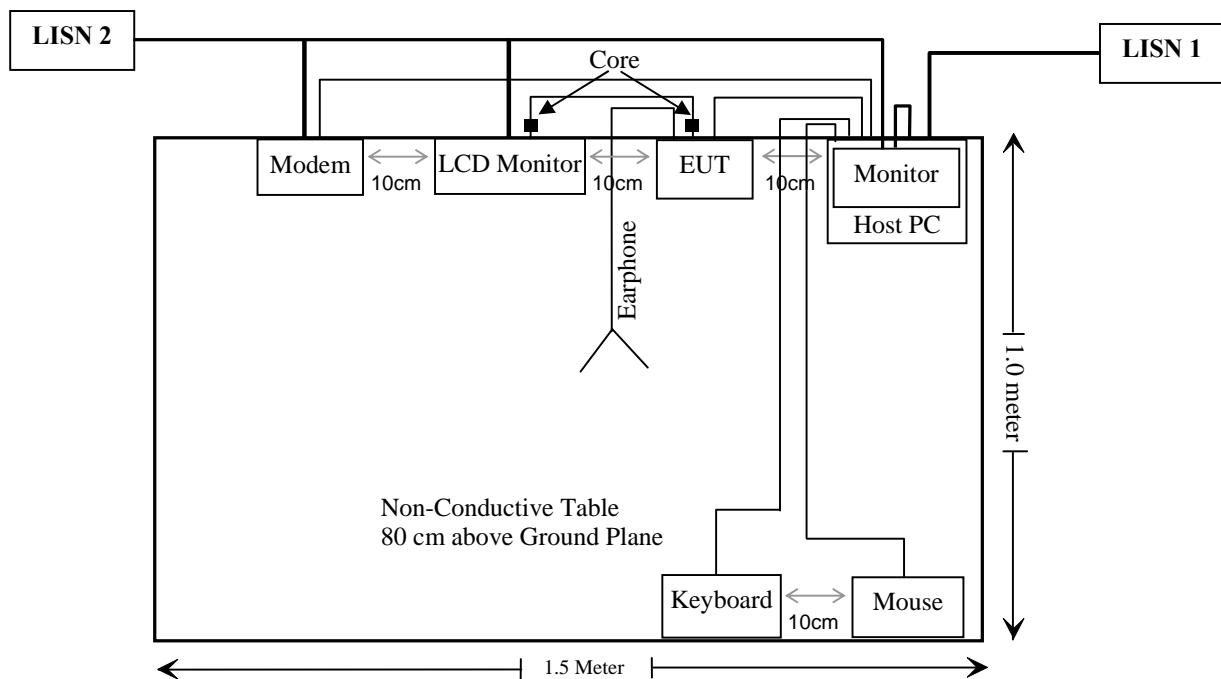Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance


FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 2.4 dB. (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for all the test data recorded in the report.

EUT Setup

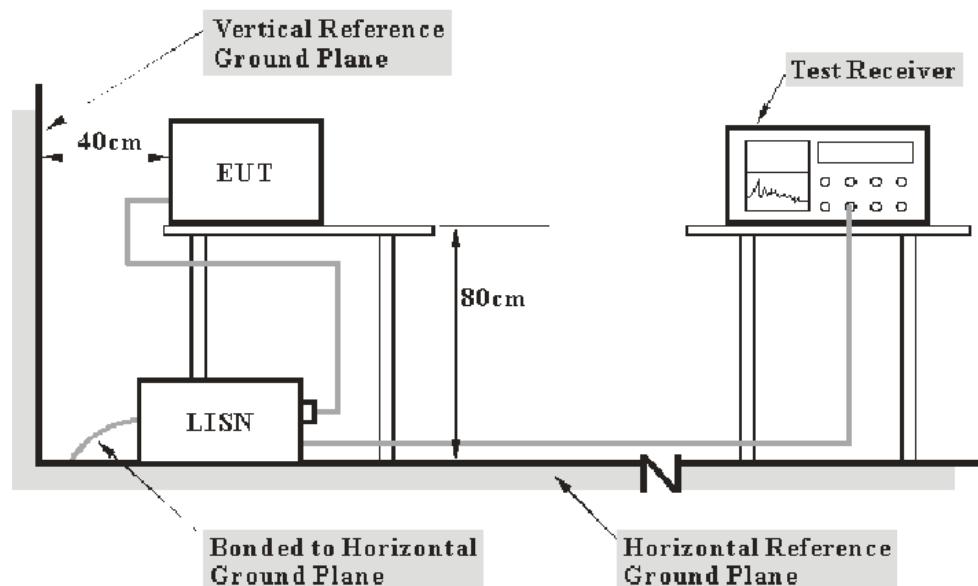

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

The spacing between the peripherals was 10 cm.

The host PC was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2012-11-24	2013-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2012-08-22	2013-08-21
Rohde & Schwarz	Attenuator	ESH3Z2	DE25985	2012-07-08	2013-07-07
BACL	CE Test software	BACL-CE	V1.0	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the host PC was connected to the outlet of the first LISN and other equipment were connected to the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the [FCC Part 15.107](#), with the worst margin reading of:

9.28 dB at 8.340 MHz in the Line conducted mode

Test Data


Environmental Conditions

Temperature:	24 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Henry Ding on 2013-01-23.


Test Mode: Downloading (data transforms with computer)

AC 120V/60 Hz, Line

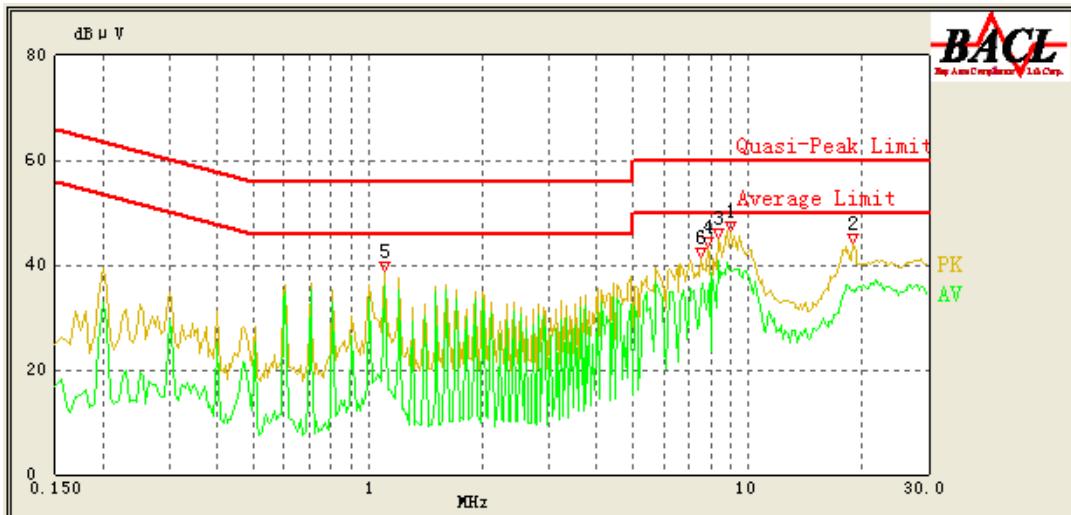

Frequency (MHz)	Corrected Amplitude (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (PK/ QP/Ave.)
8.340	40.72	10.43	50.00	9.28	Ave.
1.105	36.33	10.17	46.00	9.67	Ave.
9.045	38.82	10.45	50.00	11.18	Ave.
19.110	35.27	12.53	50.00	14.73	Ave.
7.545	34.72	10.40	50.00	15.28	Ave.
7.845	33.76	10.41	50.00	16.24	Ave.
1.105	37.14	10.17	56.00	18.86	QP
8.340	40.91	10.43	60.00	19.09	QP
9.040	39.03	10.45	60.00	20.97	QP
7.840	38.63	10.41	60.00	21.37	QP
7.540	37.82	10.40	60.00	22.18	QP
18.885	36.07	12.46	60.00	23.93	QP

AC 120V/60 Hz, Neutral

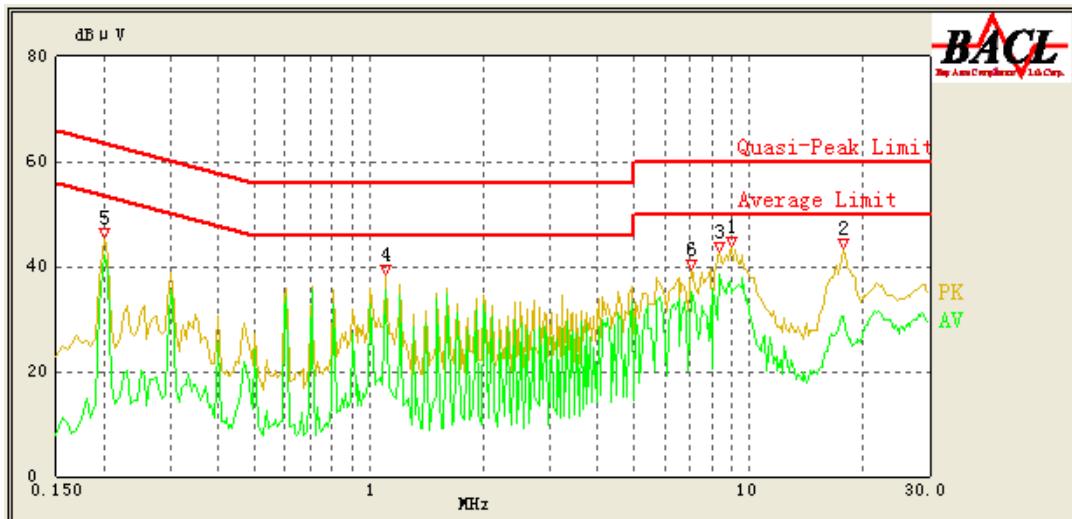

Frequency (MHz)	Corrected Amplitude (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (PK/ QP/Ave.)
1.105	35.61	10.17	46.00	10.39	Ave.
8.345	38.35	10.42	50.00	11.65	Ave.
0.200	42.01	10.24	54.57	12.56	Ave.
7.035	35.15	10.37	50.00	14.85	Ave.
9.045	34.90	10.45	50.00	15.10	Ave.
17.710	30.66	11.96	50.00	19.34	Ave.
1.105	35.62	10.17	56.00	20.38	QP
8.340	38.98	10.42	60.00	21.02	QP
0.200	43.29	10.24	64.57	21.28	QP
9.045	36.69	10.45	60.00	23.31	QP
7.035	35.19	10.37	60.00	24.81	QP
17.840	32.55	12.00	60.00	27.45	QP


FCC §15.109 - RADIATED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB. (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for all the test data recorded in the report.

EUT Setup

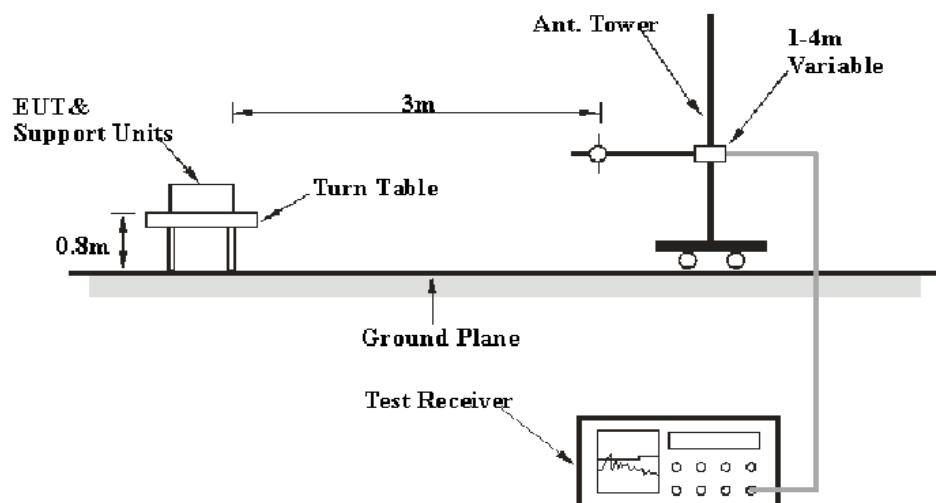

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The host PC was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 5th harmonic of the highest frequency. During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emissions test, the host PC and other equipments were connected to AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2012-11-24	2013-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Mini-Circuits	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Correction Factor} = \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109 Class B, with the worst margin reading of:

2.70 dB at 39.84 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Henry Ding on 2012-12-28.

Test Mode: Downloading (data transforms with computer)

30 MHz-7.5 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15B, Class B	
	Reading (dB μ V)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
39.84	51.50	QP	236	1.10	V	-14.20	37.30	40.00	2.70
1861.1	45.96	Ave.	62	1.10	V	2.63	48.59	54.00	5.41
1861.7	45.32	Ave.	45	1.20	H	2.63	47.95	54.00	6.05
119.65	50.50	QP	260	1.10	V	-13.70	36.80	43.50	6.70
225.11	54.10	QP	348	1.10	V	-16.30	37.80	46.00	8.20
1861.1	60.74	PK	62	1.10	V	2.63	63.37	74.00	10.63
959.59	38.20	QP	229	1.10	V	-2.90	35.30	46.00	10.70
480.23	45.30	QP	51	2.10	V	-10.10	35.20	46.00	10.80
1861.7	60.55	PK	45	1.20	H	2.63	63.18	74.00	10.82
720.58	40.50	QP	239	2.80	H	-6.60	33.90	46.00	12.10
1949.1	37.63	Ave.	165	1.30	H	3.07	40.70	54.00	13.30
1242.4	39.67	Ave.	21	1.00	V	0.16	39.83	54.00	14.17
1242.5	39.63	Ave.	25	1.30	H	0.16	39.79	54.00	14.21
1949.5	36.33	Ave.	232	1.10	V	3.07	39.40	54.00	14.60
1949.1	51.24	PK	165	1.30	H	3.07	54.31	74.00	19.69
1949.5	50.27	PK	232	1.10	V	3.07	53.34	74.00	20.66
1242.4	50.54	PK	21	1.00	V	0.16	50.70	74.00	23.30
1242.5	50.14	PK	25	1.30	H	0.16	50.30	74.00	23.70

PRODUCT SIMILARITY DECLARATION LETTER

Contel

Shenzhen Contel Electronics Technology Co., Ltd.
3/F, R2-A, High-tech Industrial Park, Nanshan District, Shenzhen, China
Tel:+86 755-26512894-203 Fax:+86 755-86141279

2013-1-9

Product Similarity Declaration

To Whom It May Concern,

We, Shenzhen Contel Electronics Technology Co., Ltd. hereby declare that our 8" Tablet, Model Number: TAB-840G is electrically identical with the TAB-840 that was certified by BACL. They are only different in model number due to marketing purposes.

Please contact me if you have any question.

Signature:



Tracy You
R&D Centre Supervisor

******* END OF REPORT *******