



# FCC PART 15.247 MEASUREMENT AND TEST REPORT

For

## Zonda Corporation, S.A. de C.V

Schiller 329 Street, Chapultepec Morales, Zip Code 11560, Mexico City, Mexico

FCC ID: YAUZMCK885

Report Type: **Product Type:** Original Report GSM Mobile Telephone xiao Jimmy **Test Engineer:** Jimmy Xiao **Report Number:** RSZ11021509-15.247 **Report Date:** 2011-03-21 Merry Zhao merry, Thuo **Reviewed By:** EMC Engineer Bay Area Compliance Laboratories Corp. (Shenzhen) Prepared By: 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

**Note**: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, NIST, or any agency of the Federal Government. \* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

## **TABLE OF CONTENTS**

GENERAL INFORMATION	
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
Objective	4
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT Exercise Software	
EQUIPMENT MODIFICATIONS	
External I/O Cable	
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §2.1093 – RF EXPOSURE INFORMATION	9
APPLICABLE STANDARD	
Result:	10
FCC §15.203 - ANTENNA REQUIREMENT	11
Applicable Standard	
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTY	
EUT SETUP	
EMI TEST RECEIVER SETUP.	
TEST EQUIPMENT LIST AND DETAILS.	
TEST PROCEDURE	13
TEST RESULTS SUMMARY	
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	16
APPLICABLE STANDARD	
Measurement Uncertainty	
EUT SETUP	
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST EQUIPMENT LIST AND DETAILS	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST DATA	
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	
APPLICABLE STANDARD	
TEST EQUIPMENT LIST AND DETAILS.	
TEST PROCEDURE	
TEST DATA	

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	25
APPLICABLE STANDARD	
TEST EQUIPMENT LIST AND DETAILS.	
TEST PROCEDURE	
TEST DATA	
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	28
APPLICABLE STANDARD	28
TEST EQUIPMENT LIST AND DETAILS.	
TEST PROCEDURE	
TEST DATA	
FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)	30
APPLICABLE STANDARD	30
TEST EQUIPMENT LIST AND DETAILS.	
TEST PROCEDURE	
TEST DATA	
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	37
APPLICABLE STANDARD	37
TEST EQUIPMENT LIST AND DETAILS.	
TEST PROCEDURE	
TEST DATA	
FCC §15.247(d) - BAND EDGES TESTING	39
APPLICABLE STANDARD	
TEST EQUIPMENT LIST AND DETAILS.	
Test Procedure	
TEST DATA	

#### **GENERAL INFORMATION**

## **Product Description for Equipment under Test (EUT)**

The *Zonda Corporation, S.A. de C.V*'s product, model number: *ZMCK885* (*FCC ID: YAUZMCK885*) or the "EUT" as referred to in this report is a *GSM Mobile Telephone*, which measures approximately: 11.1cm (L) x 5.8cm (W) x 1.1cm (H), rated input voltage: DC 3.7V battery.

Frequency Range:

Cellular Band: 824-849MHz (Tx), 869-894MHZ (Rx) PCS Band: 1850-1910 MHz (Tx), 1930-1990 MHz (Rx)

Bluetooth: 2400-2483.5 MHz (Tx/Rx)

Modulation Mode: GMSK, 8PSK (GSM/PCS); GFSK (Bluetooth)

Transmitter Output Power:

Cellular Band: 33 dBm, PCS Band: 30 dBm, Bluetooth: 7 dBm

Adapter information:

Model: ETPCA-050050UYU7 Input: 100-240 VAC, 50/60 Hz 0.2A

Output: DC 5.0 V 500 mA

## **Objective**

This Type approval report is prepared on behalf of *Zonda Corporation*, *S.A. de C.V* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

#### **Related Submittal(s)/Grant(s)**

FCC Part 22H&24E and Part 15B submission with FCC ID: YAUZMCK885.

#### **Test Methodology**

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which are conducted met the measurement is  $\pm 0.96$  dB; the uncertainty of any radiation emission measurement is  $\pm 4.0$  dB.

<sup>\*</sup> All measurement and test data in this report was gathered from production sample serial number: 1102031 (Assigned by BACL, Shenzhen). The EUT was received on 2011-02-15.

## **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <a href="http://ts.nist.gov/Standards/scopes/2007070.htm">http://ts.nist.gov/Standards/scopes/2007070.htm</a>

## **SYSTEM TEST CONFIGURATION**

## **Description of Test Configuration**

The system was configured for testing in a typical fashion (as normally used by a typical user).

## **EUT Exercise Software**

N/A.


## **Equipment Modifications**

No modification was made to the unit tested.


## **External I/O Cable**

Cable Description	Length (m)	From/Port	То
Unshielded Detachable DC Power Cable	1.5	EUT	Adapter

## **Configuration of Test Setup**

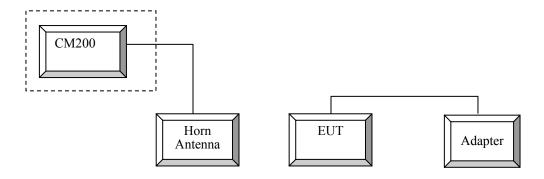

## **Block Diagram of Test Setup**

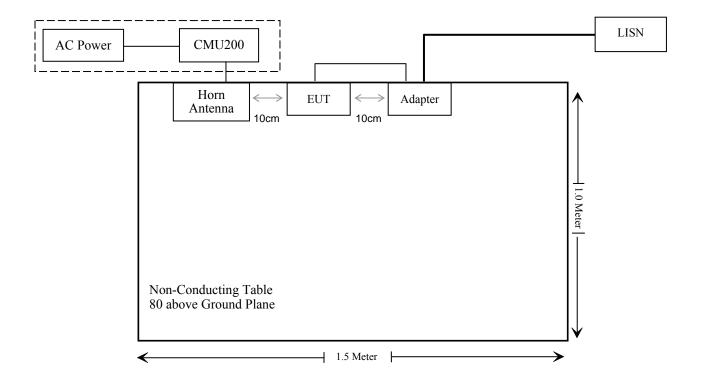

## **SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure Information	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance*
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of Hopping Channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

Note: \*Within mearurement uncertainty.

## FCC §15.247 (i) & §2.1093 – RF EXPOSURE INFORMATION

## **Applicable Standard**

According to FCC §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Table 2 - Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	Routine evaluation required	SAR not required: Unlicensed only
Unlicensed Transmitters	When there is no simultaneous transmission — o output $\leq$ 60/f: SAR not required o output $>$ 60/f: stand-alone SAR required When there is simultaneous transmission — Stand-alone SAR not required when output $\leq$ 2·P <sub>Ref</sub> and antenna is $\geq$ 5.0 cm from other antennas output $\leq$ P <sub>Ref</sub> and antenna is $\geq$ 2.5 cm from other antennas output $\leq$ P <sub>Ref</sub> and antenna is $\leq$ 2.5 cm from other antennas output $\leq$ P <sub>Ref</sub> and antenna is $\leq$ 2.5 cm from other antennas, each with either output power $\leq$ P <sub>Ref</sub> or 1-g SAR $\leq$ 1.2 W/kg Otherwise stand-alone SAR is required When stand-alone SAR is required test SAR on highest output channel for each wireless mode and exposure condition of SAR for highest output channel is $>$ 50% of SAR limit, evaluate all channels according to normal procedures	o when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas  Licensed & Unlicensed  o when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas  o when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3  SAR required:  Licensed & Unlicensed antenna pairs with SAR to peak location separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition  Note: simultaneous transmission exposure conditions for head and body can be different for different test requirements may apply
Jaw, Mouth and Nose	Flat phantom SAR required  o when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues  o position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

Two antennas are available for the EUT, (GSM antenna, Bluetooth antenna), The distance between Bluetooth antenna and GSM antenna is 9 cm, more than 5 cm, the Bluetooth average power is 7.413 mW < Pref (12 mW). According to KDB 648474, Bluetooth simultaneous SAR measurement is not required.

## **Result:**

The SAR measurement is exempt.

## FCC §15.203 - ANTENNA REQUIREMENT

## **Applicable Standard**

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria: Antenna must be permanently attached to the unit.

a. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has 2 integral antennas, one is for Bluetooth, the gain is -2 dBi; other is for GSM/PCS, the gain is -1.0 dBi, which in accordance to section 15.203, please refer to the internal photos.

**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

## **Applicable Standard**


FCC §15.207

## **Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is  $\pm 2.4$  dB (k=2, 95% level of confidence).

## **EUT Setup**

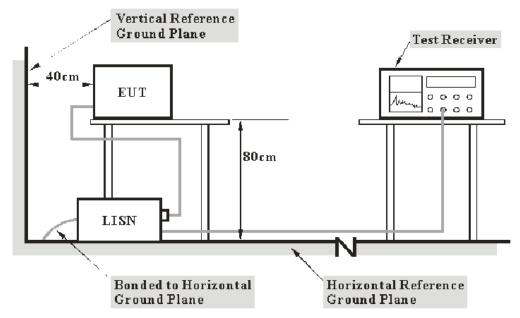

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

## **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2010-03-03	2011-03-02
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	1100.0008.02	2010-10-28	2011-10-27
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2010-03-09	2011-03-08

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Procedure**

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## **Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

4.44 dB at 0.175MHz in the Neutral conductor mode, Ave

## **Test Data**


#### **Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Jimmy Xiao on 2011-02-28.


Test Mode: Transmitting

## 120 V, 60 Hz, Line:

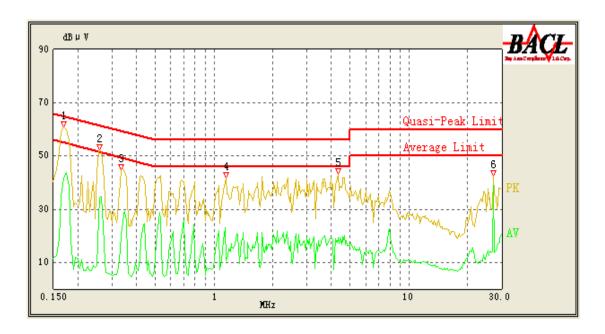

Со	nducted Emission	ons	FCC Part 15.207		<b>)</b> 7
Frequency (MHz)	Correction Factor (dB)	Cord. Result (dBµV)	Limit (dBµV)	Margin (dB)	Remark (PK/QP/Ave.)
0.170	10.09	56.26	65.43	9.17	QP
27.120	10.13	39.34	50.00	10.66	Ave.
0.170	10.09	41.85	55.43	13.58	Ave.
0.260	10.03	47.49	62.86	15.37	QP
0.260	10.03	34.22	52.86	18.64	Ave.
27.120	10.13	40.74	60.00	19.26	QP
0.335	10.03	40.25	60.71	20.46	QP
1.140	10.11	22.90	46.00	23.10	Ave.
4.320	10.10	19.41	46.00	26.59	Ave.
0.335	10.03	20.62	50.71	30.09	Ave.
1.150	10.12	23.22	56.00	32.78	QP
4.320	10.10	21.39	56.00	34.61	QP

## 120V, 60 Hz, Neutral:

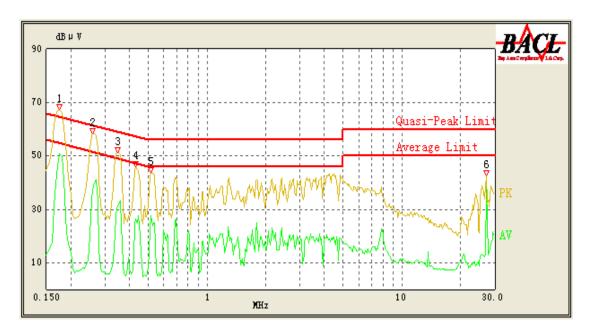

Со	<b>Conducted Emissions</b>		FCC Part 15.207		)7
Frequency (MHz)	Correction Factor (dB)	Cord. Result (dBµV)	Limit (dBµV)	Margin (dB)	Remark (PK/QP/Ave.)
0.175	10.08	50.85	55.29	4.44	Ave.
0.175	10.08	59.14	65.29	6.15	QP
27.120	10.13	38.46	50.00	11.54	Ave.
0.260	10.03	50.28	62.86	12.58	QP
0.260	10.03	37.18	52.86	15.68	Ave.
0.350	10.05	42.50	60.29	17.79	QP
0.515	10.20	27.69	46.00	18.31	Ave.
0.350	10.05	31.00	50.29	19.29	Ave.
0.515	10.20	36.48	56.00	19.52	QP
27.120	10.13	40.27	60.00	19.73	QP
0.430	10.13	36.70	58.00	21.30	QP
0.430	10.13	26.60	48.00	21.40	Ave.

## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

## **Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

## **Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is  $\pm 4.0$  dB (k=2, 95% level of confidence).

## **EUT Setup**

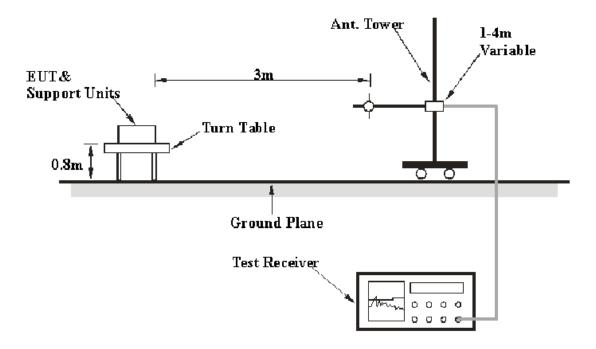

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	
30MHz – 1000 MHz	100 kHz	300 kHz	
1000 MHz – 25 GHz	1 MHz	3 MHz	

## **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2010-08-02	2011-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-23
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-03-11	2011-03-11
HP	Amplifier	8449B	3008A00277	2010-09-12	2011-09-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2010-05-05	2011-05-04
НР	Spectrum Analyzer	8593A	-	2010-07-08	2011-07-07
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	1100.0008.02	2010-10-28	2011-10-27

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Procedure**

For the radiated emissions test.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz and peak and Average detection modes for frequencies above 1GHz.

## **Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

## **Test Results Summary**

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247,</u> with the worst margin reading of:

**30 -1000 MHz:** 

9.9 dB at 30.378000MHz in the Vertical polarization

**Above 1 GHz:** 

3.7dB at 4804 MHz in the Horizontal polarization at Low Channel

#### **Test Data**


#### **Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Jimmy Xiao on 2011-02-27.

**30-1000 MHz:** 

Test Mode: Transtmitting

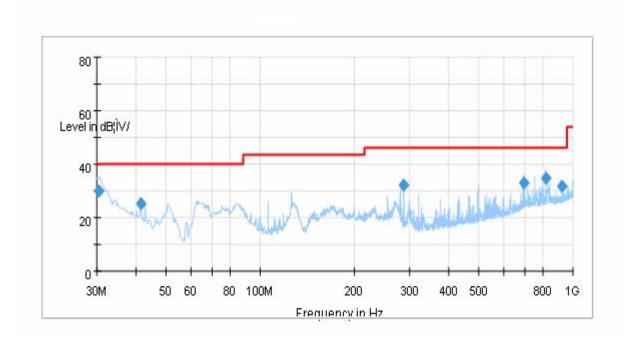

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Ant. Height (cm)	Ant. Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
30.378000	30.1	103.0	V	281.0	-5.6	40.0	9.9
818.861250	34.7	191.0	V	204.0	-1.6	46.0	11.3
698.165250	33.0	137.0	V	191.0	-3.1	46.0	13.0
288.025500	32.2	104.0	Н	261.0	-12.6	46.0	13.8
920.001250	31.8	203.0	Н	276.0	-0.1	46.0	14.2
41.493000	25.1	102.0	V	213.0	-13.0	40.0	14.9

**Above 1 GHz:** 

Indica	ated		Table	Test A	ntenna	Cori	ection F	actor	1	FCC Part 1	5.247/15.2	209
Frequency (MHz)	S.A Reading (dBµV)	Detector (PK/Ave.)	Angle Degree	Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
					Lo	w Chann	el					
4804	36.45	Ave.	330	1.5	Н	36.3	4.30	26.75	50.30	54	3.70*	harmonic
4804	52.01	PK	330	1.5	Н	36.3	4.30	26.75	65.86	74	8.14	harmonic
4804	32.01	Ave.	0	1.8	V	35.0	4.30	26.75	44.56	54	9.44	harmonic
7206	25.38	Ave.	180	1.4	Н	39.0	5.22	26.64	42.96	54	11.04	harmonic
4804	49.50	PK	0	1.8	V	35.0	4.30	26.75	62.05	74	11.95	harmonic
7206	43.25	PK	180	1.4	Н	39.0	5.22	26.64	60.83	74	13.17	harmonic
7206	23.06	Ave.	360	2.1	V	37.9	5.22	26.64	39.54	54	14.46	harmonic
7206	41.23	PK	360	2.1	V	37.9	5.22	26.64	57.71	74	16.29	harmonic
3456.8	23.15	Ave.	260	1.6	Н	32.4	3.57	26.88	32.24	54	21.76	spurious
3456.8	21.28	Ave.	210	1.9	V	31.6	3.57	26.88	29.57	54	24.43	spurious
3456.8	38.46	PK	260	1.6	Н	32.4	3.57	26.88	47.55	74	26.45	spurious
3456.8	39.24	PK	210	1.9	V	31.6	3.57	26.88	47.53	74	26.47	spurious
					Mid	dle Chan	nel					
4882	32.48	Ave.	250	1.5	Н	36.6	4.37	26.75	46.70	54	7.30	harmonic
4882	51.26	PK	250	1.5	Н	36.6	4.37	26.75	65.48	74	8.52	harmonic
7323	28.74	Ave.	175	2.4	V	37.9	5.21	26.64	45.21	54	8.79	harmonic
7323	27.15	Ave.	330	2.1	Н	39.0	5.21	26.64	44.72	54	9.28	harmonic
7323	46.36	PK	330	2.1	Н	39.0	5.21	26.64	63.93	74	10.07	harmonic
7323	47.25	PK	175	2.4	V	37.9	5.21	26.64	63.72	74	10.28	harmonic
4882	30.14	Ave.	0	1.9	V	35.4	4.37	26.75	43.16	54	10.84	harmonic
4882	49.87	PK	0	1.9	V	35.4	4.37	26.75	62.89	74	11.11	harmonic
3512.6	21.56	Ave.	180	1.8	Н	32.8	3.58	26.87	31.07	54	22.93	spurious
3512.6	22.03	Ave.	315	1.3	V	32.1	3.58	26.87	30.84	54	23.16	spurious
3512.6	40.23	PK	180	1.8	Н	32.8	3.58	26.87	49.74	74	24.26	spurious
3512.6	39.46	PK	315	1.3	V	32.1	3.58	26.87	48.27	74	25.73	spurious
					Hig	gh Chann	el					
4960	34.67	Ave.	330	1.5	Н	36.6	4.37	26.75	48.89	54	5.11	harmonic
4960	53.05	PK	330	1.5	Н	36.6	4.37	26.75	67.27	74	6.73	harmonic
4960	31.26	Ave.	135	1.6	V	35.4	4.37	26.75	44.28	54	9.72	harmonic
7440	26.38	Ave.	189	2.1	Н	39.0	5.20	26.64	43.94	54	10.06	harmonic
4960	49.76	PK	135	1.6	V	35.4	4.37	26.75	62.78	74	11.22	harmonic
7440	45.18	PK	189	2.1	Н	39.0	5.20	26.64	62.74	74	11.26	harmonic
7440	26.14	Ave.	78	1.4	V	37.7	5.20	26.64	42.40	54	11.60	harmonic
7440	44.28	PK	78	1.4	V	37.7	5.20	26.64	60.54	74	13.46	harmonic
3615.24	23.48	Ave.	0	1.7	V	32.1	3.68	26.87	32.39	54	21.61	spurious
3615.24	21.59	Ave.	54	1.8	Н	32.8	3.68	26.87	31.20	54	22.80	spurious
3615.24	41.36	PK	0	1.7	V	32.1	3.68	26.87	50.27	74	23.73	spurious
3615.24	40.23	PK	54	1.8	Н	32.8	3.68	26.87	49.84	74	24.16	spurious

<sup>\*</sup>Within measurement uncertainty.

## **Spurious emission in restricted band:**

Indica	ited		Table	Test Ar	ntenna	Corr	ection F	actor	FCC I	Part 15.24	7/15.209/	15.205
Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/Ave.)	Angle	Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
2493.15	21.36	Ave.	320	2.1	Н	30.5	3.11	26.86	28.11	54	25.89	spurious
2320.13	20.14	Ave.	360	1.8	V	30.2	2.98	26.85	26.47	54	27.53	spurious
2320.13	19.87	Ave.	265	1.4	Н	30.3	2.98	26.85	26.30	54	27.70	spurious
2493.15	18.48	Ave.	180	1.9	V	30.5	3.11	26.86	25.23	54	28.77	spurious
2493.15	38.06	PK	320	2.1	Н	30.5	3.11	26.86	44.81	74	29.19	spurious
2320.13	34.67	PK	360	1.8	V	30.2	2.98	26.85	41.00	74	33.00	spurious
2320.13	32.83	PK	265	1.4	Н	30.3	2.98	26.85	39.26	74	34.74	spurious
2493.15	31.83	PK	180	1.9	V	30.5	3.11	26.86	38.58	74	35.42	spurious

## FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

## **Applicable Standard**

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel.

## **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	1100.0008.02	2010-10-28	2011-10-27

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Procedure**

- 1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
- 2. Set the adjacent channel of the EUT maxhold another truce
- 3. Measure the channel separation.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

<sup>\*</sup> The testing was performed by Jimmy Xiao on 2011-02-21.

**Test Result:** Compliant.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2402	1.004	1	Pass
Adjacent Channel	2403	1.004	1	1 ass
Mid Channel	2441	1.004	1	Pass
Adjacent Channel	2442	1.004	1	газз
High Channel	2480	1.004	1	D
Adjacent Channel	2479	1.004	1	Pass


Please refer to the following plots.

## **Low Channel**

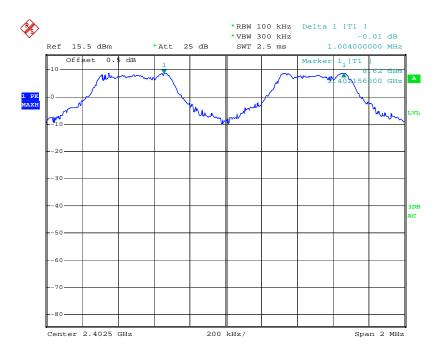


Date: 21.FEB.2011 20:56:33

## **Middle Channel**

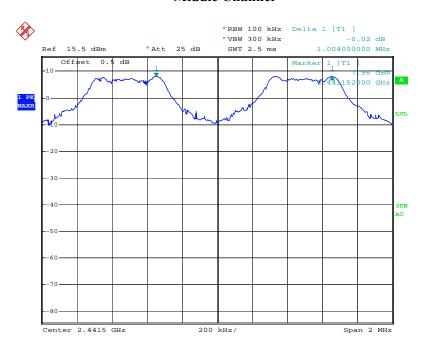

Date: 21.FEB.2011 20:59:20

## **High Channel**

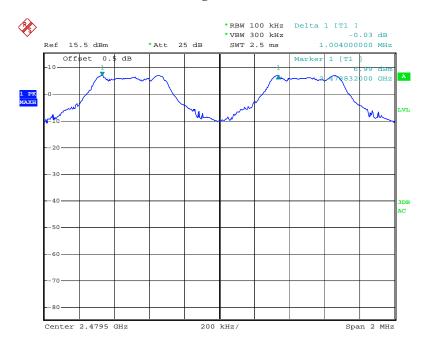

Date: 21.FEB.2011 21:01:45

## FCC $\S15.247(a)$ (1) – 20 dB BANDWIDTH TESTING

## **Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

## **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	1100.0008.02	2010-10-28	2011-10-27

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

<sup>\*</sup> The testing was performed by Jimmy Xiao on 2011-02-21.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	0.840
Middle	2441	0.880
High	2480	0.836

Please refer to the following plots.

## **Low Channel**

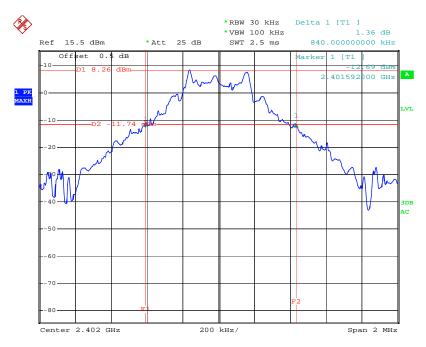


Date: 21.FEB.2011 20:45:57

## **Middle Channel**



Date: 21.FEB.2011 20:50:09

## **High Channel**

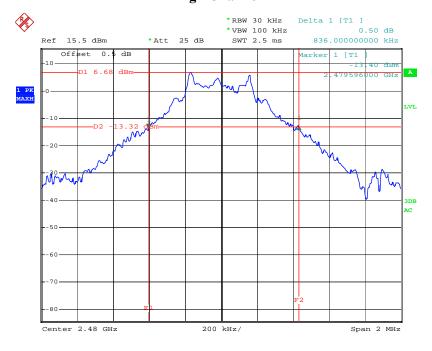

Date: 21.FEB.2011 20:53:35

## FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

## **Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

## **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	1100.0008.02	2010-10-28	2011-10-27

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- 2. Set the EUT in hopping mode from first channel to last.
- 3. By using the Max-Hold function record the Quantity of the channel.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

The testing was performed by Jimmy Xiao on 2011-02-21.


**Test Result:** Compliance

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

## **Number of Hopping Channels**

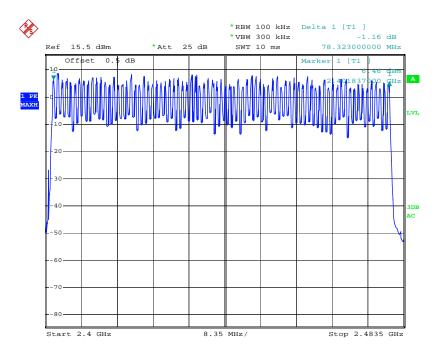

Date: 21.FEB.2011 20:41:37

## FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)

## **Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

## **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	1100.0008.02	2010-10-28	2011-10-27

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length \* hope rate/ number of hopping channels \* 31.6s Hop rate=1600/s

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Jimmy Xiao on 2011-02-21.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
	Low	0.415	0.133	0.4	Pass
DH 1	Middle	0.425	0.136	0.4	Pass
Dili i	High	0.410	0.131	0.4	Pass
	Note: Dwe	ll time=Pulse time (ms	$(1600 \div 2 \div 79)$	9) ×31.6 Seco	nd
DH 3	Low	1.690	0.271	0.4	Pass
	Middle	1.580	0.253	0.4	Pass
	High	1.730	0.277	0.4	Pass
	Note: Dwe	ll time=Pulse time (ms	$(1600 \div 4 \div 79)$	9) ×31.6 Seco	nd
DH 5	Low	2.980	0.318	0.4	Pass
	Middle	3.020	0.322	0.4	Pass
	High	3.020	0.322	0.4	Pass
<b>Note:</b> Dwell time=Pulse Time (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6 Second				ond	


Please refer to the following plots.

#### Low Channel for DH1

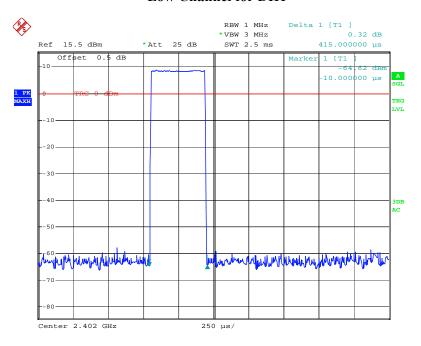


Date: 21.FEB.2011 21:14:52

## Middle Channel for DH1

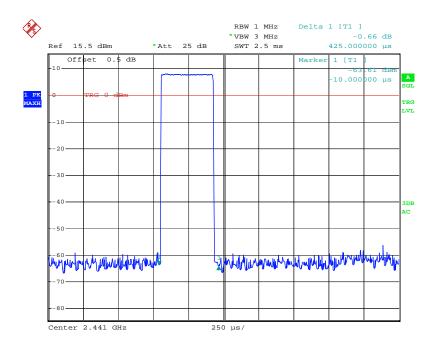


Date: 21.FEB.2011 21:18:39

## **High Channel for DH1**

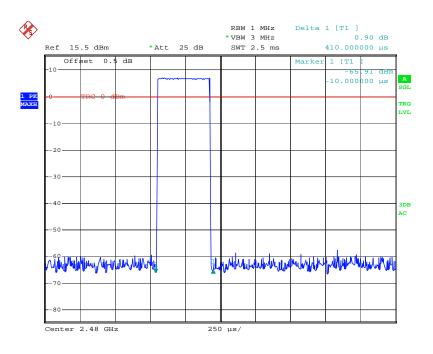


Date: 21.FEB.2011 21:21:50

## **Low Channel for DH3**

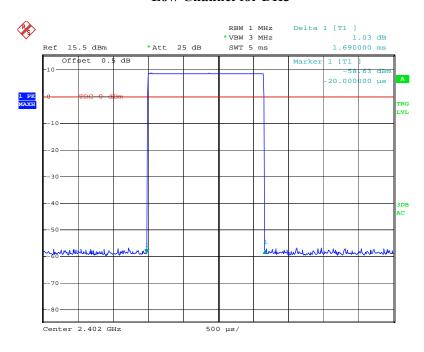


Date: 21.FEB.2011 21:15:59

## Middle Channel for DH3

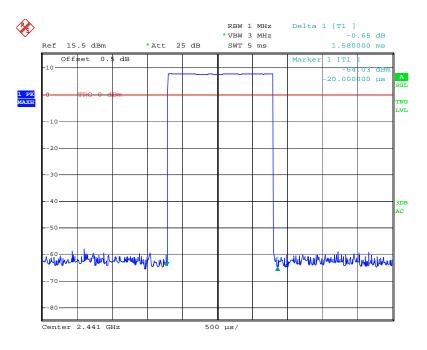


Date: 21.FEB.2011 21:19:40

## **High Channel for DH3**

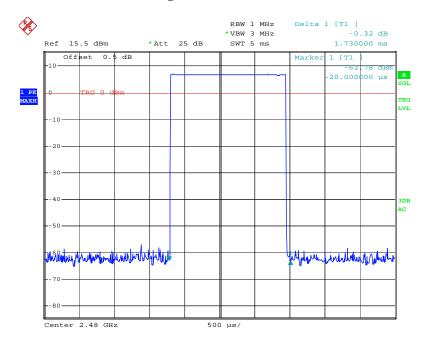


Date: 21.FEB.2011 21:22:22

## **Low Channel for DH5**

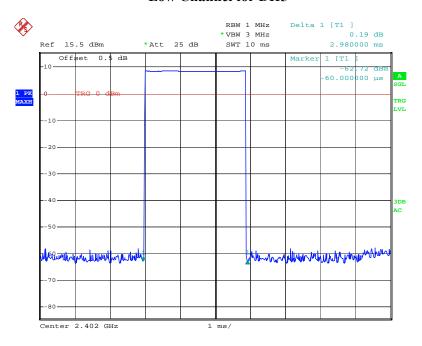


Date: 21.FEB.2011 21:17:14

## **Middle Channel for DH5**

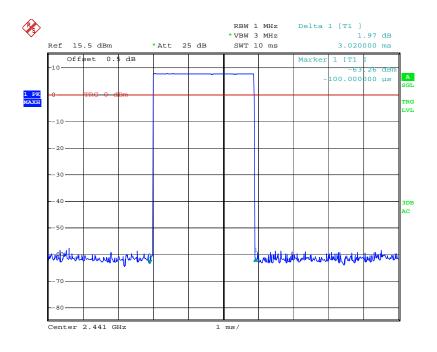

Date: 21.FEB.2011 21:20:19

## **High Channel for DH5**

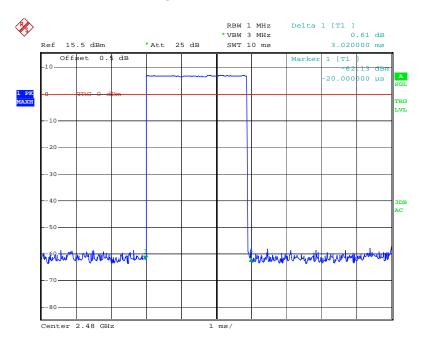

Date: 21.FEB.2011 21:23:00

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

## **Applicable Standard**

According to FCC §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

## **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	1100.0008.02	2010-10-28	2011-10-27

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Procedure**

- 1. Place the EUT on a bench and set in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
- 3. Add a correction factor to the display.



#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

<sup>\*</sup> The testing was performed by Jimmy Xiao on 2011-02-21.

**Test Result:** Compliance.

Test Mode: Transmitting

Channel	Channel frequency (MHz)	Reading power (dBm)	Power output (mW)	Limit (mW)
Low	2402	8.70	7.413	1000
Middle	2441	7.98	6.281	1000
High	2480	6.96	4.966	1000

## FCC §15.247(d) - BAND EDGES TESTING

## **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

## **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	1100.0008.02	2010-10-28	2011-10-27

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

## **Test Data**

#### **Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

<sup>\*</sup>The testing was performed by Jimmy Xiao on 2011-02-21.

**Test Result:** Compliant


Test Mode: Transmitting

Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
2399.958	52.42	20
2483.956	54.78	20

Note: The point fall into the stricted band was in FCC 15.209, please refer to the restrict band testing.


Please refer to follow plots:

## **Band Edge: Left Side**

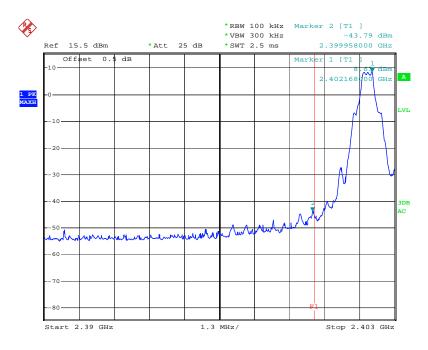

Date: 21.FEB.2011 21:37:57

## **Band Edge: Right Side**

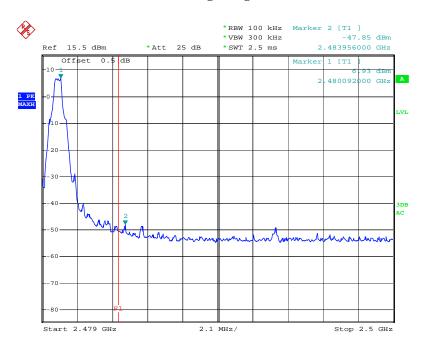

Date: 21.FEB.2011 21:43:23

\*\*\*\*\* END OF REPORT \*\*\*\*\*