

CTC advanced
member of RWTÜV group



Bundesnetzagentur

BNetzA-CAB-02/21-102

TEST REPORT

Test report no.: 1-5993/18-01-03



DAkkS
Deutsche
Akreditierungsstelle
D-PL-12076-01-03

Testing laboratory

CTC advanced GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.ctcadvanced.com>
e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-03

Applicant

Robert Bosch Car Multimedia GmbH
Robert-Bosch-Str. 200
31139 Hildesheim
Country: Germany
Phone: +49 5121 49-4983
Fax: +49 5121 49-2795
Contact: Salvatore Miraglia
e-mail: salvatore.miraglia@de.bosch.com

Manufacturer

Robert Bosch Car Multimedia GmbH
Robert-Bosch-Str. 200
31139 Hildesheim / Germany

Test standard/s

47 CFR Part 15	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 4	Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus
For further applied test standards please refer to section 3 of this test report.	

Test Item

Kind of test item:	Car Multi Media Device
Model name:	AIVICMFB0
FCC ID:	YBN-AIVICMFB0
IC:	9595A-AIVICMFB0
Frequency:	DTS band 2400 MHz to 2483.5 MHz
Technology tested:	WLAN
Antenna:	Integrated antenna
Power supply:	9.0 V to 16.0 V DC (Vehicle battery powered)
Temperature range:	-30°C to +70°C



This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

Marco Bertolino
Lab Manager
Radio Communications & EMC

Test performed:

p.o.
René Oelmann
Lab Manager
Radio Communications & EMC

1 Table of contents

1	Table of contents.....	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s and references.....	4
4	Test environment	5
5	Test item	5
5.1	General description.....	5
5.2	Additional information	5
6	Description of the test setup	6
6.1	Shielded semi anechoic chamber	7
6.2	Shielded fully anechoic chamber	8
6.3	Radiated measurements > 18 GHz	9
6.4	Conducted measurements with peak power meter & spectrum analyzer.....	10
6.5	Shielded fully anechoic chamber	11
7	Sequence of testing	12
7.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	12
7.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	13
7.3	Sequence of testing radiated spurious 1 GHz to 18 GHz	14
7.4	Sequence of testing radiated spurious above 18 GHz	15
8	Measurement uncertainty.....	16
9	Summary of measurement results	17
10	Additional comments.....	18
11	Additional EUT parameter.....	19
12	Measurement results	20
12.1	Antenna gain.....	20
12.2	Identify worst case data rate.....	23
12.3	Maximum output power	24
12.4	Duty cycle	25
12.5	Peak power spectral density	26
12.6	6 dB DTS bandwidth	35
12.7	Occupied bandwidth – 99% emission bandwidth	44
12.8	Occupied bandwidth – 20 dB bandwidth	53
12.9	Band edge compliance conducted.....	62
12.10	Spurious emissions conducted	68
12.11	Spurious emissions radiated below 30 MHz	83
12.12	Spurious emissions radiated 30 MHz to 1 GHz	90
12.13	Spurious emissions radiated above 1 GHz	101
13	Observations	114
Annex A	Glossary	114
Annex B	Document history	115
Annex C	Accreditation Certificate	115

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2018-02-22
Date of receipt of test item:	2018-02-19
Start of test:	2018-02-26
End of test:	2018-03-02
Person(s) present during the test:	-/-

2.3 Test laboratories sub-contracted

None

3 Test standard/s and references

Test standard	Date	Description
47 CFR Part 15	-/-	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 2	February 2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 4	November 2014	Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus

Guidance	Version	Description
DTS: KDB 558074 D01	v04	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American national standard of procedures for compliance testing of unlicensed wireless devices

4 Test environment

Temperature	: T _{nom} T _{max} T _{min}	+22 °C during room temperature tests No tests under extreme conditions required. No tests under extreme conditions required.
Relative humidity content	:	35 %
Barometric pressure	:	996 hpa
Power supply	: V _{nom} V _{max} V _{min}	12.0 V DC (Vehicle battery powered) No tests under extreme conditions required. No tests under extreme conditions required.

5 Test item

5.1 General description

Kind of test item	: Car Multi Media Device
Type identification	: AIVICMFB0
HMN	: -/
PMN	: AIVICMFB0
HVIN	: AIVICMFB0
FVIN	: -/
S/N serial number	: Radiated unit: 0000048 Conducted unit: 0000036
HW hardware status	: 001
SW software status	: 0776
Frequency band	: DTS band 2400 MHz to 2483.5 MHz
Type of radio transmission	: DSSS, OFDM
Use of frequency spectrum	: -
Type of modulation	: (D)BPSK, (D)QPSK, 16 – QAM, 64 – QAM
Number of channels	: 11 (20 MHz); 7 (40 MHz)
Antenna	: Integrated antenna
Power supply	: 9.0 V to 16.0 V DC (Vehicle battery powered)
Temperature range	: -30°C to +70°C

5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report: 1-5993/18-01-01_AnnexA
 1-5993/18-01-01_AnnexB
 1-5993/18-01-01_AnnexD

6 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

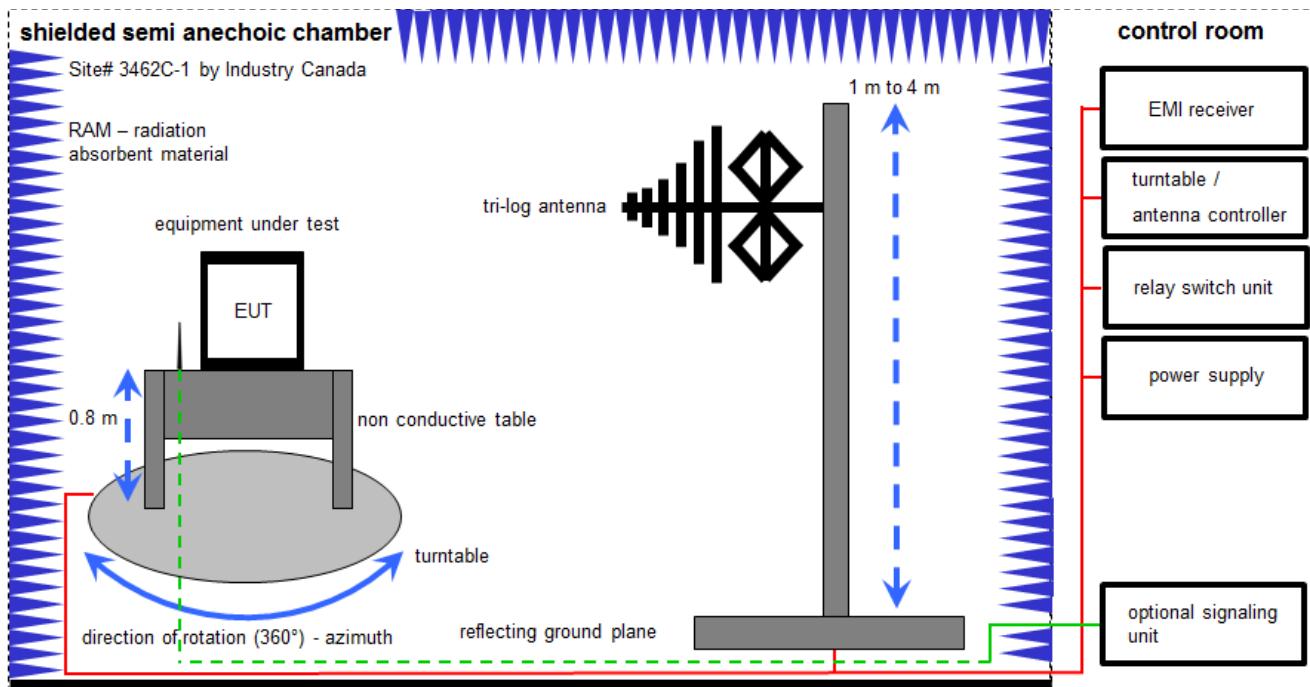
In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
VLK!	Attention: extended calibration interval	*)	next calibration ordered / currently in progress
NK!	Attention: not calibrated		

6.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.



Measurement distance: tri-log antenna 10 meter

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

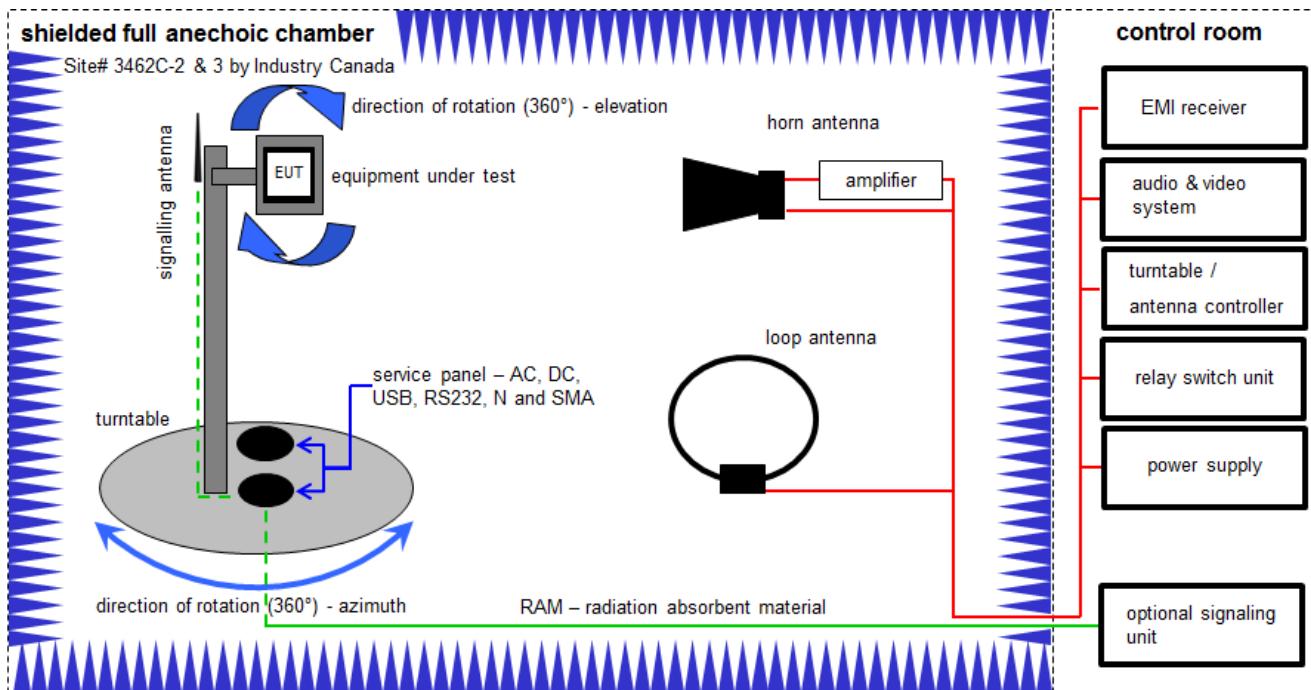
Example calculation:

$$FS [\text{dB}\mu\text{V/m}] = 12.35 [\text{dB}\mu\text{V/m}] + 1.90 [\text{dB}] + 16.80 [\text{dB}/\text{m}] = 31.05 [\text{dB}\mu\text{V/m}] (35.69 \mu\text{V/m})$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Meßkabine 1	HF-Absorberhalle	MWB AG 300023	-/-	300000551	ne	-/-	-/-
3	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	15.12.2017	14.12.2018
4	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
5	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
6	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
7	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	25.04.2016	25.04.2018

6.2 Shielded fully anechoic chamber



Measurement distance: horn antenna 3 meter; loop antenna 3 meter

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

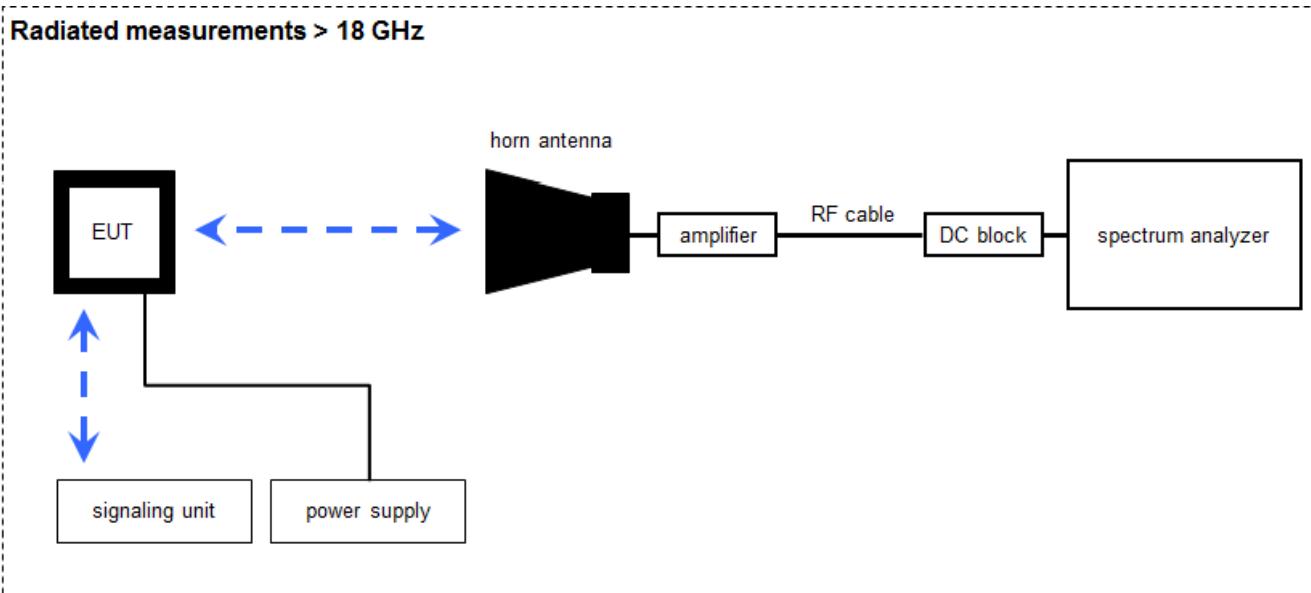
Example calculation:

$$\text{FS [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-35.8) \text{ [dB]} + 32.9 \text{ [dB/m]} = 37.1 \text{ [dB}\mu\text{V/m]} (71.61 \mu\text{V/m})$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	k	07.07.2017	06.07.2019
2	A, B, C	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
3	B, C	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3697	300001605	vIKI!	14.02.2017	13.02.2019
4	A, B, C	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
5	C	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev	-/-	-/-
6	B, C	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	20.12.2017	19.12.2018
7	C	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev	-/-	-/-
8	C	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	19	300003790	ne	-/-	-/-
9	C	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22049	300004481	ev	-/-	-/-
10	A, B, C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
11	A, B, C	NEXIO EMV-Software	BAT EMC V3.16.0.49	EMCO	-/-	300004682	ne	-/-	-/-
12	A, B, C	PC	ExOne	F+W	-/-	300004703	ne	-/-	-/-

6.3 Radiated measurements > 18 GHz



Measurement distance: horn antenna 50 cm

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:

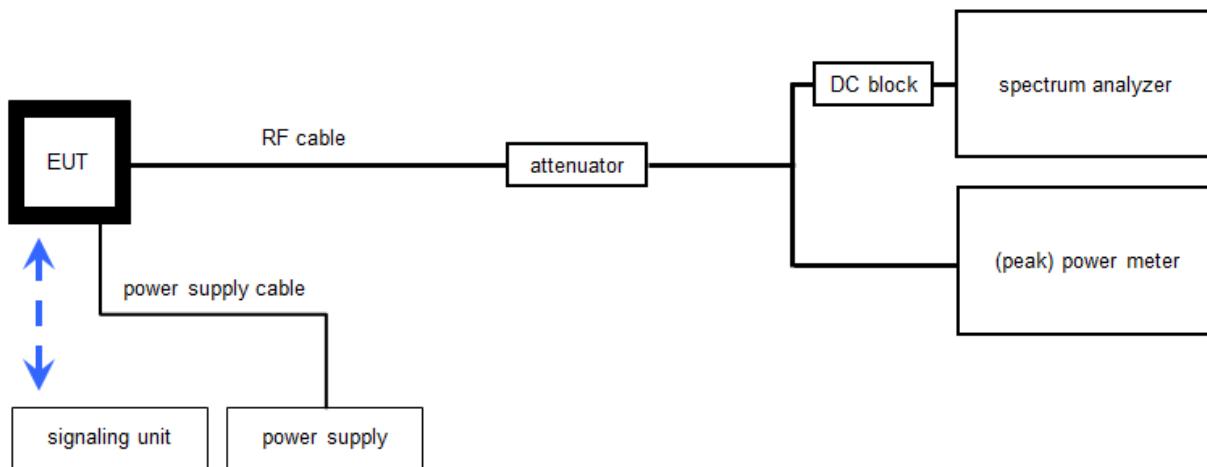
$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dB\mu V/m] (6.79 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Amplifier 2-40 GHz	JS32-02004000-57-5P	MITEQ	1777200	300004541	ev	-/-	-/-
2	A	RF-Cable	ST18/SMAm/SMAm/48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
3	A	RF-Cable	ST18/SMAm/SMAm/48	Huber & Suhner	Batch no. 127377	400001183	ev	-/-	-/-
4	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	-/-	400001185	ev	-/-	-/-
5	A	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda	-/-	300000486	k	13.12.2017	12.12.2019
6	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	16.01.2018	15.01.2019

6.4 Conducted measurements with peak power meter & spectrum analyzer

Conducted measurements normal conditions



OP = AV + CA
(OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

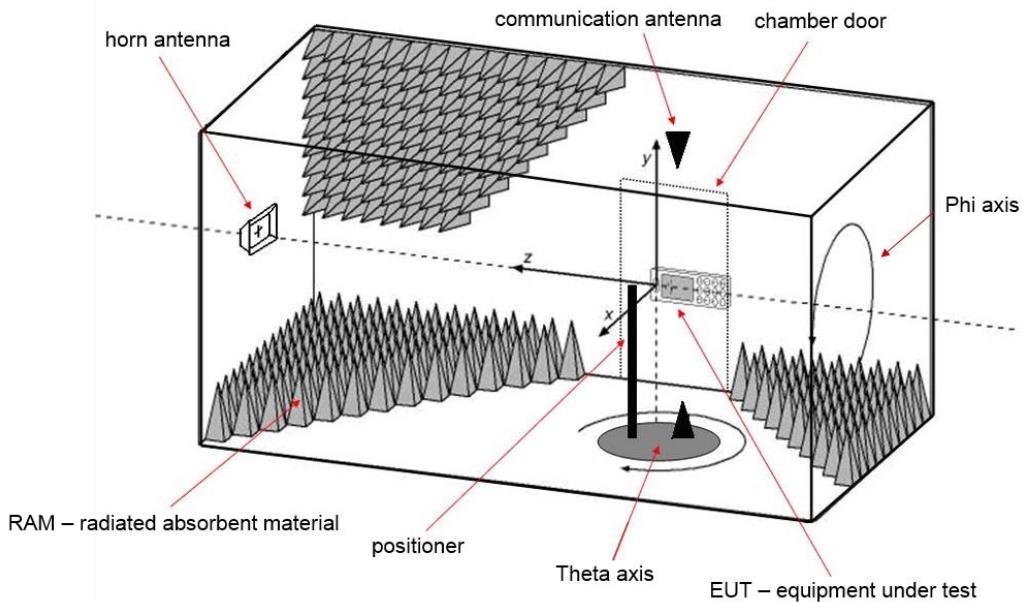
$$OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 \text{ mW})$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	16.01.2018	15.01.2019
2	A, B	PC-WLAN Tester	Intel Core i3 3220/3,3 GHz, Prozessor	-/-	2V2403033A45 23	300004589	ne	-/-	-/-
3	A, B	Teststand	Teststand Custom Sequence Editor	National Instruments GmbH	-/-	300004590	ne	-/-	-/-
4	B	Power Sensor	NRP-Z81	R&S	100010	300003780	k	26.01.2017	25.01.2019
5	A, B	RF-Cable	ST18/SMAm/SMAm/ 60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
6	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	-/-	400001185	ev	-/-	-/-
7	A, B	Coax Attenuator 10 dB 2W 0-40 GHz	MCL BW-K10-2W44+	Mini Circuits	-/-	400001186	ev	-/-	-/-

6.5 Shielded fully anechoic chamber

OTA – over the air performance



Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch Unit	TS-RSP	R&S	100155	300003281	ev	-/-	-/-
2	A	CTIA-Chamber	CTIA-Chamber AMS 8500	ETS-Lindgren Finnland	100155	300003327	ne	-/-	-/-
3	A	CTIA-Chamber - Software	CTIA-Chamber - Software	EMCO/2	100155	300003328	ne	-/-	-/-
4	A	CTIA-Chamber - Antenna	3164-04	EMCO/2	00041915	300003328	ne	-/-	-/-
5	A	Limiting Amplifier (Microwave Amplifier)	LA 02-801	JCA Technology	101	300003341	ne	-/-	-/-
6	A	Spectrum Analyzer 9kHz - 30 GHz	FSP30	R&S	100623	300003464	vIKI!	01.02.2017	31.01.2019

7 Sequence of testing

7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*)Note: The sequence will be repeated three times with different EUT orientations.

7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premereasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premereasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

8 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Antenna gain	± 3 dB
Power spectral density	± 1.5 dB
DTS bandwidth	± 100 kHz (depends on the used RBW)
Occupied bandwidth	± 100 kHz (depends on the used RBW)
Maximum output power	± 1.5 dB
Detailed spurious emissions @ the band edge - conducted	± 1.5 dB
Band edge compliance radiated	± 3 dB
Spurious emissions conducted	± 3 dB
Spurious emissions radiated below 30 MHz	± 3 dB
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB
Spurious emissions radiated above 12.75 GHz	± 4.5 dB
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB

9 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 2	See table!	2018-03-12	-/-

Test specification clause	Test case	Guideline	Temperature conditions	Power source voltages	Mode	C	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (f)(ii)	Antenna gain	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.35	Duty cycle	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	KDB 558074 DTS clause: 10.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(a)(2) RSS - 247 / 5.2 (a)	DTS bandwidth	KDB 558074 DTS clause: 8.1	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(b)(3) RSS - 247 / 5.4 (d)	Maximum output power	KDB 558074 DTS clause: 9.1.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	Detailed spurious emissions @ the band edge – cond.	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance cond. & rad.	KDB 558074 DTS clause: 13.3.2 and clause 12.2.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	TX spurious emissions cond.	KDB 558074 DTS clause: 11.1 & 11.2 11.3	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.209(a) RSS-Gen	TX spurious emissions rad. below 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. 30 MHz to 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. above 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.109 RSS-Gen	RX spurious emissions rad. 30 MHz to 1 GHz	-/-	Nominal	Nominal	RX / idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.109 RSS-Gen	RX spurious emissions rad. above 1 GHz	-/-	Nominal	Nominal	RX / idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Conducted emissions < 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
---	-----------	----	---------------	----	----------------	----	---------------

10 Additional comments

Reference documents: Instructions_RadioTypeApproval_9_6_2017.pdf
Laptop_Instructions_RadioTypeApproval_AIVIP32R0.docx

Special test descriptions: None

Configuration descriptions: Used power settings: b-mode: 14
g-mode: 11
n-mode HT20: 11
n-mode HT40: 11

Provided channels:

Channels with 20 MHz channel bandwidth:

channel number & centre frequency													
channel	1	2	3	4	5	6	7	8	9	10	11	12	13
f _c / MHz	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472

Channels with 40 MHz channel bandwidth:

channel number & centre frequency													
channel	-/-	-/-	3	4	5	6	7	8	9	10	11	-/-	-/-
f _c / MHz	-/-	-/-	2422	2427	2432	2437	2442	2447	2452	2457	2462	-/-	-/-

Note: The channels used for the tests are marked in bold in the list.

11 Additional EUT parameter

Test mode:

No test mode available
iperf was used to ping another device with the largest support packet size

Test mode available
Special software is used.
EUT is transmitting pseudo random data by itself

Modulation types:

Wide Band Modulation (None Hopping – e.g. DSSS, OFDM)

Frequency Hopping Spread Spectrum (FHSS)

Antennas and transmit operating modes:

Operating mode 1 (single antenna)
- *Equipment with 1 antenna,*
- *Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,*
- *Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)*

Operating mode 2 (multiple antennas, no beamforming)
- *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.*

Operating mode 3 (multiple antennas, with beamforming)
- *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.*

12 Measurement results

12.1 Antenna gain

Description:

The antenna gain of the complete system is calculated by the difference of radiated power (@ 3 MHz) in EIRP and the conducted power (@ 3 MHz) of the module.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz / 10 MHz
Trace mode	Max hold
Test setup	See chapter 6.4 A (conducted) See chapter 6.5 A (radiated)
Measurement uncertainty	See chapter 8

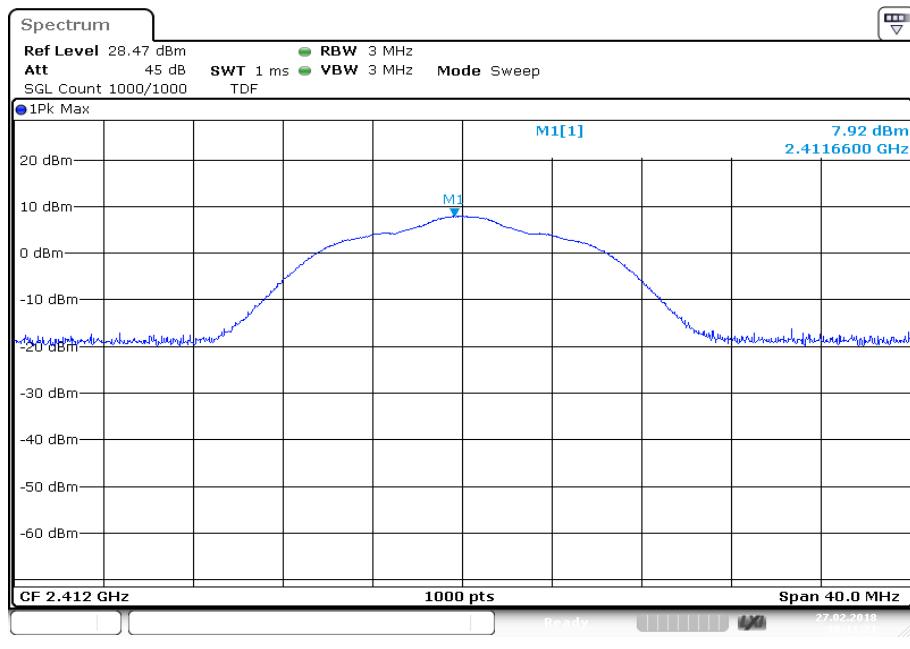
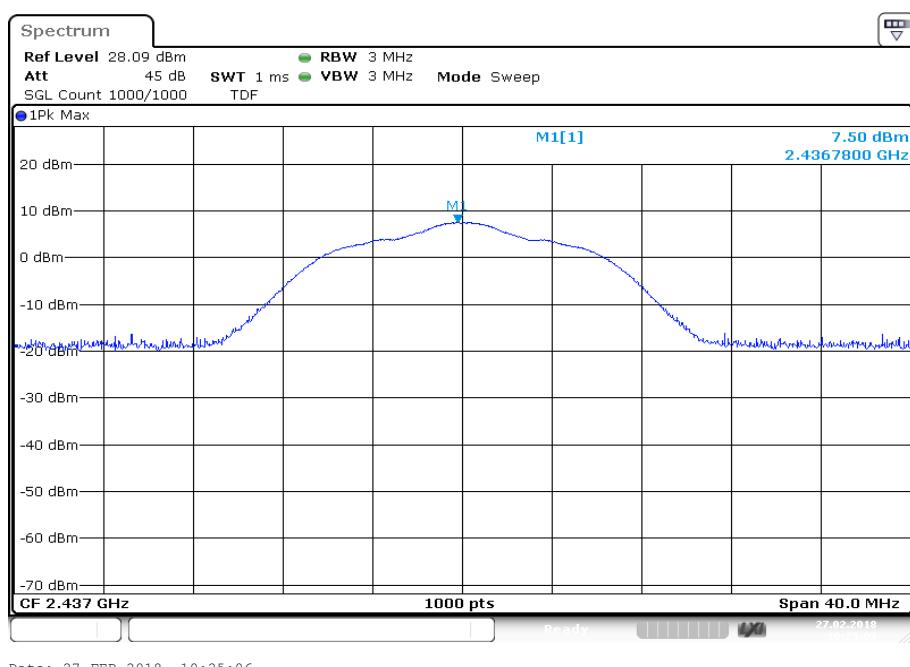
Limits:

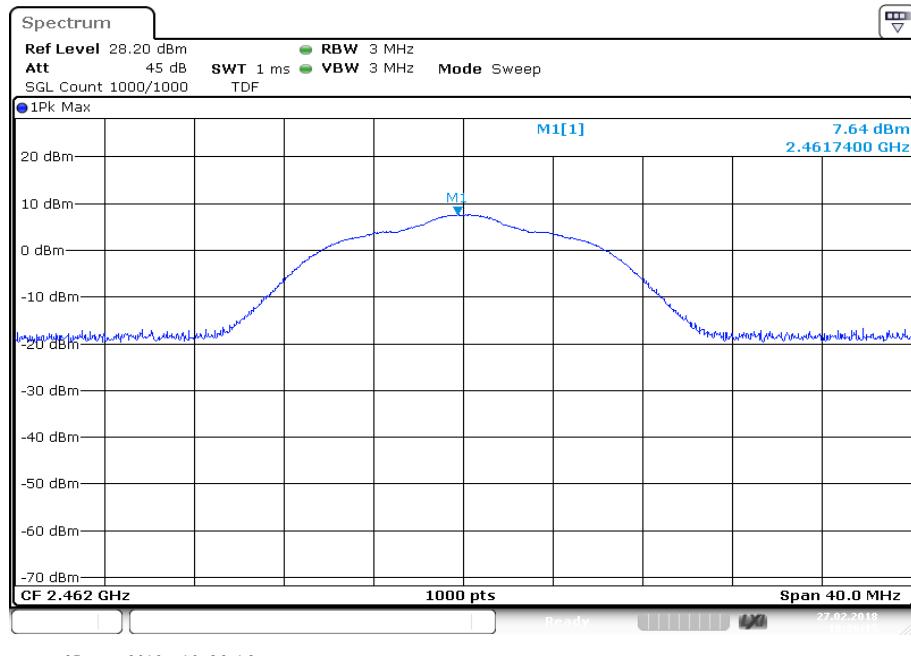
FCC	IC
6 dBi / > 6 dBi output power and power density reduction required	

Results:

	lowest channel	middle channel	highest channel
Conducted power / dBm Measured with DSSS modulation	7.9	7.5	7.6
Radiated power / dBm Measured with DSSS modulation	13.1	12.3	10.7
Gain / dBi Calculated	5.2	4.8	3.1

Plots: DSSS / b – mode

Plot 1: Lowest channel

Plot 2: Middle channel


Plot 3: Highest channel

12.2 Identify worst case data rate

Description:

All modes of the module will be measured with an average power meter or spectrum analyzer to identify the maximum transmission power.

In further tests only the identified worst case modulation scheme or bandwidth will be measured and this mode is used as representative mode for all other modulation schemes.

Measurement:

Measurement parameter	
According to DTS clause: 9.1.2	
Peak power meter in averaging mode	
Test setup	See chapter 6.4 - A
Measurement uncertainty	See chapter 8

Results:

	maximum output power / dBm							
	Lowest channel							
Data rate	1 Mbps		2 Mbps		5.5 Mbps		11 Mbps	
Output power conducted DSSS / b – mode	10.1		9.9		9.9		10.1	
Data rate	6 M	9 M	12 M	18 M	24 M	36 M	48 M	54 M
Output power conducted OFDM / g – mode	5.9	5.8	5.9	5.8	5.6	5.8	5.7	5.6
Data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Output power conducted OFDM / n HT20 – mode	6.0	5.9	5.9	5.9	5.9	6.0	5.9	5.8
Output power conducted OFDM / n HT40 – mode	5.1	5.0	4.9	5.7	5.0	4.9	5.1	5.0

Worst case data rate:

Modulation scheme / bandwidth	
DSSS / b – mode	1 Mbit/s
OFDM / g – mode	6 Mbit/s
OFDM / n HT20 – mode	MCS0
OFDM / n HT40 – mode	MCS0

12.3 Maximum output power

Description:

Measurement of the maximum conducted peak output power. The measurements are performed using the data rate identified in the previous chapter.

Measurement:

Measurement parameter	
According to DTS clause: 9.1.2	
Peak power meter	
Test setup	See chapter 6.4 - B
Measurement uncertainty	See chapter 8

Limits:

FCC	IC
Conducted 1.0 W / 30 dBm with an antenna gain of max. 6 dBi	

Results:

	maximum output power / dBm		
	lowest channel	middle channel	highest channel
Output power conducted DSSS / b – mode	12.4	12.1	12.1
Output power conducted OFDM / g – mode	16.4	16.4	15.3
Output power conducted OFDM / n HT20 – mode	16.3	16.4	15.9
Output power conducted OFDM / n HT40 – mode	16.7	16.5	16.5

12.4 Duty cycle

Description:

Measurement of the timing behavior.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Depends on the signal see plot
Resolution bandwidth	10 MHz
Video bandwidth	10 MHz
Trace mode	Max hold
Test setup	See chapter 6.4 - A
Measurement uncertainty	See chapter 8

Limits:

FCC	IC
No limitation!	

Results:

T _{nom}	V _{nom}	lowest channel	middle channel	highest channel
	DSSS / b – mode	100.0 % / 0.0 dB	100.0 % / 0.0 dB	100.0 % / 0.0 dB
	OFDM / g – mode	100.0 % / 0.0 dB	100.0 % / 0.0 dB	100.0 % / 0.0 dB
	OFDM / n HT20 – mode	100.0 % / 0.0 dB	100.0 % / 0.0 dB	100.0 % / 0.0 dB
	OFDM / n HT40 – mode	100.0 % / 0.0 dB	100.0 % / 0.0 dB	100.0 % / 0.0 dB

12.5 Peak power spectral density

Description:

Measurement of the peak power spectral density of a digital modulated system. The PSD shows the strength of the variations as a function of the frequency. The measurement is repeated for both modulations at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
According to DTS clause: 10.2	
Detector	Positive Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Span	30 MHz / 60 MHz
Trace mode	Max. hold (allow trace to fully stabilize)
Test setup	See chapter 6.4 - A
Measurement uncertainty	See chapter 8

Limits:

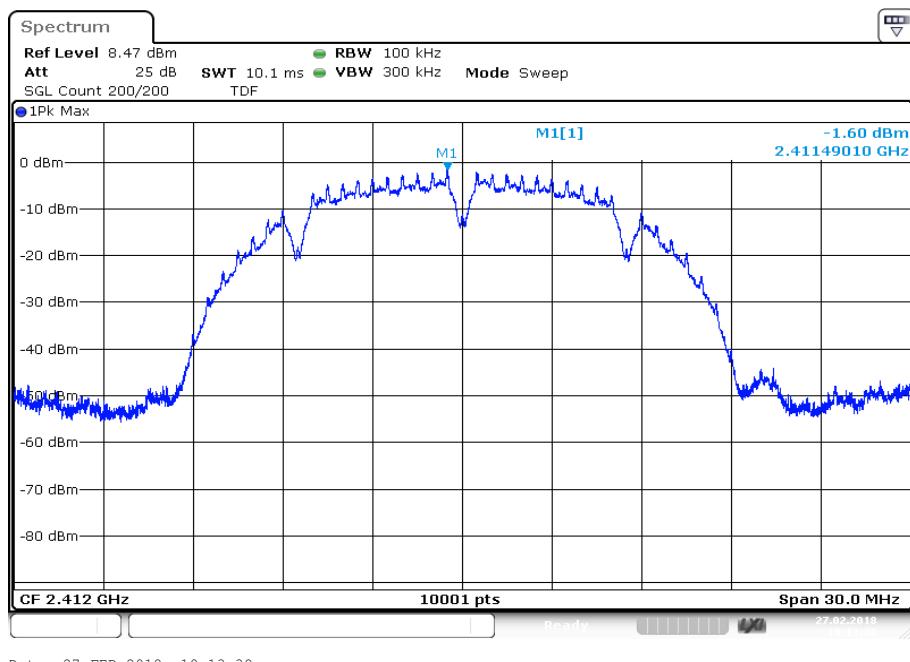
FCC	IC
8 dBm / 3 kHz (conducted)	
8 dBm / 100 kHz (conducted)	

Results:

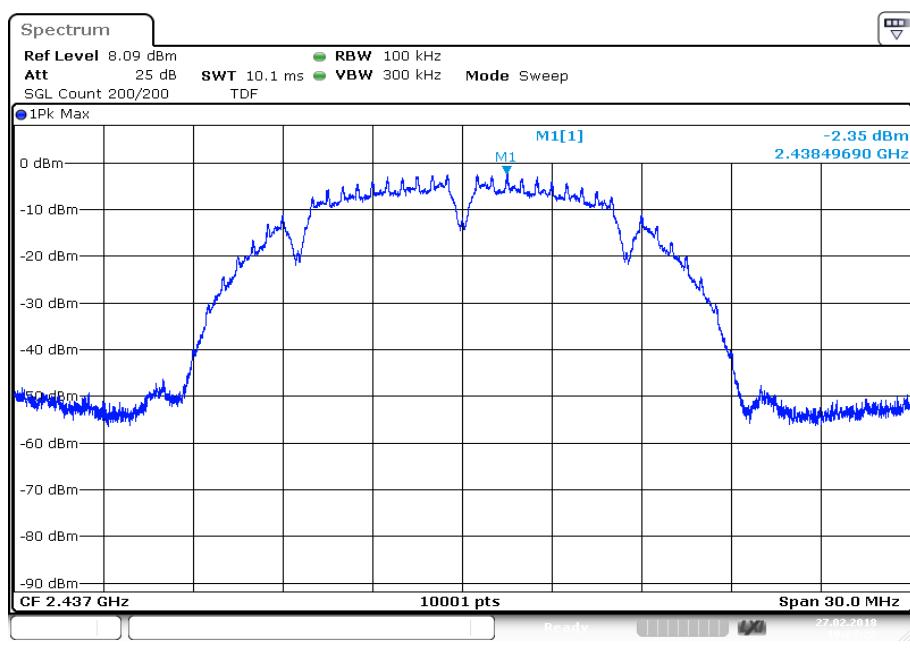
	peak power spectral density / dBm @ 100 kHz		
	Lowest channel	Middle channel	Highest channel
DSSS / b – mode	-1.6	-2.4	-2.0
OFDM / g – mode	-8.3	-10.3	-9.3
OFDM / n HT20 – mode	-10.4	-10.7	-10.3
OFDM / n HT40 – mode	-14.1	-13.1	-14.3

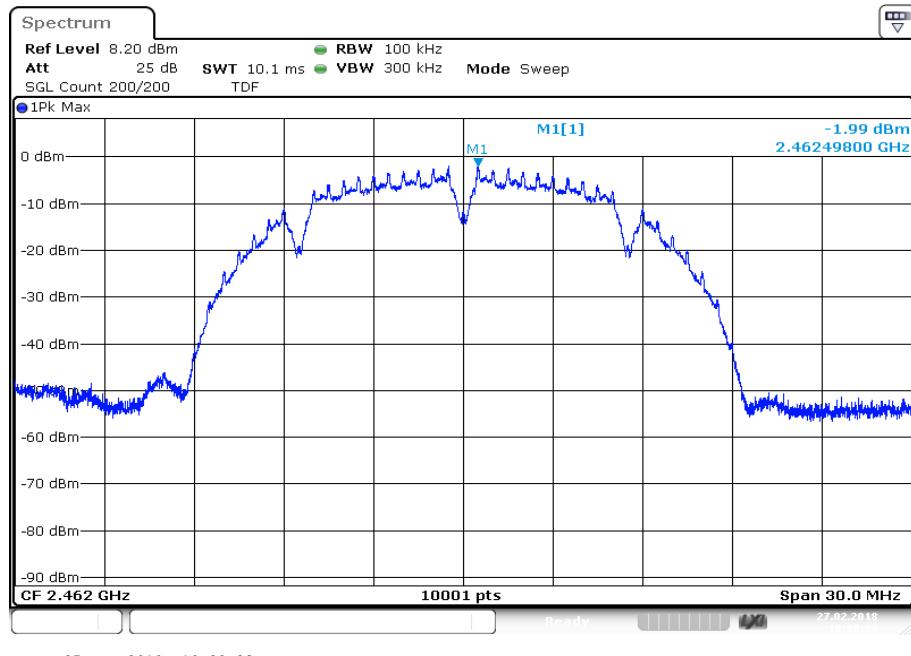
Plots: DSSS / b – mode

Plot 1: Lowest channel



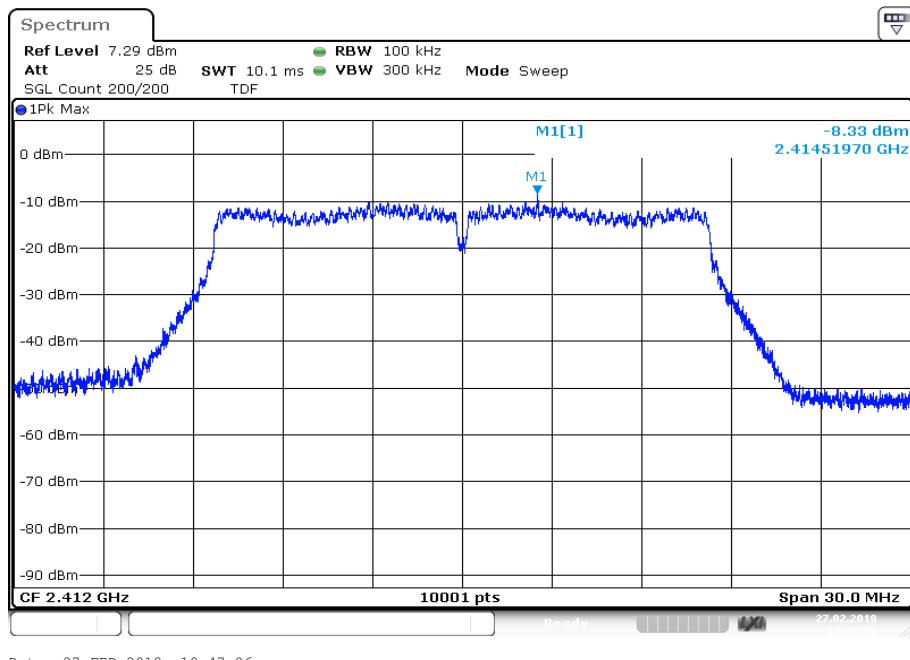
Plot 2: Middle channel



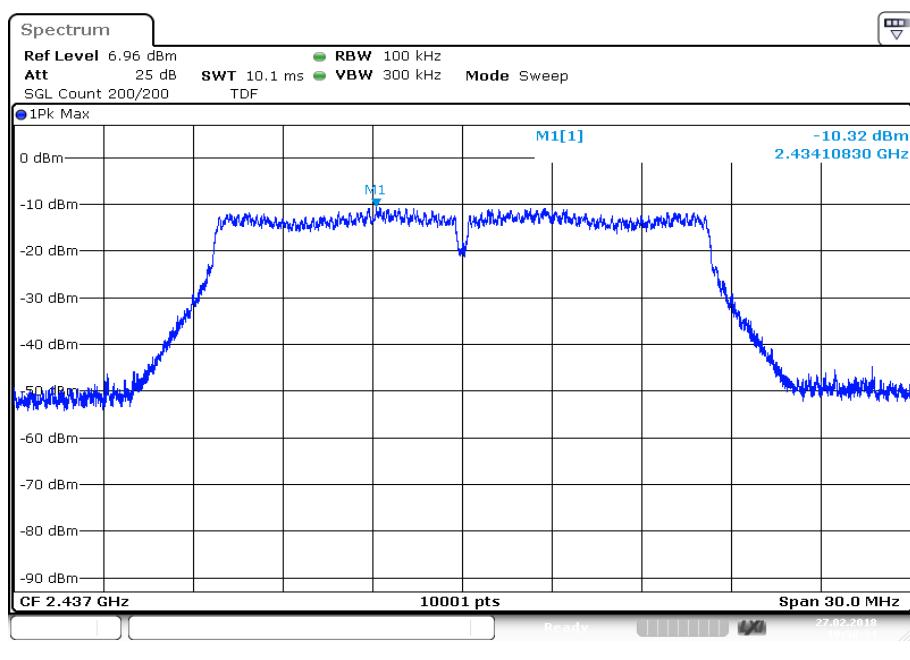
Plot 3: Highest channel

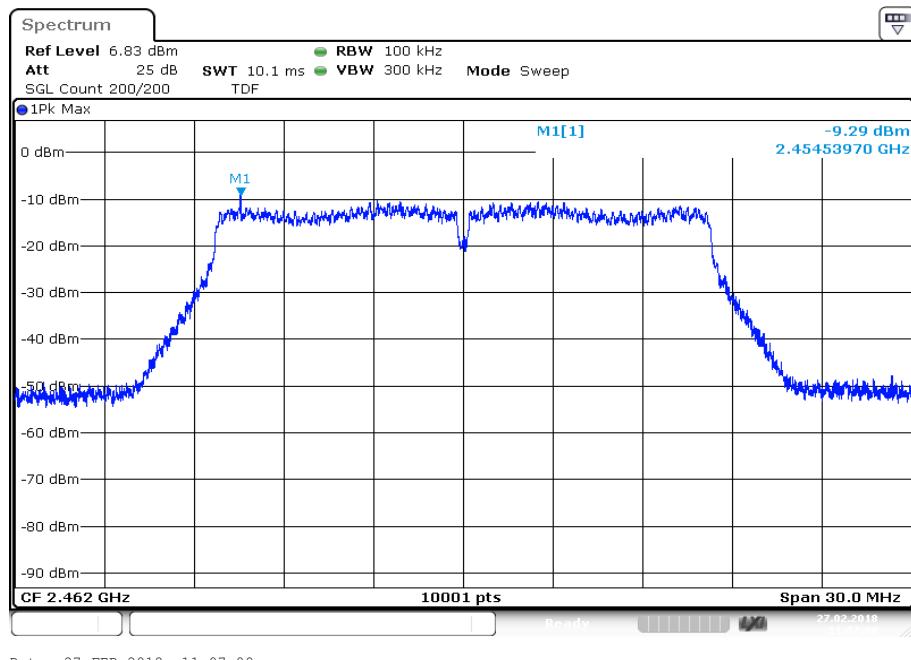
Plots: OFDM / g – mode

Plot 1: Lowest channel



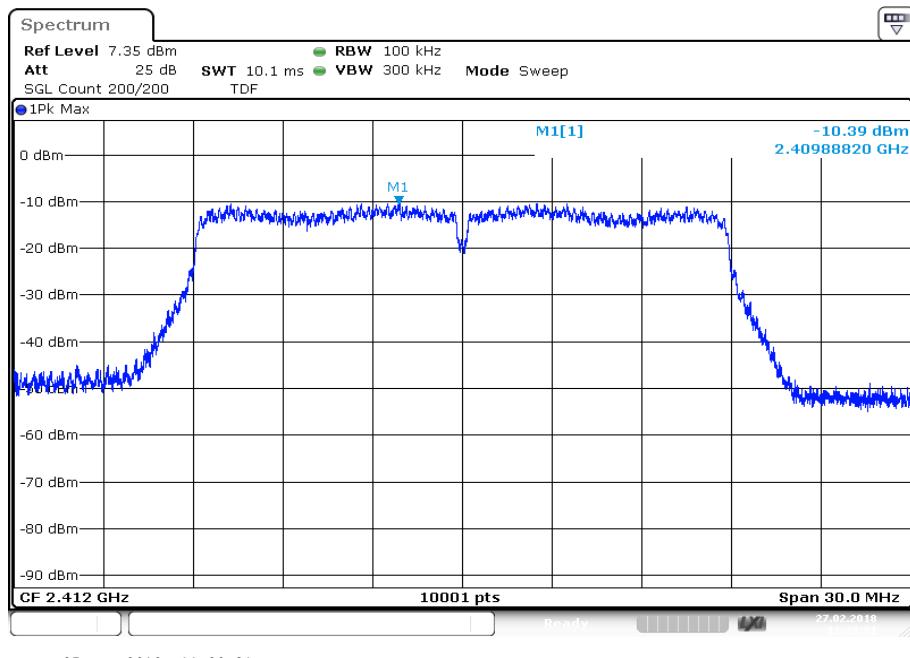
Plot 2: Middle channel



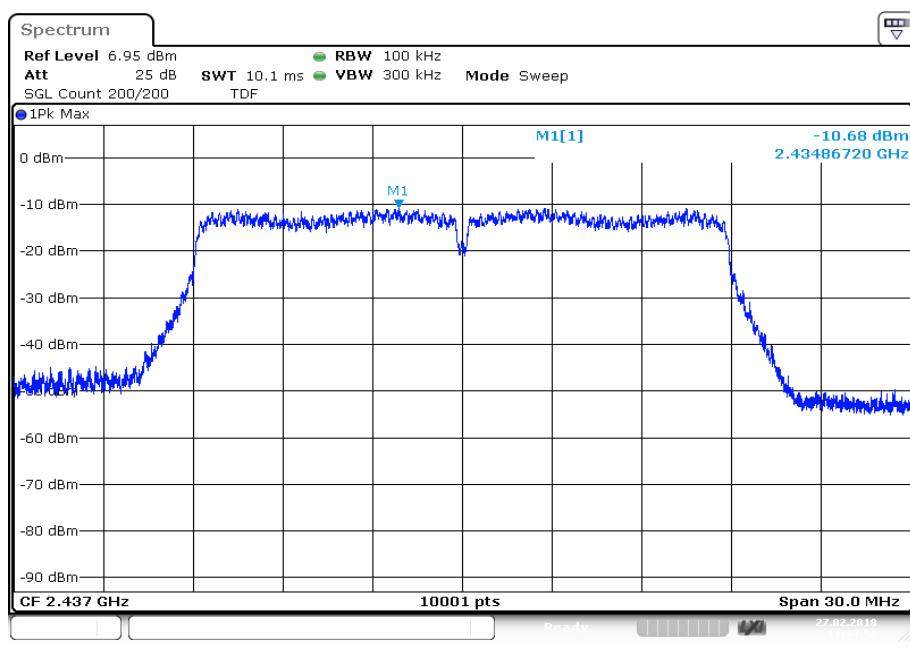
Plot 3: Highest channel

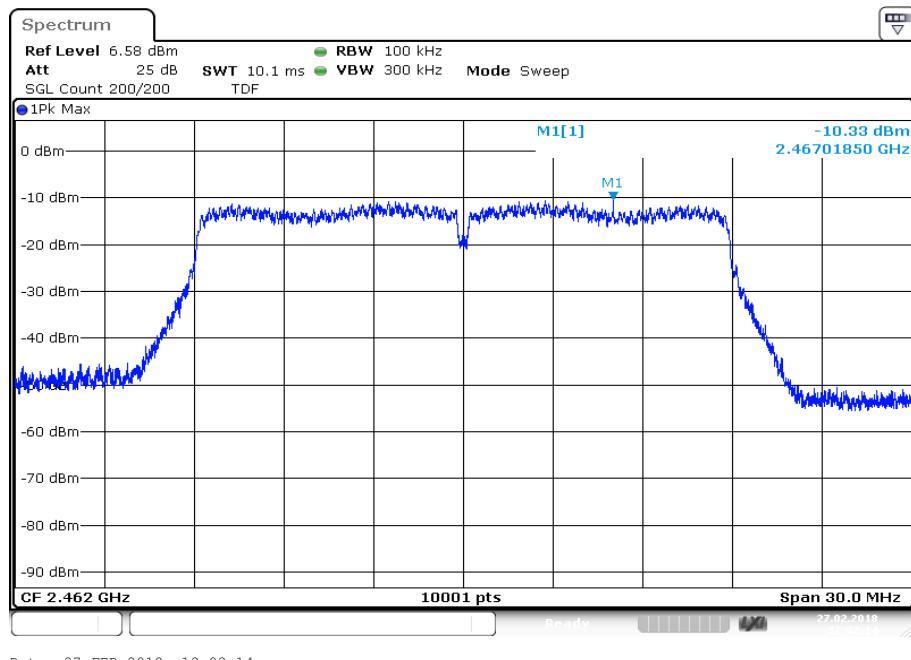
Plots: OFDM / n HT20 – mode

Plot 1: Lowest channel



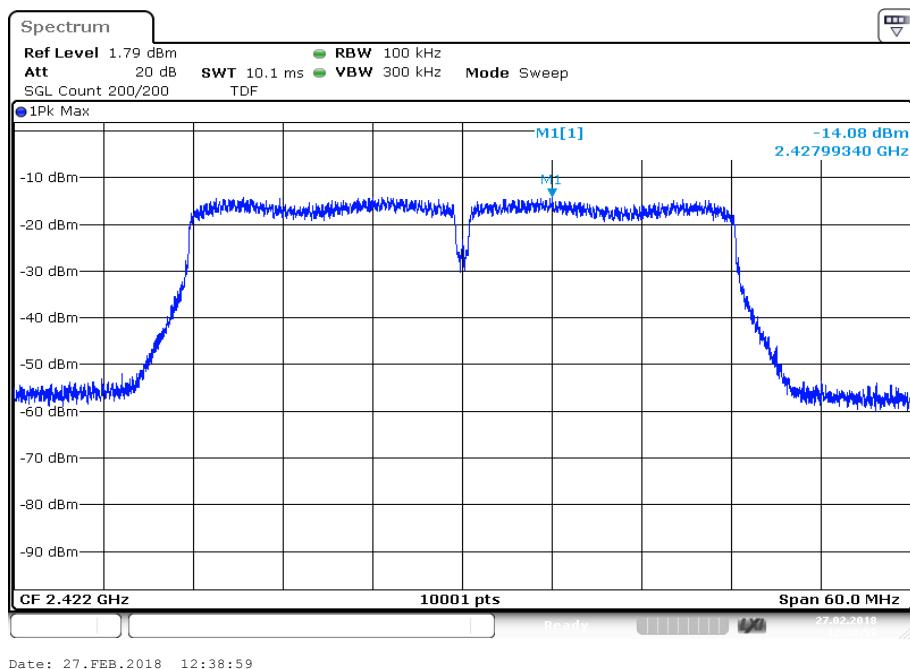
Plot 2: Middle channel



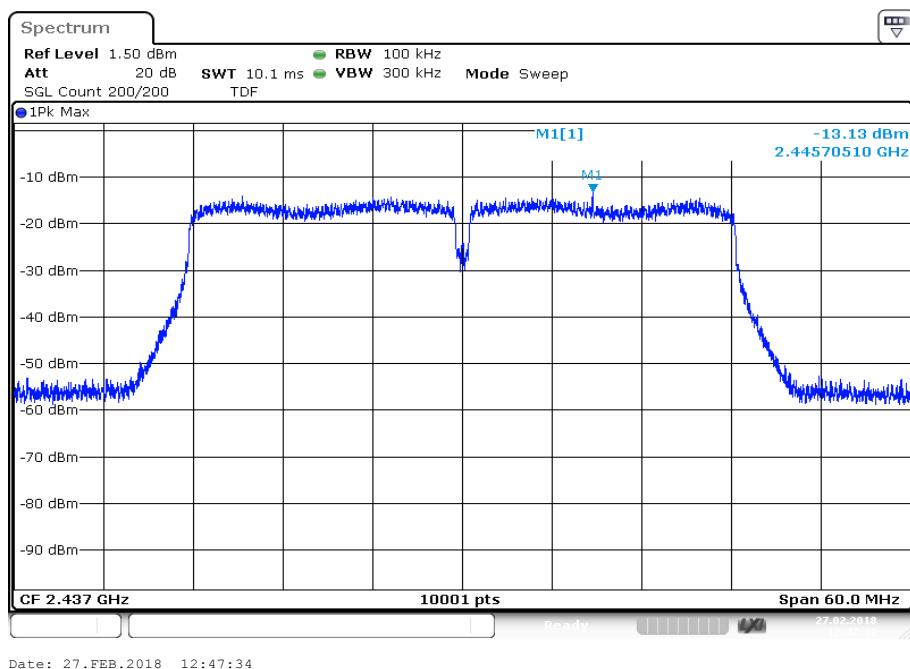
Plot 3: Highest channel

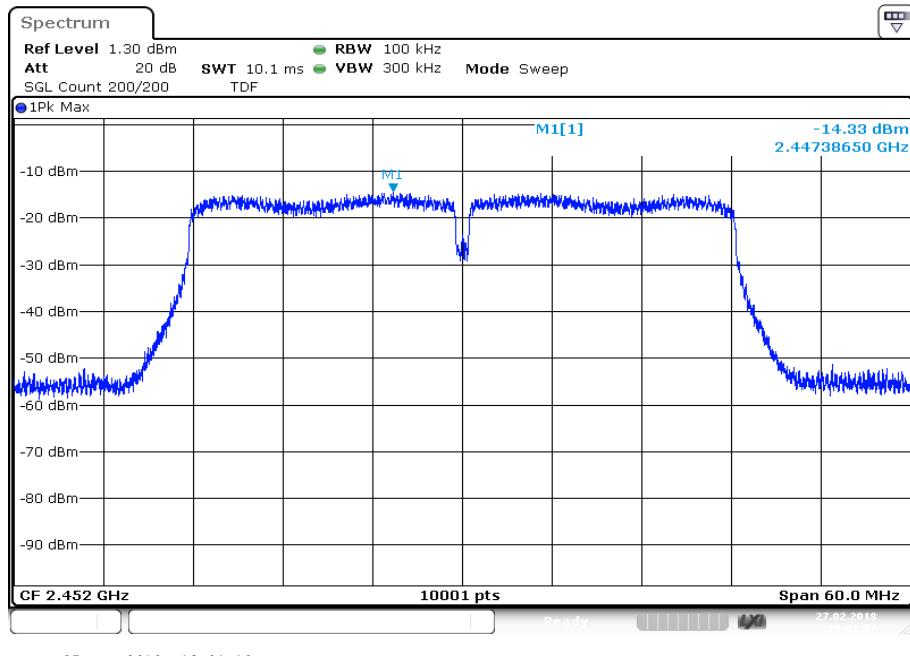
Plots: OFDM / n HT40 – mode

Plot 1: Lowest channel



Plot 2: Middle channel



Plot 3: Highest channel

12.6 6 dB DTS bandwidth

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to DTS clause: 8.1	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with 200 counts
Test setup	See chapter 6.4 - A
Measurement uncertainty	See chapter 8

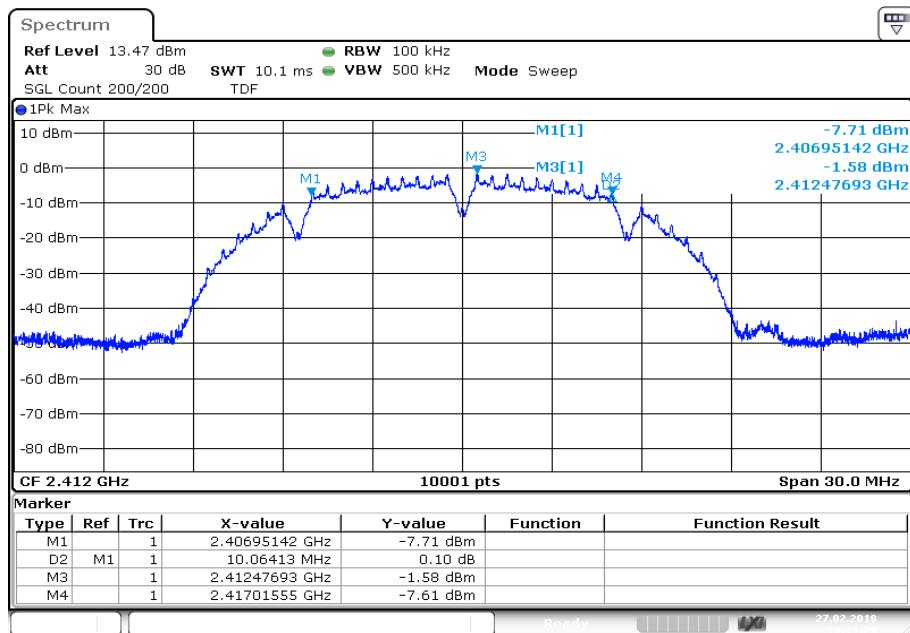
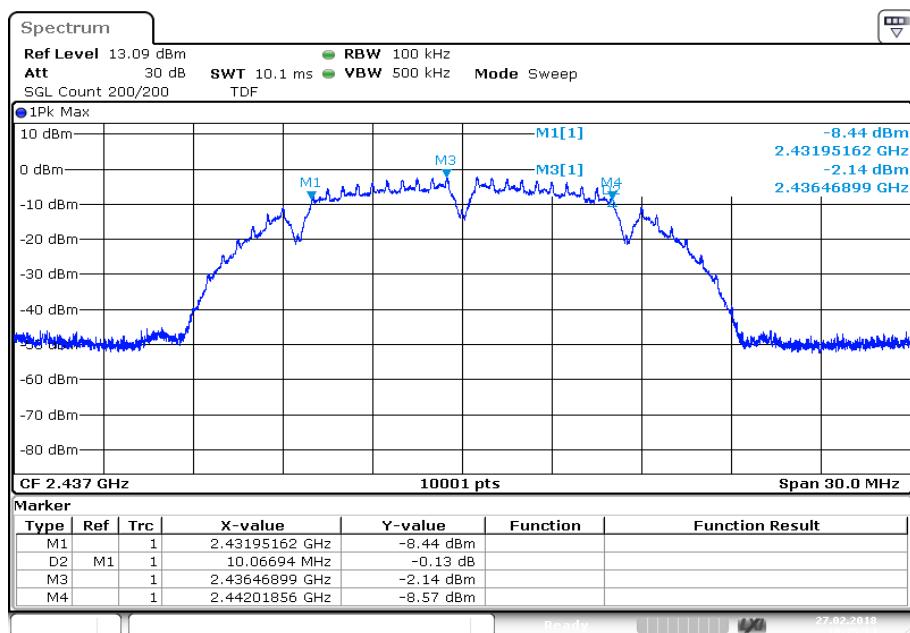
Limits:

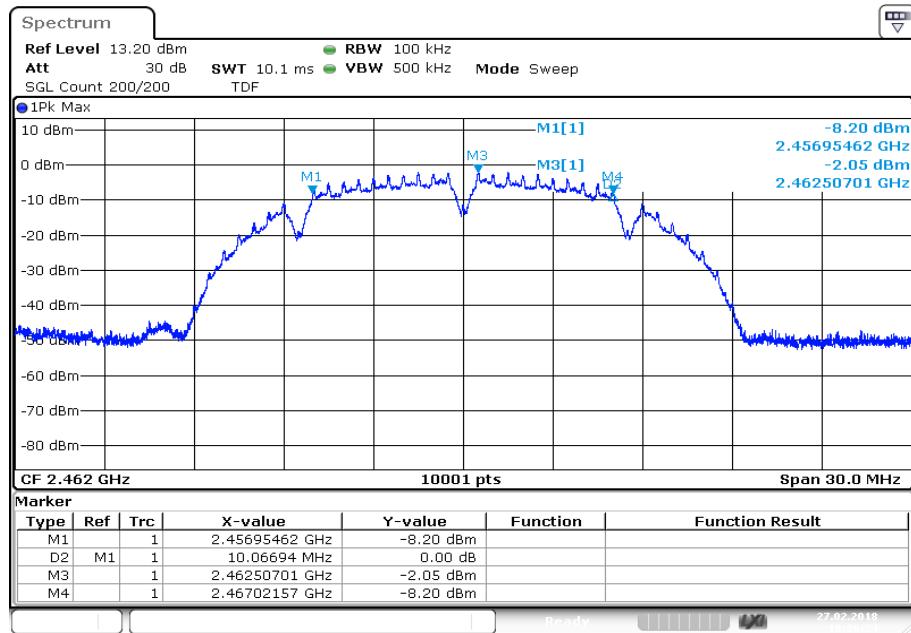
FCC	IC
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	

Results:

	6 dB DTS bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	10064	10067	10067
OFDM / g – mode	16549	16534	16393
OFDM / n HT20 – mode	17617	17611	17662
OFDM / n HT40 – mode	36374	36375	36350

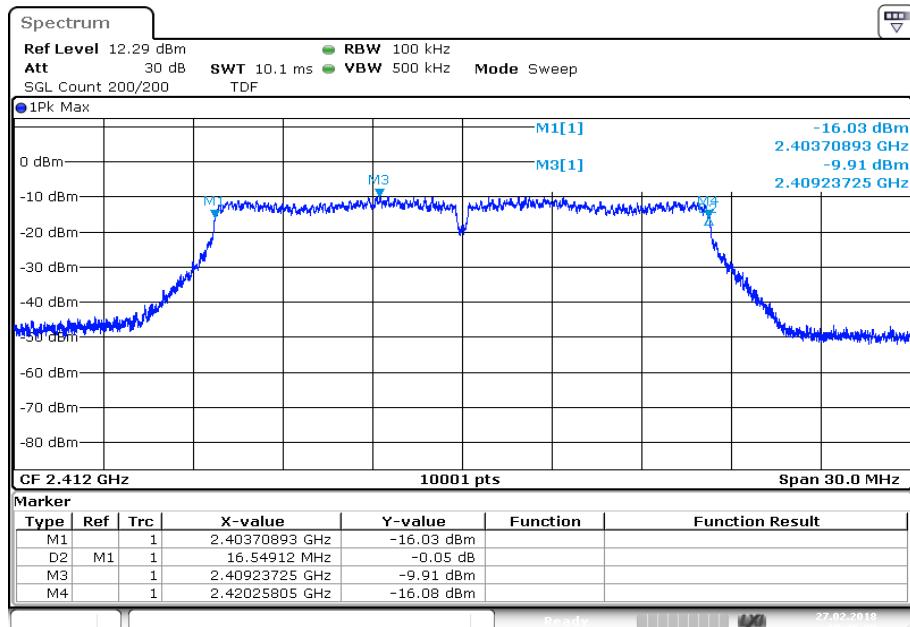
Plots: DSSS / b – mode

Plot 1: Lowest channel

Plot 2: Middle channel


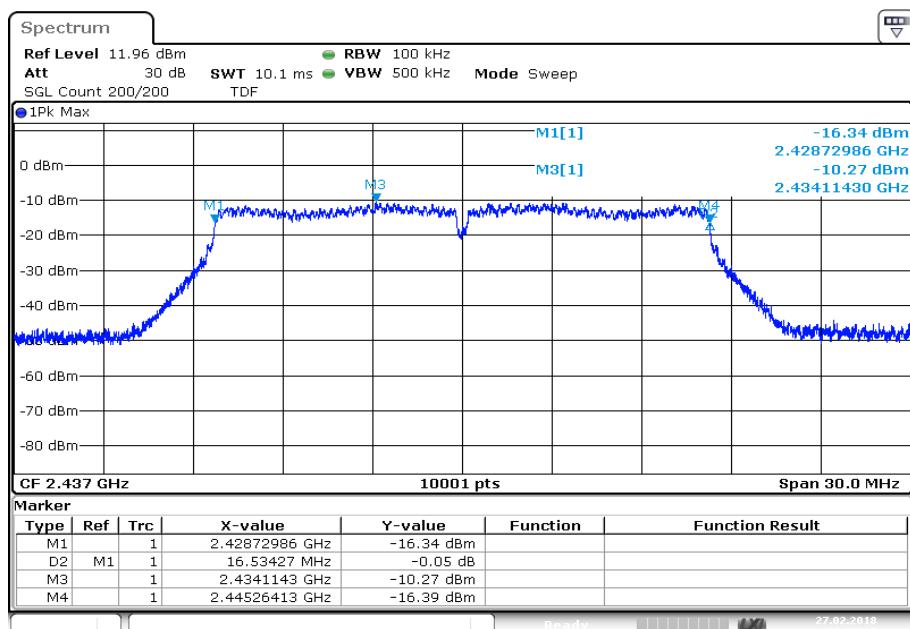
Plot 3: Highest channel


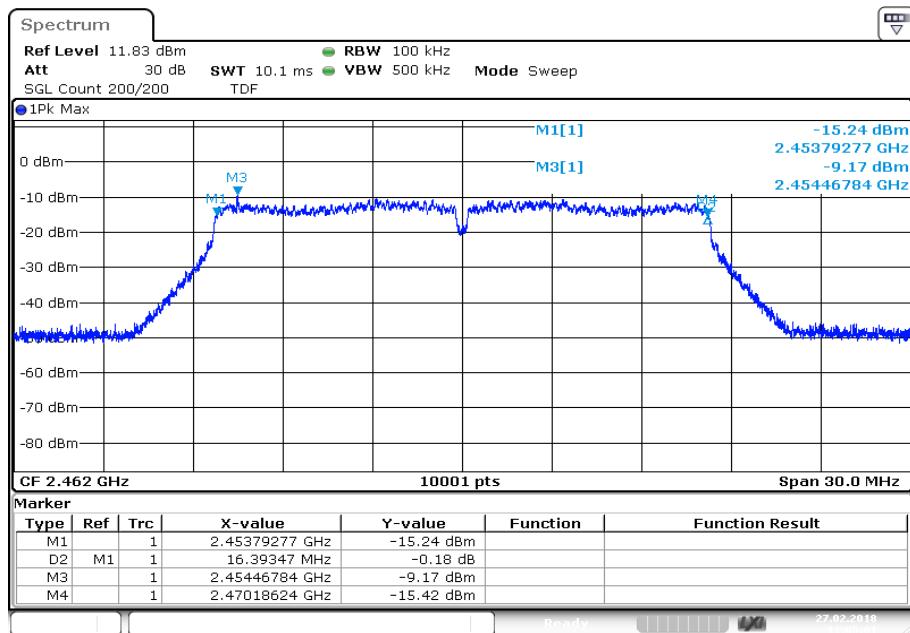
Plots: OFDM / g – mode

Plot 1: Lowest channel



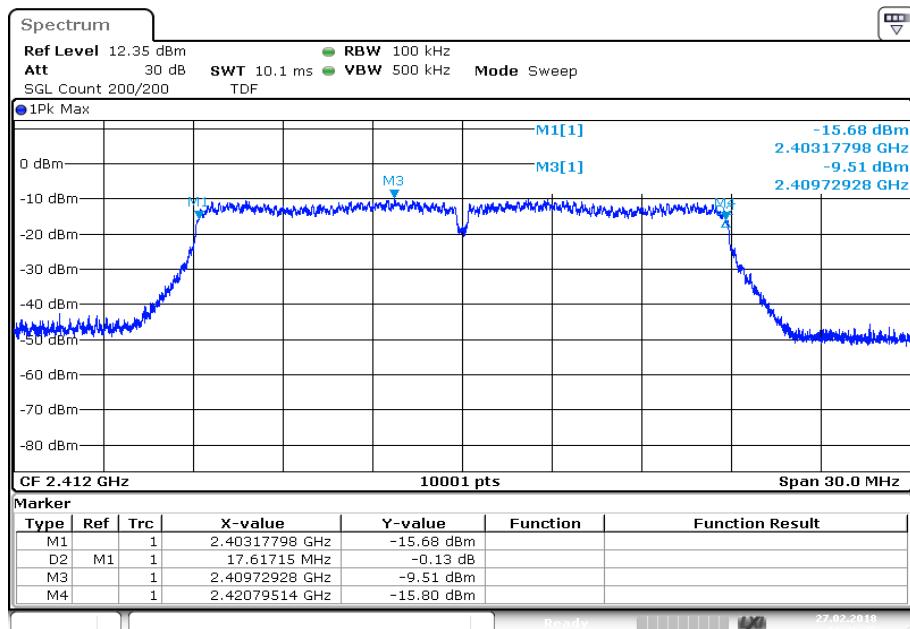
Plot 2: Middle channel



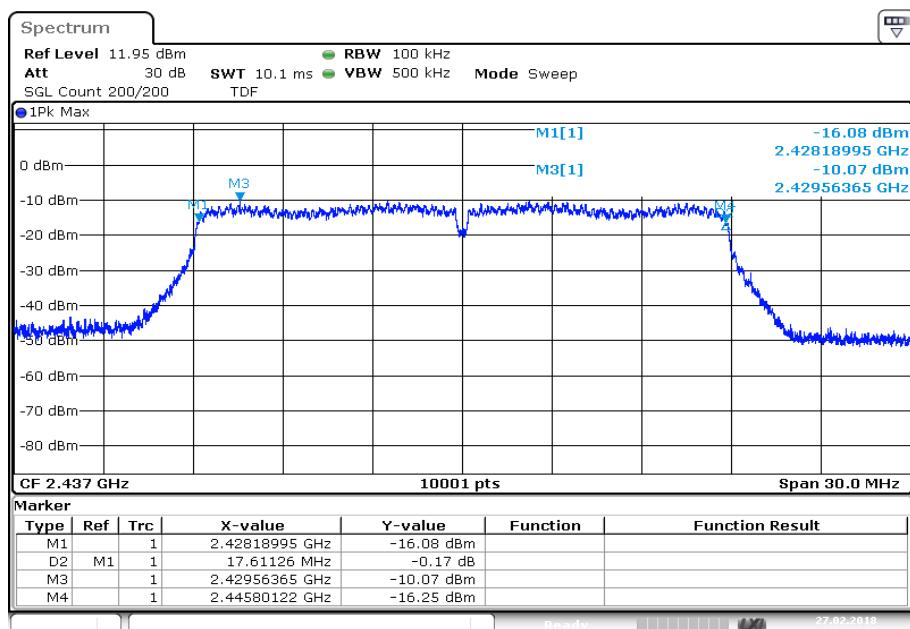
Plot 3: Highest channel

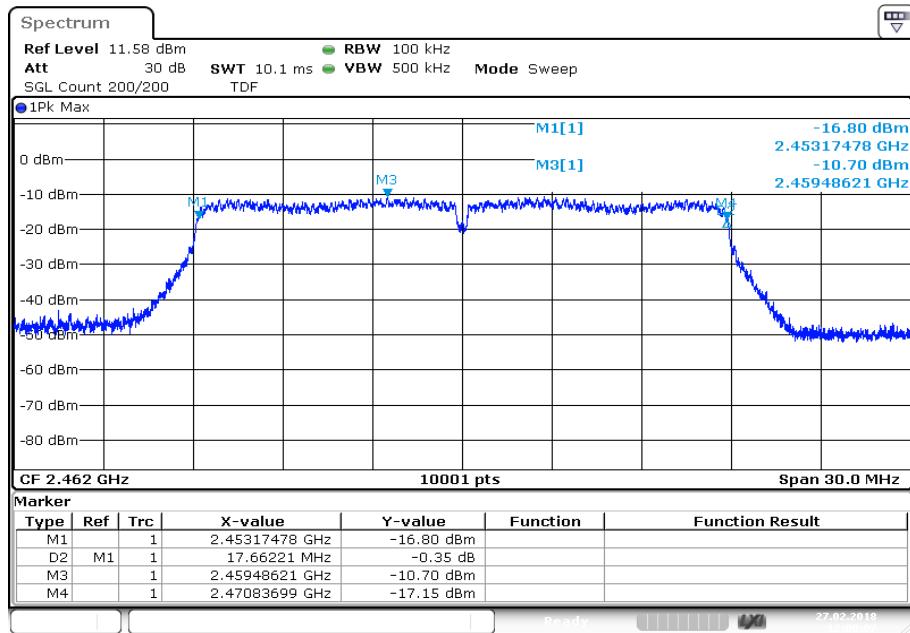
Plots: OFDM / n HT20 – mode

Plot 1: Lowest channel



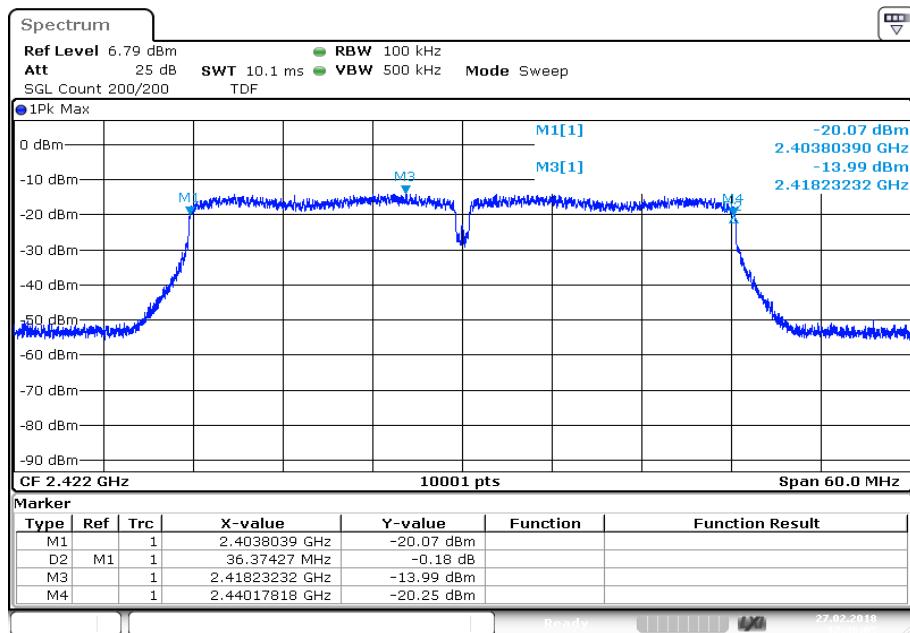
Plot 2: Middle channel



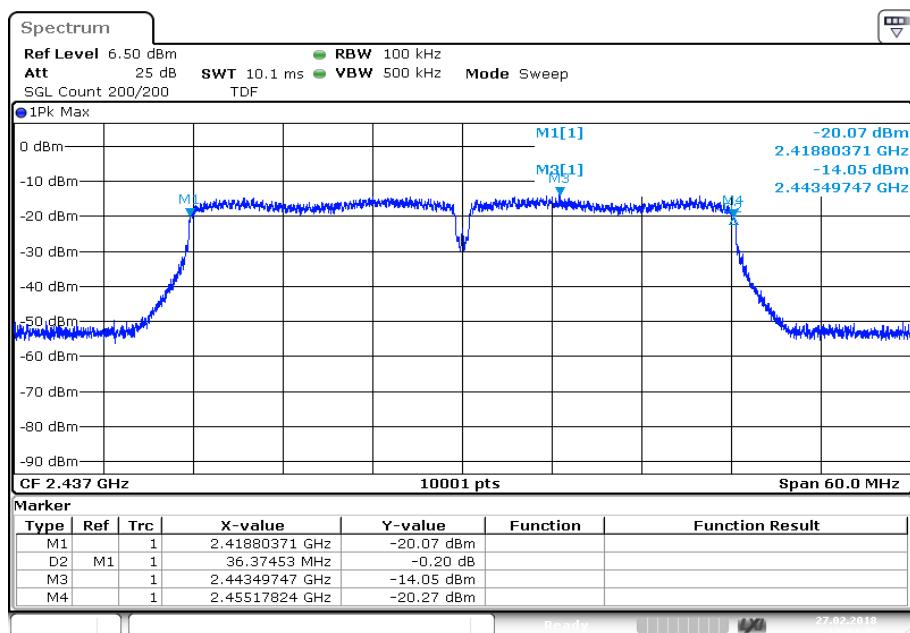
Plot 3: Highest channel


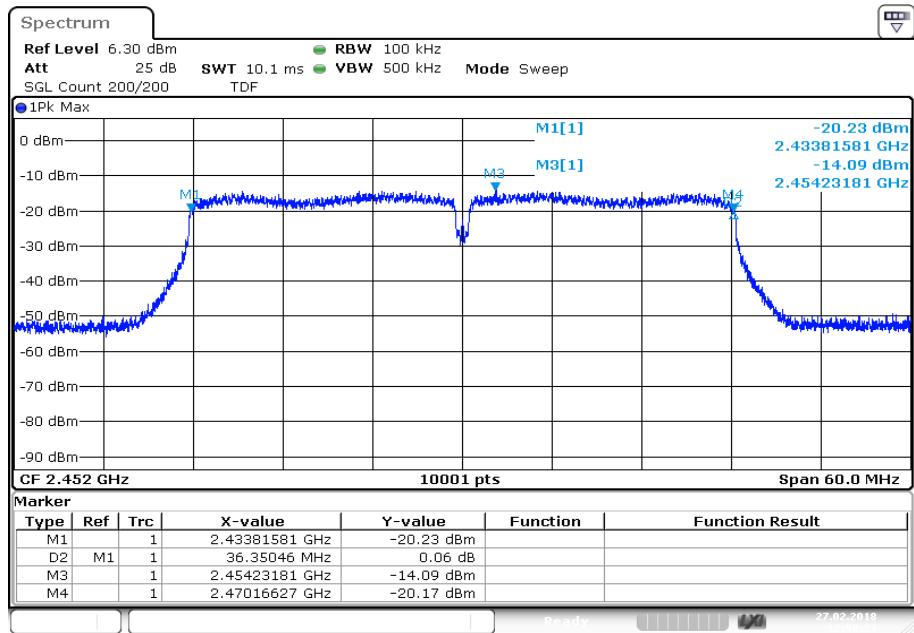
Plots: OFDM / n HT40 – mode

Plot 1: Lowest channel



Plot 2: Middle channel



Plot 3: Highest channel

Date: 27.FEB.2018 12:58:24

12.7 Occupied bandwidth – 99% emission bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	300 kHz
Video bandwidth	1 MHz
Span	30 MHz / 50 MHz
Measurement procedure	Measurement of the 99% bandwidth using the integration function of the analyzer
Trace mode	Single count with 200 counts
Test setup	See chapter 6.4 - A
Measurement uncertainty	See chapter 8

Usage:

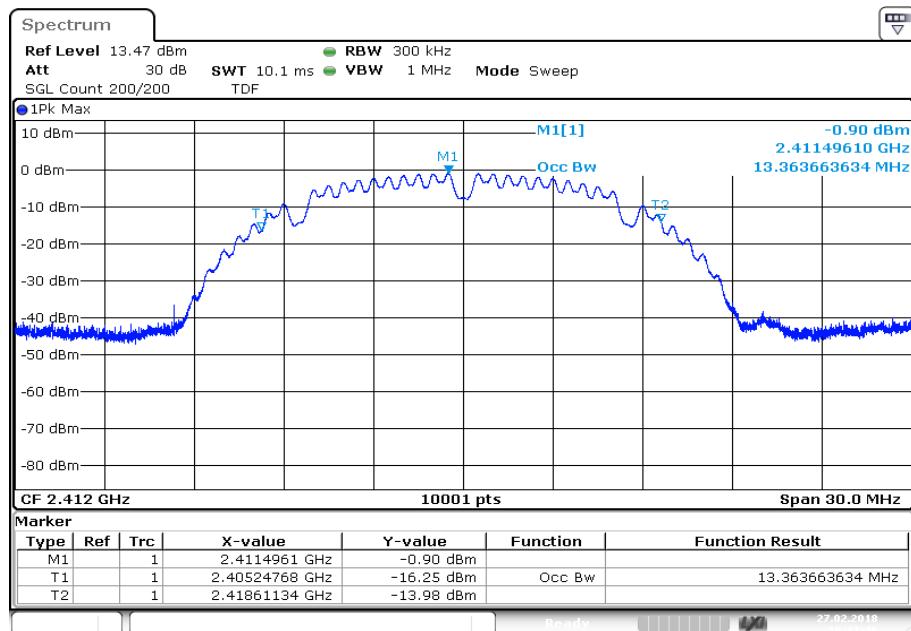
-/-	IC
OBW is necessary for Emission Designator	

Results:

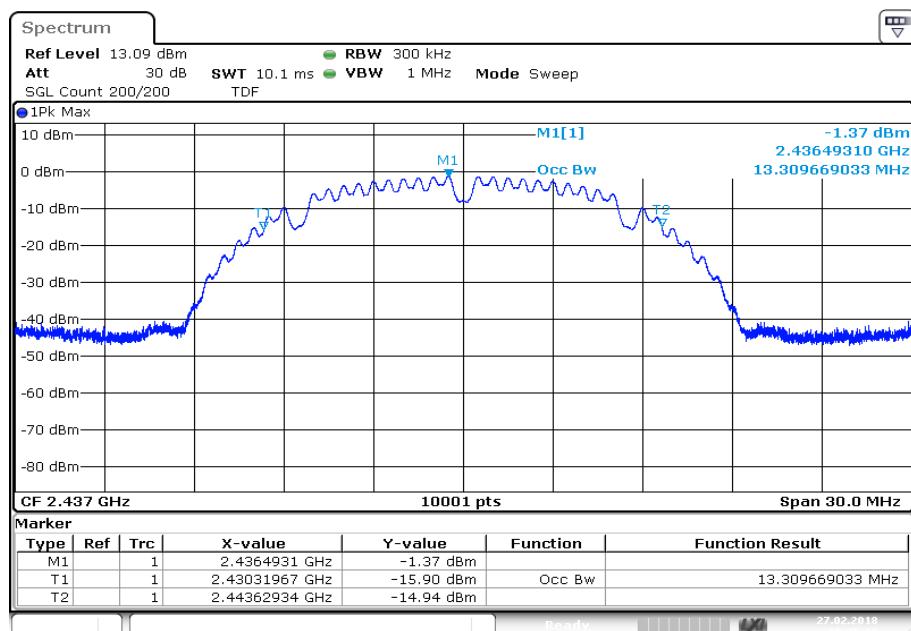
	99% emission bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	13364	13310	13277
OFDM / g – mode	16702	16708	16711
OFDM / n HT20 – mode	17674	17686	17677
OFDM / n HT40 – mode	36290	36302	36266

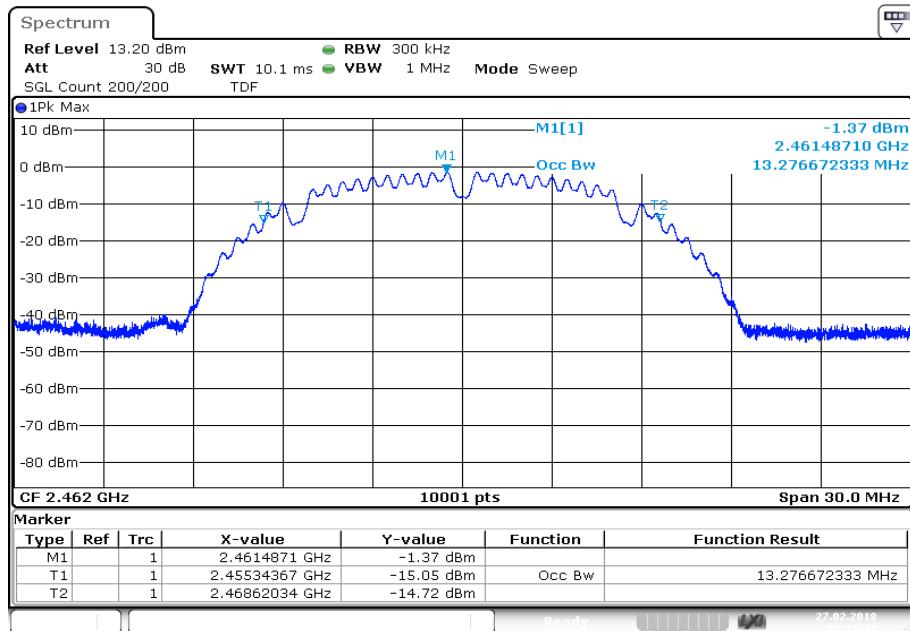
Plots: DSSS / b – mode

Plot 1: Lowest channel

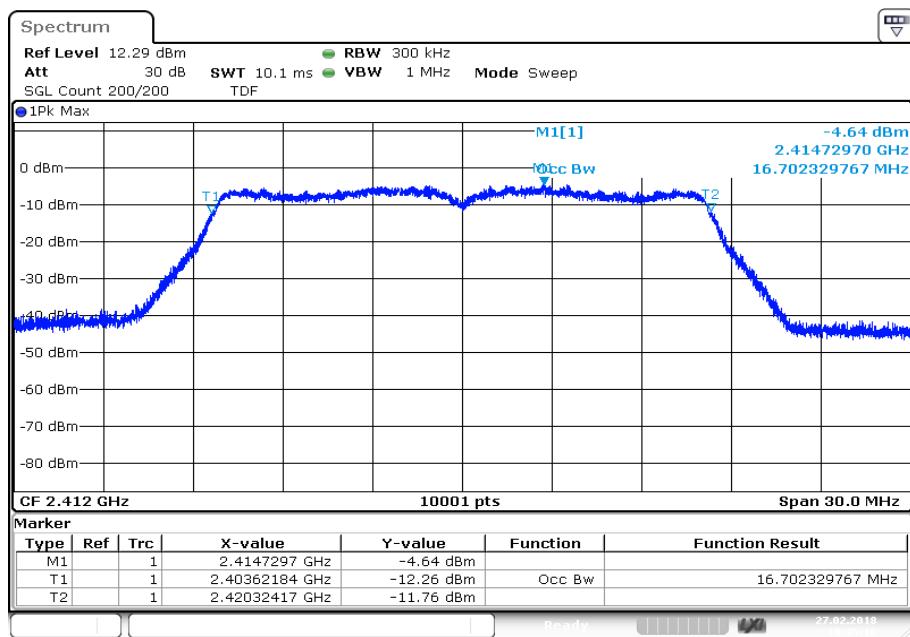
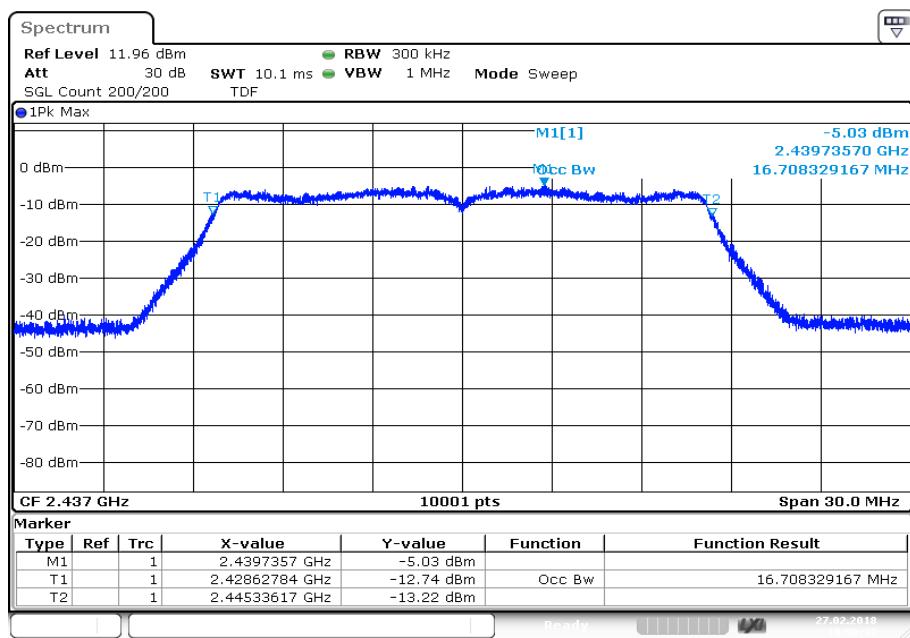


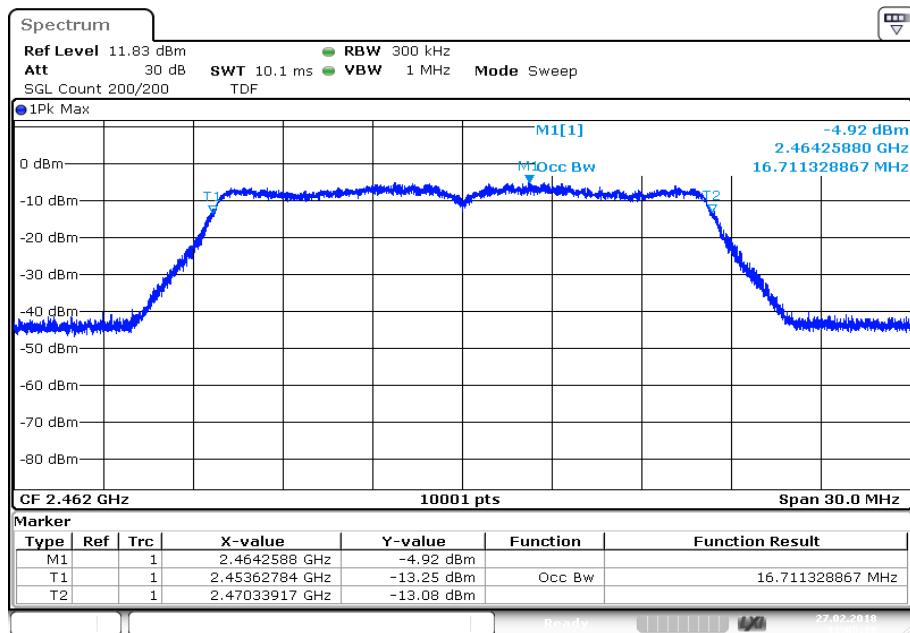
Plot 2: Middle channel



Plot 3: Highest channel


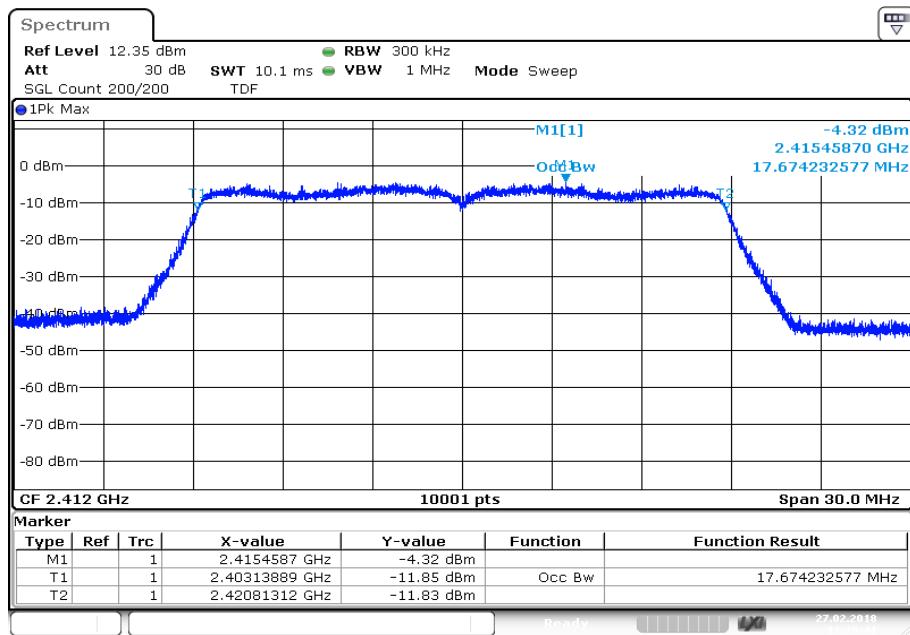
Plots: OFDM / g – mode

Plot 1: Lowest channel

Plot 2: Middle channel


Plot 3: Highest channel

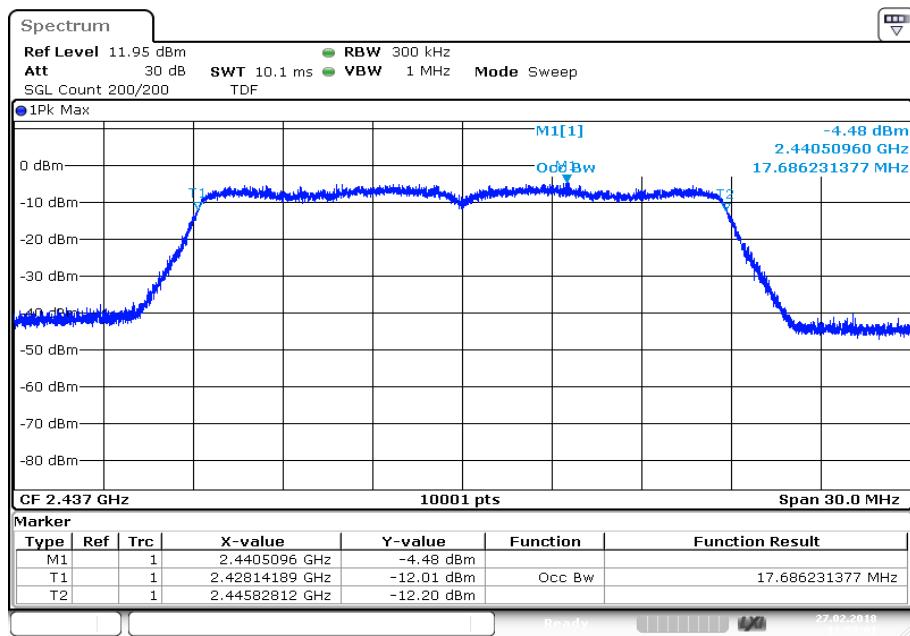
Plots: OFDM / n HT20 – mode

Plot 1: Lowest channel

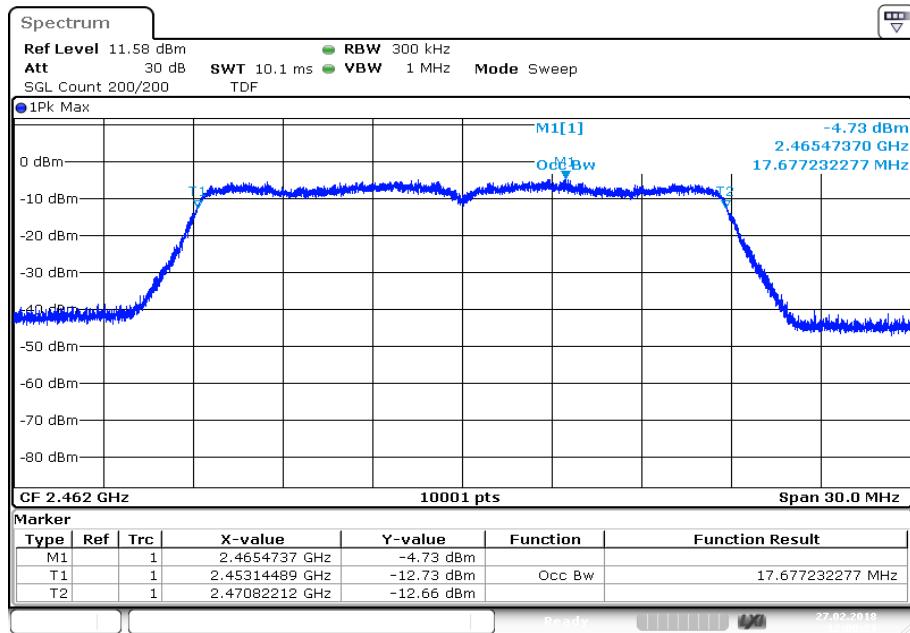


Date: 27.FEB.2018 11:26:41

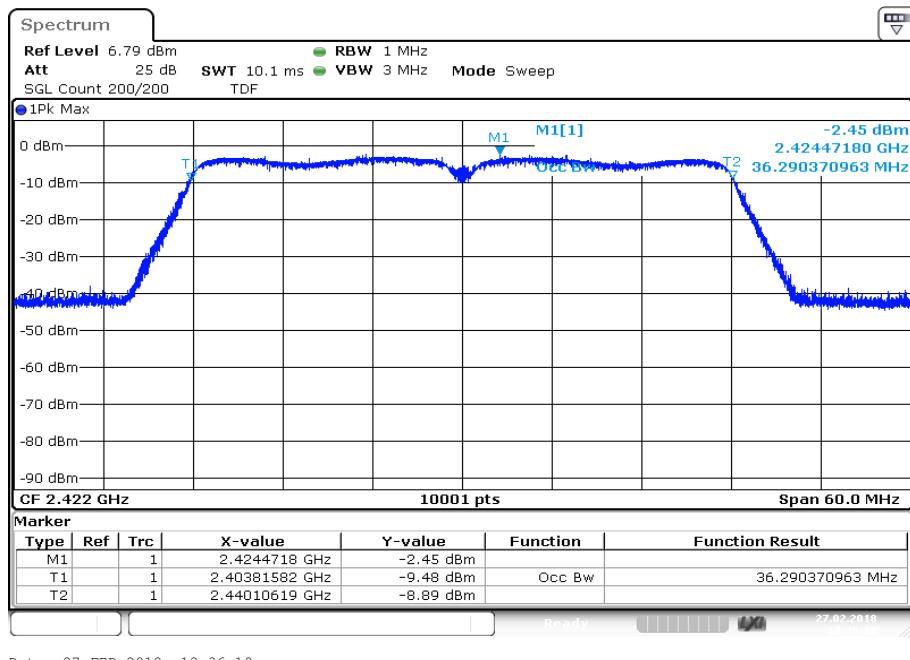
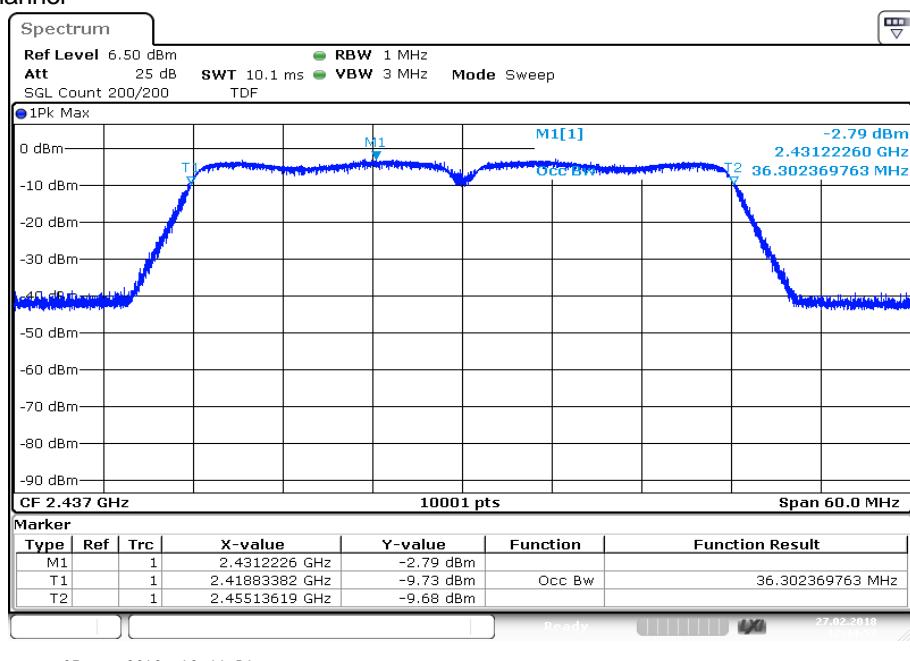
Plot 2: Middle channel



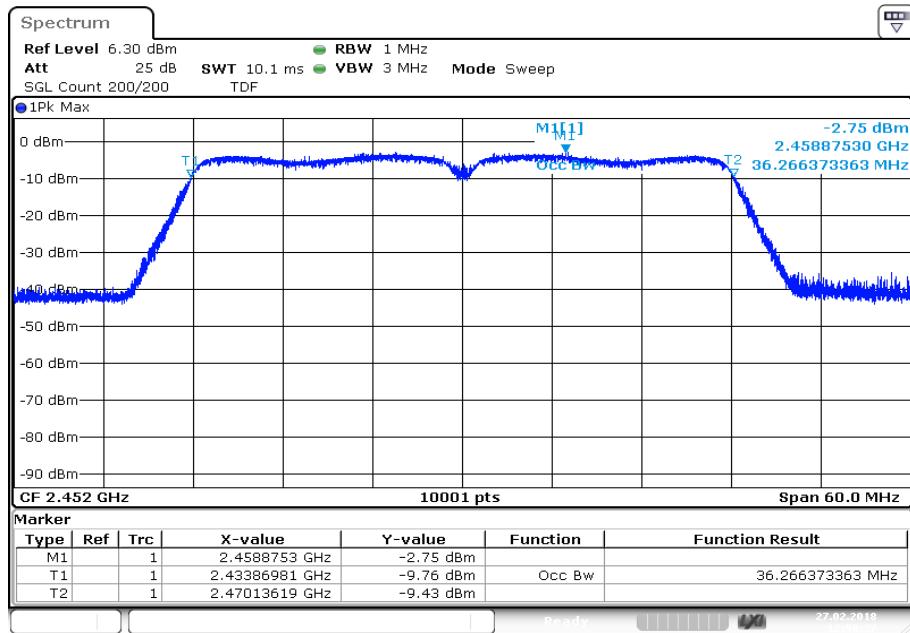
Date: 27.FEB.2018 11:53:02

Plot 3: Highest channel

Plots: OFDM / n HT40 – mode

Plot 1: Lowest channel

Plot 2: Middle channel


Plot 3: Highest channel



12.8 Occupied bandwidth – 20 dB bandwidth

Description:

Measurement of the 20 dB bandwidth of the modulated carrier.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with min. 200 counts
Test setup	See chapter 6.4 - A
Measurement uncertainty	See chapter 8

Usage:

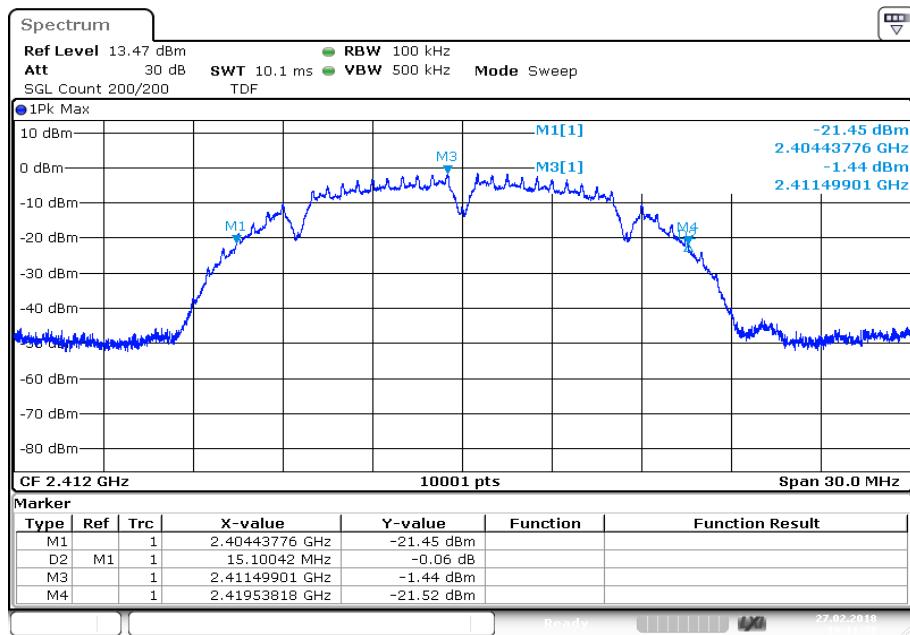
-/-	IC
Within the used band!	

Results:

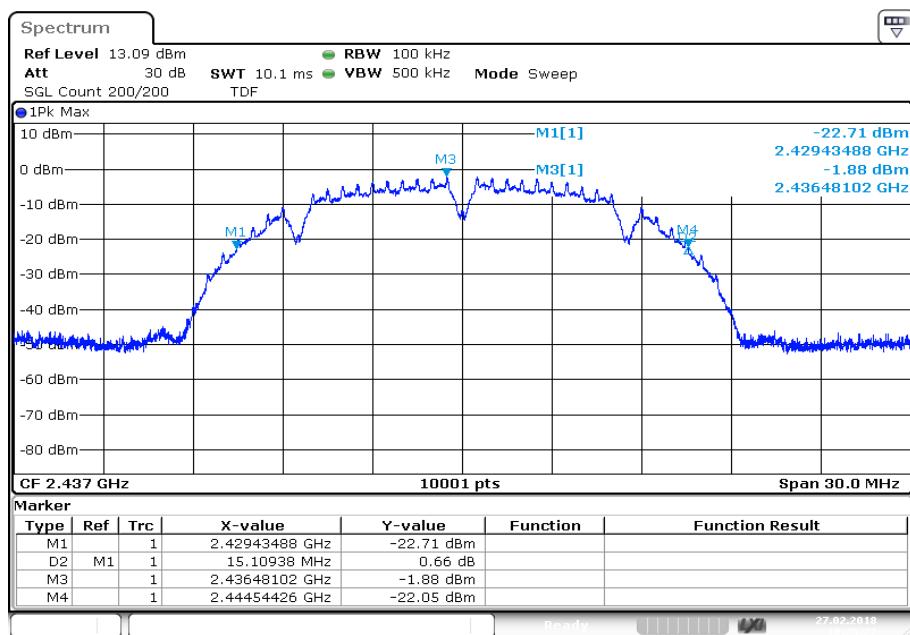
	20 dB bandwidth / MHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	15.100	15.109	15.109
OFDM / g – mode	18.076	18.061	18.037
OFDM / n HT20 – mode	18.811	18.832	18.787
OFDM / n HT40 – mode	37.802	37.604	37.916

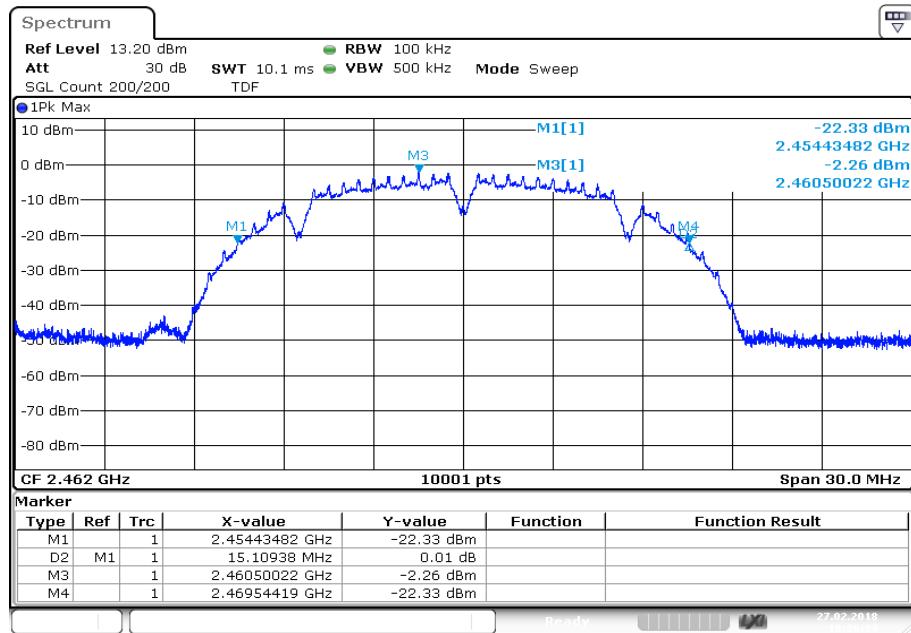
Plots: DSSS / b – mode

Plot 1: Lowest channel

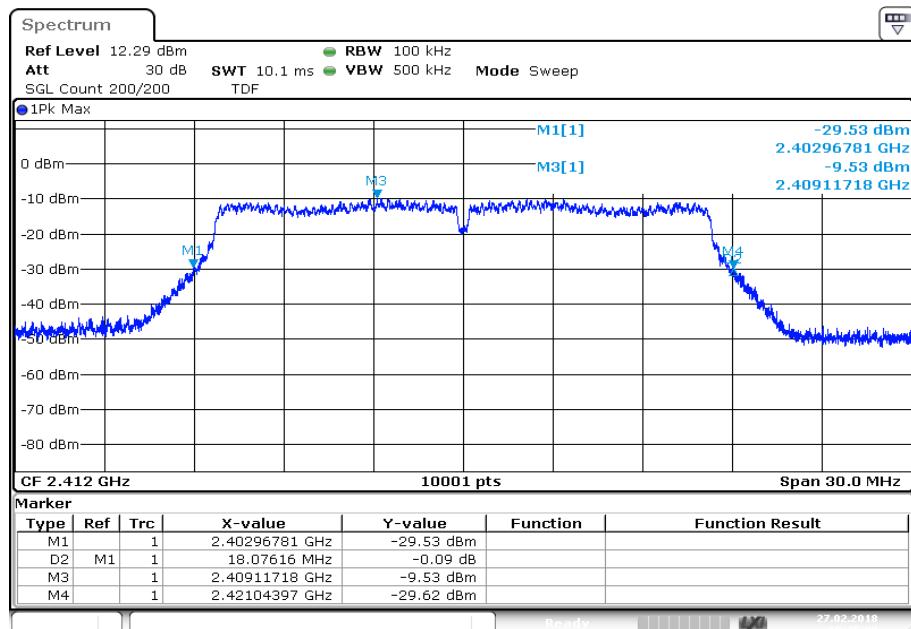
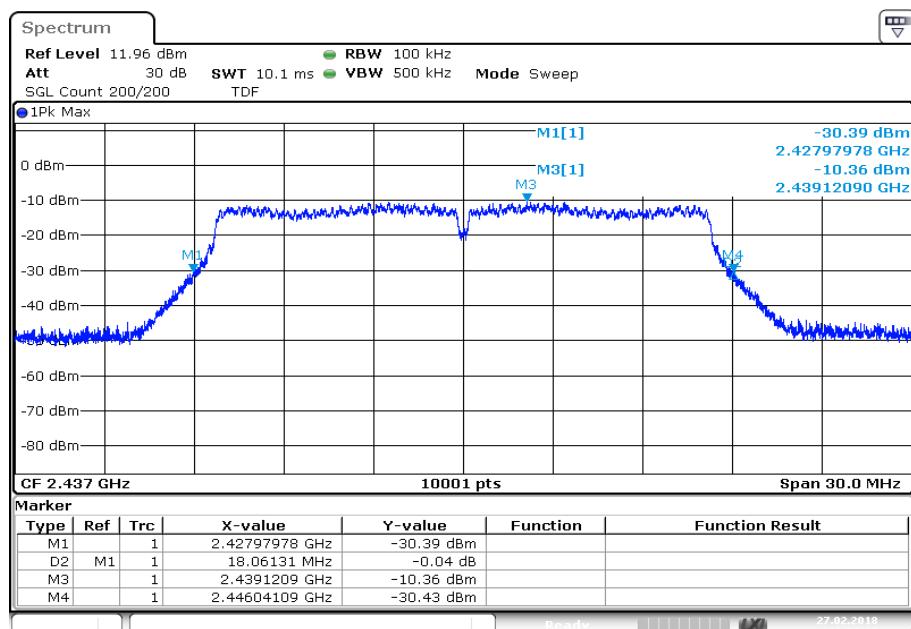


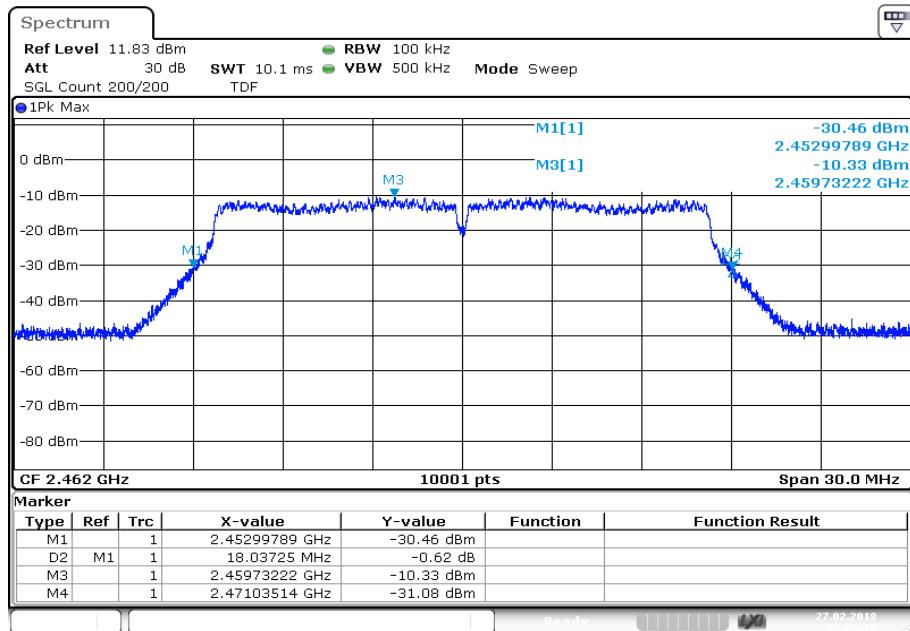
Plot 2: Middle channel



Plot 3: Highest channel


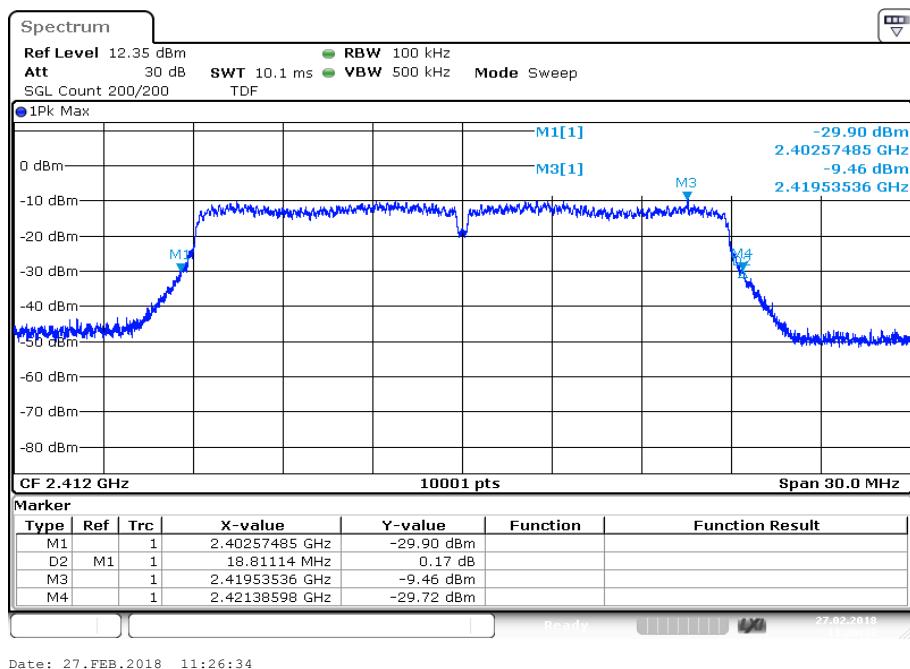
Plots: OFDM / g – mode

Plot 1: Lowest channel

Plot 2: Middle channel


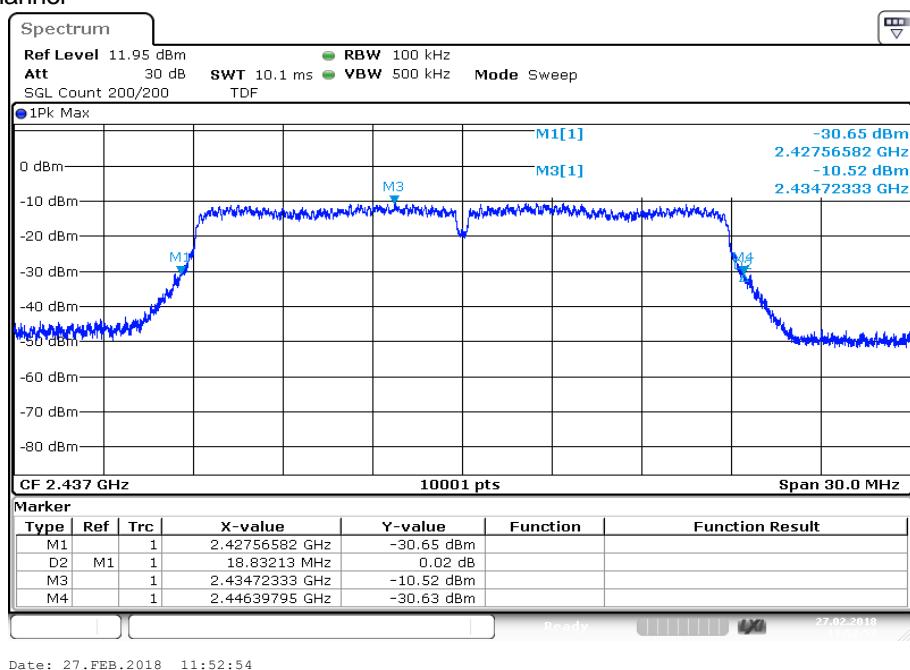
Plot 3: Highest channel

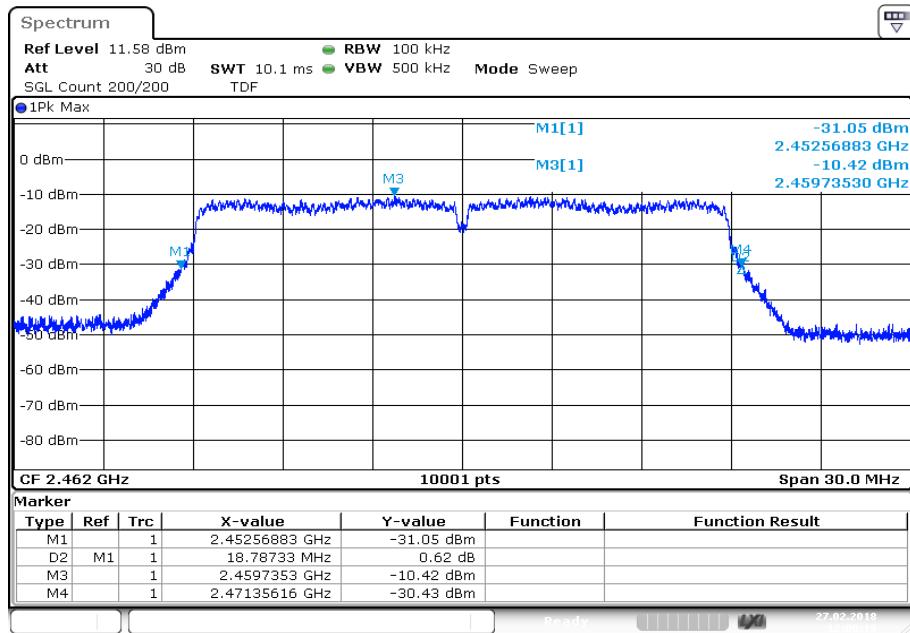
Plots: OFDM / n HT20 – mode

Plot 1: Lowest channel



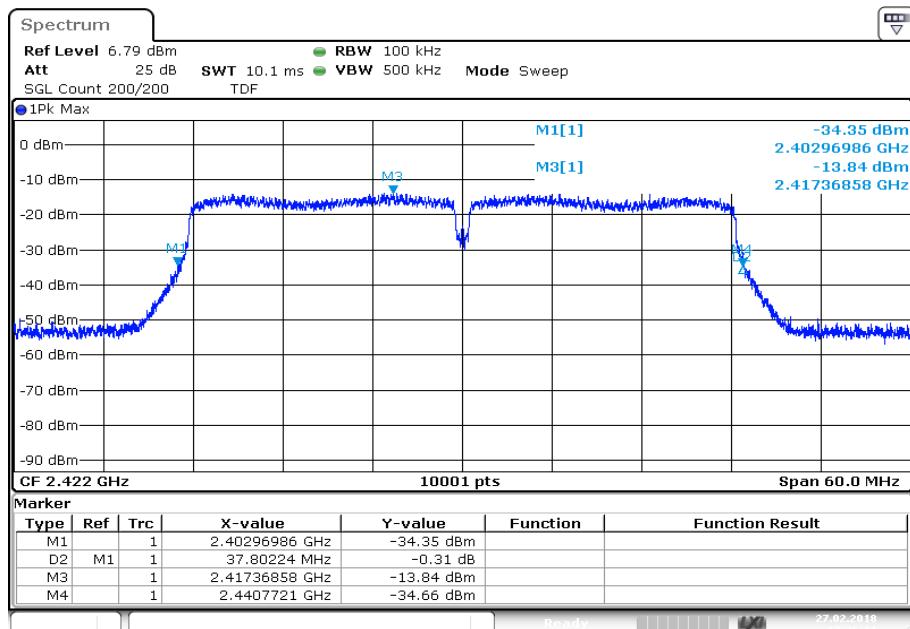
Plot 2: Middle channel



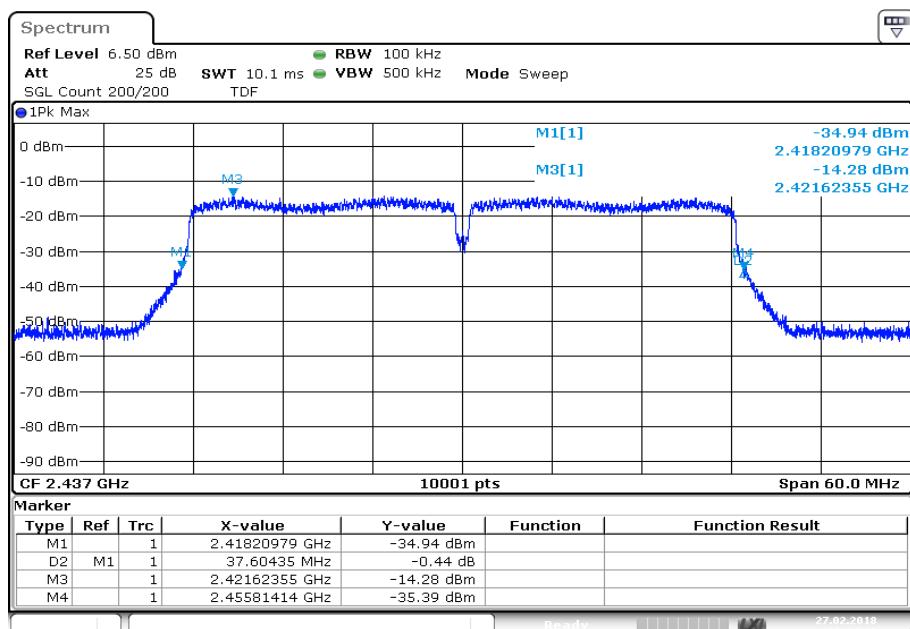
Plot 3: Highest channel

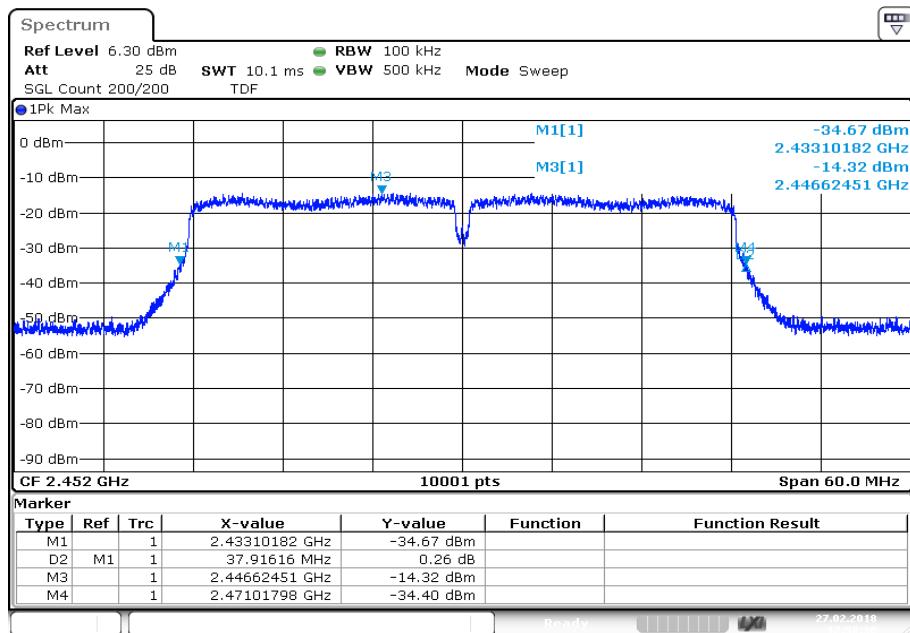
Plots: OFDM / n HT40 – mode

Plot 1: Lowest channel



Plot 2: Middle channel



Plot 3: Highest channel

Date: 27.FEB.2018 12:58:30

12.9 Band edge compliance conducted

Description:

Measurement of the radiated band edge compliance with a conducted test setup.

Measurement:

Measurement parameter for measurements	
According to DTS clause: 13.3.2 and clause 12.2.2	
Detector	RMS
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Span	2 MHz lower band edge 2388 MHz to 2390 MHz upper band edge 2483.5 MHz to 2485.5 MHz
Trace mode	Trace average with 200 counts
Test setup	See chapter 6.4 - A
Measurement uncertainty	See chapter 8

Limits:

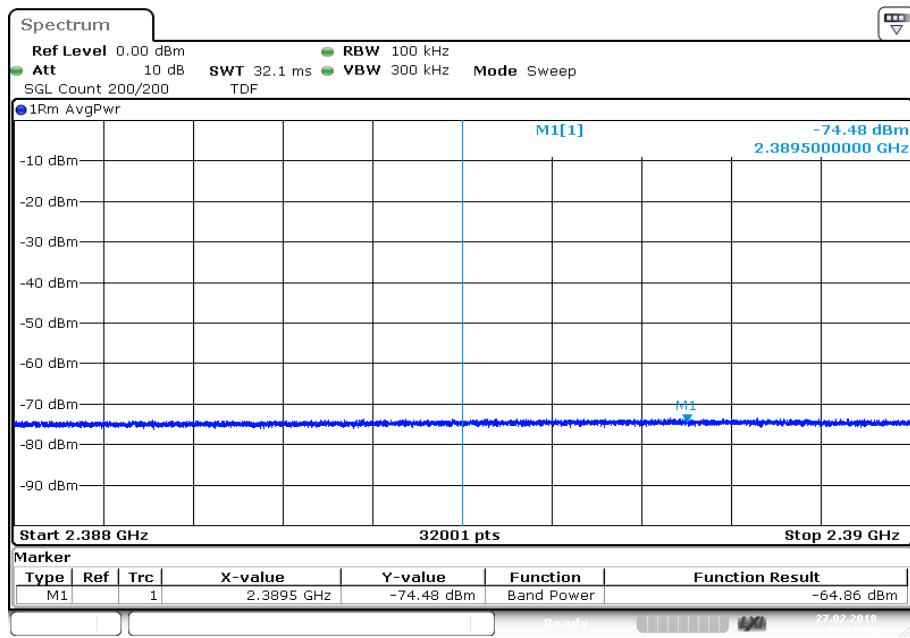
FCC	IC
-41.26 dBm	

Results:

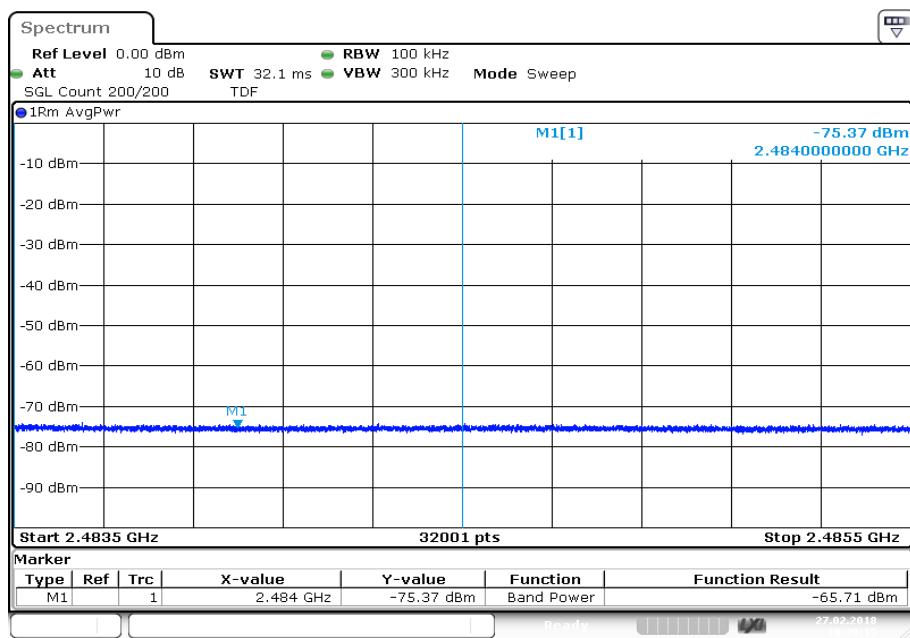
	band edge compliance / dBm (gain calculation)			
Modulation:	DSSS / b – mode	OFDM / g – mode	OFDM / n HT20 – mode	OFDM / n HT40 – mode
Max. lower band edge power conducted	-64.9	-56.2	-54.8	-57.0
Antenna gain / dBi	5.2			
Max. lower band edge power radiated	-59.7	-51.0	-49.6	-51.8
Max. upper band edge power conducted	-65.7	-57.1	-59.5	-55.9
Antenna gain / dBi	3.1			
Max. upper band edge power radiated	-62.6	-54.0	-56.4	-51.8

Plots: DSSS / b – mode

Plot 1: Lower band edge

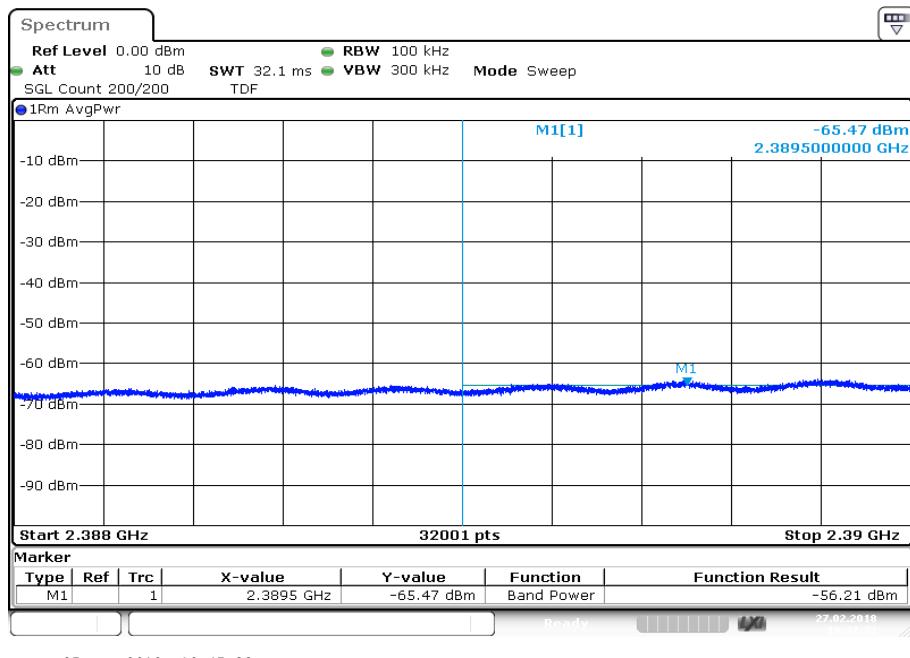


Plot 2: Upper band edge

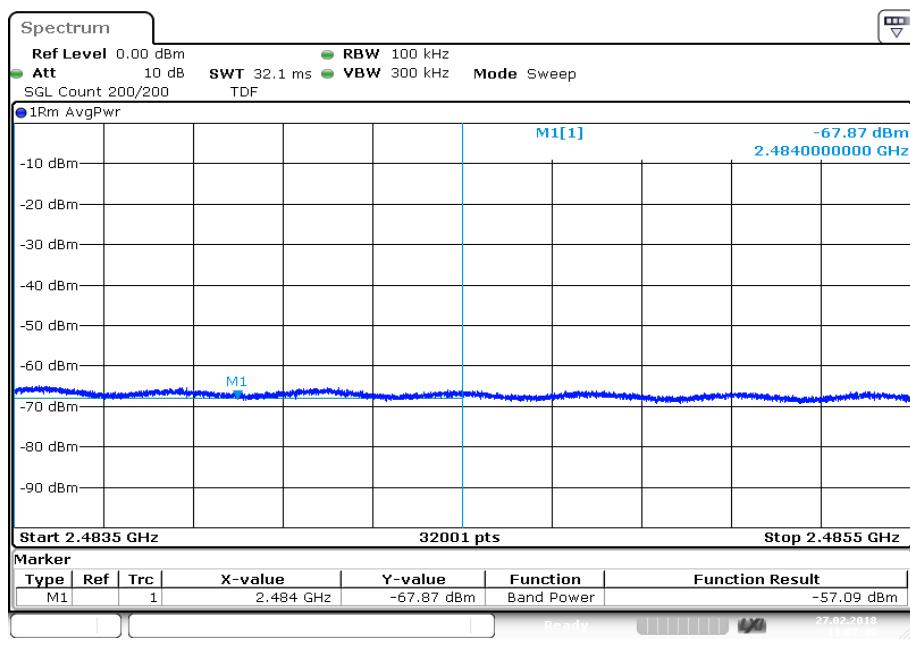


Plots: OFDM / g – mode

Plot 1: Lower band edge

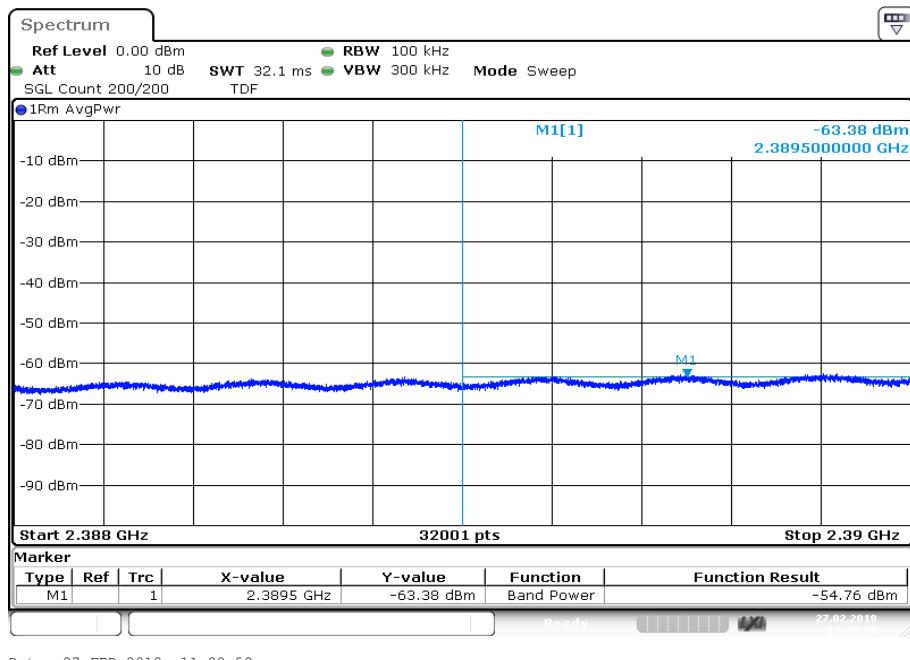


Plot 2: Upper band edge

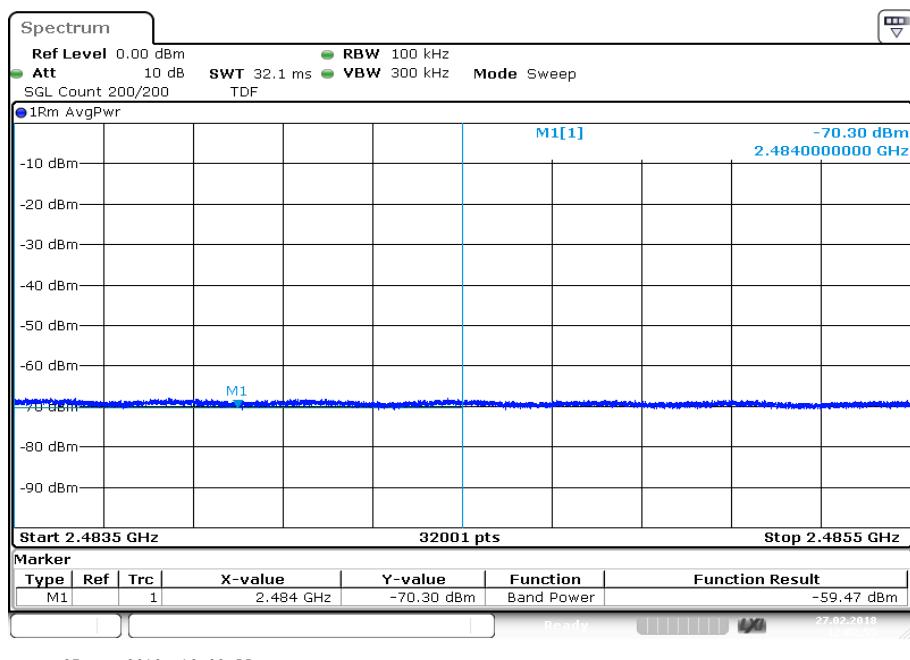


Plots: OFDM / n HT20 – mode

Plot 1: Lower band edge

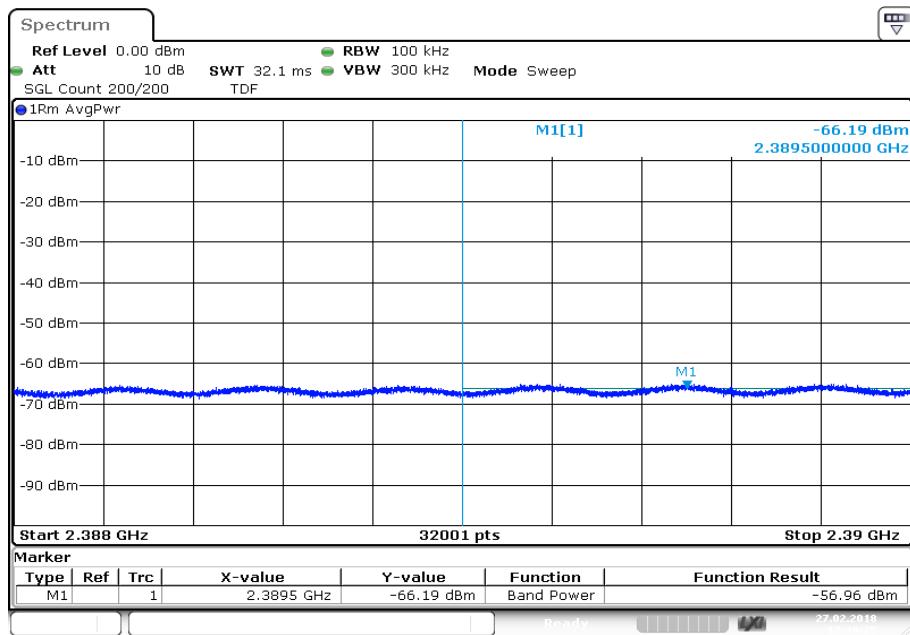


Plot 2: Upper band edge

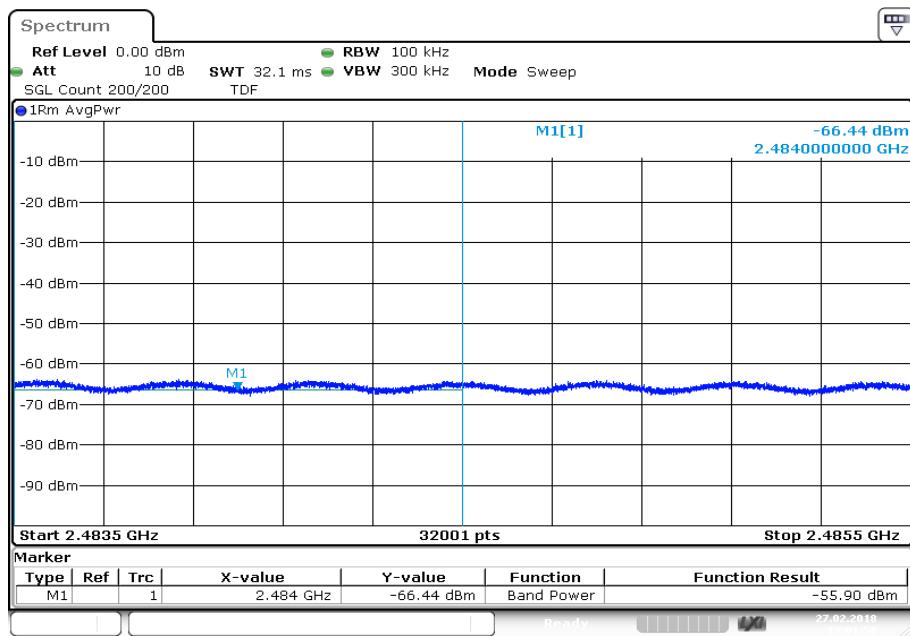


Plots: OFDM / n HT40 – mode

Plot 1: Lower band edge



Plot 2: Upper band edge



12.10 Spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at the lowest; the middle and the highest channel. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	9 kHz to 25 GHz
Trace mode	Max Hold
Test setup	See chapter 6.4 - A
Measurement uncertainty	See chapter 8

Limits:

FCC	IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

Results: DSSS / b – mode

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		-2.3	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		-3.0	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		-2.4	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant

Results: OFDM / g – mode

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		-10.5	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		-11.2	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		-10.6	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant

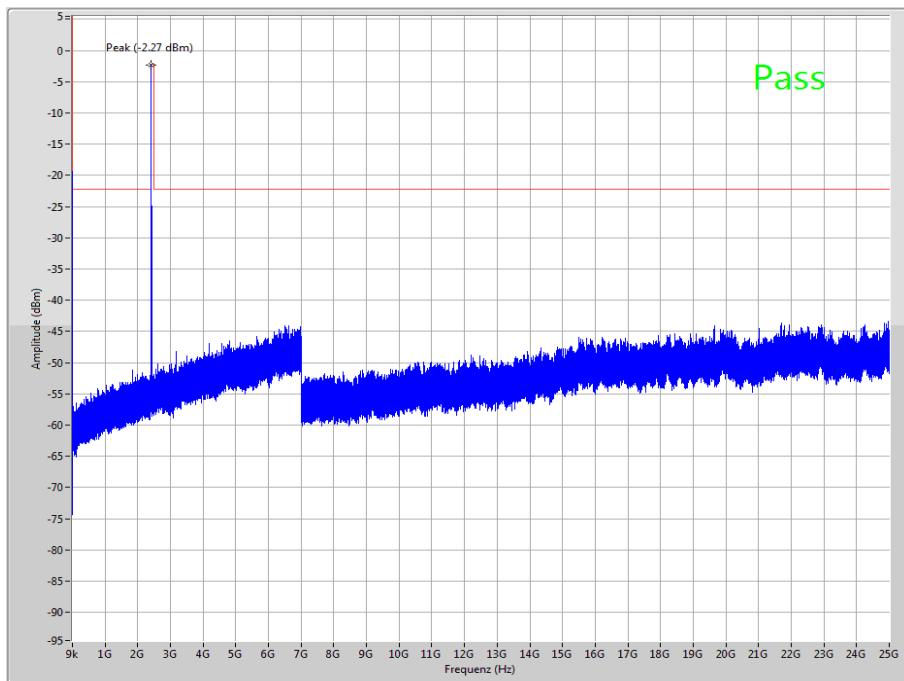
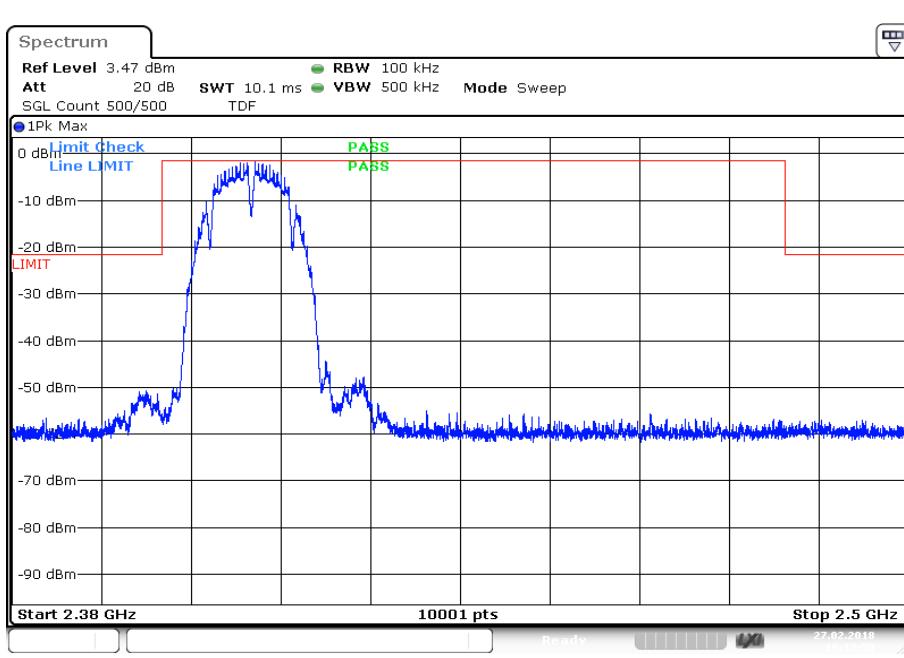
Results: OFDM / n HT20 – mode

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		-10.7	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		-10.6	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		-11.4	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant

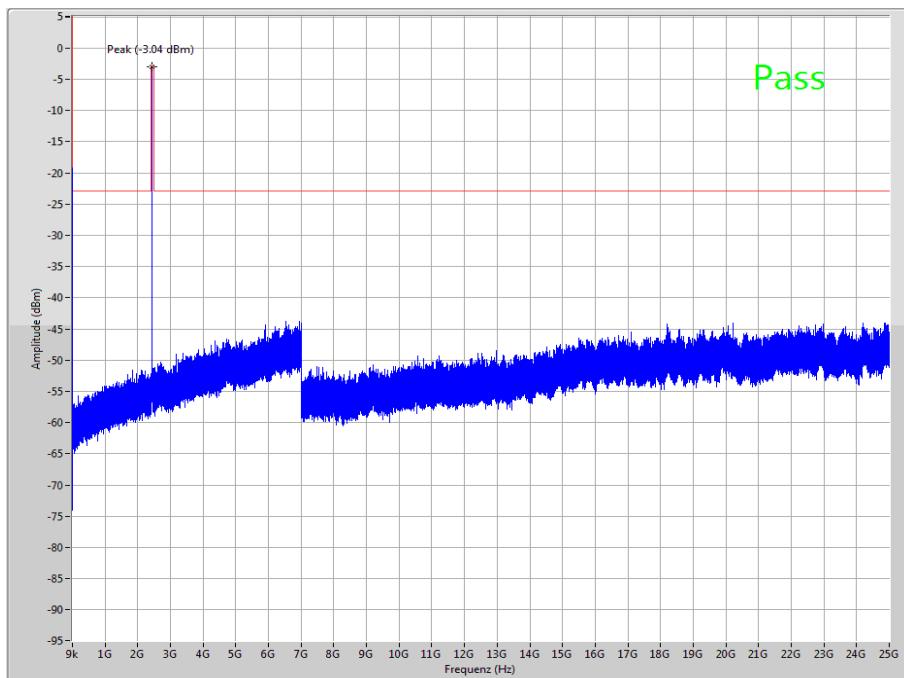
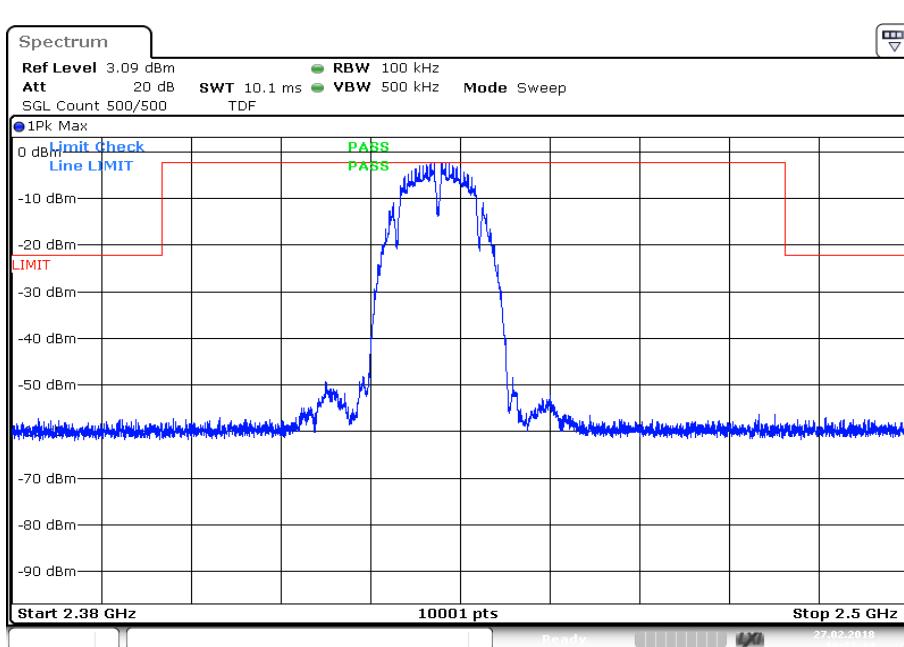
Results: OFDM / n HT40 – mode

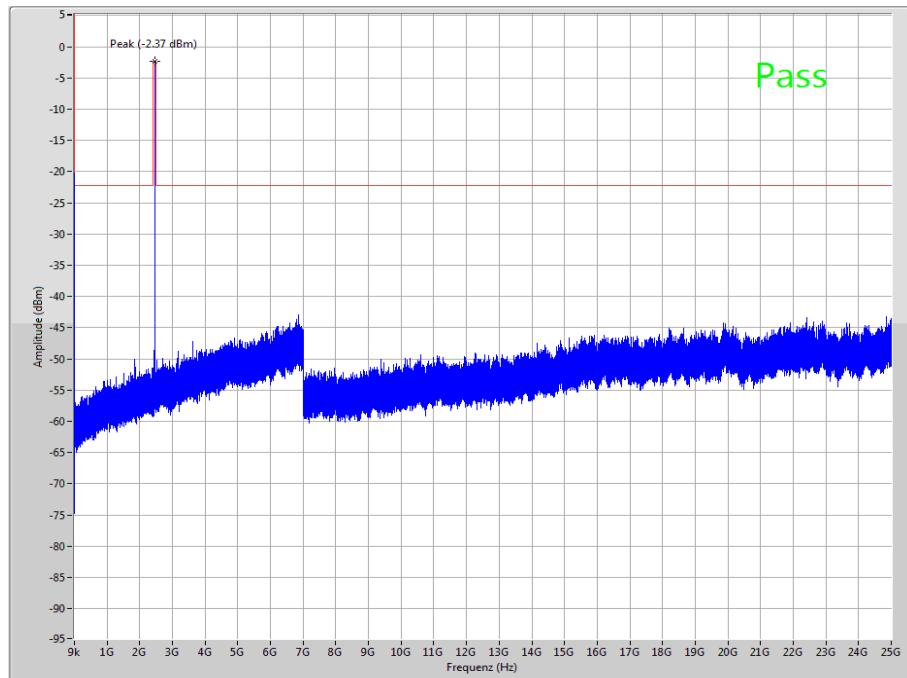
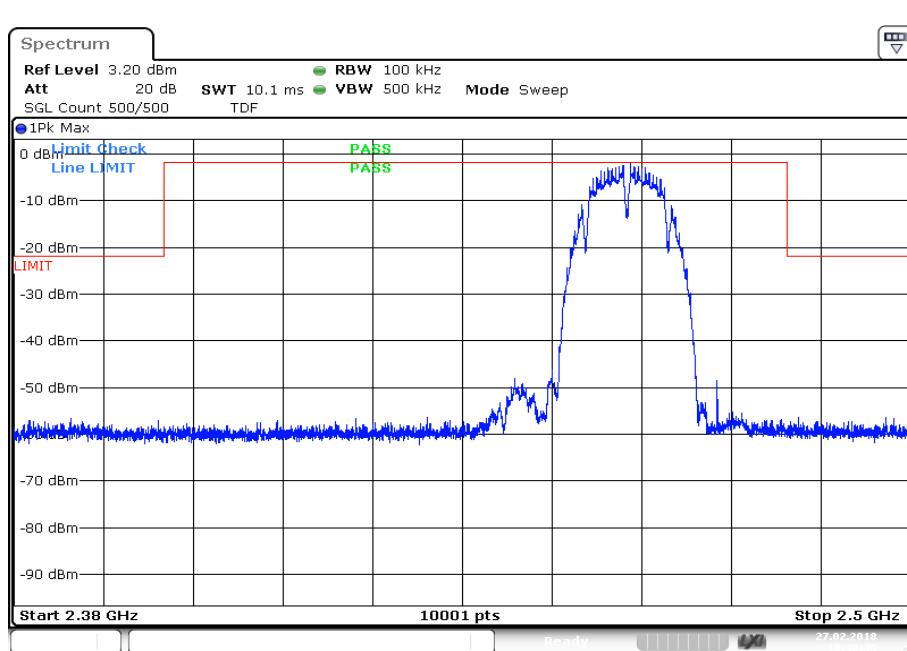
TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		-14.2	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		-14.5	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		-14.9	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant

Plots: DSSS / b – mode

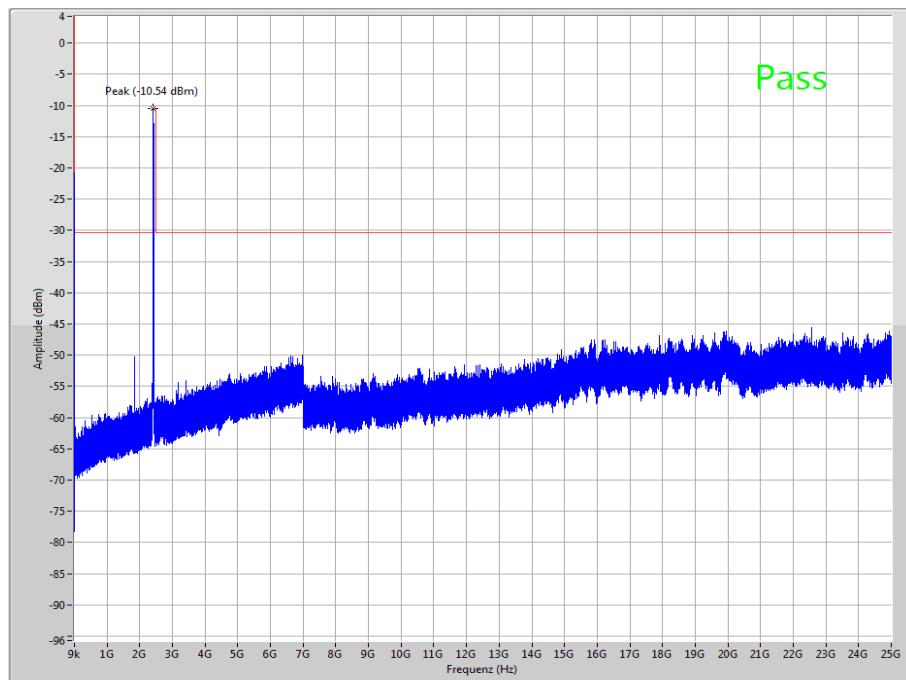
Plot 1: Lowest channel, up to 25 GHz

Plot 2: Lowest channel, zoomed carrier


Date: 27.FEB.2018 10:13:50

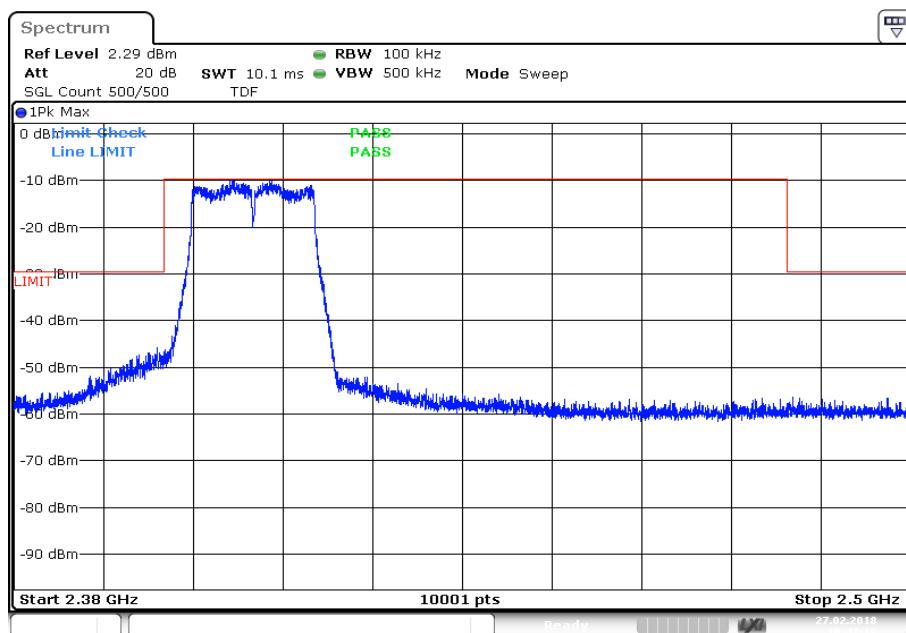
Plot 3: Middle channel, up to 25 GHz**Plot 4:** Middle channel, zoomed carrier

Plot 5: Highest channel, up to 25 GHz**Plot 6:** Highest channel, zoomed carrier

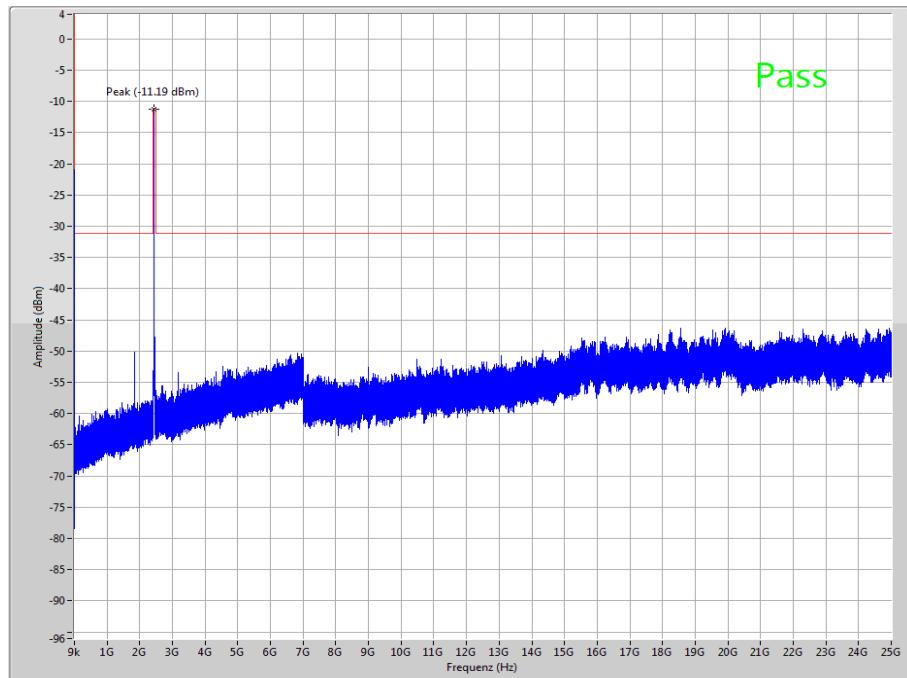
Plots: OFDM / g – mode

Plot 1: Lowest channel, up to 25 GHz


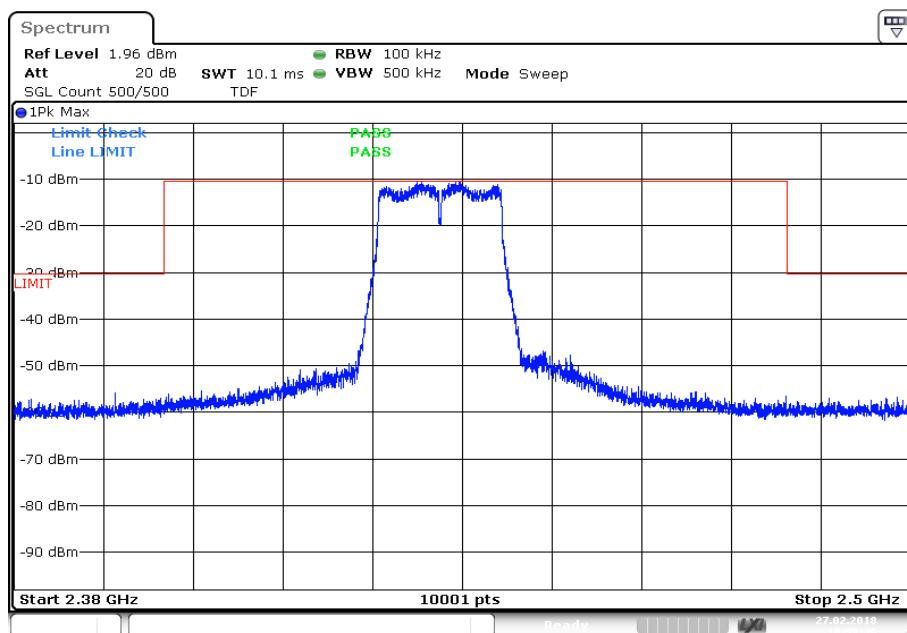
The peak at the beginning of the plot is the LO from the SA.

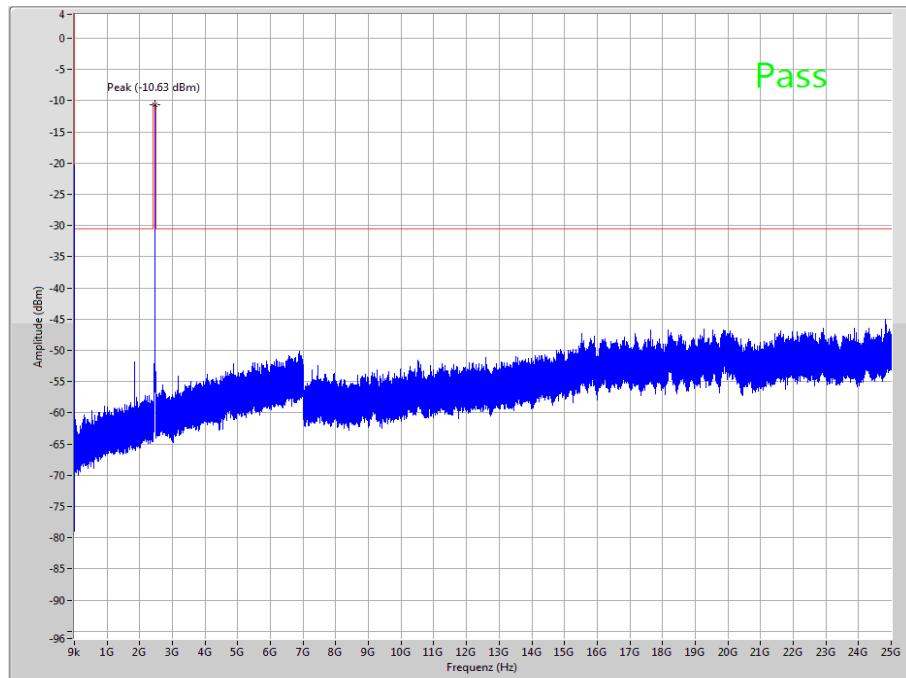
Plot 2: Lowest channel, zoomed carrier


Date: 27.FEB.2018 10:47:18

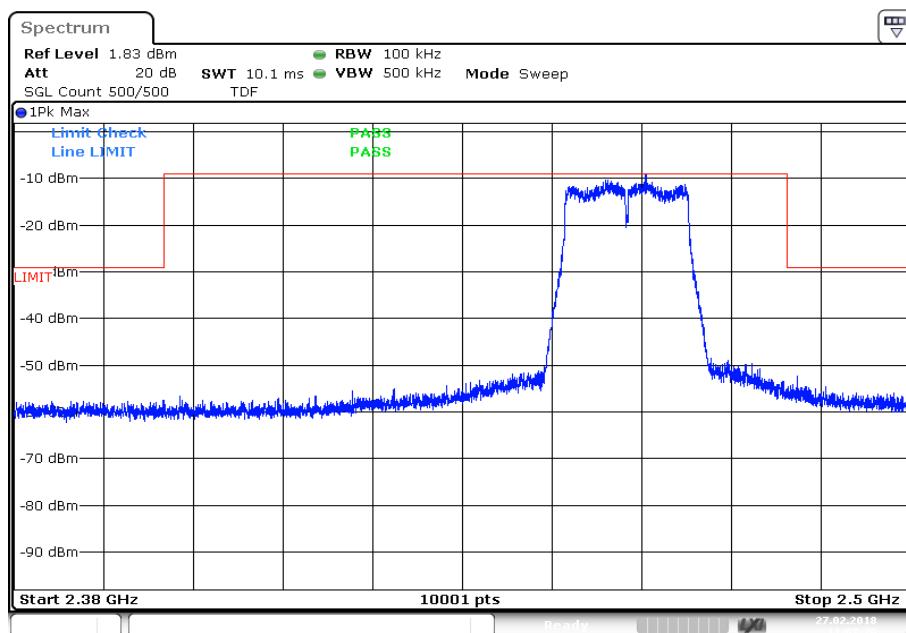
Plot 3: Middle channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.

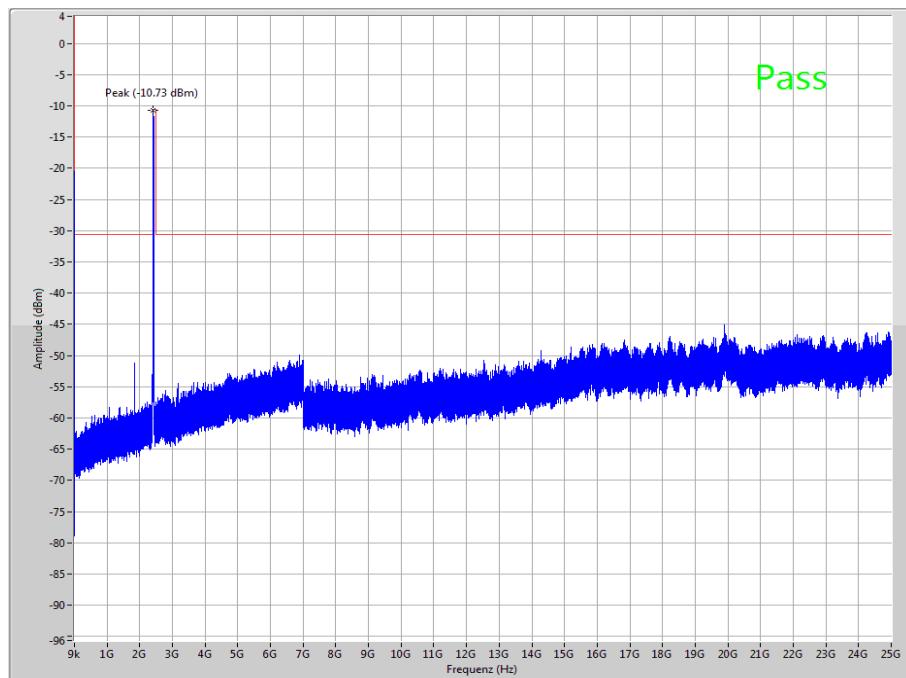
Plot 4: Middle channel, zoomed carrier

Plot 5: Highest channel, up to 25 GHz

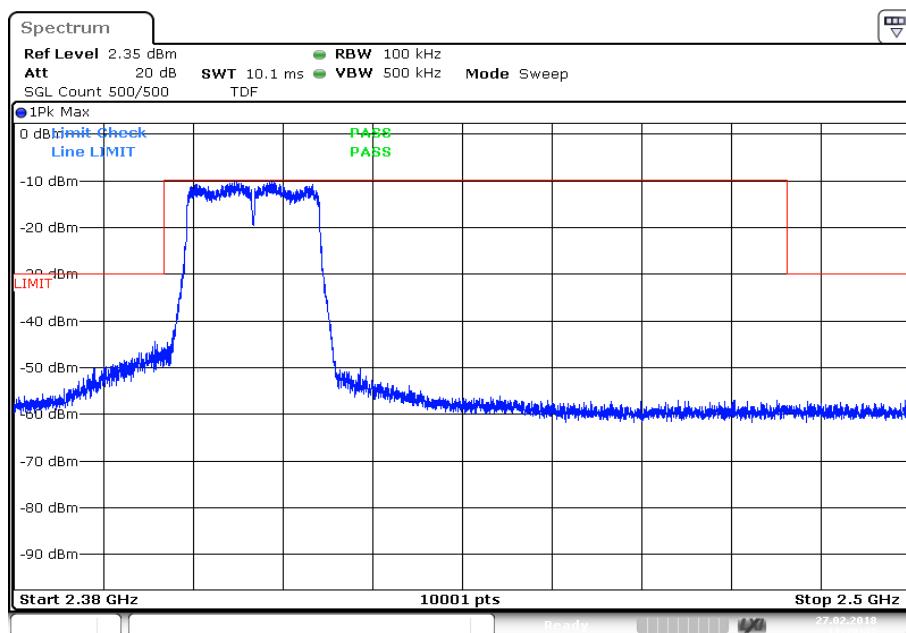
The peak at the beginning of the plot is the LO from the SA.

Plot 6: Highest channel, zoomed carrier

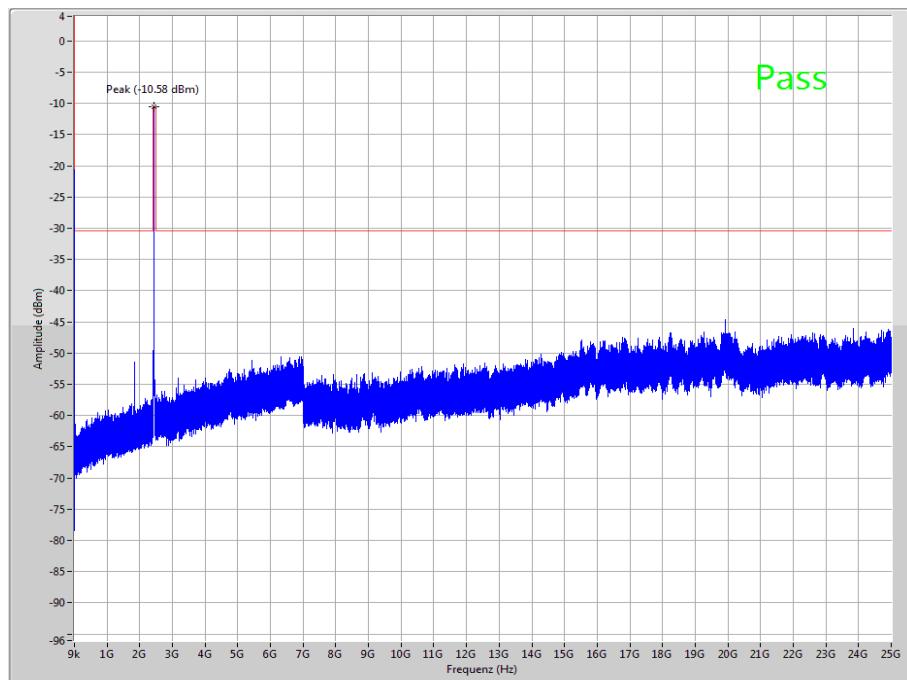
Plots: OFDM / n HT 20 – mode

Plot 1: Lowest channel, up to 25 GHz


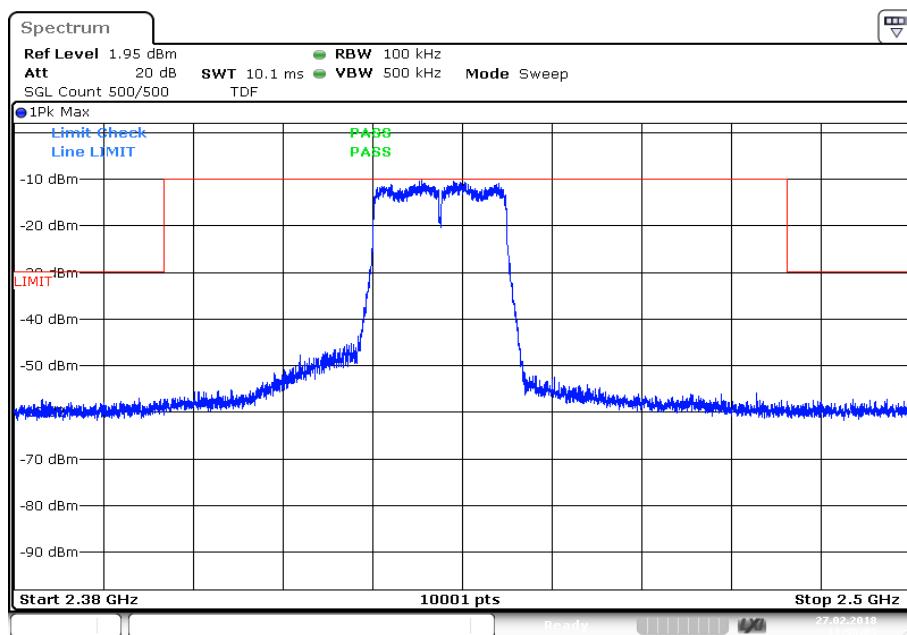
The peak at the beginning of the plot is the LO from the SA.

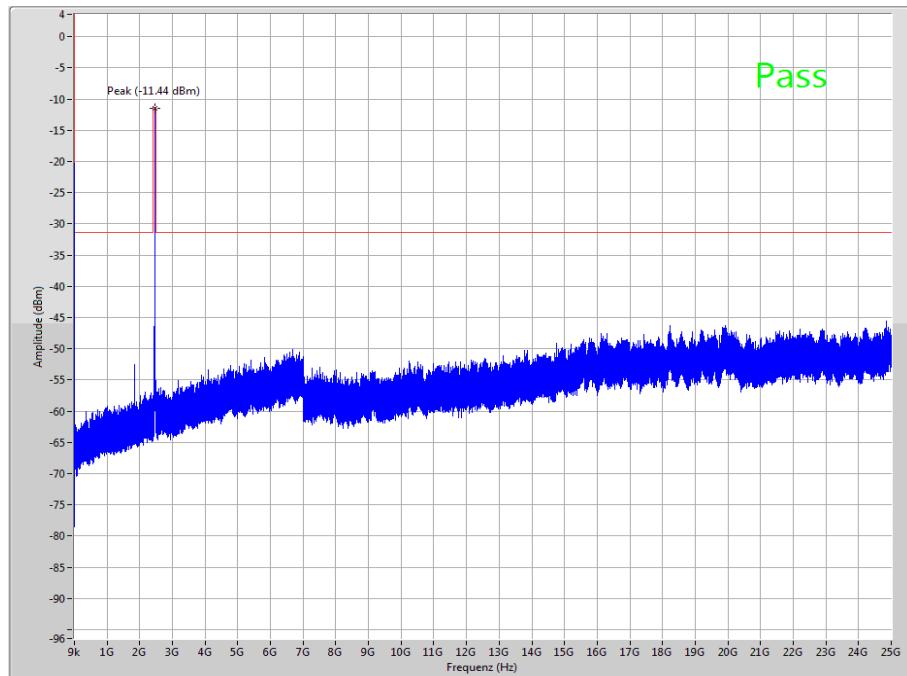
Plot 2: Lowest channel, zoomed carrier


Date: 27.FEB.2018 11:28:43

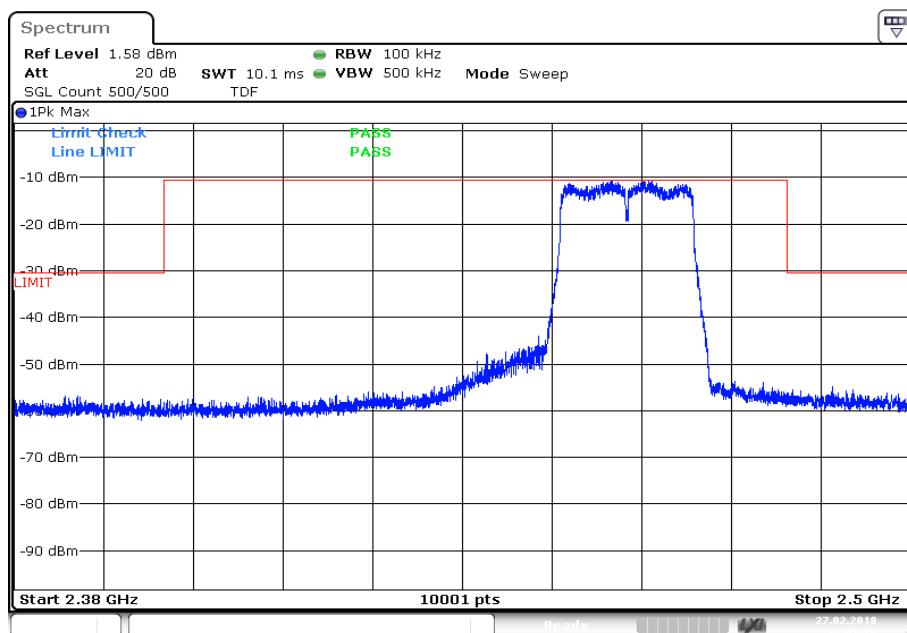
Plot 3: Middle channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.

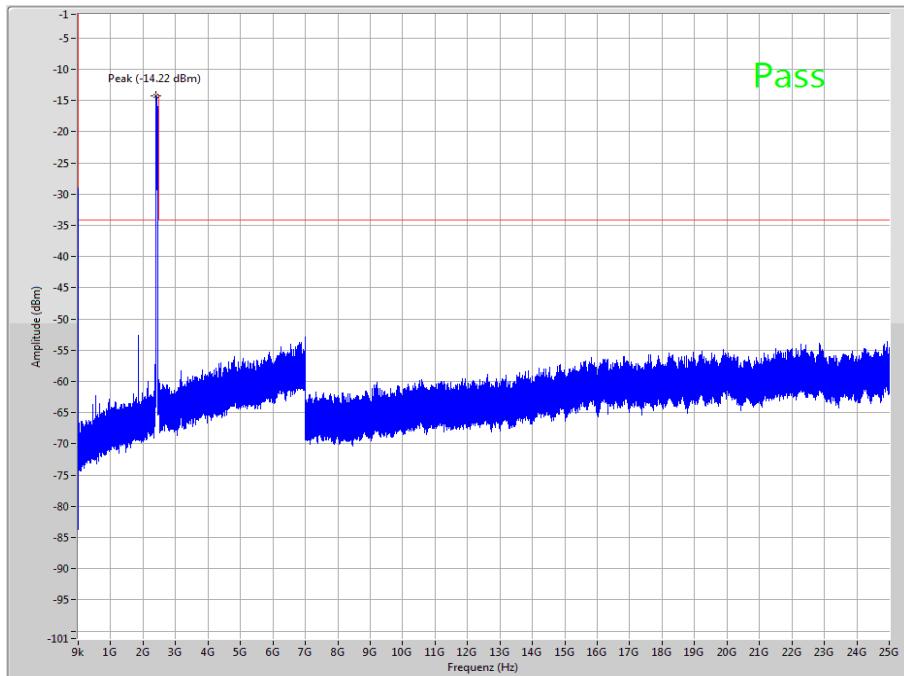
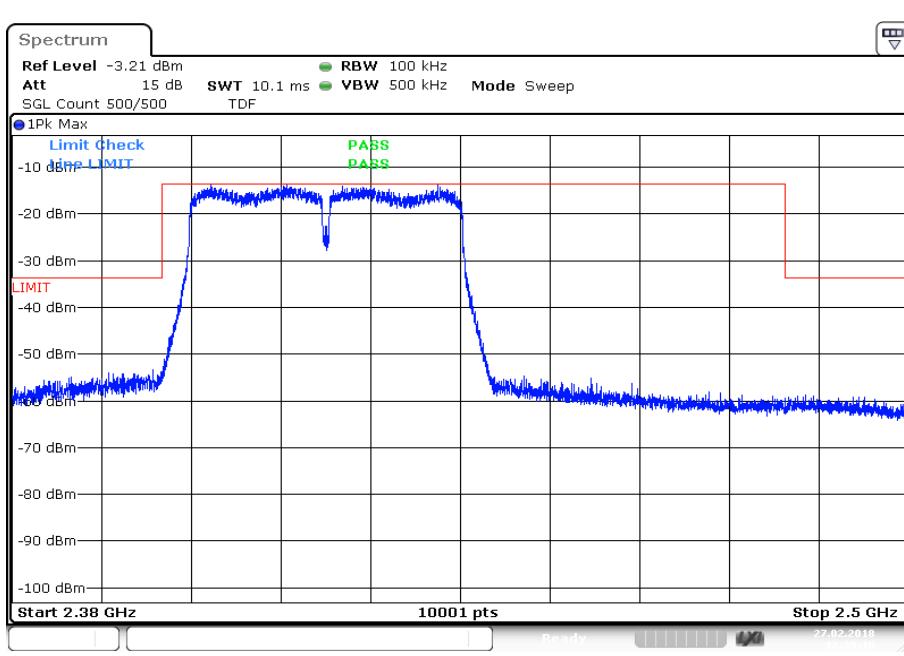
Plot 4: Middle channel, zoomed carrier

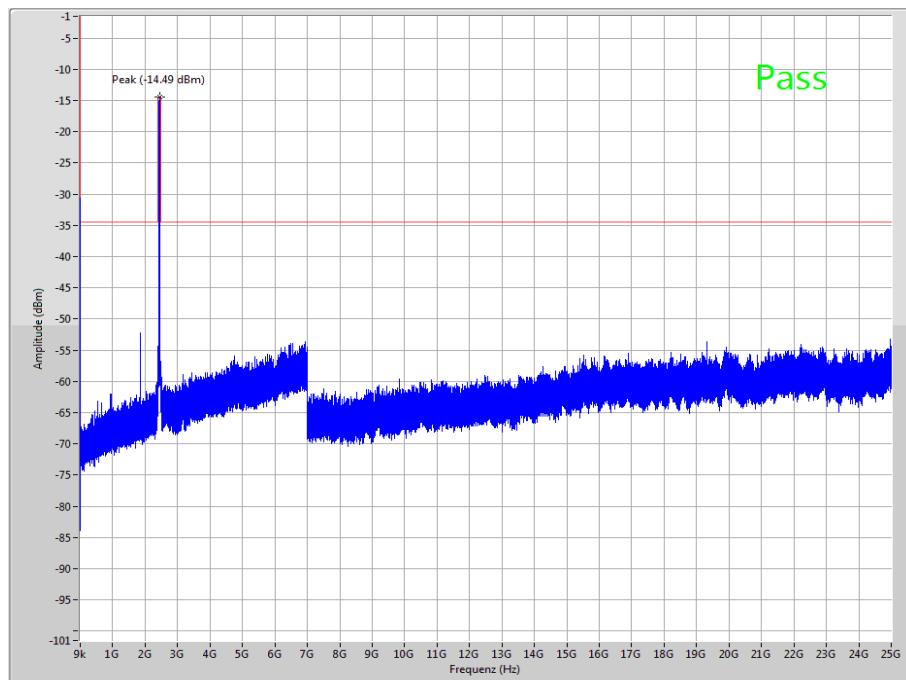
Plot 5: Highest channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.

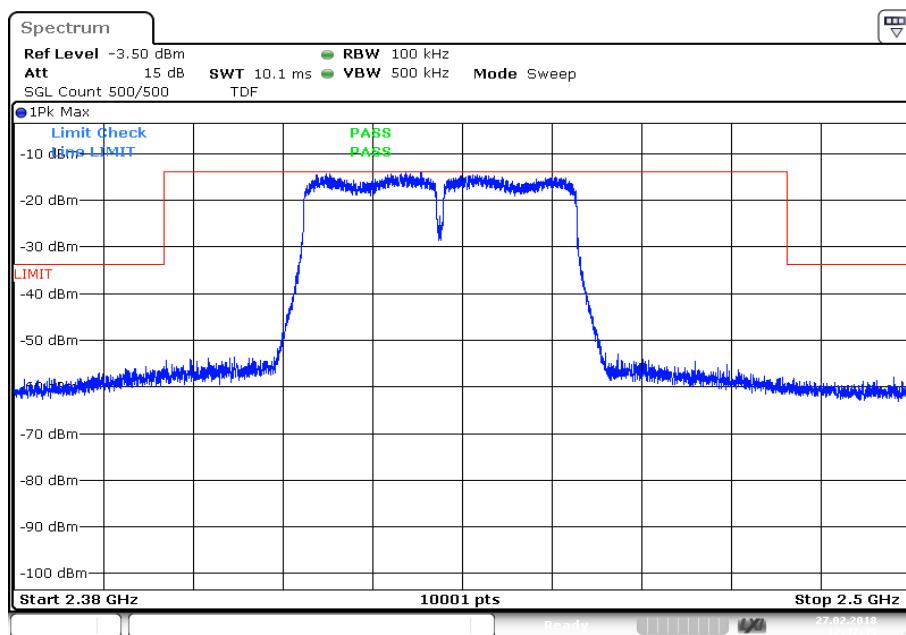
Plot 6: Highest channel, zoomed carrier

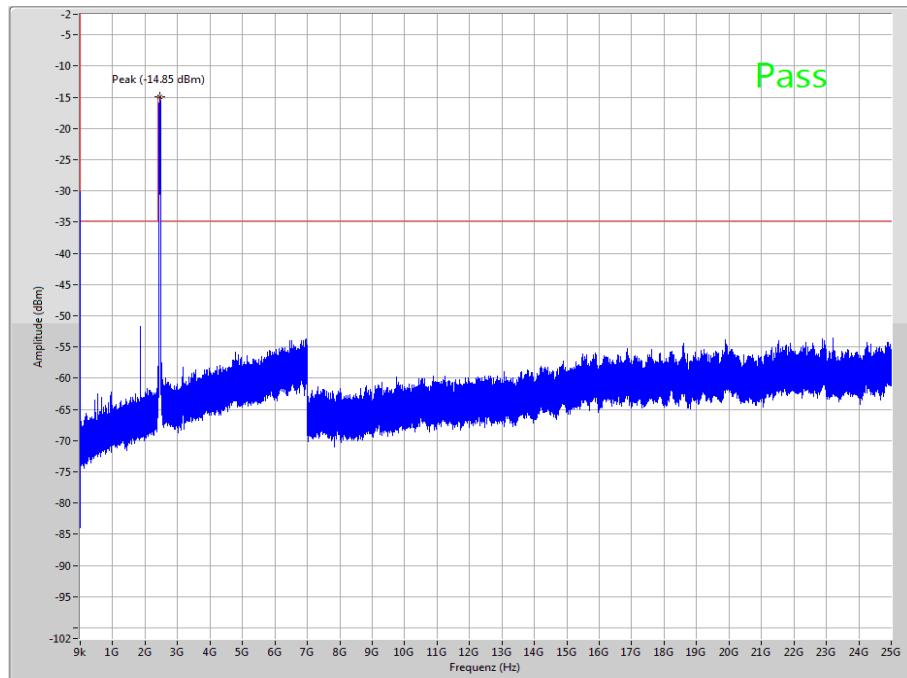
Plots: OFDM / n HT 40 – mode

Plot 1: Lowest channel, up to 25 GHz

Plot 2: Lowest channel, zoomed carrier


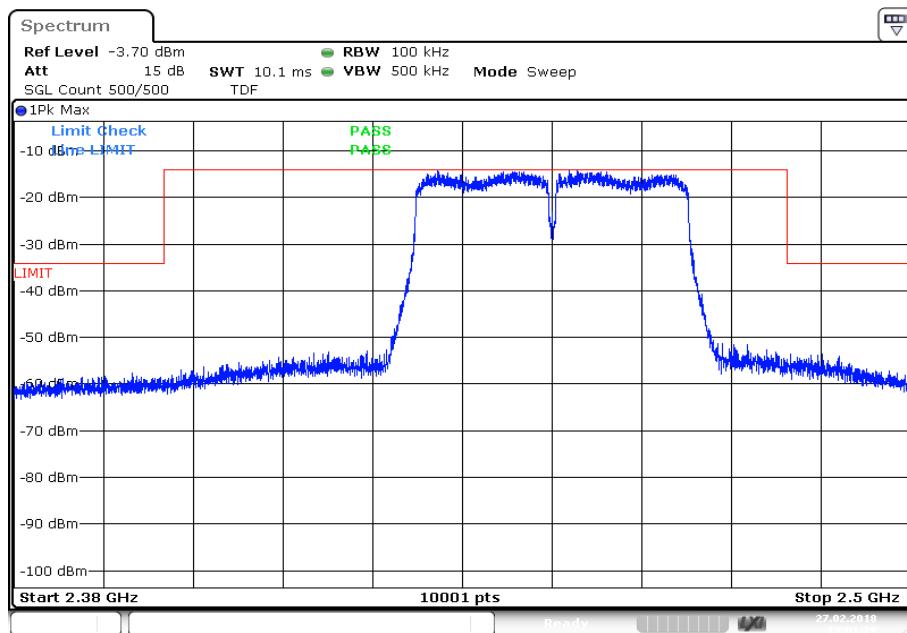
Plot 3: Middle channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.

Plot 4: Middle channel, zoomed carrier

Plot 5: Highest channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.

Plot 6: Highest channel, zoomed carrier

12.11 Spurious emissions radiated below 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

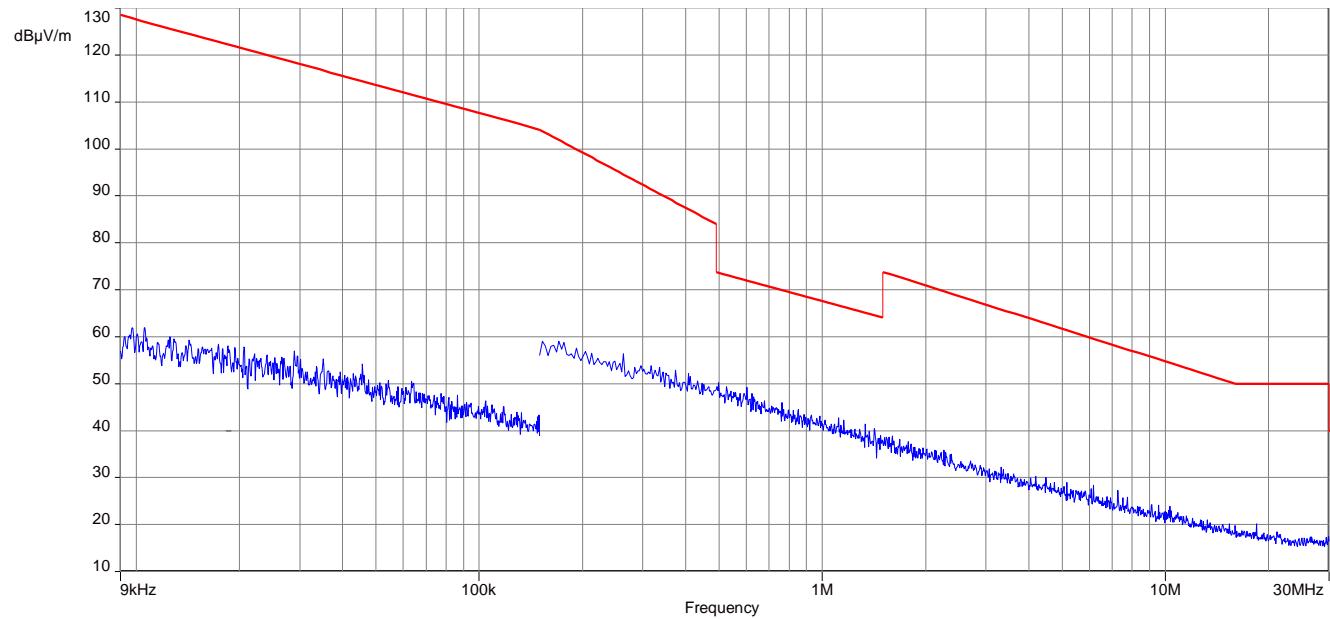
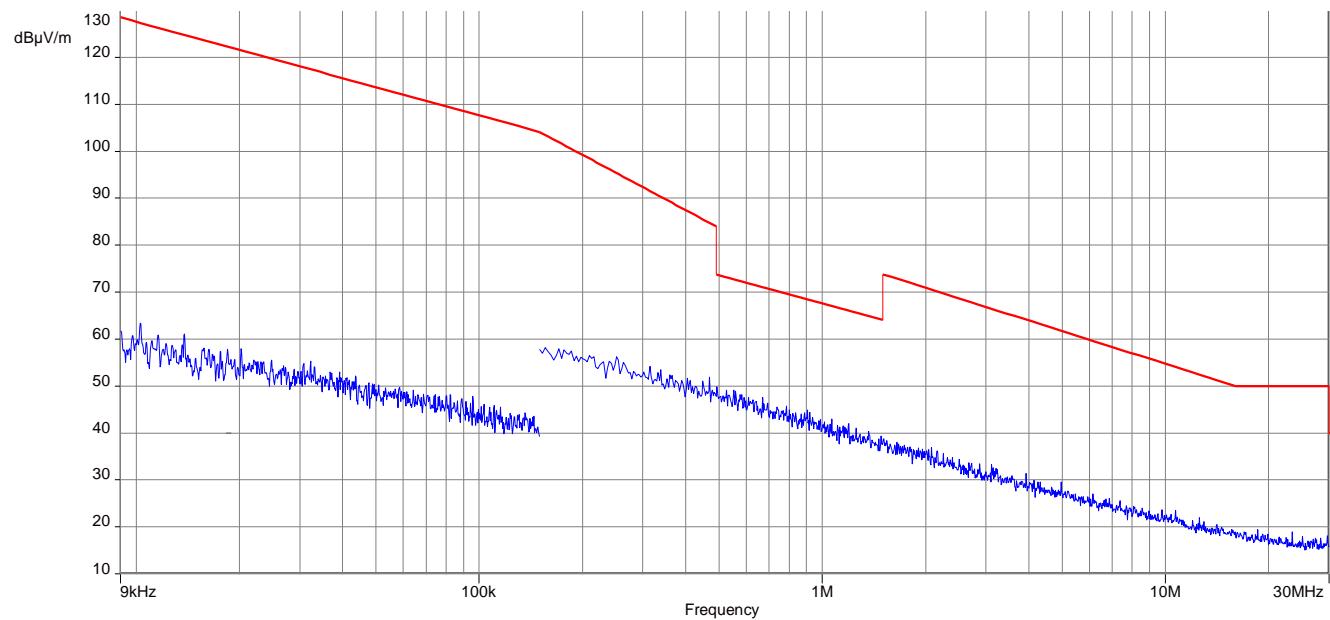
Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span	9 kHz to 30 MHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode
Test setup	See chapter 6.2 A
Measurement uncertainty	See chapter 8

Limits:

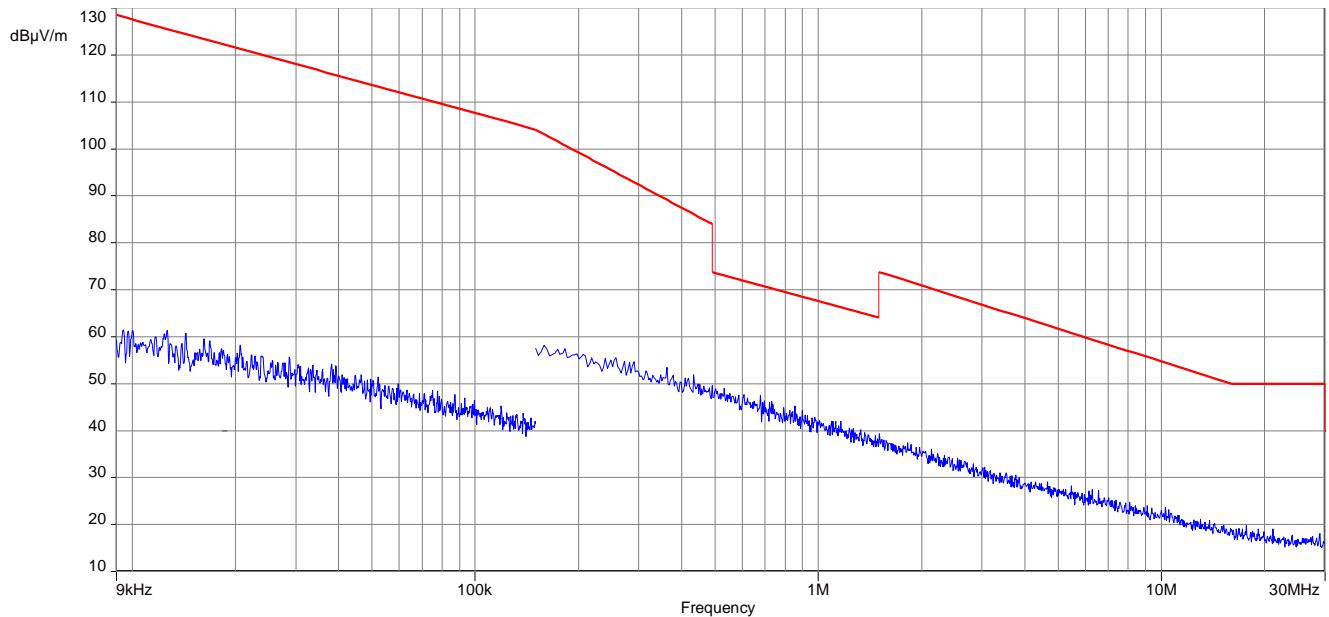
FCC		IC
Frequency / MHz	Field Strength / (dB μ V / m)	Measurement distance / m
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Results:

TX spurious emissions radiated < 30 MHz / (dB μ V / m) @ 3 m		
Frequency / MHz	Detector	Level / (dB μ V / m)
All detected peaks are more than 20 dB below the limit.		

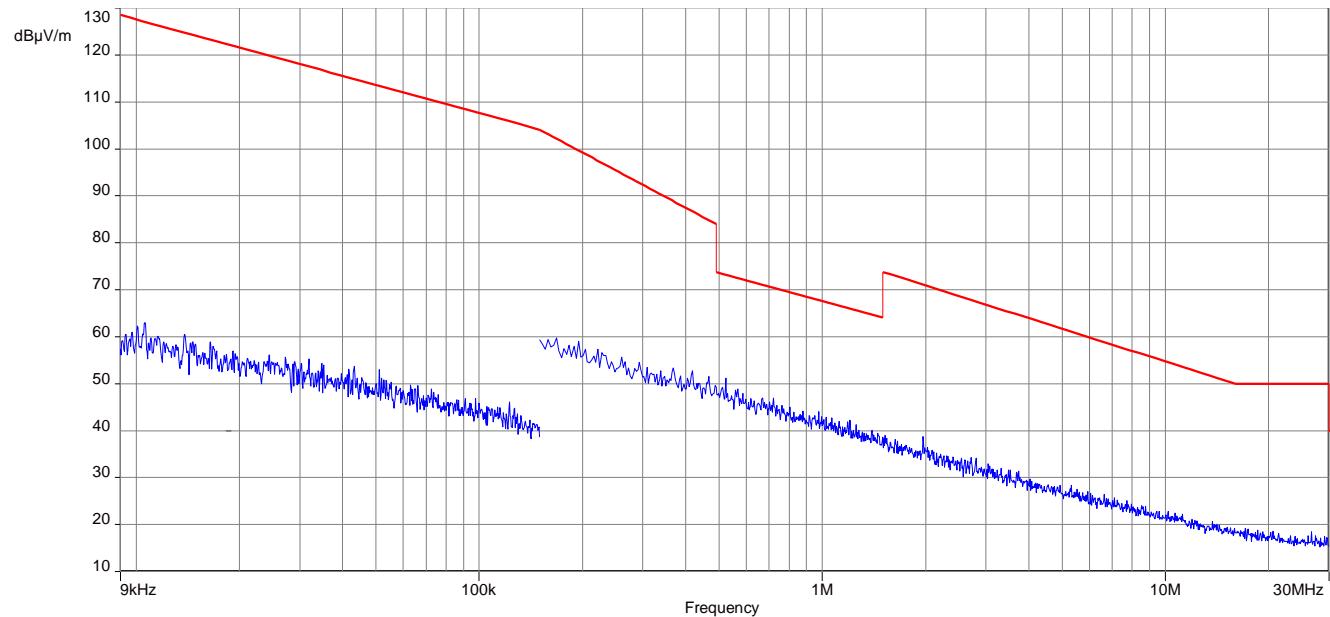
Plots: DSSS**Plot 1:** 9 kHz to 30 MHz, lowest channel**Plot 2:** 9 kHz to 30 MHz, middle channel

Plot 3: 9 kHz to 30 MHz, highest channel

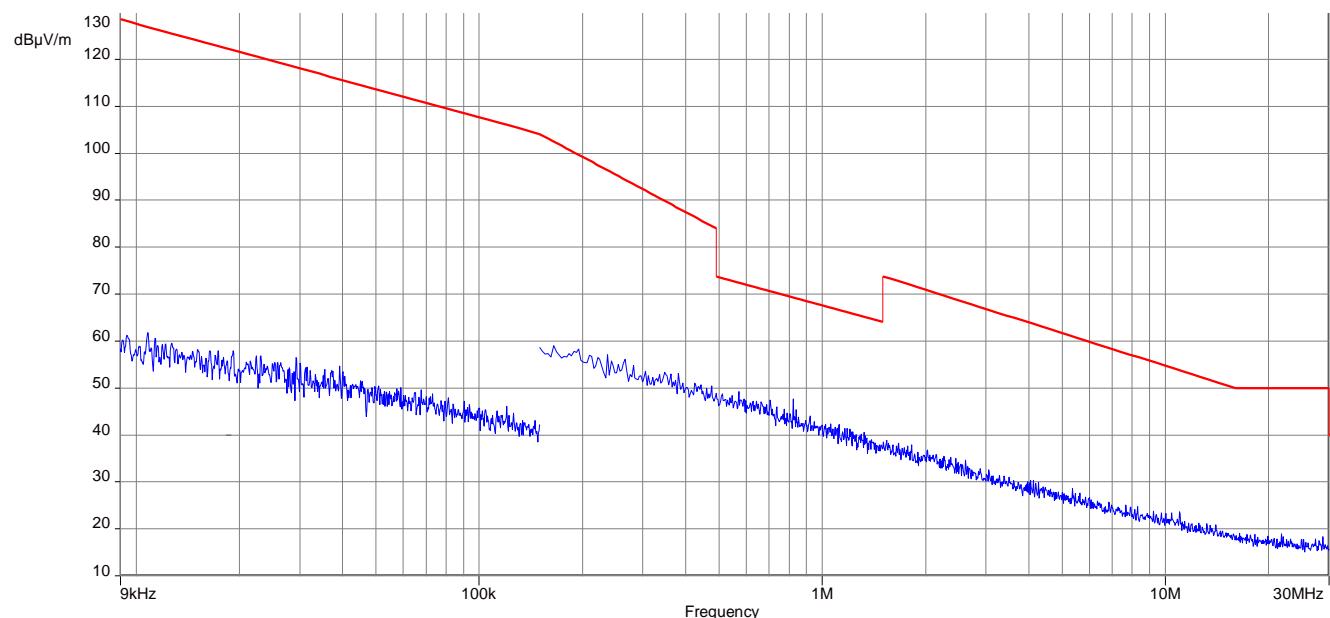


Plots: OFDM (20 MHz nominal channel bandwidth)

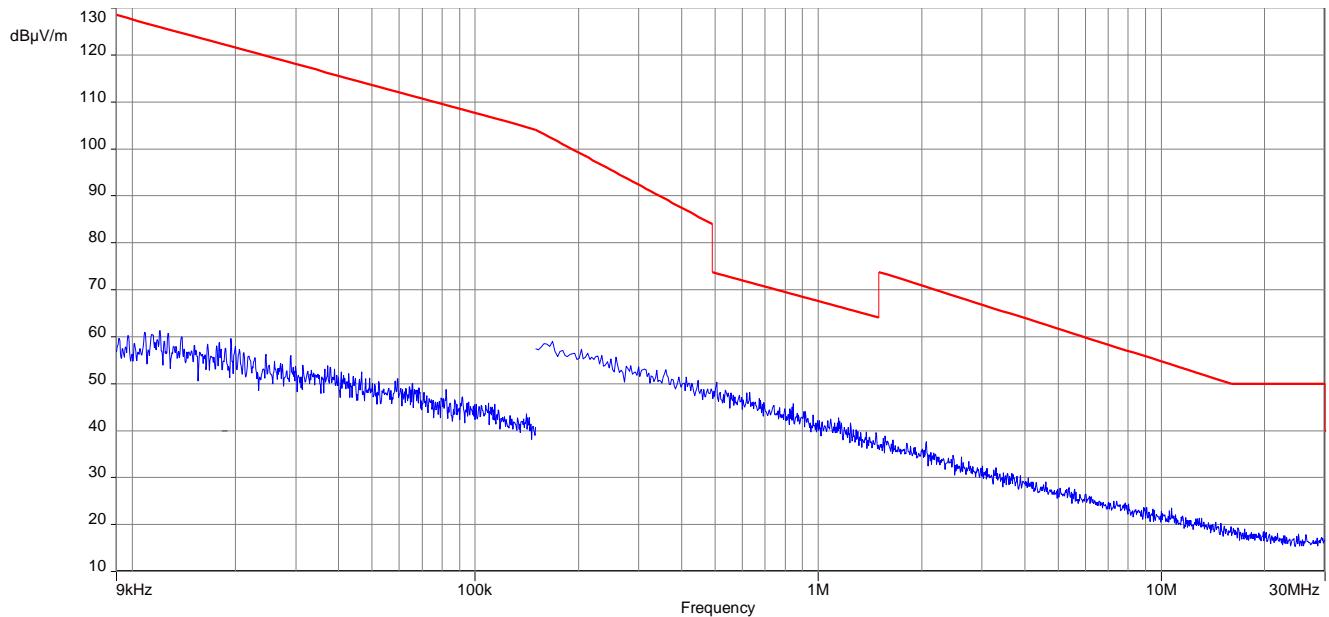
Plot 1: 9 kHz to 30 MHz, lowest channel



Plot 2: 9 kHz to 30 MHz, middle channel

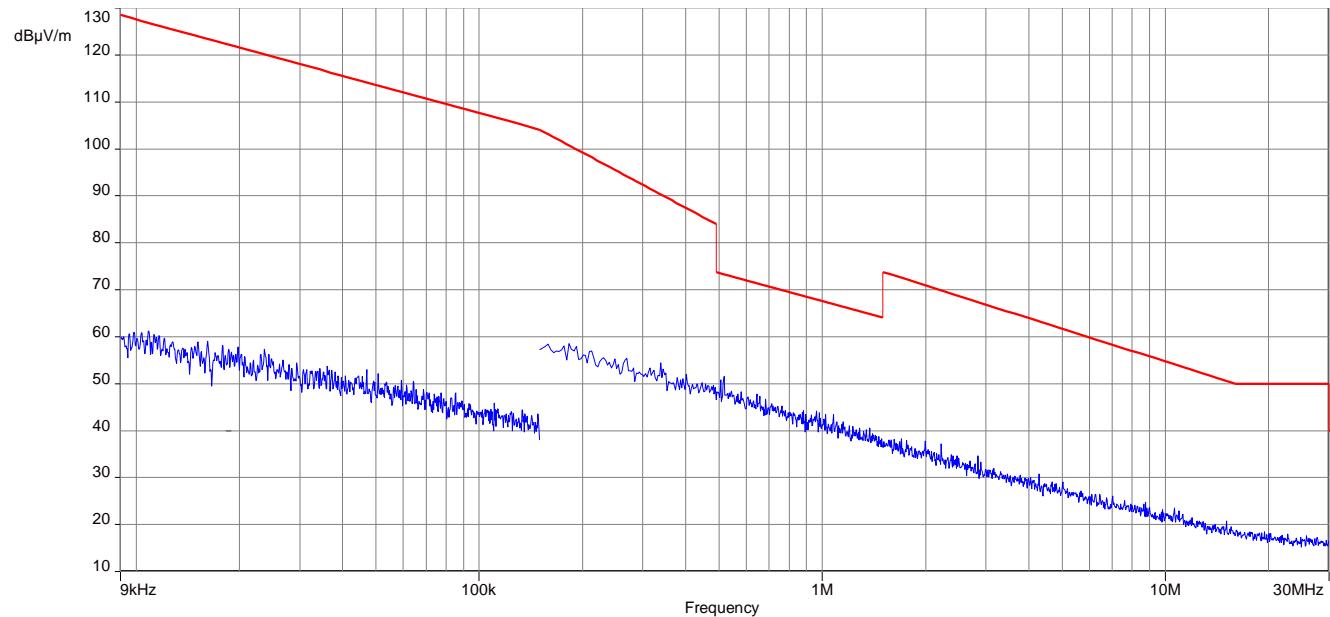


Plot 3: 9 kHz to 30 MHz, highest channel

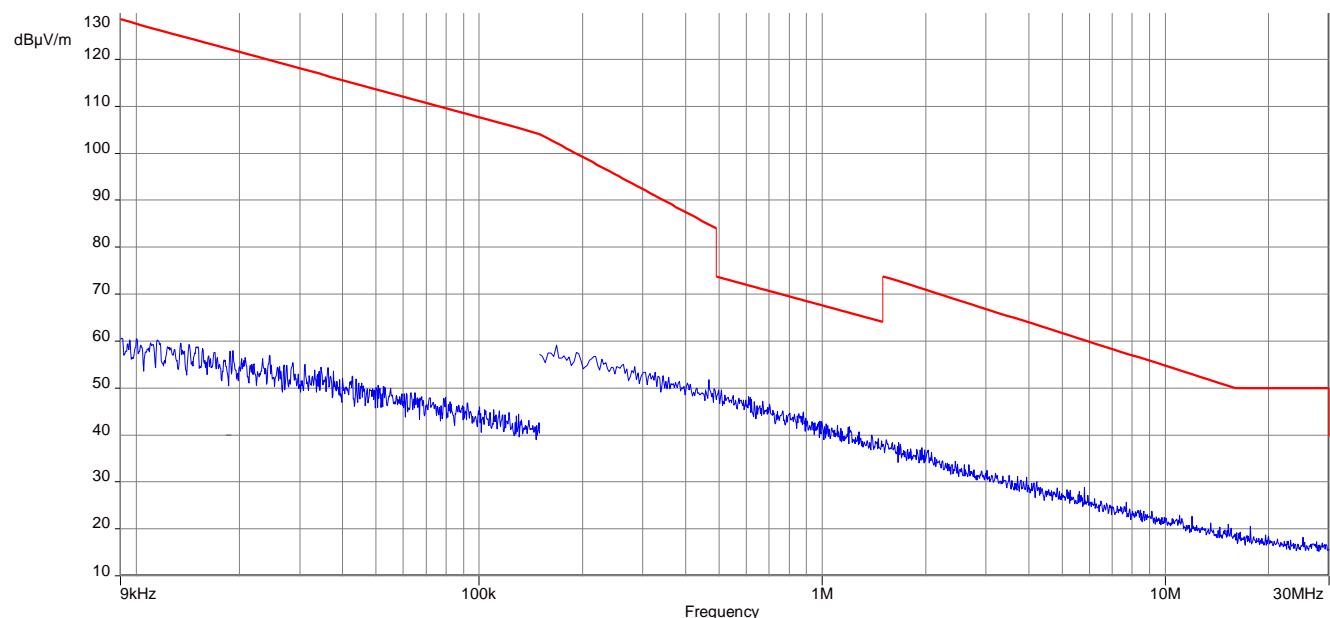


Plots: OFDM (40 MHz nominal channel bandwidth)

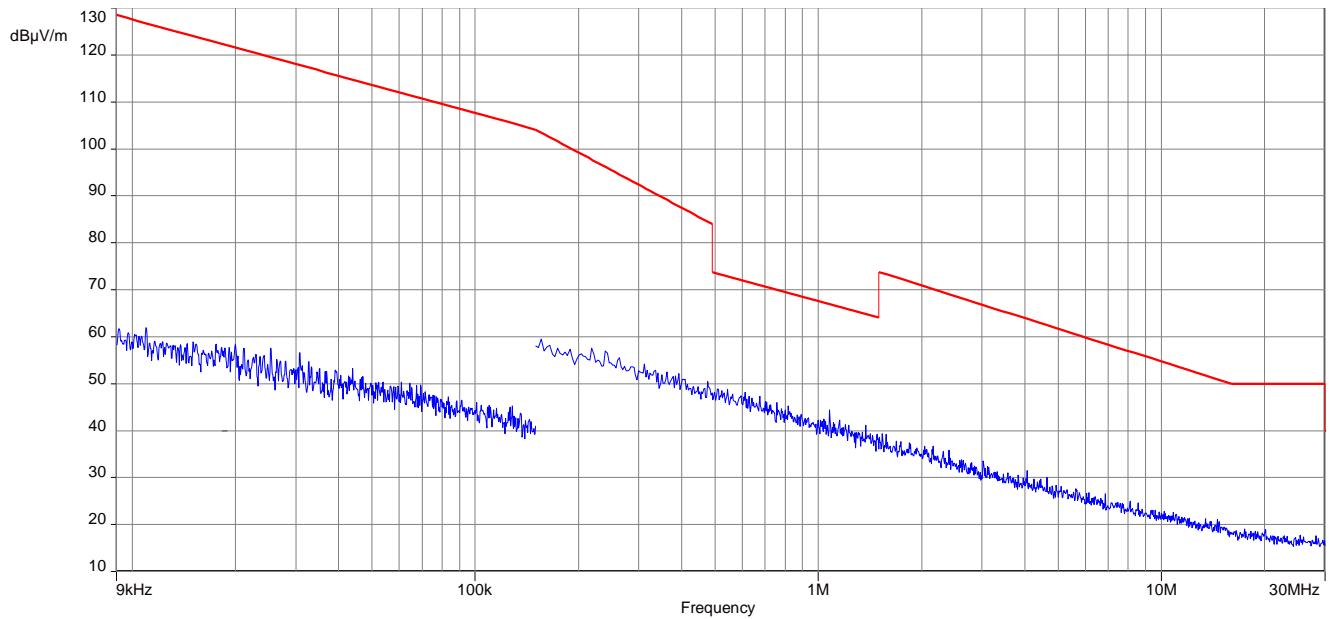
Plot 1: 9 kHz to 30 MHz, lowest channel



Plot 2: 9 kHz to 30 MHz, middle channel



Plot 3: 9 kHz to 30 MHz, highest channel



12.12 Spurious emissions radiated 30 MHz to 1 GHz

Description:

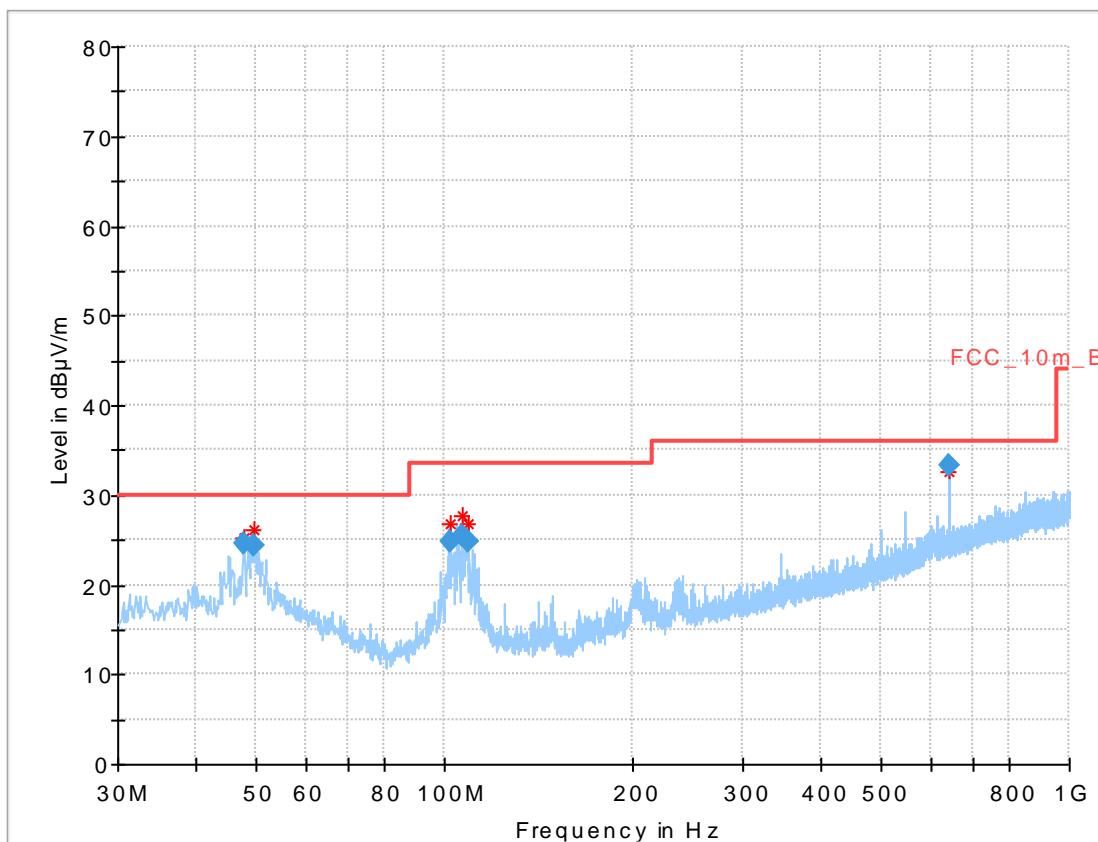
Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

Measurement:

Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	120 kHz
Video bandwidth	3 x RBW
Span	30 MHz to 1 GHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode <input checked="" type="checkbox"/> RX / Idle – mode
Test setup	See chapter 6.1 - A
Measurement uncertainty	See chapter 8

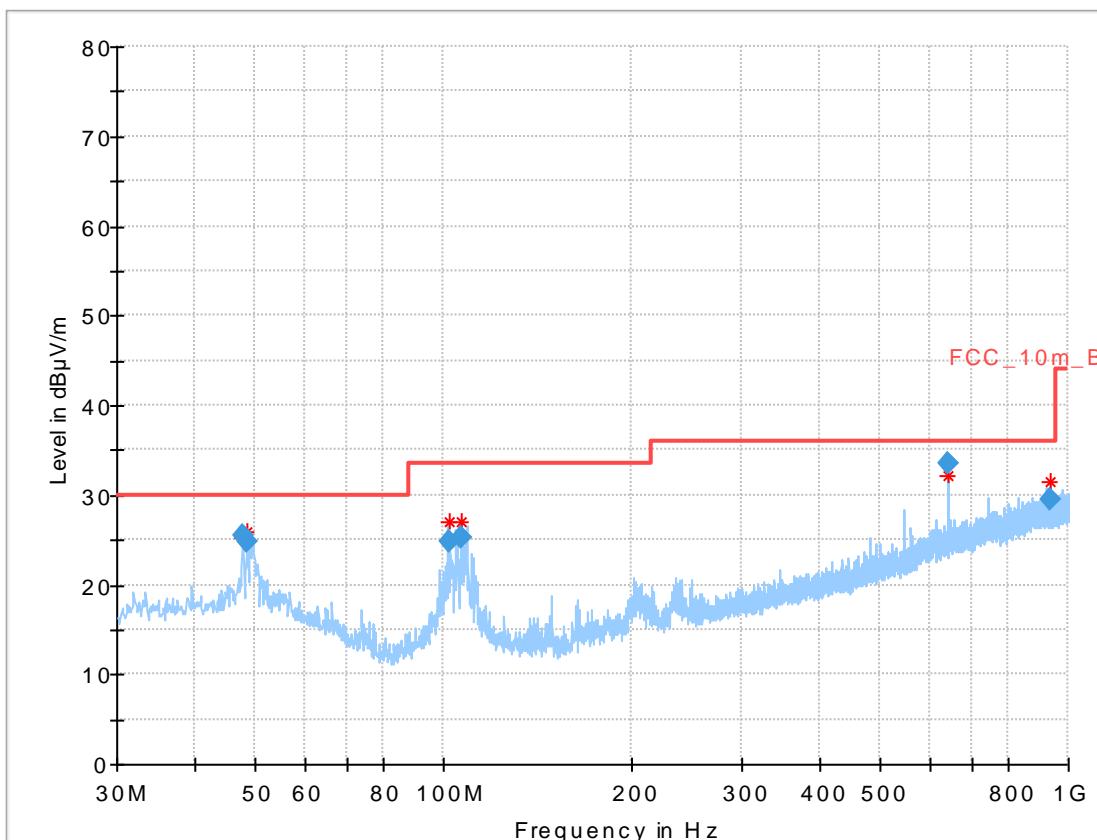
Limits:

FCC	IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).	
Frequency / MHz	Field Strength / (dB μ V / m)
30 – 88	30.0
88 – 216	33.5
216 – 960	36.0

Plot: DSSS**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization, lowest channel

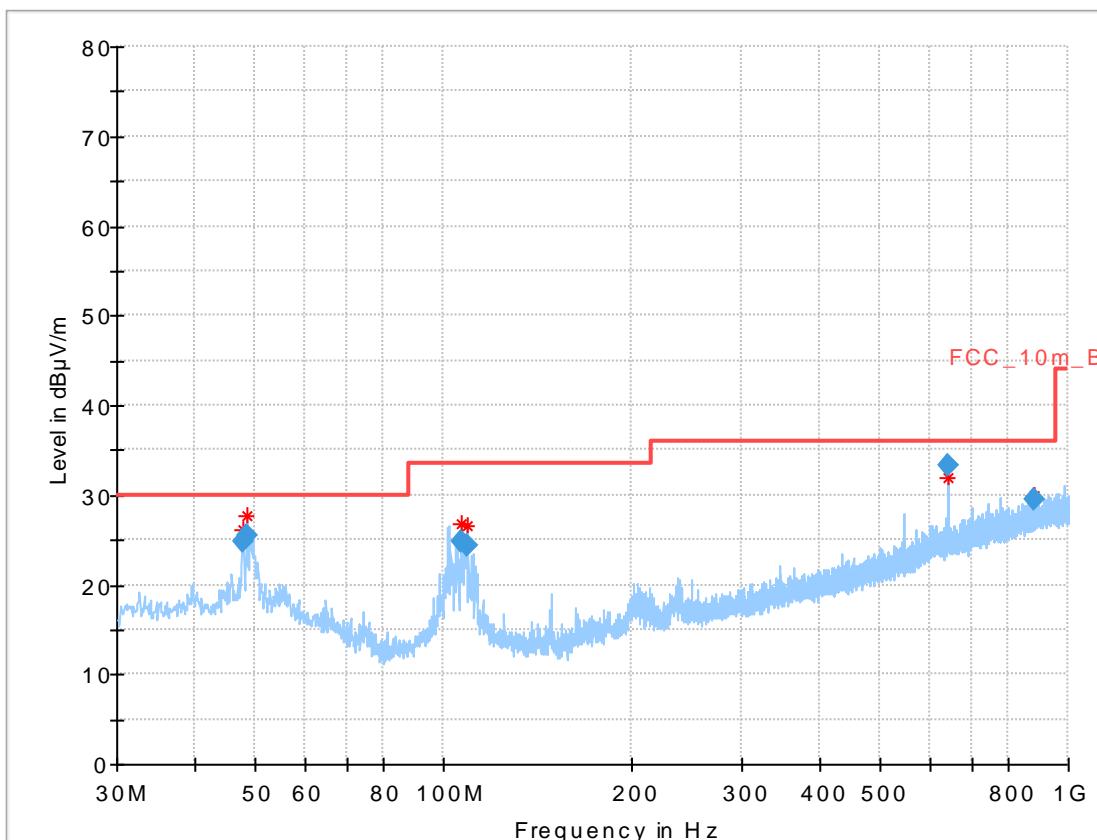
Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
47.813	24.68	30.0	5.32	1000	120	101.0	V
49.516	24.27	30.0	5.73	1000	120	101.0	V
101.912	24.77	33.5	8.73	1000	120	98.0	V
106.719	25.39	33.5	8.11	1000	120	170.0	V
108.805	24.83	33.5	8.67	1000	120	101.0	V
643.492	33.39	36.0	2.61	1000	120	101.0	H

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, middle channel



Frequency (MHz)	QuasiPeak (dB μ V/m)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
47.802	25.51	---	30.0	4.49	1000	120	98.0	V
48.449	24.84	---	30.0	5.16	1000	120	101.0	V
101.887	24.83	---	33.5	8.67	1000	120	100.0	V
106.715	25.19	---	33.5	8.31	1000	120	170.0	V
643.498	33.45	---	36.0	2.55	1000	120	101.0	H
932.504	29.41	---	36.0	6.59	1000	120	170.0	H

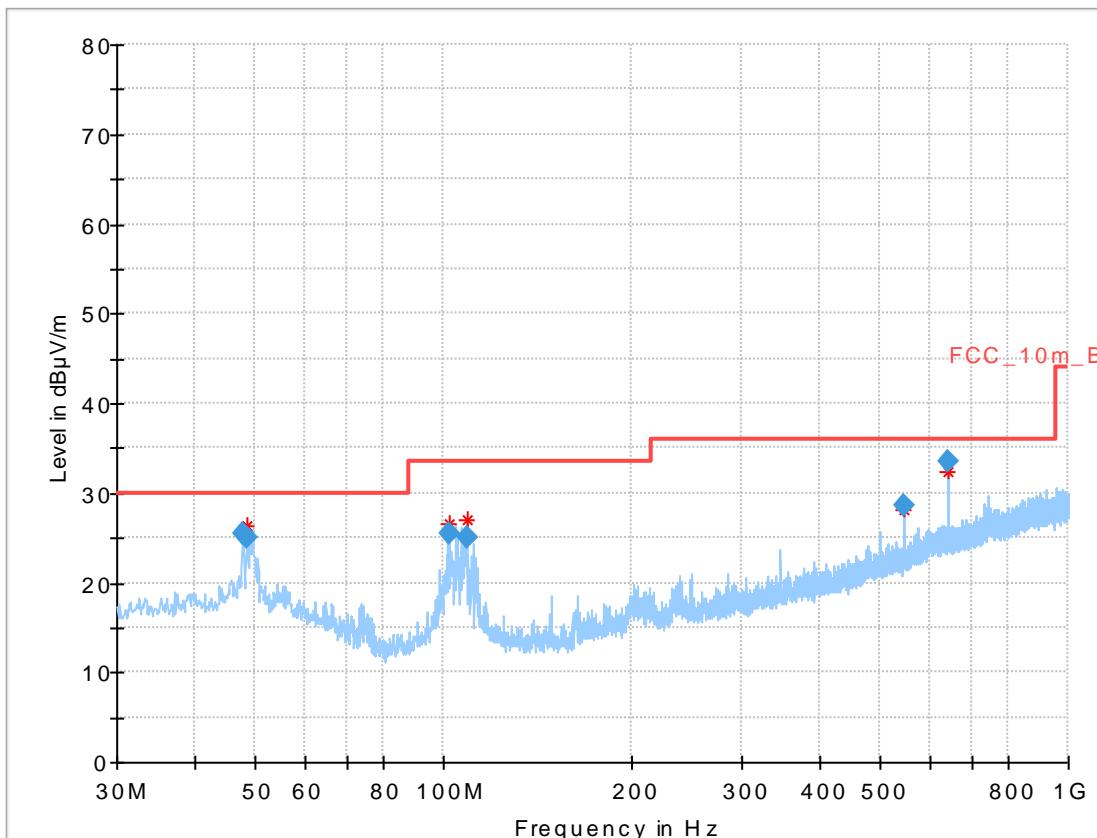
Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, highest channel



Frequency (MHz)	QuasiPeak (dB μ V/m)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
47.814	24.91	---	30.0	5.09	1000	120	170.0	V
48.447	25.48	---	30.0	4.52	1000	120	98.0	V
106.703	24.83	---	33.5	8.67	1000	120	170.0	V
108.804	24.37	---	33.5	9.13	1000	120	170.0	V
643.498	33.27	---	36.0	2.73	1000	120	98.0	H
884.288	29.55	---	36.0	6.45	1000	120	98.0	H

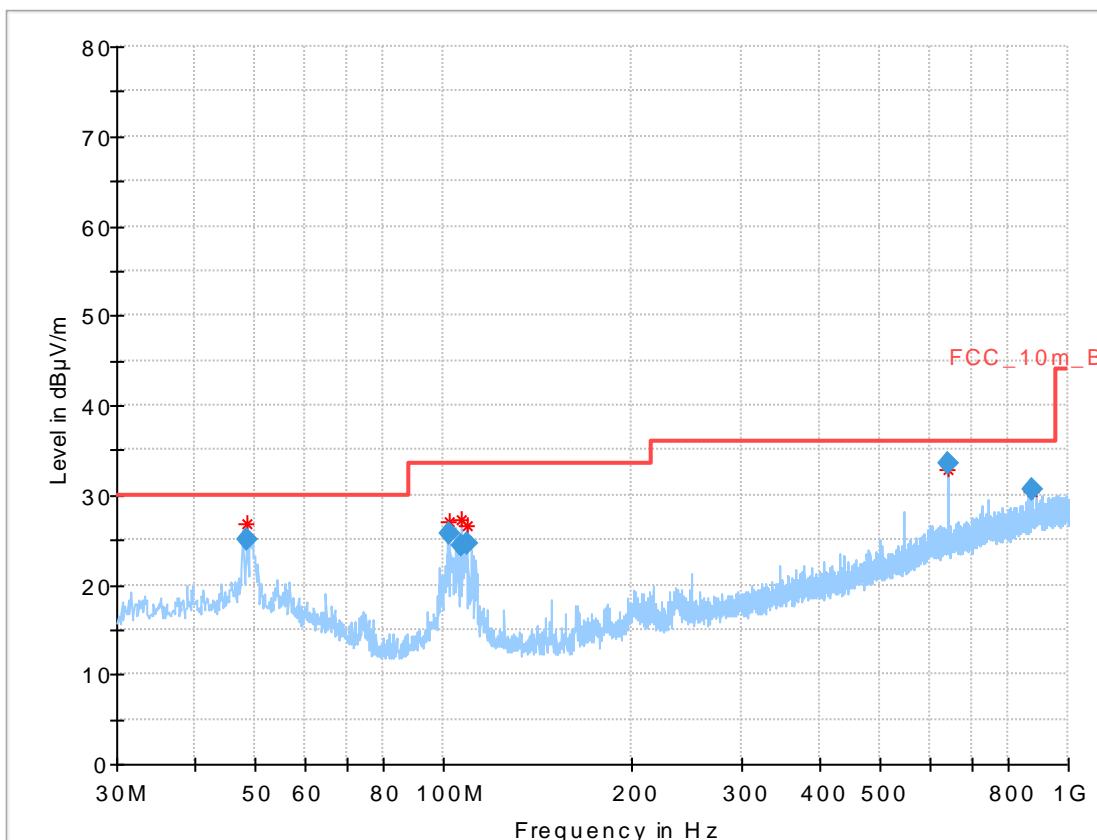
Plot: OFDM (20 MHz nominal channel bandwidth)

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, lowest channel



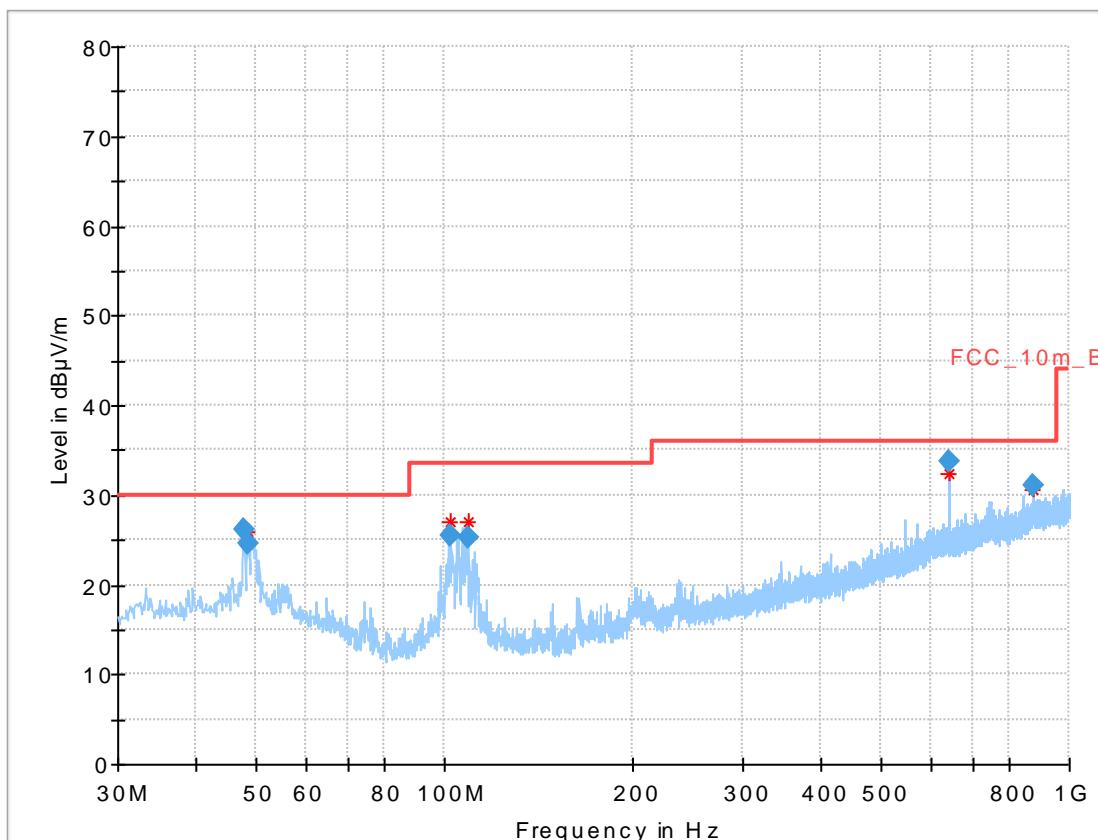
Frequency (MHz)	QuasiPeak (dB μ V/m)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
47.802	25.40	---	30.0	4.60	1000	120	170.0	V
48.454	24.92	---	30.0	5.08	1000	120	170.0	V
101.888	25.43	---	33.5	8.07	1000	120	98.0	V
108.799	25.06	---	33.5	8.44	1000	120	101.0	V
544.507	28.70	---	36.0	7.30	1000	120	101.0	H
643.485	33.44	---	36.0	2.56	1000	120	170.0	H

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, middle channel



Frequency (MHz)	QuasiPeak (dB μ V/m)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
48.452	25.01	---	30.0	4.99	1000	120	170.0	V
101.884	25.65	---	33.5	7.85	1000	120	98.0	V
106.710	24.38	---	33.5	9.12	1000	120	101.0	V
108.805	24.59	---	33.5	8.91	1000	120	100.0	V
643.492	33.47	---	36.0	2.53	1000	120	170.0	H
874.951	30.58	---	36.0	5.42	1000	120	98.0	V

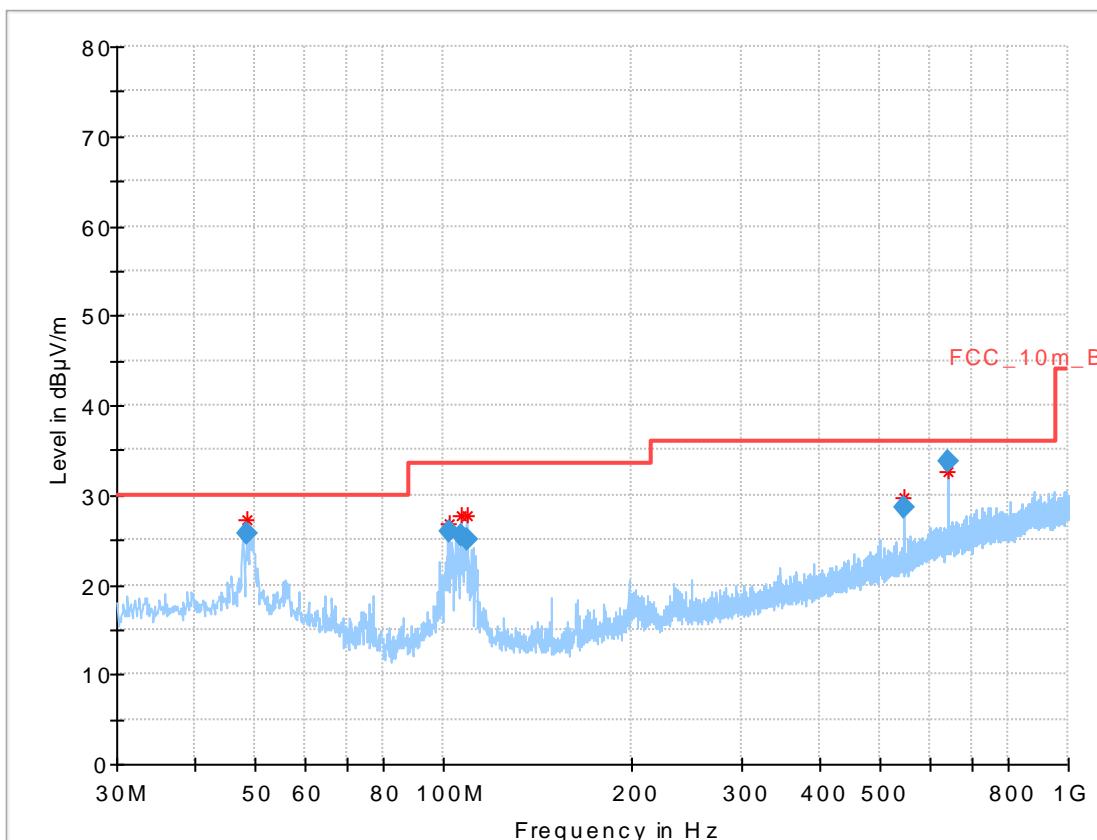
Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, highest channel



Frequency (MHz)	QuasiPeak (dB μ V/m)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
47.812	26.09	---	30.0	3.91	1000	120	100.0	V
48.450	24.65	---	30.0	5.35	1000	120	170.0	V
101.890	25.40	---	33.5	8.10	1000	120	100.0	V
108.799	25.16	---	33.5	8.34	1000	120	98.0	V
643.493	33.70	---	36.0	2.30	1000	120	101.0	H
874.984	30.96	---	36.0	5.04	1000	120	170.0	V

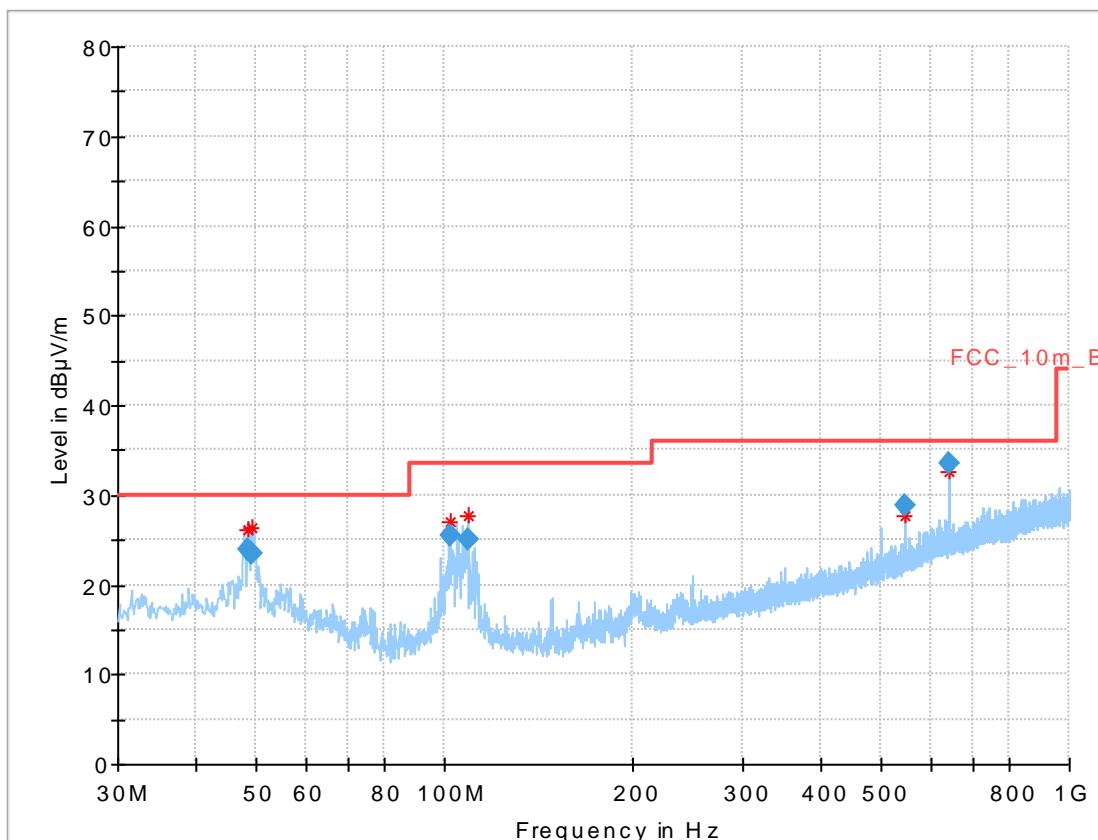
Plot: OFDM (40 MHz nominal channel bandwidth)

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, lowest channel



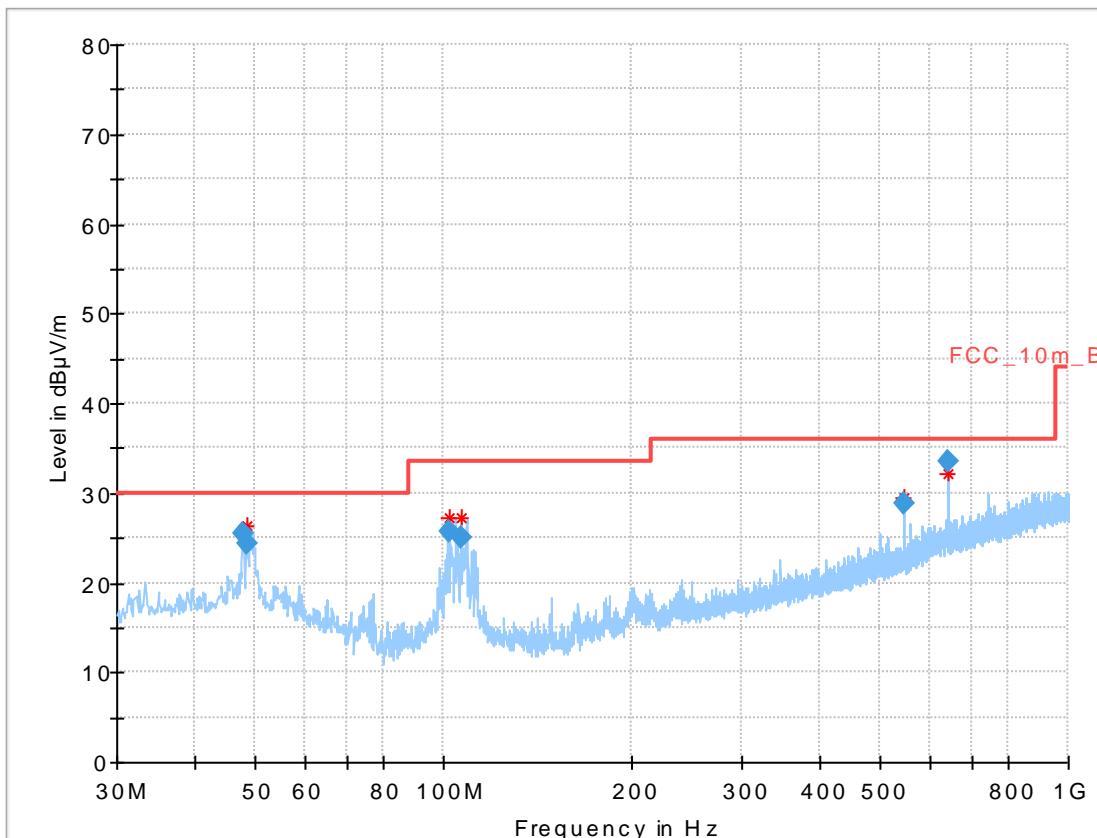
Frequency (MHz)	QuasiPeak (dB μ V/m)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
48.444	25.62	---	30.0	4.38	1000	120	98.0	V
101.880	25.94	---	33.5	7.56	1000	120	98.0	V
106.716	25.43	---	33.5	8.07	1000	120	170.0	V
108.806	24.99	---	33.5	8.51	1000	120	101.0	V
544.513	28.58	---	36.0	7.42	1000	120	101.0	H
643.491	33.68	---	36.0	2.32	1000	120	101.0	H

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, middle channel



Frequency (MHz)	QuasiPeak (dB μ V/m)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
48.396	24.01	---	30.0	5.99	1000	120	98.0	V
49.093	23.47	---	30.0	6.53	1000	120	98.0	V
101.867	25.55	---	33.5	7.95	1000	120	98.0	V
108.802	25.07	---	33.5	8.43	1000	120	98.0	V
544.494	28.90	---	36.0	7.10	1000	120	101.0	H
643.498	33.57	---	36.0	2.43	1000	120	101.0	H

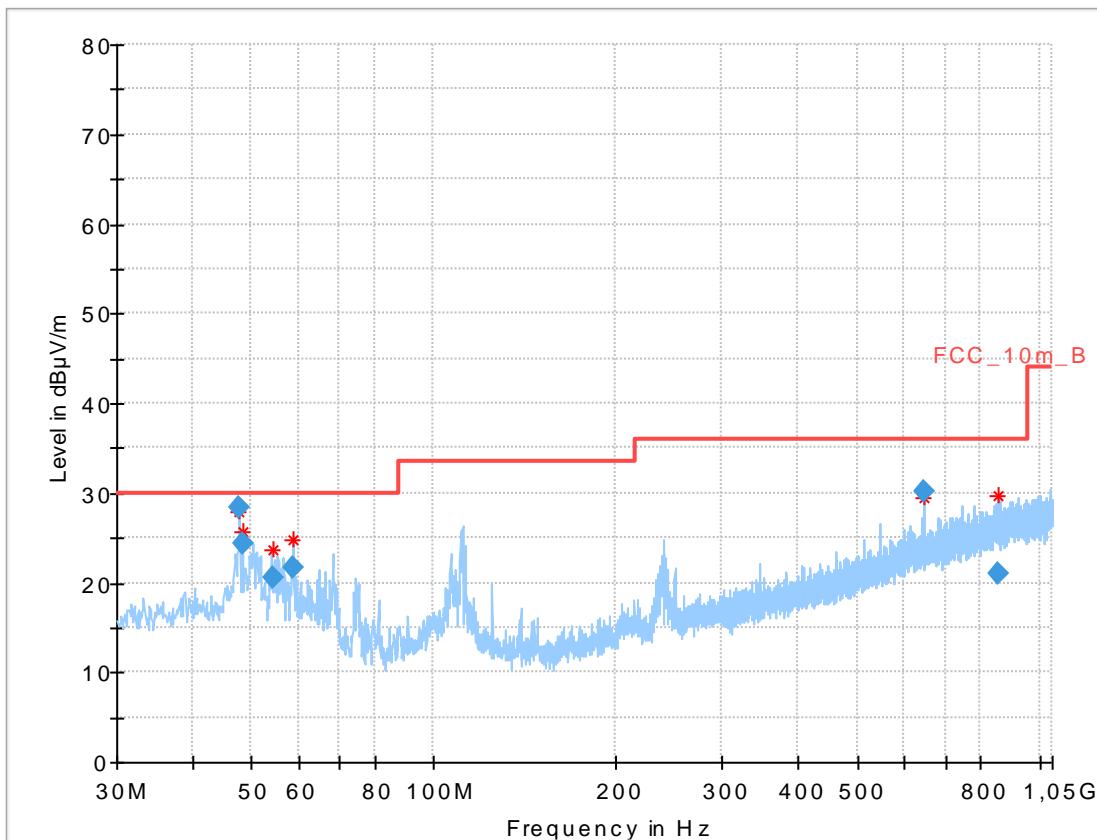
Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, highest channel



Frequency (MHz)	QuasiPeak (dB μ V/m)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
47.805	25.53	---	30.0	4.47	1000	120	170.0	V
48.439	24.25	---	30.0	5.75	1000	120	170.0	V
101.876	25.71	---	33.5	7.79	1000	120	101.0	V
106.703	24.98	---	33.5	8.52	1000	120	170.0	V
544.486	28.92	---	36.0	7.08	1000	120	101.0	H
643.492	33.58	---	36.0	2.42	1000	120	101.0	H

Plot: RX / Idle mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization



Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
47.794	28.32	30.0	1.68	1000	120	98.0	V	0.0	13.7
48.442	24.43	30.0	5.57	1000	120	101.0	V	90.0	13.7
54.171	20.64	30.0	9.36	1000	120	170.0	V	180.0	13.2
58.735	21.71	30.0	8.29	1000	120	98.0	V	90.0	12.2
643.503	30.23	36.0	5.77	1000	120	101.0	H	90.0	21.1
855.276	21.03	36.0	14.97	1000	120	170.0	H	90.0	23.6

12.13 Spurious emissions radiated above 1 GHz

Description:

Measurement of the radiated spurious emissions above 1 GHz in transmit mode and receiver / idle mode.

Measurement:

Measurement parameter	
Detector	Peak / RMS
Sweep time	Auto
Resolution bandwidth	1 MHz
Video bandwidth	3 x RBW
Span	1 GHz to 26 GHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode <input checked="" type="checkbox"/> RX / Idle – mode
Test setup	See chapter 6.2 C (1 GHz to 18 GHz) See chapter 6.3 (18 GHz to 26 GHz)
Measurement uncertainty	See chapter 8

Limits:

FCC	IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).	
Frequency / MHz	Field Strength / (dB μ V / m)
Above 960	54.0 (AVG) 74.0 (peak)

Results: DSSS

TX spurious emissions radiated / dB μ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m
1584	Peak	50.5	1584	Peak	50.5	1584	Peak	50.5
	AVG	49.1		AVG	49.1		AVG	49.1
2811	Peak	49.2	2811	Peak	49.2	4924	Peak	53.7
	AVG	46.6		AVG	46.6		AVG	49.7
4842	Peak	48.7	4874	Peak	51.1	-/-	Peak	-/-
	AVG	43.0		AVG	46.0		AVG	-/-

Results: OFDM (20 MHz nominal channel bandwidth)

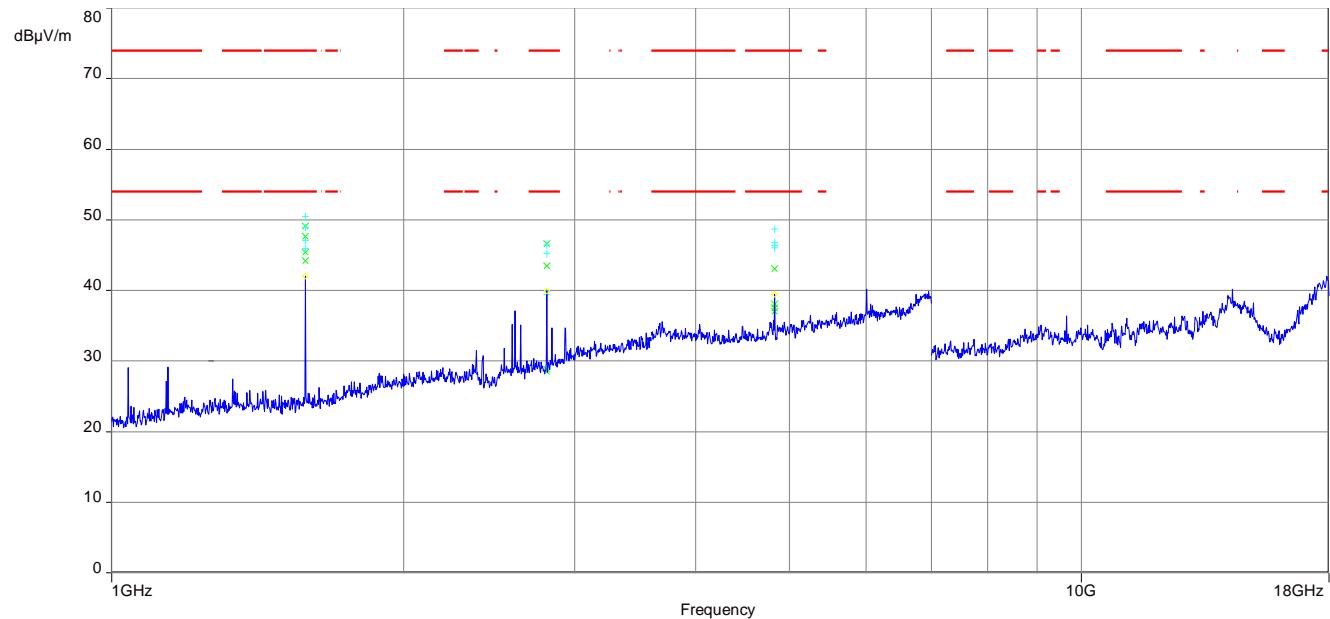
TX spurious emissions radiated / dB μ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m
1584	Peak	50.5	1584	Peak	50.5	1584	Peak	50.5
	AVG	49.1		AVG	49.1		AVG	49.1
2811	Peak	49.2	2811	Peak	49.2	2811	Peak	49.2
	AVG	46.6		AVG	46.6		AVG	46.6
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-

Results: OFDM (40 MHz nominal channel bandwidth)

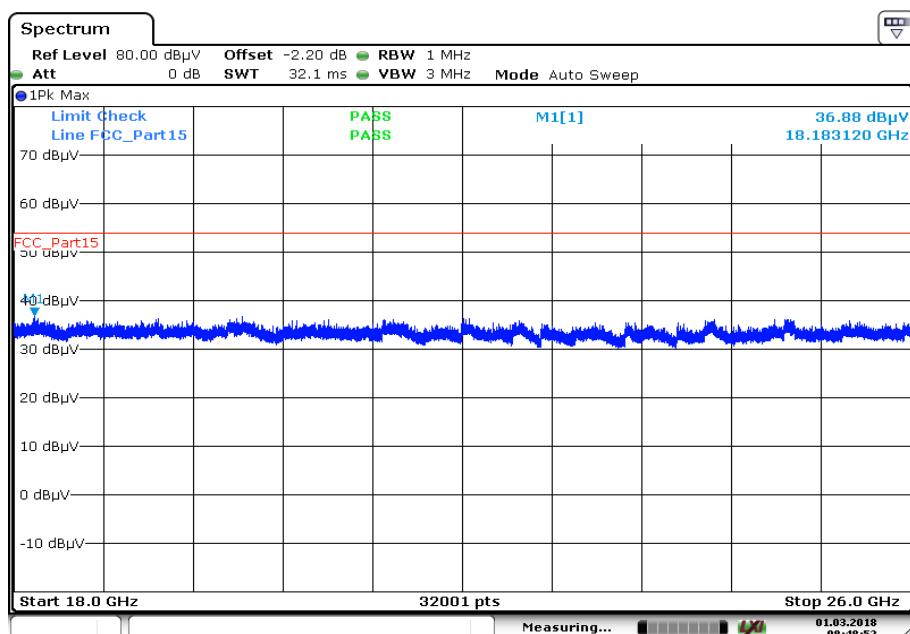
TX spurious emissions radiated / dB μ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m
1584	Peak	50.5	1584	Peak	50.5	1584	Peak	50.5
	AVG	49.1		AVG	49.1		AVG	49.1
2811	Peak	49.2	2811	Peak	49.2	2811	Peak	49.2
	AVG	46.6		AVG	46.6		AVG	46.6
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-

Results: RX / idle – mode

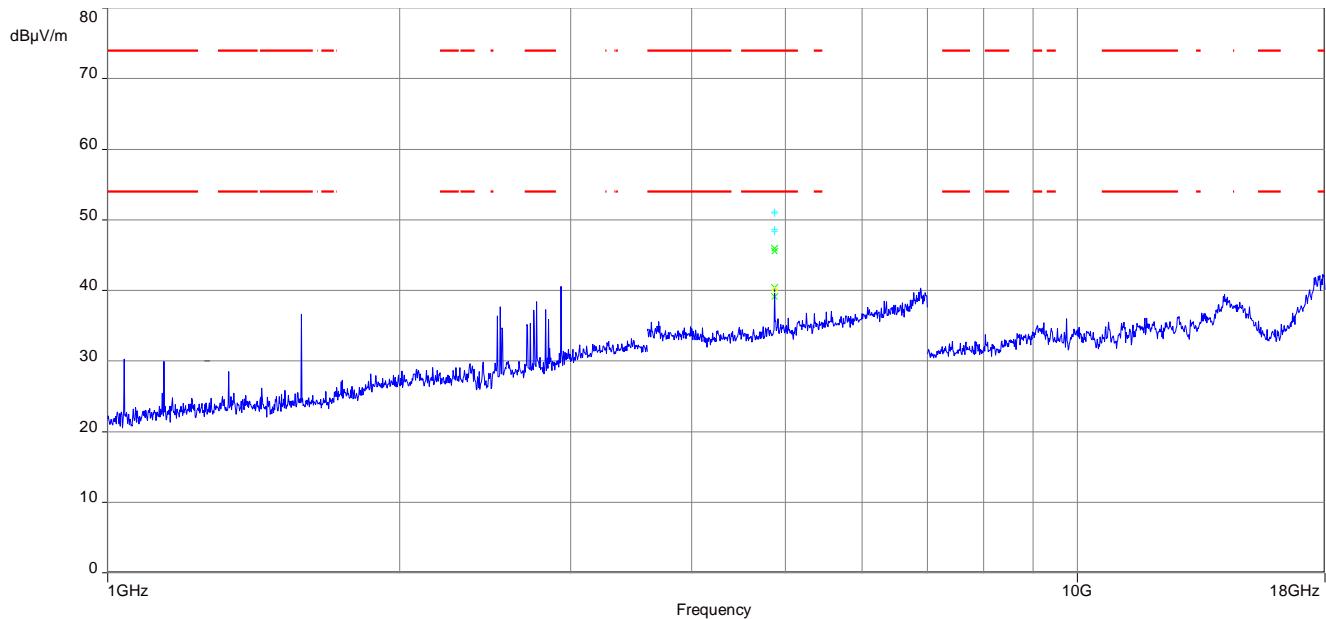
TX spurious emissions radiated / dB μ V/m @ 3 m		
f / MHz	Detector	Level / dB μ V/m
1584	Peak	50.5
	AVG	49.1
2308	Peak	51.5
	AVG	49.8
2799	Peak	51.5
	AVG	50.1

Plots: DSSS**Plot 1:** Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

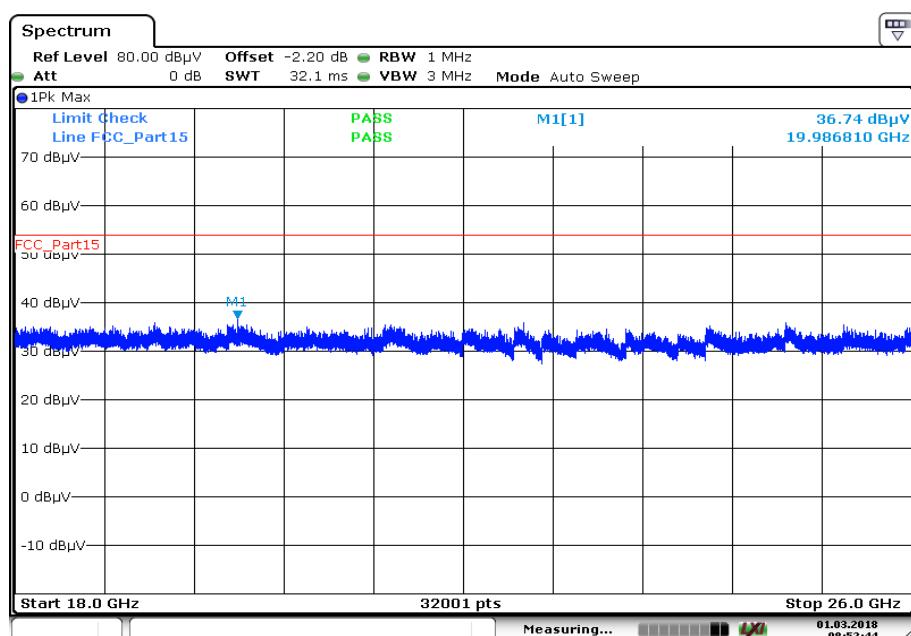
The carrier signal is notched with a 2.4 GHz band rejection filter.

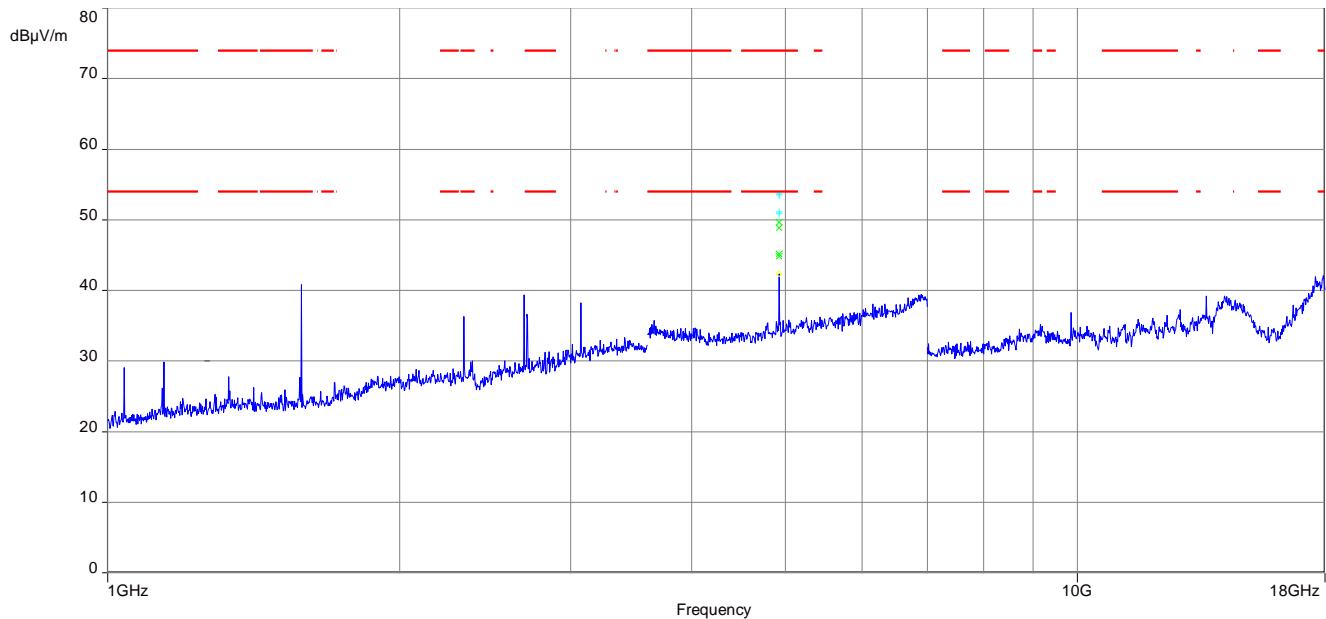
Plot 2: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

Date: 1.MAR.2018 08:48:51

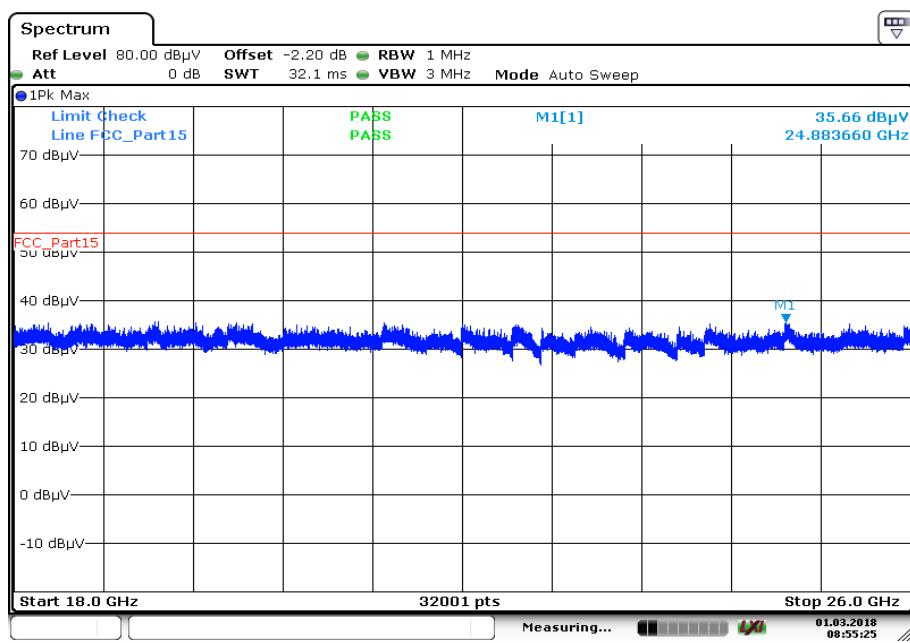
Plot 3: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

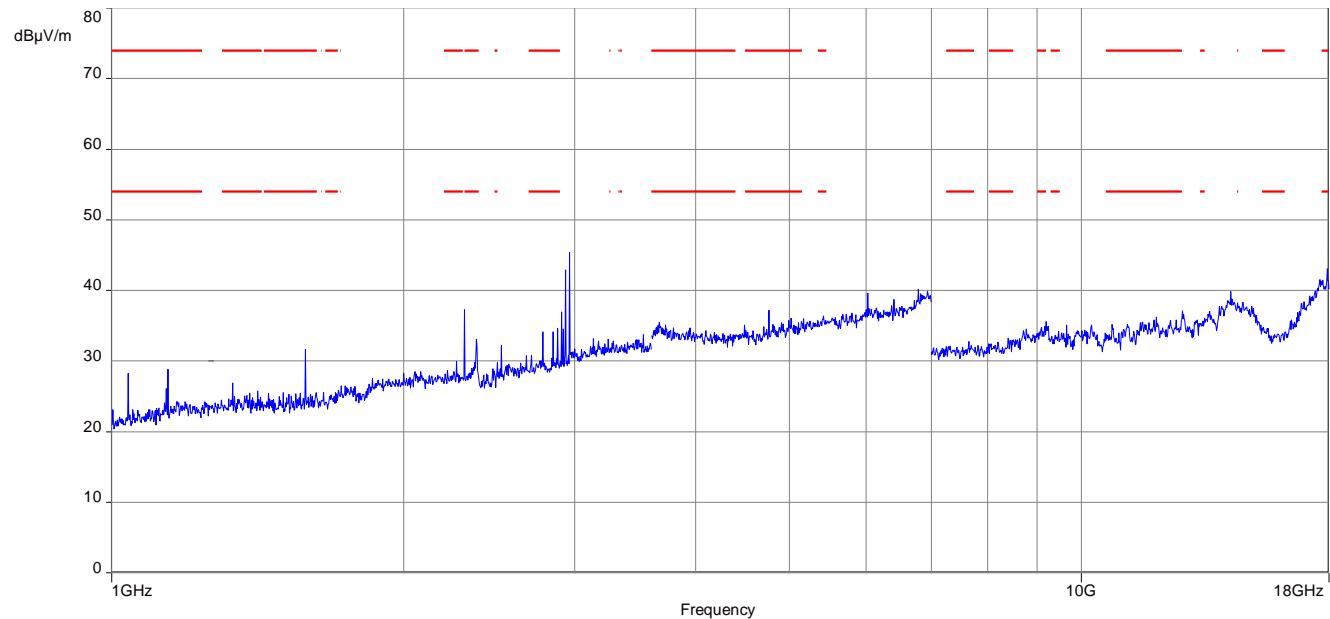
Plot 5: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 6: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

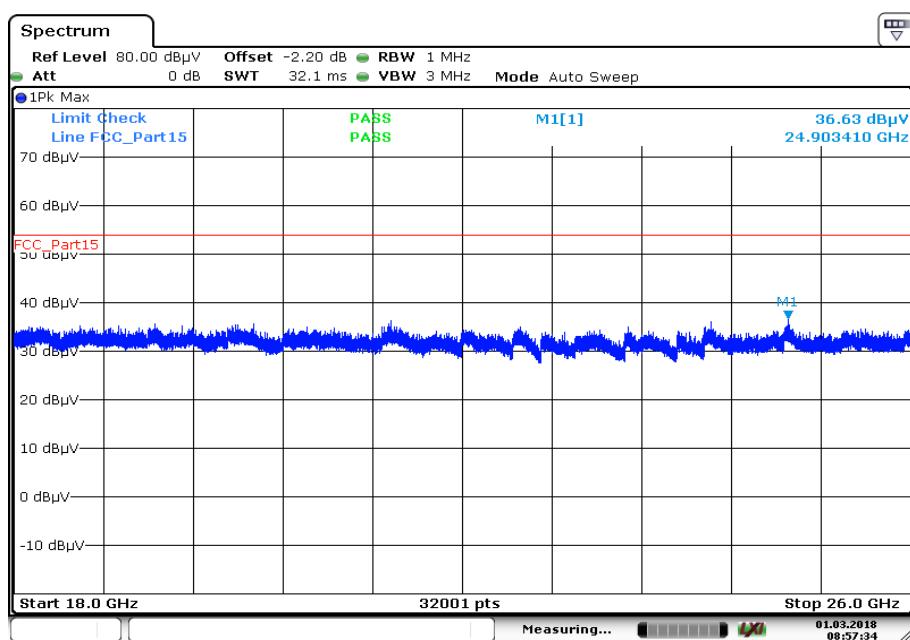
Plots: OFDM (20 MHz bandwidth)

Plot 1: Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

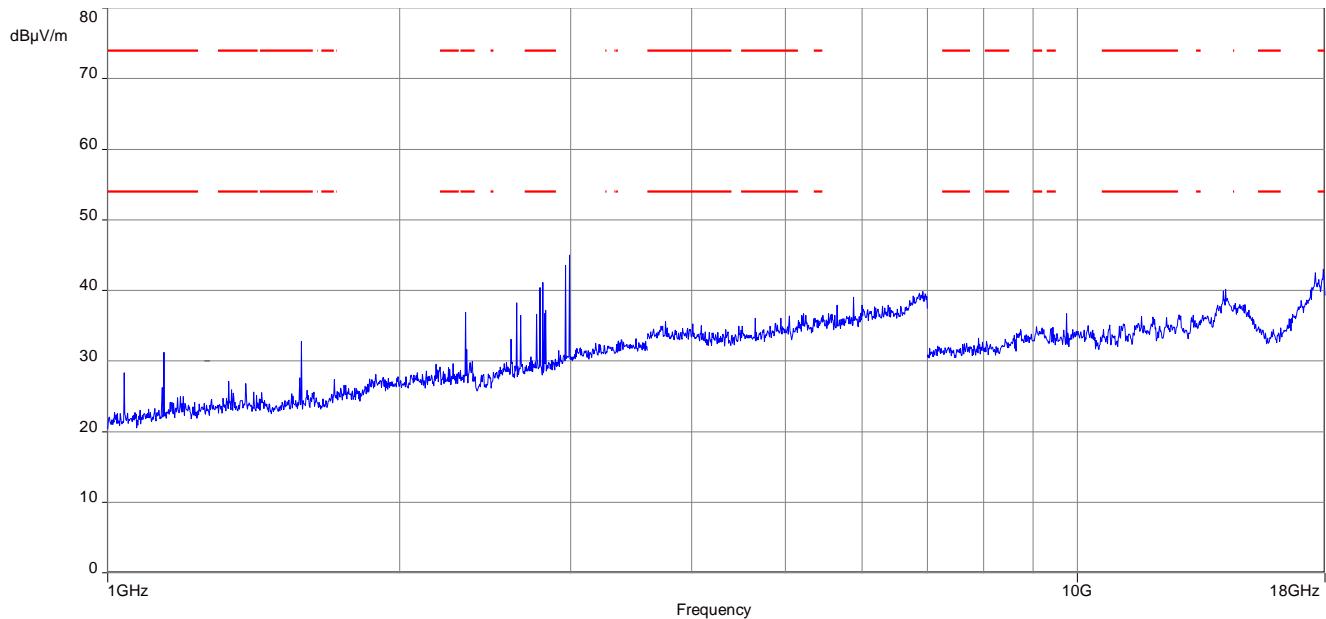


The carrier signal is notched with a 2.4 GHz band rejection filter.

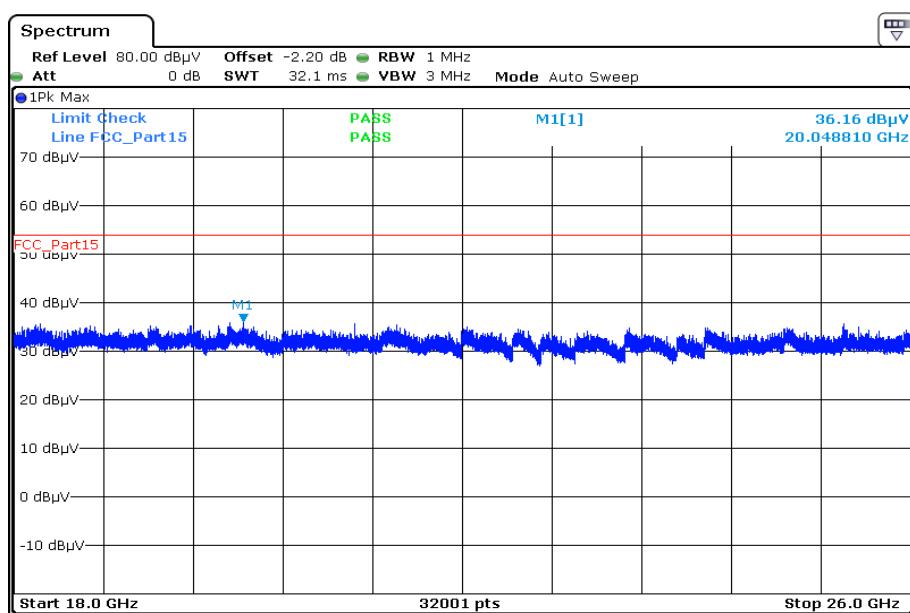
Plot 2: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization



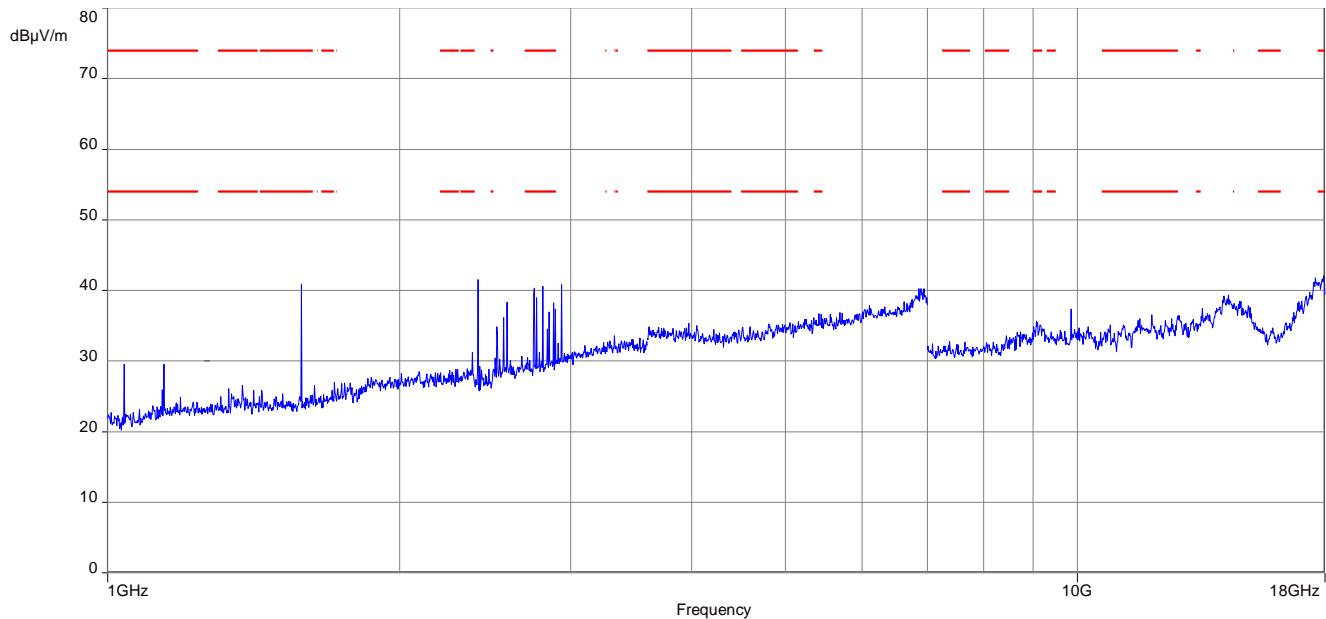
Date: 1.MAR.2018 08:57:33

Plot 3: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

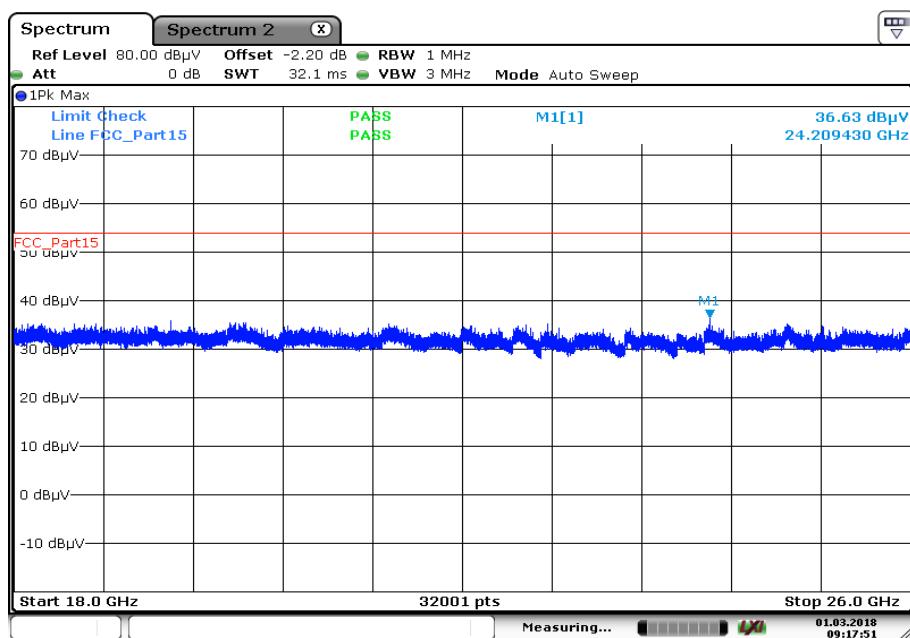
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

Date: 1.MAR.2018 09:01:05

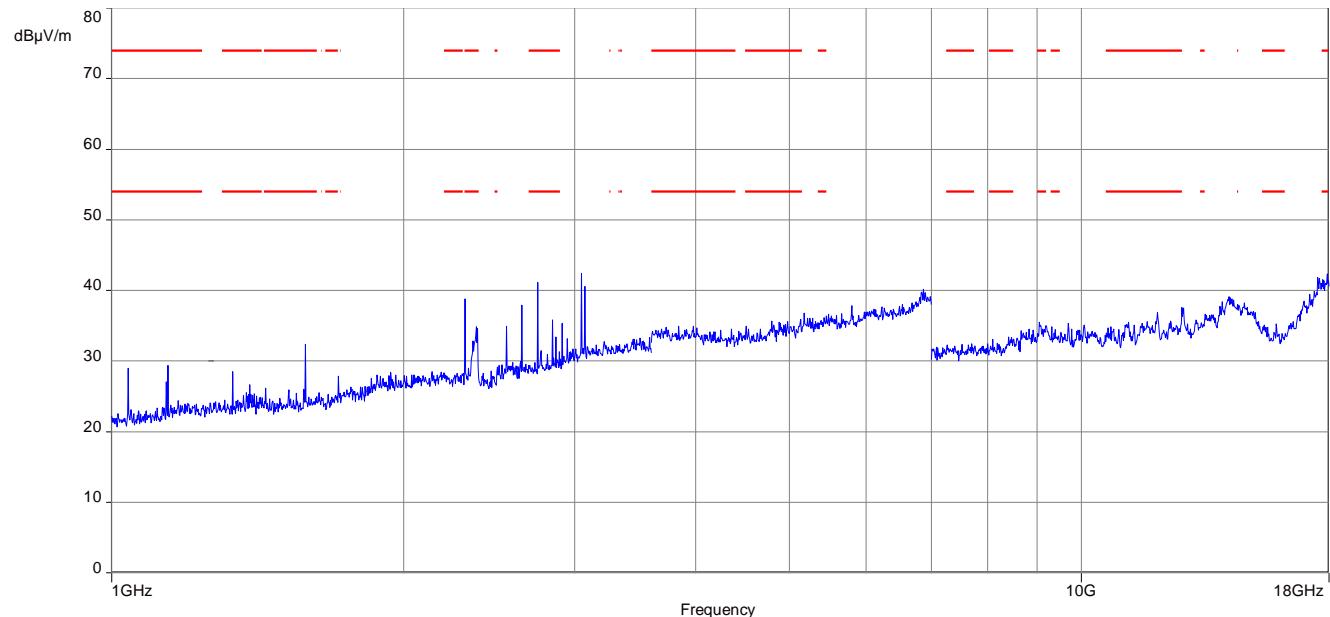
Plot 5: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 6: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

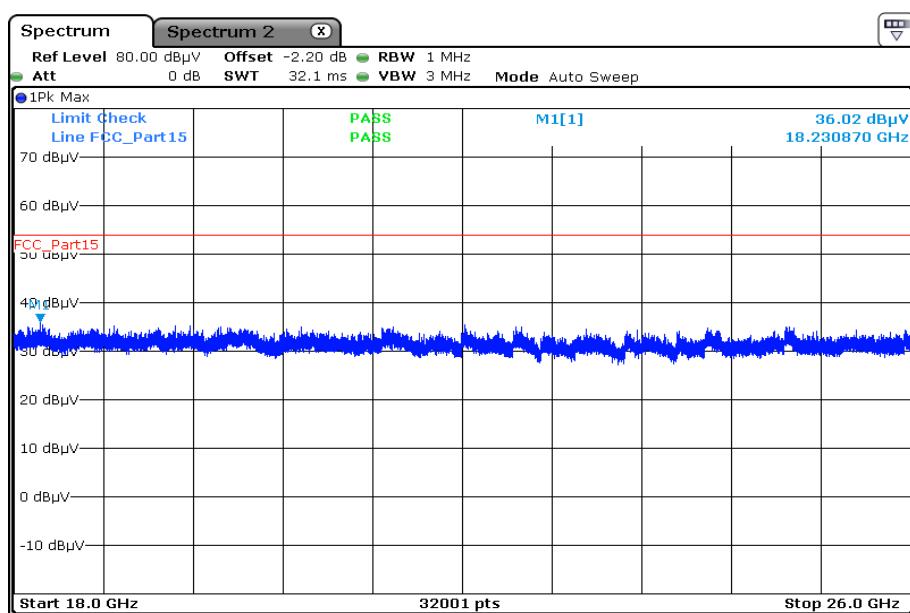
Plots: OFDM (40 MHz bandwidth)

Plot 1: Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

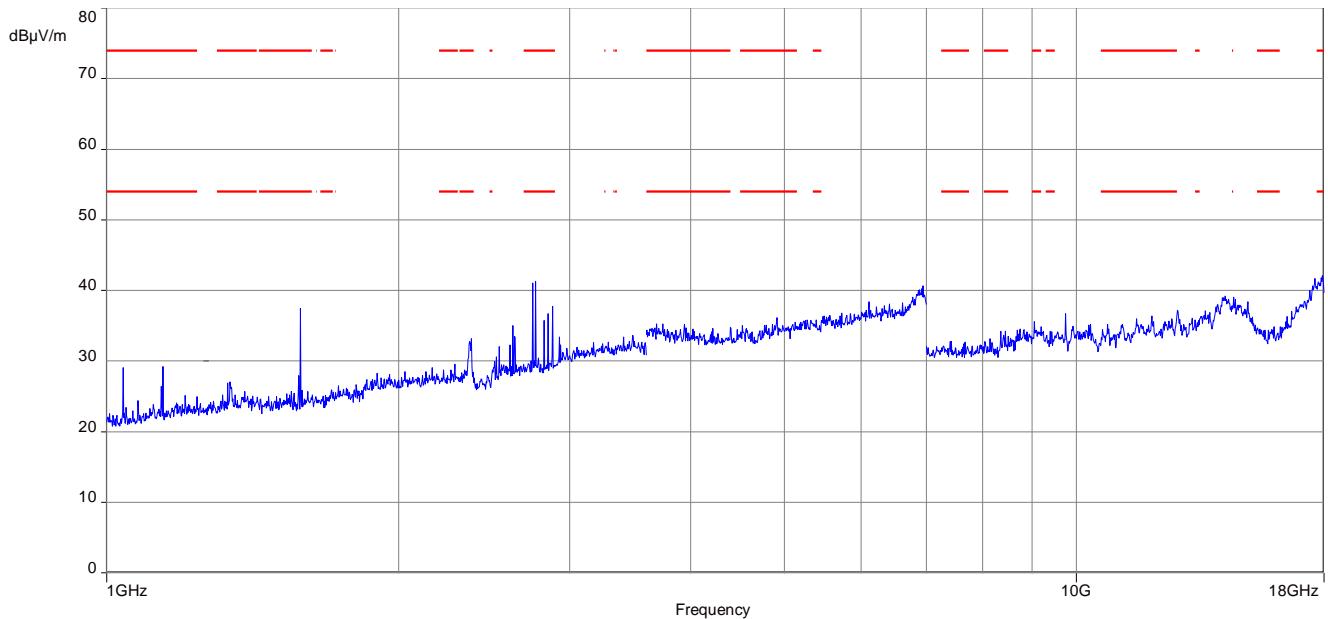


The carrier signal is notched with a 2.4 GHz band rejection filter.

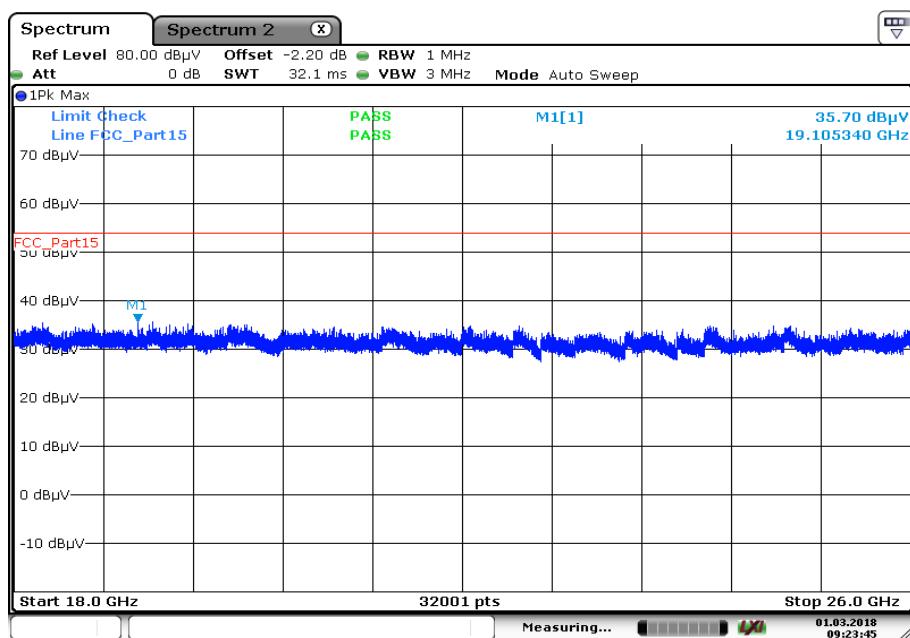
Plot 2: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

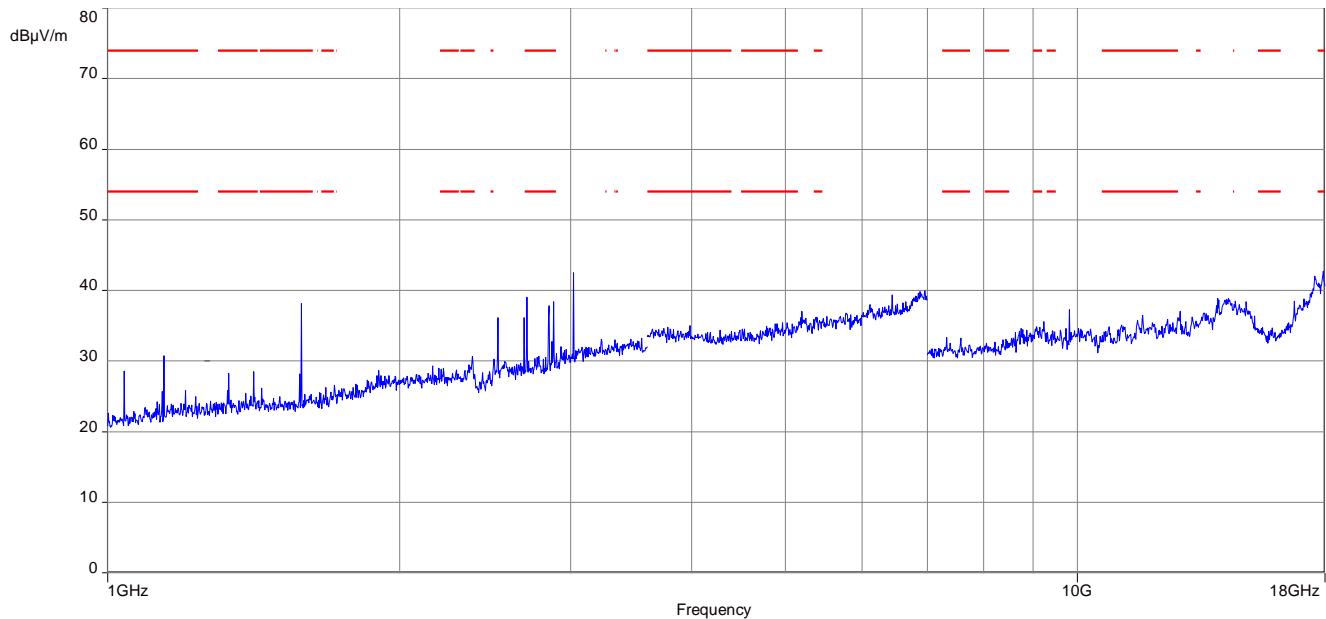


Date: 1.MAR.2018 09:19:50

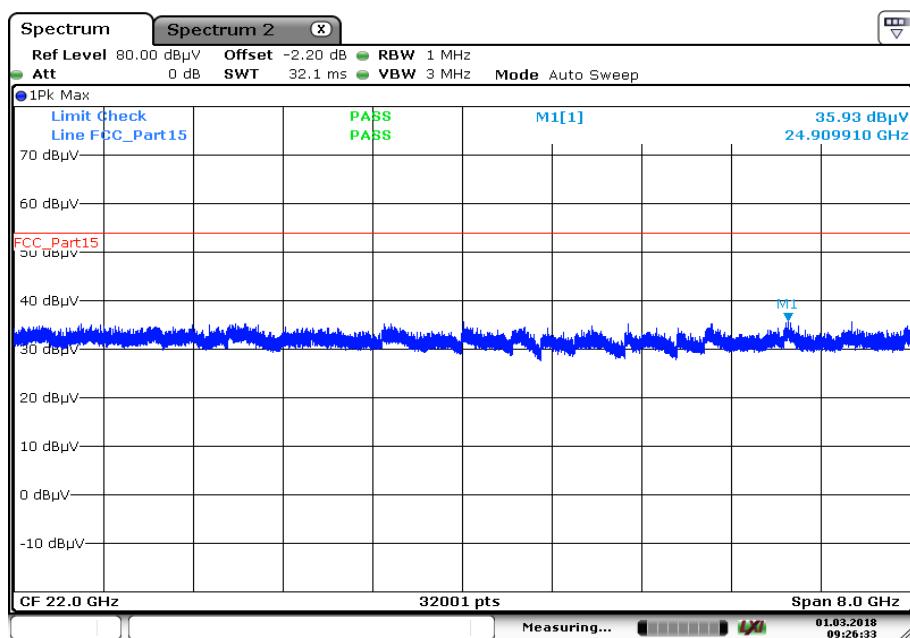
Plot 3: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

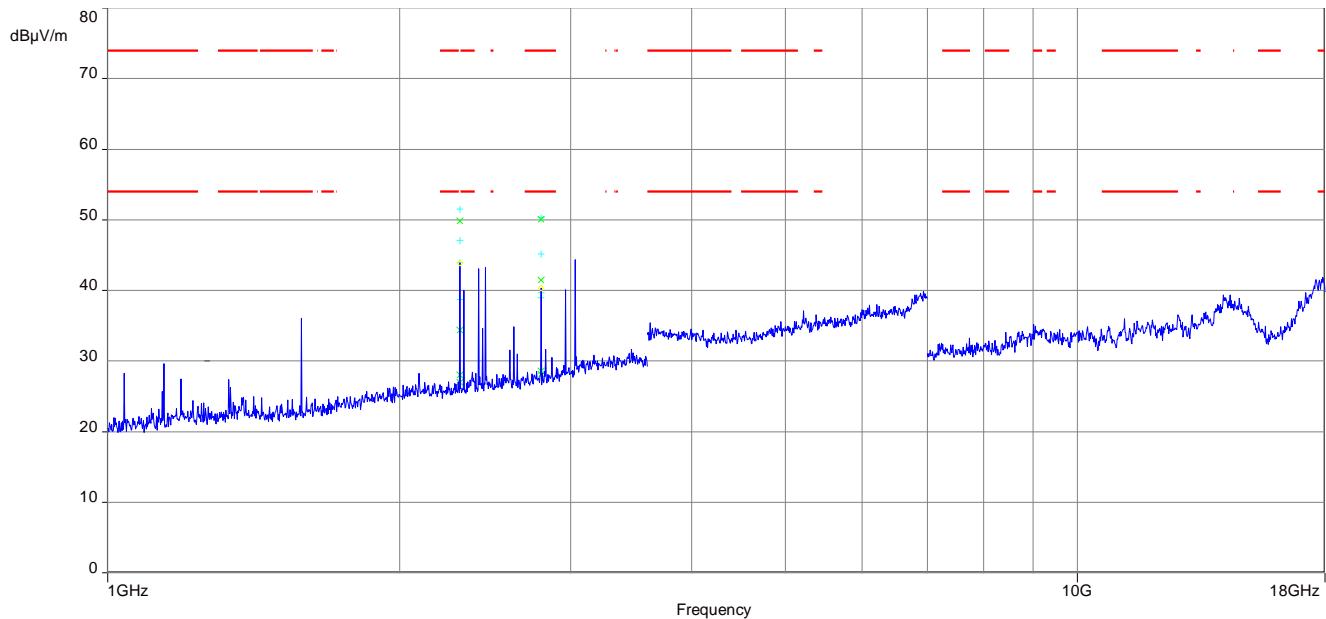
Plot 5: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

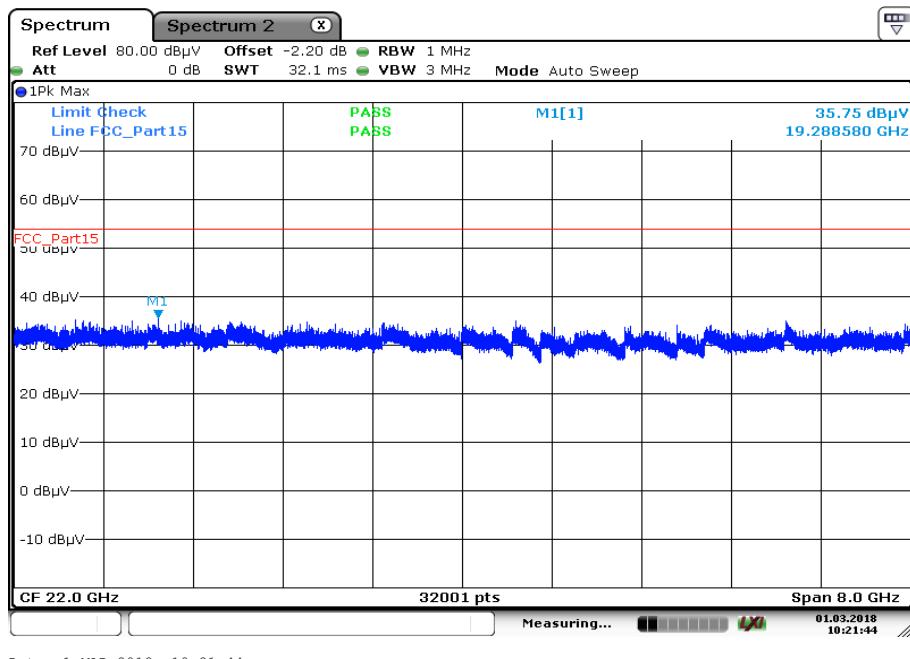
Plot 6: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

Plots: RX / idle mode

Plot 1: 1 GHz to 18 GHz, vertical & horizontal polarization



Plot 2: 18 GHz to 26 GHz, vertical & horizontal polarization



13 Observations

No observations except those reported with the single test cases have been made.

Annex A Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
C	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
OC	Operating channel
OCW	Operating channel bandwidth
OBW	Occupied bandwidth
OOB	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing
FHSS	Frequency hopping spread spectrum

Annex B Document history

Version	Applied changes	Date of release
-/-	Initial release	2018-03-12

Annex C Accreditation Certificate

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p>Accreditation</p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory</p> <p>CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken</p> <p>is competent under the terms of DIN EN ISO/IEC 17025:2005 to carry out tests in the following fields:</p> <p>Telecommunication</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 02.06.2017 with the accreditation number D-PL-12076-01 and is valid until 21.04.2021. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 43 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-03</p> <p>Frankfurt, 02.06.2017 Dirk K. (FH) Rauh, Refer Head of Division</p> <p>See notes overleaf.</p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Spittelmarkt 10 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkkS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu</p>

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkkS or may be received by CTC advanced GmbH on request

<http://www.dakks.de/as/ast/d/D-PL-12076-01-03.pdf>