

Global EMC Inc. Labs

EMC & RF Test Report

As per

RSS 210 Issue 7:2007

&

FCC Part 15 Subpart C: 2008

Unlicensed Intentional Radiators

on the

iVAC RF Module

Raymond Lee Au

Raymond Lee Au
Project Engineer
Global EMC Inc.
180 Brodie Drive, Unit 2
Richmond Hill, ON,
L4B 3K8 Canada
Ph: (905) 883-8189

Testing produced for



See Appendix A for full customer & EUT details.



LAB REGISTRATION #6844A-1

Industry
Canada



FCC REGISTRATION
#612361



Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Table of Contents

Table of Contents.....	2
Report Scope.....	3
Summary	4
Test Results Summary	5
Justifications, Descriptions, or Deviations.....	6
Applicable Standards, Specifications and Methods.....	7
Sample calculation(s).....	8
Document Revision Status	8
Definitions and Acronyms	9
Testing Facility	10
Calibrations and Accreditations.....	10
Testing Environmental Conditions and Dates	11
Detailed Test Results Section	12
Radiated Emissions.....	13
20 dB Bandwidth of Periodically Operated Transmitters.....	24
Radiated Emissions of Fundamental.....	27
Radiated Emissions of Spurious Emissions.....	33
Power Line Conducted Emissions	44
Appendix A – EUT Summary.....	51
Appendix B – EUT and Test Setup Photographs.....	53

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Report Scope

This report addresses the EMC verification testing and test results of the iVAC RF Module, herein referred to as EUT (Equipment Under Test) performed at Global EMC Labs.

The EUT was tested for compliance against the following standards:

RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report.

The results contained in this report relate only to the item(s) tested.

This report does not imply product endorsement by A2LA or any other accreditation agency, any government, or Global EMC Inc.

Opinions/interpretations expressed in this report, if any, are outside the scope of Global EMC Inc accreditation. Any opinions expressed do not necessarily reflect the opinions of Global EMC Inc, unless otherwise stated.

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Summary

The results contained in this report relate only to the item(s) tested.

EUT FCC Certification #, FCC ID:	YCH-IVACRFM
EUT Industry Canada Certification #, IC:	8940A-IVACRFM
EUT Passed all tests performed.	Yes (see test results summary)
Tests conducted by	Raymond Lee Au

Client	MBright Tools IVAC Inc	
Product	iVAC RF Module	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Test Results Summary

Table 1 – Manual Operation

Standard/Method	Description	Class/Limit	Result
FCC 15.203	Antenna Requirement	Unique	Pass See Justification
FCC 15.205 RSS 210 (Table 1)	Restricted Bands for intentional operation	QuasiPeak Average	Pass
FCC 15.207	Power line conducted emissions	QuasiPeak Average	Pass
FCC 15.209 RSS-210 (Table 2)	Intentional / Spurious Radiated emissions	QuasiPeak Average	Pass
FCC 15.231(b) RSS-210 (Table 4)			
FCC 15.231(a) RSS-210 A1.1	Type of transmission	Not a continuous transmissions, voice, video or radio control of toys.	Pass See Justification
FCC 15.231 (a)(1) RSS-210 A1.1.1(a)	Manual transmission Release holdover	< 5 seconds	Pass See Justification
FCC 15.231 (a)(2) RSS-210 A1.1.1(b)	Automatic transmission Transmission time	< 5 seconds	N/A
FCC 15.231 (a)(3) RSS-210 A1.1.1(c)	Predetermined intervals Transmission	None	N/A
FCC 15.231 (a)(3) RSS-210 A1.1.1(c)	Predetermined intervals Transmission Security/Safety	< 2 seconds per hour	N/A
FCC 15.231 (c) RSS-210 A1.1.3	20 dB Bandwidth	< 0.25% of carrier	Pass
Overall Result			PASS

N/A = Not Applicable

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



All tests were performed by Raymond Lee Au.

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a 'PASS' grade. If not 'FAIL' grade will be issued. Note that 'PASS' / 'FAIL' grade is independent of any measurement uncertainties. A 'PASS' / 'FAIL' grade within measurement uncertainty is marked with a '*'.

Justifications, Descriptions, or Deviations

The following justifications for tests not performed or deviations from the above listed specifications apply:

For the Antenna requirement specified in FCC 15.203 (RSS 210 section 5.5), this device is designed with an integral antenna or proprietary antenna connector which meets the requirements of FCC 15.203. The antenna is soldered onto EUT.

For the Restricted Bands of operation as specified in FCC 15.205, the EUT is designed to only operate at 433.92 MHz

For the power line conducted emissions requirements, the EUT is loaded with a resistive load. See *Test Setup Photographs* for picture.

The type of transmission is a data signal sent with a control signal, which complies with the requirements of 15.231(a) / 15.231(e).

The manual transmission is achieved by the user activating a tool powered through the module. A sensor on the module identifies the presence of current flow and transmits an activation signal to the receiver. The manual transmission release holdover time was verified to be for all practical circumstances, instantaneous. This is significantly less than the 5 second requirement.

The EUT transmits a pulse to a receiver unit each time it detects the presence of a current, and another when the current is removed. This transmission does not occur continuously, only enough to signal the receiver of the presence of a current. For the purpose of determining compliance with FCC 15.231(a)(1) or FCC 15.231(a)(2), this transmission is 15.30 milliseconds, and does not transmit for the entire duration of the sensed current.

For 15.231(a)(3) compliance, this device does not transmit at pre-determined intervals. This device requires end-user activation of a connected tool to trigger the transmit function.

EUT is not tested while charging and connected to mains because the unit can only operate and transmit while removed from the charger.

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Applicable Standards, Specifications and Methods

ANSI C63.4:2003 - Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

CFR 47 FCC 15 - Code of Federal Regulations – Radio Frequency Devices

CISPR 22:1997 - Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement

ICES-003:2004 - Digital Apparatus - Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard

ISO 17025:2005 - General Requirements for the competence of testing and calibration laboratories

RSS 210:2007 - Issue 7: Spectrum Management and Telecommunications Policy. Radio Standards Specification Low Power Licence-Exempt Radiocommunication Devices

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Sample calculation(s)

Margin = limit – (received signal + antenna factor + cable loss – pre-amp gain)

Margin = 50.5dBuV/m – (50dBuV + 10dB + 2.5dB – 20dB)

Margin = 8.5 dB

Document Revision Status

Revision 1 - September 2, 2010

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Definitions and Acronyms

The following definitions and acronyms are applicable in this report.
See also ANSI C63.14.

AE – Auxillary Equipment.

BW – Bandwidth. Unless otherwise stated, this is refers to the 6 dB bandwidth.

EMC – Electro-Magnetic Compatibility

EMI – Electro-Magnetic Immunity

EUT – Equipment Under Test

ITE – Information Technology Equipment with a primary function(s) of entry, storage, display, retrieval, transmission, processing, switching, or control, of data.

LISN – Line impedance stabilization network

NCR – No Calibration Required

RF – Radio Frequency

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Testing Facility

Testing for EMC on the EUT was carried out at Global EMC labs in Toronto, Ontario, Canada. The testing lab consists of a 3m semi-anechoic chamber calibrated to be able to allow measurements on an EUT with a maximum width or length of up to 2m and height up to 3m. The chamber is equipped with a turn table that is capable of testing devices up to 3300lb in weight. This facility is capable of testing products that are rated for 120 Vac and 240Vac single phase, or 208 Vac 3 phase input. DC capability is also available. The chamber is equipped with an antenna mast that controls polarization and height from the control room adjoining the shielded chamber. Radiated emissions measurements are performed using a Bilog, and Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN.

Calibrations and Accreditations

The measurement site used is registered with Federal Communications Commission (FCC) and Industry Canada (IC). This site is calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 “Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”. The semi-anechoic chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. All measuring equipment is calibrated on an annual or bi-annual basis as listed for each respective test.

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Testing Environmental Conditions and Dates

Following were the environmental conditions in the facility during time of testing –

Date	Test	Init.	Temperature (°C)	Humidity (%)	Pressure (kPa)
June 22 –29, 2010	All	RA	20-25°C	30-45%	100 -103kPa

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Detailed Test Results Section

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Radiated Emissions

Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

Limit(s) and Method

The method is as defined in ANSI C63.4:2003.

The limits are as defined in FCC Part 15, Section 15.209:

30 MHZ – 88 MHz, 100 uV/m (40.0 dBuV/m¹) at 3 m

88 MHz – 216 MHz, 150 uV/m (43.5 dBuV/m¹) at 3 m

216 MHz – 960 MHz, 200 uV/m (46.4 dBuV/m¹) at 3 m

Above 960 MHz, 500 uV/m (54.0 dBuV/m¹) at 3 m

Above 1000 MHz², 500 uV/m (54 dBuV/m) at 3m


¹Limit is with 120 kHz measurement bandwidth and a using a Quasi Peak detector.

²Limit is with 1 MHz measurement bandwidth and using an Average detector

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Typical Radiated Emissions Setup

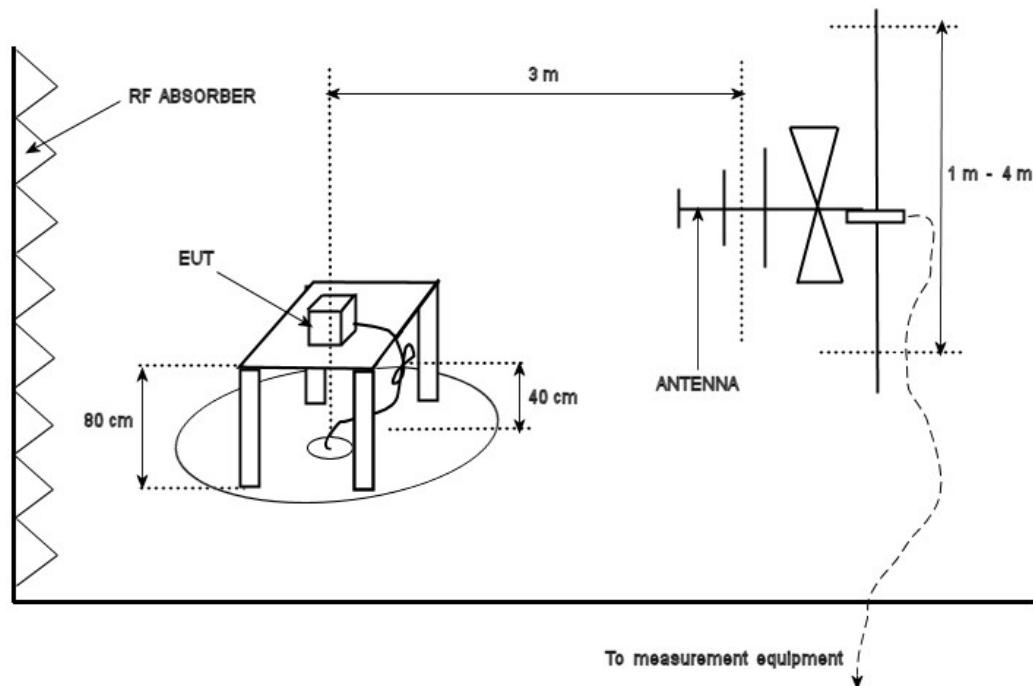

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is +/-4.4 dB with a 'k=2' coverage factor and a 95% confidence level.

Preliminary Graphs

Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector, please refer to the final measurement table where applicable. The graph shown below is a maximized peak measurement graph, measured with a resolution bandwidth greater than the final required detector and over a full 0-360° rotation. This peaking process is done as a worst case measurement. This process enables the detection of frequencies of concern for final measurement, and provides considerable time savings.


In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to a minimum of a 1 GHz.

Devices scanned above 1GHz may be scanned at 1 meter test distance, and in accordance with FCC Part 15, Subpart A, Section 15.31, an extrapolation factor of 20 dB/decade was used. For example for 1 meter measurements, an extrapolation factor 9.5 dB from 20 Log (1m / 3m) is applied.


Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008




Vertical – Peak Emissions Graphs

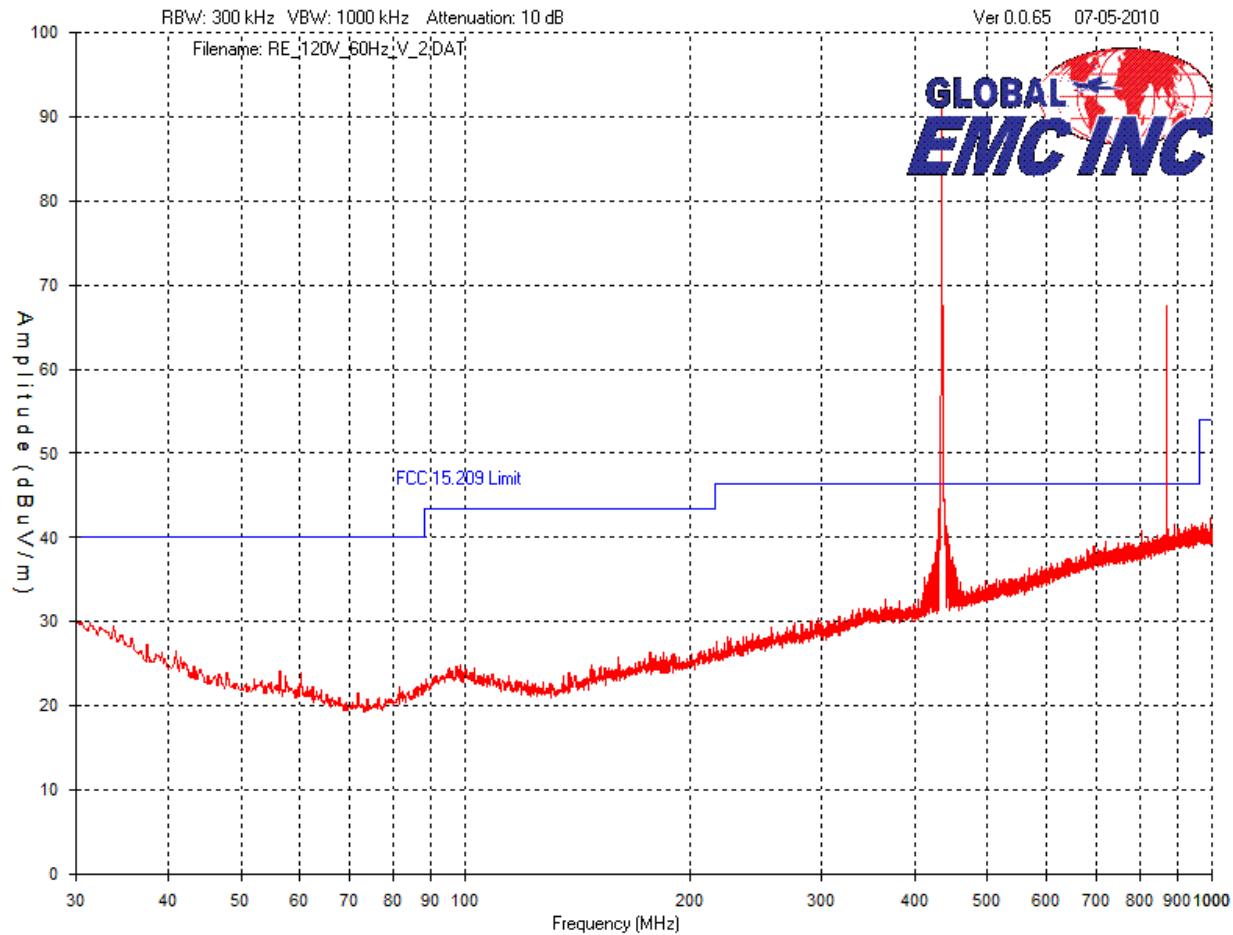

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

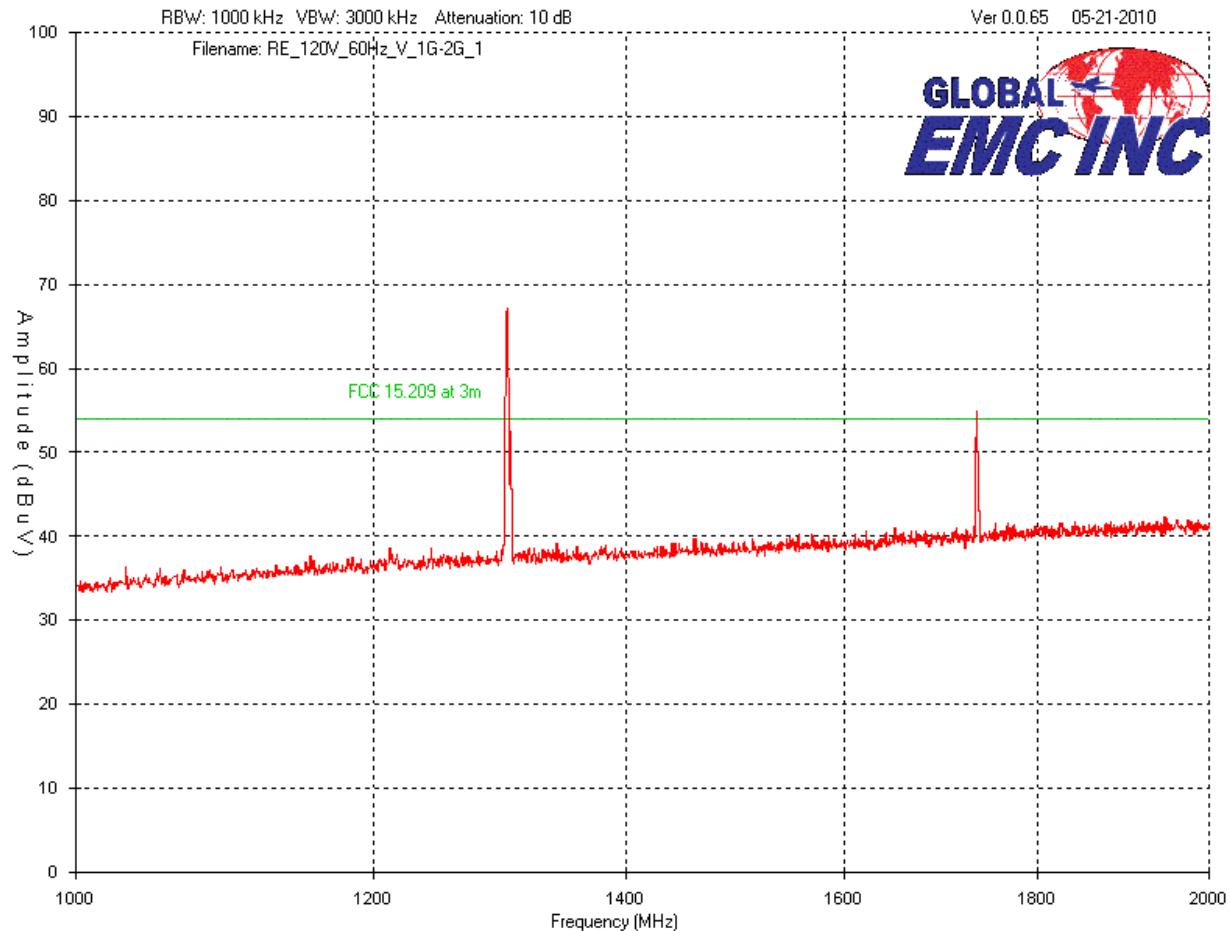


Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

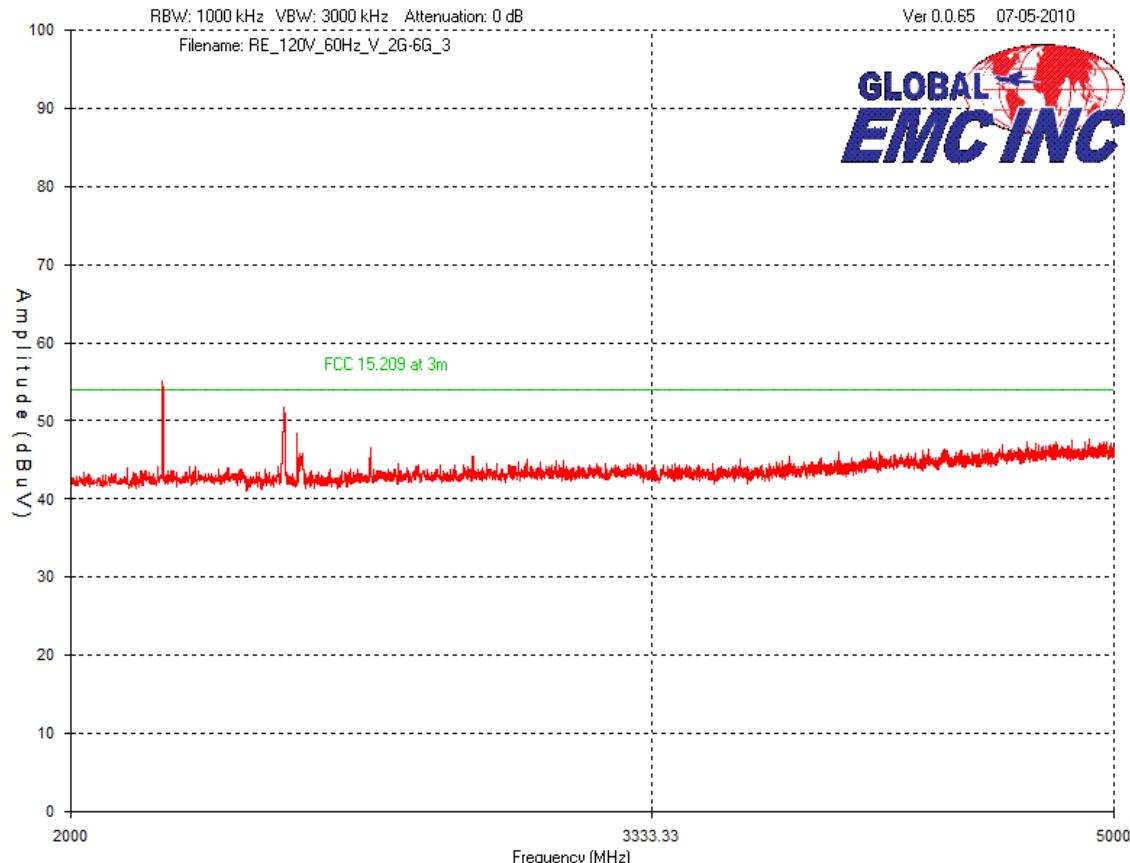


Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008




Horizontal – Peak Emissions Graphs

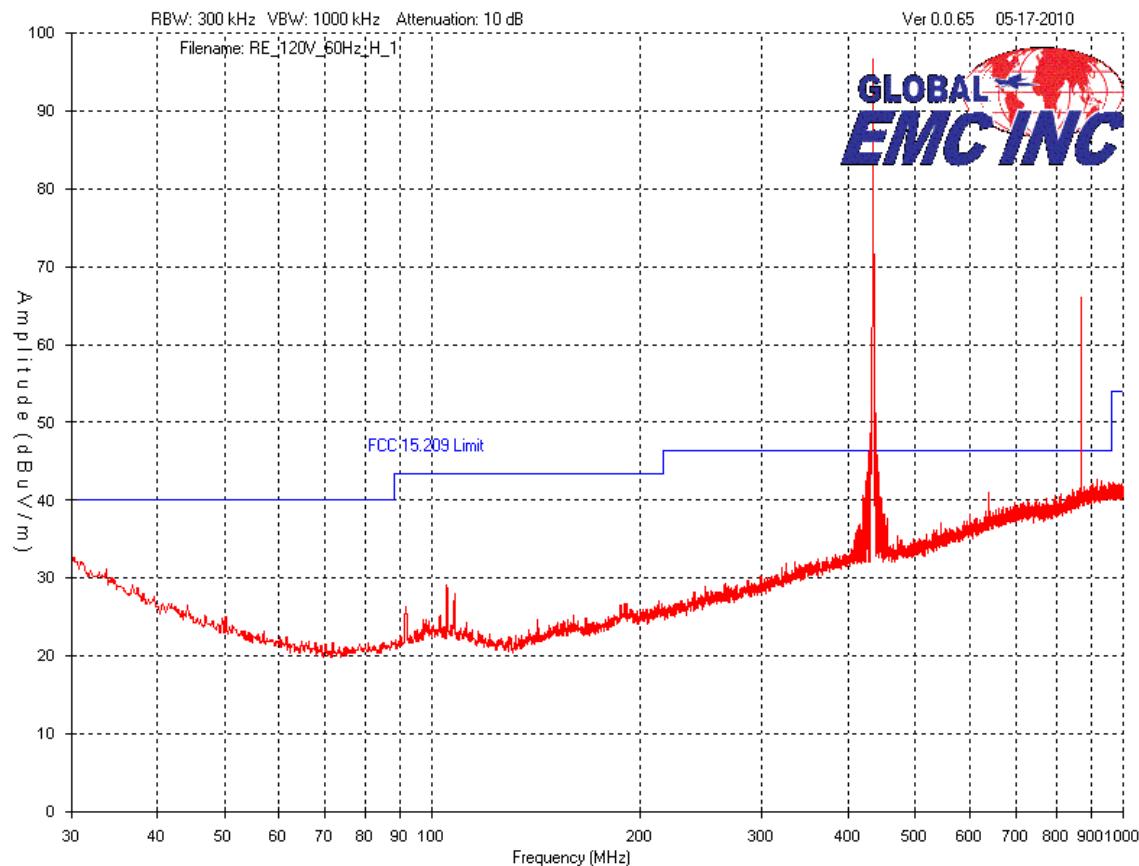

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

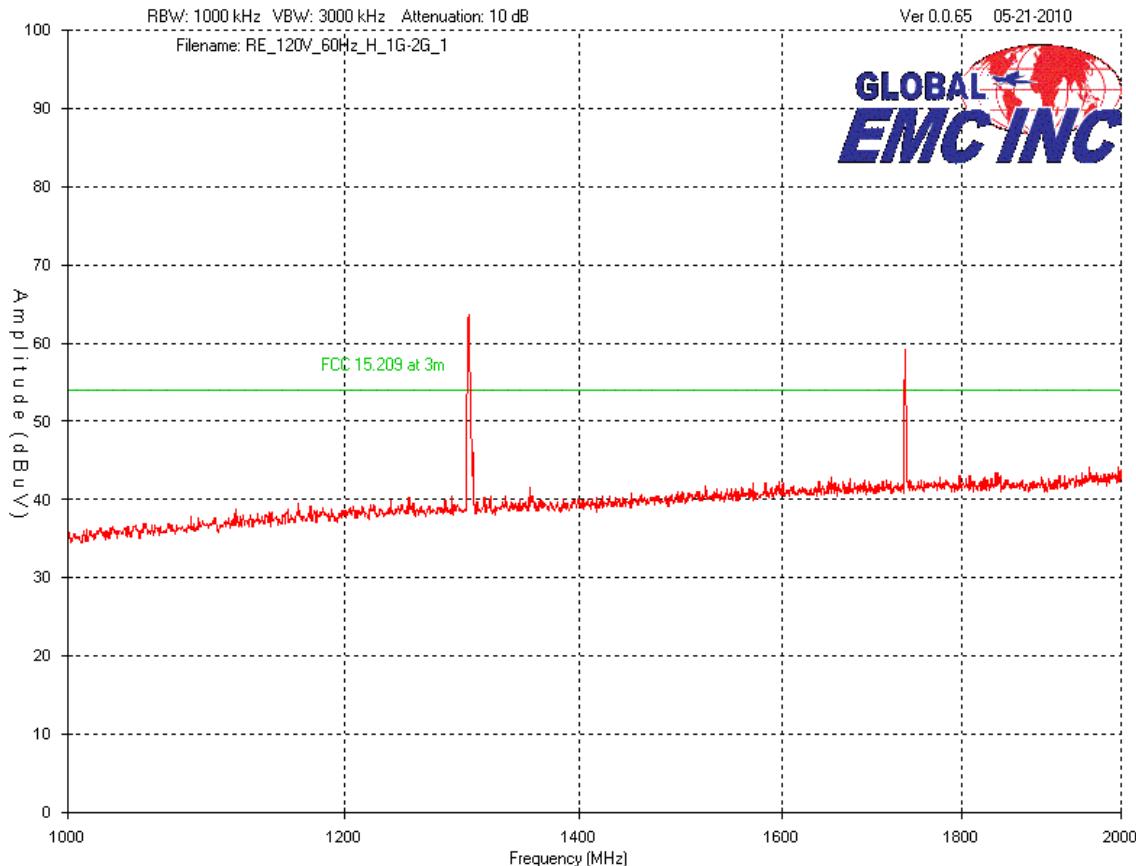

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

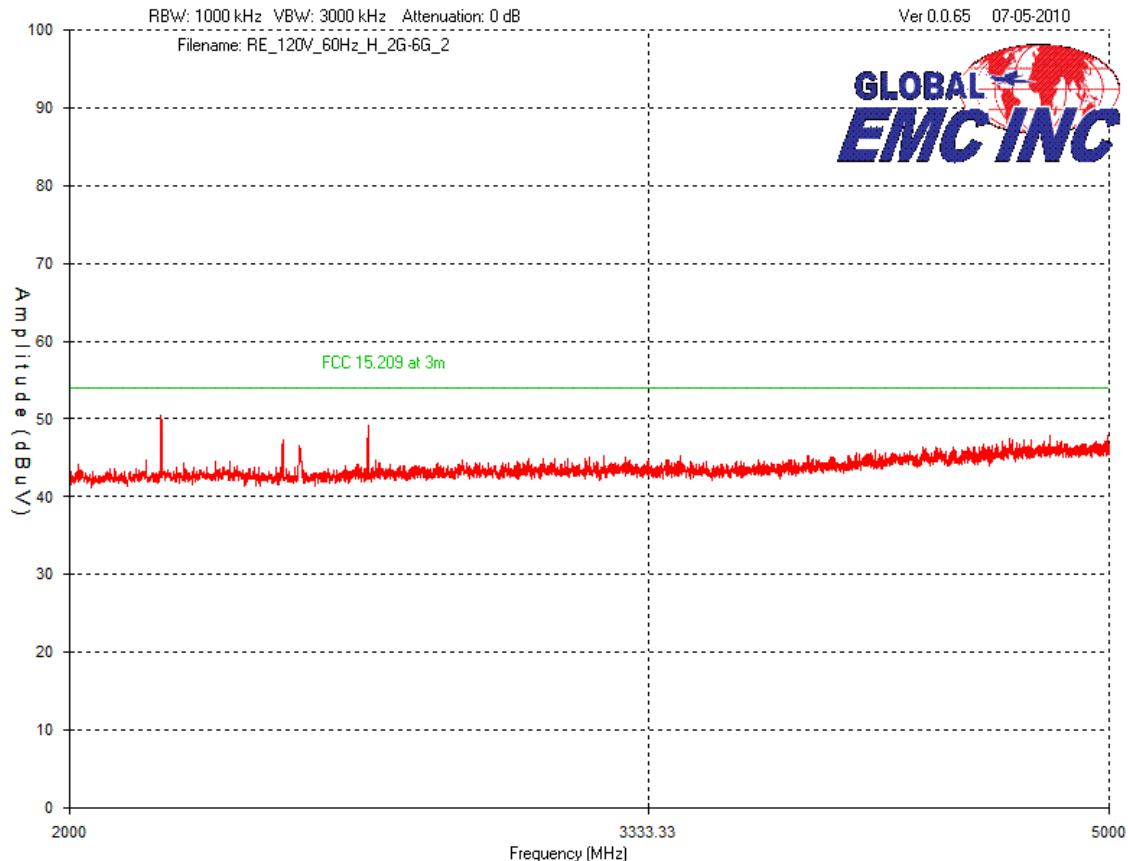

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Final Measurements

All emissions meet the limits of spurious emissions in 15.231 (b). According to 15.231 (b)(3), it may meet whichever limit of 15.231 (b) or 15.209 permits a higher field strength, and so complies with the requirements of this standard.

The fundamental was measured to be 95.1 dBuV/m at 3 meters.

No emissions (other than harmonics of the fundamental) were detected above the limits.

Client	MBright Tools IVAC Inc	
Product	iVAC RF Module	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
IFR Spectrum Analyzer	AN940	IFR	12/29/2009	12/29/2011	GEMC 6350
BiLog Antenna	3142-C	ETS	02/12/2009	02/12/2011	GEMC 8
Q-Par 1.5-18 GHz Horn	6878/24	Q-par	8/25/2008	8/25/2010	GEMC 65
Attenuator 3 dB	FP-50-3	Trilithic	NCR	NCR	GEMC 40
Attenuator 10 dB	FP-50-10	Trilithic	NCR	NCR	GEMC 42
Schaffner Preamp 9kHz - 2 GHz	CPA9231A	Schaffner	8/26/2008	8/26/2010	GEMC 116
1-26G pre-amp	HP 8449B	HP	2009-08-25	2010-08-25	GEMC 68
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 31

This report module is based on GEMC template "FCC - 15.209 - Radiated Emissions_Rev1.doc"

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



20 dB Bandwidth of Periodically Operated Transmitters

Purpose

The purpose of this test is to ensure that the bandwidth occupied does not exceed a stated minimum. This helps ensure the utilization of the frequency allocation is sufficiently narrow and not occupying excessive spectrum. This also helps prevent the accidental interference of data by ensuring adequate data separation to distinguish the reception of the intended information by enabling the receiver to have a relatively narrow band response tuned to the transmitter's frequency.

Limits

The Limit is as specified in FCC Part 15 and RSS 210.

For periodic transmitters below 900 MHz, this should not exceed 0.25 % of the fundamental frequency. For periodic transmitters above 900 MHz, this should not exceed 0.5 % of the fundamental frequency. This should be measured with a RBW equal to approximately 1% of the 20 dB BW of the signal and a VBW > than the RBW.

Results


The EUT passed. The 20 dB BW measured was 520 kHz and the requirement was that this be less than 1.08 MHz.

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Graph(s)

The graph shown below shows the channel spacing during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is approximately 1 % of the 20 dB BW during operation of the EUT. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute. Markers are set at 20 dB below peak.

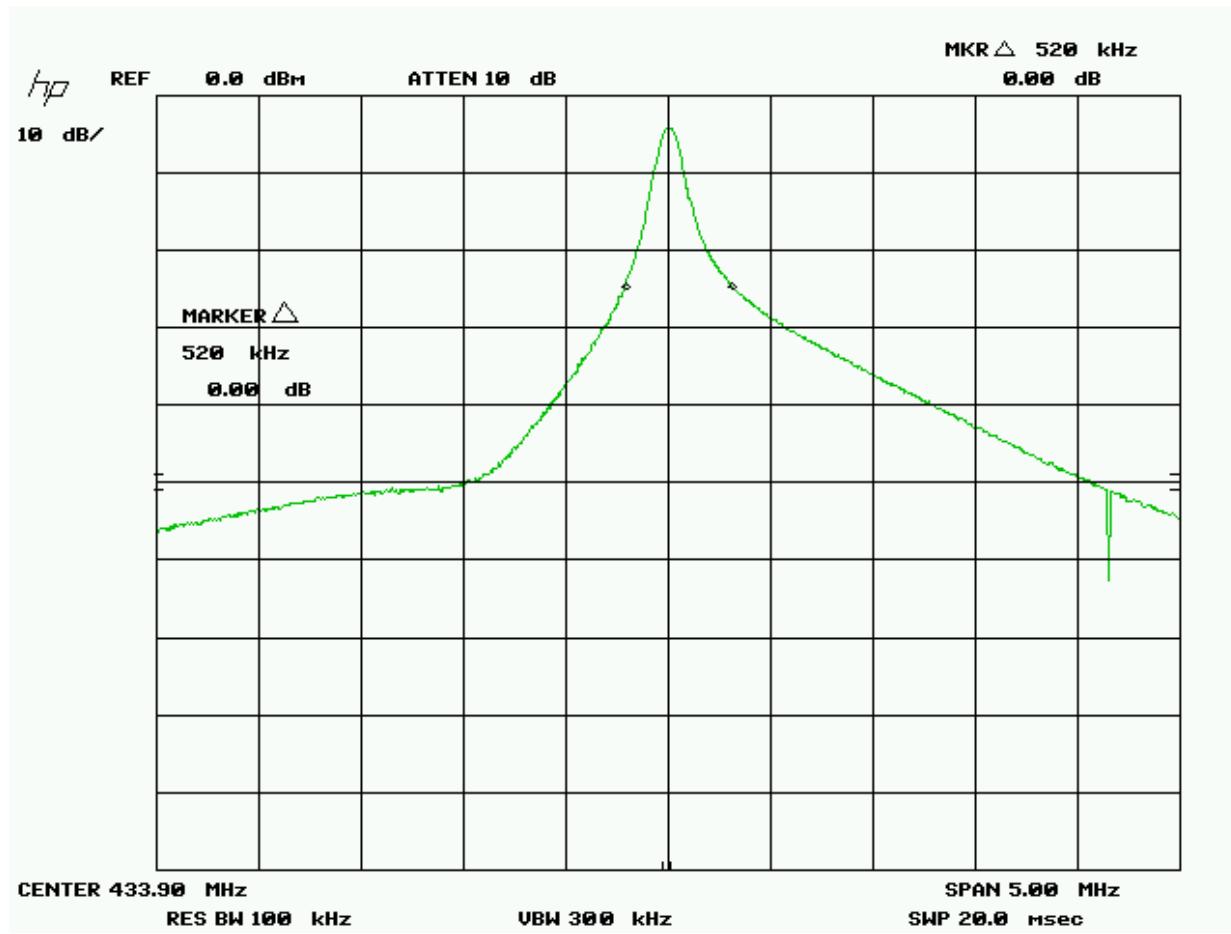

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	MBright Tools IVAC Inc	
Product	iVAC RF Module	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Attenuator 10 dB	FP-50-10	Trilithic	NCR	NCR	GEMC 42
IFR Spectrum Analyzer	AN940	IFR	12/29/2009	12/29/2011	GEMC 6350
BiLog Antenna	3142-C	ETS	2009-02-12	2011-02-12	GEMC 8
Schaffner Preamp 9kHz - 2 GHz	CPA9231A	Schaffner	8/26/2008	8/26/2010	GEMC 116
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
Power Attenuator 20 dB	25-A-FFN-20	Bird / Hutton	NCR	NCR	GEMC 49

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B_Rev1"

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Radiated Emissions of Fundamental

Purpose

The purpose of this test is to ensure that the RF energy intentionally emitted from the EUT does not exceed the limit listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect other periodic operating devices, and licensed broadcasting devices, and so on, from unwanted interference.

Limit(s) and Method

The method is as defined in ANSI C63.4:2003.

The limits are as defined in FCC Part 15, Section 15.231 (b), and is specific for the one frequency for the fundamental transmit frequency.


433.95 MHz – 80.8 dBuV/m¹.

¹Based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector.

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Typical Radiated Emissions Setup

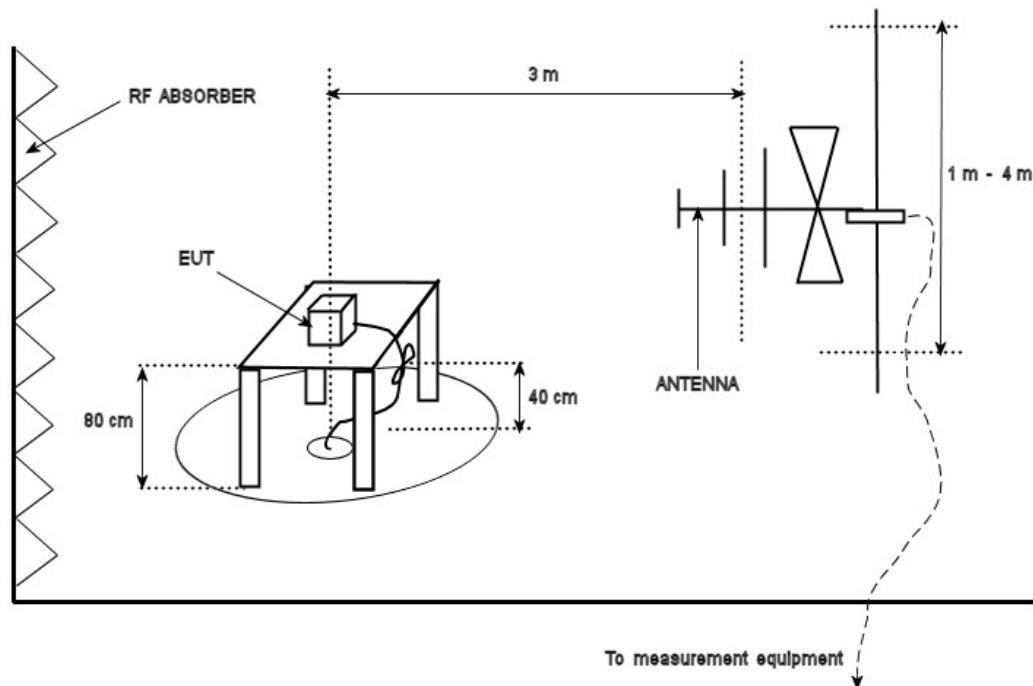

Client	MBright Tools IVAC Inc	
Product	iVAC RF Module	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is +/-4.4 dB with a 'k=2' coverage factor and a 95% confidence level.

Final Measurements


Test Freq. (MHz)	Detection mode (Q-Peak)	Antenna polarity (Horz/Vert)	Raw signal dB(µV)	Antenna factor dB	Cable loss dB + Pre-selecter	Atten. dB	Pre-Amp Gain dB	Received signal dB(µV/m)	Emission limit dB(µV/m)	Margin dB(µV)	Result
433.95	Peak	Horz	98.3	17.3	0.7	10.0	31.2	95.1	100.8	5.7	PASS
433.95	Avg	Horz	82.0	17.3	0.7	10.0	31.2	78.8	80.8	2.0	PASS
433.95	Peak	Vert	96.6	16.2	0.7	10.0	31.2	92.3	100.8	8.5	PASS
433.95	Avg	Vert	80.3	16.2	0.7	10.0	31.2	76.0	80.8	4.8	PASS

The device complies with the requirement. A worst case measurement of 95.1 dBuV/m peak was obtained at 3 meters at a center frequency of 433.9 MHz in the horizontal polarity. The averaging factor was calculated from an ON time of 15.3ms per pulse using $20\log(15.3\text{ms}/100\text{ms}) = -16.3\text{dB}$. The Calculated Average is therefore $95.1-16.3=78.8\text{dBuV/m}$. The limit is 80.8dBuV/m.

This is passing with 2.0 dB of margin to the requirement.


See spurious emissions section for related graphs.

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

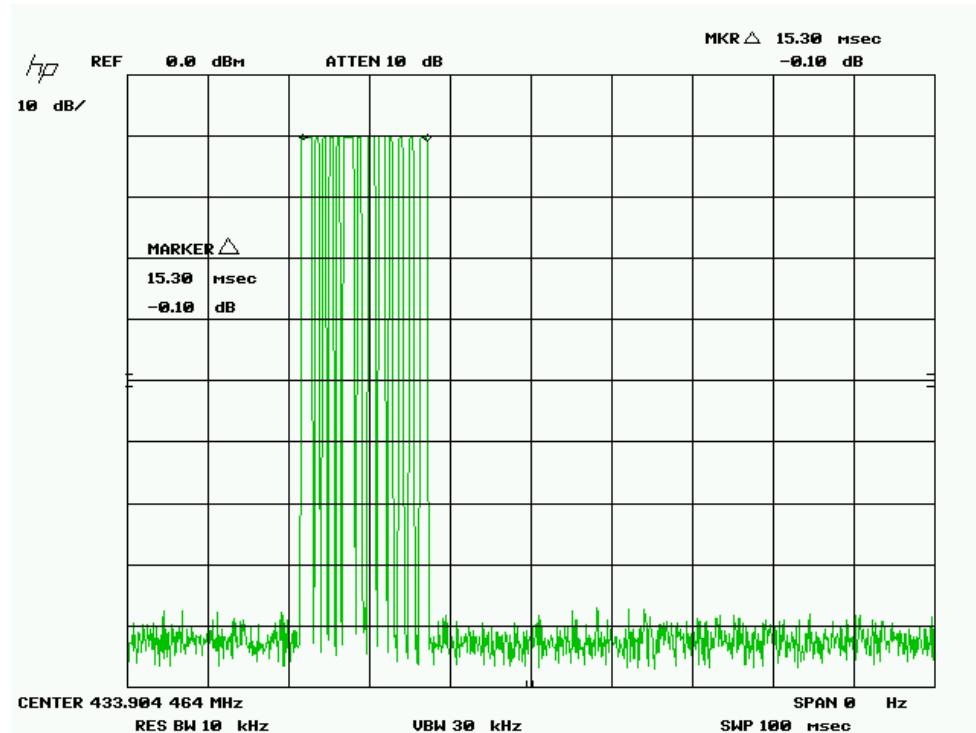

Screen capture of pulse width.

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

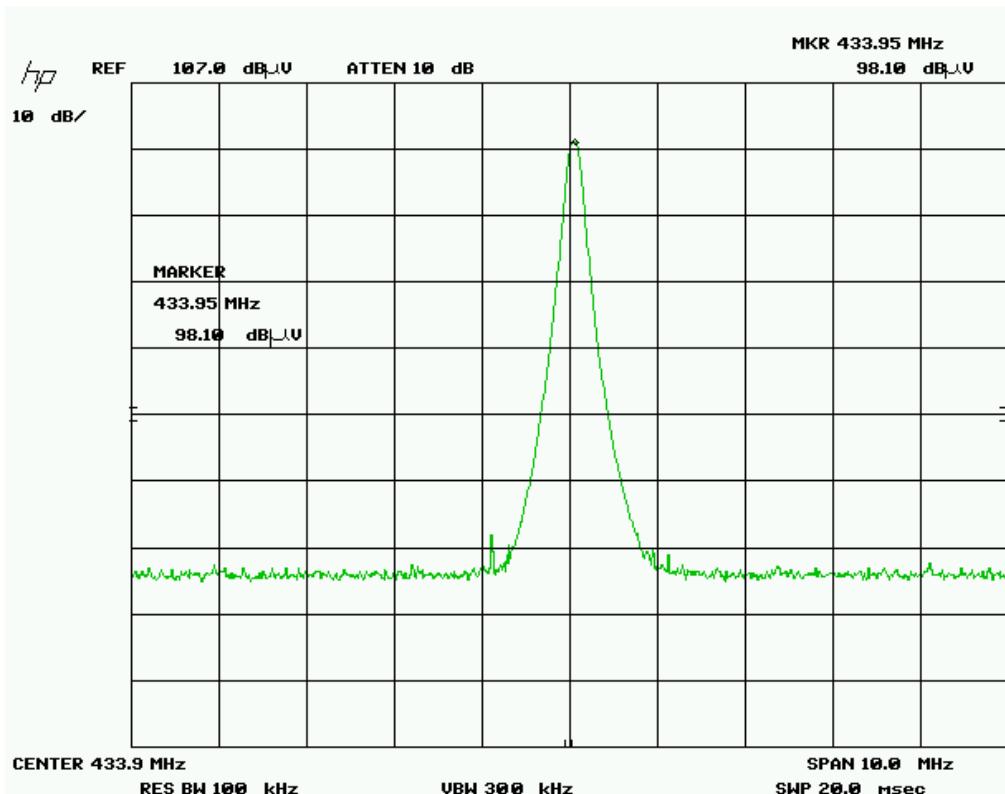

Screen capture of fundamental emission

Client	MBright Tools IVAC Inc	
Product	iVAC RF Module	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
IFR Spectrum Analyzer	AN940	IFR	2009-12-29	2011-12-29	GEMC 6350
BiLog Antenna	3142-C	ETS	2009-02-12	2011-02-12	GEMC 8
Attenuator 10 dB	FP-50-10	Trilithic	NCR	NCR	GEMC 42
Schaffner Preamp 9kHz - 2 GHz	CPA9231A	Schaffner	2008-08-26	2010-08-26	GEMC 116
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 31

This report module is based on GEMC template "FCC - 15.209 - Radiated Emissions_Rev1.doc"

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Radiated Emissions of Spurious Emissions

Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

Limit(s) and Method

The method is as defined in ANSI C63.4:2003.

The limits are as defined in FCC Part 15, Section 15.231 (b), and 15.209 (a) in the frequency ranges specified in 15.205 (a), whichever limit permits the higher field strength. The tables below show the values of these limits.

FCC 15.231 (b) Emission Limits:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66–40.70	2,250	225
70–130	1,250	125
130–174	¹ 1,250 to 3,750	¹ 125 to 375
174–260	3,750	375
260–470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

¹Linear interpolations.

(1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



FCC 15.205 (a) Restricted Frequency Bands:

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	(²)
13.36–13.41			

¹Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.

²Above 38.6

FCC 15.209 (a) Emission Limits


Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Note: A peak limit that is 20 dB higher than the limits specified above applies.

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Typical Radiated Emissions Setup

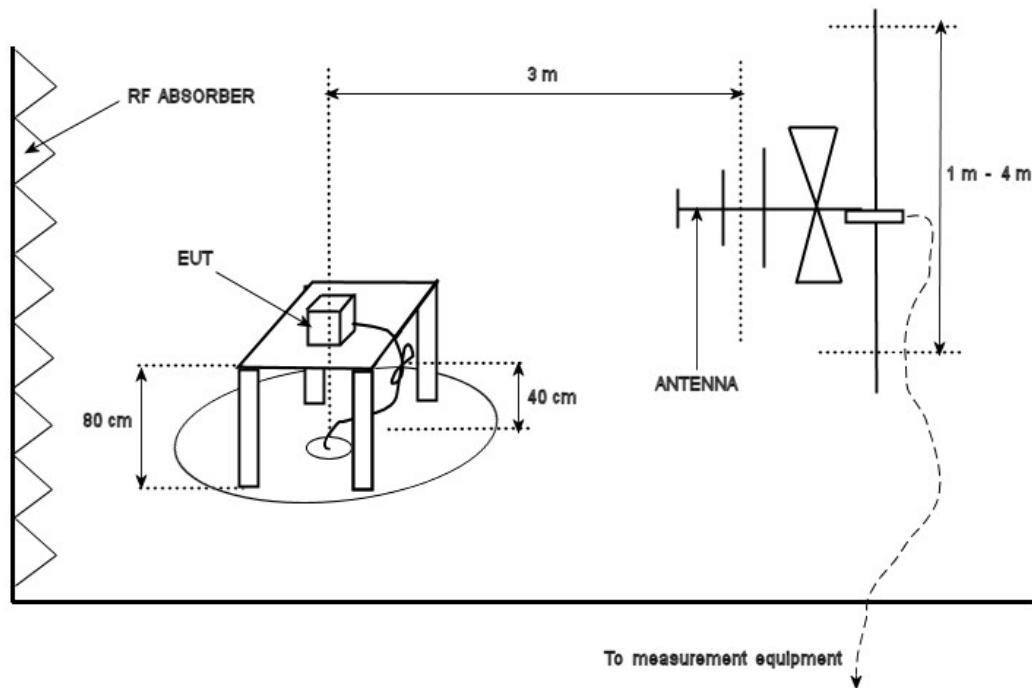

Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is +/-4.4 dB with a 'k=2' coverage factor and a 95% confidence level.

Preliminary Graphs


Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector, please refer to the final measurement table where applicable. The graph shown below is a maximized peak measurement graph, measured with a resolution bandwidth greater than the final required detector and over a full 0-360° rotation. This peaking process is done as a worst case measurement. This process enables the detection of frequencies of concern for final measurement, and provides considerable time savings.

In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to a minimum of a 4.4 GHz.


Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008




Vertical – Peak Emissions Graphs

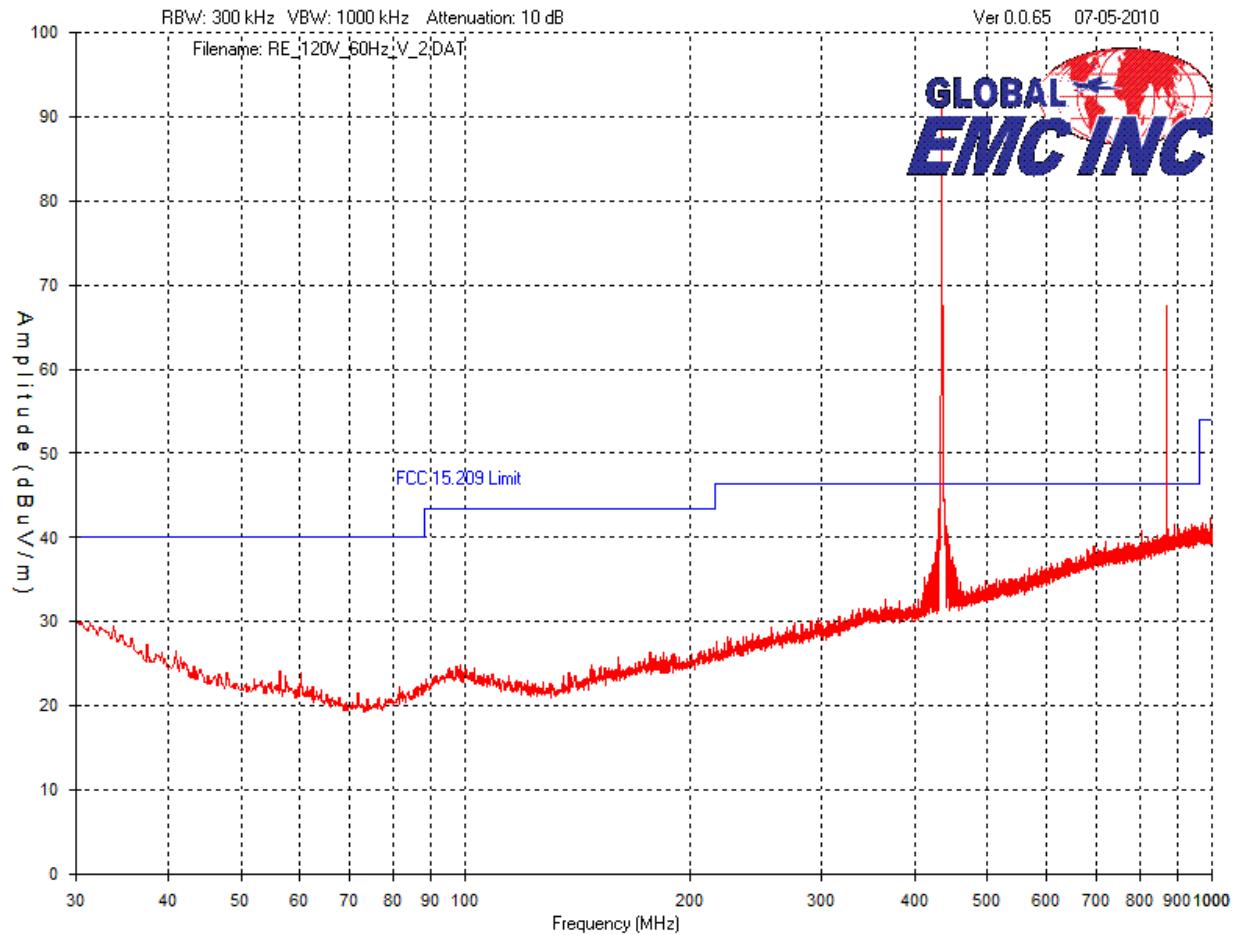

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

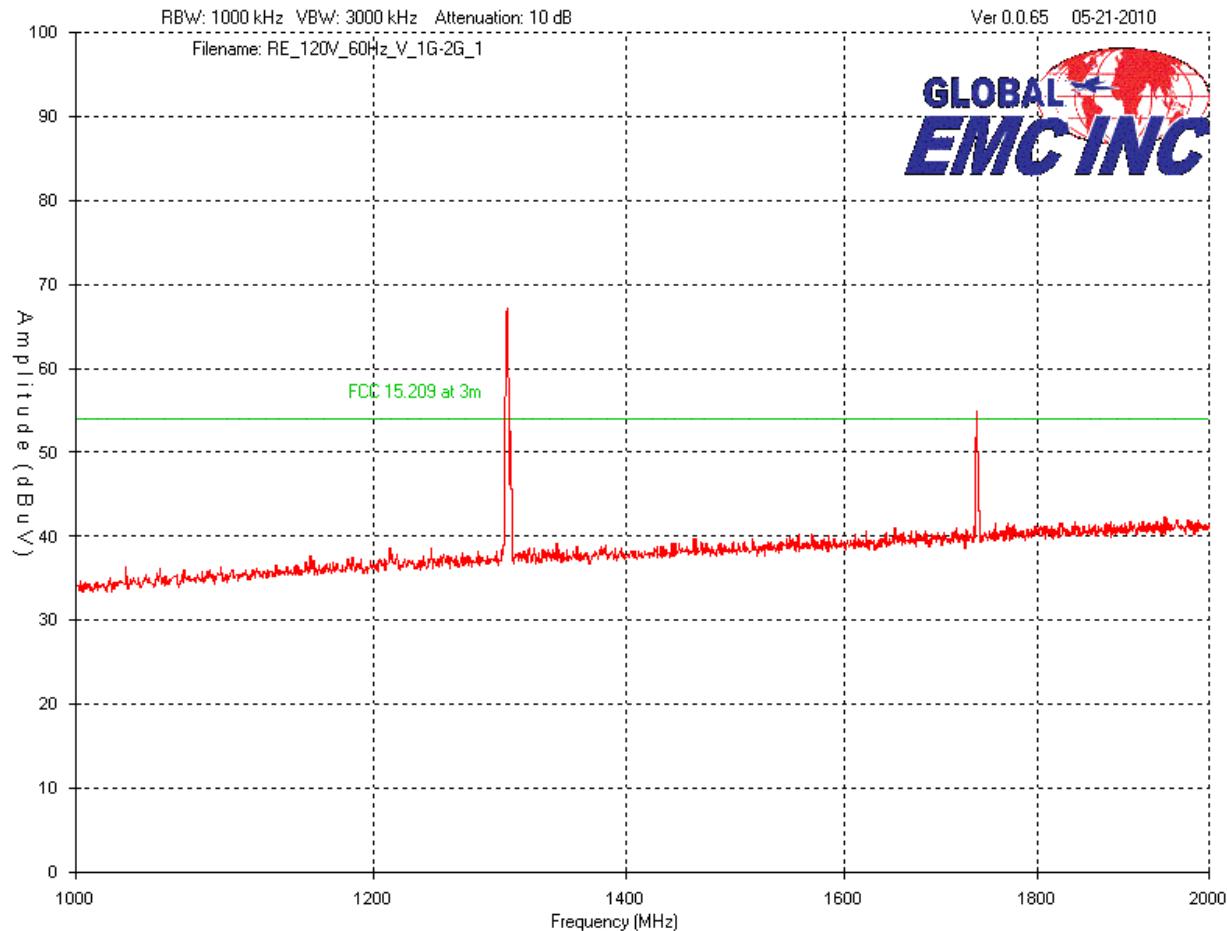


Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

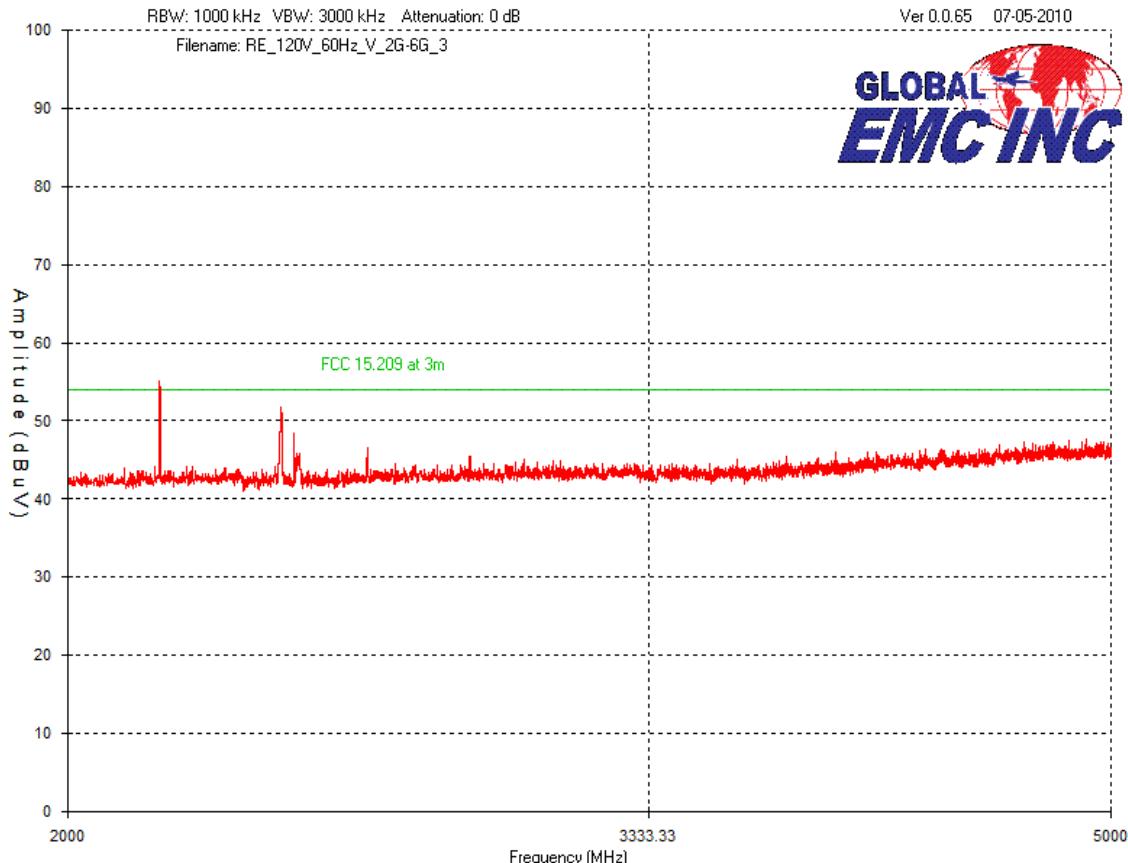


Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008




Horizontal – Peak Emissions Graph

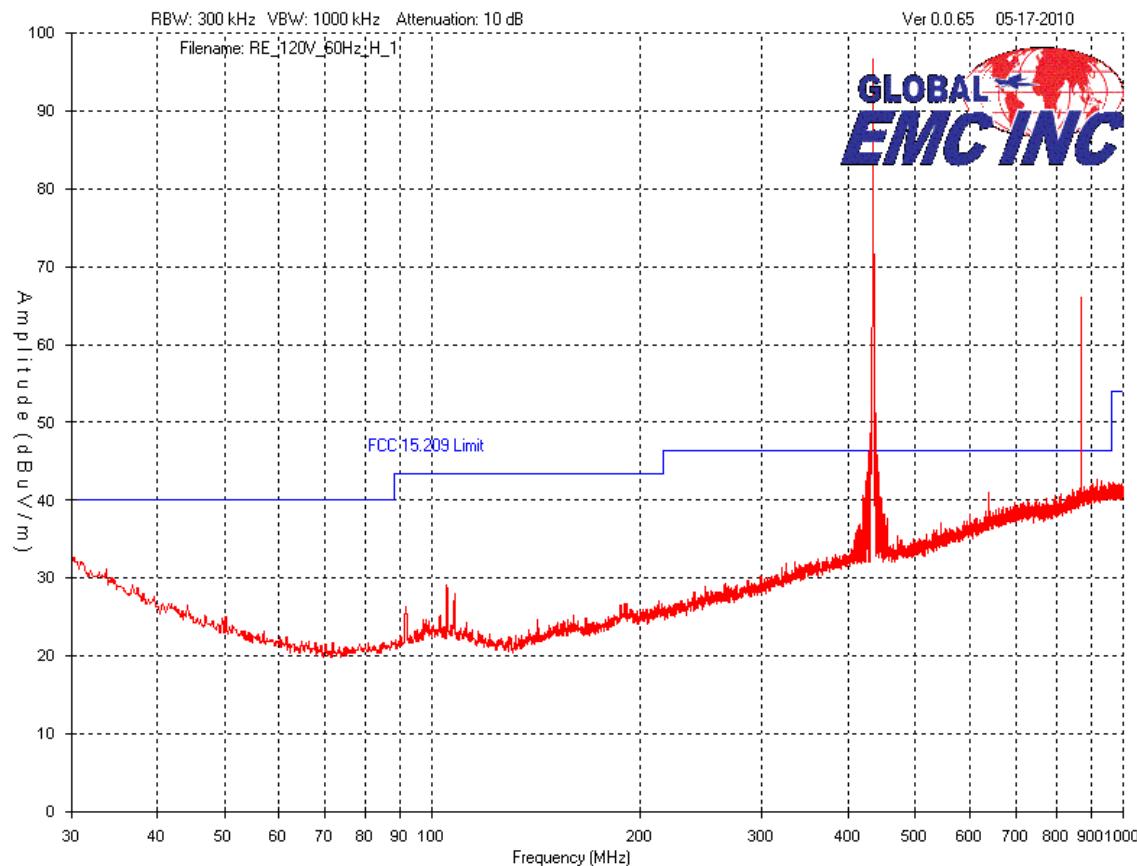

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

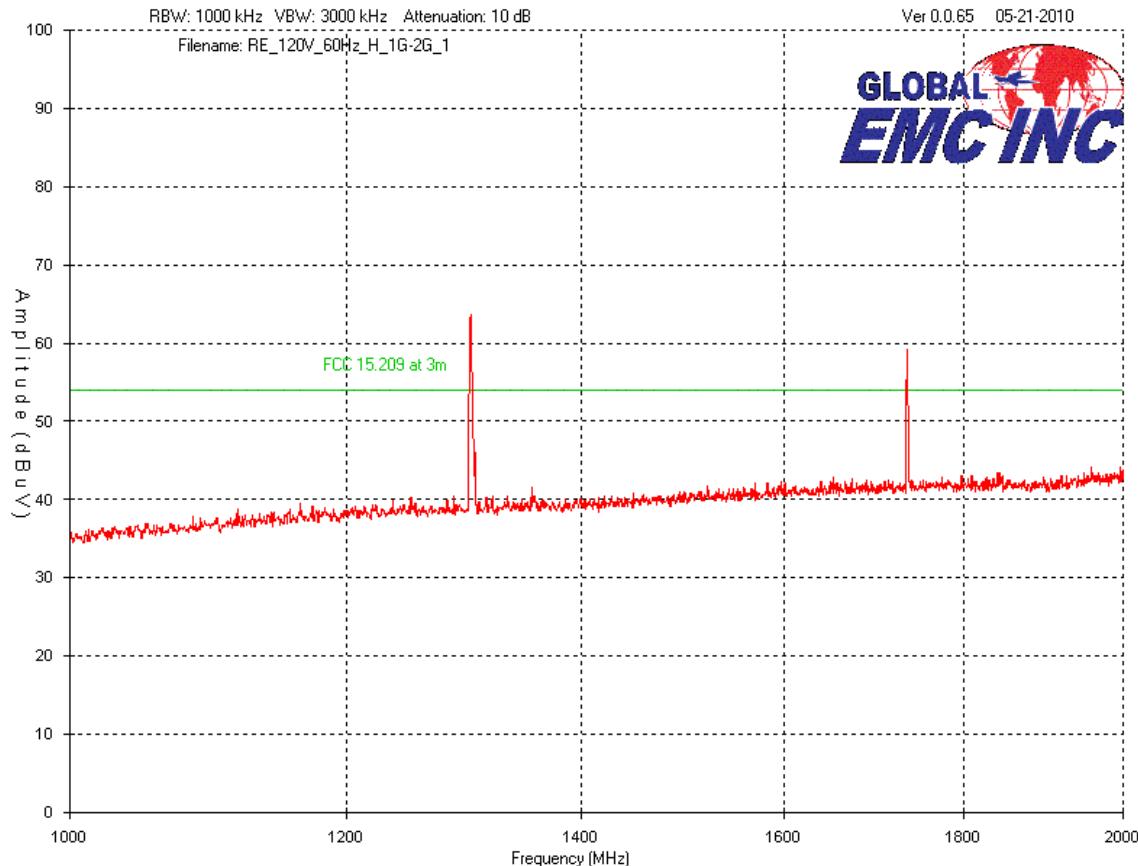

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

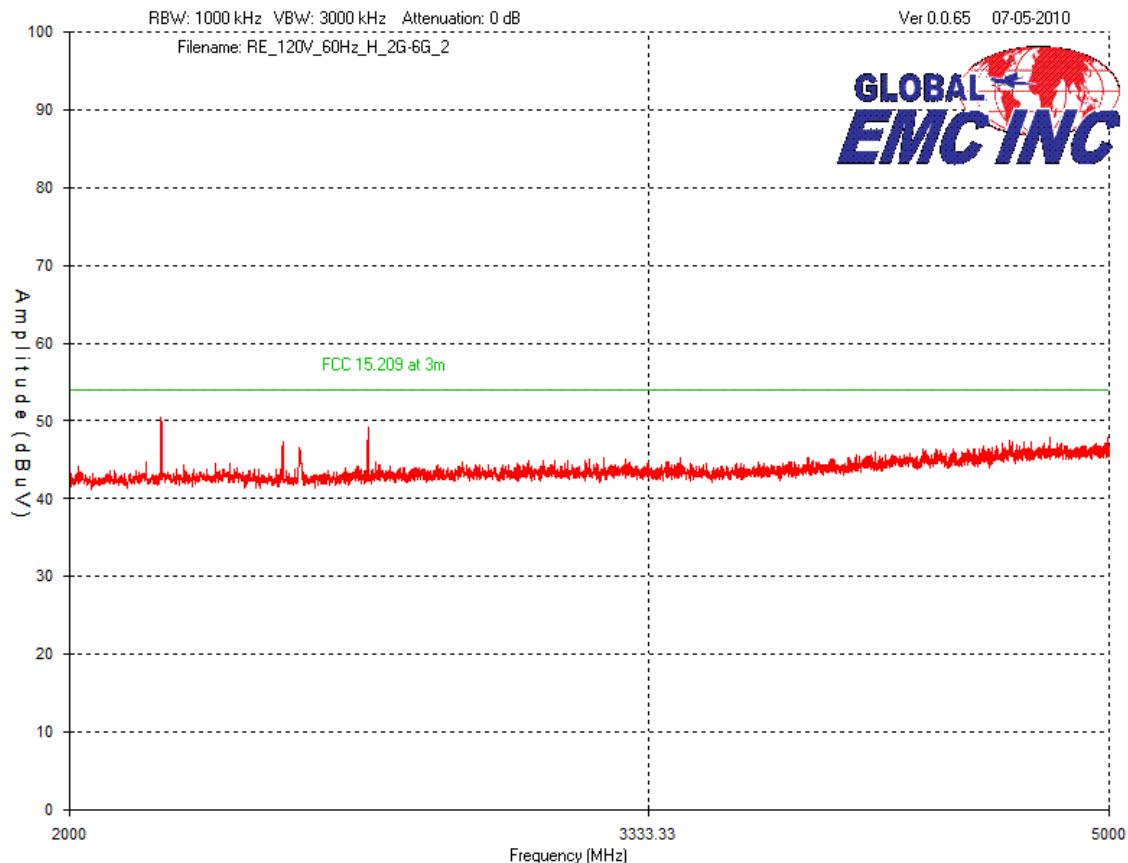

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Final Measurements

Test Frequency (MHz)	Detection mode (Q-Peak)	Antenna polarity (Horz/Vert)	Raw signal dB(µV)	Antenna factor dB	Cable loss dB + Pre-selector	Attenuator dB	Pre-Amp Gain dB	Received signal dB(µV/m)	Emission limit dB(µV/m)	Margin dB(µV)	Result
867.8	Peak	Horz	67.7	23.2	1.3	10.0	30.3	71.9	80.8	8.9	PASS
867.8	Avg	Horz	51.4	23.2	1.3	10.0	30.3	55.6	60.8	5.2	PASS
867.8	Peak	Vert	68.4	22.2	1.3	10.0	30.3	71.6	80.8	9.2	PASS
867.8	Avg	Vert	52.1	22.2	1.3	10.0	30.3	55.3	60.8	5.5	PASS
1301	Peak	Horz	66.7	27.1	2.5	10.0	37.0	69.3	80.0	10.7	PASS
1301	Avg	Horz	50.4	27.1	2.5	10.0	37.0	53.0	60.8	7.8	PASS
1301	Peak	Vert	69.1	25.7	2.5	10.0	37.0	70.3	80.8	10.5	PASS
1301	Avg	Vert	52.8	25.7	2.5	10.0	37.0	54.0	60.8	6.8	PASS
1732	Peak	Vert	52.8	28.0	2.9	10.0	36.5	57.2	80.8	23.6	PASS
1732	Avg	Vert	36.5	28.0	2.9	10.0	36.5	40.9	60.8	19.9	PASS
1732	Peak	Horz	54.8	29.5	2.9	10.0	36.5	60.7	80.0	19.3	PASS
1732	Avg	Horz	38.5	29.5	2.9	10.0	36.5	44.4	60.8	16.4	PASS
2169	Peak	Horz	48.5	30.4	3.2	10.0	36.2	55.9	80.8	24.9	PASS
2169	Avg	Horz	32.2	30.4	3.2	10.0	36.2	39.6	60.8	21.2	PASS
2165	Peak	Vert	49.1	30.4	3.2	10.0	36.2	56.5	80.8	24.3	PASS
2165	Avg	Vert	32.8	30.4	3.2	10.0	36.2	40.2	60.8	20.6	PASS

Note: Average measurements are shown by applying a duty cycle correction factor, as reported previously in this test report, to the peak data.

Client	MBright Tools IVAC Inc	
Product	iVAC RF Module	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
IFR Spectrum Analyzer	AN940	IFR	12/29/2009	12/29/2011	GEMC 6350
BiLog Antenna	3142-C	ETS	2009-02-12	2011-02-12	GEMC 8
Q-Par 1.5-18 GHz Horn	6878/24	Q-par	8/25/2008	8/25/2010	GEMC 65
Attenuator 3 dB	FP-50-3	Trilithic	NCR	NCR	GEMC 40
Attenuator 10 dB	FP-50-10	Trilithic	NCR	NCR	GEMC 42
Schaffner Preamp 9kHz - 2 GHz	CPA9231A	Schaffner	8/26/2008	8/26/2010	GEMC 116
1-26G pre-amp	HP 8449B	HP	2009-08-25	2010-08-25	GEMC 68
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 31

This report module is based on GEMC template "FCC - 15.209 - Radiated Emissions_Rev1.doc"

Client	MBright Tools IVAC Inc	
Product	iVAC RF Module	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Power Line Conducted Emissions

Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT's power line does not exceed the limits listed below as defined in the applicable test standard, as measured from a LISN. This helps protect lower frequency radio services such as AM radio, shortwave radio, amateur radio operators, maritime radio, CB radio, and so on, from unwanted interference.

Limits & Method

The limits are as defined in 47 CFR FCC Part 15 Section 15.207

Method is as defined in ANSI C64:2003

Average Limits		QuasiPeak Limits	
150 kHz – 500 kHz	56 to 46 dBuV	150 kHz – 500 kHz	66 to 56 dBuV
500 kHz – 5 MHz	46 dBuV	500 kHz – 5 MHz	56 dBuV
5 MHz – 30 MHz	50 dBuV	500 kHz – 30 MHz	60 dBuV

The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.


Note: If the Peak or Quasi Peak detector measurements do not exceed the Average limits, then the EUT is deemed to have passed the requirements.

Both limits are applicable, and each is specified as being measured with a 9 kHz measurement bandwidth.

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Typical Setup Diagram

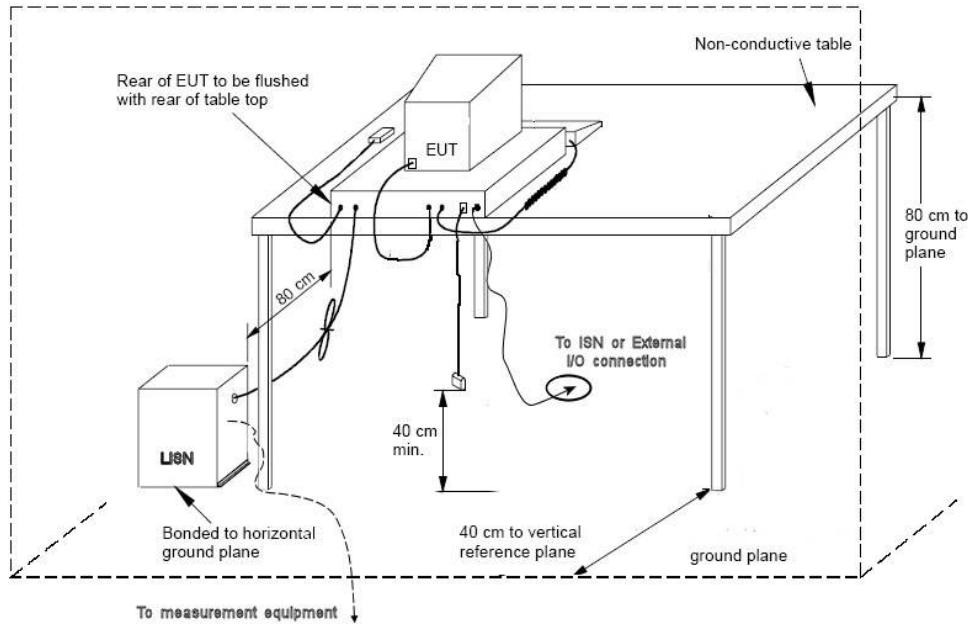

Note: The vertical reference plane is optional as per ANSI C63.4 section 5.2.2

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is +/-3.6 dB with a 'k=2' coverage factor and a 95% confidence level.


Preliminary Graphs

Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector where applicable, please refer to the table. The graph shown below is a peak measurement graph, measured with a resolution bandwidth greater than or equal to the final required detector. These graphs are performed as a worst case measurement to enable the detection of frequencies of concern and for considerable time savings.

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008




120V, 60Hz
Phase Line

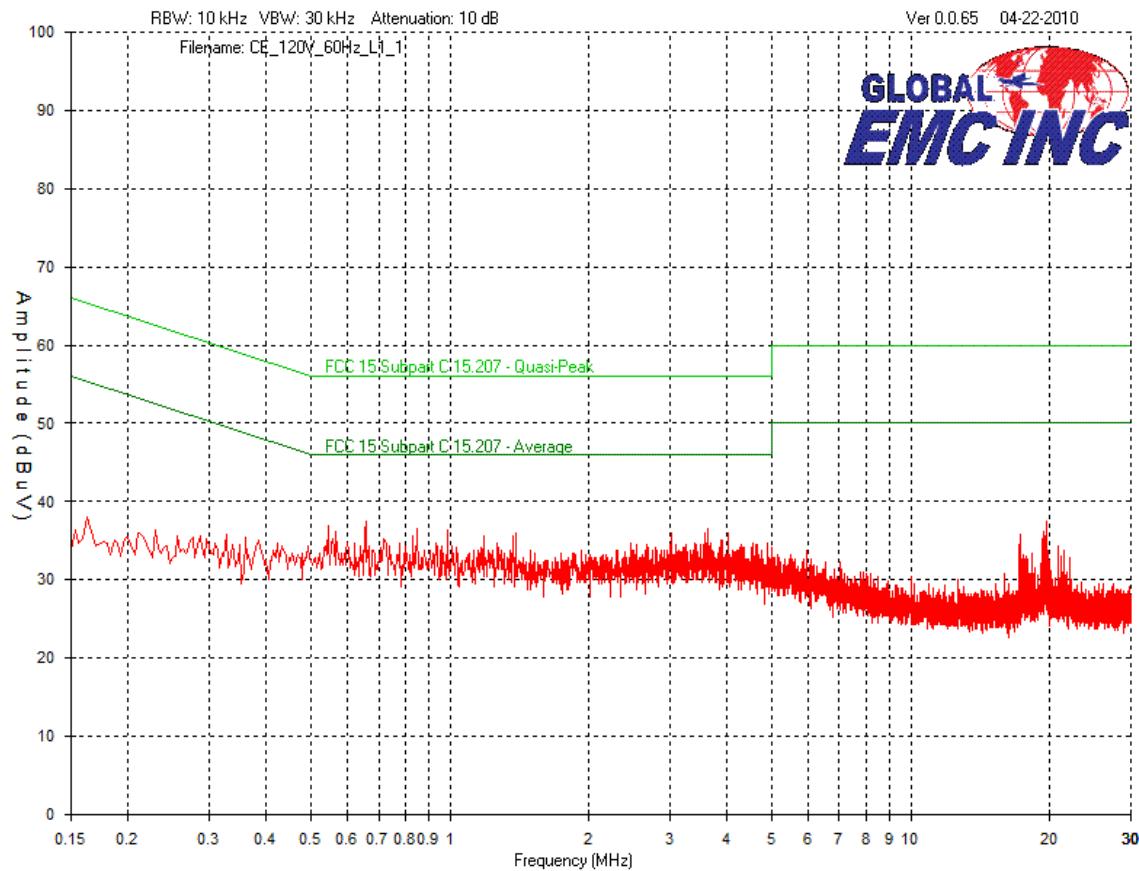

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



120V, 60Hz
Neutral Line

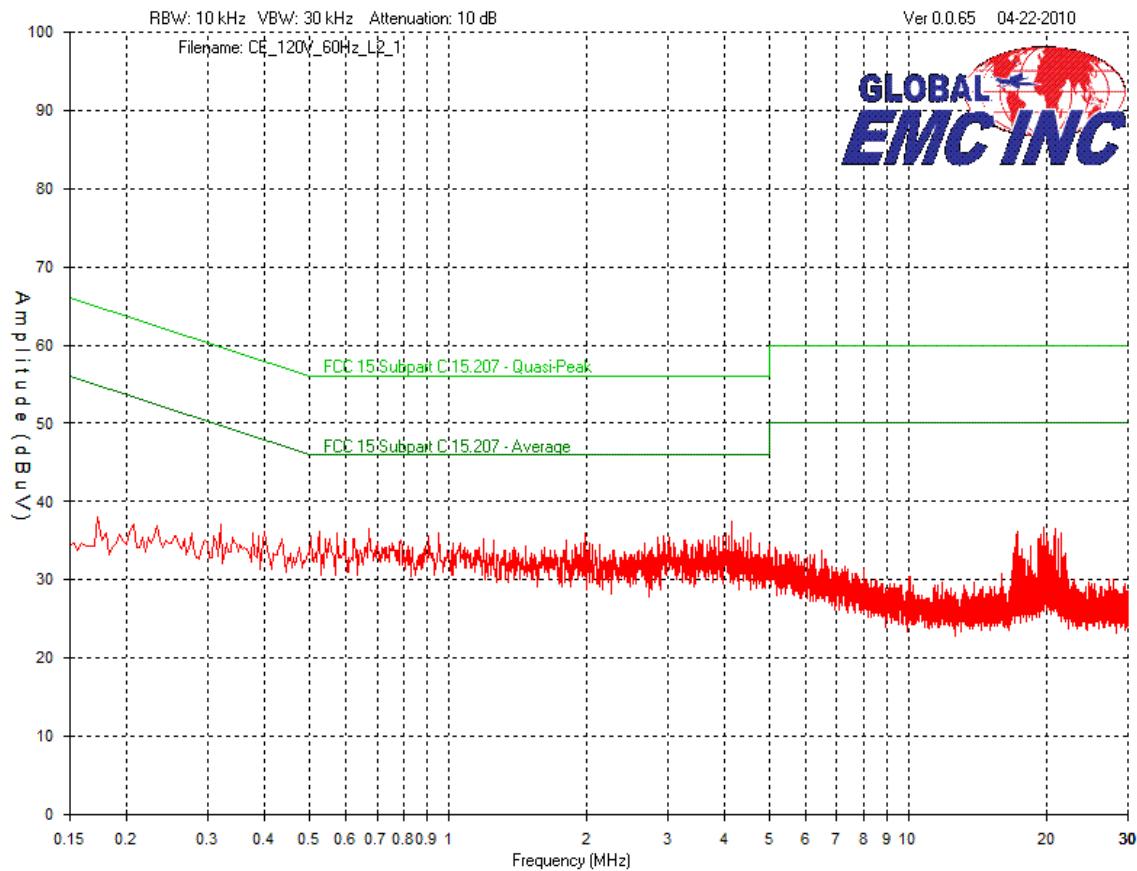

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Final Measurements

Average Emissions Table

Test Frequency (MHz)	Line Phase/Neutral	Received signal (dB μ V)	Attenuator (dB)	Cable loss (dB)	LISN factor (dB)	Emission Level (dB μ V)	FCC 15 Subpart C 15.207 - Average Limit	FCC 15 Subpart C 15.207 - Average Margin	Result
3.63	Phase	9.8	10	0.1	0.2	20.1	46	25.9	Pass
4.03	Phase	12.2	10	0.2	0.2	22.6	46	23.4	Pass
0.660	Phase	13.1	10	0.1	0.2	23.4	46	22.6	Pass
0.554	Phase	13.4	10	0.1	0.2	23.7	46	22.3	Pass
0.834	Phase	12.7	10	0.1	0.2	23	46	23	Pass
0.973	Phase	12.7	10	0.1	0.2	23	46	23	Pass
4.15	Neutral	12.7	10	0.2	0.2	23.1	46	22.9	Pass
4.54	Neutral	12.3	10	0.2	0.2	22.7	46	23.3	Pass
4.00	Neutral	12.5	10	0.2	0.2	22.9	46	23.1	Pass
1.97	Neutral	12.1	10	0.1	0.2	22.4	46	23.6	Pass
3.76	Neutral	10.2	10	0.2	0.2	20.6	46	25.4	Pass
2.92	Neutral	12.5	10	0.1	0.2	22.8	46	23.2	Pass

Quasi Peak Emissions Table

Test Frequency (MHz)	Line Phase/Neutral	Received signal (dB μ V)	Attenuator (dB)	Cable loss (dB)	LISN factor (dB)	Emission Level (dB μ V)	FCC 15 Subpart C 15.207 - Quasi-Peak Limit	FCC 15 Subpart C 15.207 - Quasi-Peak Margin	Result
3.63	Phase	21.3	10	0.1	0.2	31.6	56	24.4	Pass
4.03	Phase	21	10	0.2	0.2	31.4	56	24.6	Pass
0.660	Phase	21.8	10	0.1	0.2	32.1	56	23.9	Pass
0.554	Phase	22	10	0.1	0.2	32.3	56	23.7	Pass
0.834	Phase	21.6	10	0.1	0.2	31.9	56	24.1	Pass
0.973	Phase	21.3	10	0.1	0.2	31.6	56	24.4	Pass
4.15	Neutral	22.3	10	0.2	0.2	32.7	56	23.3	Pass
4.54	Neutral	20.7	10	0.2	0.2	31.1	56	24.9	Pass
4.00	Neutral	21.3	10	0.2	0.2	31.7	56	24.3	Pass
1.97	Neutral	20.7	10	0.1	0.2	31	56	25	Pass
3.76	Neutral	21.8	10	0.2	0.2	32.2	56	23.8	Pass
2.92	Neutral	21	10	0.1	0.2	31.3	56	24.7	Pass

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up for the highest line conducted emission.

Client	MBright Tools IVAC Inc	
Product	iVAC RF Module	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
IFR Spectrum Analyzer	AN940	IFR	12/29/2009	12/29/2011	GEMC 6350
LISN	FCC-LISN-50/250-16-2-01	FCC	2009-02-11	2011-02-11	GEMC 65
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
Attenuator 10 dB	FP-50-10	Trilithic	NCR	NCR	GEMC 42

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B_Rev1"

Client	MBright Tools IVAC Inc	
Product	iVAC RF Module	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Appendix A – EUT Summary

For further details for filing purposes, refer to filing package.

General EUT Description

Client Details	
Organization / Address	MBright Tools IVAC Inc
Contact	Leon Brown
Phone	613 826 2200
Email	Leon@MBrightSolutions.com
Manufacturer Details (if not same as above)	
Organization / Address	Infotronics International Lam Hing Street, Hong Kong.
Contact	Patrick Hui
Phone	852 27725232
Email	patrick@infotronic-int.com
EUT (Equipment Under Test) Details	
EUT Name/Model	iVAC RF Module
FCCID	YCH-IVACRFM
IC #	8940A-IVACRFM
EUT revision	New product
Software version	iVac Pro Ver 3 Rev 1
Equipment Category	Residential
Input voltage range(s) (V)	115Vac or 240Vac
Frequency range(s) (Hz)	60Hz
Rated input current (A)	< 0.1A
Nominal power consumption (W)	< 0.2W
Number of power supplies in EUT	1
Transmits RF energy? (describe)	Yes 433.92 Mhz 0.001W
Basic EUT functionality description	The module is used to detect the presence of current flow in a power tool. An RF transmission is initiated at each change of state of current flow from On to Off.
Step by step instructions for	Set jumpers on back of unit for transmission mode.

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



setup and operation	Connect power to power input connectors. Connect On/Auto/Off switch and set to ON.
Frequency of all clocks present in EUT	4 MHz processor clock.
I/O cable description Specify length and type	Power connections to AC mains and 3pin connection to Mode of operation switch.
Available connectors on EUT	Quick connect and 3pin molded connector
Dimensions of product	L 120mm W 43mm H 30mm

Note the EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. For a close-up picture of the EUT, see 'Appendix B – EUT & Test Setup Photographs'.


Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008


GLOBAL
EMC INC

Appendix B – EUT and Test Setup Photographs


Note: These photos are for information purposes only. Also refer to PDF files that are separate from this test report.

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

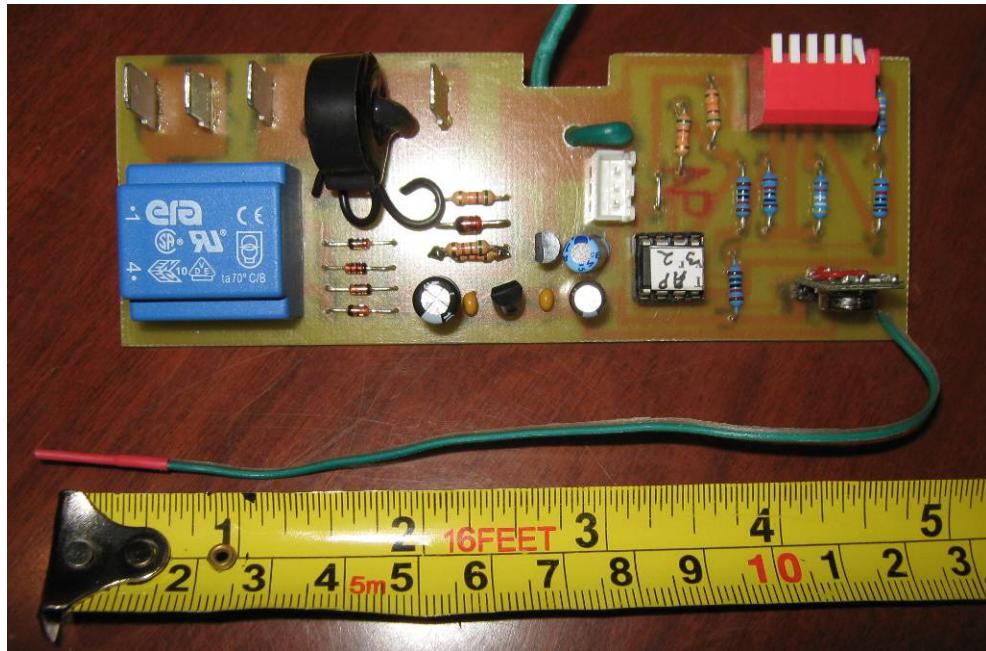


EUT: Front surface

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

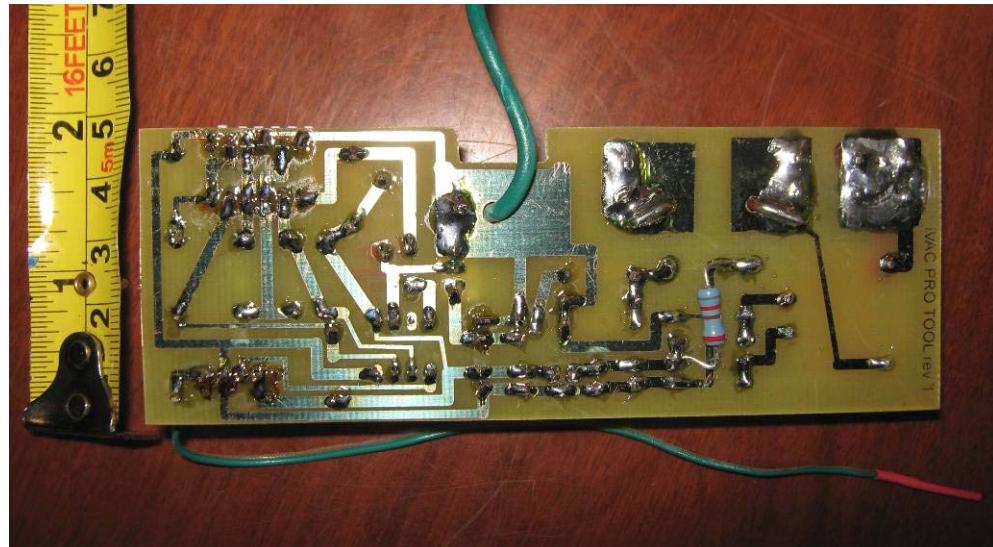

EUT: Back surface

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

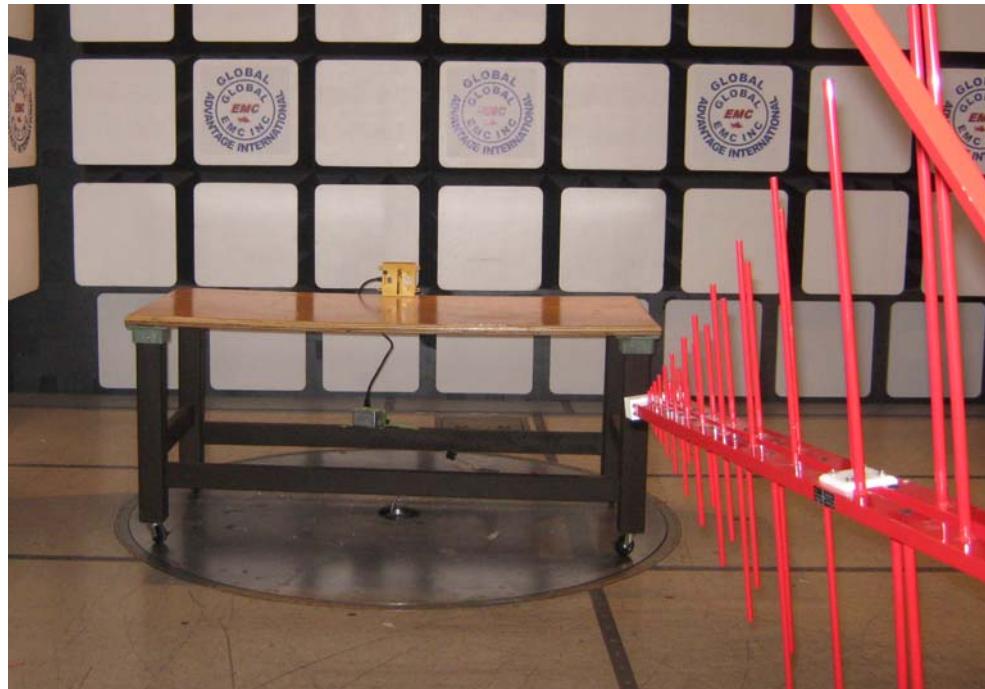

Radiated emissions testing (EUT tested in plastic enclosure)

Client	MBright Tools IVAC Inc
Product	iVAC RF Module
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008



Conducted emissions testing (EUT tested in plastic enclosure, with resistive load connected)