ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

Applicant:	Qualcomm Technologies, Inc. 5775 Morehouse Drive, San Diego, CA 92121-1714, United States
Manufacturer:	Qualcomm Technologies, Inc. 5775 Morehouse Drive, San Diego, CA 92121-1714, United States
Product Name:	Tri-Radio LGA Module for IoT applications
Brand Name:	Qualcomm
Model No.:	QCC743M-0
Report Number:	TERF2503001017ER
FCC ID	J9C-QCC743M0
Date of EUT Received:	March 7, 2025
Date of Test:	March 12, 2025～March 26, 2025
Issue Date:	April 18, 2025

Jazz Huang

Approved By _____
Jazz Huang

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT comply with FCC rule part §15.247.

The results of this report relate only to the sample identified in this report.

Revision History

Report Number	Revision	Description	Issue Date	Revised By	Remark
TERF2503001017ER	00	Change antenna location & add additional HW SKU QCC743M-0P	April 18, 2025	Yuri Tsai	

Note:

1、The remark "*" indicates modification of the report upon requests from certification body.

2、Variant information of HW SKU is provided by the applicant, test results of this report are applicable to the sample EUT(s) received.
And are assessed as electrically identical in RF characteristics, therefore, no further assessment required for the variant(s).

Contents

1 GENERAL INFORMATION

1.1 Product Description

Product Name:	Tri-Radio LGA Module for IoT applications
Brand Name:	Qualcomm
Model No.:	QCC743M-0
HW SKU:	QCC743M-0U, QCC743M-0B, QCC743M-0P
Hardware Version:	N/A
Firmware Version:	N/A
EUT Series No.:	C4:CC:37:A0:A2:A8
Power Supply:	3.3 Vdc
Test Software (Name/Version)	QConn_RCT 1.8.9

1.2 RF Specification

Radio Technology:	BT BR+EDR
Channel number:	79 channels
Modulation type:	GFSK + π/4DQPSK + 8DPSK
Transmit Power:	12.43 dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	≦ 0.4s

1.3 HW SKU Difference Table:

HW SKU	Antenna Type	Impedance
QCC743M-0U	3 types: PIFA, Monopole, Dipole	C21=1.8pF, C20=1.8pF
QCC743M-0B	1 type: PCB	C21=1.6pF, C20=2pF
QCC743M-0P	3 types: PIFA, Monopole, Dipole	C21=1.8pF, C20=2pF

1.4 Antenna Designation

Antenna Type	Antenna Part No.	Freq.	Peak Antenna Gain (dBi)
PCB Antenna	RFIQM0743010NB001	2.4GHz	1.89
PIFA Antenna	RFPCA441010EMABY01		3.19
Dipole Antenna	RFPCA521010EMABY01		3.37
Monopole Antenna	RFPCA501010EMABY01		3.12

Note:

1. Pre-scanned was done on the above antennas, measurements were demonstrated by using the antenna with the highest gain as the worst case scenarios.
2. Antenna information is provided by the applicant.

1.5 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247
FCC KDB 558074 D01 15.247 Meas. Guidance v05r02
ANSI C63.10:2013

1.6 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier
SGS Taiwan Ltd. Central RF Lab. (TAF code 3702)	No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan.	SAC 1	TW0027	TW3702
		SAC 2		
		SAC 3		
		Conduction 1		
		Conducted 1		
		Conducted 2		
		Conducted 3		
		Conducted 4		
		Conducted 5		
		Conducted 6		
	No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333	Conduction C	TW0028	
		SAC C		
		SAC D		
		SAC G		
		Conducted A		
		Conducted B		
		Conducted C		
		Conducted D		
		Conducted E		
		Conducted F		
		Conducted G		

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

1.7 Special Accessories

There is no special accessory used while test was conducted.

1.8 Equipment Modifications

There was no modification incorporated into the EUT.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 Radiated Emissions

The EUT is placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

2.4.1 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-ane choic chamber, the measurements correspond to those obtained at an open-field test site.
There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

2.4.2 For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

2.5 Test Configuration

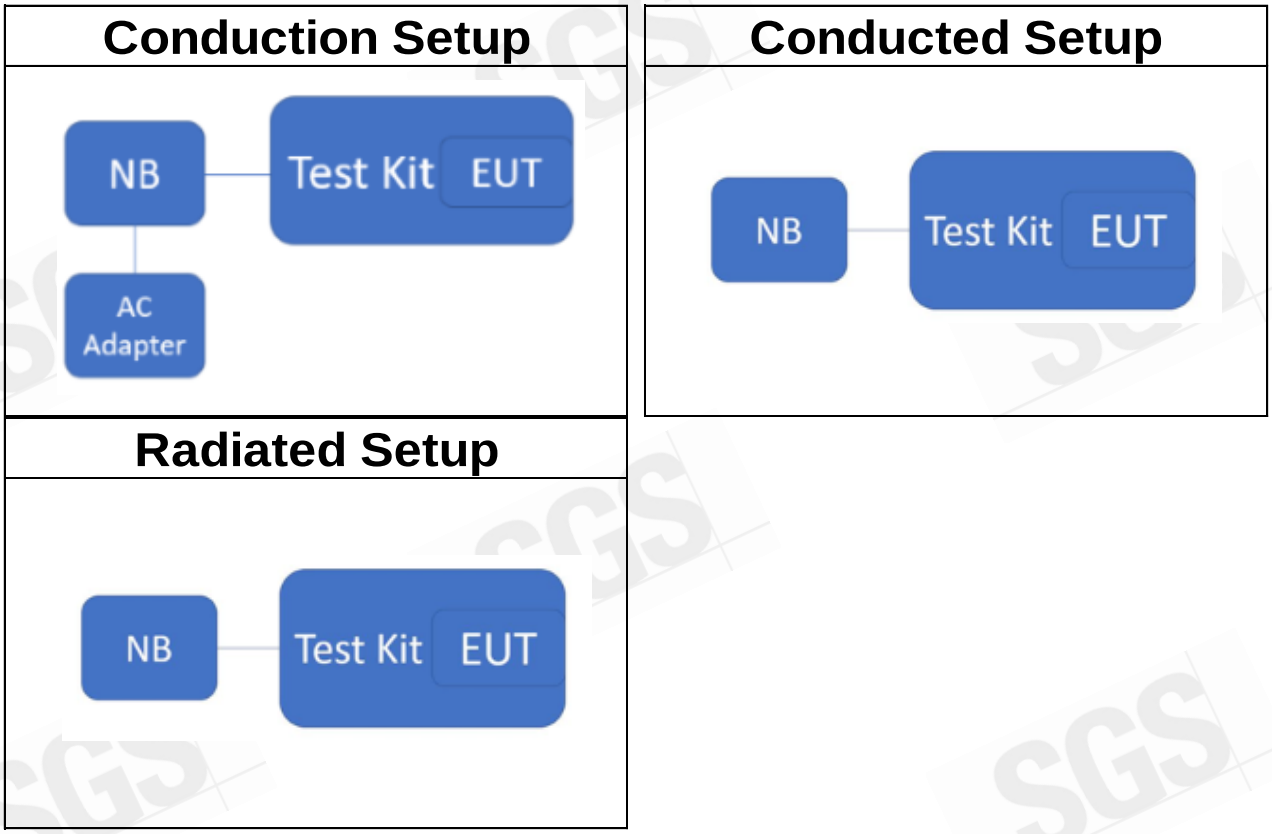

2.6 Control Unit(s)

AC Power-Line Conducted Emission Test Site: Conduction 1					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL. (mm/dd/yyyy)	CAL DUE. (mm/dd/yyyy)
AC Adapter	HP	TPN-LA16	N/A	N/A	N/A
Notebook	HP	HSN-Q35C-4	5CD238GDV5	N/A	N/A
Type-C to USB Cable	Xiaomi	SJX10ZM	N/A	N/A	N/A
QCC74X Module Development Kit Board	Walsin	QCC743-DVK-P	N/A	N/A	N/A

Conducted Emission Test Site: Conducted 1					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL. (mm/dd/yyyy)	CAL DUE. (mm/dd/yyyy)
Notebook	HP	HSN-Q35C-4	5CD238GDV5	N/A	N/A
QCC74X Module Development Kit Board	Walsin	QCC743-DVK-P	N/A	N/A	N/A

Radiated Emission Test Site: SAC 2					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL. (mm/dd/yyyy)	CAL DUE. (mm/dd/yyyy)
Notebook	HP	HSN-Q35C-4	5CD238GDV5	N/A	N/A
Type-C to USB Cable	Xiaomi	SJX10ZM	N/A	N/A	N/A
QCC74X Module Development Kit Board	Walsin	QCC743-DVK-P	N/A	N/A	N/A

3 SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result	Note
§15.207(a)	AC Power Line Conducted Emission	Compliant	
§15.247(b)(1)	Peak Output Power	Compliant	
§15.247(d) §15.209	Radiated Spurious Emission	Compliant	

4 DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

2400~2483.5 MHz							
CH	Freq. (MHz)	CH	Freq. (MHz)	CH	Freq. (MHz)	CH	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

4.2 The Worst Test Modes and Channel Details

1 The EUT has been tested under operating condition.
2 Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
3 Investigation has been done on all the possible configurations for searching the worst case.

ANTNNA PORT CONDUCTED TEST				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE
Peak Output Power				
Bluetooth	0 to 78	0,39,78	GFSK	DH5
	0 to 78	0,39,78	π/4-DQPSK	2DH5
	0 to 78	0,39,78	8-DPSK	3DH5

TRANSMIT RADIATED EMISSION TEST (BELOW 1 GHz)				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE
Bluetooth	0 to 78	39	8-DPSK	3DH5

Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for channel Low, Mid and High, the worst case position was reported.

5 MEASUREMENT UNCERTAINTY

Test Items	Uncertainty		
AC Power Line Conducted Emission	+/-	1.54	dB
Output Power measurement	+/-	0.97	dB
Emission Bandwidth	+/-	1.38	Hz
Conducted emission measurement	+/-	0.77	dB
Frequency Separation	+/-	1.48	Hz
Number of hopping frequency	+/-	1.48	Hz
Time of Occupancy	+/-	1.48	Hz
Temperature	+/-	0.6	°C
Humidity	+/-	3	%
DC / AC Power Source	+/-	1	%

Radiated Spurious Emission Measurement Uncertainty				
Polarization: Vertical	**+/-**	**1.89**	**dB**	9kHz~30MHz
	+/-	**4.15**	**dB**	30MHz - 1000MHz
	+/-	**3.43**	**dB**	1GHz - 18GHz
	+/-	**3.86**	**dB**	18GHz - 40GHz
Polarization: Horizontal	**+/-**	**1.89**	**dB**	9kHz~30MHz
	+/-	**4.02**	**dB**	30MHz - 1000MHz
	+/-	**3.43**	**dB**	1GHz - 18GHz
	+/-	**3.86**	**dB**	18GHz - 40GHz
Radiated Spurious Emission	**+/-**	**2**	**dB**	33GHz-50GHz
	+/-	**1.59**	**dB**	50GHz-60GHz
	+/-	**1.7**	**dB**	60GHz-90GHz
	+/-	**1.64**	**dB**	90GHz-140GHz
	+/-	**3.83**	**dB**	140GHz-220GHz

Note:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

6 MEASUREMENT EQUIPMENT USED

6.1 Emission from AC power line

AC Power-Line Conducted Emission Test Site: Conduction 1					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL. (mm/dd/yyyy)	CAL DUE. (mm/dd/yyyy)
Coaxial Cables	EMC Instruments Corp.	EMCCFD300-BM-BM-3000	161207	06/22/2024	06/21/2025
EMI Test Receiver	R&S	ESCI 7	100759	08/28/2024	08/27/2025
LISN	SCHWARZBECK	NSLK 8127	1040	09/07/2024	09/06/2025
Pulse Limiter	SCHWARZBECK	VTSD 9561F-N	793	06/22/2024	06/21/2025
Test Software	Audix	e3	Ver. 9.210616	N.C.R	N.C.R

6.2 Conducted Measurement

Conducted Emission Test Site: Conducted 1					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL. (mm/dd/yyyy)	CAL DUE. (mm/dd/yyyy)
Attenuator	Mini-Circuits	BW-S10W2+	3	12/11/2024	12/10/2025
Attenuator	Mini-Circuits	BW-S10W2+	4	12/11/2024	12/10/2025
DC Block	Mini-Circuits	BLK-18-S+	2	12/11/2024	12/10/2025
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071571	06/04/2024	06/03/2025
Power Meter	Anritsu	ML2496A	1242004	10/23/2024	10/22/2025
Power Sensor	Anritsu	MA2411B	1207365	10/23/2024	10/22/2025
Power Sensor	Anritsu	MA2411B	1207368	10/23/2024	10/22/2025
Test Software	SGS	Radio Test Software	Ver. 21	N.C.R	N.C.R

6.3 Radiated Measurement

Radiated Emission Test Site: SAC 2					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL. (mm/dd/yyyy)	CAL DUE. (mm/dd/yyyy)
Bi-log Antenna	SCHWARZBECK	VULB9168	1208	07/17/2024	07/16/2025
Coaxial Cables	EMCI	EMC104-SM-SM-600 +EMC105-SM-SM-2000 +EMC105-SM-SM-1500 +EMC105-SM-SM-10000	RX Cable 9K-18G (220237+220909+220906+240801)	08/30/2024	08/29/2025
EMI Test Receiver	R&S	ESCI 7	100759	08/28/2024	08/27/2025
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY60242392	12/24/2024	12/23/2025
Pre-Amplifier	EMCI	EMC330N	980826	08/30/2024	08/29/2025
Site Cal	SGS	SAC 2	N/A	08/30/2024	08/29/2025
Test Software	Audix	e3	Ver. 9.210616	N.C.R	N.C.R

NOTE: *N.C.R refers to Not Calibrated Required.*

7 CONDUCTED EMISSION TEST

7.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

7.2 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

7.3 Test Setup

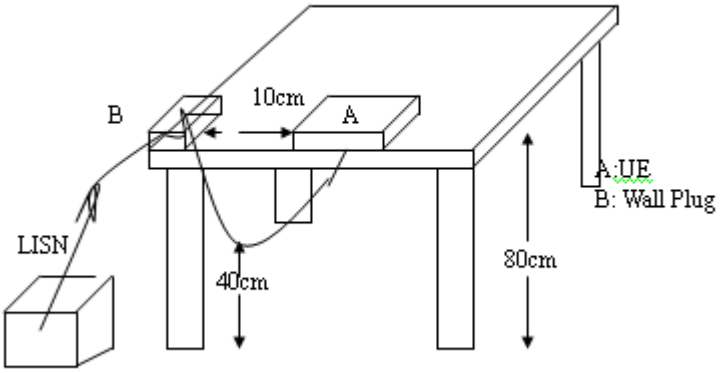

7.4 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

7.5 Measurement Result

Note: Refer to next page for measurement data and plots.
Note2: The * reveals the worst-case results that closest to the limit.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Report Number	:TERF2503001017ER	Test Site	:Conduction 1
Operation Mode	:BT	Test Date	:2025-03-20
Power	:120V/60Hz	Temp./Humi.	:22.4℃/61%
Probe	:L	Engineer	:GN Lin
Note:	:		

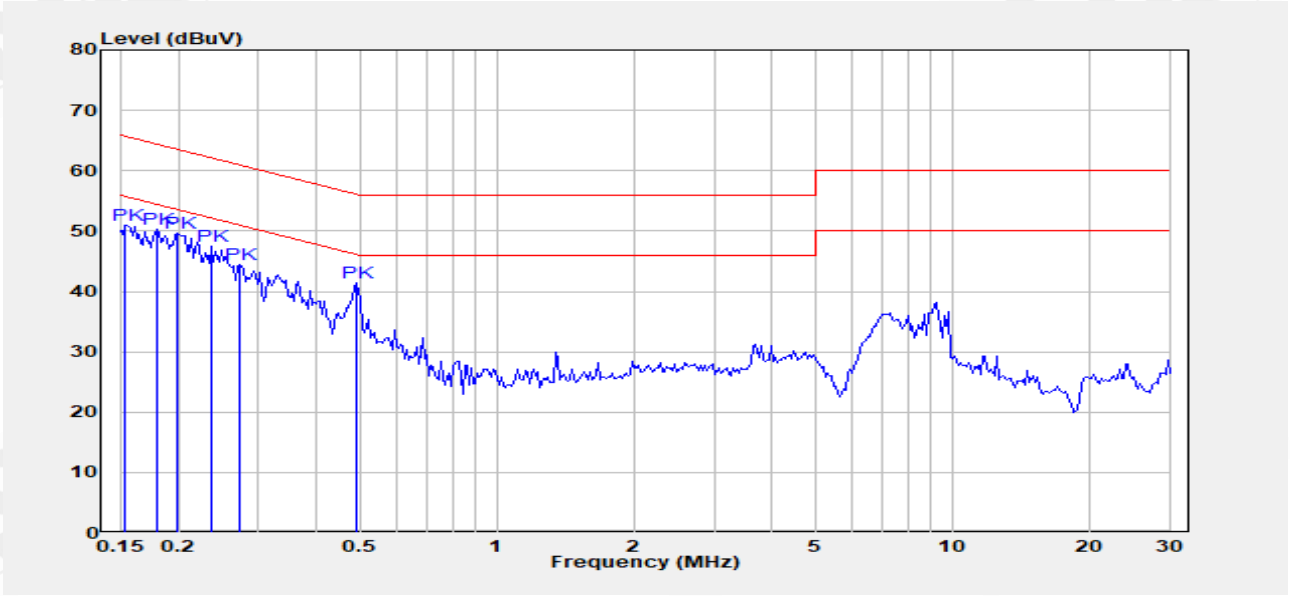

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV	dBµV	dB
0.153	Peak	40.91	10.13	51.04	65.82	-14.78
0.180	Peak	40.22	10.13	50.35	64.50	-14.15
0.200	Peak	39.44	10.13	49.57	63.62	-14.06
0.237	Peak	37.36	10.13	47.49	62.22	-14.72
0.272	Peak	34.21	10.14	44.35	61.07	-16.72
0.491	Peak	31.16	10.16	41.32	56.14	-14.82

Report Number	:TERF2503001017ER	Test Site	:Conduction 1
Operation Mode	:BT	Test Date	:2025-03-20
Power	:120V/60Hz	Temp./Humi.	:22.4℃/61%
Probe	:N	Engineer	:GN Lin
Note:	:		

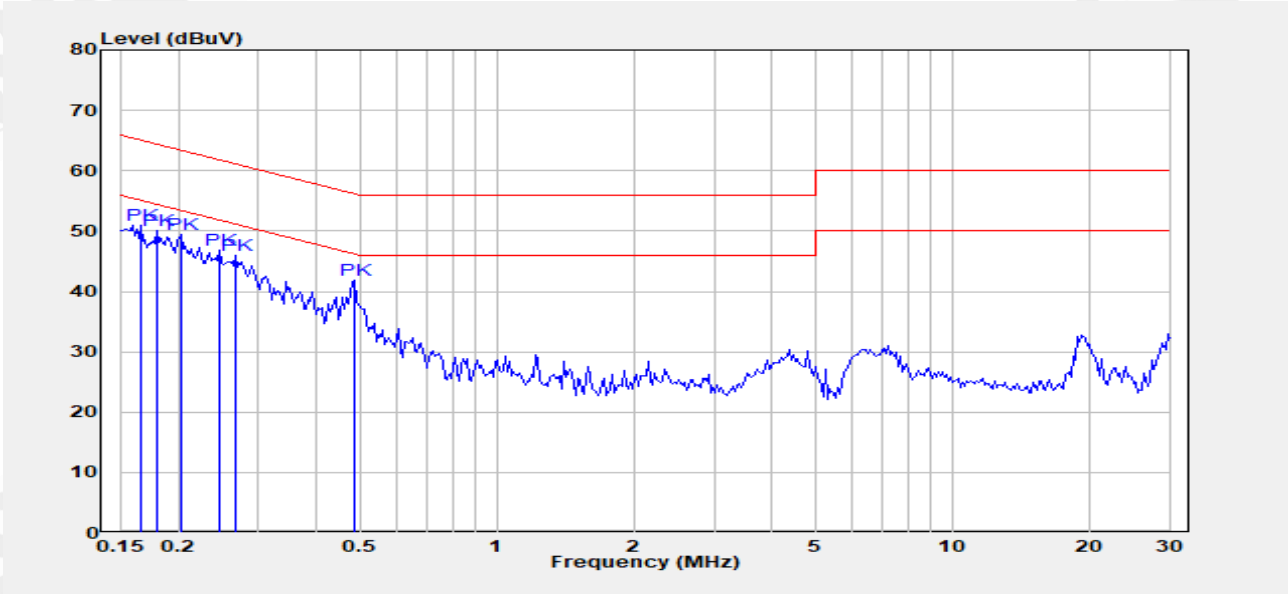

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV	dBµV	dB
0.165	Peak	40.84	10.12	50.96	65.21	-14.25
0.180	Peak	39.96	10.12	50.08	64.50	-14.42
0.202	Peak	39.33	10.12	49.45	63.54	-14.09
0.247	Peak	36.66	10.13	46.79	61.86	-15.07
0.266	Peak	35.84	10.13	45.98	61.25	-15.27
0.486	Peak	31.59	10.16	41.75	56.23	-14.48

8 PEAK OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts.

8.2 Test Setup

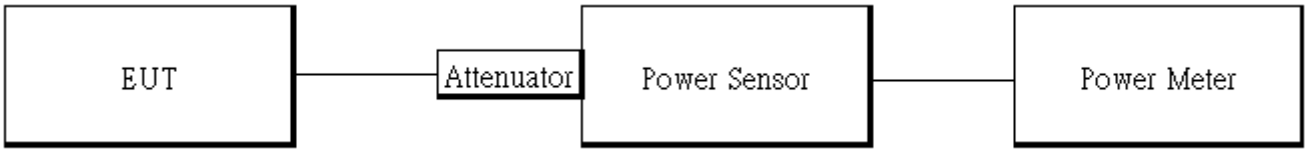

8.3 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows ANSI C63.10 Measurement Guidelines.
3. Duty cycle of test signal is < 98 %, duty factor shall be considered.
4. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB band-width)
5. Record the max. reading.
6. Repeat above procedures until all default test channel is completed.

8.4 Peak & Average Power Measurement Result

1M BR mode (Peak):

CH	Freq. (MHz)	Power Setting	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	10	9.55	9.016	1000
39	2441	10	**9.57**	9.057	1000
78	2480	10	9.17	8.260	1000

1M BR mode (Average):

CH	Freq. (MHz)	Power Setting	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	10	9.51	8.933	1000
39	2441	10	9.56	9.036	1000
78	2480	10	9.01	7.962	1000

2M EDR mode (Peak):

CH	Freq. (MHz)	Power Setting	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	10	**12.02**	15.922	125
39	2441	10	11.89	15.453	125
78	2480	10	11.53	14.223	125

2M EDR mode (Average):

CH	Freq. (MHz)	Power Setting	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	10	9.77	9.484	125
39	2441	10	9.54	8.995	125
78	2480	10	9.22	8.356	125

3M EDR mode (Peak):

CH	Freq. (MHz)	Power Setting	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	10	12.23	16.711	125
39	2441	10	**12.43**	17.498	125
78	2480	10	12.01	15.885	125

3M EDR mode (Average):

CH	Freq. (MHz)	Power Setting	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	10	9.56	9.036	125
39	2441	10	9.56	9.036	125
78	2480	10	9.23	8.375	125

***Note:** Avg. output power has been calculated with duty factor.*

9 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

9.1 Standard Applicable

9.1.1 Duty Cycle Correction Factor

According to 15. 35(c), the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification.

9.1.2 Spurious Emission

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 and limit as below.
And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. *The lower limit shall apply at the transition frequencies.*

9.2 Test Setup

9.2.1 Duty Cycle Correction Factor

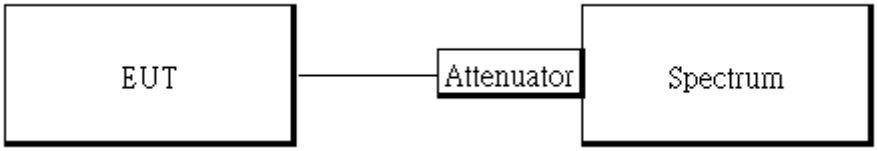

9.2.2 Radiated Emission

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz.

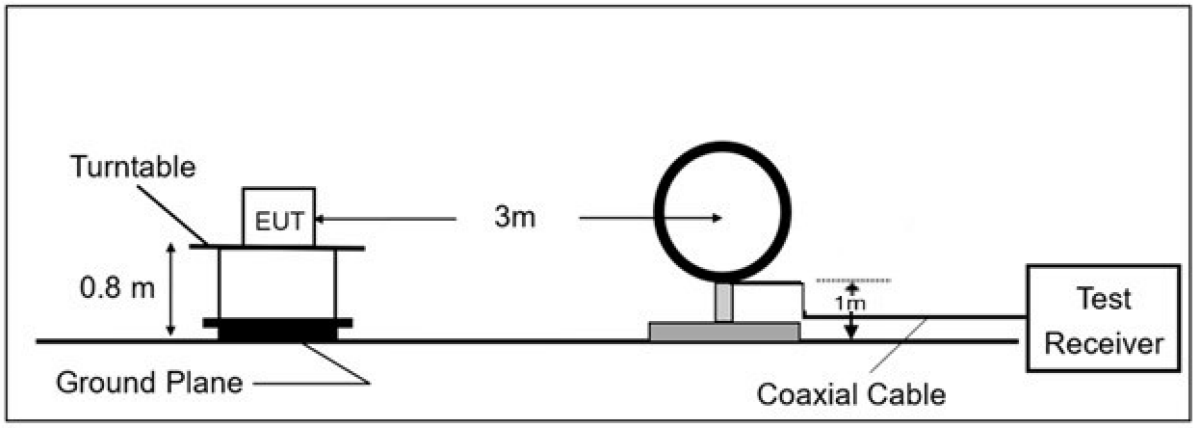

(B) Radiated Emission Test Set-Up, Frequency From 30MHz to 1000MHz.

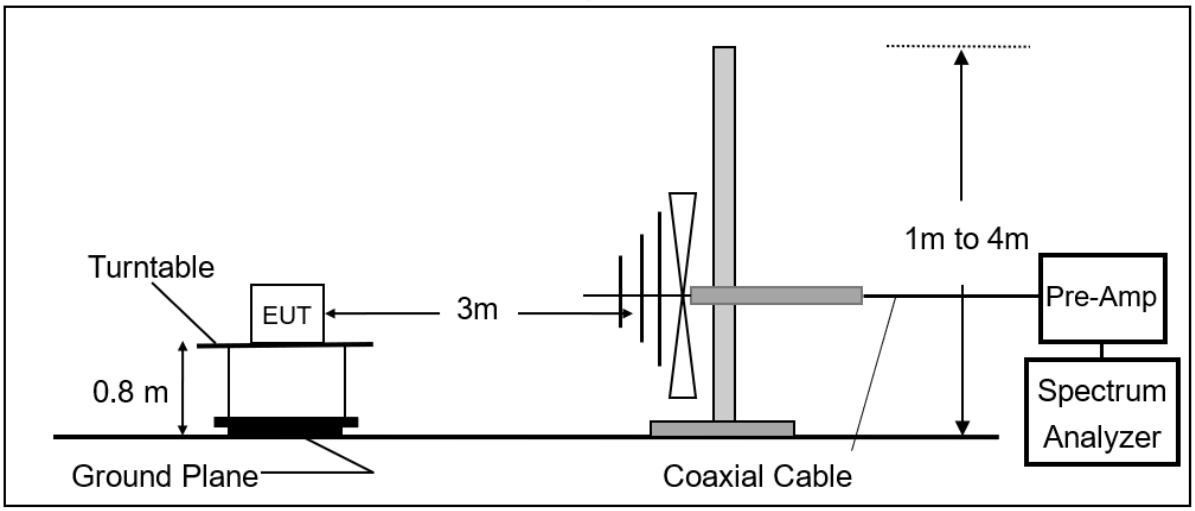

(C) Radiated Emission Test Set-Up, Frequency Above 1 GHz.

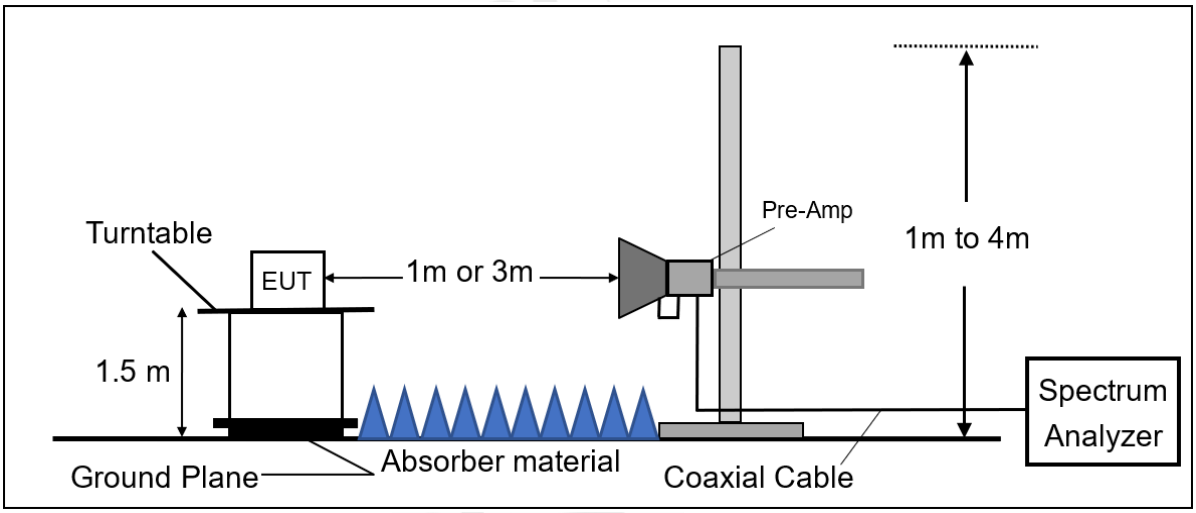

9.3 Measurement Procedure

9.3.1 Duty Cycle Correction Factor

1. Adjust and configure any EUT switches, controls, or input data streams to ensure that the EUT is transmitting or encoded to obtain the “worst-case” pulse ON time.
2. The testing follows ANSI C63.10:2013.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set center frequency of spectrum analyzer = operating frequency.
5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz , Detector = Peak, Adjust Sweep=100ms.
6. Repeat above procedures until all frequency of the interest measured were complete.

9.3.2 Radiated Emission

1. The testing follows the Measurement Procedure of ANSI C63.10:2013.
2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
5. Set the spectrum analyzer as RBW=100 kHz and VBW=300 kHz for Peak Detector (PK) at frequency between 30MHz and 1 GHz.
6. Use receiver mode as RBW=120 kHz for Quasi-peak (QP) at frequency between 30MHz and 1 GHz.

7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Maximum Emission Measurements at frequency above 1 GHz.
8. According to C63.10:2013 Section 7.5 Procedure for determining the average value of pulsed emissions with duty cycle correction factor 20 log (T_{on}/100ms).
9. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
12. Repeat above procedures until all default test channel measured were complete.

9.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL – AG$$

Where *FS = Field Strength* *CL = Cable Attenuation Factor (Cable Loss)*
RA = Reading Amplitude *AG = Amplifier Gain*
AF = Antenna Factor

*The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)*

Actual FS(dBμV/m) = SPA. Reading level(dBμV) + Factor(dB)
Factor(dB) = Antenna Factor(dBμV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Average value(dBμV/m)=Peak Actual FS(dBμV/m)+ Duty Cycle Correction Factor(dB)
Duty Cycle Correction Factor(dB) = 20 log (T_{on}/100 ms)

9.5 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

9.6 Measurement Result:

9.6.1 Radiated Spurious Emission

Report Number	:TERF2503001017ER	Test Site	:SAC 2
Operation Mode	:EDR 3M	Test Date	:2025-03-21
Test Frequency	:2441 MHz	Temp./Humi.	:22.5℃/59%
Test Mode	:Tx	Antenna Pol.	:Vertical
EUT Pol	:H Plane	Engineer	:GN Lin

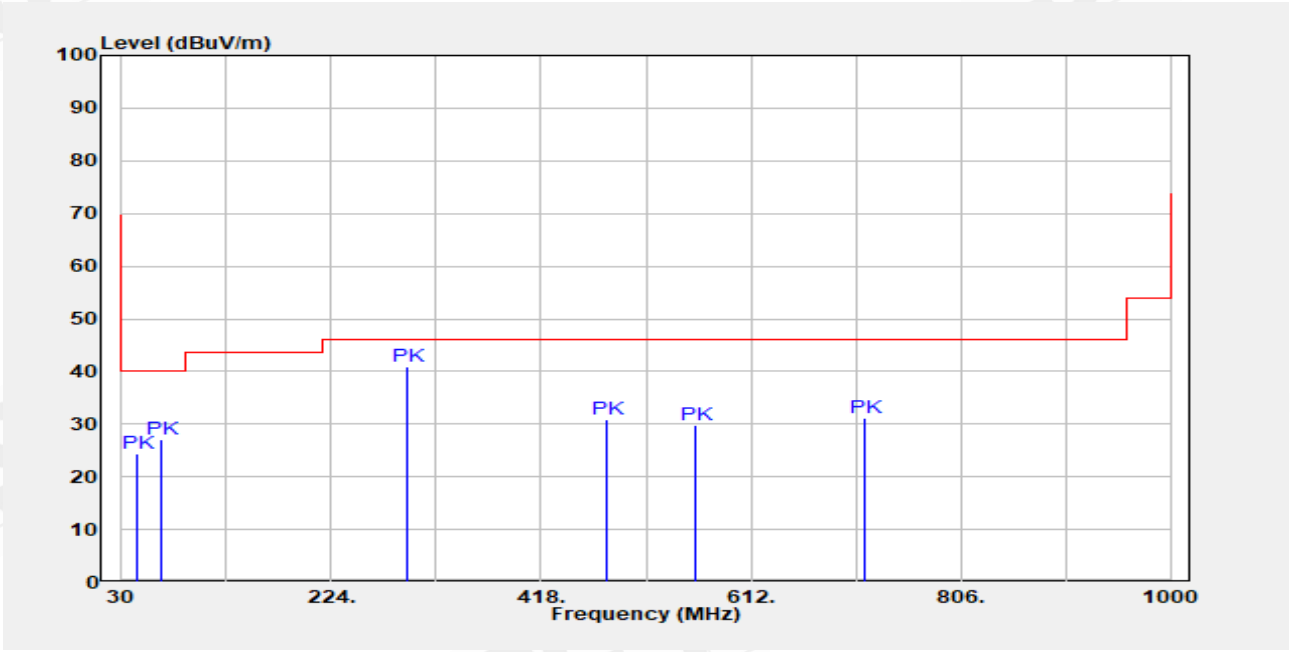

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
43.580	Peak	37.12	-12.80	24.32	40.00	-15.68
65.890	Peak	41.47	-14.35	27.12	40.00	-12.88
293.840	Peak	52.77	-11.94	40.84	46.00	-5.16
479.110	Peak	37.84	-7.06	30.78	46.00	-15.22
560.590	Peak	35.47	-5.58	29.88	46.00	-16.12
716.760	Peak	33.62	-2.50	31.13	46.00	-14.87

Report Number	:TERF2503001017ER	Test Site	:SAC 2
Operation Mode	:EDR 3M	Test Date	:2025-03-21
Test Frequency	:2441 MHz	Temp./Humi.	:22.5℃/59%
Test Mode	:Tx	Antenna Pol.	:Horizontal
EUT Pol	:H Plane	Engineer	:GN Lin

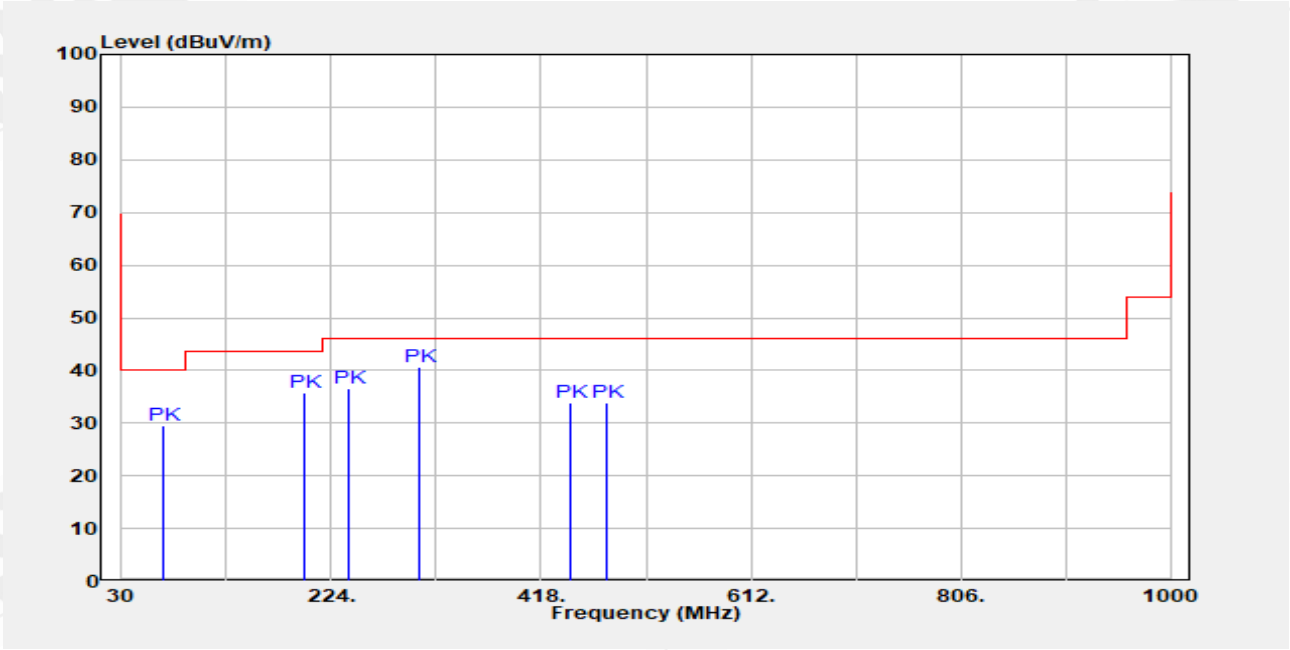

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
68.800	Peak	44.28	-14.77	29.51	40.00	-10.49
199.750	Peak	51.50	-15.77	35.74	43.50	-7.76
240.490	Peak	50.53	-13.99	36.55	46.00	-9.45
305.480	Peak	52.20	-11.66	40.54	46.00	-5.46
444.190	Peak	41.53	-7.60	33.92	46.00	-12.08
479.110	Peak	40.95	-7.06	33.89	46.00	-12.11

~ End of Report ~