

849 NW STATE ROAD 45 NEWBERRY, FL 32669 USA

PH: 888.472.2424 OR 352.472.5500

FAX: 352.472.2030

EMAIL: <u>INFO@TIMCOENGR.COM</u> HTTP://WWW.TIMCOENGR.COM

FCC PART 15.235 TEST REPORT LOW POWER UNLICENSED TRANSMITTER

Applicant	CHINA INDUSTRIES LTD. T/A WOW! STUFF CREATIVE INDUSTRIES CENTRE				
Address	WOLVERHAMPTON SCIENCE PARK				
Address	WOLVERHAMPTON WV10 9TG United Kingdom				
FCC ID	YCR-NHM-1065T				
Product Description	RADIO CONTROLLED RATTLESNAKE TX				
Date Sample Received	4/23/2010				
Date Tested	4/23/2010				
Tested By	Nam Nguyen				
Approved By	Mario R. de Aranzeta				
Timco Report No.	948HT10TestReport.doc				
Test Results	☐ Pass ☐ Fail				

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



TABLE OF CONTENTS

GENERAL REMARKS	3
REPORT SUMMARY	4
TEST ENVIRONMENT	4
TEST SETUP	4
DUT SPECIFICATION	5
TEST EQUIPMENT LIST	6
TEST PROCEDURES	7
RADIATION INTERFERENCE	8
OCCUPIED BANDWIDTH	9

APPLICANT: CHINA INDUSTRIES LTD. T/A WOW! STUFF CREATIVE INDUSTRIES CENTRE

FCC ID: YCR-NHM-1065T

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc. 849 NW State Road 45 Newberry, Fl 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T. Compliance Engineer/ Lab. Supervisor

Date: 5/4/10

APPLICANT: CHINA INDUSTRIES LTD. T/A WOW! STUFF CREATIVE INDUSTRIES CENTRE

FCC ID: YCR-NHM-1065T

REPORT: C\CHINA INDUSTRIES_YCR\948HT10\948HT10TestReport.doc

Page 3 of 9 mdea 09.20.2007

REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.
Applicable Rule(s)	FCC Pt 15.235, ANSI C63.4: 2003
Related Report(s) or Approval(s)	949HT10TestReport.pdf

TEST ENVIRONMENT

Test Facility	The test sites are located at 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition:	Temperature: 26°C
	Relative humidity: 50%

TEST SETUP

Test Exercise (e.g. software description, test signal, etc.):	The DUT was placed in continuous transmit mode of operation.
Deviation from the standard(s)	No deviation from the standard(s)
Modification to the DUT:	No modification was made to the DUT.
Supporting Peripheral Equipment	Not applicable. The device is a stand-alone remote control.

APPLICANT: CHINA INDUSTRIES LTD. T/A WOW! STUFF CREATIVE INDUSTRIES CENTRE

FCC ID: YCR-NHM-1065T

DUT SPECIFICATION

Applicant	CHINA INDUSTRIES LTD. T/A WOW! STUFF CREATIVE INDUSTRIES CENTRE					
Description	RADIO CONTRO	RADIO CONTROLLED RATTLESNAKE TX				
FCC ID	YCR-NHM-1065	YCR-NHM-1065T				
Frequency Range	49.86 MHz					
	☐ 110-120Vac/50- 60Hz					
DUT Power Source	☐ DC Power					
	☐ Battery Operated Exclusively					
Test Item	☐ Prototype	□ Pre-Production	☐ Production			
Type of Equipment	Fixed Mobile Portable					

APPLICANT: CHINA INDUSTRIES LTD. T/A WOW! STUFF CREATIVE INDUSTRIES CENTRE

FCC ID: YCR-NHM-1065T

TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi- Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/10/10
AC Voltmeter	HP	400FL	2213A14499	CAL 3/23/09	3/23/11
Antenna: Dipole Kit	Electro- Metrics	TDA-30/1-4	153	CHAR 6/10/09	6/10/11
Frequency Counter	HP	5385A	3242A07460	CAL 5/26/09	5/26/11
Hygro- Thermometer	Extech	445703	0602	CAL 1/30/09	1/30/11
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/26/09	5/26/11
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/18/09	5/18/11
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/21/09	11/21/11
Analyzer Tan Tower Quasi- Peak Adapter	НР	85650A	3303A01690	CAL 11/22/09	11/22/11
Analyzer Tan Tower RF Preselector	НР	85685A	3221A01400	CAL 11/21/09	11/21/11
Analyzer Tan Tower Spectrum Analyzer	НР	8566B Opt 462	3138A07786 3144A20661	CAL 11/24/09	11/24/11
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10

APPLICANT: CHINA INDUSTRIES LTD. T/A WOW! STUFF CREATIVE INDUSTRIES CENTRE

FCC ID: YCR-NHM-1065T

REPORT: C\CHINA INDUSTRIES_YCR\948HT10\948HT10TestReport.doc

Page 6 of 9 mdea 09.20.2007

TEST PROCEDURES

Spurious Emissions: The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was always greater than the RBW. The spectrum was searched to at least the 10th harmonic.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and the following plot was generated. The vertical scale is set to 10 dB per division.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq	Meter Reading	ACF	Cable Loss	Field Strength
MHz	dBuV	dB/m	dB	dBuV/m@3 m
33	20	+10.36	+1.2	= 31.56

ANSI C63.4-2003 Measurement: The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

APPLICANT: CHINA INDUSTRIES LTD. T/A WOW! STUFF CREATIVE INDUSTRIES CENTRE

FCC ID: YCR-NHM-1065T

REPORT: C\CHINA INDUSTRIES_YCR\948HT10\948HT10TestReport.doc

Page 7 of 9 mdea 09.20.2007

RADIATION INTERFERENCE

Rules Part No.: 15.235

Requirements:

Frequency MHz	Limits
Fundamental Frequency	80.0 dBµV/m measured @ 3 meters
30 – 88	40.0 dBμV/m measured @ 3 meters
80 – 216	43.5 dBμV/m measured @ 3 meters
216 – 960	46.0 dBμV/m measured @ 3 meters
Above 960	54.0 dBμV/m measured @ 3 meters

Test Data:

Tuned	Emission	Meter	Ant.	Coax	Correction	Field	
Frequency	Frequency	Reading	Pol	Loss	Factor	Strength	Margin
MHz	MHz	dΒμV		dB	dB/m	dBμV/m	dB
49.9	49.86	16.2	H	0.50	11.64	28.34	51.66
49.9	49.86	39.1	V	0.50	10.83	50.43	29.57
49.9	99.70	3.5	H	0.65	10.69	14.84	28.66
49.9	99.70	3.9	V	0.65	11.50	16.05	27.45
49.9	149.50	3.8	H	0.70	16.06	20.56	22.94
49.9	149.50	4.2	V	0.70	17.18	22.08	21.42
49.9	199.40	3.4	H	0.90	16.63	20.93	22.57
49.9	199.40	4.1	V	0.90	17.22	22.22	21.28
49.9	249.30	4.1	V	1.00	12.46	17.56	28.44
49.9	299.10	3.7	V	1.10	14.36	19.16	26.84
49.9	349.00	4.1	H	1.15	14.98	20.23	25.77
49.9	398.60	4.3	V	1.20	15.69	21.19	24.81
49.9	398.60	5.0	H	1.20	16.06	22.26	23.74
49.9	498.60	4.9	H	1.30	17.84	24.04	21.96

APPLICANT: CHINA INDUSTRIES LTD. T/A WOW! STUFF CREATIVE INDUSTRIES CENTRE

FCC ID: YCR-NHM-1065T

OCCUPIED BANDWIDTH


Rules Part No.: 15.235

Requirements: The field strength of any emissions appearing between the band

edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the un-modulated carrier or to the general limits of 15.209, whichever permits the higher

emission levels.

Test Data: Please refer to the following plot.

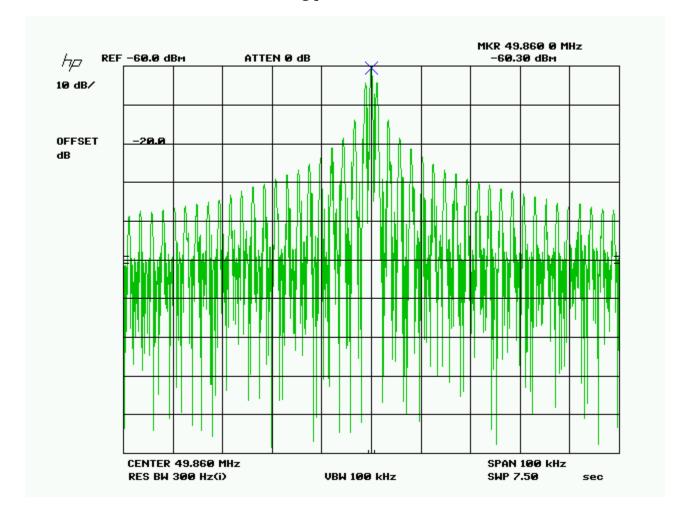

APPLICANT: CHINA INDUSTRIES LTD. T/A WOW! STUFF CREATIVE INDUSTRIES CENTRE

FCC ID: YCR-NHM-1065T

REPORT: C\CHINA INDUSTRIES_YCR\948HT10\948HT10TestReport.doc

Page 9 of 9 mdea 09.20.2007