



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Applicant : SHENZHEN AOER ELECTRONICS CO., LTD

**Address : FL.3, Building A, Wenle Industrial District, Xixiang,
Baoan, Shenzhen, China**

Product Name : CAR MP3 PLAYER WITH FM TRANSMITTER

Model Name : CA001, CA002

Brand Name : N/A

FCC ID : YDR-CA001

Report No. : MOST100416F1

Date of Issue : April 28, 2010

Issued by : Most Technology Service Co., Ltd.

**Address : No.5, 2nd Langshan Road, North District, Hi-tech Industrial
Park, Nanshan, Shenzhen, Guangdong, China**

Tel : 86-755-8617 0306

Fax : 86-755-8617 0310

The report consists 36 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1 Product Information	5
2.2 Objective	6
2.3 Test Standards and Results	6
2.4 Environmental Conditions	6
3. TEST METHODOLOGY	7
3.1 TEST FACILITY	7
3.2 GENERAL TEST PROCEDURES	8
4 SETUP OF EQUIPMENT UNDER TEST	9
4.1 SETUP CONFIGURATION OF EUT	9
4.2 SUPPORT EQUIPMENT	9
4.3 TEST EQUIPMENT LIST	10
5. 47 CFR Part 15 C Requirements	11
5.1 20dB Bandwidth	11
5.1.1 Definition	11
5.1.2 Test Description	11
5.1.3 Test Result	11
5.2 Frequency Range	14
5.2.1 Definition	14
5.2.2 Test Description	14
5.2.3 Test Result	14
5.3.1 Definition	15
5.3.2 Test Configuration	16
5.3.3 Test Description	17
5.3.4 Test Result	17
5.4 Conducted Emission	24
5.4.1 Definition	24
5.4.1 Block Diagram of Test Setup	24
5.4.2 Preliminary Procedure of Line Conducted Emission Test	25
5.4.3 Final Procedure of Line Conducted Emission Test	25
5.4.4 Test Result of Line Conducted Emission Test	26
5.5 Antenna Requirement	28
5.5.1 Definition	28
5.5.2 Evaluation Procedure	28
5.5.3 Evaluation Criteria	28

5.5.4 Evaluation Results.....	28
APPENDIX 1	29
PHOTOGRAPHS OF TEST SETUP.....	29
APPENDIX 2	31
PHOTOGRAPHS OF EUT	31

1. VERIFICATION OF CONFORMITY**Equipment Under Test:** CAR MP3 PLAYER WITH FM TRANSMITTER**Brand Name:** N/A**Model Number:** CA001**Series Model Name:** CA002**Series Model Difference description:** The PCB is the same, only the model number is different.**FCC ID:** YDR-CA001**Applicant:** SHENZHEN AOER ELECTRONICS CO., LTD

FL.3, Building A, Wenle Industrial District, Xixiang, Baoan, Shenzhen, China

Manufacturer: SHENZHEN AOER ELECTRONICS CO., LTD

FL.3, Building A, Wenle Industrial District, Xixiang, Baoan, Shenzhen, China

Technical Standards: 47 CFR Part 15 Subpart C**File Number:** MOST100416F1**Date of test:** April 20, 2010 - April 28, 2010**Deviation:** None**Condition of Test Sample:** Normal**Test Result:** PASS

The above equipment was tested by Most Technology Service Co., Ltd. for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature):

Petter Ping

Petter Ping April 28, 2010

Review by (+ signature):

July Wen

July Wen April 28, 2010

Approved by (+ signature):

Terry Yang

Terry Yang April 28, 2010



2. GENERAL INFORMATION

2.1 Product Information

EUT- Bluetooth Car Kit	
Description:	CAR MP3 PLAYER WITH FM TRANSMITTER
Model Name:	CA001
Power Supply:	DC 12.0V by charge
Channel Number:	99
Frequency Band:	88.1 MHz -107.9 MHz
Channel Spacing:	200 KHz
Antenna Gain:	1.0 dBi
Modulation Technique:	FM
Antenna Type:	Internal
Temperature Range:	-10°C ~ +55°C

NOTE:

1. Please refer to Appendix I for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual.

2.2 Objective

The objective of the report is to perform tests according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-05 Edition)	Radio Frequency Devices

2.3 Test Standards and Results

Test items and the results are as bellow:

No.	Section	Description	Result	Date of Test
1	15.239	20dB Bandwidth	PASS	2010-04-22
2	15.239	Frequency Range	PASS	2010-04-22
3	15.239 15.209 15.205	Radiated Emission	PASS	2010-04-27
4	15.207	Conducted Emission	PASS	2010-04-27
5	15.203	Antenna Requirement	PASS	2010-04-27

Note: 1. The test result judgment is decided by the limit of measurement standard
2. The information of measurement uncertainty is available upon the customer's request.

2.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

3. TEST METHODOLOGY

3. 1 TEST FACILITY

Test Site: Most Technology Service Co.,ltd

Location: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park , Nanshan Shenzhen, Guangdong ,China

Description: There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003 and CISPR 16 requirements.

The FCC Registration Number is **490827**.

Site Filing: The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

Instrument Tolerance: All measuring equipment is in accord with ANSI C63.4:2003 and CISPR 16 requirements that meet industry regulatory agency and accreditation agency requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna.

3.2 GENERAL TEST PROCEDURES

EUT Function and Test Mode

The EUT has been tested under normal operating condition.

The field strength of radiation emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis).

The following data show only with the worst case setup.

The worst case of Y axis was reported.

Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report.

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4:2003, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4:2003.

4 SETUP OF EQUIPMENT UNDER TEST**4.1 SETUP CONFIGURATION OF EUT**

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

4.2 SUPPORT EQUIPMENT

Device Type	Brand	Model	FCC ID	Series No.	Audio Cable	Power Cord
AC/DC Power Supply	XinYiGao	QJ6003S	---	350326	N/A	N/A

Remark:

All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4. 3 TEST EQUIPMENT LIST

Instrumentation: The following list contains equipment used at Most for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calculator due date
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2011/03/14
2	Spectrum Analyzer	Agilent	E7405A	US44210471	2011/03/14
3	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2011/03/14
4	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2011/03/14
5	Terminator	Hubersuhner	50Ω	No.1	2011/03/14
6	RF Cable	SchwarzBeck	N/A	No.1	2011/03/14
7	Test Receiver	Rohde & Schwarz	ESPI	101202	2011/03/14
8	Bilog Antenna	Sunol	JB3	A121206	2011/03/14
9	Horn Antenna	TRC	N/A	N/A	2011/03/14
10	Cable	Resenberger	N/A	NO.1	2011/03/14
11	Cable	SchwarzBeck	N/A	NO.2	2011/03/14
12	Cable	SchwarzBeck	N/A	NO.3	2011/03/14
13	DC Power Filter	DuoJi	DL2×30B	N/A	2011/03/14
14	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2011/03/14
15	3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	2011/03/14
16	Test Receiver	Rohde & Schwarz	ESCI	100492	2011/03/14
17	Absorbing Clamp	Luthi	MDS21	3635	2011/03/14
18	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2011/03/14
19	AC Power Source	Kikusui	AC40MA	LM003232	2011/03/14
20	Test Analyzer	Kikusui	KHA1000	LM003720	2011/03/14
21	Line Impedance Network	Kikusui	LIN40MA-PCR-L	LM002352	2011/03/14
22	ESD Tester	Kikusui	KES4021	LM003537	2011/03/14
23	EMCPRO System	EM Test	UCS-500-M4	V0648102026	2011/03/14
24	Signal Generator	IFR	2032	203002/100	2011/03/14
25	Amplifier	A&R	150W1000	301584	2011/03/14
26	CDN	FCC	FCC-801-M2-25	47	2011/03/14
27	CDN	FCC	FCC-801-M3-25	107	2011/03/14
28	EM Injection Clamp	FCC	F-203I-23mm	403	2011/03/14
29	RF Cable	MIYAZAKI	N/A	No.1/No.2	2011/03/14
30	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2011/03/14
31	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2011/03/14
32	Loop Antenna	Schwarzbeck	BBHA 9120D	--	2011/03/14

NOTE: Equipments listed above have been calibrated and are in the period of validation.

5. 47 CFR Part 15 C Requirements

5.1 20dB Bandwidth

5.1.1 Definition

Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88-108 MHz.

5.1.2 Test Description

The EUT was placed on a non-conductive table 0.8 meters above the floor. The table was rotated to an angle which presented the highest signal level. The occupied bandwidth was based on a 20 dB criteria (20 dB down either side of the emission from the peak emission). A drawing showing the test setup is given as Figure 1.

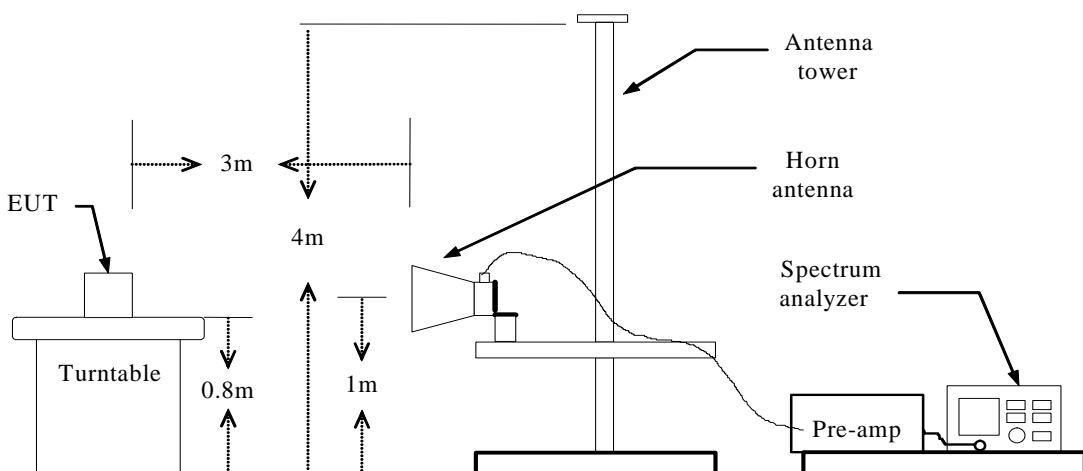



Figure 1: Radiated Emission Test Setup

5.1.3 Test Result


The maximum occupied bandwidth for the fundamental frequency 107.9 MHz is 83.3 kHz.

This occupied bandwidth complies with the FCC requirement.


The occupied bandwidth test data is included in Test Plot1- Plot 3.

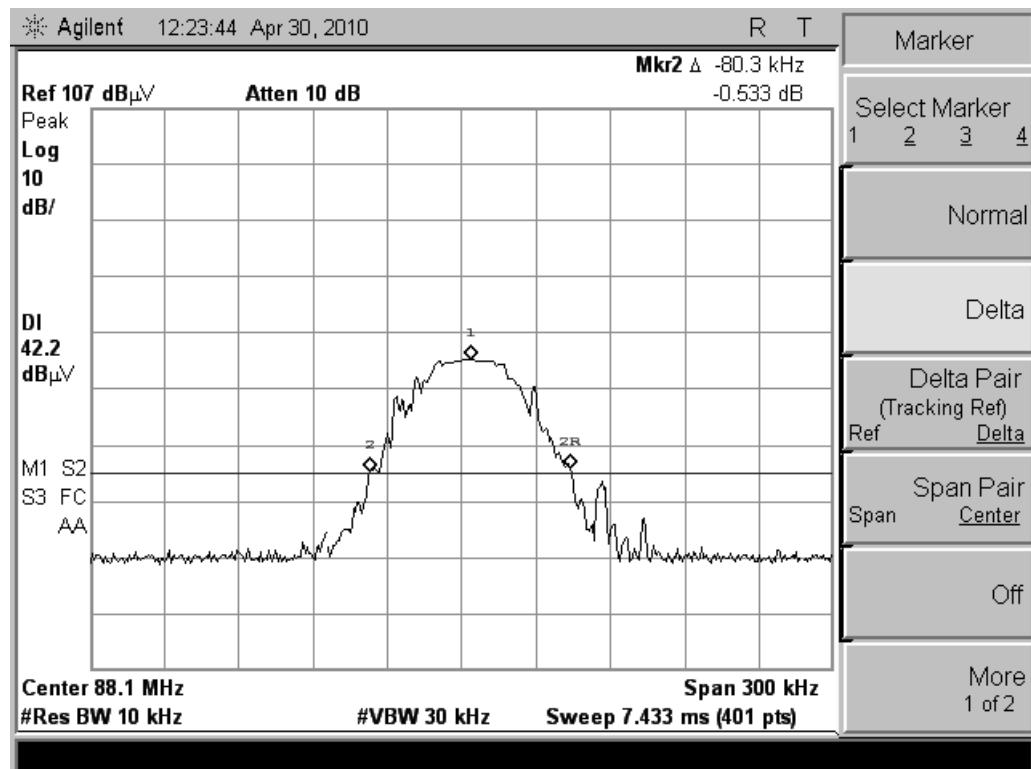Test Plot:

(Plot1: Low Channel)

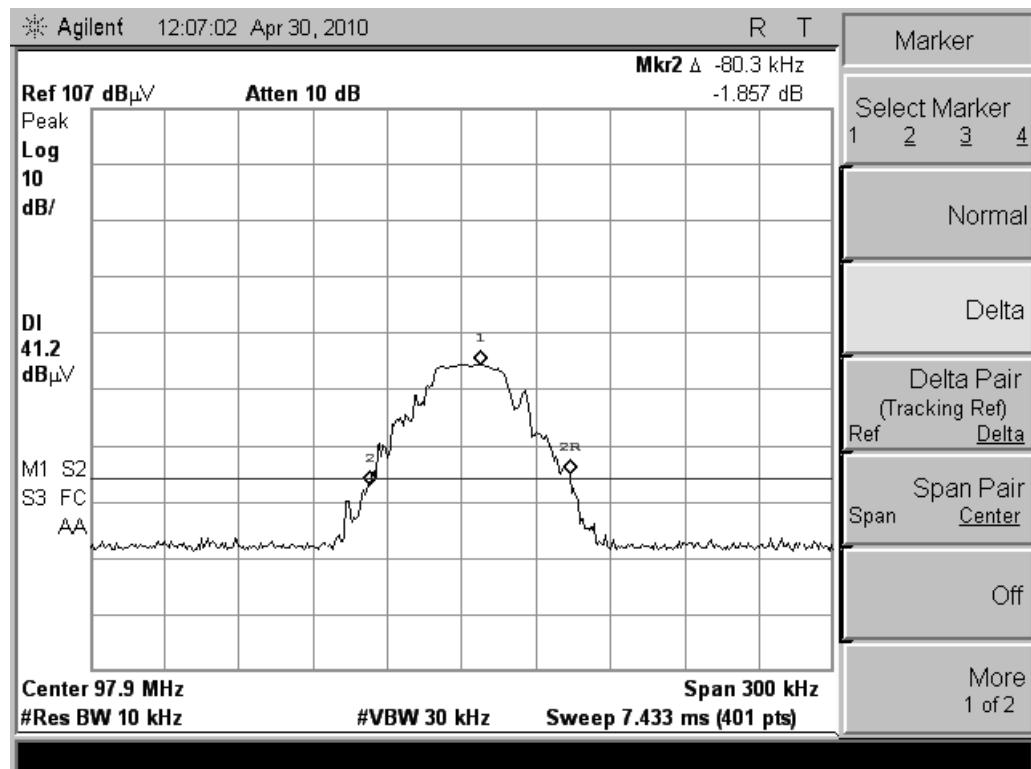

(Plot2: Middle Channel)

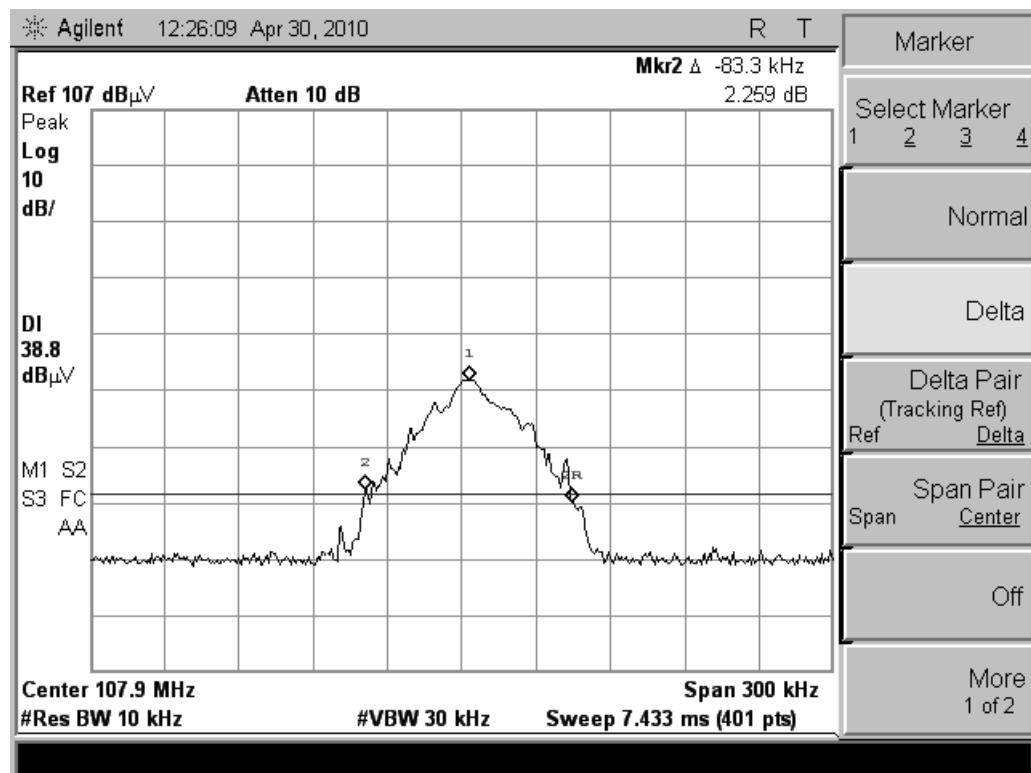

(Plot3: High Channel)

5.2 Frequency Range

5.2.1 Definition

Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88-108 MHz.

5.2.2 Test Description

The EUT was placed on a non-conductive table 0.8 meters above the floor. The table was rotated to an angle which presented the highest signal level. The occupied bandwidth was based on a 20 dB criteria (20 dB down either side of the emission from the peak emission). A drawing showing the test setup is given as Figure 1.

5.2.3 Test Result

The operation frequency band is from 88.1 MHz to 107.9 MHz.

This frequency range complies with the FCC requirement (Refer to the test Plot1- Plot3).

5.3 Radiated Emission

5.3.1 Definition

The field strength of any emission within this band (section 15.239, frequency between 88 MHz –108 MHz) shall not exceed 250 micro volts /meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209(Intentional Radiators general limit), as below.

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3



Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Test Distance (m)	Field Strength (dB μ V/m at 3-meter)
1.705-30	30	3	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54
Fundamental	250	3	48

5.3.2 Test Configuration

Test Setup:

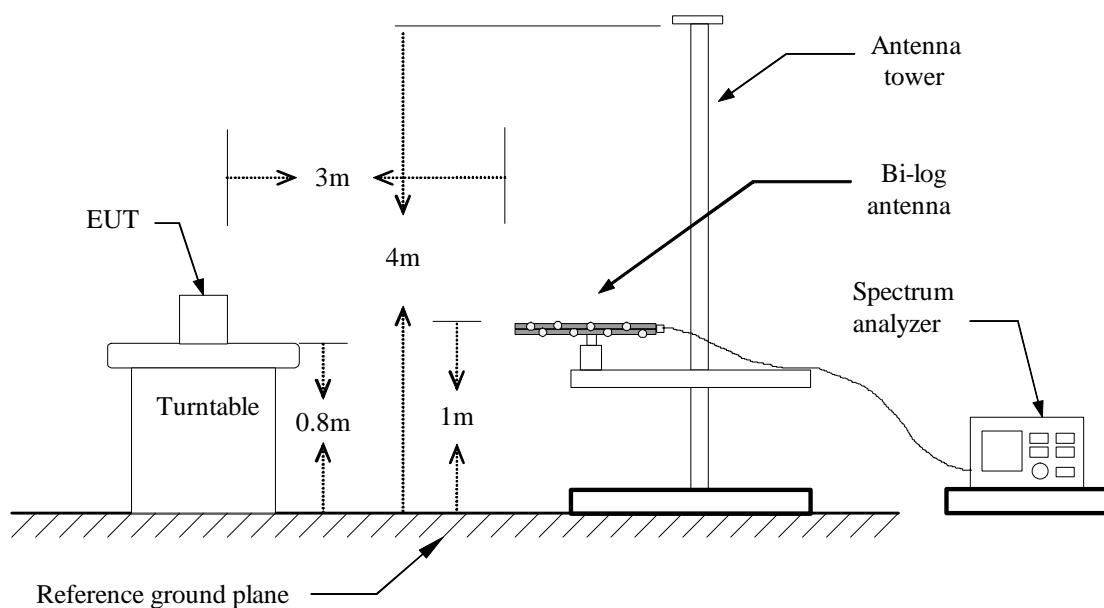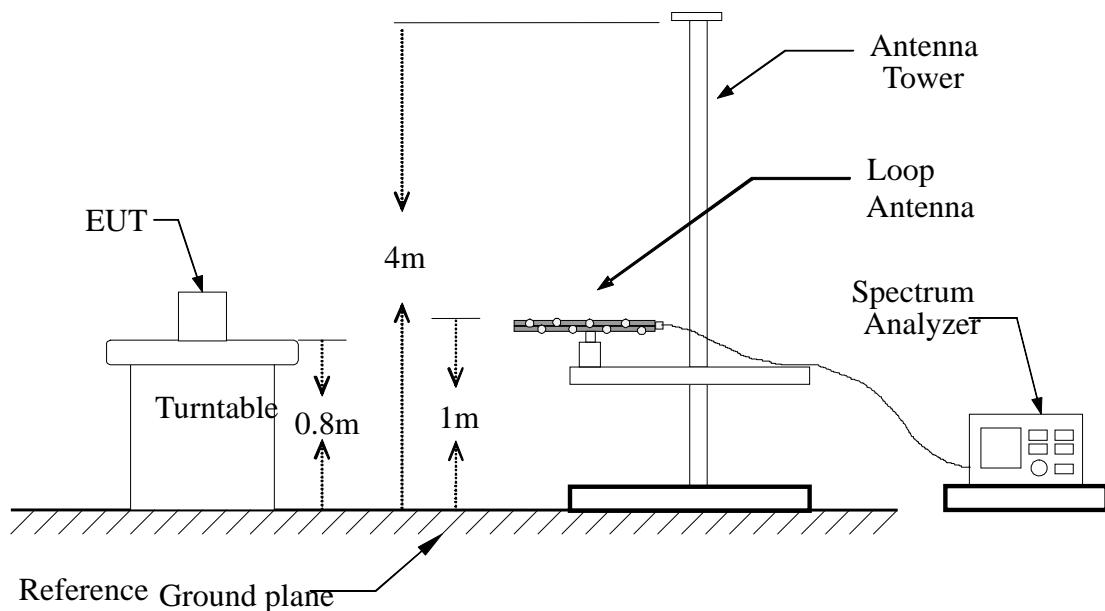

5.3.3 Test Description

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz: RBW=100 kHz / VBW=300 kHz / Sweep=AUTO
Above 1GHz :(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

5.3.4 Test Result

Below 30 MHz:

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit (dBuV/m)	Safe Margin (dB)
--							> 20
N/A							
--							> 20
N/A							

Notes:

1. *Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

Above 30 MHz:



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310


Radiated Emission Measurement

File :CA-001

Data #1

Date: 2010-4-27

Time: 18:10:43

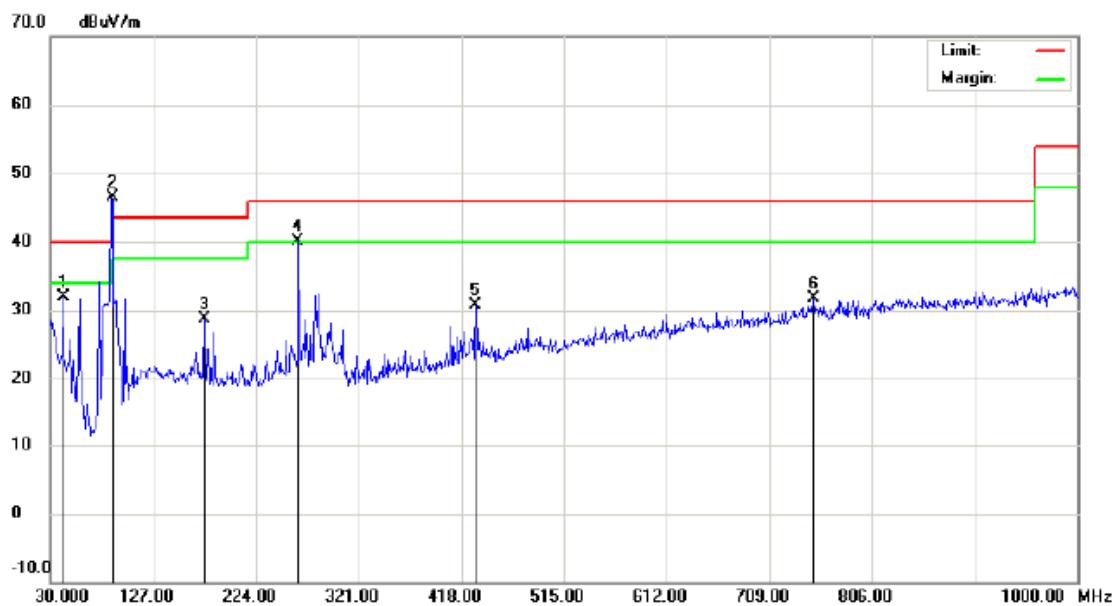

Site: site MOST 3M

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: DC 12V

Humidity: 60 %

EUT: CAR MP3 PLAYER WITH FM TRANSMITTER

Distance:

M/N: CA001

Mode: MP3+FM Transmitting Mode

Note: Low Channel(88.1MHz)

No.	Mk.	Reading Freq. MHz	Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Detector	Table Height cm	Table Degree degree	Comment
1		41.6400	16.14	15.75	31.89	40.00	-8.11	peak			
2	*	88.1300	35.07	11.36	46.43	47.96	-1.53	peak	Fundermental		
3		175.5000	11.85	16.93	28.78	43.50	-14.72	peak			
4	!	263.7700	21.99	18.09	40.08	46.00	-5.92	peak			
5		431.5800	10.46	20.32	30.78	46.00	-15.22	peak			
6		750.7100	5.99	25.79	31.78	46.00	-14.22	peak			

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310


Radiated Emission Measurement

File : CA-001

Data #: 2

Date: 2010-4-27

Time: 18:13:42

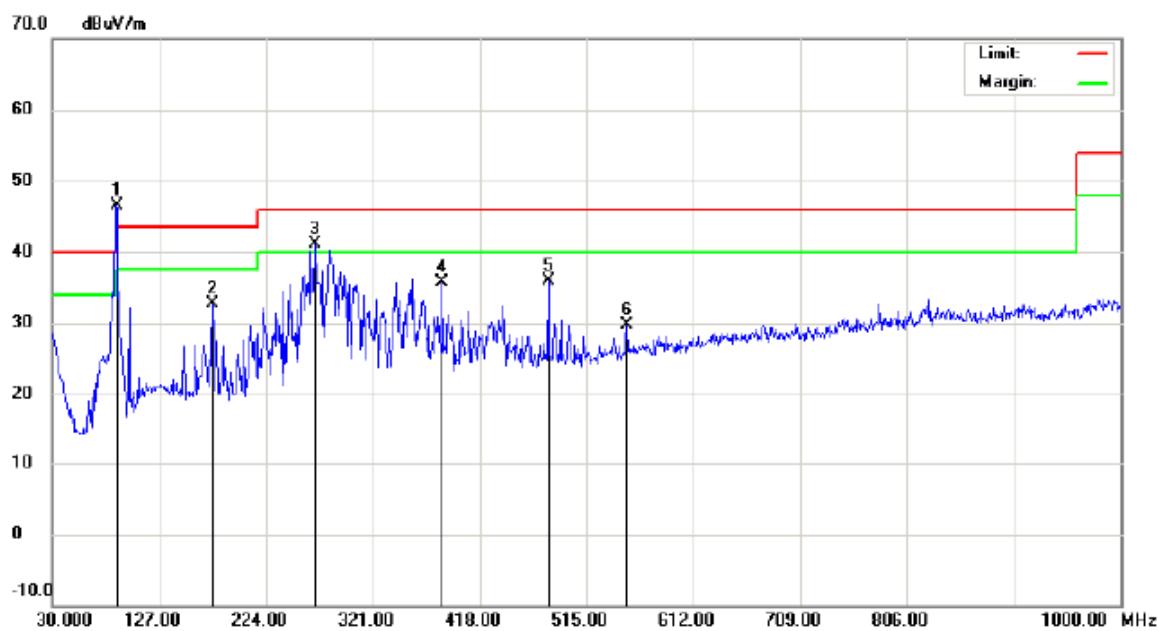

Site site MOST 3M

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: DC 12V

Humidity: 60 %

EUT: CAR MP3 PLAYER WITH FM TRANSMITTER

Distance:

M/N: CA001

Mode: MP3+FM Transmitting Mode

Note: Low Channel(88.1MHz)

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	88.1300	35.05	11.36	46.41	47.96	-1.55	peak	Fundermental		
2		175.5000	15.73	16.93	32.66	43.50	-10.84	peak			
3	!	268.6200	22.34	18.72	41.06	46.00	-4.94	peak			
4		384.0500	17.57	18.18	35.75	46.00	-10.25	peak			
5		480.0800	14.26	21.70	35.96	46.00	-10.04	peak			
6		551.8600	7.21	22.57	29.78	46.00	-16.22	peak			

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310


Radiated Emission Measurement

File : CA-001

Data : #3

Date: 2010-4-27

Time: 18:18:00

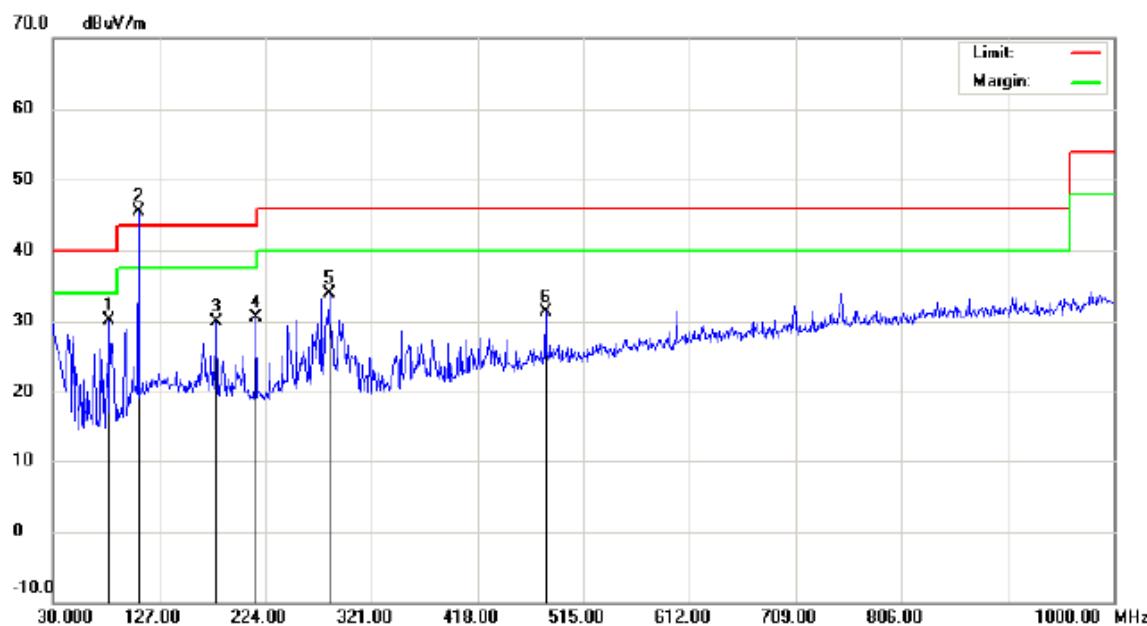

Site: site MOST 3M

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: DC 12V

Humidity: 60 %

EUT: CAR MP3 PLAYER WITH FM TRANSMITTER

Distance:

M/N: CA001

Mode: MP3+FM Transmitting Mode

Note: High Channel(107.9MHz)

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment			Height	Degree	
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		81.4100	18.81	11.37	30.18	40.00	-9.82	peak		
2	*	107.9000	30.10	15.41	45.51	47.96	-2.45	peak	Fundermental	
3		179.3800	13.09	16.73	29.82	43.50	-13.68	peak		
4		215.2700	14.42	16.12	30.54	43.50	-12.96	peak		
5		282.2000	14.47	19.42	33.89	46.00	-12.11	peak		
6		480.0800	9.52	21.70	31.22	46.00	-14.78	peak		

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310


Radiated Emission Measurement

File : CA-001

Data #: 4

Date: 2010-4-27

Time: 18:21:29

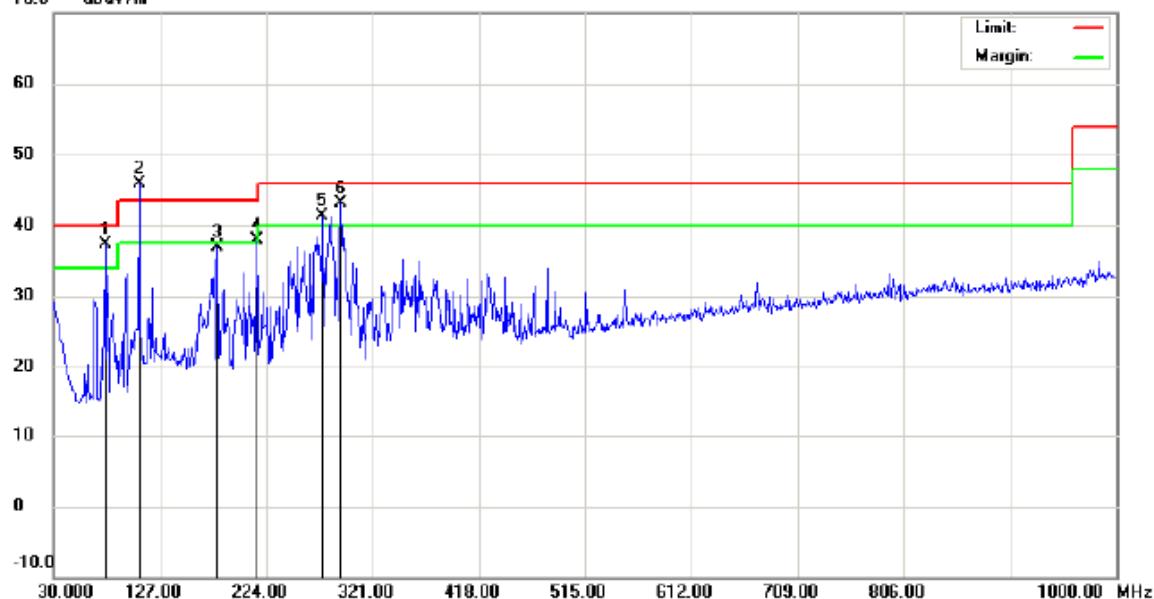70.0 dB μ V/m

Site: site MOST 3M

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: DC 12V

Humidity: 60 %

EUT: CAR MP3 PLAYER WITH FM TRANSMITTER

Distance:

M/N: CA001

Mode: MP3+FM Transmitting Mode

Note: High Channel(107.9MHz)

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment				Height	Degree
		MHz	dB μ V	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	!	76.5600	25.67	11.57	37.24	40.00	-2.76	peak		
2	*	107.9000	30.50	15.41	45.91	47.96	-2.05	peak	Fundermental	
3		179.3800	20.22	16.73	36.95	43.50	-6.55	peak		
4	!	215.2700	21.79	16.12	37.91	43.50	-5.59	peak		
5	!	275.4100	22.14	19.22	41.36	46.00	-4.64	peak		
6	!	291.9000	23.73	19.36	43.09	46.00	-2.91	peak		

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File :CA-001

Data :#5

Date: 2010-4-27

Time: 18:26:12

70.0 dBuV/m



Site: site MOST 3M

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: DC 12V

Humidity: 60 %

EUT: CAR MP3 PLAYER WITH FM TRANSMITTER

Distance:

M/N: CA001

Mode: MP3+FM Transmitting Mode

Note: Middle Channel(97.9MHz)

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	!	44.5500	21.47	13.89	35.36	40.00	-4.64	peak			
2	!	78.5000	24.47	11.48	35.95	40.00	-4.05	peak			
3	*	97.9000	33.13	12.72	45.85	47.96	-2.11	peak	Fundermental		
4	!	137.6699	21.57	17.32	38.89	43.50	-4.61	peak			
5		209.4500	16.64	16.03	32.67	43.50	-10.83	peak			
6		280.2600	11.92	19.40	31.32	46.00	-14.68	peak			

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310


Radiated Emission Measurement

File :CA-001

Data :#6

Date: 2010-4-27

Time: 18:30:27

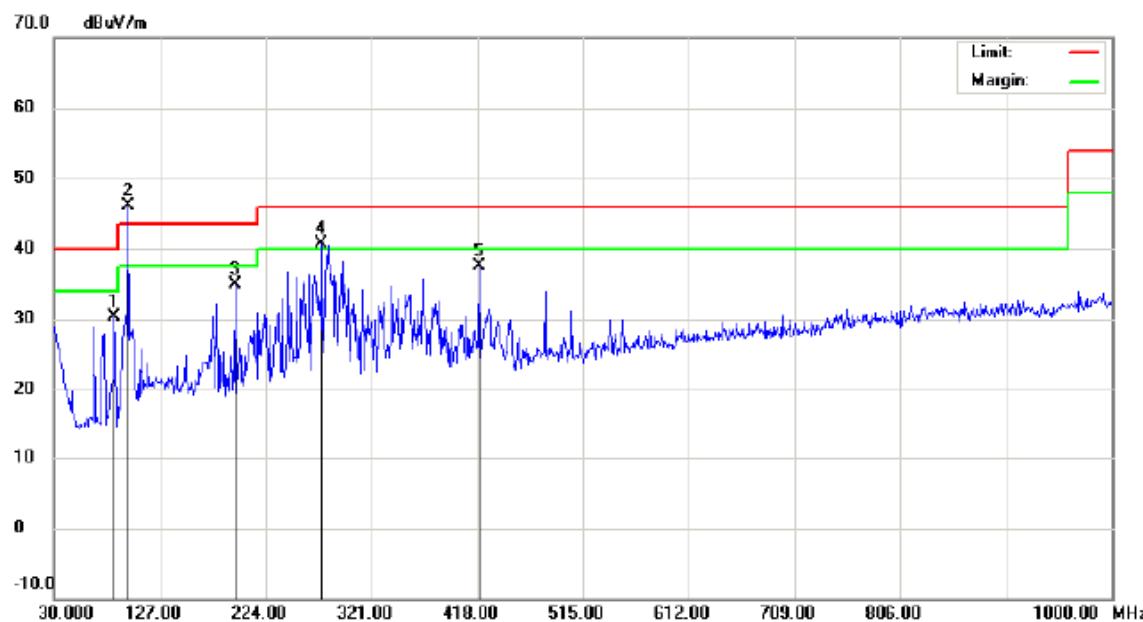

Site: site MOST 3M

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: DC 12V

Humidity: 60 %

EUT: CAR MP3 PLAYER WITH FM TRANSMITTER

Distance:

M/N: CA001

Mode: MP3+FM Transmitting Mode

Note: Middle Channel(97.9MHz)

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Height	Degree
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		85.2900	19.03	11.31	30.34	40.00	-9.66	peak			
2	*	97.9000	33.38	12.72	46.10	47.96	-1.86	peak	Fundermental		
3		195.8700	17.97	16.95	34.92	43.50	-8.58	peak			
4	!	275.4100	21.50	19.22	40.72	46.00	-5.28	peak			
5		419.9400	17.47	19.99	37.46	46.00	-8.54	peak			

*:Maximum data x:Over limit !:over margin

5.4 Conducted Emission


5.4. 1 Definition

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

****Note:** 1. the lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

5.4. 1 Block Diagram of Test Setup

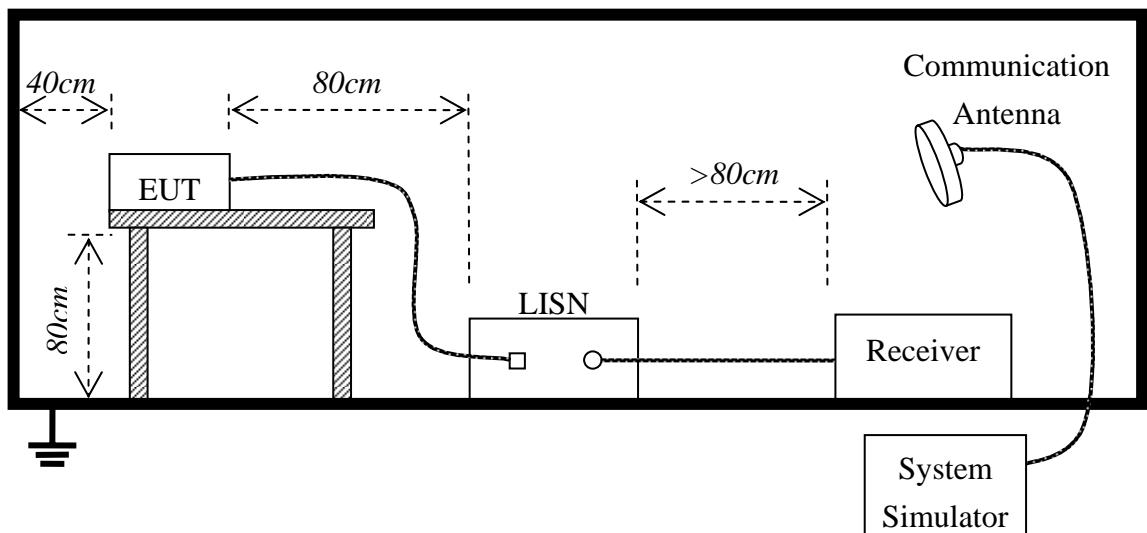

5.4.2 Preliminary Procedure of Line Conducted Emission Test

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per FCC Part 15 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per FCC Part 15.
- 3) All I/O cables were positioned to simulate typical actual usage as per FCC Part 15.
- 4) The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5) All support equipments received power from a second LISN supplying power of AC 120V/60Hz, if any.
- 6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:

Preliminary Conducted Emission Test				
Frequency Range Investigated		150KHz TO 30 MHz		
Mode of operation	Date	Report No.	Data#	Worst Mode
FM Mode	2010-04-27	MOST100416F1	1_ (L,N)	<input type="radio"/>

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

5.4.3 Final Procedure of Line Conducted Emission Test

EUT and support equipment was set up on the test bench as per step 9 of the preliminary test. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector. The test data of the worst case condition(s) was reported on the Summary Data page.

5.4.4 Test Result of Line Conducted Emission Test



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement

File: CA-001

Data #5

Date: 10/04/27/

Time: 18:02:42

80.0 dBuV



Site site #1

Phase: +

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: DC 12V

Humidity: 60 %

EUT: CAR MP3 PLAYER WITH FM TRANSMITTER

M/N: CA001

Mode: FM Transmitting Mode

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
			MHz	dBuV	dB	dBuV	dB		
1	*	0.2460	37.69	11.69	49.38	61.89	-12.51	peak	
2		0.6620	29.68	10.00	39.68	56.00	-16.32	peak	
3		1.6060	25.26	9.39	34.65	56.00	-21.35	peak	
4		4.2020	12.59	11.20	23.79	56.00	-32.21	peak	
5		24.0020	18.39	9.00	27.39	60.00	-32.61	peak	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement


File: CA-001

Data #: 6

Date: 10/04/27/

Time: 18/04/29

00.0 dBuV

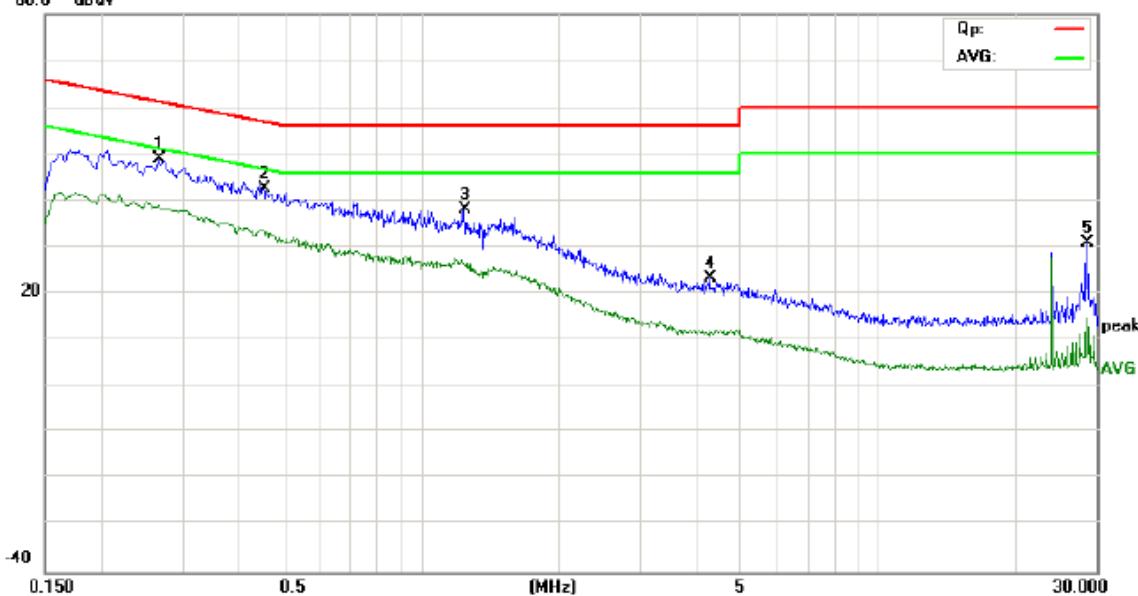

Site: site #1

Phase: -

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: DC 12V

Humidity: 60 %

EUT: CAR MP3 PLAYER WITH FM TRANSMITTER

M/N: CA001

Mode: FM Transmitting Mode

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	0.2660	37.41	11.56	48.97	61.24	-12.27	peak	
2		0.4500	32.33	10.33	42.66	56.88	-14.22	peak	
3		1.2420	28.29	9.76	38.05	56.00	-17.95	peak	
4		4.2900	12.21	11.29	23.50	56.00	-32.50	peak	
5		28.5140	21.81	9.00	30.81	60.00	-29.19	peak	

*:Maximum data x:Over limit !:over margin

5.5 Antenna Requirement

5.5.1 Definition

An analysis of the CA001 was performed to determine compliance with FCC Section 15.203. This section requires specific handling and control of antennas used for devices subject to regulations.

5.5.2 Evaluation Procedure

The structure and application of the CA001 was analyzed with respect to the rules. The antenna is an internal antenna, and is not accessible to the user. An auxiliary antenna port is not present.

5.5.3 Evaluation Criteria

Section 15.203 of the rules states that the subject device must meet at least one of the following criteria:


- (a) Antenna must be permanently attached to the unit.
- (b) Antenna must use a unique type of connector to attach to the EUT.
- (c) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

5.5.4 Evaluation Results


The CA001 meets the criteria of this rule by virtue of having an internal antenna inaccessible to the user. The EUT is therefore compliant.

APPENDIX 1
PHOTOGRAPHS OF TEST SETUP

Radiated Emission Test Setup

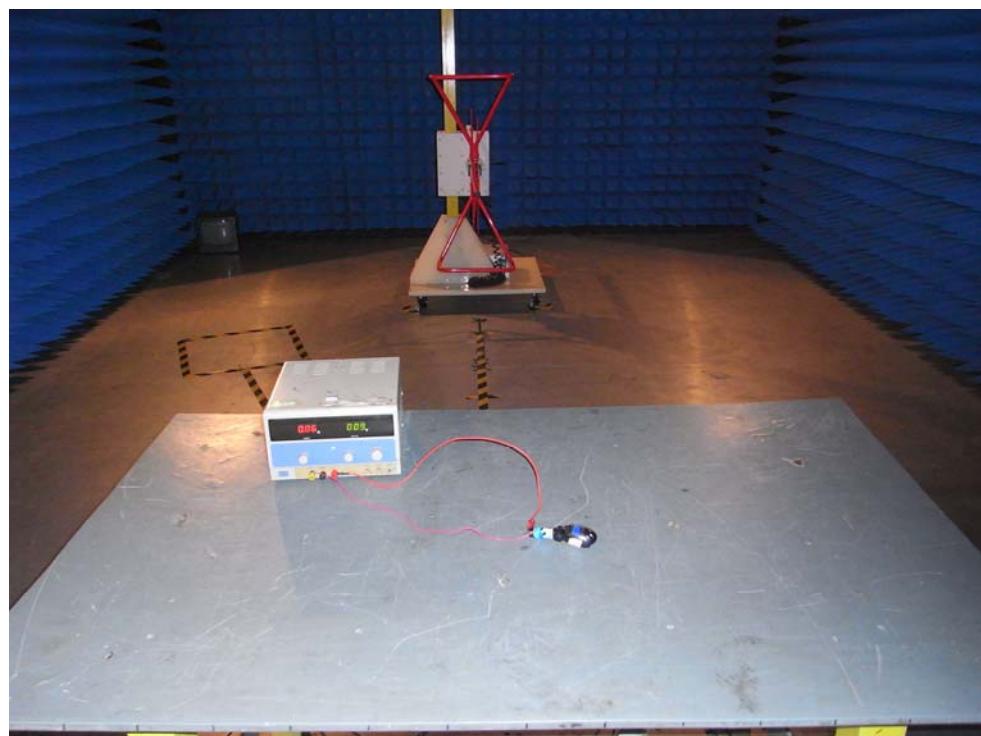

Conducted Emission Test Setup

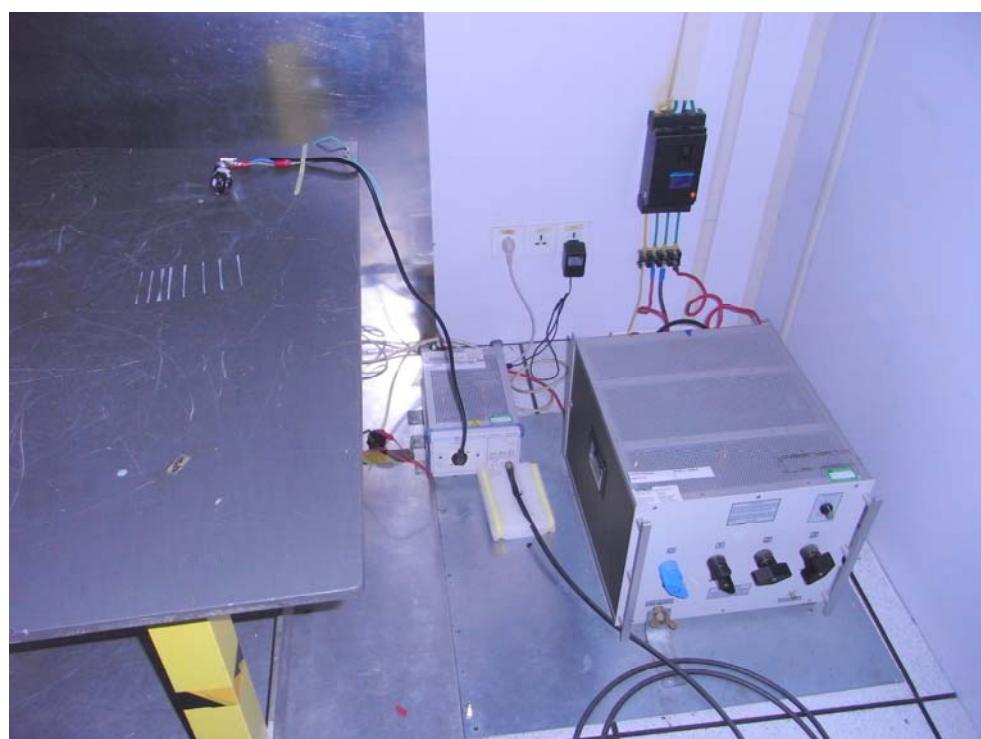

**APPENDIX 2
PHOTOGRAPHS OF EUT**

FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE



TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE




LEFT VIEW OF SAMPLE




RIGHT VIEW OF SAMPLE




INTERNAL PHOTO OF SAMPLE-1

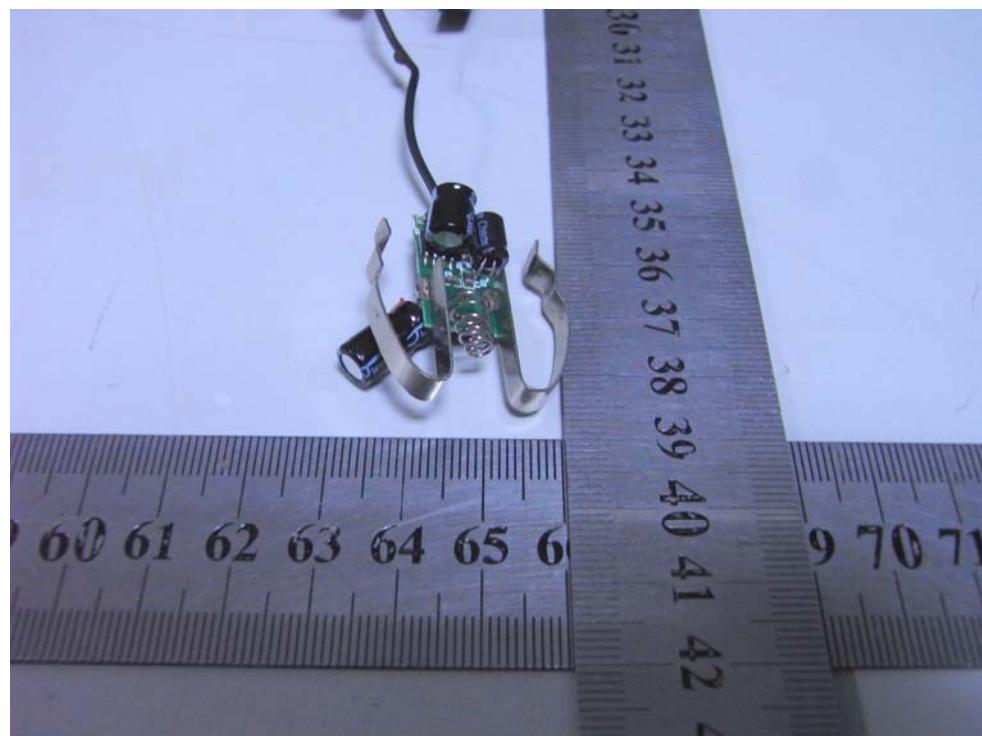


INTERNAL PHOTO OF SAMPLE-2

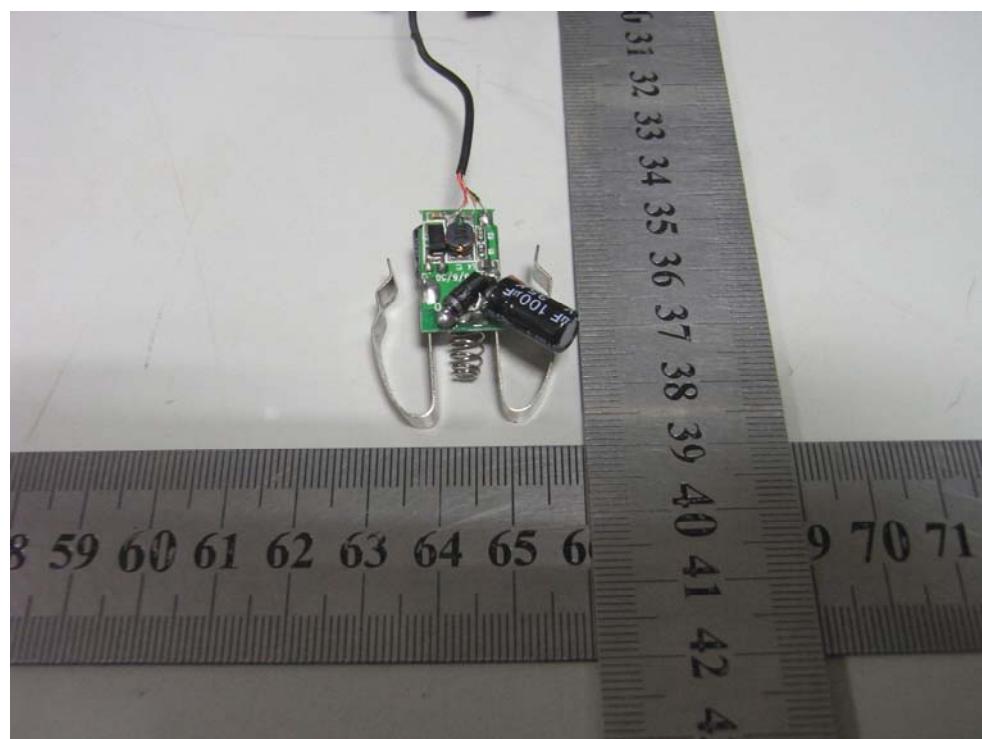

INTERNAL PHOTO OF SAMPLE-3

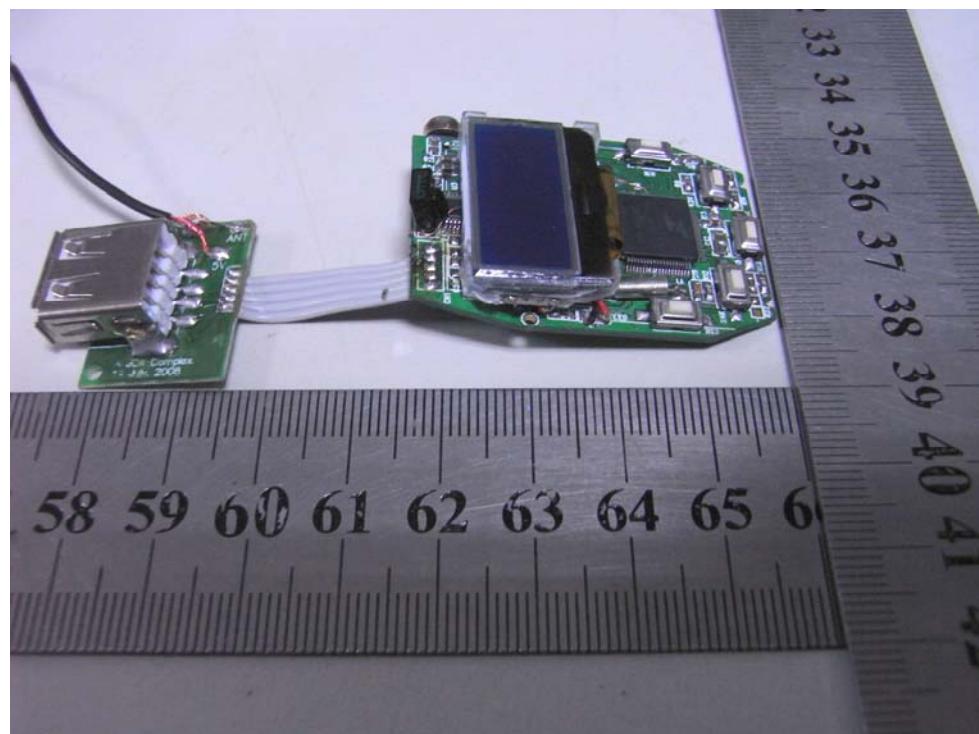

INTERNAL PHOTO OF SAMPLE-4

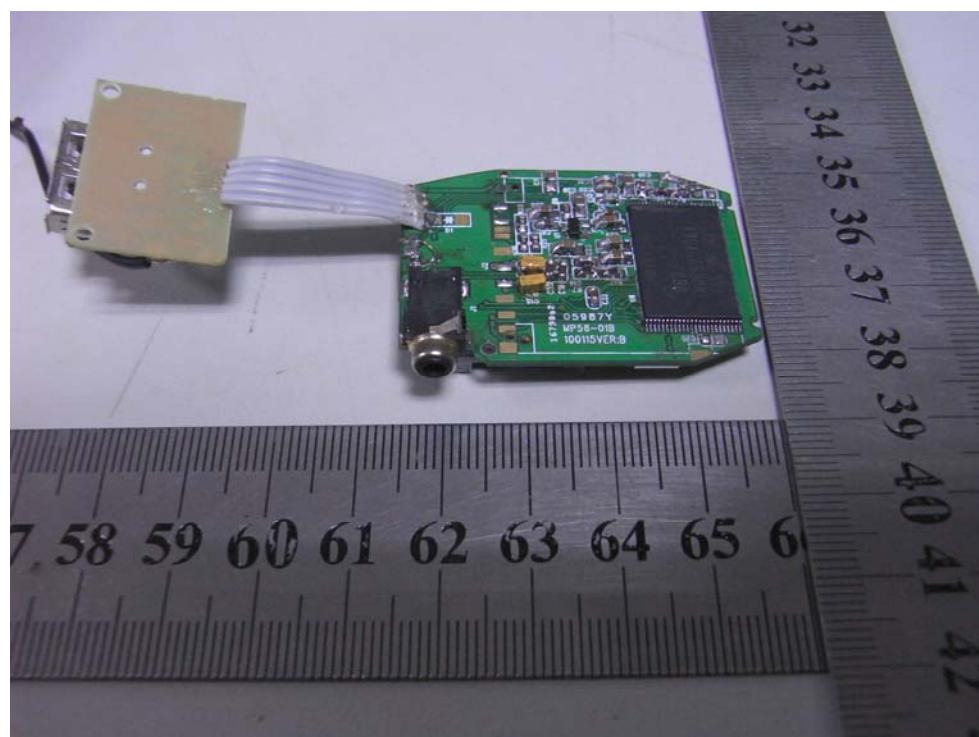

-----END OF REPORT-----