

FCC Radio Test Report FCC ID: YDUA2105AH

This report concerns (check one) : Original Grant Class II Change

Project No. : 1204C205
Equipment : Tablet PC
Brand Name : Lenovo

Model Name: 60014; 2288

Applicant: PLANER CHEVAL TECH PTE.LTD

Address: No. 10 Anson Road #15-17/18, International

Plaza Singapore 079903

Tested by:

Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Apr. 24, 2012

Date of Test:

Apr. 24, 2012 ~ May. 16, 2012

Testing Engineer

(David Mao)

Technical Manager

(Leo Hung)

Authorized Signatory

(Steven Lu)

Neutron Engineering Inc.

No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.

TEL: (0769) 8318-3000 FAX: (0769) 8319-6000

Report No.: NEI-FCCP-1-1204C205 Page 1 of 101



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: NEI-FCCP-1-1204C205 Page 2 of 101

	Table of Contents	Page
1	. CERTIFICATION	6
2	. SUMMARY OF TEST RESULTS	7
_	2.1 TEST FACILITY	8
		_
	2.2 MEASUREMENT UNCERTAINTY	8
3	. GENERAL INFORMATION	9
	3.1 GENERAL DESCRIPTION OF EUT	9
	3.2 DESCRIPTION OF TEST MODES	11
	3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
	3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTE	D 12
	3.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	13
4	. EMC EMISSION TEST	14
	4.1 CONDUCTED EMISSION MEASUREMENT	14
	4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
	4.1.2 MEASUREMENT INSTRUMENTS LIST AND SETTING	14
	4.1.3 TEST PROCEDURE 4.1.4 DEVIATION FROM TEST STANDARD	15 15
	4.1.5 TEST SETUP	15
	4.1.6 EUT OPERATING CONDITIONS	16
	4.1.7 TEST RESULTS	17
	4.2 RADIATED EMISSION MEASUREMENT	21
	4.2.1 RADIATED EMISSION LIMITS 4.2.2 MEASUREMENT INSTRUMENTS LIST ANS SETTING	21 22
	4.2.3 TEST PROCEDURE	22
	4.2.4 DEVIATION FROM TEST STANDARD	23
	4.2.5 TEST SETUP	24
	4.2.6 EUT OPERATING CONDITIONS	24
	4.2.7 TEST RESULTS (BETWEEN30 – 1000 MHZ) 4.2.8 TEST RESULTS (ABOVE 1000 MHZ)	25 29
_		
5	. NUMBER OF HOPPING CHANNEL	55
	5.1 APPLIED PROCEDURES / LIMIT 5.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	55 55
	5.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING 5.1.2 TEST PROCEDURE	55
	5.1.3 DEVIATION FROM STANDARD	55
	5.1.4 TEST SETUP	55
	5.1.5 EUT OPERATION CONDITIONS	55
	5.1.6 TEST RESULTS	56

Report No.: NEI-FCCP-1-1204C205 Page 3 of 101

Table of Contents	Page
6 . AVERAGE TIME OF OCCUPANCY	58
6.1 APPLIED PROCEDURES / LIMIT	58
6.1.1 MEASUREMENT INSTRUMENTS LIST	58
6.1.2 TEST PROCEDURE	58
6.1.3 DEVIATION FROM STANDARD	58
6.1.4 TEST SETUP 6.1.5 EUT OPERATION CONDITIONS	59 59
6.1.6 TEST RESULTS	6 0
7 . HOPPING CHANNEL SEPARATION MEASUREMENT	72
7.1 APPLIED PROCEDURES / LIMIT	72
7.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	72
7.1.2 TEST PROCEDURE	72
7.1.3 DEVIATION FROM STANDARD 7.1.4 TEST SETUP	72 72
7.1.4 TEST SETOP 7.1.5 EUT OPERATION CONDITIONS	72
7.1.6 TEST RESULTS	73
8 . BANDWIDTH TEST	77
8.1 APPLIED PROCEDURES / LIMIT	77
8.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	77 ——
8.1.2 TEST PROCEDURE 8.1.3 DEVIATION FROM STANDARD	77 77
8.1.4 TEST SETUP	77
8.1.5 EUT OPERATION CONDITIONS	77
8.1.6 TEST RESULTS	78
9 . PEAK OUTPUT POWER TEST	82
9.1 APPLIED PROCEDURES / LIMIT	82
9.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	82
9.1.2 TEST PROCEDURE 9.1.3 DEVIATION FROM STANDARD	82 82
9.1.4 TEST SETUP	82 82
9.1.5 EUT OPERATION CONDITIONS	82
9.1.6 TEST RESULTS	83
10 . ANTENNA CONDUCTED SPURIOUS EMISSION	87
10.1 APPLIED PROCEDURES / LIMIT	87
10.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	87
10.1.2 TEST PROCEDURE 10.1.3 DEVIATION FROM STANDARD	87 87
10.1.4 TEST SETUP	87
10.1.5 EUT OPERATION CONDITIONS	87

Report No.: NEI-FCCP-1-1204C205 Page 4 of 101

Table of Contents	Page
10.1.6 TEST RESULTS	88
11 . EUT TEST PHOTO	100

Report No.: NEI-FCCP-1-1204C205 Page 5 of 101

1. CERTIFICATION

Equipment: Tablet PC Brand Name: Lenovo Model Name: 60014; 2288

Applicant: PLANER CHEVAL TECH PTE.LTD Date of Test: Apr. 24, 2012 ~ May. 16, 2012 Test Item: ENGINEERING SAMPLE

Standards: FCC Part15, Subpart C(15.247)/ ANSI C63.4:2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1204C205) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the Bluetooth approval part of the product.

Report No.: NEI-FCCP-1-1204C205 Page 6 of 101

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

APPLIED STANDARD: 47 CFR Part 15, Subpart C				
Standard Section 47 CFR Part 15	Test Item	Judgment	Remark	
15.207	Conducted Emission	PASS		
15.247(d)	Antenna conducted Spurious Emission	PASS		
15.247 (a)(1)	Hopping Channel Separation	PASS		
15.247 (b)(1)	Peak Output Power	PASS		
15.247(d) 15.209	Radiated Spurious Emission	PASS		
15.247 (a)(1)(iii)	Number of Hopping Frequency	PASS		
15.247 (a)(1)(iii)	Dwell Time	PASS		
15.205	Restricted Bands	PASS		
15.203	Antenna Requirement	PASS		

NOTE:

- (1)" N/A" denotes test is not applicable in this Test Report
- (2) According to FCC Public Notice DA 00-705, March 30, 2000

Report No.: NEI-FCCP-1-1204C205 Page 7 of 101

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3, Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792 Neutron's test firm number for FCC 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately 95 % \circ

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)	NOTE
DG-CB03	CB03 CISPR	30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	Н	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	Н	3.94	

Report No.: NEI-FCCP-1-1204C205 Page 8 of 101

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet PC		
Brand Name	Lenovo		
Model Name	60014; 2288		
Model Difference	Only difference is mode	I name.	
Product Description	The EUT is a Tablet PC Operation Frequency: 2402~2480 MHz Modulation Type: GFSK(1Mbps) Bit Rate of Transmitter		
Channel List	Please refer to the Note		
Power Source	#1 DC Voltage supplied from Li-Polymer battery. Model name: H11NT201A #2 DC Voltage supplied from AC/DC adapter. Model name: HKC0055010-2A #3 DC Voltage supplied from Host system.		
Power Rating	#1 DC 3.7V 2500mAh /9.25Wh #2 I/P 100-240Va.c.,50/60Hz, 0.15A O/P 5.0V, 1.0A #3 120V/60Hz		
Connecting I/O Port(s) Please refer to the User's Manual		's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Module	Brand	Model name
BT+FM	QUALCOMM	WCN2243-0-58WLNSP-TR-05
WLAN	ATHEROS	AR6005G-CF1B-R
WCDMA+GPS(RX)	QUALCOMM	RTR-6285A-0-137CSP-TR-01

Report No.: NEI-FCCP-1-1204C205 Page 9 of 101



3

		Chann	el List		
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
80	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	JTIE	AH-JT-0203N0304	Integral	N/A	-0.13

Report No.: NEI-FCCP-1-1204C205 Page 10 of 101

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode NOTE (1)
Mode 2	Bluetooth
Mode 3	Bluetooth+3G(1Mbps CH00+WCDMA Band V CH4132)

The EUT system operated these modes(Li-Polymer battery: H11NT201A) were found to be the worst case during the pre-scanning test as Following (H11NT201A) of Radiated/Conducted Emission:

For Conducted Emission		
Final Test Mode	Description	
Mode 2	Bluetooth	
Mode 3	Bluetooth+3G(1Mbps CH00+WCDMA Band V CH4132)	

For Radiated Emission				
Final Test Mode	Description			
Mode 1	TX Mode NOTE (1)			
Mode 3	Bluetooth+3G(1Mbps CH00+WCDMA Band V CH4132)			

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software Version	Test program: Bluetooth Test Set					
Frequency	2402 MHz	2441 MHz	2480 MHz			
Parameters-1Mbps	DEF	DEF	DEF			
Parameters-3Mbps	DEF	DEF	DEF			

Report No.: NEI-FCCP-1-1204C205 Page 11 of 101



3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

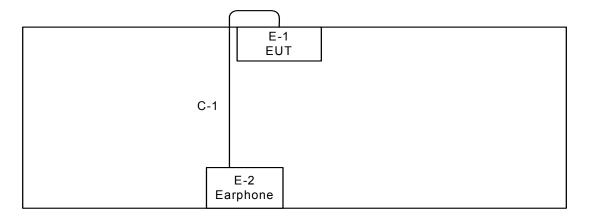

C-1 Audio Cable

Report No.: NEI-FCCP-1-1204C205 Page 12 of 101

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Tablet PC	Lenovo	60014	YDUA2105AH	N/A	EUT
E-2	Earphone	PLANER	NA	NA	NA	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>"Length_"</code> column.

Report No.: NEI-FCCP-1-1204C205 Page 13 of 101

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B	Standard		
FREQUENCT (IVITIZ)	Quasi-peak	Average	Quasi-peak	Average	Stariuaru	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR	
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR	
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR	

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	May.26.2012
2	LISN	R&S	ENV216	100087	May.26.2012
3	Test Cable	N/A	C_17	N/A	Mar.29.2013
4	EMI TEST RECEIVER	R&S	ESCS30	826547/022	May.26.2012
5	50Ω Terminator	SHX	TF2-3G-A	08122902	May.26.2012

Remark: "N/A" denotes No Model No., Serial No. or No Calibration specified.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

Report No.: NEI-FCCP-1-1204C205 Page 14 of 101


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

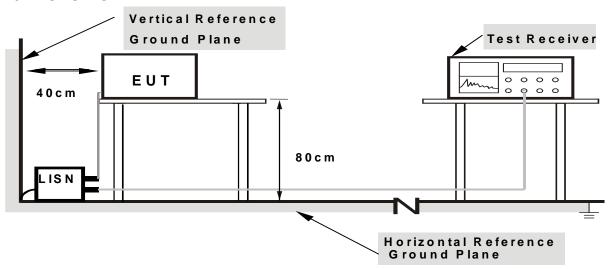

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

Report No.: NEI-FCCP-1-1204C205 Page 15 of 101



4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting / Hopping on mode.

Report No.: NEI-FCCP-1-1204C205 Page 16 of 101


4.1.7 TEST RESULTS

EUT:	Tablet PC	Model Name :	60014
Temperature:	25 ℃	Relative Humidity:	55 %
Pressure:	1010hPa	Test Power :	AC 120V/60Hz
Test Mode:	Bluetooth		

Freq.	Terminal	Measured(dBuV)		Limits(dBuV)		Margin(dBuV)	
(MHz)	L/N	QP-Mode	AV-Mode	QP-Mode	AV-Mode	QP-Mode	AV-Mode
0.51	Line	43.90	31.28	56.00	46.00	-12.10	-14.72
0.68	Line	42.49	31.59	56.00	46.00	-13.51	-14.41
1.50	Line	44.62	33.79	56.00	46.00	-11.38	-12.21
4.29	Line	43.18	34.18	56.00	46.00	-12.82	-11.82
5.31	Line	44.20	35.20	60.00	50.00	-15.80	-14.80
16.31	Line	32.14	22.24	60.00	50.00	-27.86	-27.76

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform In this case, a " * " marked in AVG Mode column of Interference Voltage Measured •
- (2) Measuring frequency range from 150KHz to 30MHz o

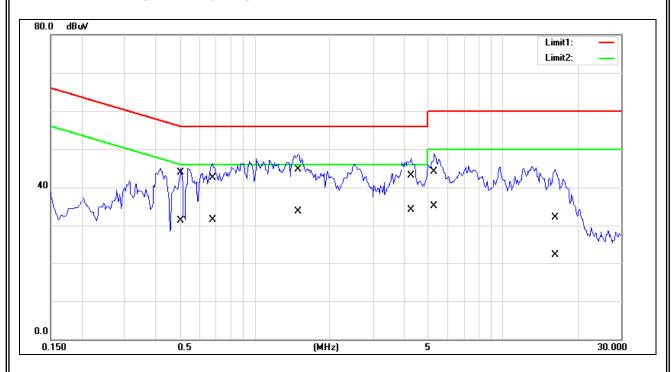


Report No.: NEI-FCCP-1-1204C205 Page 17 of 101



EUT:	Tablet PC	Model Name :	60014
Temperature:	25 ℃	Relative Humidity:	55 %
Pressure:	1010hPa	Test Power :	AC 120V/60Hz
Test Mode :	Bluetooth		

Freq.	Terminal	Measured(dBuV)		Limits(dBuV)		Margin(dBuV)	
(MHz)	L/N	QP-Mode	AV-Mode	QP-Mode	AV-Mode	QP-Mode	AV-Mode
0.48	Neutral	38.11	25.13	56.36	46.36	-18.25	-21.23
1.56	Neutral	39.53	32.64	56.00	46.00	-16.47	-13.36
2.62	Neutral	37.71	28.39	56.00	46.00	-18.29	-17.61
4.32	Neutral	42.70	34.04	56.00	46.00	-13.30	-11.96
5.68	Neutral	42.95	32.61	60.00	50.00	-17.05	-17.39
17.02	Neutral	33.68	23.73	60.00	50.00	-26.32	-26.27

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note ... If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform on this case, a " * " marked in AVG Mode column of Interference Voltage Measured on the North AVG Mode column of Interference Voltage Measured on
- (2) Measuring frequency range from 150KHz to 30MHz o

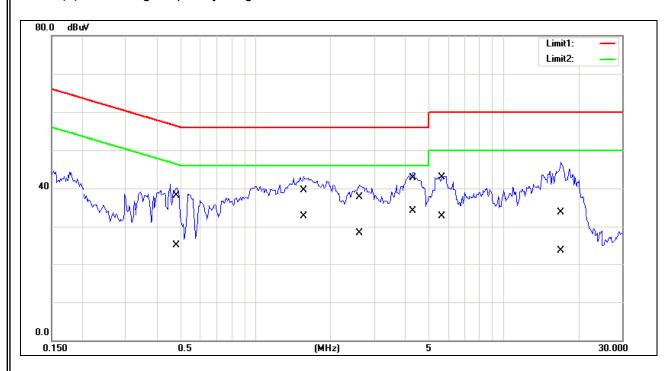


Report No.: NEI-FCCP-1-1204C205 Page 18 of 101

EUT:	Tablet PC	Model Name :	60014		
Temperature:	25 ℃	Relative Humidity:	55 %		
Pressure:	1010hPa	Test Power :	AC 120V/60Hz		
Test Mode:	Bluetooth+3G(1Mbps CH00+WCDMA Band V CH4132)				

Freq.	Terminal	Measured(dBuV)		Limits(dBuV)		Margin(dBuV)	
(MHz)	L/N	QP-Mode	AV-Mode	QP-Mode	AV-Mode	QP-Mode	AV-Mode
0.42	Line	43.53	32.28	57.54	47.54	-14.01	-15.26
0.68	Line	42.49	31.59	56.00	46.00	-13.51	-14.41
1.44	Line	44.28	32.79	56.00	46.00	-11.72	-13.21
4.12	Line	43.73	32.18	56.00	46.00	-12.27	-13.82
5.02	Line	45.38	35.20	60.00	50.00	-14.62	-14.80
9.72	Line	42.85	27.24	60.00	50.00	-17.15	-22.76

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note ... If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform In this case, a " * " marked in AVG Mode column of Interference Voltage Measured •
- (2) Measuring frequency range from 150KHz to 30MHz \circ

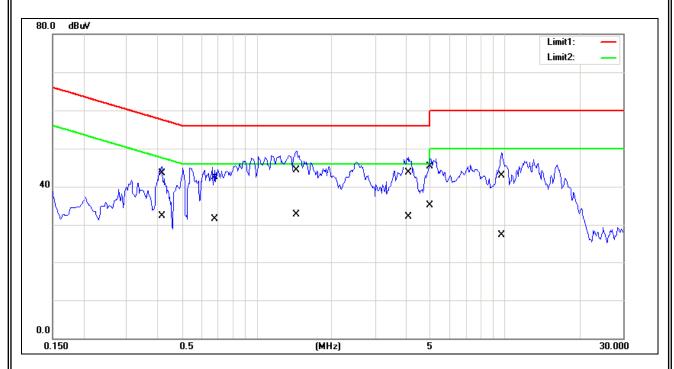


Report No.: NEI-FCCP-1-1204C205 Page 19 of 101



EUT:	Tablet PC	Model Name :	60014	
Temperature:	25 ℃	Relative Humidity:	55 %	
Pressure:	1010hPa	Test Power :	AC 120V/60Hz	
Test Mode :	Bluetooth+3G(1Mbps CH00+WCDMA Band V CH4132)			

Freq.	Terminal	Measured(dBuV)		Limits(dBuV)		Margin(dBuV)	
(MHz)	L/N	QP-Mode	AV-Mode	QP-Mode	AV-Mode	QP-Mode	AV-Mode
0.53	Neutral	37.96	25.13	56.00	46.00	-18.04	-20.87
1.78	Neutral	42.45	30.49	56.00	46.00	-13.55	-15.51
2.62	Neutral	38.22	28.52	56.00	46.00	-17.78	-17.48
4.32	Neutral	42.40	30.96	56.00	46.00	-13.60	-15.04
5.68	Neutral	42.75	33.64	60.00	50.00	-17.25	-16.36
18.42	Neutral	43.02	26.03	60.00	50.00	-16.98	-23.97

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform on this case, a " * " marked in AVG Mode column of Interference Voltage Measured on the North Research AVG Mode column of Interference Voltage Measured on the North AVG Mode column of Interference Voltage Measu
- (2) Measuring frequency range from 150KHz to 30MHz o

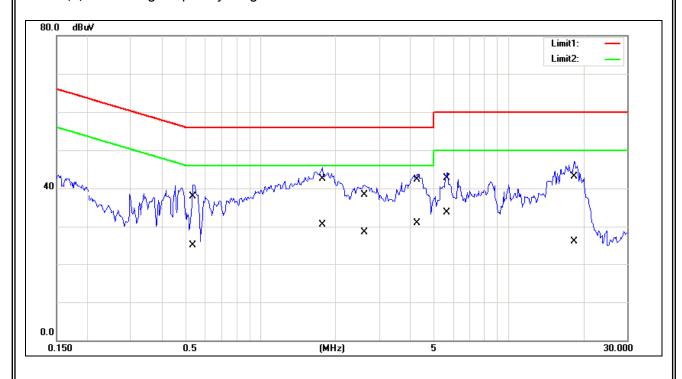

Report No.: NEI-FCCP-1-1204C205 Page 20 of 101

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)		
PREQUENCT (IVITIZ)	PEAK	AVERAGE	
Above 1000	74	54	

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Report No.: NEI-FCCP-1-1204C205 Page 21 of 101

4.2.2 MEASUREMENT INSTRUMENTS LIST ANS SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	R&S	HFH2-Z2	830749/020	May.26.2012
2	Bi-log Antenna	Schwarbeck	VULB9160	9160-3232	May.25.2012
3	Horn Antenna	ETS	3115	00075789	May.10.2013
4	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170340	Dec.14.2012
5	Amplifier	HP	8447D	2944A09673	May.25.2012
6	Amplifier	Agilent	8449B	3008A02274	May.25.2012
7	Amplifier	EMC	EMC2654045	980039	Aug.11.2012
8	Test Receiver	R&S	ESCI	100895	May.25.2012
9	Spectrum Analyzer	R&S	FSP 40	100185	Nov.25.2012
10	Test Cable	N/A	C-01_CB03	N/A	Jul.04.2012
11	Test Cable	HUBER+SUHNER	SUCOFLEX_8 m	313794/4	Apr.10.2013
12	Controller	СТ	SC100	N/A	N/A

Remark: "N/A" denotes No Model Name / Serial No. and No Calibration specified.

Spectrum Parameter	Setting		
Attenuation	Auto		
Start Frequency	1000 MHz		
Stop Frequency	10th carrier harmonic		
RB / VB (emission in restricted	4 MI I= / 4 MI I= for Dools Average=DI/ duty evelo		
band)	1 MHz / 1 MHz for Peak, Average=PK-duty cycle		

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

Report No.: NEI-FCCP-1-1204C205 Page 22 of 101



4.2.3 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement


performed. f. For the actual test configuration, please refer to the related Item –EUT Test Photos. 4.2.4 DEVIATION FROM TEST STANDARD No deviation

Report No.: NEI-FCCP-1-1204C205 Page 23 of 101




4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

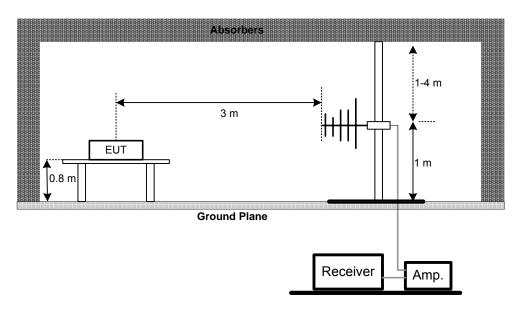

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

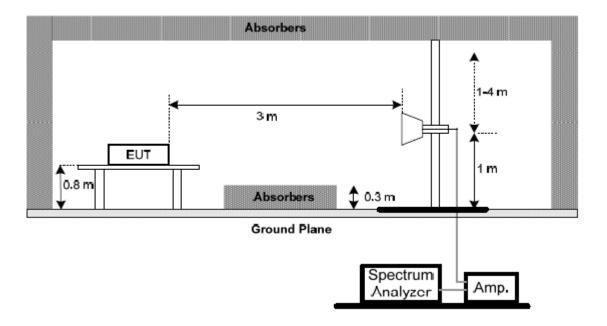

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-1204C205 Page 24 of 101


4.2.7 TEST RESULTS (BETWEEN30 - 1000 MHZ)

EUT:	Tablet PC	Model Name :	60014
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2402MHz -CH00-1Mbps		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
35.82	V	38.96	-16.93	22.03	40.00	- 17.97	
112.45	V	36.91	-18.34	18.57	43.50	- 24.93	
209.45	V	32.17	-16.33	15.84	43.50	- 27.66	
301.60	V	29.99	-12.03	17.96	46.00	- 28.04	
393.75	V	28.35	-9.25	19.10	46.00	- 26.90	
647.89	V	27.87	-3.38	24.49	46.00	- 21.51	

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = $0.3 \text{ sec./MHz} \circ$
- (2) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m J}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m O}$
- (3) Measuring frequency range from 30MHz to 1000MHz $^{\circ}$
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table \circ

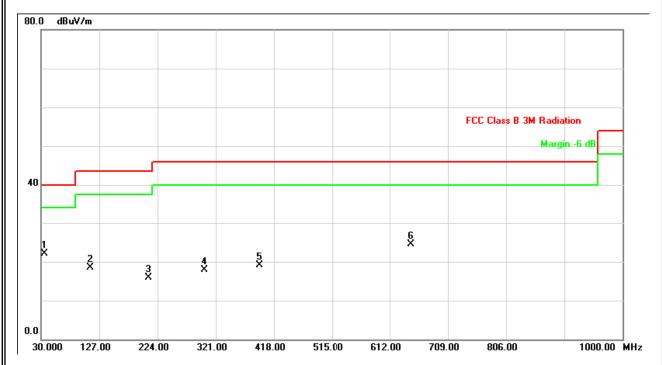


Report No.: NEI-FCCP-1-1204C205 Page 25 of 101



EUT:	Tablet PC	Model Name :	60014
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2402MHz -CH00-1Mbps		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
40.67	Η	34.98	-16.75	18.23	40.00	- 21.77	
53.28	Н	34.08	-17.52	16.56	40.00	- 23.44	
83.35	Η	33.86	-19.10	14.76	40.00	- 25.24	
162.89	Н	31.57	-17.54	14.03	43.50	- 29.47	
311.30	Н	28.08	-11.79	16.29	46.00	- 29.71	
424.79	Н	27.23	-8.57	18.66	46.00	- 27.34	

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz $^{\circ}$
- (2) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m l}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m o}$
- (3) Measuring frequency range from 30MHz to 1000MHz o
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table \circ

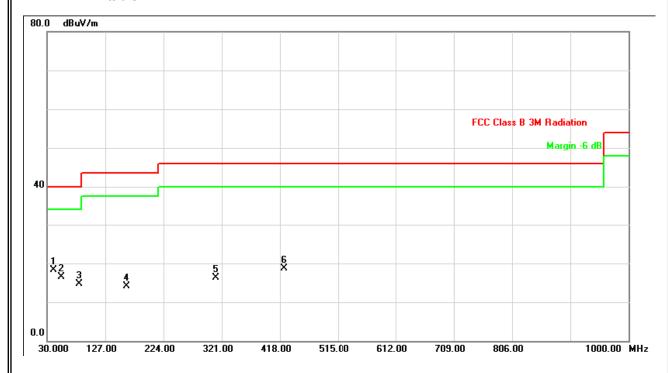


Report No.: NEI-FCCP-1-1204C205 Page 26 of 101



EUT:	Tablet PC	Model Name :	60014
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Bluetooth+3G(1Mbps CH00+W	CDMA Band V CH4	132)

Freq. (MHz)	Ant H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
35.82	V	40.96	-16.93	24.03	40.00	- 15.97	
112.45	V	40.91	-18.34	22.57	43.50	- 20.93	
166.77	V	38.18	-17.42	20.76	43.50	- 22.74	
218.18	V	33.89	-15.93	17.96	46.00	- 28.04	
301.60	V	31.99	-12.03	19.96	46.00	- 26.04	
481.05	V	30.17	-7.64	22.53	46.00	- 23.47	


- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz $^{\circ}$
- (2) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m J}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m O}$
- (3) Measuring frequency range from 30MHz to 1000MHz o
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table \circ

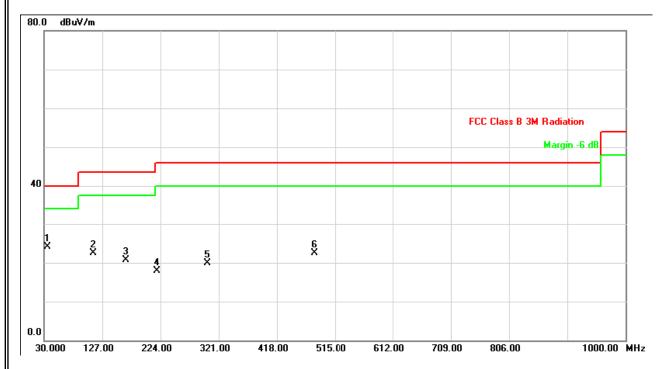

EUT:	Tablet PC	Model Name :	60014
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Bluetooth+3G(1Mbps CH00+W	CDMA Band V CH4	132)

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
40.67	Н	39.48	-16.75	22.73	40.00	- 17.27	
83.35	Н	39.86	-19.10	20.76	43.50	- 22.74	
537.31	Ι	30.63	-5.96	24.67	46.00	- 21.33	
511.86	Η	30.16	-5.44	24.72	46.00	- 21.28	
570.29	Η	29.77	-4.99	24.78	46.00	- 21.22	
733.25	Ι	27.32	-2.77	24.55	46.00	- 21.45	

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz $^{\circ}$
- (2) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m J}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m O}$
- (3) Measuring frequency range from 30MHz to 1000MHz o
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table \circ

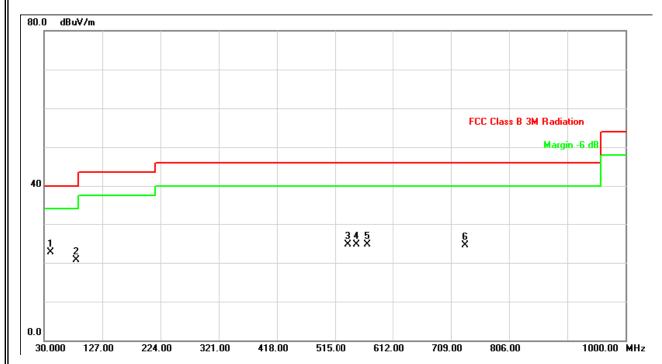

4.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT:	Tablet PC	Model Name :	60014
Temperature:	23 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2402MHz – CH 00-1Mbps		


Freq.	Ant.Pol.	Rea	ding	Ant./CF	A	Act.		Limit	
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	V	19.11	9.50	31.91	51.02	41.41	74.00	54.00	X/E
2401.88	V	60.14	50.53	31.90	92.04	82.43			X/F
4804.10	V	46.32	36.71	5.21	51.53	41.92	74.00	54.00	X/H


Remark:

- (1) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m J}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m O}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-1204C205 Page 29 of 101

Neutron Engineering Inc.=

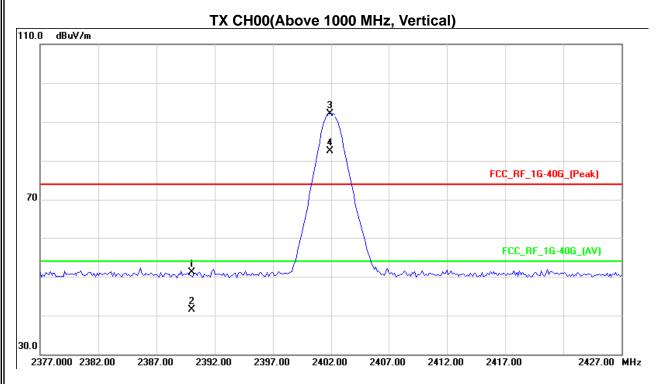

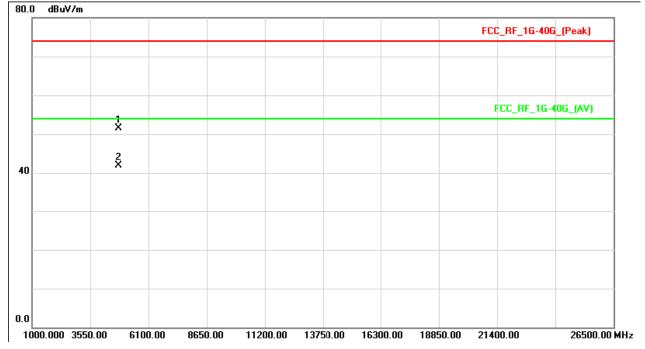

Report No.: NEI-FCCP-1-1204C205 Page 30 of 101


EUT:	Tablet PC	Model Name :	60014
Temperature:	23 ℃	Relative Humidity:	58 %
Pressure:	1010hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2402MHz – CH 00-1Mbps		


Freq.	Ant.Pol.	Rea	ding	Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	Н	18.56	9.31	31.91	50.47	41.22	74.00	54.00	X/E
2401.88	Н	64.71	55.10	31.90	96.61	87.00			X/F
4804.26	Н	47.25	37.64	5.21	52.46	42.85	74.00	54.00	X/H

- (1) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m J}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m O}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission $\,^{\circ}$
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-1204C205 Page 31 of 101

Neutron Engineering Inc.—

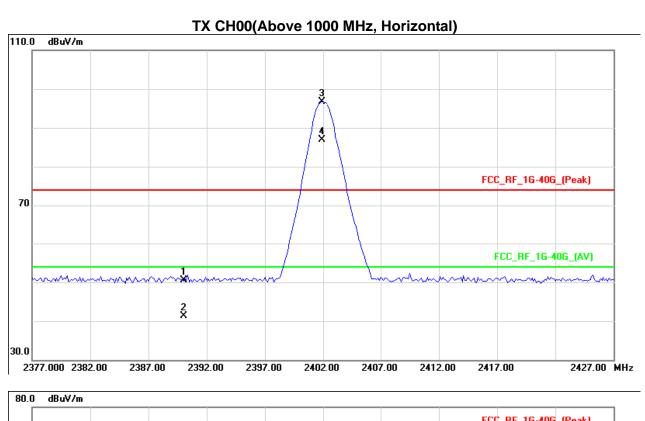

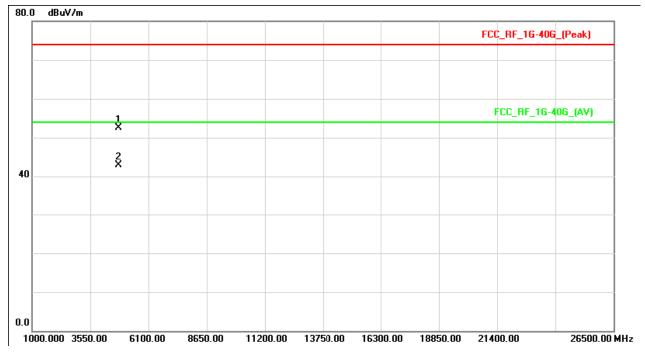

Report No.: NEI-FCCP-1-1204C205 Page 32 of 101


EUT:	Tablet PC	Model Name :	60014
Temperature:	23 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2441MHz –CH39-1Mbps		


Freq.	Ant.Pol.	Read	ling	Ant./CF	Ant./CF Act.		Lir		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2441.00	V	60.33	50.72	31.85	92.18	82.57			X/F
4882.13	V	46.82	37.21	5.50	52.32	42.71	74.00	54.00	X/H

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform \circ
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency of F' denotes fundamental frequency; "H' denotes spurious frequency. "E' denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-1204C205 Page 33 of 101

Neutron Engineering Inc.

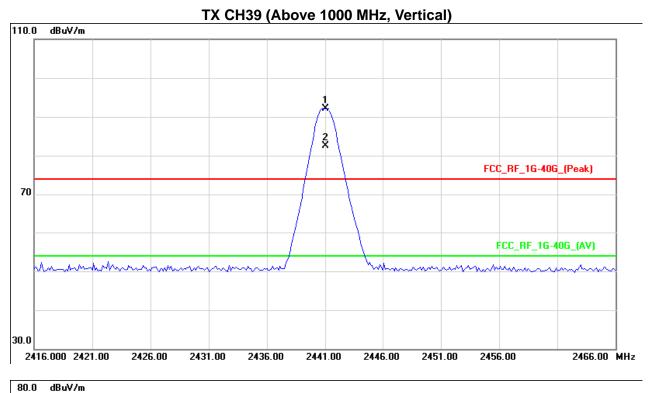

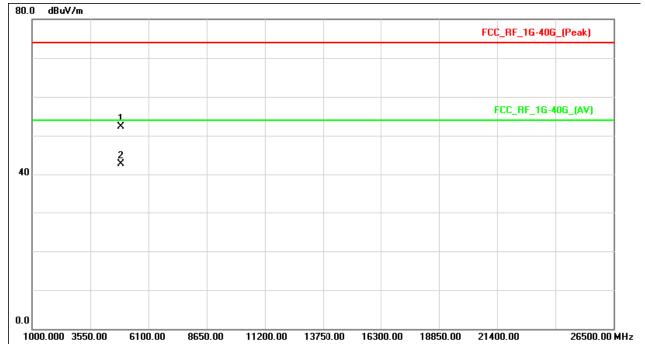

Report No.: NEI-FCCP-1-1204C205 Page 34 of 101

EUT:	Tablet PC	Model Name :	60014
Temperature:	23 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2441MHz –CH39-1Mbps		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2441.13	Н	64.37	54.76	31.85	96.22	86.61			X/F
4882.12	Н	44.82	35.21	5.50	50.32	40.71	74.00	54.00	X/H


- (1) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m l}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m o}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-1204C205 Page 35 of 101

Neutron Engineering Inc.

6100.00

8650.00

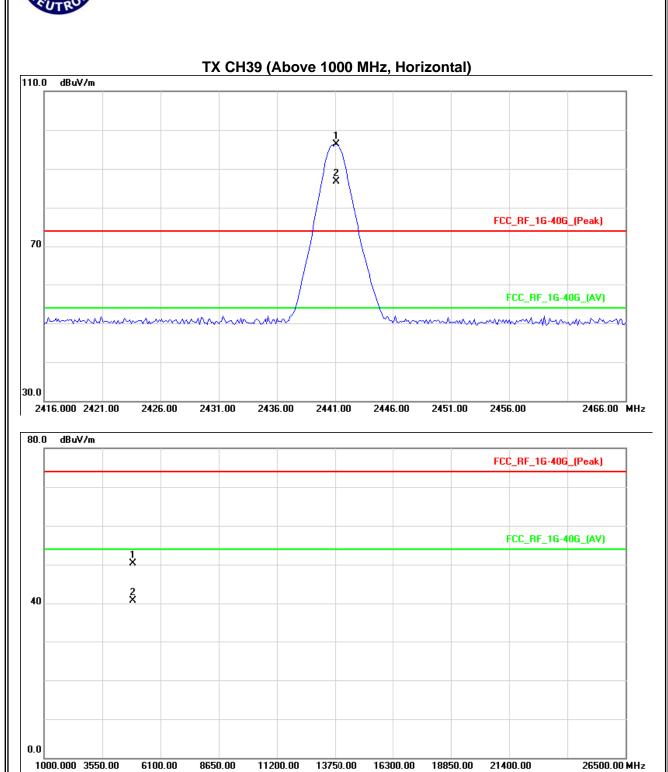


11200.00 13750.00 16300.00 18850.00 21400.00

EUT:	Tablet PC	Model Name :	60014
Temperature:	23 ℃	Relative Humidity:	58 %
Pressure:	1010hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2480MHz -CH78-1Mbps		

Freq.	Ant.Pol.	Reading		Ant./CF	A	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
2480.13	V	59.51	49.90	31.80	91.31	81.70			X/F	
2483.50	V	20.73	11.12	31.80	52.53	42.92	74.00	54.00	X/E	
4960.24	V	44.75	35.14	5.78	50.53	40.92	74.00	54.00	X/H	

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform \circ
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ∘
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-1204C205 Page 37 of 101

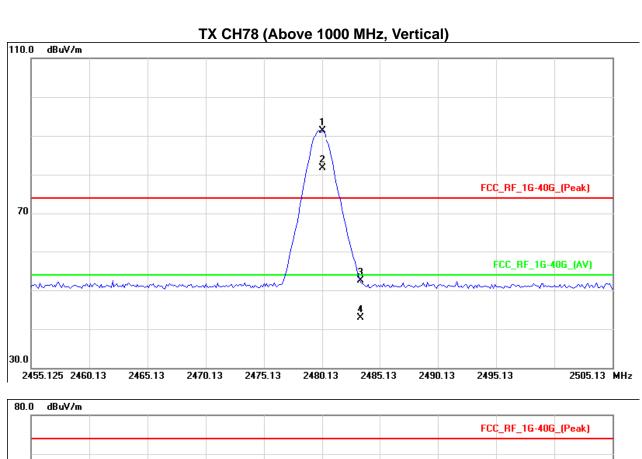




Report No.: NEI-FCCP-1-1204C205 Page 38 of 101


EUT:	Tablet PC	Model Name :	60014
Temperature:	23 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2480MHz -CH78-1Mbps		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2479.88	Н	63.78	54.17	31.80	95.58	85.97			X/F
2483.50	Н	24.74	15.13	31.80	56.54	46.93	74.00	54.00	X/E
4960.12	Н	43.52	33.91	5.78	49.30	39.69	74.00	54.00	X/H

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform \circ
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ∘
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-1204C205 Page 39 of 101

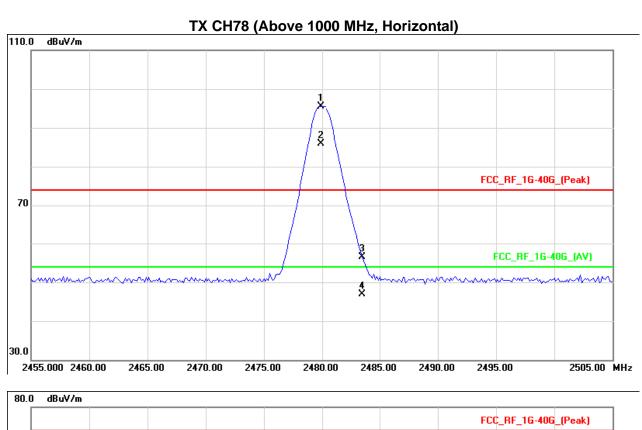

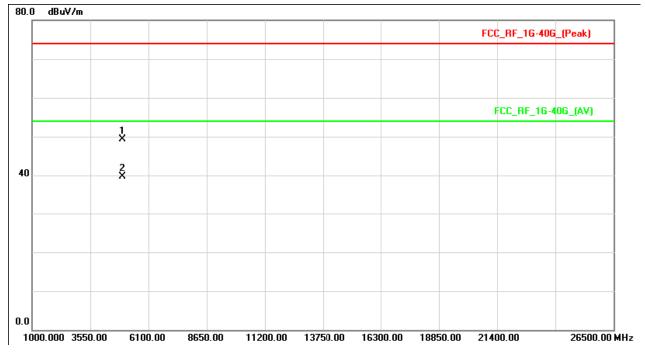

Report No.: NEI-FCCP-1-1204C205 Page 40 of 101




EUT:	Tablet PC	Model Name :	60014
Temperature:	23 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2402MHz – CH 00-3Mbps		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Lir		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	V	19.40	9.79	31.91	51.31	41.70	74.00	54.00	X/E
2402.25	V	60.35	50.74	31.90	92.25	82.64			X/F
4804.13	V	46.12	36.51	5.21	51.33	41.72	74.00	54.00	X/H

- (1) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m J}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m O}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-1204C205 Page 41 of 101

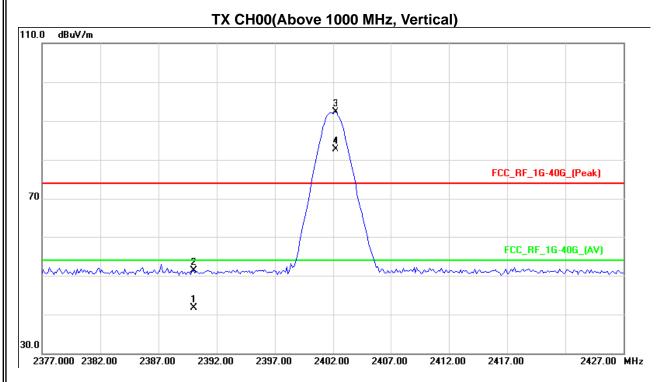




Report No.: NEI-FCCP-1-1204C205 Page 42 of 101


EUT:	Tablet PC	Model Name :	60014
Temperature:	23 ℃	Relative Humidity:	58 %
Pressure:	1010hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2402MHz – CH 00-3Mbps		

Freq.	Ant.Pol.	Reading		Ant./CF	A	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
2390.00	Н	19.04	9.43	31.91	50.95	41.34	74.00	54.00	X/E	
2402.13	Н	64.76	55.15	31.90	96.66	87.05			X/F	
4804.32	Н	45.21	35.60	5.21	50.42	40.81	74.00	54.00	X/H	

- (1) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m J}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m O}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency of E" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission $\,^{\circ}$
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-1204C205 Page 43 of 101

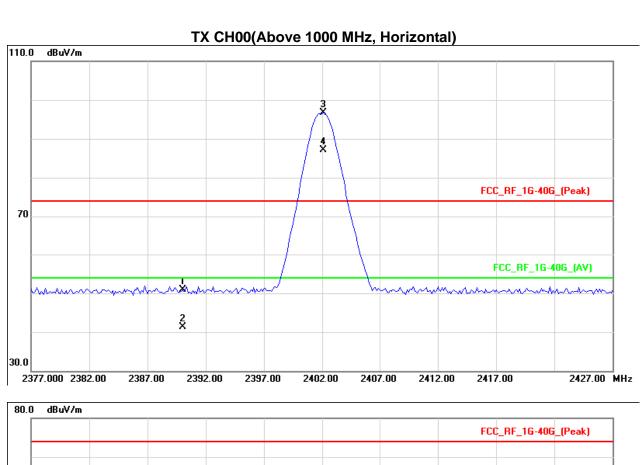

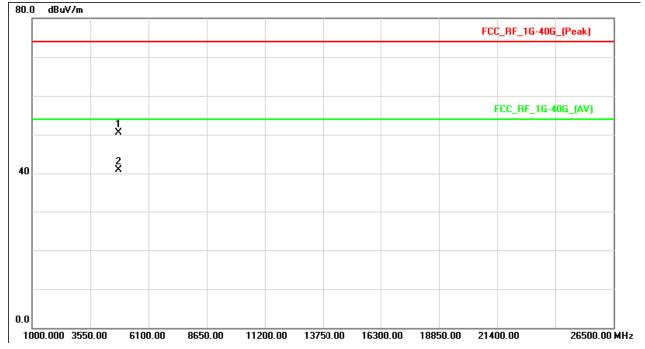

Report No.: NEI-FCCP-1-1204C205 Page 44 of 101

EUT:	Tablet PC	Model Name :	60014
Temperature:	23 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2441MHz -CH39-3Mbps		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Lir		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2441.00	V	60.56	50.95	31.85	92.41	82.80			X/F
4882.12	V	45.34	35.73	5.50	50.84	41.23	74.00	54.00	X/H


- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform \circ
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-1204C205 Page 45 of 101

1000.000 3550.00

6100.00

8650.00

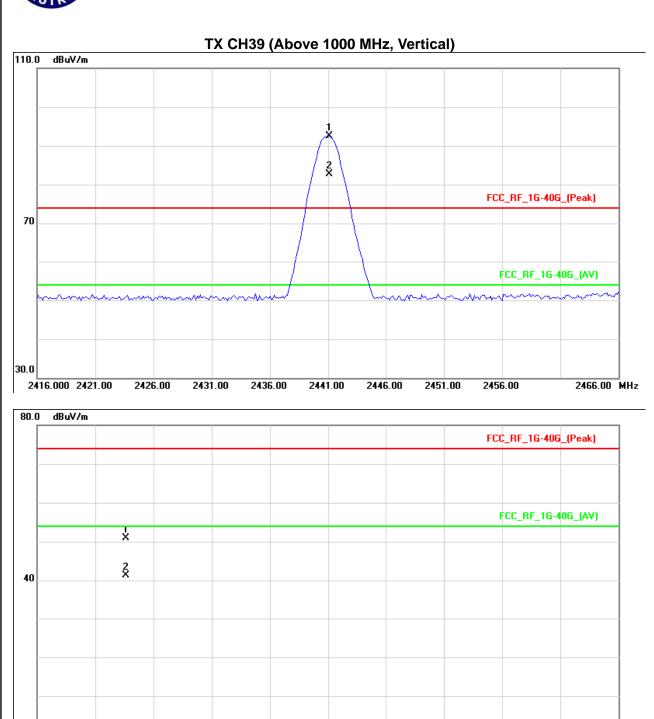

11200.00 13750.00 16300.00 18850.00


26500.00 MHz

EUT:	Tablet PC	Model Name :	60014
Temperature:	23 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2441MHz –CH39-3Mbps		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Lir		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2441.13	Н	64.50	54.89	31.85	96.35	86.74			X/F
4882.10	Н	44.62	35.01	5.50	50.12	40.51	74.00	54.00	X/H

- (1) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m l}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m o}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-1204C205 Page 47 of 101

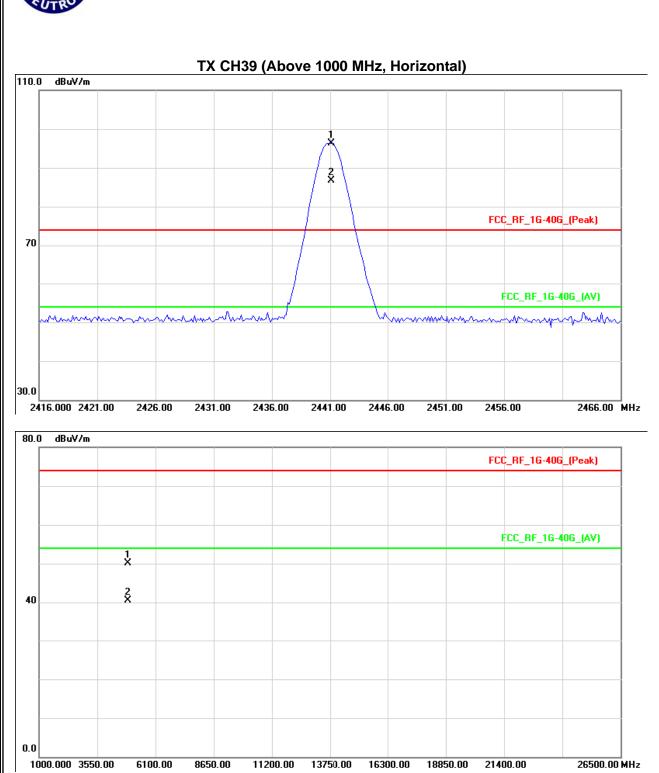


EUT:	Tablet PC	Model Name :	60014
Temperature:	23 ℃	Relative Humidity:	58 %
Pressure:	1010hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2480MHz -CH78-3Mbps		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2480.13	V	59.66	50.05	31.80	91.46	81.85			X/F
2483.50	V	22.20	12.59	31.80	54.00	44.39	74.00	54.00	X/E
4960.32	V	46.47	36.86	5.78	52.25	42.64	74.00	54.00	X/H

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform \circ
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ∘
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-1204C205 Page 49 of 101

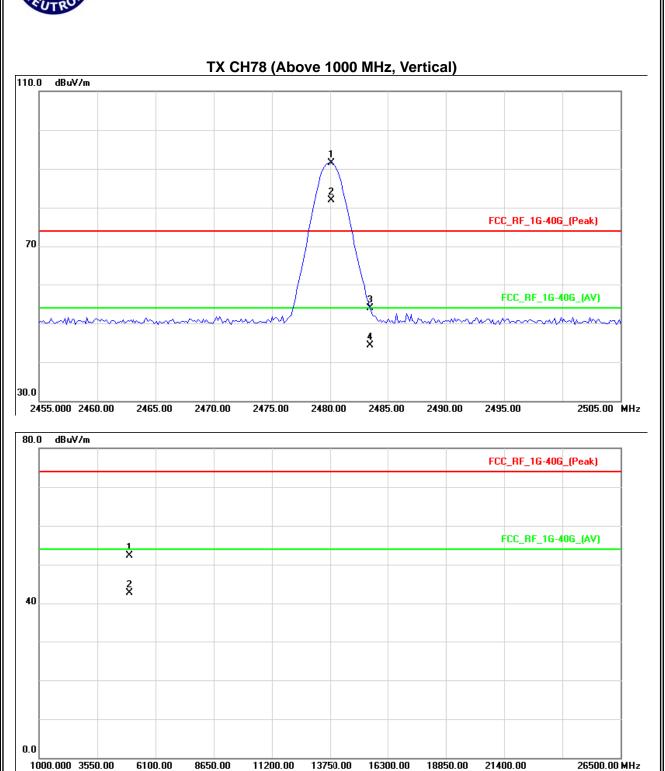



EUT:	Tablet PC	Model Name :	60014
Temperature:	23 ℃	Relative Humidity:	58 %
Pressure: 1010 hPa		Test Voltage :	DC 3.7V
Test Mode :	TX 2480MHz –CH78-3Mbps		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2479.88	Н	64.70	55.09	31.80	96.50	86.89			X/F
2483.50	Н	26.49	16.88	31.80	58.29	48.68	74.00	54.00	X/E
4960.12	Н	45.32	35.71	5.78	51.10	41.49	74.00	54.00	X/H

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform \circ
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ∘
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-1204C205 Page 51 of 101

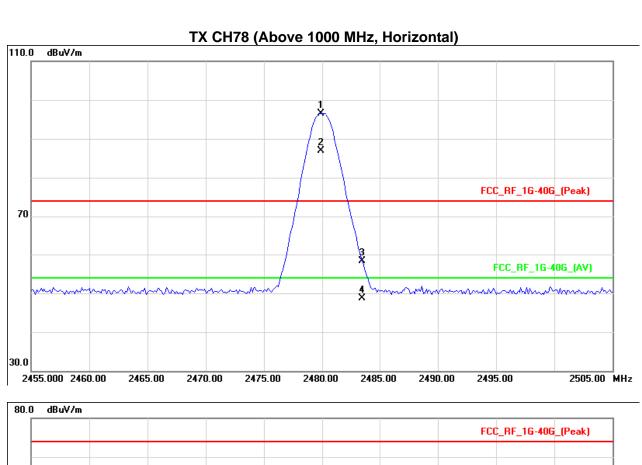

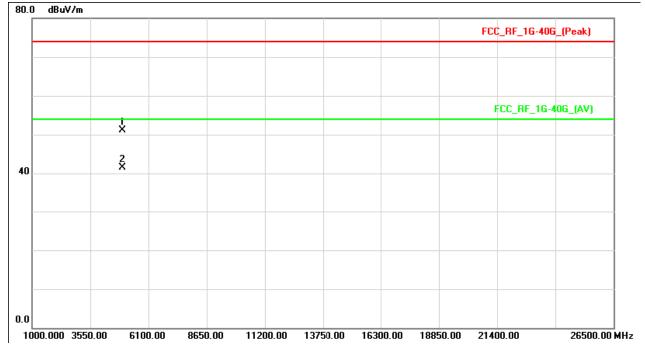

Report No.: NEI-FCCP-1-1204C205 Page 52 of 101




EUT:	Tablet PC	Model Name :	60014		
Temperature:	23 ℃	Relative Humidity:	58 %		
Pressure:	1010 hPa	Test Voltage :	DC 3.7V		
Test Mode :	Bluetooth+3G(1Mbps CH00+WCDMA Band V CH4132)				

Freq.	Ant.Pol.	Readi	ng	Ant./CF	Ad	ct.	Lir	mit	Note
rieq.	Ant.Poi.	Peak	AV	Ant./Or	Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1672.12	V	53.02	41.02	-4.52	48.50	36.50	74.00	54.00	X/H
4804.02	V	45.98	36.67	5.21	51.19	41.88	74.00	54.00	X/H

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note ${}_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ${}^{\circ}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:

"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand

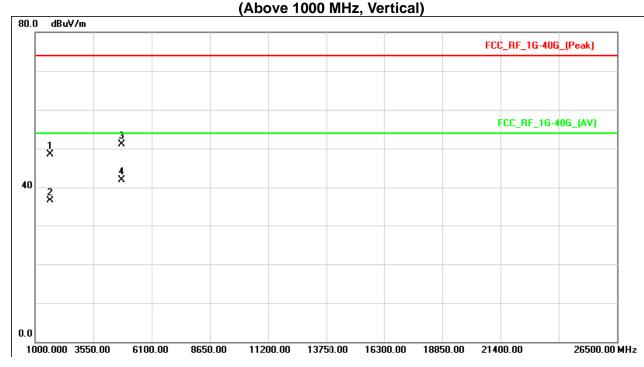

Report No.: NEI-FCCP-1-1204C205 Page 53 of 101

EUT:	Tablet PC	Model Name :	60014			
Temperature:	23 ℃	Relative Humidity:	58 %			
Pressure:	1010 hPa	Test Voltage :	DC 3.7V			
Test Mode :	Bluetooth+3G(1Mbps CH00+WCDMA Band V CH4132)					

Frog	Ant Dol	Readi	Reading		A	ct.	Lir	mit	
Freq.	Ant.Pol.	Peak	AV	Ant/CF	Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1672.12	Н	45.88	34.25	-4.52	41.36	29.73	74.00	54.00	X/H
4804.02	Н	42.57	33.74	5.21	47.78	38.95	74.00	54.00	X/H

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform \circ
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:

"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand

(Above 1000 MHz, Horizontal)



Report No.: NEI-FCCP-1-1204C205 Page 54 of 101

5. NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C							
Section	Test Item	Frequency Range (MHz)	Result				
15.247 (a)(1)(iii)	Number of Hopping Channel	2400-2483.5	PASS				

5.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

I	tem	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
	1	Spectrum Analyzer	R&S	FSP 40	100185	Nov.25.2012

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

5.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-1204C205 Page 55 of 101

5.1.6 TEST RESULTS

EUT:	Tablet PC	Model Name :	60014
Temperature:	24 ℃	Relative Humidity:	60 %
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Hopping Mode-1Mbps		


Number of Hopping Channel	79

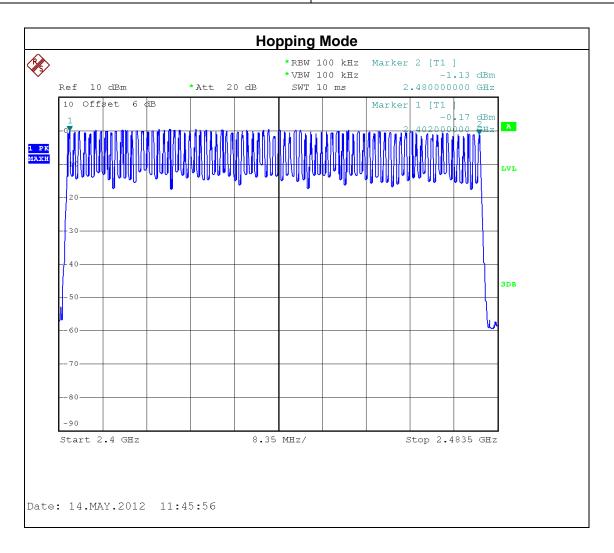

Report No.: NEI-FCCP-1-1204C205 Page 56 of 101

EUT:	Tablet PC	Model Name :	60014
Temperature:	24 °C	Relative Humidity:	60 %
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Hopping Mode-3Mbps		

Number of Hopping Channel	79

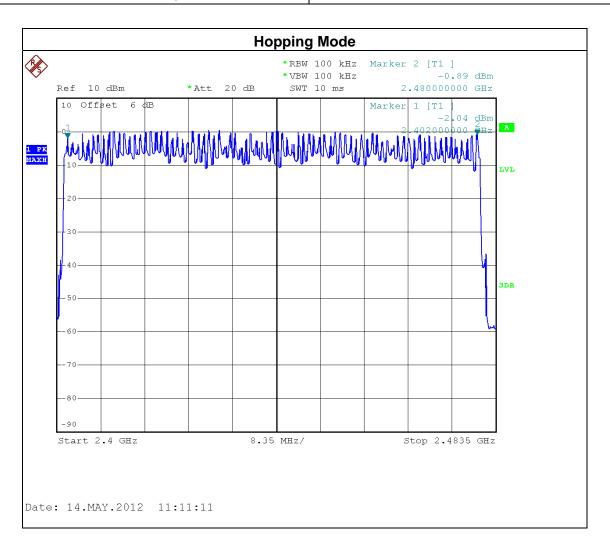

Report No.: NEI-FCCP-1-1204C205 Page 57 of 101

6. AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result	
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS	

6.1.1 MEASUREMENT INSTRUMENTS LIST

It	tem	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
	1	Spectrum Analyzer	R&S	FSP 40	100185	Nov.25.2012

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.


6.1.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- C. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5TX time slots and 1RX slot). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds.
- j. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3TX time slots and 1RX slot). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
- k. DH1 Packet permit maximum 1600 / 79 /2 = 10.12 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times 10.12 x 31.6 = 320 within 31.6 seconds.

6.1.3 DEVIATION FROM STANDARD

No deviation.

Report No.: NEI-FCCP-1-1204C205 Page 58 of 101

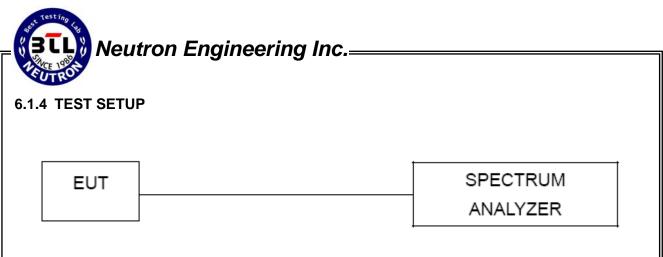

6.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-1204C205 Page 59 of 101


6.1.6 TEST RESULTS


EUT:	Tablet PC	Model Name :	60014
Temperature:	24 ℃	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00-DH1/DH3/DH5-1Mbps		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH5	2402 MHz	3.180	0.3392	0.4000
DH3	2402 MHz	1.860	0.2976	0.4000
DH1	2402 MHz	0.560	0.1792	0.4000

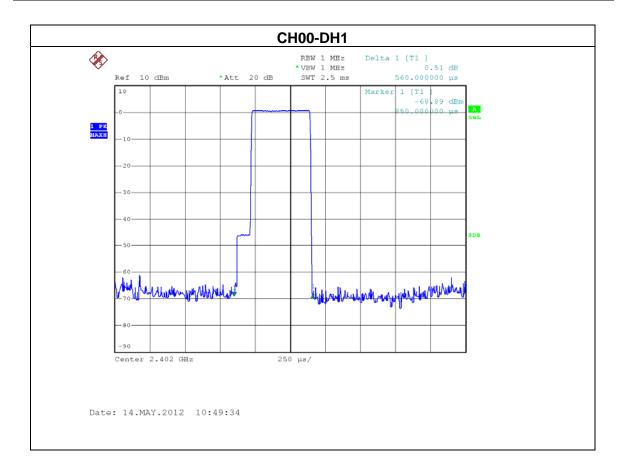


Report No.: NEI-FCCP-1-1204C205 Page 60 of 101

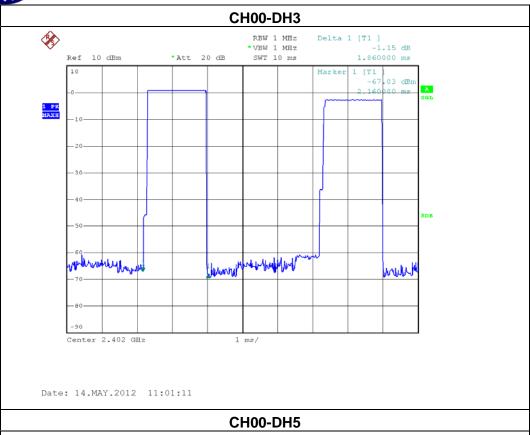

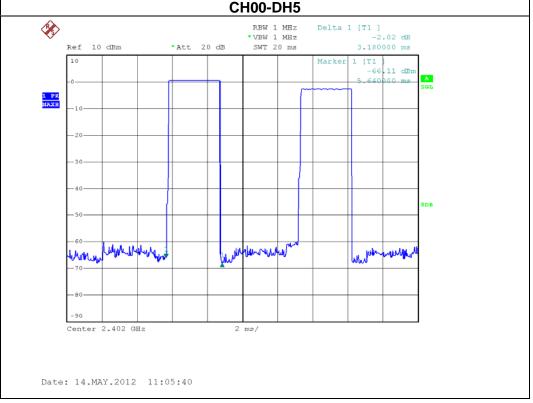


EUT:	Tablet PC	Model Name :	60014
Temperature:	24 ℃	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH39 -DH1/DH3/DH5-1Mbps		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH5	2441 MHz	3.1000	0.3307	0.4000
DH3	2441 MHz	1.8600	0.2976	0.4000
DH1	2441 MHz	0.5500	0.1760	0.4000

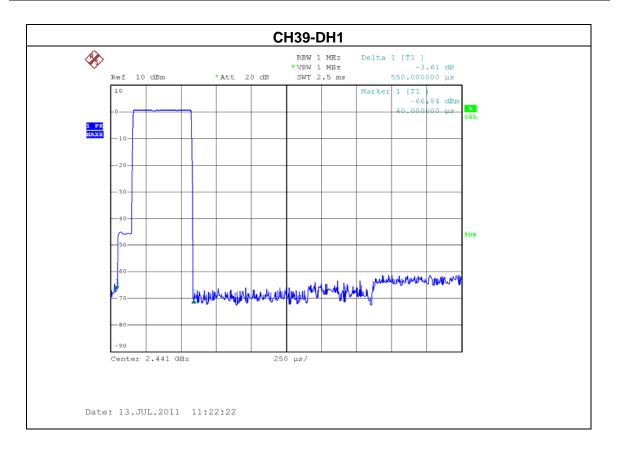


Report No.: NEI-FCCP-1-1204C205 Page 62 of 101

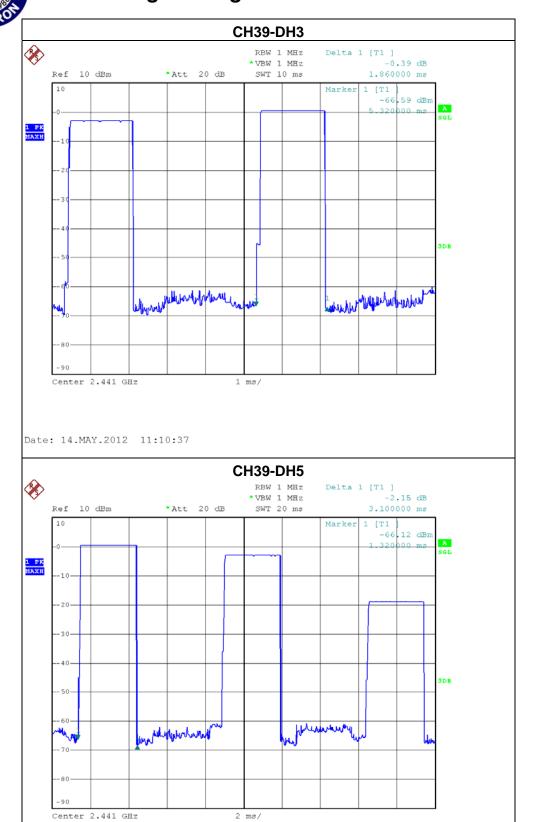


Date: 14.MAY.2012 11:06:51

EUT:	Tablet PC	Model Name :	60014
Temperature:	24 ℃	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH78 -DH1/DH3/DH5-1Mbps		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH5	2480 MHz	3.1400	0.3349	0.4000
DH3	2480 MHz	1.8400	0.2944	0.4000
DH1	2480 MHz	0.5500	0.1760	0.4000

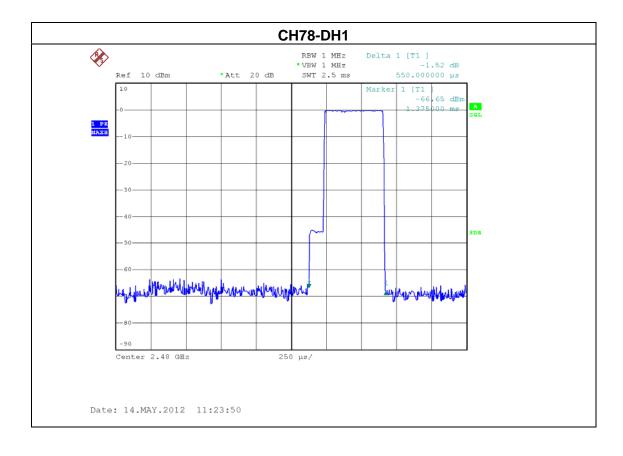


Report No.: NEI-FCCP-1-1204C205 Page 64 of 101

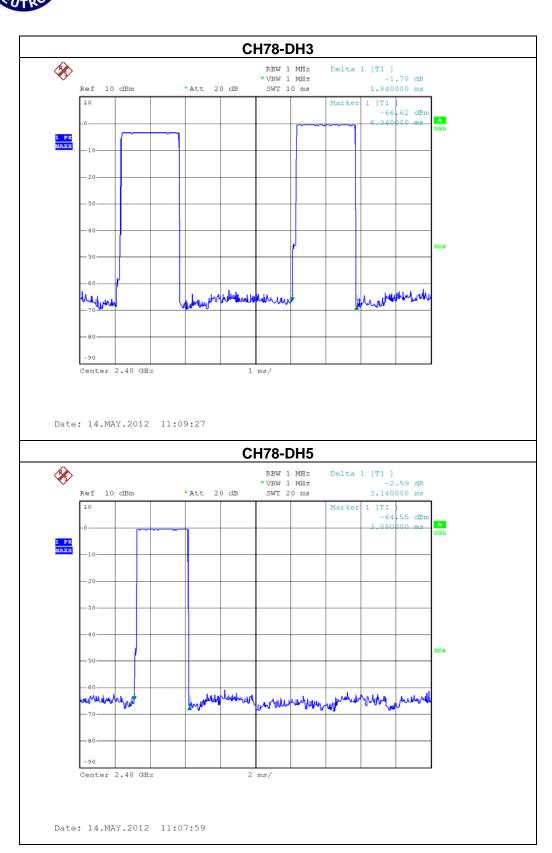


EUT:	Tablet PC	Model Name :	60014
Temperature:	24 °C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00-DH1/DH3/DH5-3Mbps		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH5	2402 MHz	3.1650	0.3376	0.4000
DH3	2402 MHz	1.8700	0.2992	0.4000
DH1	2402 MHz	0.5600	0.1792	0.4000

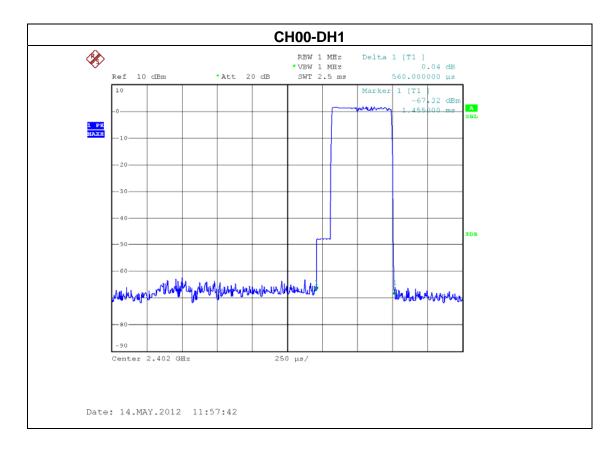

Report No.: NEI-FCCP-1-1204C205 Page 66 of 101

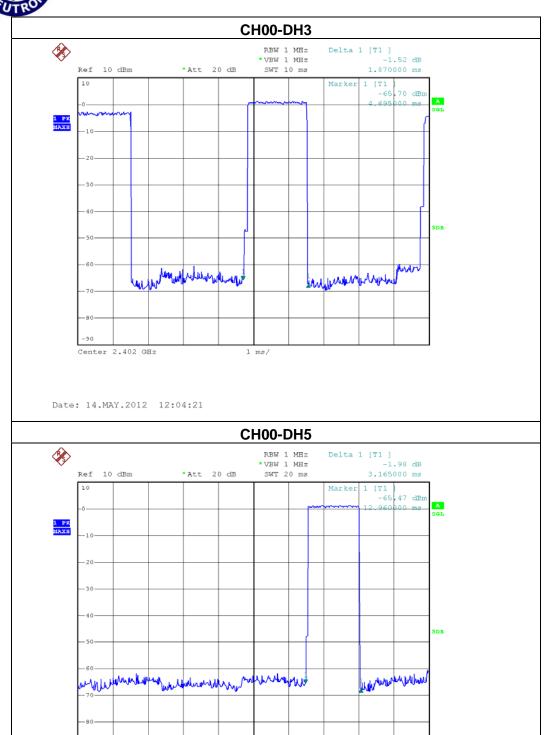


Report No.: NEI-FCCP-1-1204C205 Page 67 of 101

Center 2.402 GHz


Date: 14.MAY.2012 12:06:01

EUT:	Tablet PC	Model Name :	60014
Temperature:	24 ℃	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH39 -DH1/DH3/DH5-3Mbps		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH5	2441 MHz	3.2000	0.3413	0.4000
DH3	2441 MHz	1.8700	0.2992	0.4000
DH1	2441 MHz	0.5600	0.1792	0.4000

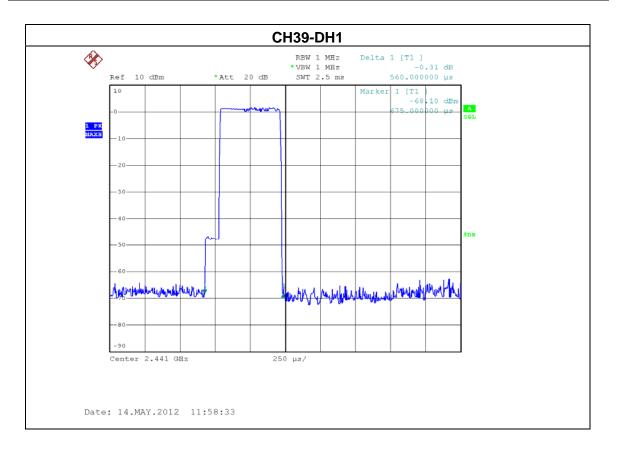


Report No.: NEI-FCCP-1-1204C205 Page 68 of 101

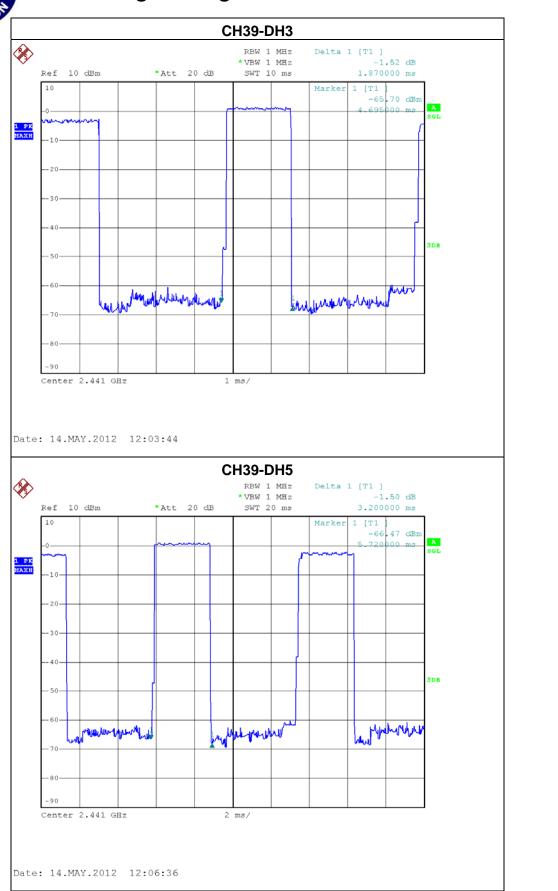


EUT:	Tablet PC	Model Name :	60014
Temperature:	24 °C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH78 -DH1/DH3/DH5-3Mbps		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH5	2480 MHz	3.1600	0.3371	0.4000
DH3	2480 MHz	1.8500	0.2960	0.4000
DH1	2480 MHz	0.5700	0.1824	0.4000

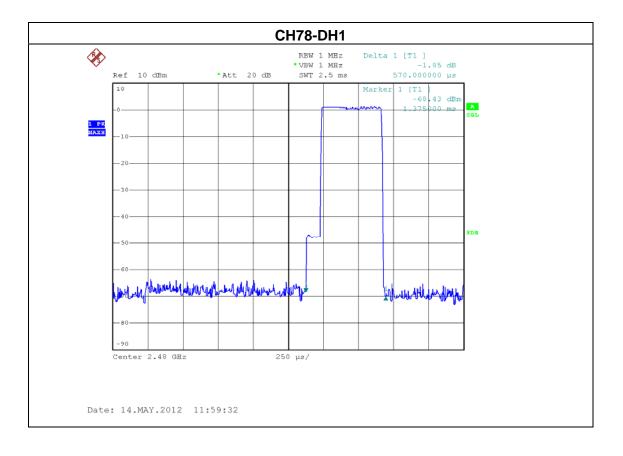

Report No.: NEI-FCCP-1-1204C205 Page 70 of 101

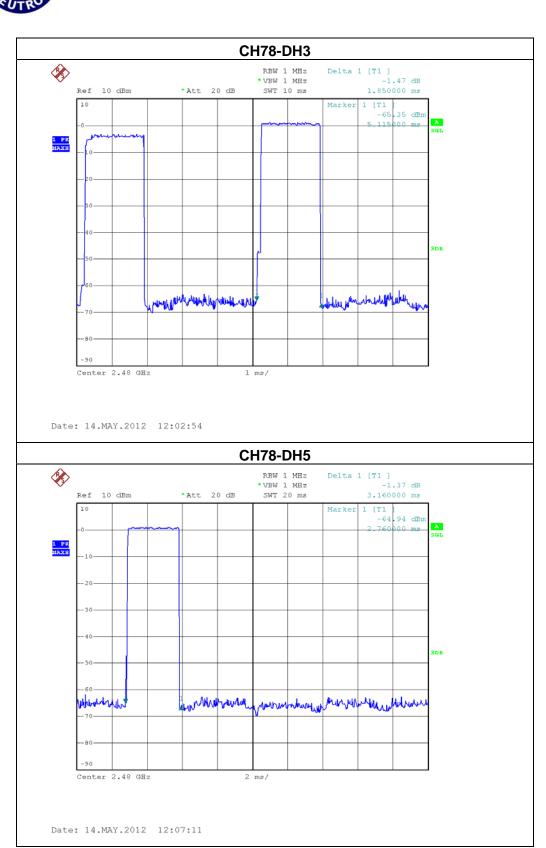

7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

7.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov.25.2012

Remark: " N/A" denotes No Model Name, Serial No. or No Calibration specified.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.1.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- b. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- c. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP



7.1.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in Hopping on mode.


Report No.: NEI-FCCP-1-1204C205 Page 72 of 101

7.1.6 TEST RESULTS


EUT:	Tablet PC	Model Name :	60014	
Temperature:	24 ℃	Relative Humidity:	60 %	
Pressure:	1012 hPa	Test Voltage :	DC 3.7V	
Test Mode :	Hopping on -CH00 / CH39 /CH78-1Mbps			

Frequency	Ch. Separation (MHz)	20dB Bandwidth (kHz)	Result
2402 MHz	1	620.00	Complies
2441 MHz	1	650.00	Complies
2480 MHz	1	860.00	Complies

Ch. Separation Limits: >20dB bandwidth or >2/3 of 20dB bandwidth

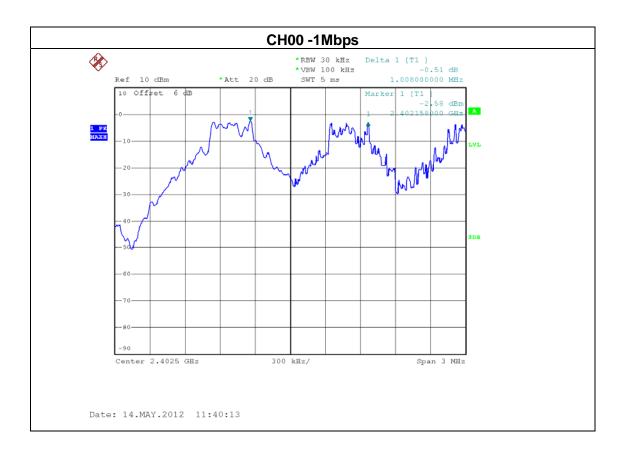

Report No.: NEI-FCCP-1-1204C205 Page 73 of 101

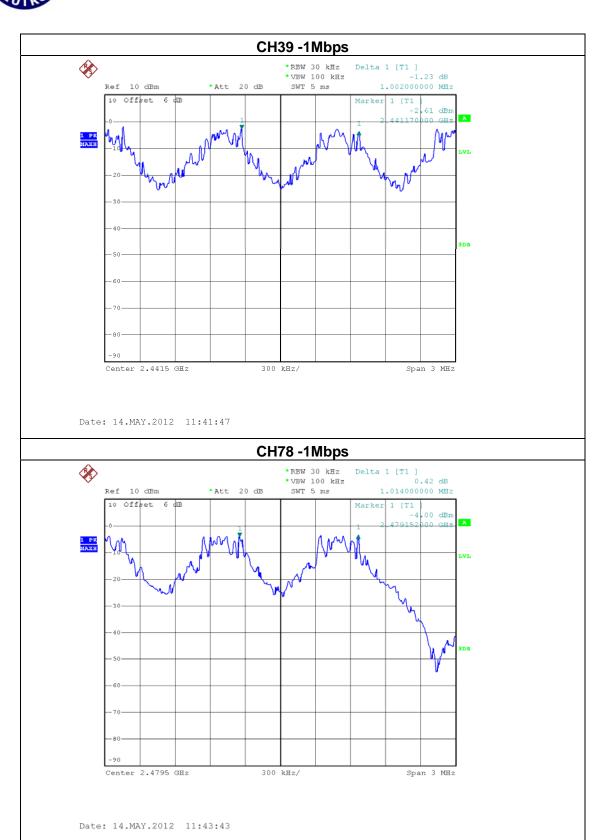





EUT:	Tablet PC	Model Name :	60014	
Temperature:	24 ℃	Relative Humidity:	60 %	
Pressure:	1012 hPa	Test Voltage :	DC 3.7V	
Test Mode :	Hopping on -CH00 / CH39 /CH78-3Mbps			

Frequency	Ch. Separation (MHz)	20dB Bandwidth (kHz)	Result
2402 MHz	1	1290.00	Complies
2441 MHz	1	1320.00	Complies
2480 MHz	1	1330.00	Complies

Ch. Separation Limits: >20dB bandwidth or >2/3 of 20dB bandwidth

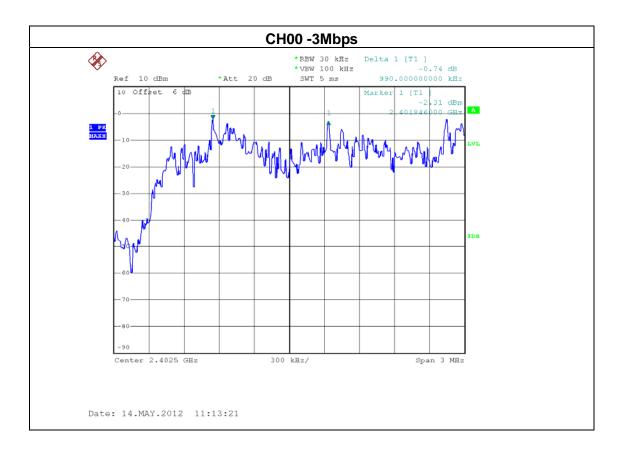

Report No.: NEI-FCCP-1-1204C205 Page 75 of 101

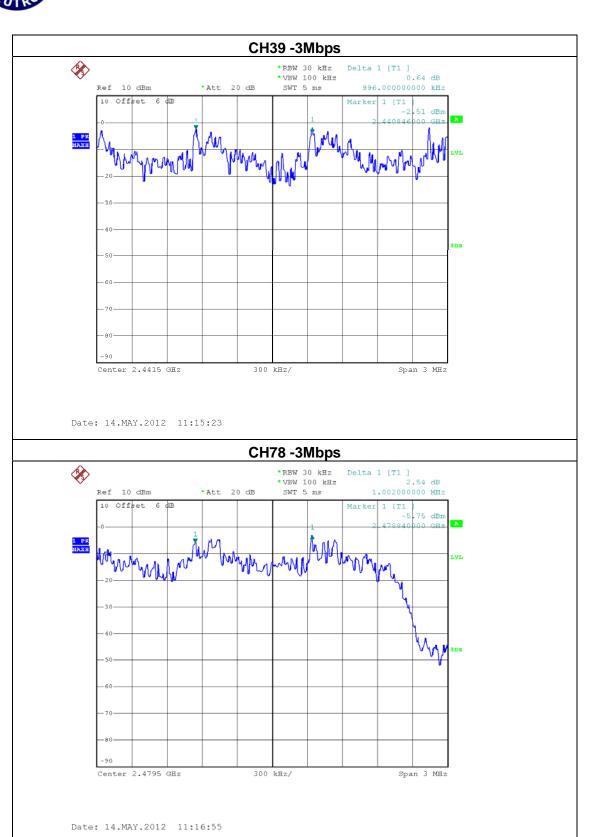

8. BANDWIDTH TEST

8.1 APPLIED PROCEDURES / LIMIT

	FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result	
15.247 (a)(2)	Bandwidth	None	2400-2483.5	PASS	

8.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov.25.2012

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep time = Auto.

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP



8.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-1204C205 Page 77 of 101


8.1.6 TEST RESULTS

EUT:	Tablet PC	Model Name :	60014
Temperature:	25 ℃	Relative Humidity:	51 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78-1Mbps		

Frequency	20dB Bandwidth (KHz)	99% Occupied Bandwidth (KHz)	Result
2402 MHz	620.00	870.00	PASS
2441 MHz	650.00	840.00	PASS
2480 MHz	860.00	850.00	PASS

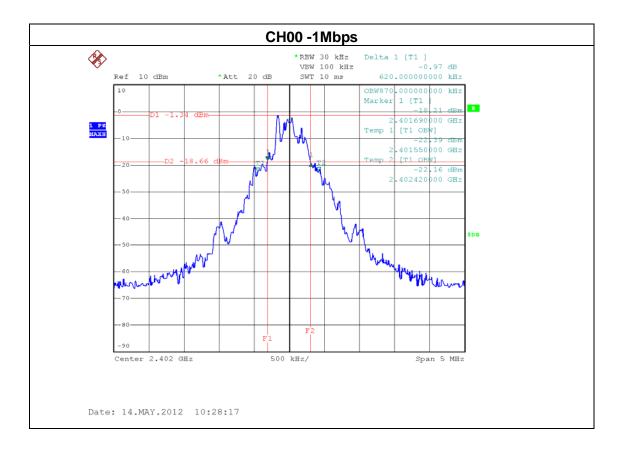


Report No.: NEI-FCCP-1-1204C205 Page 78 of 101

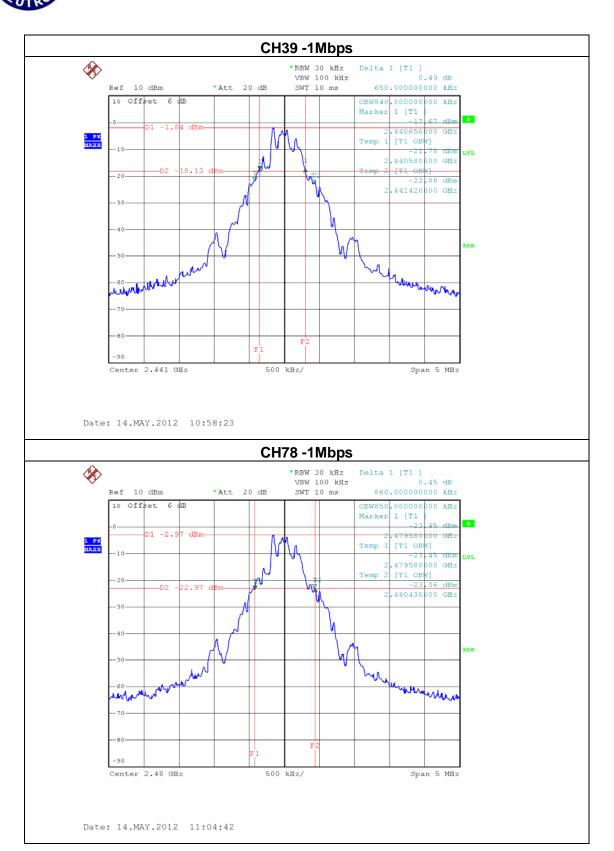


EUT:	Tablet PC	Model Name :	60014
Temperature:	25 ℃	Relative Humidity:	51 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78-3Mbps		

Frequency	20dB Bandwidth (KHz)	99% Occupied Bandwidth (KHz)	Result
2402 MHz	1290.00	1180.00	PASS
2441 MHz	1320.00	1190.00	PASS
2480 MHz	1330.00	1200.00	PASS

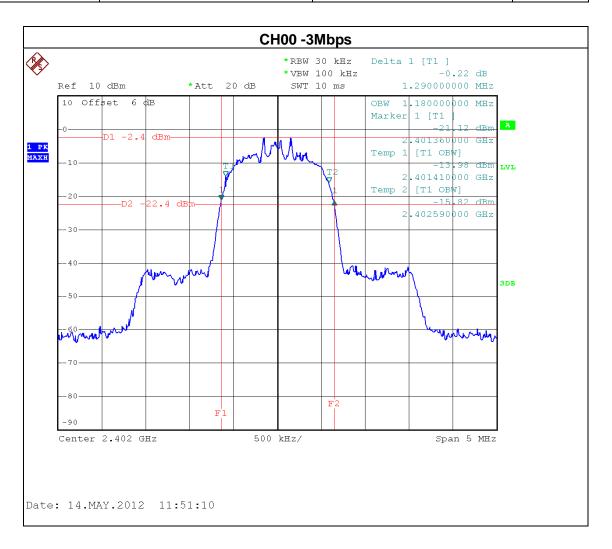

Report No.: NEI-FCCP-1-1204C205 Page 80 of 101

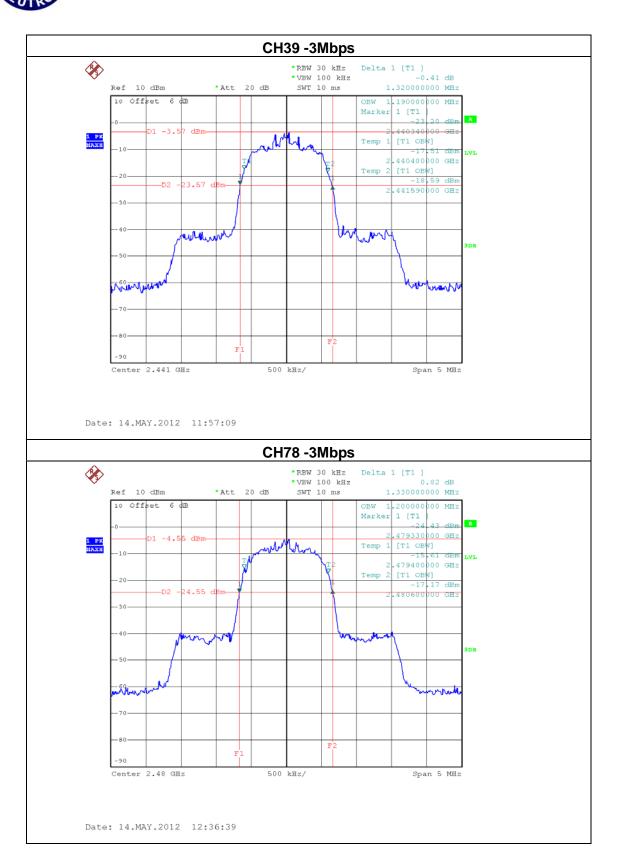

9. PEAK OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

	/					
	FCC Part15 (15.247) , Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result		
15.247 (b)(1)	Peak Output Power	0.125watt or 21dBm	2400-2483.5	PASS		

9.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov.25.2012

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

9.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1MHz, VBW= 1MHz, Sweep time = Auto.

9.1.3 DEVIATION FROM STANDARD

No deviation.

9.1.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

9.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


Report No.: NEI-FCCP-1-1204C205 Page 82 of 101

9.1.6 TEST RESULTS

EUT:	Tablet PC	Model Name :	60014
Temperature:	25 ℃	Relative Humidity:	51 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00/ CH39 /CH78 -1Mbps		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH00	2402	0.95	21	0.125
CH39	2441	0.59	21	0.125
CH78	2480	-0.74	21	0.125

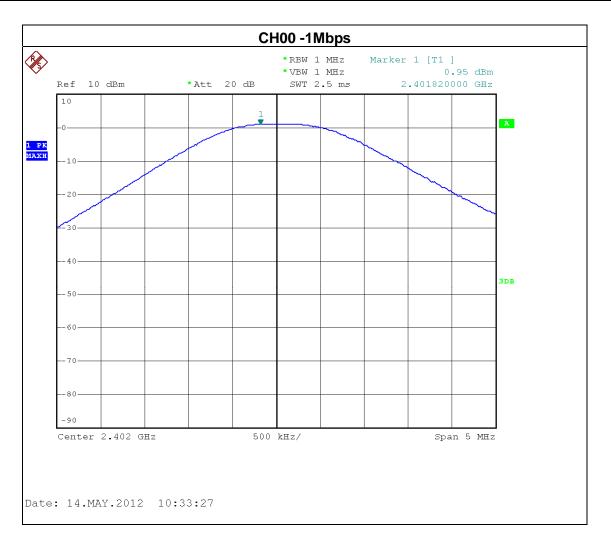

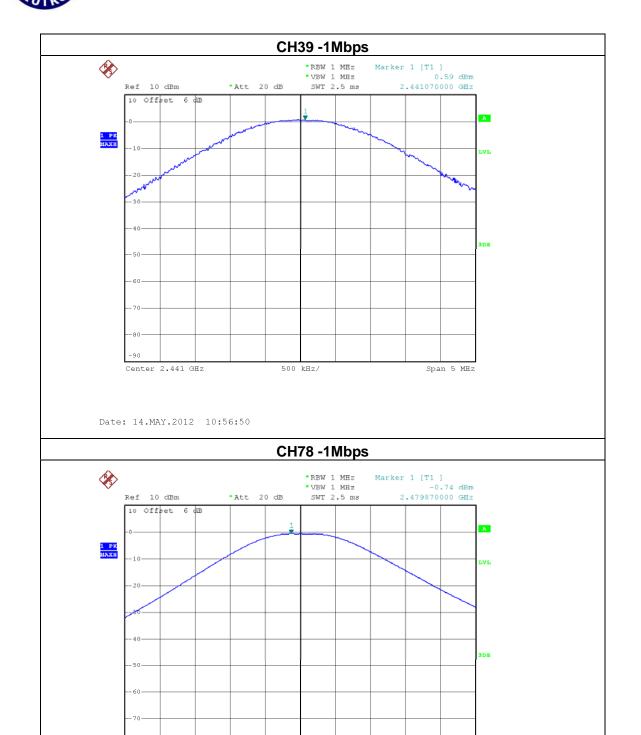

Date: 14.MAY.2012 11:02:58


Center 2.48 GHz

500 kHz/


Span 5 MHz


EUT:	Tablet PC	Model Name :	60014
Temperature:	25 ℃	Relative Humidity:	51 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00/ CH39 /CH78 -3Mbps		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH00	2402	0.59	21	0.125
CH39	2441	0.98	21	0.125
CH78	2480	-0.02	21	0.125

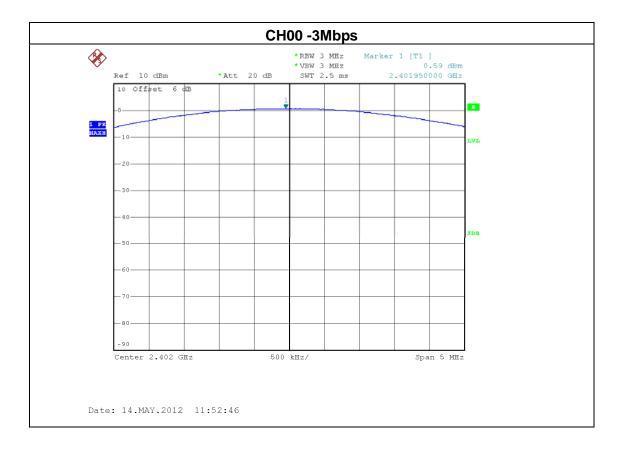

Report No.: NEI-FCCP-1-1204C205 Page 85 of 101

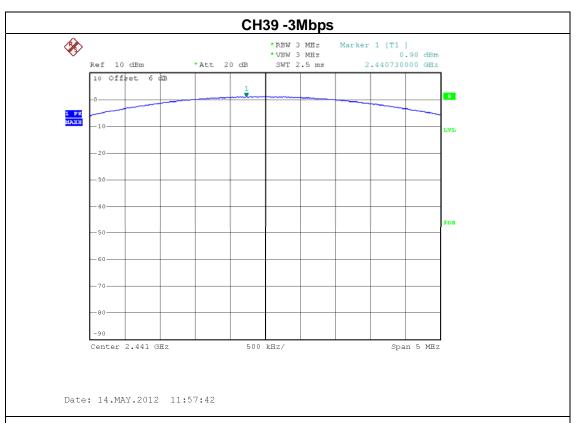

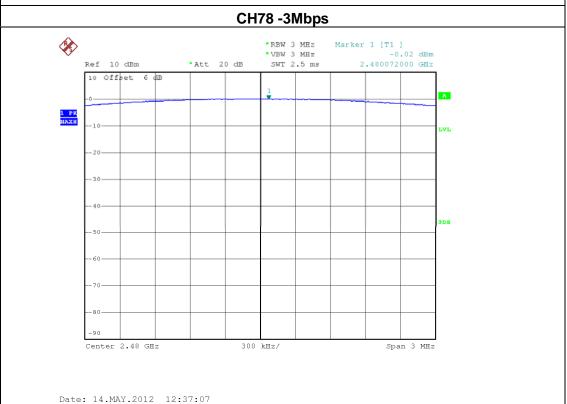

10. ANTENNA CONDUCTED SPURIOUS EMISSION

10.1 APPLIED PROCEDURES / LIMIT

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

10.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov.25.2012

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.


10.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

10.1.3 DEVIATION FROM STANDARD

No deviation.

10.1.4 TEST SETUP



10.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-1204C205 Page 87 of 101

10.1.6 TEST RESULTS


EUT:	Tablet PC	Model Name :	60014
Temperature:	25 ℃	Relative Humidity:	51 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 / CH78-1Mbps & Hopping on mode		


	The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
	FREQUENCY(MHz) POWER(dBm)		FREQUENCY(MHz)	POWER(dBm)
	2370.8 -58.45		2484.00	-58.22
Result				

In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.

Report No.: NEI-FCCP-1-1204C205 Page 88 of 101




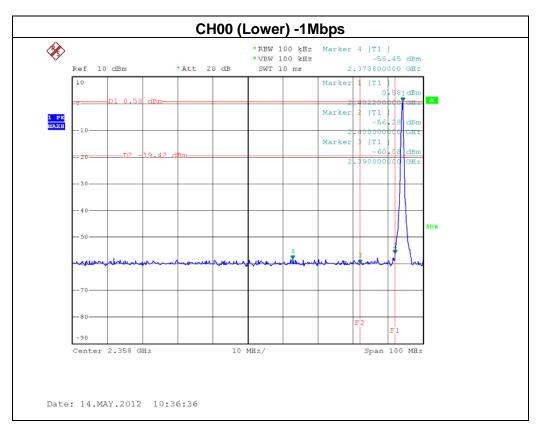


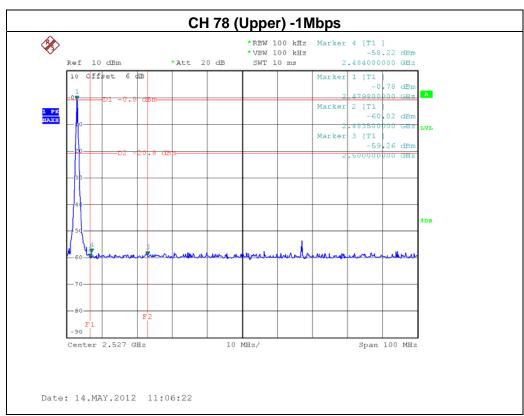

Report No.: NEI-FCCP-1-1204C205 Page 89 of 101




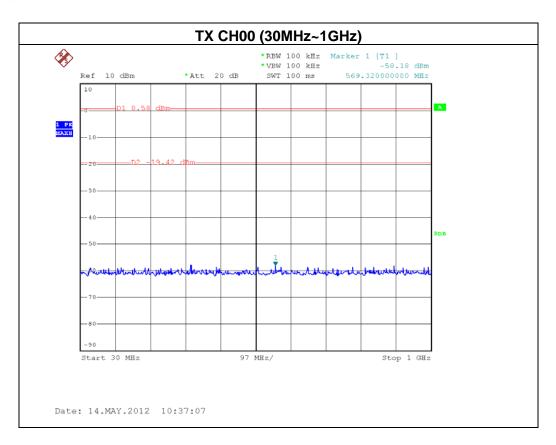


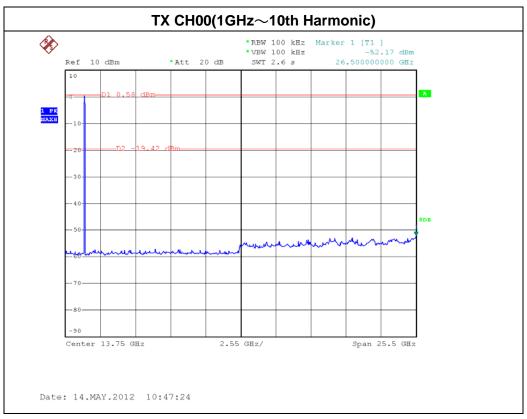

Report No.: NEI-FCCP-1-1204C205 Page 90 of 101




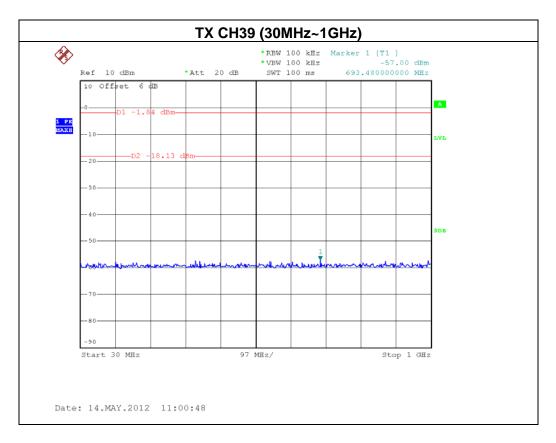


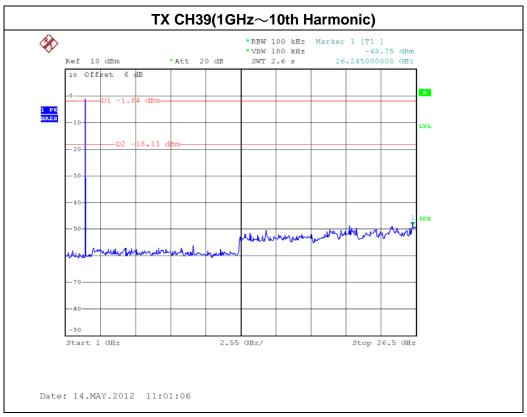


Report No.: NEI-FCCP-1-1204C205 Page 91 of 101




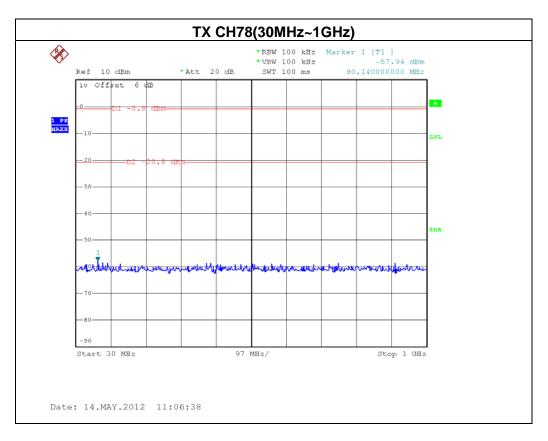

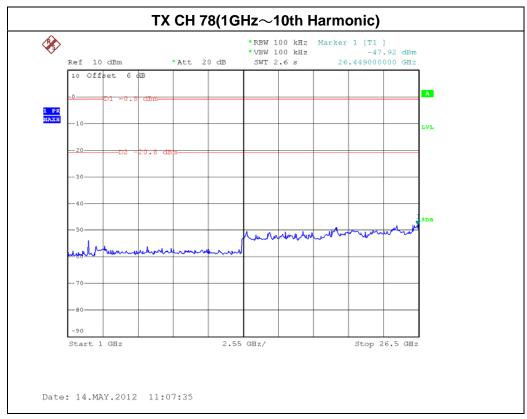

Report No.: NEI-FCCP-1-1204C205 Page 92 of 101

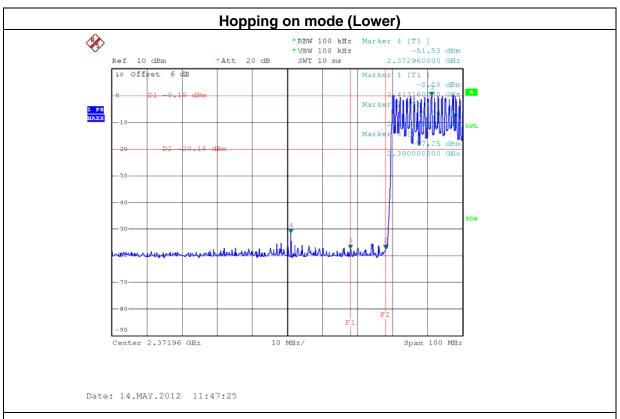

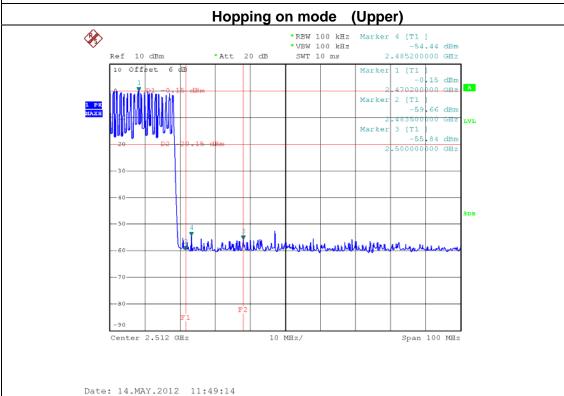




EUT:	Tablet PC	Model Name :	60014
Temperature:	25 ℃	Relative Humidity:	51 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 / CH78-3Mbps & Hopping on mode		


The max. radio frequency power in any 100kHz bandwidth outside the frequency band FREQUENCY(MHz) POWER(dBm)		The max. radio frequence bandwidth within the	
		FREQUENCY(MHz)	POWER(dBm)
2369.8	-55.45	2484.2	-58.48
Result			

In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.


Report No.: NEI-FCCP-1-1204C205 Page 94 of 101




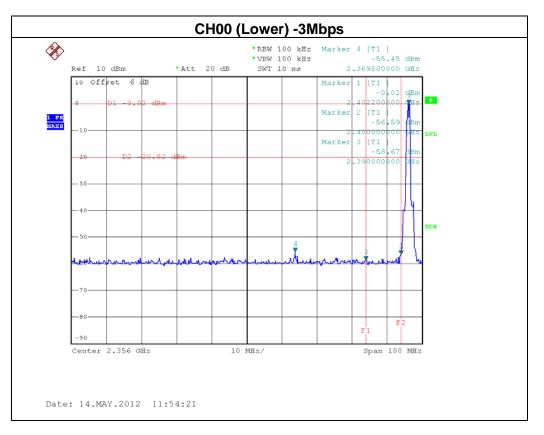

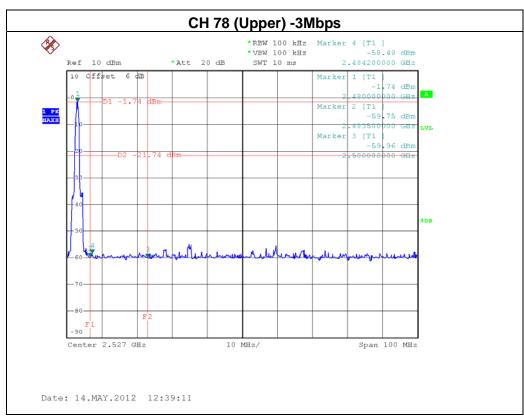



Report No.: NEI-FCCP-1-1204C205 Page 95 of 101

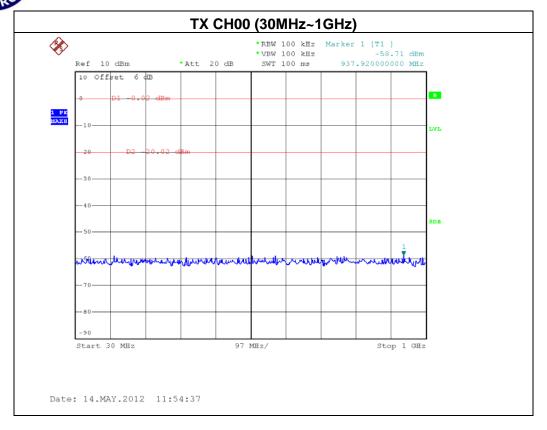

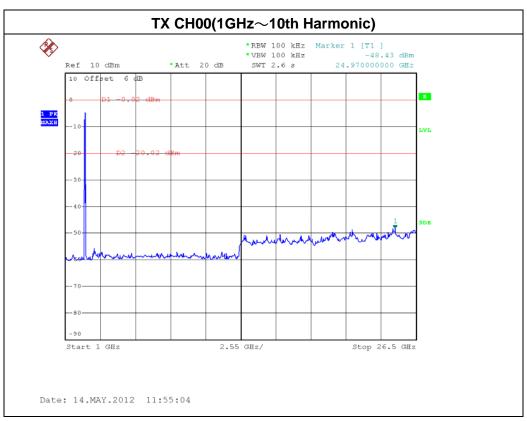




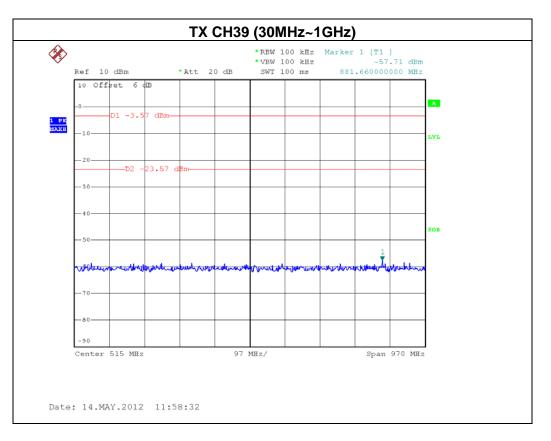


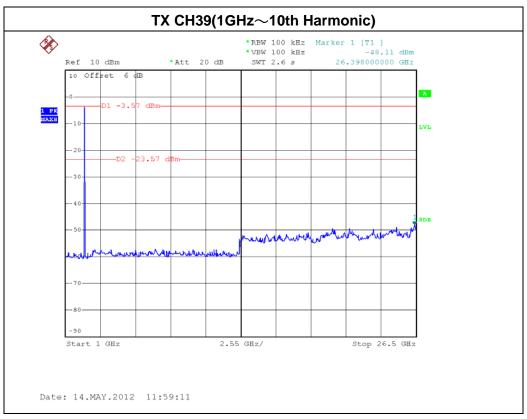


Report No.: NEI-FCCP-1-1204C205 Page 97 of 101



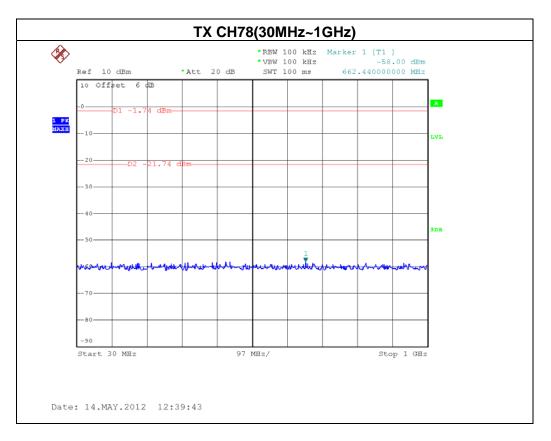

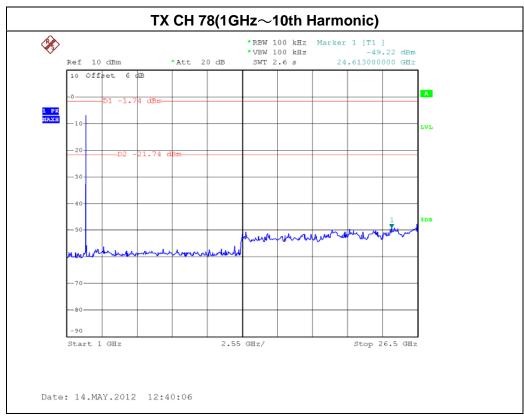

Report No.: NEI-FCCP-1-1204C205 Page 98 of 101

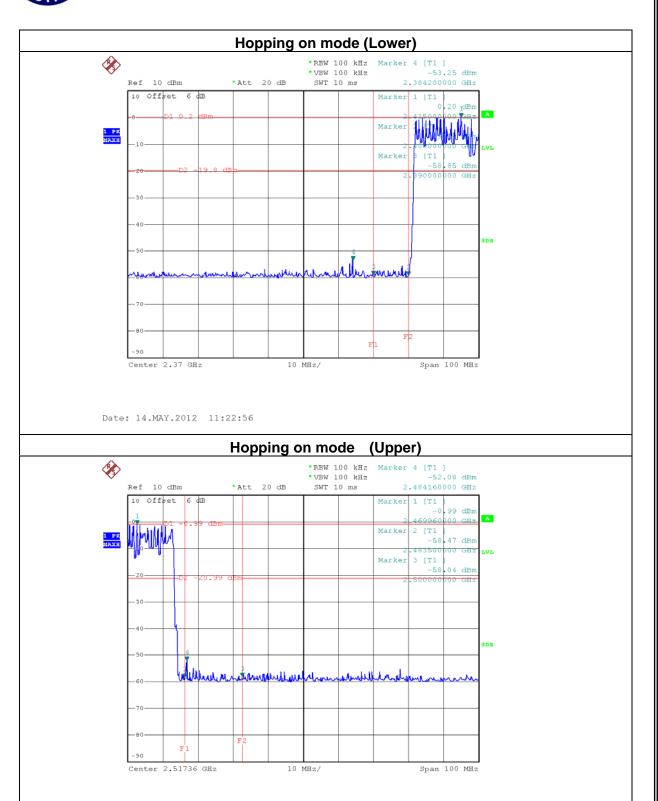

Date: 14.MAY.2012 11:20:17