


TEST REPORT

Application No.: SZEM2006004810CR
Applicant: DT Research. Inc.
Address of Applicant: 3RD FL NO 36 WUQUAN 7TH RD WUGU DISTRICT, NEW TAIPEI, Taiwan.
Manufacturer: DT Research. Inc.
Address of Manufacturer: 2000 Concourse Drive. San Jose. CA 95131. U.S.A
Factory: DT Research. Inc. Taiwan Branch
Address of Factory: 6F., No.36 Wuquan 7th Rd., Wugu Dist. New Taipei City 248 Taiwan
Equipment Under Test (EUT):
EUT Name: Rugged Tablet
Model No.: DT301Yxx(x=blank, A~Z or 0~9) ♣
 ♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: DT Research. Inc.
Standard(s) : 47 CFR Part 15, Subpart B
Date of Receipt: 2020-06-09
Date of Test: 2020-06-11 to 2020-07-22
Date of Issue: 2020-07-23

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

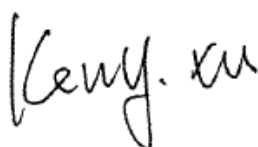



Keny Xu
 EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2020-07-23		Original

Authorized for issue by:			
			
		Edison Li /Project Engineer	
			
		Eric Fu /Reviewer	

2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass
Radiated Emissions (30MHz-1GHz)	47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass
Radiated Emissions (above 1GHz)*	47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass

*: the tests were requested as per applicant's requirement.

Internal Source	Upper Frequency
Below 1.705MHz	30MHz
1.705MHz to 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5th harmonic of the highest frequency or 40GHz, whichever is lower

Remark:

Model No.: DT301Yxx(x=blank, A~Z or 0~9)

Only the model DT301Y was tested, since according to the declaration from the applicant, the electrical circuit design, layout, components used, internal wiring and functions were identical for all the above models, with only difference on model no..

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 DETAILS OF E.U.T.	5
4.2 DESCRIPTION OF SUPPORT UNITS	5
4.3 MEASUREMENT UNCERTAINTY	5
4.4 TEST LOCATION	6
4.5 TEST FACILITY	6
4.6 DEVIATION FROM STANDARDS	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
5 EQUIPMENT LIST	7
6 EMISSION TEST RESULTS.....	9
6.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHz-30MHz).....	9
6.1.1 E.U.T. Operation	9
6.1.2 Test Setup Diagram	10
6.1.3 Measurement Data.....	10
6.2 RADIATED EMISSIONS (30MHz-1GHz)	17
6.2.1 E.U.T. Operation	17
6.2.2 Test Setup Diagram	18
6.2.3 Measurement Data.....	18
6.3 RADIATED EMISSIONS (ABOVE 1GHz).....	27
6.3.1 E.U.T. Operation	27
6.3.2 Test Setup Diagram	28
6.3.3 Measurement Data.....	28
7 PHOTOGRAPHS	37
7.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHz-30MHz) TEST SETUP	37
7.2 RADIATED EMISSIONS (30MHz-1GHz) TEST SETUP	38
7.3 RADIATED EMISSIONS (ABOVE 1GHz) TEST SETUP	40
7.4 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	42



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (CMA, CNAS, ILAC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power Supply:	AC Adapter Model: A17-065N1A Input: AC 100-240V, 50/60Hz, 1.8A Output: DC 20V, 3.25A/DC15V, 3A/DC9V, 2A/DC5V, 2A Rechargeable Lithium-Ion Polymer Battery Model: ACC-006-60K(3ICP9/36/115) Rated Capacity: 5400mAh Voltage: DC 11.4V Watt-Hour: 61.56Wh Max Charge Voltage: 13.05V Wall Cradle: ACC-WM210R-301Y Desktop Cradle: ACC-DC210-301Y Keyboard Cradle: ACC-KB01Y-US1
Test Voltage:	AC 120V, 60Hz
Cable:	DC cable: 180cm unshielded Type-C cable: 180cm unshielded AC cable: 175cm unshielded
Internal Source:	More than 108MHz

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Earphone	PHILIPS	SHE6000	REF. No.SEA1000
HDMI Cable	Apple	MC838FE/B	REF. No.SEA0900
Network Cable	SGS	N/A	REF. No.SEA1100
Television	SONY	KDL-24EX520	6351646
U-disk	Sandisk	SDCZ60-016G	REF. No.SEA0100

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conduction Emission	$\pm 3.0\text{dB}$ (150kHz to 30MHz)
2	Radiated Emission	$\pm 4.5\text{dB}$ (30MHz-1GHz)
		$\pm 4.8\text{dB}$ (1GHz-6GHz)
3	Temperature test	$\pm 1^{\circ}\text{C}$
4	Humidity test	$\pm 3\%$



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ChangZhou ZhongYu	GB-88	SEM001-06	2019-06-13	2022-06-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2020-07-10	2021-07-09
LISN	Rohde & Schwarz	ENV216	SEM007-01	2019-09-24	2020-09-23
LISN	ETS-LINDGREN	3816/2	SEM007-02	2020-04-01	2021-03-31
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2020-03-24	2021-03-23

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-08-05	2020-08-04
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2020-07-10	2021-07-09
MXE EMI receiver	KEYSIGHT	N9038A	SEM004-15	2019-12-16	2020-12-15
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-02	2019-05-24	2022-05-23
Pre-amplifier	Agilent Technologies	8447D	SEM005-01	2020-04-01	2021-03-31

Radiated Emissions (above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2020-07-10	2021-07-09
EXA Spectrum Analyzer	Agilent Technologies Inc	N9010A	SEM004-12	2020-04-09	2021-04-08
Horn Antenna	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2019-09-24	2020-09-23



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (CMA, CNAS, ILAC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2019-09-26	2020-09-25
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2019-09-26	2020-09-25
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2019-09-26	2020-09-25
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2020-04-07	2021-04-06



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (CMA, CNAS, ILAC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement:	47 CFR Part 15, Subpart B
Test Method:	ANSI C63.4:2014
Frequency Range:	150kHz to 30MHz
Limit:	
0.15M-0.5MHz	66dB(μV)-56dB(μV) quasi-peak, 56dB(μV)-46dB(μV) average
0.5M-5MHz	56dB(μV) quasi-peak, 46dB(μV) average
5M-30MHz	60dB(μV) quasi-peak, 50dB(μV) average
Detector:	Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 51 % RH Atmospheric Pressure: 1005 mbar


Pretest these
modes to find
the worst case:

- a: Idle mode, Keep the EUT at standby mode.
- b: Charging mode, keep EUT in charging with Adapter, earphone.
- c: LTE band 2+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- d: LTE band 4+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- e: LTE band 5+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- f: LTE band 12+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- g: LTE band 13+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- h: LTE band 14+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- i: Telecom Idle + BT+ WLAN + GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- j: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + video playing + back camera + LAN + Desktop Cradle.
- k: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + video playing + back camera + LAN + Wall Cradle.
- l: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + video playing + frond camera + LAN + Wall Cradle.
- c: LTE band 2+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + LAN + Keyboard Cradle.
- j: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + LAN + Desktop Cradle.
- k: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + LAN + Wall Cradle.

The worst case
for final test:




6.1.2 Test Setup Diagram

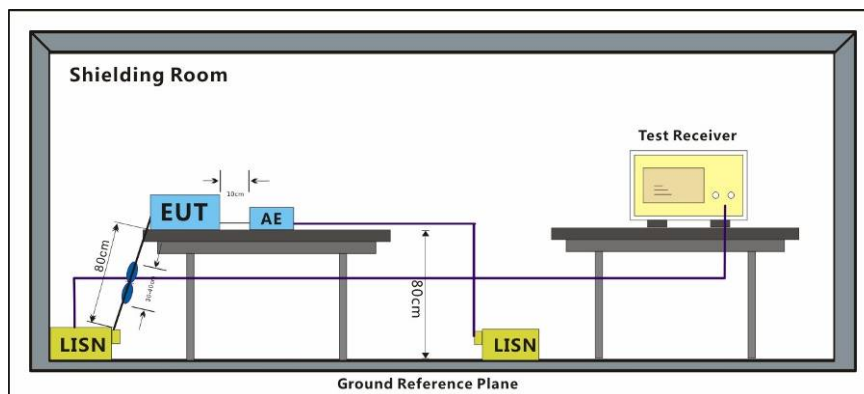

6.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

Mode:c; Line:Live Line

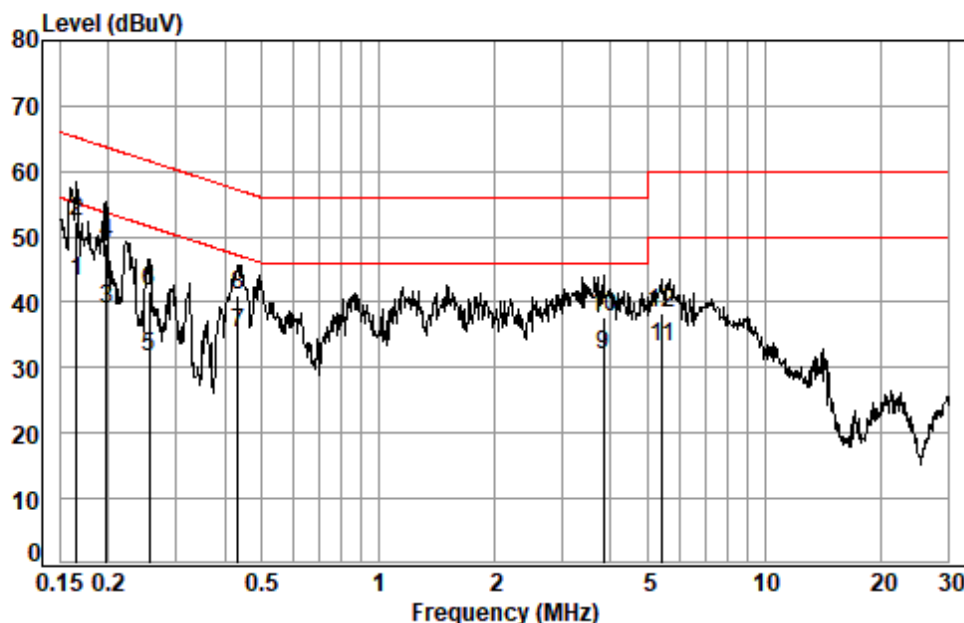

Site : Shielding Room

Condition: Line


Job No. : 04810CR

Test mode: c

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1659	0.01	9.59	33.55	43.15	55.16	-12.01	Average
2	0.1659	0.01	9.59	42.74	52.34	65.16	-12.82	QP
3	0.1976	0.02	9.59	29.40	39.01	53.71	-14.70	Average
4	0.1976	0.02	9.59	39.46	49.07	63.71	-14.64	QP
5	0.2548	0.03	9.59	21.92	31.54	51.60	-20.06	Average
6	0.2548	0.03	9.59	31.98	41.60	61.60	-20.00	QP
7	0.4328	0.05	9.59	25.78	35.42	47.20	-11.78	Average
8	0.4328	0.05	9.59	31.37	41.01	57.20	-16.19	QP
9	3.8196	0.16	9.65	22.04	31.85	46.00	-14.15	Average
10	3.8196	0.16	9.65	27.88	37.69	56.00	-18.31	QP
11	5.4474	0.17	9.68	23.42	33.27	50.00	-16.73	Average
12	5.4474	0.17	9.68	28.56	38.41	60.00	-21.59	QP



Mode:c; Line:Neutral Line

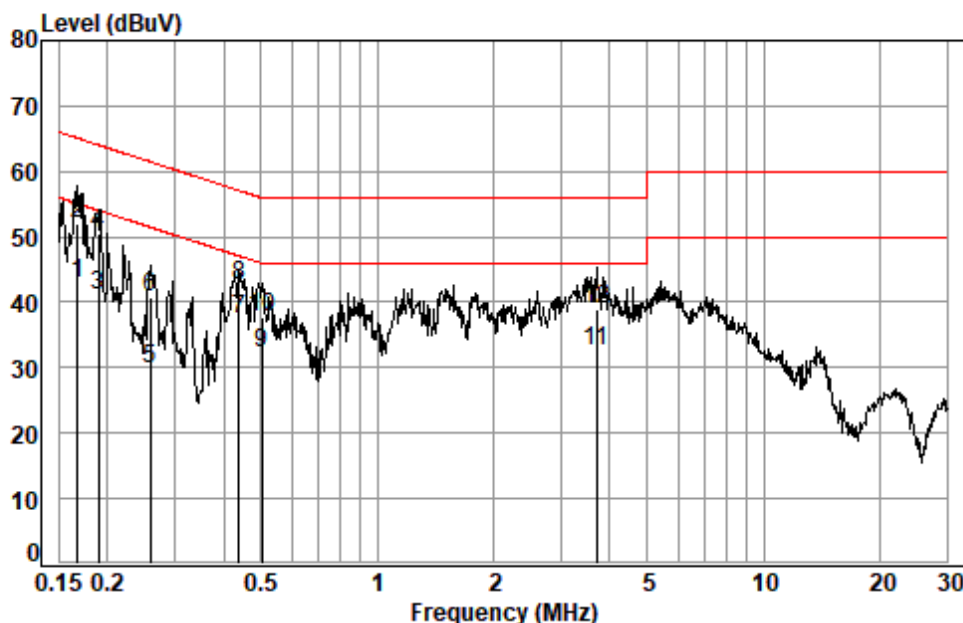

Site : Shielding Room

Condition: Neutral


Job No. : 04810CR

Test mode: c

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1677	0.01	9.55	33.22	42.78	55.08	-12.30	Average
2	0.1677	0.01	9.55	42.37	51.93	65.08	-13.15	QP
3	0.1904	0.02	9.55	31.52	41.09	54.02	-12.93	Average
4	0.1904	0.02	9.55	40.99	50.56	64.02	-13.46	QP
5	0.2589	0.03	9.54	20.31	29.88	51.47	-21.59	Average
6	0.2589	0.03	9.54	31.12	40.69	61.47	-20.78	QP
7	0.4374	0.05	9.55	27.89	37.49	47.11	-9.62	Average
8	0.4374	0.05	9.55	32.97	42.57	57.11	-14.54	QP
9	0.5020	0.06	9.54	22.68	32.28	46.00	-13.72	Average
10	0.5020	0.06	9.54	28.08	37.68	56.00	-18.32	QP
11	3.7001	0.16	9.59	22.71	32.46	46.00	-13.54	Average
12	3.7001	0.16	9.59	29.30	39.05	56.00	-16.95	QP



Mode:j; Line:Live Line

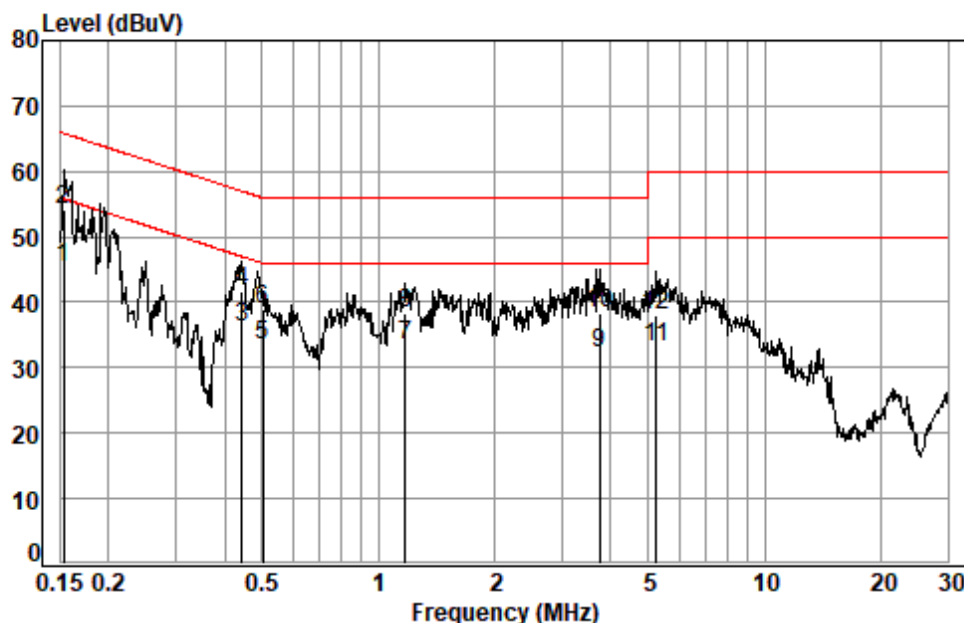

Site : Shielding Room

Condition: Line


Job No. : 04810CR

Test mode: j

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1532	0.01	9.59	35.76	45.36	55.82	-10.46	Average
2	0.1532	0.01	9.59	44.44	54.04	65.82	-11.78	QP
3	0.4444	0.06	9.59	26.61	36.26	46.98	-10.72	Average
4	0.4444	0.06	9.59	32.11	41.76	56.98	-15.22	QP
5	0.5020	0.06	9.59	23.81	33.46	46.00	-12.54	Average
6	0.5020	0.06	9.59	29.18	38.83	56.00	-17.17	QP
7	1.1781	0.11	9.60	23.73	33.44	46.00	-12.56	Average
8	1.1781	0.11	9.60	28.75	38.46	56.00	-17.54	QP
9	3.7395	0.16	9.65	22.33	32.14	46.00	-13.86	Average
10	3.7395	0.16	9.65	28.60	38.41	56.00	-17.59	QP
11	5.2491	0.17	9.68	23.20	33.05	50.00	-16.95	Average
12	5.2491	0.17	9.68	28.26	38.11	60.00	-21.89	QP



Mode:j; Line:Neutral Line

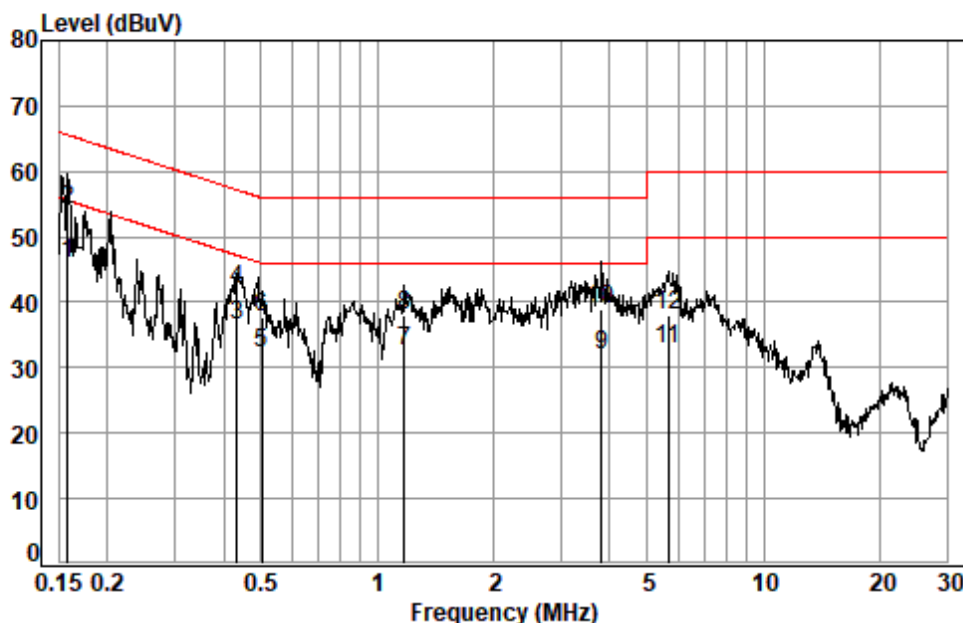


Site : Shielding Room
Condition: Neutral
Job No. : 04810CR
Test mode: j

	Freq	Cable Loss	LISN Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1582	0.01	9.55	36.36	45.92	55.56	-9.64	Average
2	0.1582	0.01	9.55	44.69	54.25	65.56	-11.31	QP
3	0.4328	0.05	9.55	26.87	36.47	47.20	-10.73	Average
4	0.4328	0.05	9.55	32.49	42.09	57.20	-15.11	QP
5	0.5020	0.06	9.54	22.53	32.13	46.00	-13.87	Average
6	0.5020	0.06	9.54	28.18	37.78	56.00	-18.22	QP
7	1.1781	0.11	9.55	23.00	32.66	46.00	-13.34	Average
8	1.1781	0.11	9.55	28.40	38.06	56.00	-17.94	QP
9	3.7994	0.16	9.60	22.28	32.04	46.00	-13.96	Average
10	3.7994	0.16	9.60	29.14	38.90	56.00	-17.10	QP
11	5.6833	0.17	9.65	23.13	32.95	50.00	-17.05	Average
12	5.6833	0.17	9.65	28.15	37.97	60.00	-22.03	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Mode:k; Line:Live Line

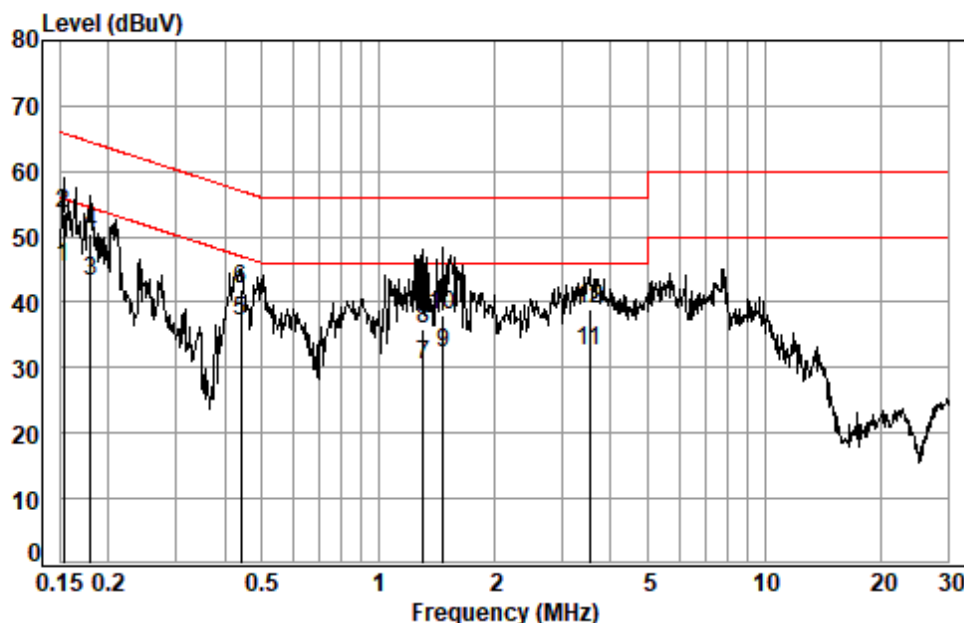

Site : Shielding Room

Condition: Line


Job No. : 04810CR

Test mode: k

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1532	0.01	9.59	35.57	45.17	55.82	-10.65	Average
2	0.1532	0.01	9.59	43.94	53.54	65.82	-12.28	QP
3	0.1796	0.02	9.59	33.43	43.04	54.50	-11.46	Average
4	0.1796	0.02	9.59	40.74	50.35	64.50	-14.15	QP
5	0.4421	0.06	9.59	27.41	37.06	47.02	-9.96	Average
6	0.4421	0.06	9.59	32.23	41.88	57.02	-15.14	QP
7	1.3098	0.12	9.60	20.81	30.53	46.00	-15.47	Average
8	1.3098	0.12	9.60	26.13	35.85	56.00	-20.15	QP
9	1.4718	0.13	9.61	22.52	32.26	46.00	-13.74	Average
10	1.4718	0.13	9.61	28.40	38.14	56.00	-17.86	QP
11	3.5278	0.16	9.66	22.63	32.45	46.00	-13.55	Average
12	3.5278	0.16	9.66	29.06	38.88	56.00	-17.12	QP



Mode:k; Line:Neutral Line

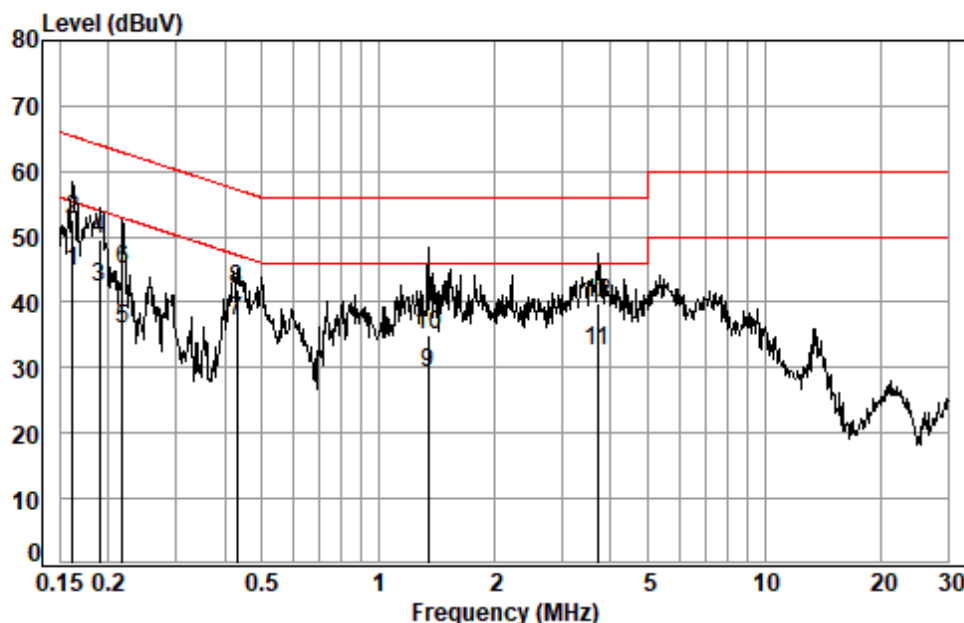

Site : Shielding Room

Condition: Neutral

Job No. : 04810CR

Test mode: k

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1615	0.01	9.55	35.02	44.58	55.38	-10.80	Average
2	0.1615	0.01	9.55	43.11	52.67	65.38	-12.71	QP
3	0.1904	0.02	9.55	32.86	42.43	54.02	-11.59	Average
4	0.1904	0.02	9.55	39.93	49.50	64.02	-14.52	QP
5	0.2174	0.03	9.55	26.25	35.83	52.92	-17.09	Average
6	0.2174	0.03	9.55	35.36	44.94	62.92	-17.98	QP
7	0.4305	0.05	9.55	27.54	37.14	47.24	-10.10	Average
8	0.4305	0.05	9.55	32.31	41.91	57.24	-15.33	QP
9	1.3450	0.12	9.56	19.43	29.11	46.00	-16.89	Average
10	1.3450	0.12	9.56	25.21	34.89	56.00	-21.11	QP
11	3.7001	0.16	9.59	22.89	32.64	46.00	-13.36	Average
12	3.7001	0.16	9.59	30.03	39.78	56.00	-16.22	QP



6.2 Radiated Emissions (30MHz-1GHz)

Test Requirement:	47 CFR Part 15, Subpart B
Test Method:	ANSI C63.4:2014
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Limit:	
30MHz -88MHz	40.0(dBμV/m) quasi-peak
88MHz-216MHz	43.5(dBμV/m) quasi-peak
216MHz-960MHz	46.0(dBμV/m) quasi-peak
960MHz-1000MHz	54.0(dBμV/m) quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to1000MHz

6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 26.2 °C Humidity: 58 % RH Atmospheric Pressure: 1005 mbar

Pretest these modes to find the worst case: a: Idle mode, Keep the EUT at standby mode.

b: Charging mode, keep EUT in charging with Adapter, earphone.

c: LTE band 2+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.

d: LTE band 4+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.

e: LTE band 5+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.

f: LTE band 12+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.

g: LTE band 13+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.

h: LTE band 14+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.

i: Telecom Idle + BT+ WLAN + GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.

j: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + video playing + back camera + LAN + Desktop Cradle.

k: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + video playing + back camera + LAN + Wall Cradle.

l: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + video playing + frond camera + LAN + Wall Cradle.

The worst case for final test:

b: Charging mode, keep EUT in charging with Adapter, earphone.


c: LTE band 2+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + LAN + Keyboard Cradle.

j: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + LAN + Desktop Cradle.

k: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + LAN + Wall Cradle.




6.2.2 Test Setup Diagram

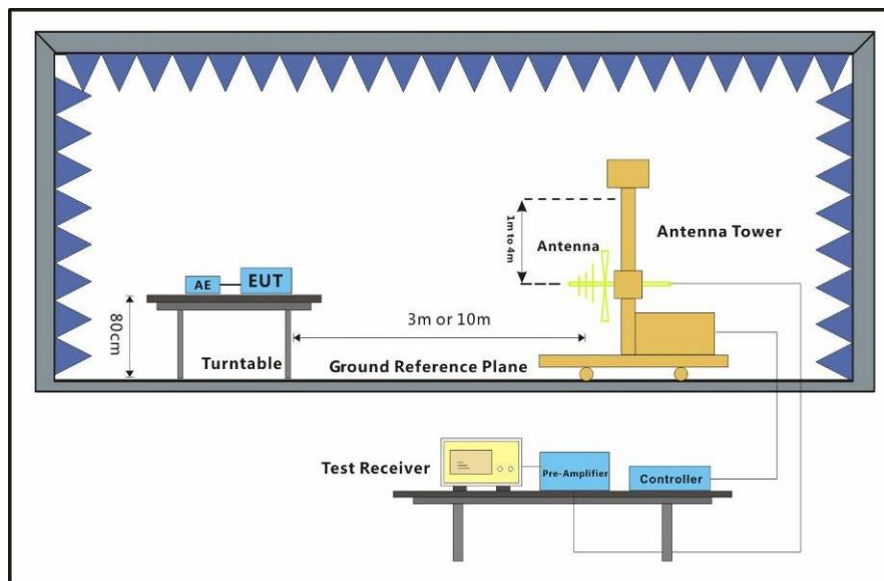

6.2.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Mode:b; Polarization:Horizontal

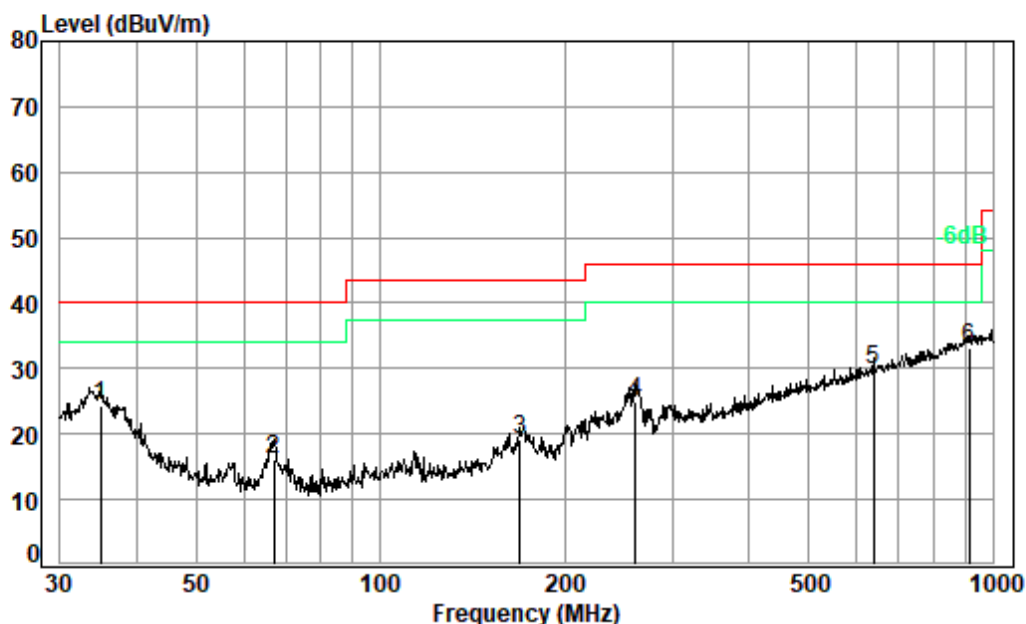

Condition: 3m HORIZONTAL


Job No. : 04810CR

Test Mode: b

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	34.88	0.60	19.88	27.72	31.52	24.28	40.00	-15.72	QP
2	66.97	0.80	12.91	27.65	30.08	16.14	40.00	-23.86	QP
3	169.01	1.35	15.69	27.26	29.35	19.13	43.50	-24.37	QP
4	261.06	1.73	19.08	26.96	30.98	24.83	46.00	-21.17	QP
5	638.37	2.78	27.12	28.04	27.84	29.70	46.00	-16.30	QP
6 pp	916.07	3.62	29.88	27.08	26.59	33.01	46.00	-12.99	QP



Mode:b; Polarization:Vertical

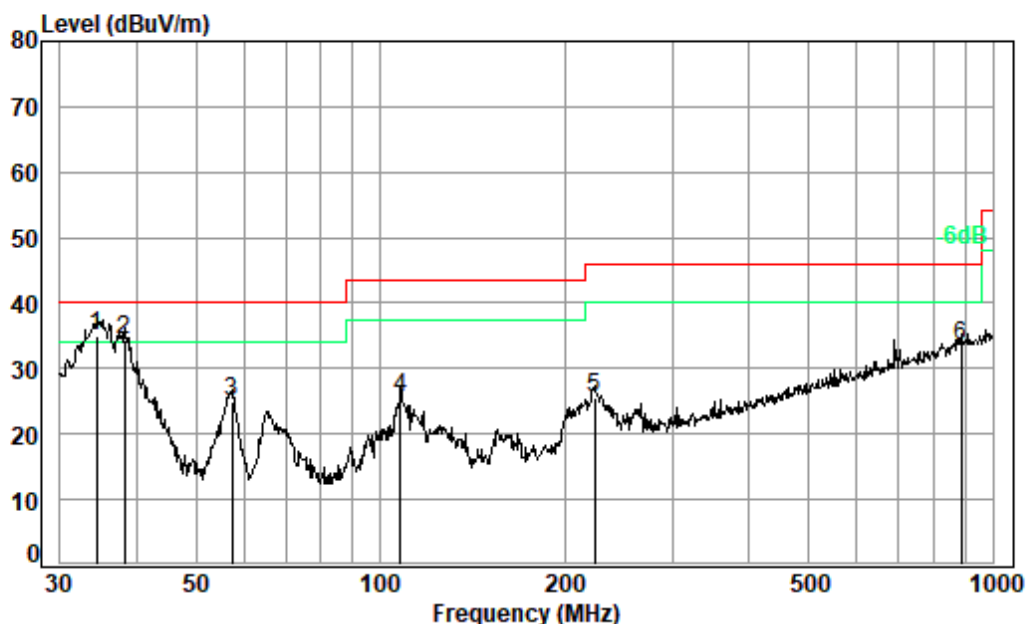

Condition: 3m VERTICAL


Job No. : 04810CR

Test Mode: b

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	34.40	0.60	20.12	27.72	42.04	35.04	40.00	-4.96	QP
2	38.21	0.60	18.29	27.71	43.11	34.29	40.00	-5.71	QP
3	57.19	0.80	13.46	27.67	38.28	24.87	40.00	-15.13	QP
4	107.89	1.22	13.63	27.56	38.14	25.43	43.50	-18.07	QP
5	223.73	1.54	17.51	27.07	33.50	25.48	46.00	-20.52	QP
6	887.61	3.55	29.65	27.23	27.40	33.37	46.00	-12.63	QP



Mode:c; Polarization:Horizontal

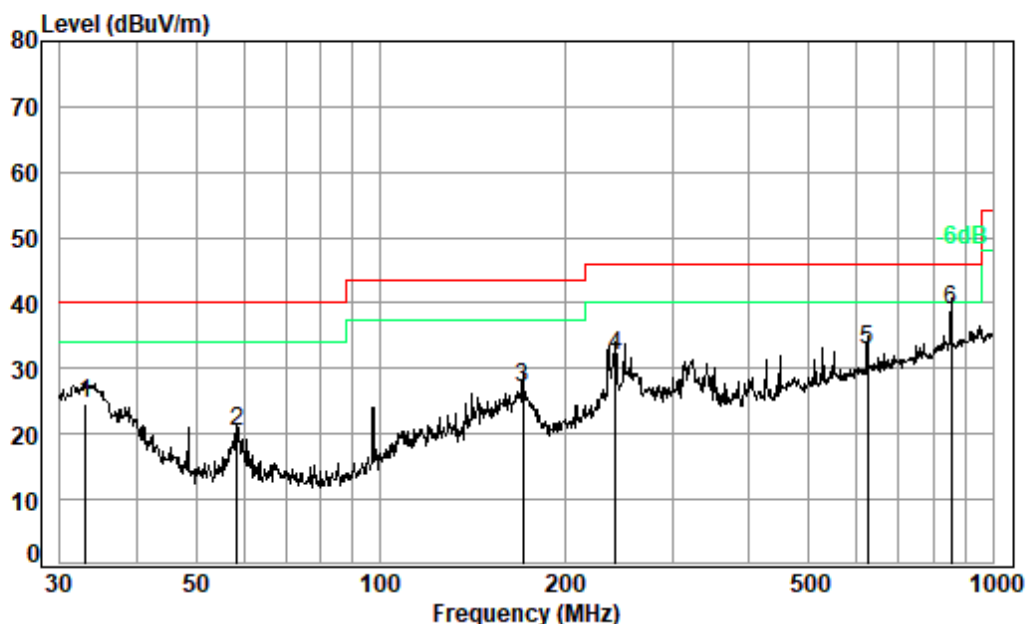


Condition: 3m HORIZONTAL

Job No. : 04810CR

Test Mode: c

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	32.98	0.60	20.85	27.73	30.85	24.57	40.00	-15.43	QP
2	58.41	0.80	13.35	27.67	33.91	20.39	40.00	-19.61	QP
3	170.79	1.35	15.72	27.25	37.29	27.11	43.50	-16.39	QP
4	242.53	1.64	18.84	27.01	38.62	32.09	46.00	-13.91	QP
5	625.08	2.75	26.95	28.07	31.29	32.92	46.00	-13.08	QP
6 pp	854.02	3.42	29.22	27.42	33.67	38.89	46.00	-7.11	QP

Mode:c; Polarization:Vertical

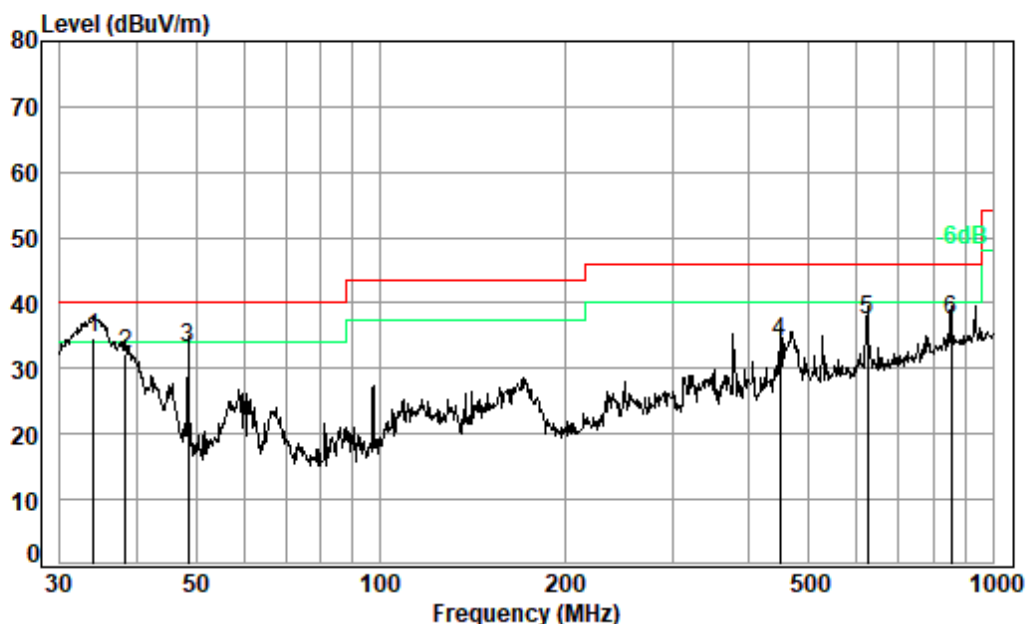

Condition: 3m VERTICAL

Job No. : 04810CR

Test Mode: c

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	34.04	0.60	20.31	27.72	41.54	34.73	40.00	-5.27	QP
2	38.35	0.60	18.23	27.71	41.14	32.26	40.00	-7.74	QP
3	48.50	0.77	14.65	27.69	45.28	33.01	40.00	-6.99	QP
4	449.56	2.41	23.55	27.61	35.83	34.18	46.00	-11.82	QP
5	625.08	2.75	26.95	28.07	35.77	37.40	46.00	-8.60	QP
6	854.02	3.42	29.22	27.42	32.21	37.43	46.00	-8.57	QP




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (CMA, CNAS, ILAC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Mode:j; Polarization:Horizontal

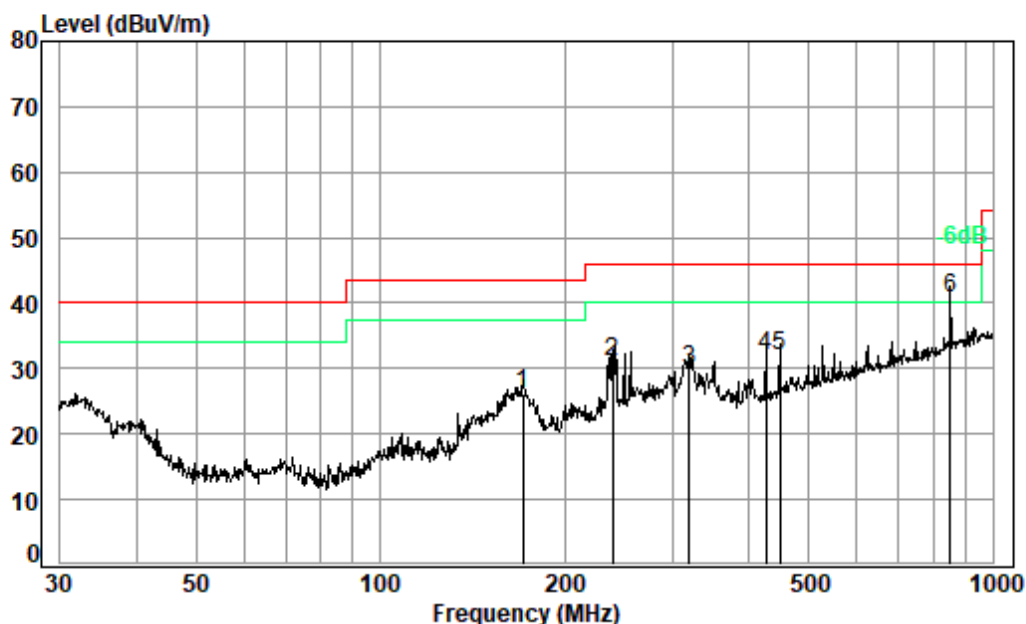


Condition: 3m HORIZONTAL

Job No. : 04810CR

Test Mode: j

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	170.79	1.35	15.72	27.25	36.38	26.20	43.50	-17.30	QP
2	239.15	1.62	18.73	27.02	37.56	30.89	46.00	-15.11	QP
3	319.94	1.97	20.23	26.99	34.65	29.86	46.00	-16.14	QP
4	426.52	2.31	23.03	27.51	33.96	31.79	46.00	-14.21	QP
5	449.56	2.41	23.55	27.61	33.50	31.85	46.00	-14.15	QP
6 pp	851.04	3.41	29.18	27.43	35.47	40.63	46.00	-5.37	QP

Mode:j; Polarization:Vertical

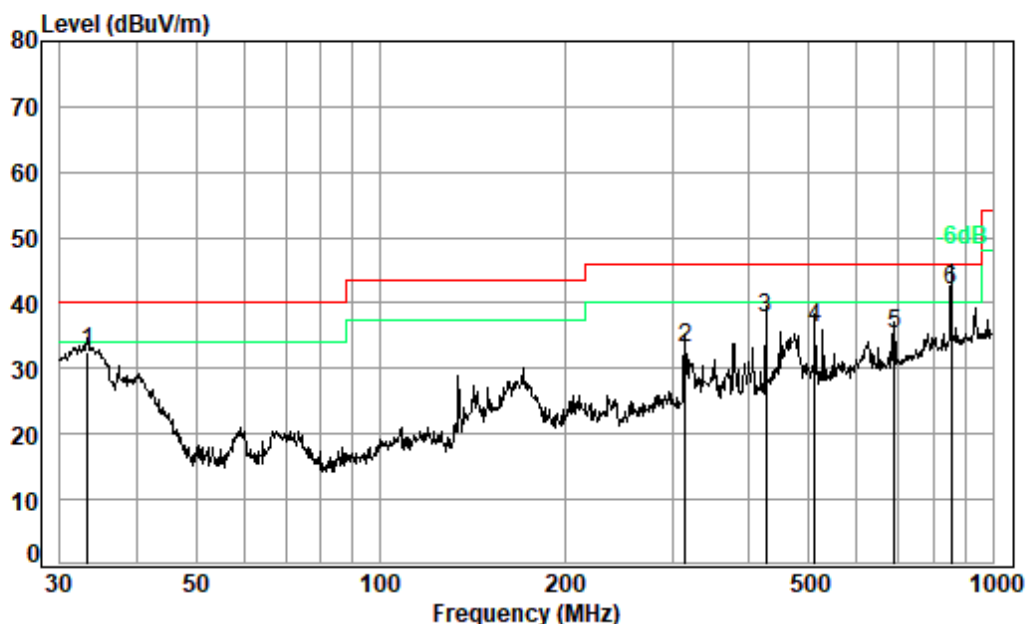


Condition: 3m VERTICAL

Job No. : 04810CR

Test Mode: j

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	33.33	0.60	20.67	27.72	39.01	32.56	40.00	-7.44	QP
2	314.38	1.95	20.06	26.96	38.10	33.15	46.00	-12.85	QP
3	426.52	2.31	23.03	27.51	39.75	37.58	46.00	-8.42	QP
4	511.84	2.61	24.86	27.84	36.65	36.28	46.00	-9.72	QP
5	691.99	2.89	27.80	27.93	32.42	35.18	46.00	-10.82	QP
6 pp	854.02	3.42	29.22	27.42	36.69	41.91	46.00	-4.09	QP

Mode:k; Polarization:Horizontal

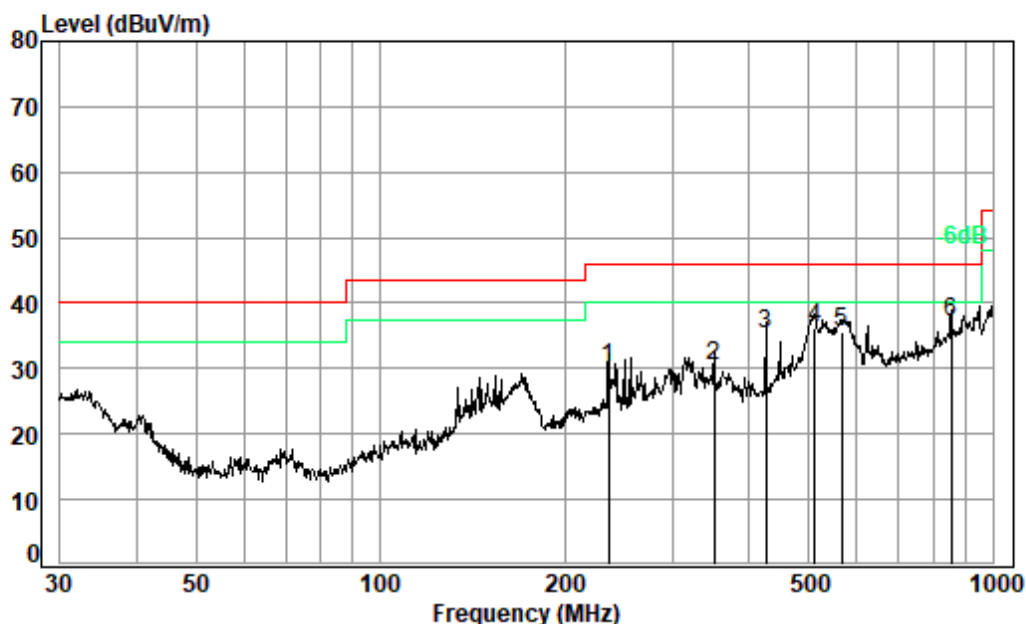


Condition: 3m HORIZONTAL

Job No. : 04810CR

Test Mode: k

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	235.82	1.60	18.48	27.03	37.15	30.20	46.00	-15.80	QP
2	350.48	2.06	21.11	27.15	34.47	30.49	46.00	-15.51	QP
3	426.52	2.31	23.03	27.51	37.39	35.22	46.00	-10.78	QP
4	511.84	2.61	24.86	27.84	36.69	36.32	46.00	-9.68	QP
5	566.62	2.67	25.97	28.03	34.95	35.56	46.00	-10.44	QP
6 pp	854.02	3.42	29.22	27.42	31.80	37.02	46.00	-8.98	QP

Mode:k; Polarization:Vertical

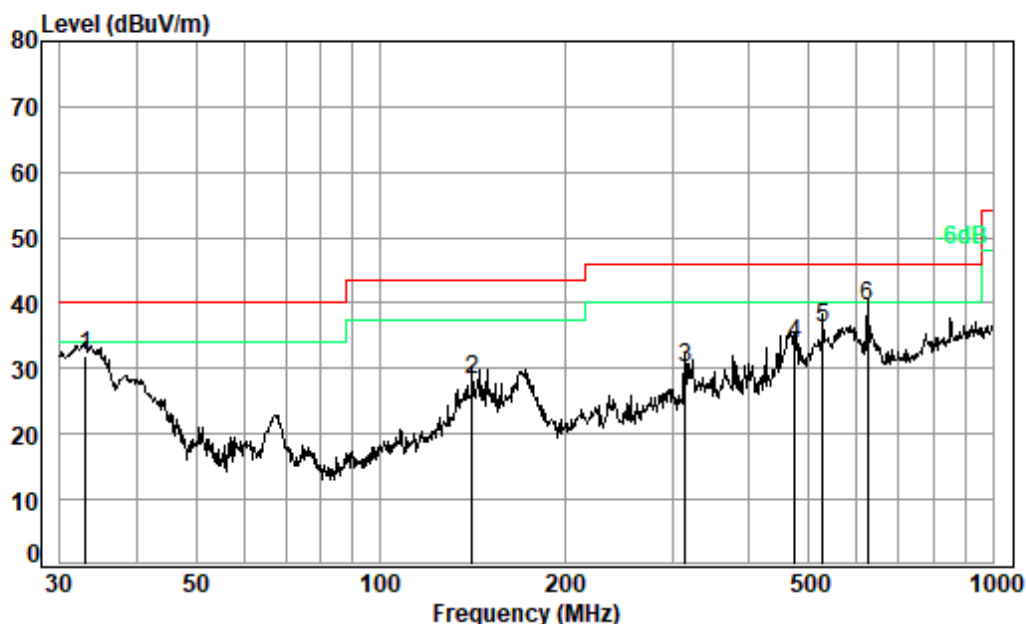

Condition: 3m VERTICAL

Job No. : 04810CR

Test Mode: k

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	32.98	0.60	20.85	27.73	38.36	32.08	40.00	-7.92	QP
2	141.33	1.30	13.83	27.38	40.43	28.18	43.50	-15.32	QP
3	314.38	1.95	20.06	26.96	35.05	30.10	46.00	-15.90	QP
4	475.50	2.51	24.10	27.71	34.77	33.67	46.00	-12.33	QP
5	528.25	2.63	25.20	27.90	36.27	36.20	46.00	-9.80	QP
6 pp	625.08	2.75	26.95	28.07	37.99	39.62	46.00	-6.38	QP



6.3 Radiated Emissions (above 1GHz)

Test Requirement: 47 CFR Part 15, Subpart B
Test Method: ANSI C63.4:2014
Frequency Range: Above 1GHz
Measurement Distance: 3m
Limit:
Above 1GHz 74(dBμV/m) peak, 54(dBμV/m) average
Detector: Peak for pre-scan (1000kHz resolution bandwidth) 1000M to18000MHz

6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.4 °C Humidity: 58.7 % RH Atmospheric Pressure: 1005 mbar


Pretest these
modes to find
the worst case:

- a: Idle mode, Keep the EUT at standby mode.
- b: Charging mode, keep EUT in charging with Adapter, earphone.
- c: LTE band 2+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- d: LTE band 4+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- e: LTE band 5+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- f: LTE band 12+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- g: LTE band 13+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- h: LTE band 14+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- i: Telecom Idle + BT+ WLAN + GPS Rx + battery + adapter + Earphone + USB + video playing + back camera + LAN + Keyboard Cradle.
- j: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + video playing + back camera + LAN + Desktop Cradle.
- k: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + video playing + back camera + LAN + Wall Cradle.
- l: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + video playing + frond camera + LAN + Wall Cradle.
- b: Charging mode, keep EUT in charging with Adapter, earphone.
- c: LTE band 2+ BT+WLAN+ GPS Rx + battery + adapter + Earphone + USB + LAN + Keyboard Cradle.
- j: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + LAN + Desktop Cradle.
- k: a~i worse mode + BT+ WLAN + GPS Rx + battery + adapter + USB + LAN + Wall Cradle.

The worst case
for final test:



6.3.2 Test Setup Diagram

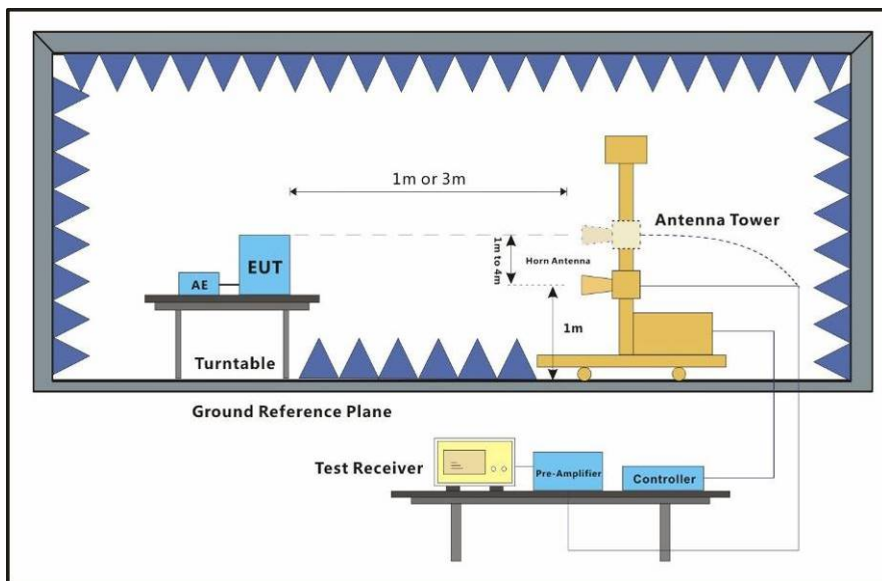


6.3.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

Note: Add the High Pass Filter for above 1GHz Radiated Emission testing.


Mode:b; Polarization:Horizontal

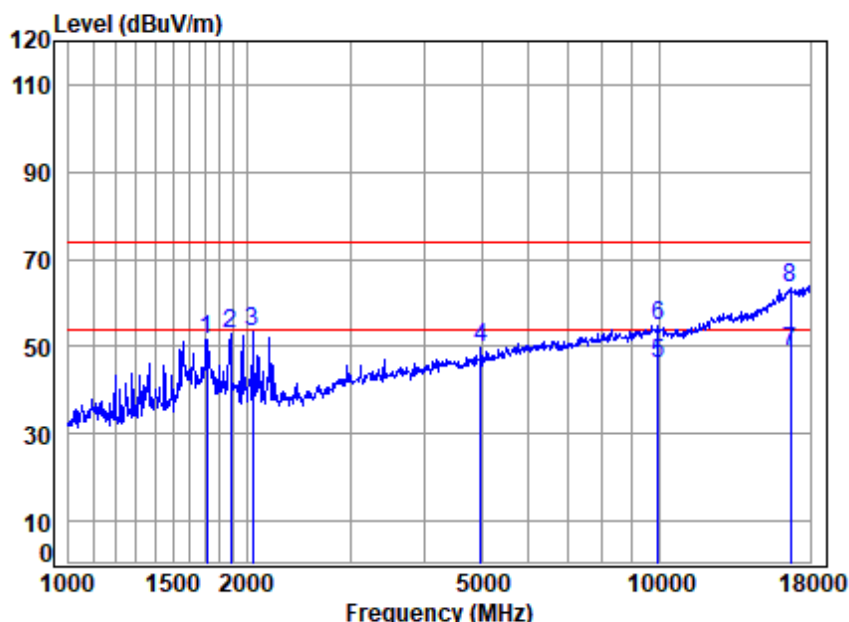

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04810CR
Mode : b
Note :

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1711.909	3.44	26.72	40.64	62.02	51.54	74.00	-22.46	Peak
2	1877.800	3.56	27.36	40.73	62.83	53.02	74.00	-20.98	Peak
3	2047.895	3.74	27.90	40.82	62.42	53.24	74.00	-20.76	Peak
4	4988.058	7.29	34.19	42.89	50.98	49.57	74.00	-24.43	Peak
5	9952.717	10.70	37.87	38.07	35.70	46.20	54.00	-7.80	Average
6	9952.717	10.70	37.87	38.07	44.35	54.85	74.00	-19.15	Peak
7	16696.880	14.56	42.36	40.54	32.34	48.72	54.00	-5.28	Average
8	16696.880	14.56	42.36	40.54	46.89	63.27	74.00	-10.73	Peak

Mode:b; Polarization:Vertical

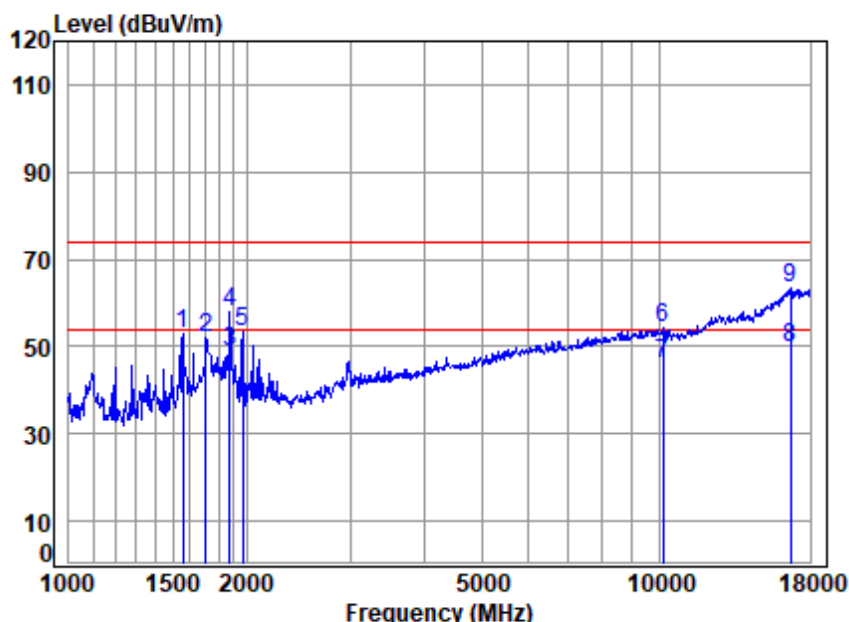


Site : chamber
Condition: 3m VERTICAL
Job No : 04810CR
Mode : b
Note :

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1560.673	3.31	26.08	40.55	64.10	52.94	74.00	-21.06	Peak
2	1706.968	3.44	26.70	40.64	62.61	52.11	74.00	-21.89	Peak
3	1872.381	3.56	27.34	40.73	58.68	48.85	54.00	-5.15	Average
4	1872.381	3.56	27.34	40.73	67.78	57.95	74.00	-16.05	Peak
5	1966.680	3.63	27.68	40.78	62.68	53.21	74.00	-20.79	Peak
6	10156.140	10.64	37.84	38.08	43.79	54.19	74.00	-19.81	Peak
7	10156.140	10.64	37.84	38.08	35.67	46.07	54.00	-7.93	Average
8	16696.880	14.56	42.36	40.54	33.39	49.77	54.00	-4.23	Average
9	16696.880	14.56	42.36	40.54	47.02	63.40	74.00	-10.60	Peak




Mode:c; Polarization:Horizontal

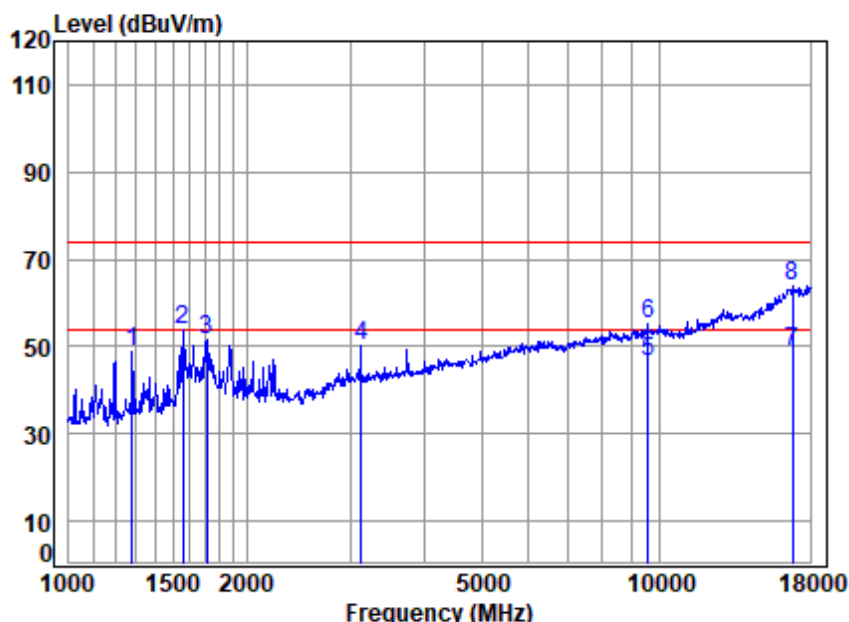

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04810CR
Mode : c
Note :

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	2.91	24.95	40.35	61.44	48.95	74.00	-25.05	Peak
2	1560.673	3.31	26.08	40.55	64.78	53.62	74.00	-20.38	Peak
3	1711.909	3.44	26.72	40.64	61.86	51.38	74.00	-22.62	Peak
4	3123.039	5.03	31.11	41.33	55.21	50.02	74.00	-23.98	Peak
5	9558.018	10.82	37.64	38.65	36.69	46.50	54.00	-7.50	Average
6	9558.018	10.82	37.64	38.65	45.35	55.16	74.00	-18.84	Peak
7	16793.680	14.44	42.44	40.54	32.62	48.96	54.00	-5.04	Average
8	16793.680	14.44	42.44	40.54	47.42	63.76	74.00	-10.24	Peak


Mode:c; Polarization:Vertical

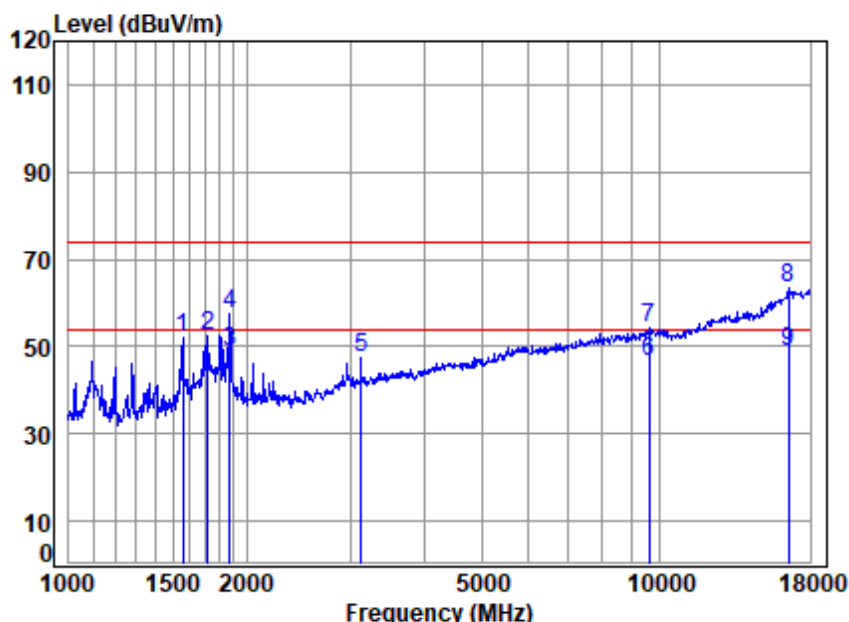

Site : chamber
Condition: 3m VERTICAL
Job No : 04810CR
Mode : c
Note :

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1560.673	3.31	26.08	40.55	63.17	52.01	74.00	-21.99	Peak
2	1716.864	3.44	26.74	40.64	62.80	52.34	74.00	-21.66	Peak
3	1872.381	3.56	27.34	40.73	58.69	48.86	54.00	-5.14	Average
4	1872.381	3.56	27.34	40.73	67.36	57.53	74.00	-16.47	Peak
5	3123.039	5.03	31.11	41.33	52.47	47.28	74.00	-26.72	Peak
6	9613.430	10.81	37.67	38.57	36.69	46.60	54.00	-7.40	Average
7	9613.430	10.81	37.67	38.57	44.35	54.26	74.00	-19.74	Peak
8	16552.730	14.75	42.24	40.55	47.09	63.53	74.00	-10.47	Peak
9	16552.730	14.75	42.24	40.55	32.37	48.81	54.00	-5.19	Average


Mode:j; Polarization:Horizontal

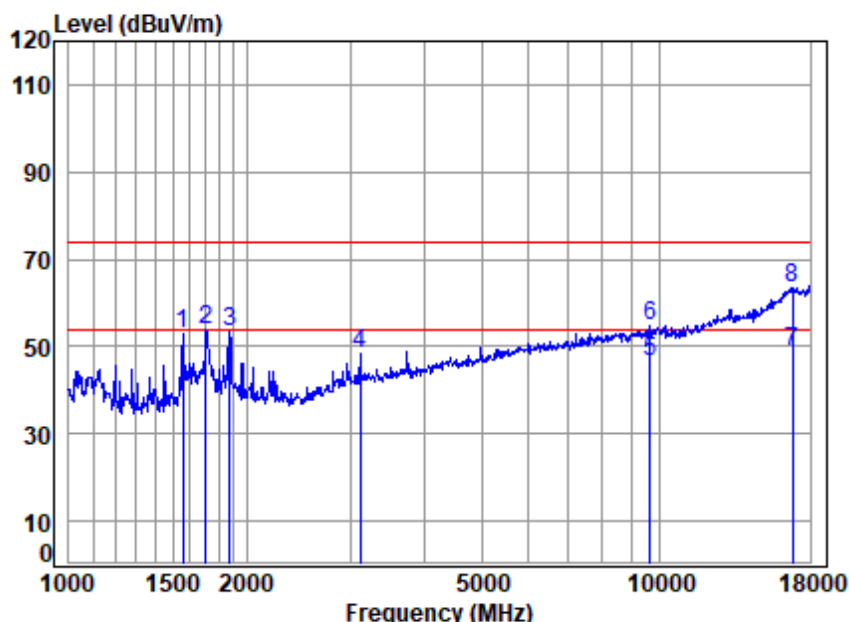

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04810CR
Mode : j
Note :

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1560.673	3.31	26.08	40.55	64.13	52.97	74.00	-21.03	Peak
2	1706.968	3.44	26.70	40.64	64.13	53.63	74.00	-20.37	Peak
3	1872.381	3.56	27.34	40.73	63.44	53.61	74.00	-20.39	Peak
4	3114.025	5.02	31.09	41.32	53.68	48.47	74.00	-25.53	Peak
5	9641.257	10.80	37.69	38.52	36.37	46.34	54.00	-7.66	Average
6	9641.257	10.80	37.69	38.52	44.86	54.83	74.00	-19.17	Peak
7	16842.290	14.37	42.48	40.54	32.38	48.69	54.00	-5.31	Average
8	16842.290	14.37	42.48	40.54	47.32	63.63	74.00	-10.37	Peak


Mode:j; Polarization:Vertical

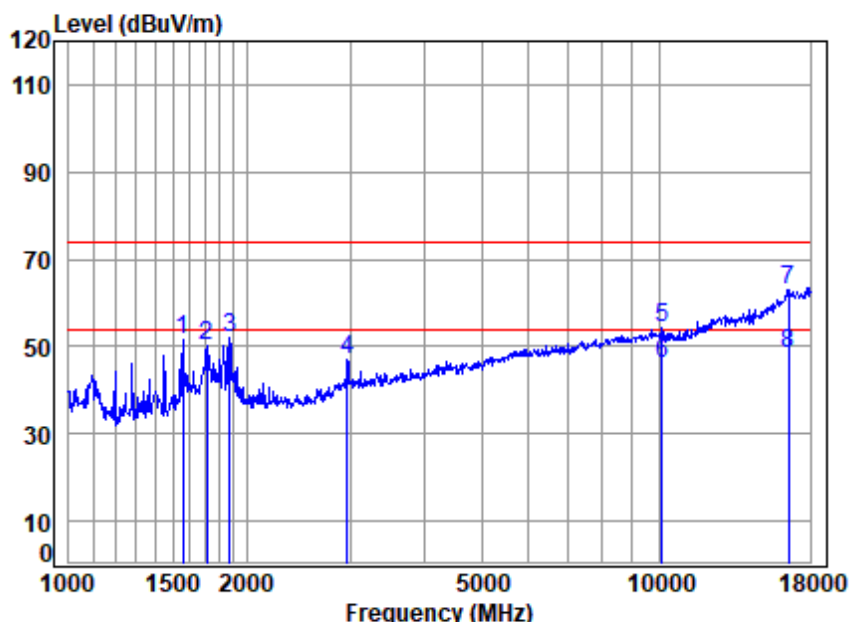

Site : chamber
Condition: 3m VERTICAL
Job No : 04810CR
Mode : j
Note :

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1560.673	3.31	26.08	40.55	62.54	51.38	74.00	-22.62	Peak
2	1711.909	3.44	26.72	40.64	60.56	50.08	74.00	-23.92	Peak
3	1872.381	3.56	27.34	40.73	61.90	52.07	74.00	-21.93	Peak
4	2964.712	4.84	30.76	41.19	52.61	47.02	74.00	-26.98	Peak
5	10097.600	10.66	37.86	38.05	43.90	54.37	74.00	-19.63	Peak
6	10097.600	10.66	37.86	38.05	35.69	46.16	54.00	-7.84	Average
7	16552.730	14.75	42.24	40.55	46.58	63.02	74.00	-10.98	Peak
8	16552.730	14.75	42.24	40.55	31.88	48.32	54.00	-5.68	Average

Mode:k; Polarization:Horizontal

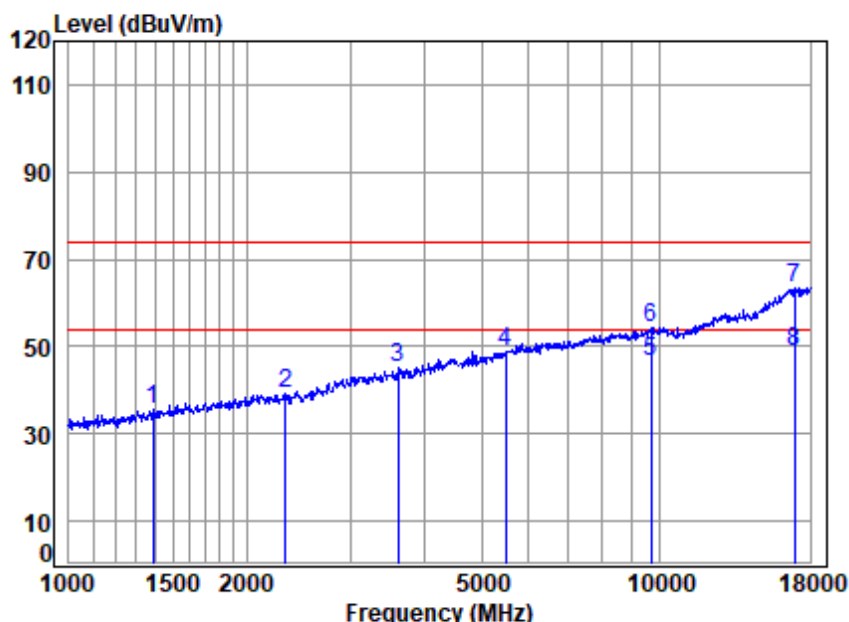

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04810CR
Mode : k
Note :

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1390.276	3.09	25.39	40.43	47.57	35.62	74.00	-38.38	Peak
2	2332.356	4.25	28.42	40.95	47.39	39.11	74.00	-34.89	Peak
3	3608.619	5.69	31.93	41.81	49.44	45.25	74.00	-28.75	Peak
4	5503.143	8.18	34.60	42.55	48.81	49.04	74.00	-24.96	Peak
5	9669.164	10.79	37.70	38.48	36.36	46.37	54.00	-7.63	Average
6	9669.164	10.79	37.70	38.48	44.49	54.50	74.00	-19.50	Peak
7	16939.940	14.25	42.55	40.53	47.31	63.58	74.00	-10.42	Peak
8	16939.940	14.25	42.55	40.53	32.38	48.65	54.00	-5.35	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057
中国·深圳·科技园中区M-10栋一号厂房

t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Mode:k; Polarization:Vertical

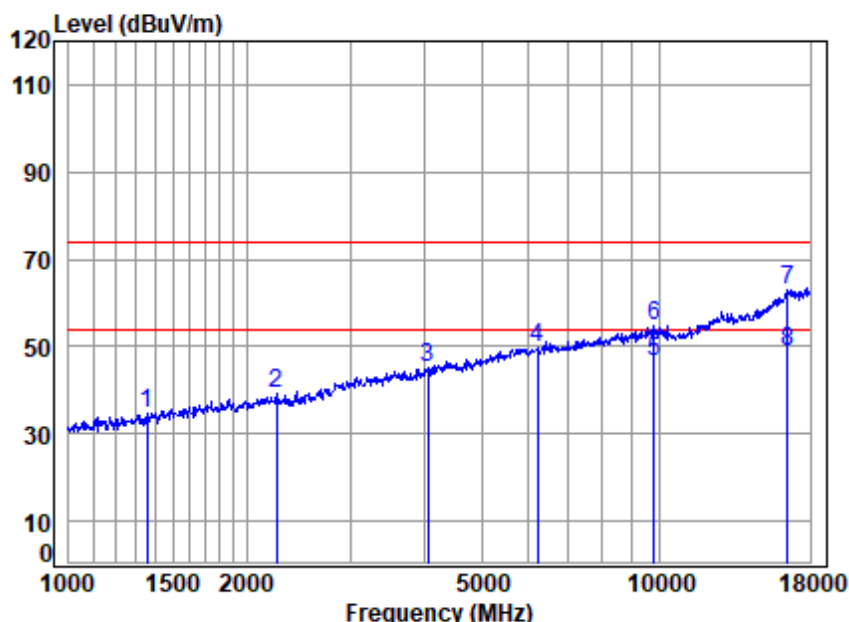

Site : chamber
Condition: 3m VERTICAL
Job No : 04810CR
Mode : k
Note :

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1354.577	3.03	25.25	40.40	46.79	34.67	74.00	-39.33	Peak
2	2246.344	4.10	28.27	40.91	47.70	39.16	74.00	-34.84	Peak
3	4050.904	6.33	32.80	42.20	48.07	45.00	74.00	-29.00	Peak
4	6231.427	8.27	35.34	42.10	48.43	49.94	74.00	-24.06	Peak
5	9809.916	10.75	37.79	38.28	36.34	46.60	54.00	-7.40	Average
6	9809.916	10.75	37.79	38.28	44.32	54.58	74.00	-19.42	Peak
7	16504.960	14.81	42.20	40.55	46.56	63.02	74.00	-10.98	Peak
8	16504.960	14.81	42.20	40.55	32.35	48.81	54.00	-5.19	Average


7 Photographs



7.1 Conducted Emissions at Mains Terminals (150kHz-30MHz) Test Setup







7.2 Radiated Emissions (30MHz-1GHz) Test Setup


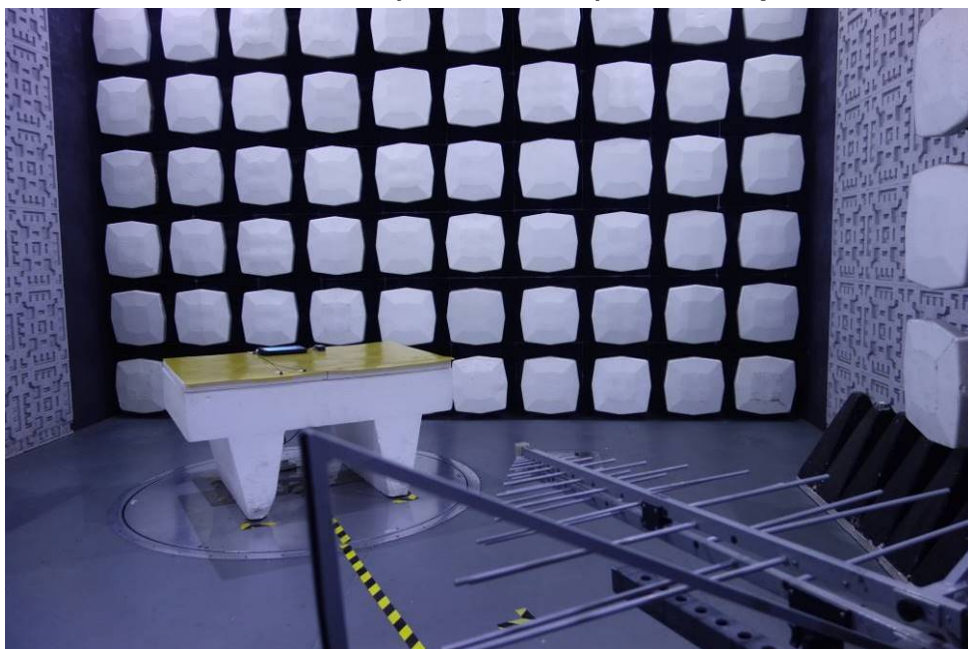


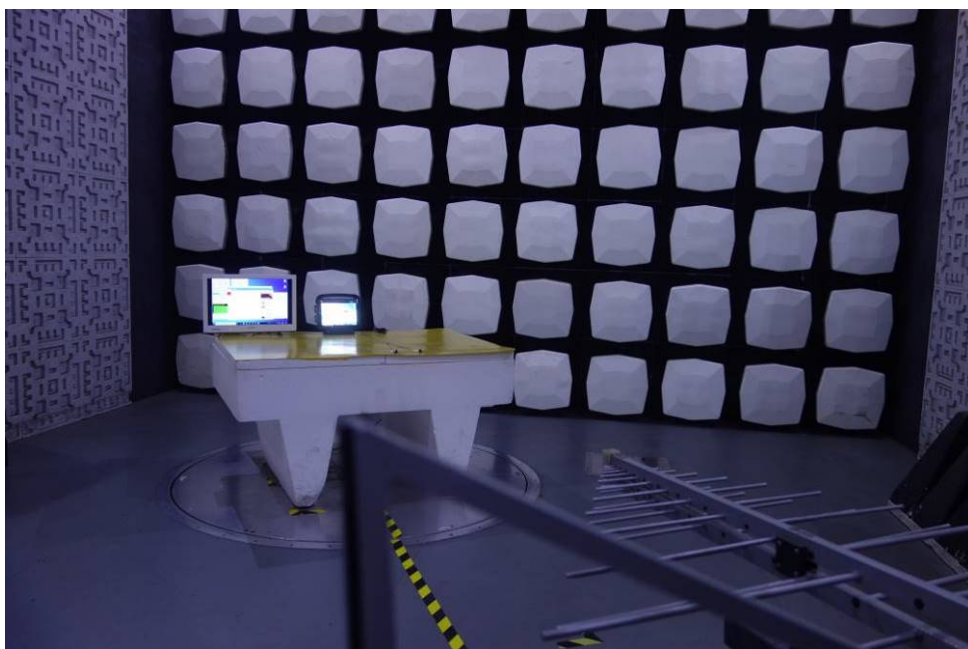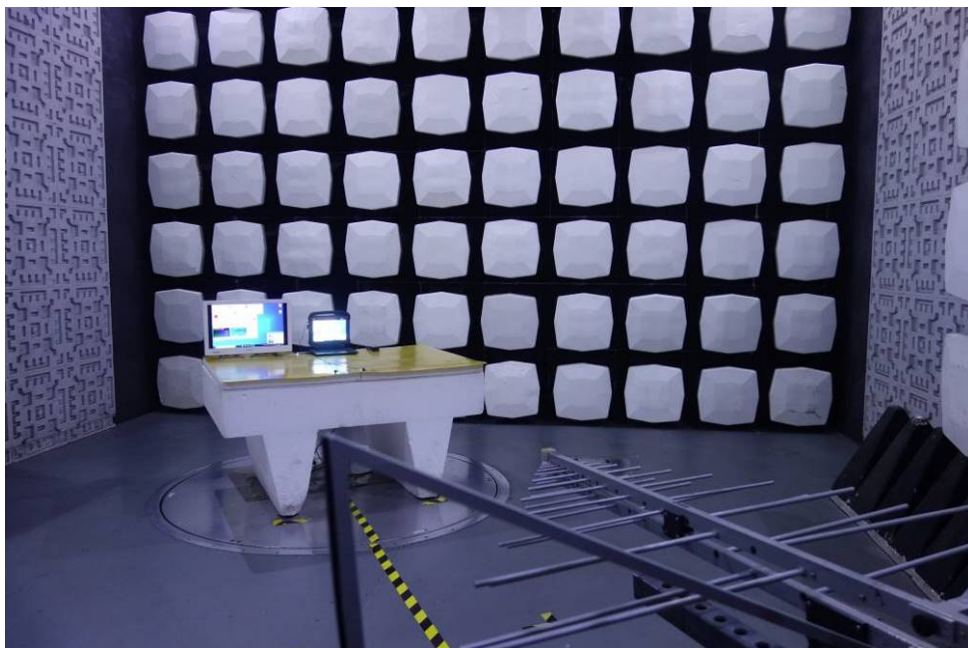

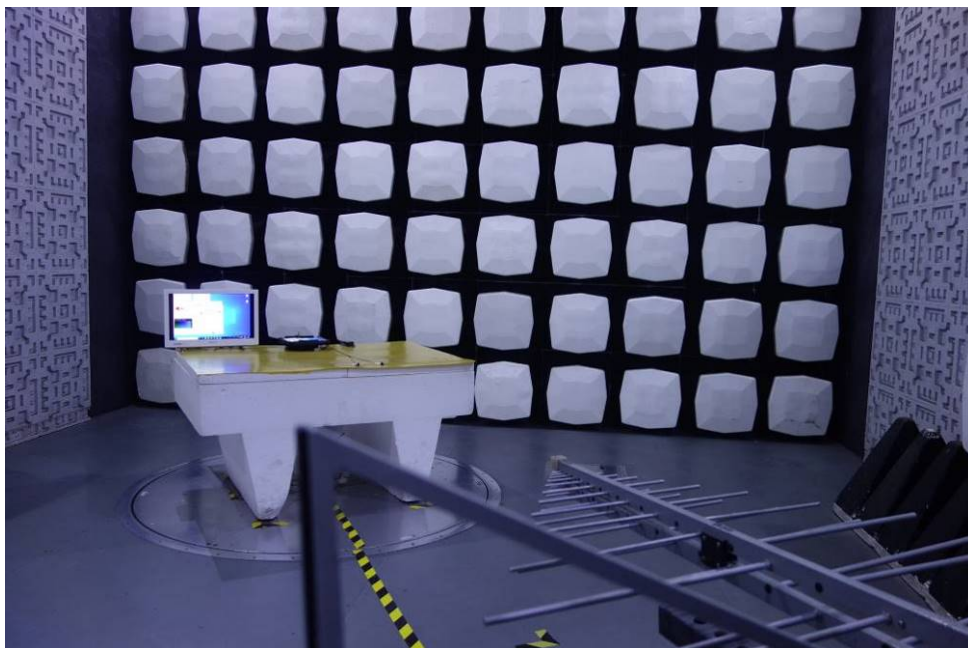

7.3 Radiated Emissions (above 1GHz) Test Setup

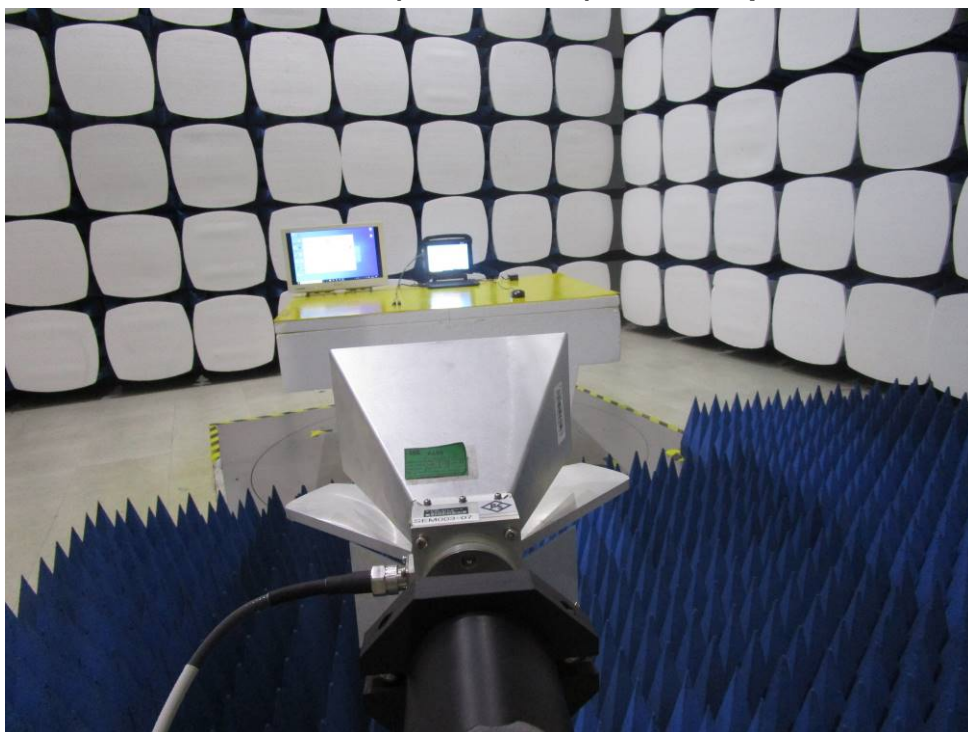

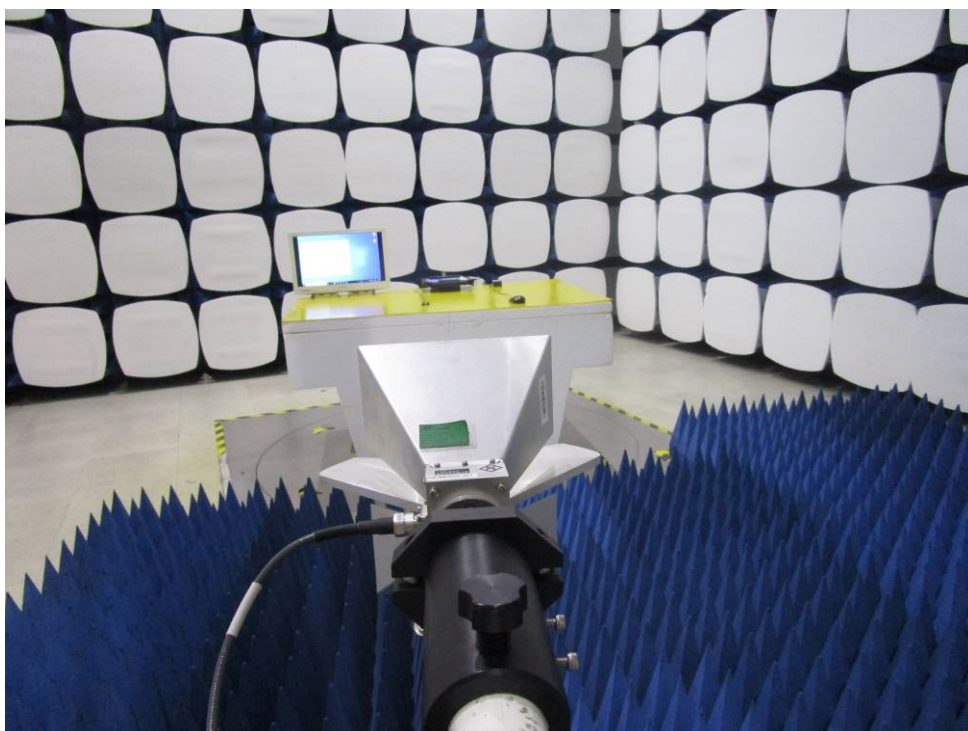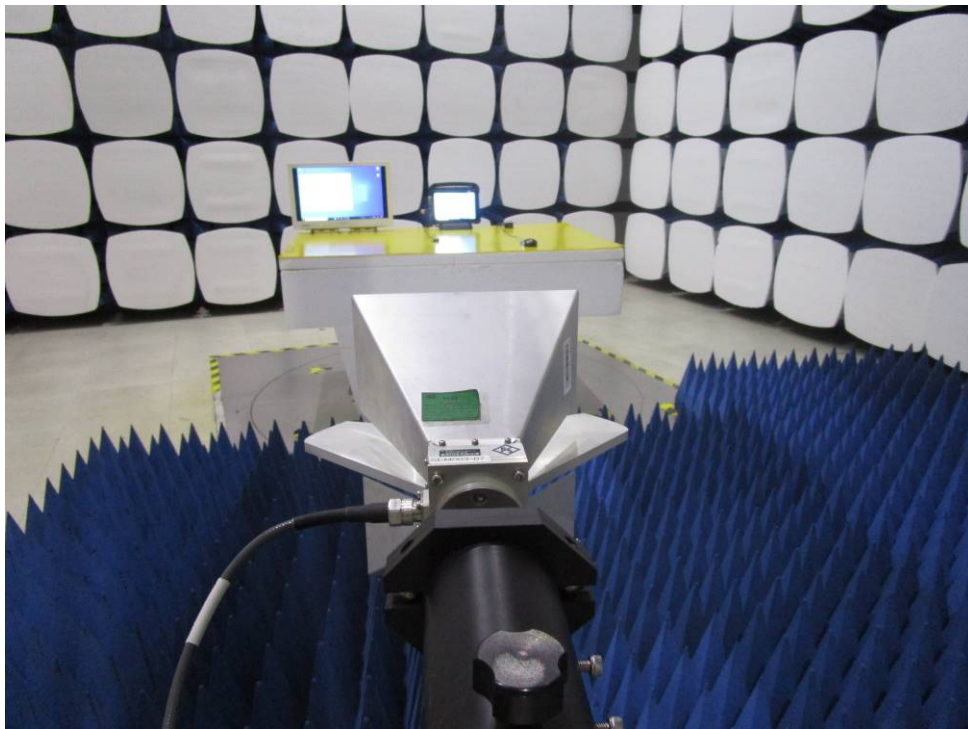



7.4 EUT Constructional Details (EUT Photos)

Please Refer to external and internal photos for details.

- End of the Report -