



Test Mode: 15; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

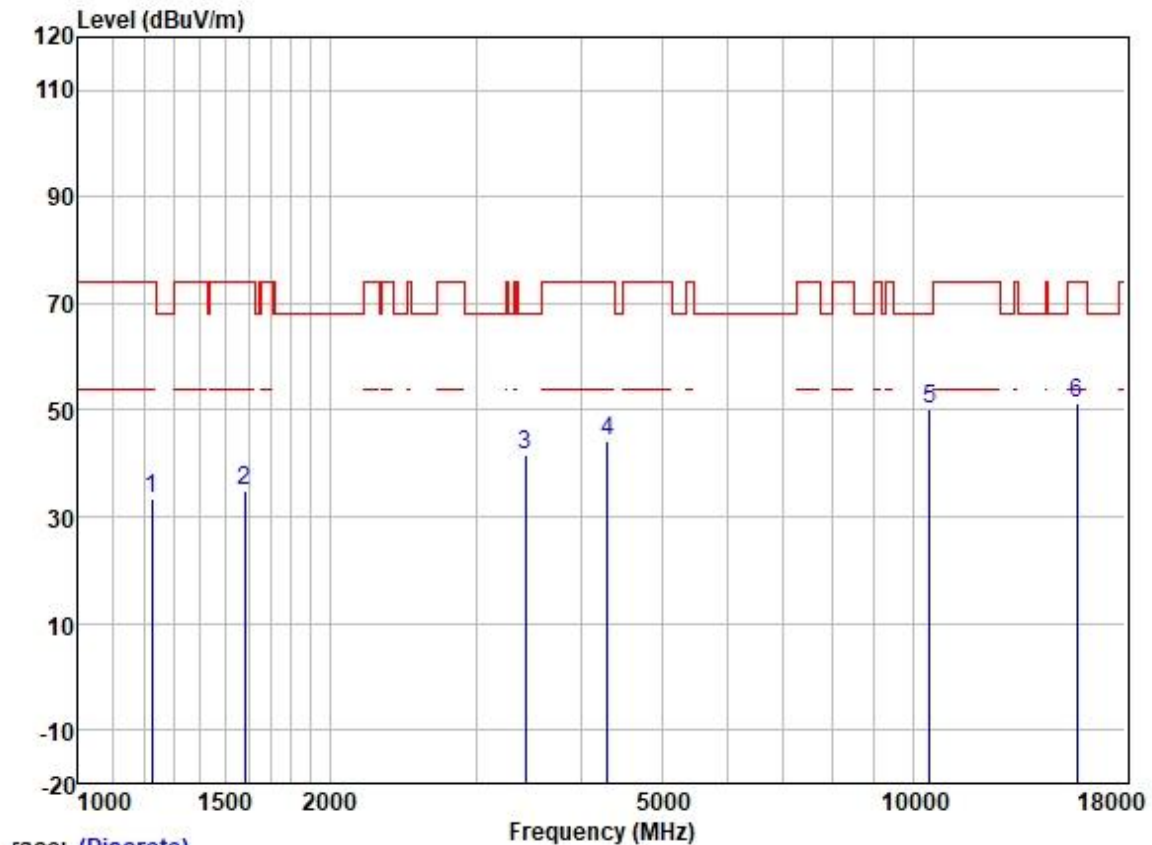

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1224.247	44.73	24.85	2.31	38.37	33.52	74.00	-40.48	VERTICAL	Peak
2	1583.392	44.65	25.56	2.80	38.00	35.01	74.00	-38.99	VERTICAL	Peak
3	3435.590	45.52	28.87	4.16	36.97	41.58	68.20	-26.62	VERTICAL	Peak
4	4304.400	45.81	30.48	4.65	36.81	44.13	74.00	-29.87	VERTICAL	Peak
5	10480.000	40.55	39.46	7.40	37.36	50.05	68.20	-18.15	VERTICAL	Peak
6	15720.000	38.02	38.78	9.87	35.39	51.28	74.00	-22.72	VERTICAL	Peak

Test Mode: 15; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

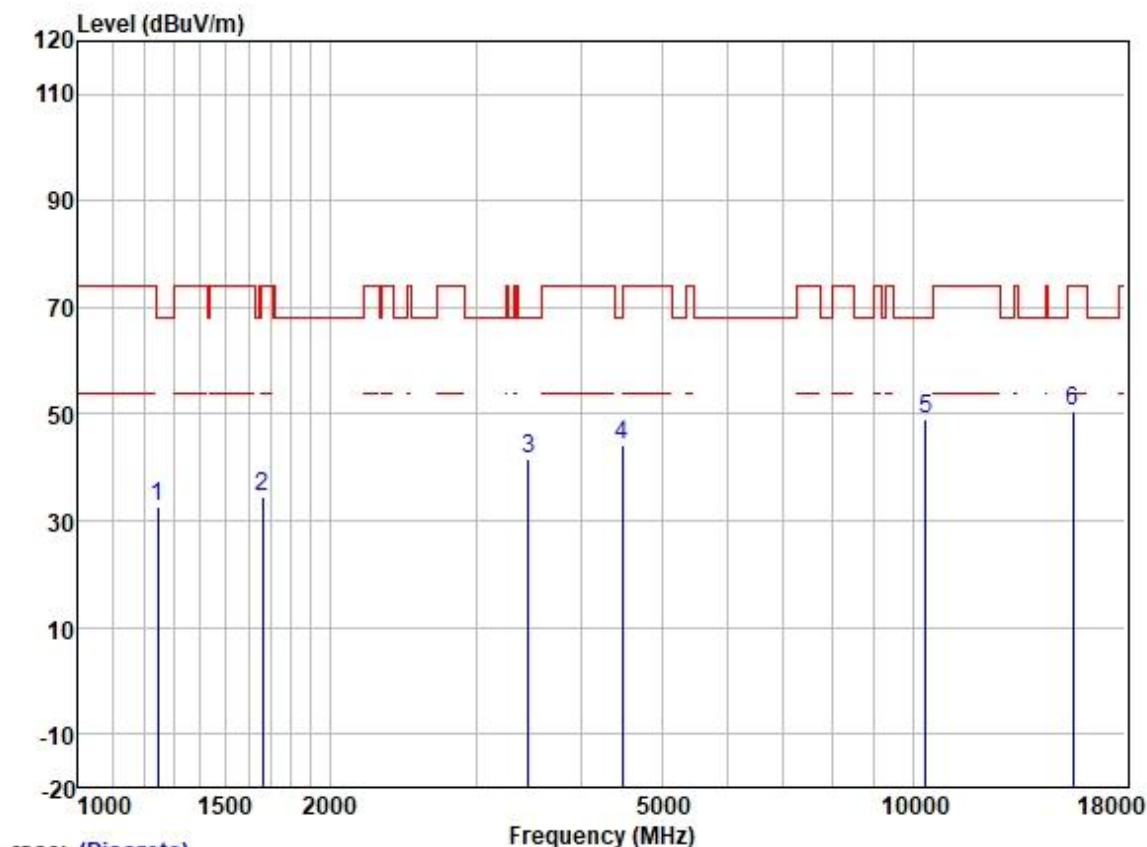

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1245.663	43.70	25.00	2.33	38.35	32.68	68.20	-35.52	HORIZONTAL	Peak
2	1663.137	44.06	25.65	2.80	37.91	34.60	74.00	-39.40	HORIZONTAL	Peak
3	3465.510	45.39	28.88	4.22	36.95	41.54	68.20	-26.66	HORIZONTAL	Peak
4	4482.150	45.12	30.78	4.99	36.81	44.08	68.20	-24.12	HORIZONTAL	Peak
5	10360.000	40.02	39.28	7.29	37.37	49.22	68.20	-18.98	HORIZONTAL	Peak
6	15540.000	37.18	39.05	9.88	35.39	50.72	74.00	-23.28	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 15; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

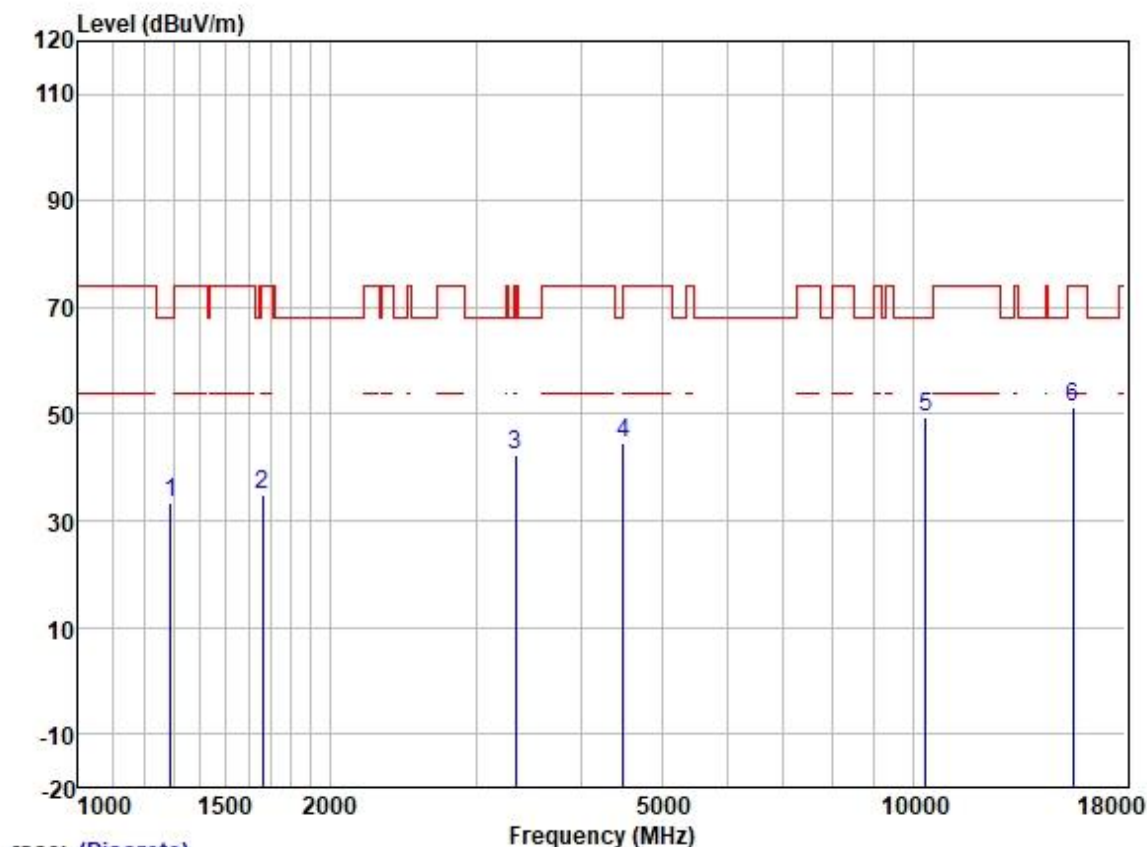

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	44.02	25.17	2.55	38.31	33.43	68.20	-34.77	VERTICAL	Peak
2	1663.137	44.21	25.65	2.80	37.91	34.75	74.00	-39.25	VERTICAL	Peak
3	3337.710	46.61	28.79	4.08	37.01	42.47	74.00	-31.53	VERTICAL	Peak
4	4495.125	45.69	30.80	5.05	36.82	44.72	68.20	-23.48	VERTICAL	Peak
5	10360.000	40.17	39.28	7.29	37.37	49.37	68.20	-18.83	VERTICAL	Peak
6	15540.000	37.70	39.05	9.88	35.39	51.24	74.00	-22.76	VERTICAL	Peak


Test Mode: 15; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

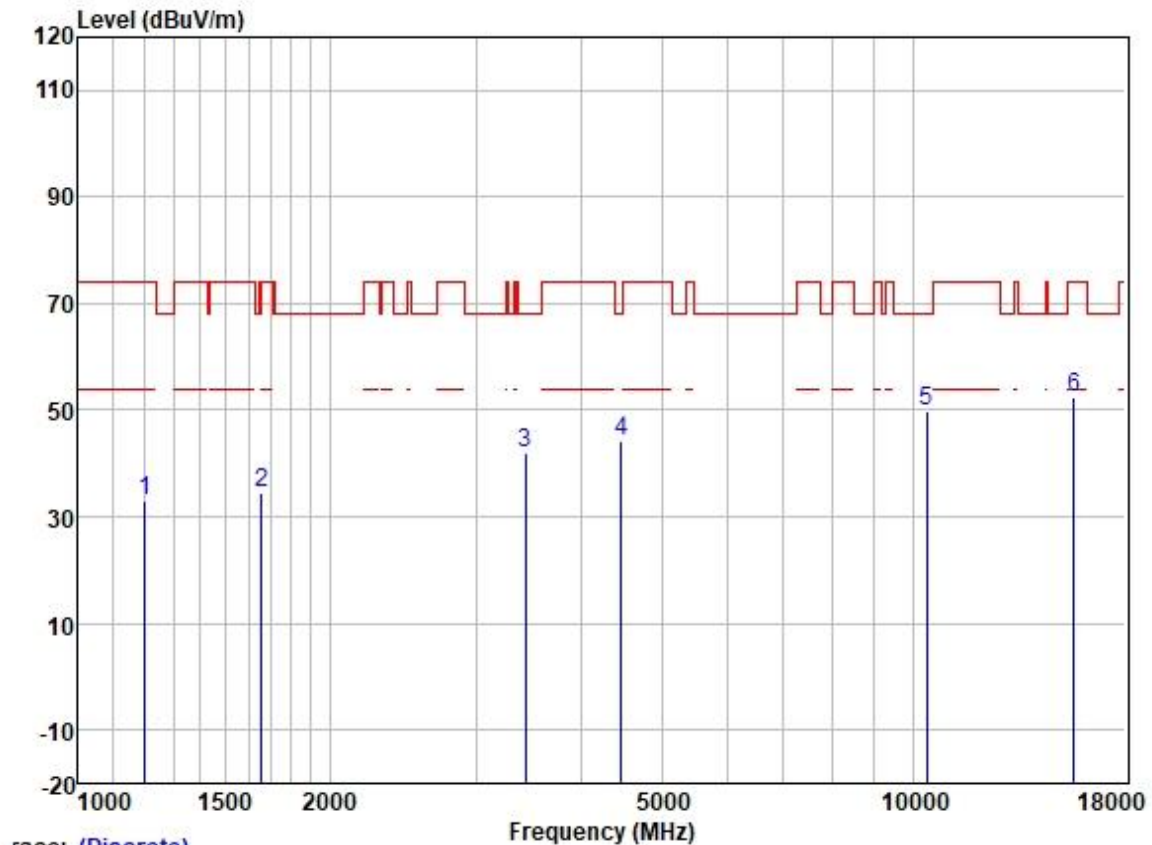

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1203.199	44.44	24.70	2.34	38.39	33.09	74.00	-40.91	HORIZONTAL	Peak
2	1658.337	44.16	25.65	2.80	37.93	34.68	68.20	-33.52	HORIZONTAL	Peak
3	3435.590	45.88	28.87	4.16	36.97	41.94	68.20	-26.26	HORIZONTAL	Peak
4	4469.214	45.43	30.77	4.93	36.81	44.32	68.20	-23.88	HORIZONTAL	Peak
5	10400.000	40.66	39.33	7.32	37.36	49.95	68.20	-18.25	HORIZONTAL	Peak
6	15600.000	38.83	38.99	9.88	35.39	52.31	74.00	-21.69	HORIZONTAL	Peak



Test Mode: 15; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

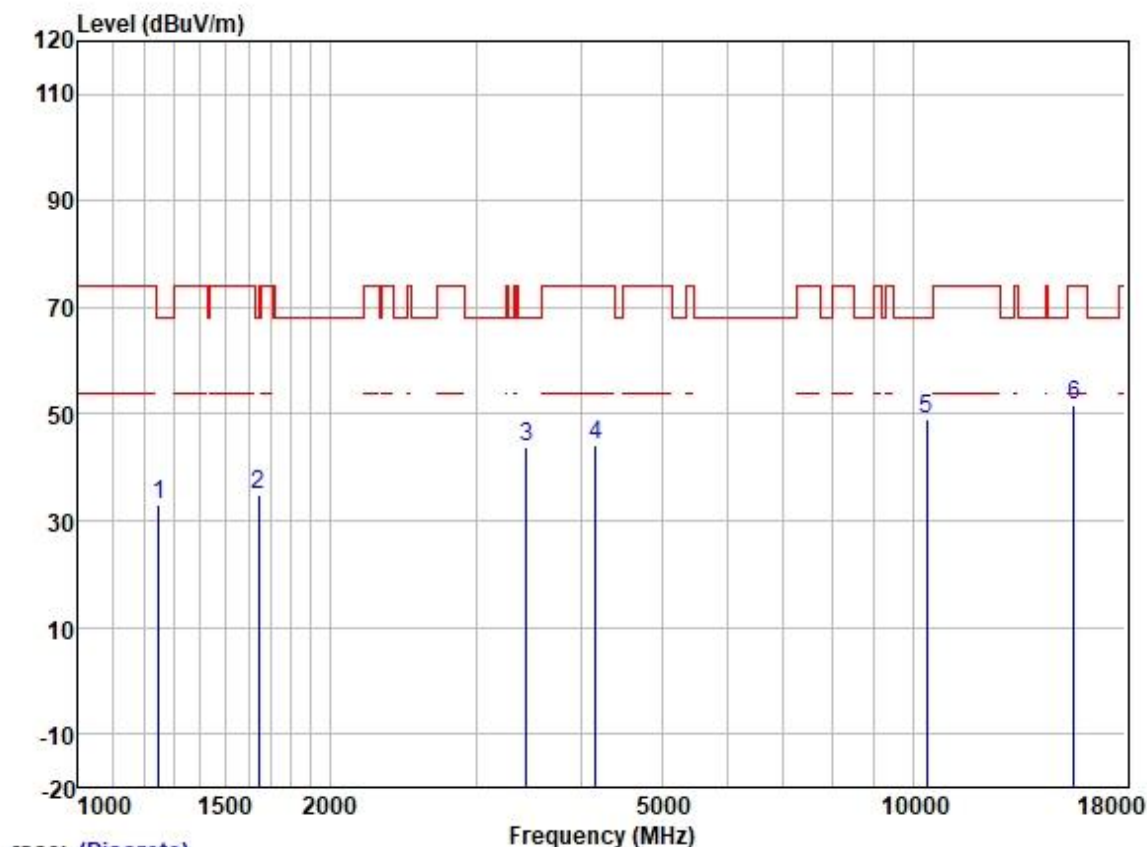

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1249.269	43.87	25.02	2.34	38.35	32.88	68.20	-35.32	VERTICAL	Peak
2	1644.019	44.50	25.63	2.80	37.93	35.00	68.20	-33.20	VERTICAL	Peak
3	3445.535	47.59	28.87	4.18	36.96	43.68	68.20	-24.52	VERTICAL	Peak
4	4169.698	46.37	30.09	4.60	36.80	44.26	74.00	-29.74	VERTICAL	Peak
5	10400.000	39.94	39.33	7.32	37.36	49.23	68.20	-18.97	VERTICAL	Peak
6	15600.000	38.15	38.99	9.88	35.39	51.63	74.00	-22.37	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 15; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

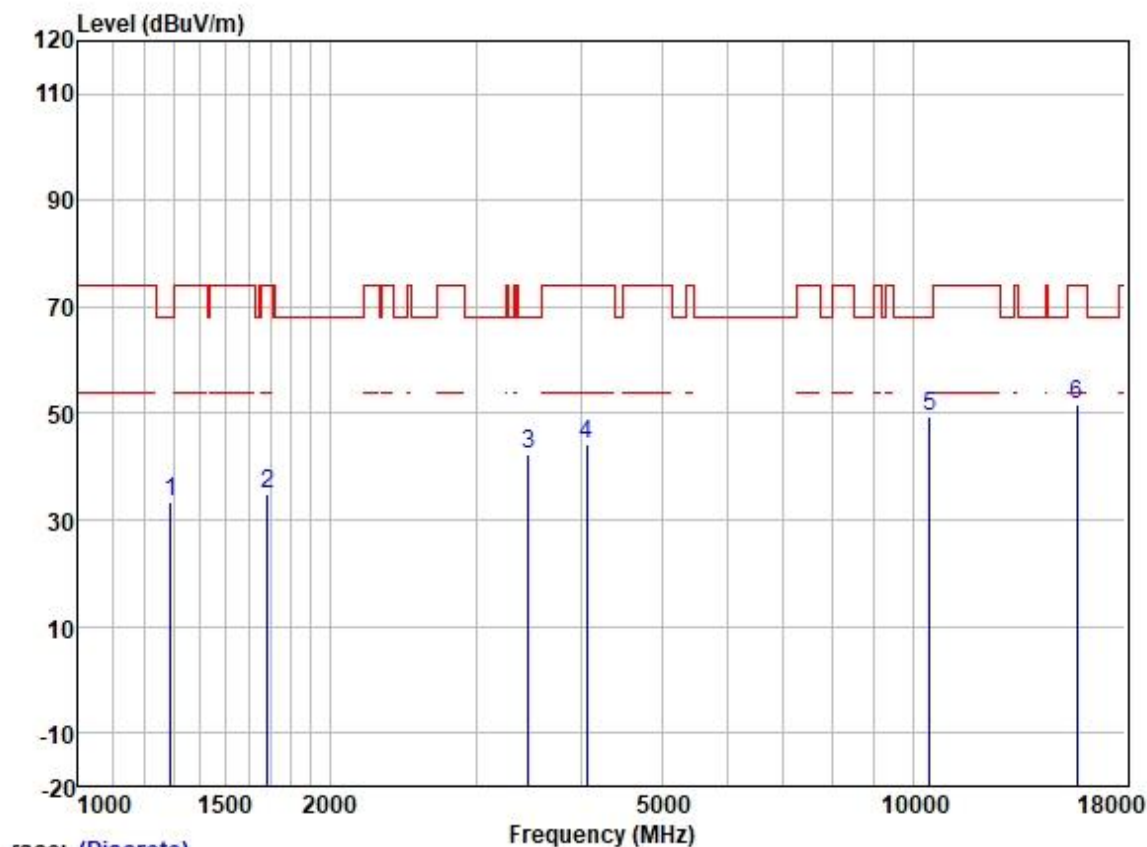


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	dB		
		dBuV	dB/m	dB	dB					
1	1289.627	43.79	25.17	2.55	38.31	33.20	68.20	-35.00	HORIZONTAL	Peak
2	1687.347	44.35	25.69	2.80	37.91	34.93	74.00	-39.07	HORIZONTAL	Peak
3	3465.510	46.10	28.88	4.22	36.95	42.25	68.20	-25.95	HORIZONTAL	Peak
4	4062.629	46.52	29.88	4.60	36.80	44.20	74.00	-29.80	HORIZONTAL	Peak
5	10480.000	39.89	39.46	7.40	37.36	49.39	68.20	-18.81	HORIZONTAL	Peak
6	15720.000	38.53	38.78	9.87	35.39	51.79	74.00	-22.21	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 15; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

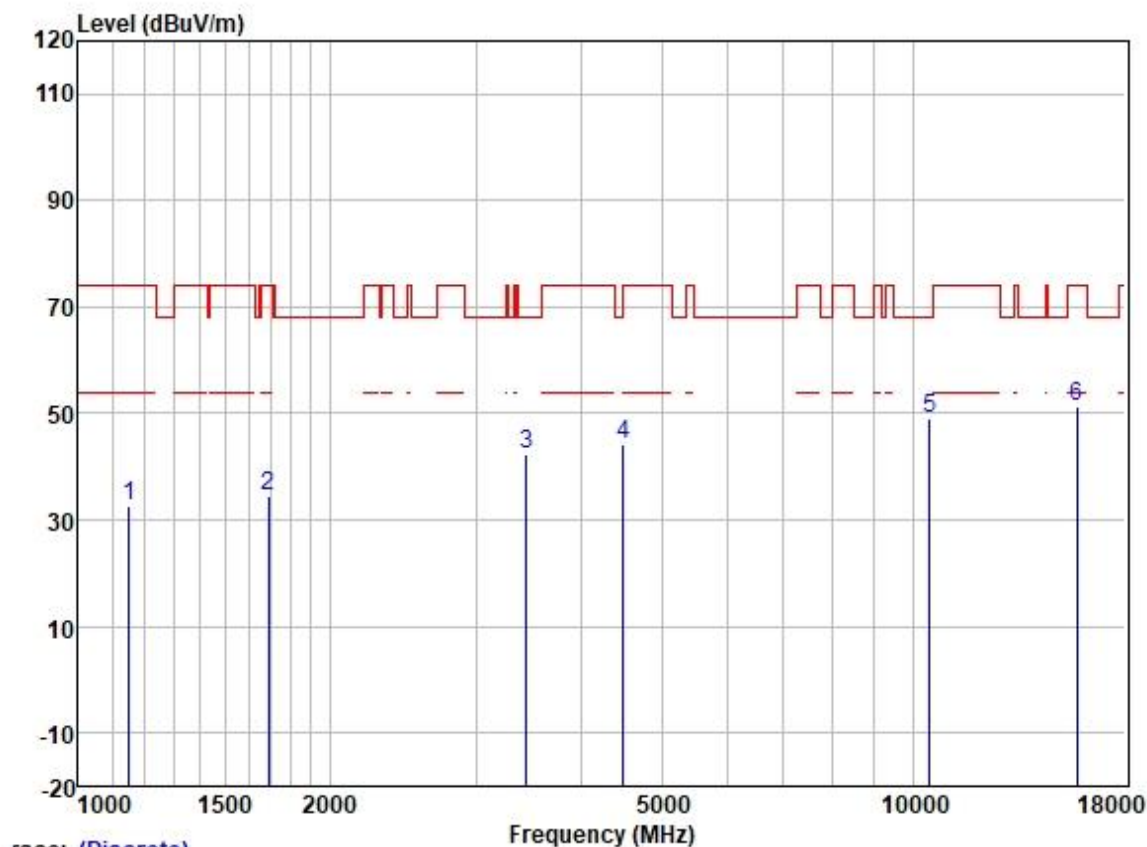

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1152.148	44.37	24.50	2.36	38.42	32.81	74.00	-41.19	VERTICAL	Peak
2	1692.231	43.79	25.70	2.80	37.89	34.40	74.00	-39.60	VERTICAL	Peak
3	3445.535	46.43	28.87	4.18	36.96	42.52	68.20	-25.68	VERTICAL	Peak
4	4495.125	45.29	30.80	5.05	36.82	44.32	68.20	-23.88	VERTICAL	Peak
5	10480.000	39.73	39.46	7.40	37.36	49.23	68.20	-18.97	VERTICAL	Peak
6	15720.000	38.09	38.78	9.87	35.39	51.35	74.00	-22.65	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 15; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

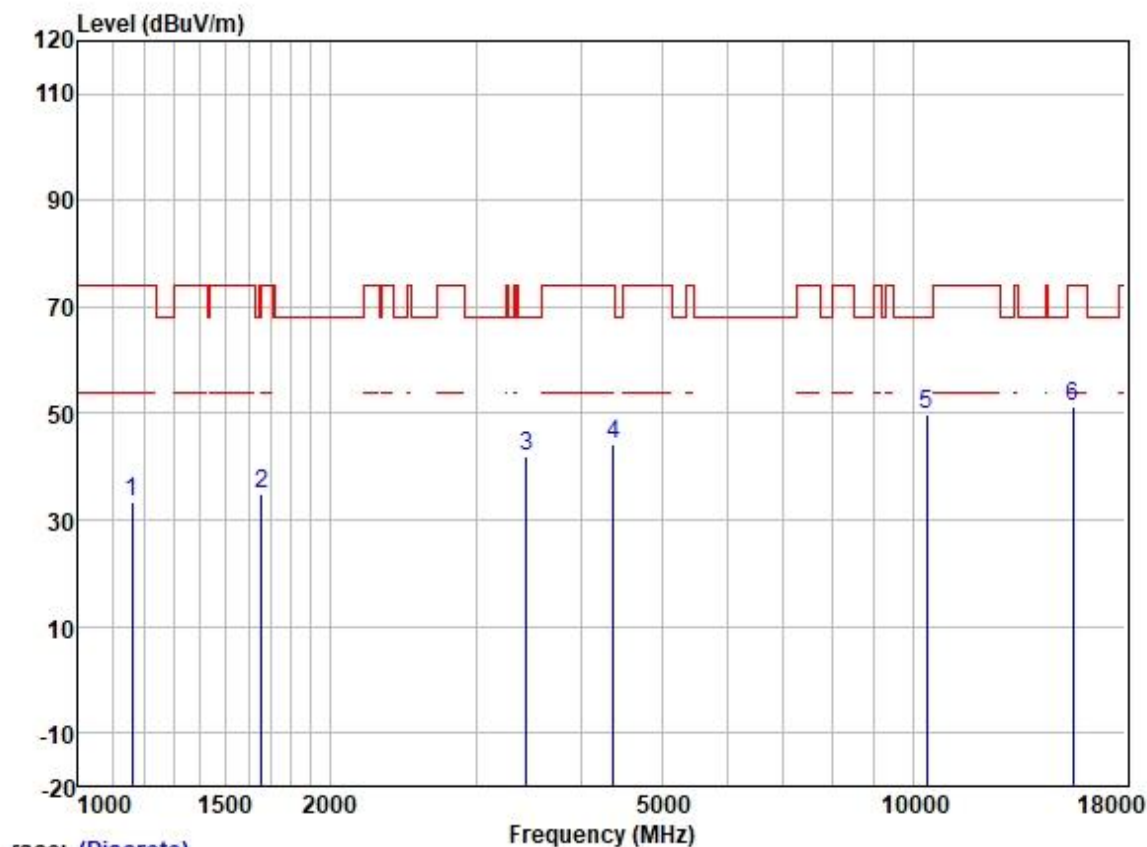

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1158.828	44.93	24.52	2.40	38.42	33.43	74.00	-40.57	HORIZONTAL	Peak
2	1658.337	44.39	25.65	2.80	37.93	34.91	68.20	-33.29	HORIZONTAL	Peak
3	3445.535	45.74	28.87	4.18	36.96	41.83	68.20	-26.37	HORIZONTAL	Peak
4	4379.699	45.56	30.64	4.69	36.81	44.08	74.00	-29.92	HORIZONTAL	Peak
5	10380.000	40.63	39.33	7.32	37.37	49.91	68.20	-18.29	HORIZONTAL	Peak
6	15570.000	37.78	38.99	9.88	35.39	51.26	74.00	-22.74	HORIZONTAL	Peak




Test Mode: 15; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

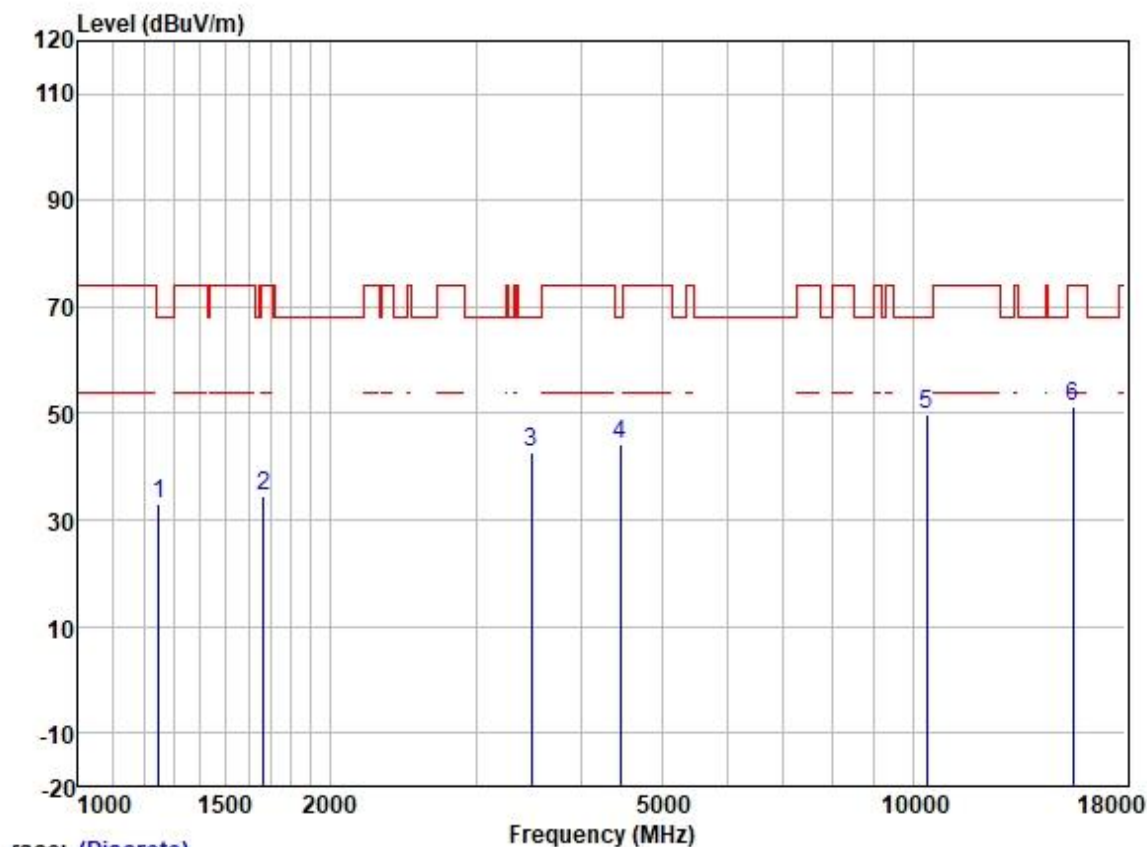

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1249.269	44.02	25.02	2.34	38.35	33.03	68.20	-35.17	VERTICAL	Peak
2	1667.951	44.07	25.66	2.80	37.91	34.62	74.00	-39.38	VERTICAL	Peak
3	3495.691	46.40	28.90	4.30	36.94	42.66	68.20	-25.54	VERTICAL	Peak
4	4456.315	45.56	30.75	4.88	36.81	44.38	68.20	-23.82	VERTICAL	Peak
5	10380.000	40.47	39.33	7.32	37.37	49.75	68.20	-18.45	VERTICAL	Peak
6	15570.000	37.96	38.99	9.88	35.39	51.44	74.00	-22.56	VERTICAL	Peak




Test Mode: 15; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

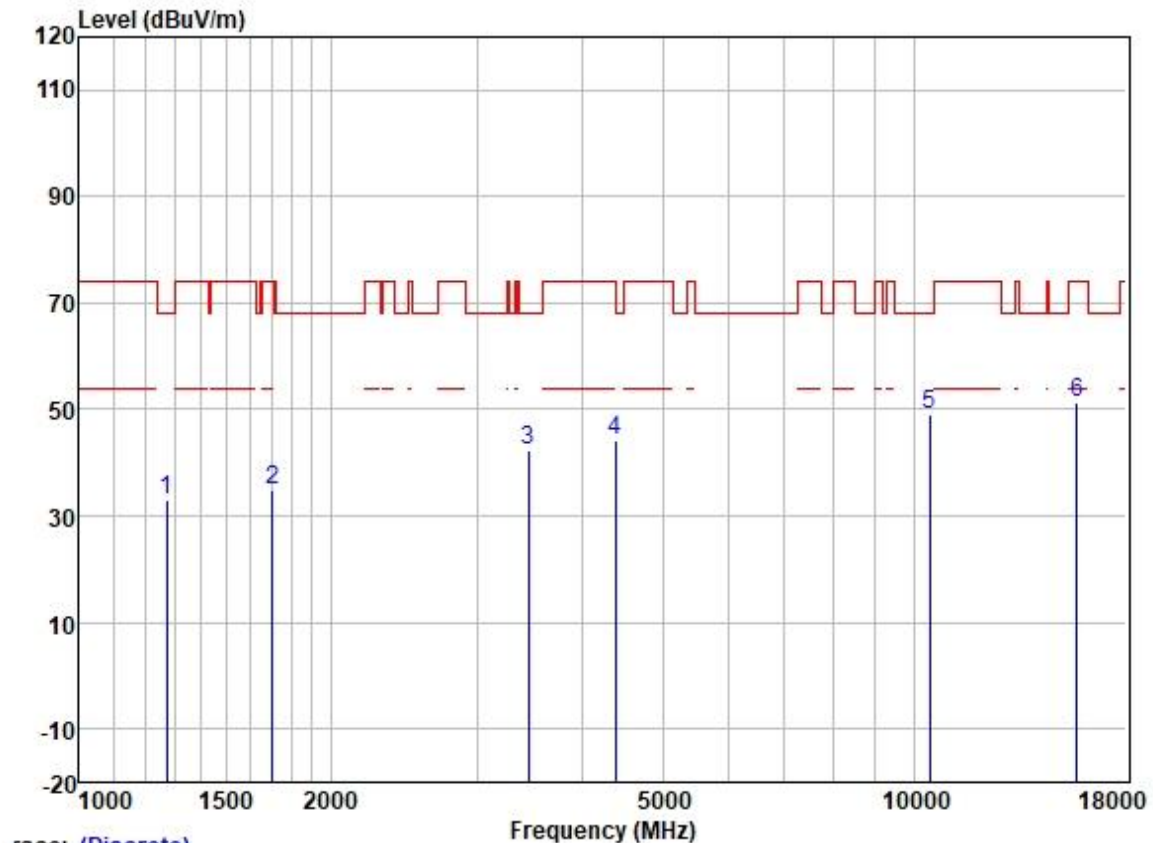

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
		dBuV	dB/m	dB	dB			dB		
1	1271.123	43.79	25.11	2.46	38.33	33.03	68.20	-35.17	HORIZONTAL	Peak
2	1702.042	44.13	25.72	2.80	37.89	34.76	74.00	-39.24	HORIZONTAL	Peak
3	3455.508	46.19	28.88	4.20	36.96	42.31	68.20	-25.89	HORIZONTAL	Peak
4	4392.376	45.84	30.66	4.70	36.81	44.39	74.00	-29.61	HORIZONTAL	Peak
5	10460.000	39.79	39.42	7.37	37.36	49.22	68.20	-18.98	HORIZONTAL	Peak
6	15690.000	38.14	38.86	9.87	35.39	51.48	74.00	-22.52	HORIZONTAL	Peak




Test Mode: 15; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

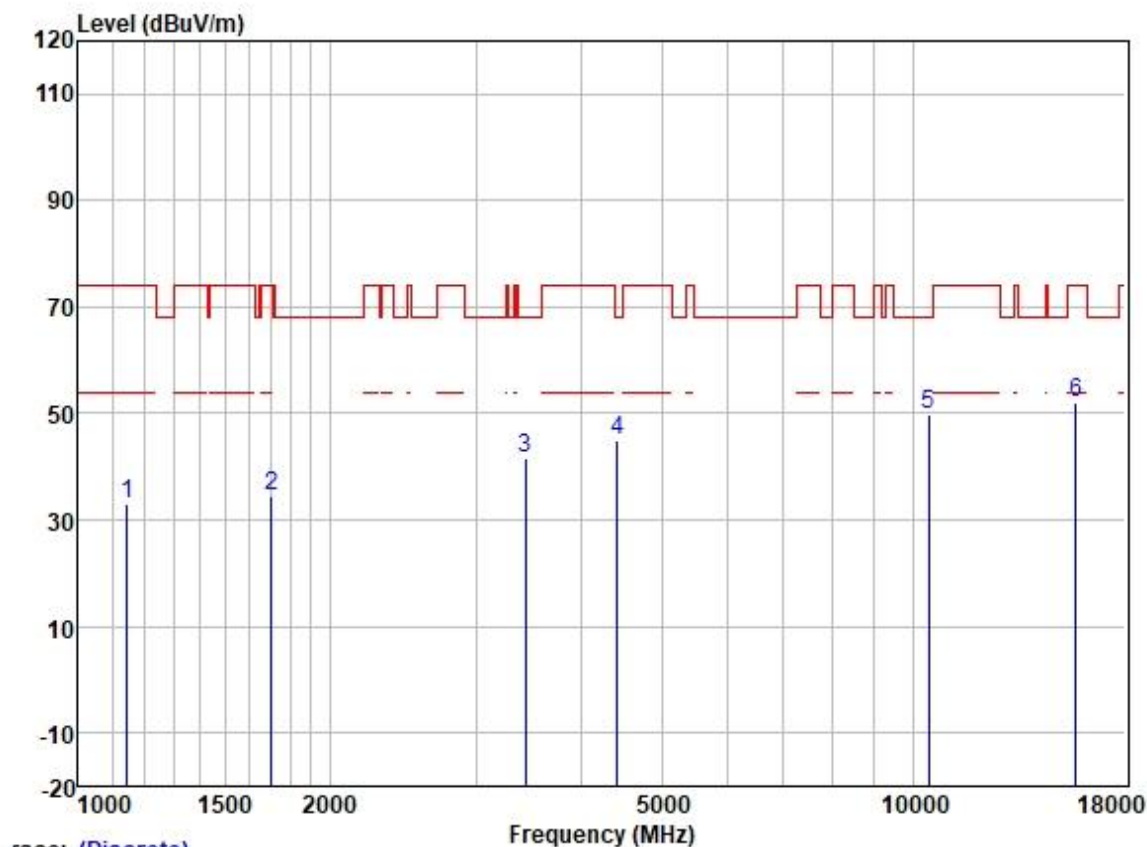

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1145.507	44.60	24.48	2.32	38.42	32.98	74.00	-41.02	VERTICAL	Peak
2	1702.042	44.06	25.72	2.80	37.89	34.69	74.00	-39.31	VERTICAL	Peak
3	3435.590	45.70	28.87	4.16	36.97	41.76	68.20	-26.44	VERTICAL	Peak
4	4430.628	46.24	30.72	4.78	36.81	44.93	68.20	-23.27	VERTICAL	Peak
5	10460.000	40.45	39.42	7.37	37.36	49.88	68.20	-18.32	VERTICAL	Peak
6	15690.000	38.86	38.86	9.87	35.39	52.20	74.00	-21.80	VERTICAL	Peak



Test Mode: 15; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

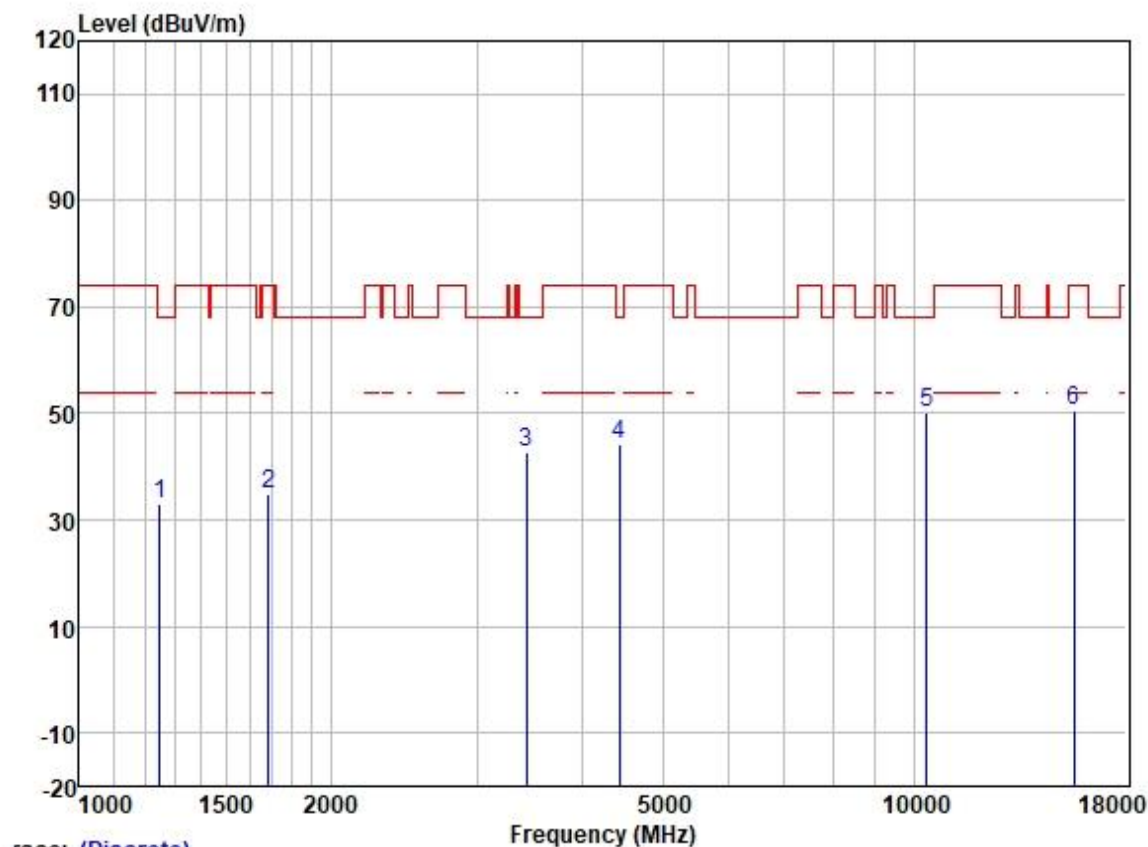


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1249.269	43.84	25.02	2.34	38.35	32.85	68.20	-35.35	HORIZONTAL	Peak
2	1687.347	44.44	25.69	2.80	37.91	35.02	74.00	-38.98	HORIZONTAL	Peak
3	3435.590	46.52	28.87	4.16	36.97	42.58	68.20	-25.62	HORIZONTAL	Peak
4	4443.453	45.43	30.73	4.83	36.81	44.18	68.20	-24.02	HORIZONTAL	Peak
5	10360.000	41.11	39.28	7.29	37.37	50.31	68.20	-17.89	HORIZONTAL	Peak
6	15540.000	37.13	39.05	9.88	35.39	50.67	74.00	-23.33	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 15; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

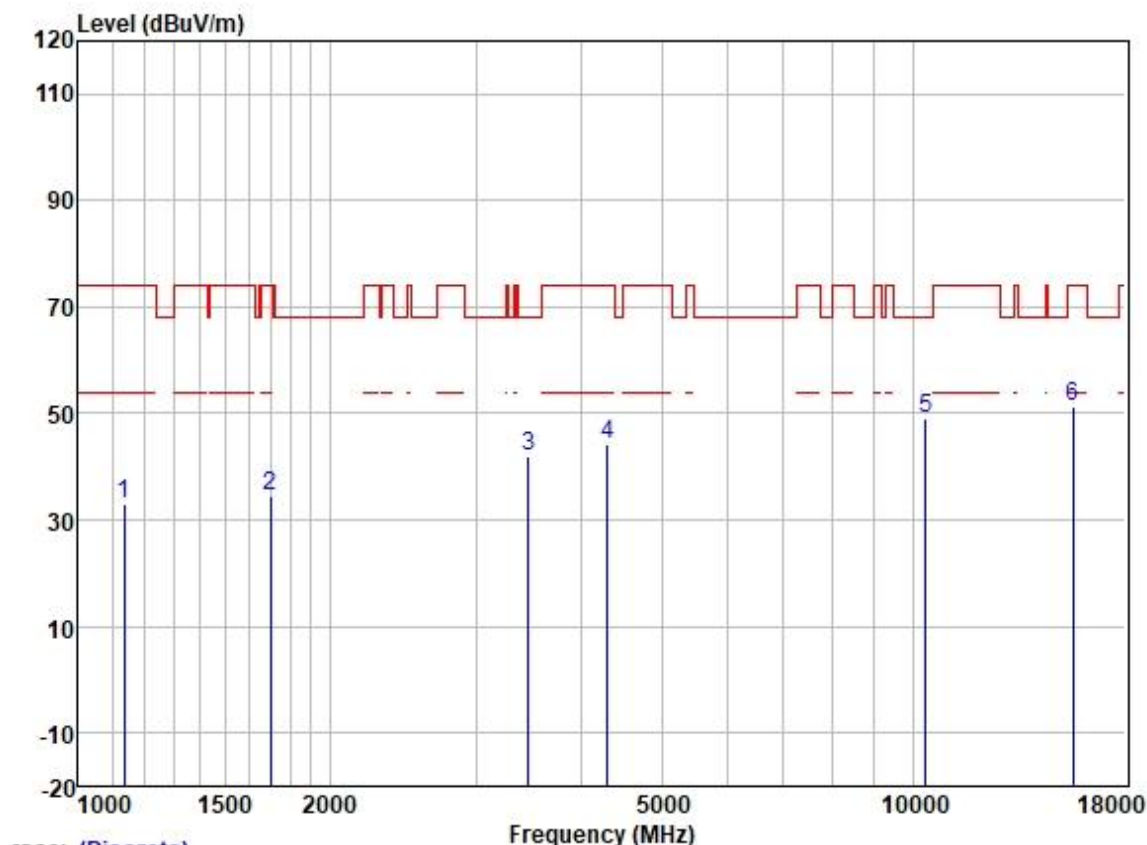

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1135.617	44.59	24.45	2.25	38.43	32.86	74.00	-41.14	VERTICAL	Peak
2	1697.129	44.02	25.71	2.80	37.89	34.64	74.00	-39.36	VERTICAL	Peak
3	3465.510	45.65	28.88	4.22	36.95	41.80	68.20	-26.40	VERTICAL	Peak
4	4304.400	45.95	30.48	4.65	36.81	44.27	74.00	-29.73	VERTICAL	Peak
5	10360.000	40.03	39.28	7.29	37.37	49.23	68.20	-18.97	VERTICAL	Peak
6	15540.000	37.77	39.05	9.88	35.39	51.31	74.00	-22.69	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 15; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

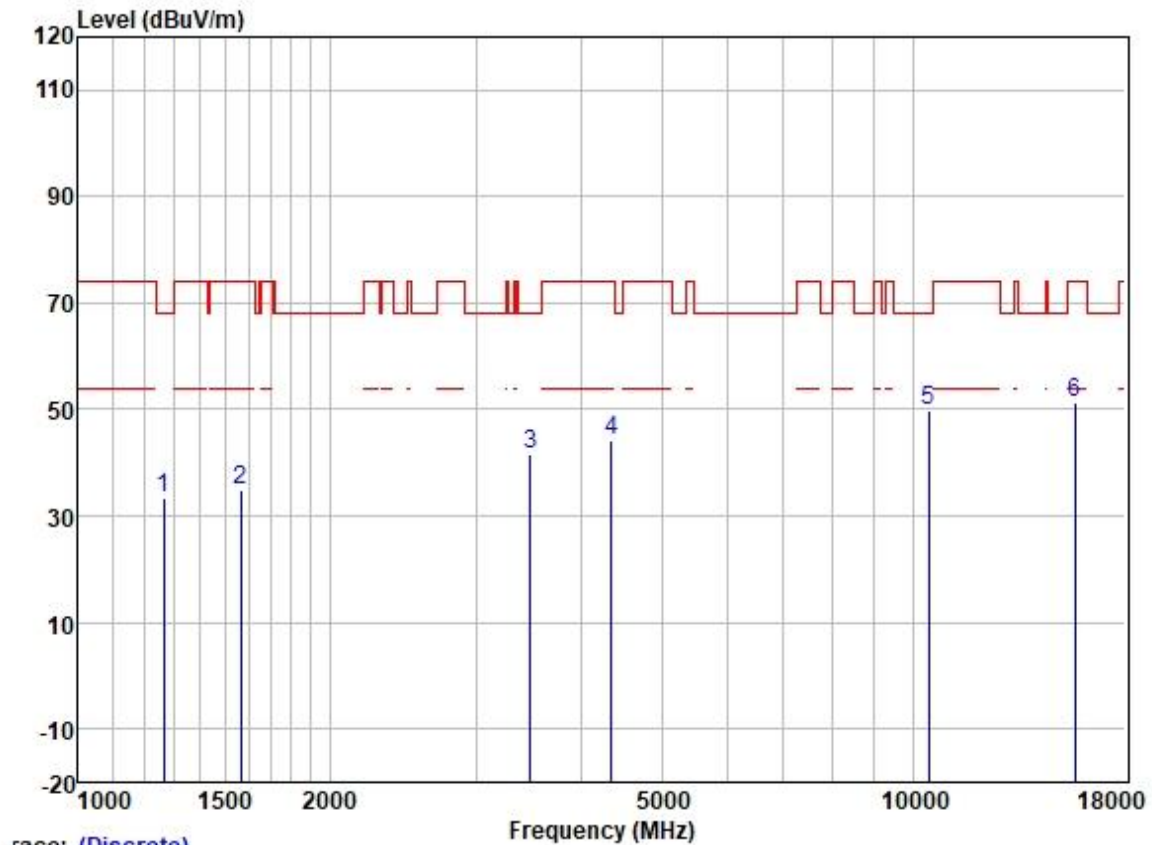

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1267.454	44.13	25.10	2.44	38.33	33.34	68.20	-34.86	HORIZONTAL	Peak
2	1565.191	44.56	25.55	2.80	38.00	34.91	74.00	-39.09	HORIZONTAL	Peak
3	3485.601	45.56	28.89	4.27	36.95	41.77	68.20	-26.43	HORIZONTAL	Peak
4	4354.454	45.77	30.59	4.68	36.81	44.23	74.00	-29.77	HORIZONTAL	Peak
5	10440.000	40.22	39.42	7.37	37.36	49.65	68.20	-18.55	HORIZONTAL	Peak
6	15660.000	37.86	38.86	9.87	35.39	51.20	74.00	-22.80	HORIZONTAL	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch Technical Services Co., Ltd. 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Test Mode: 15; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

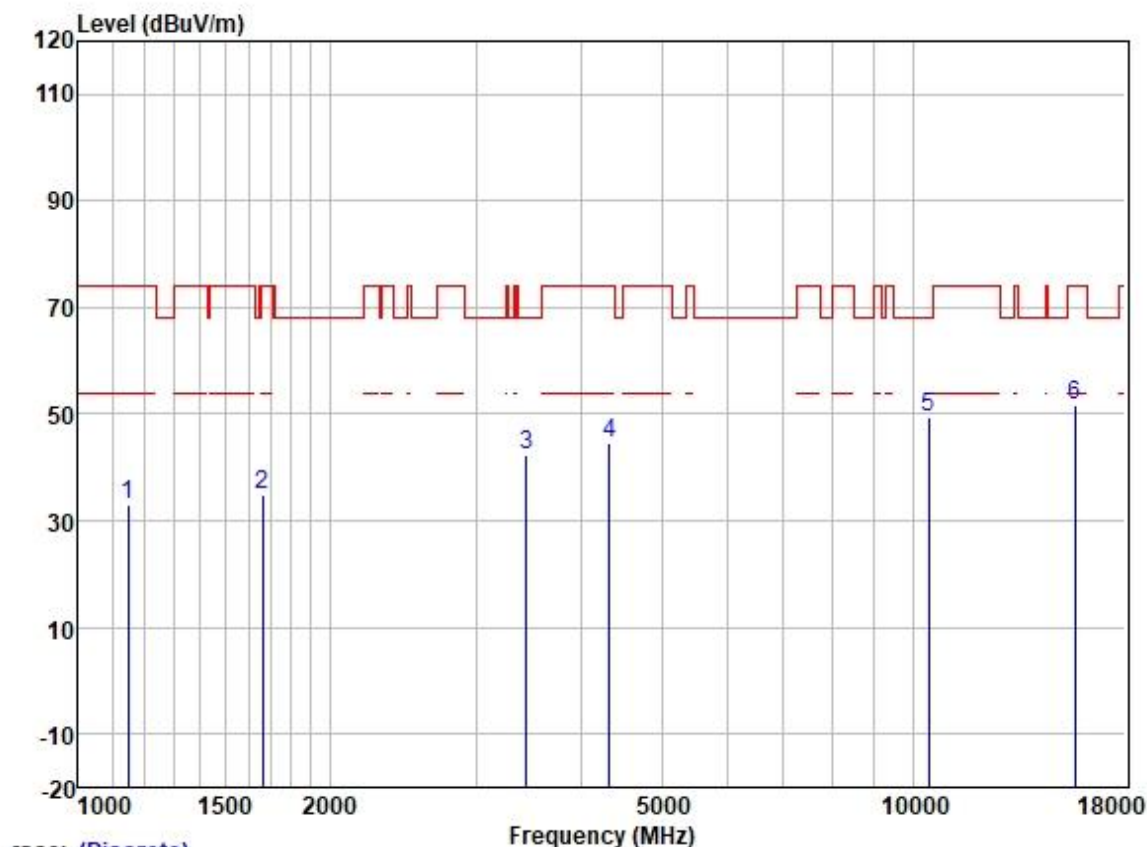

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1148.823	44.59	24.49	2.34	38.42	33.00	74.00	-41.00	VERTICAL	Peak
2	1663.137	44.38	25.65	2.80	37.91	34.92	74.00	-39.08	VERTICAL	Peak
3	3445.535	46.31	28.87	4.18	36.96	42.40	68.20	-25.80	VERTICAL	Peak
4	4329.354	46.16	30.54	4.67	36.81	44.56	74.00	-29.44	VERTICAL	Peak
5	10440.000	39.95	39.42	7.37	37.36	49.38	68.20	-18.82	VERTICAL	Peak
6	15660.000	38.37	38.86	9.87	35.39	51.71	74.00	-22.29	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 15; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

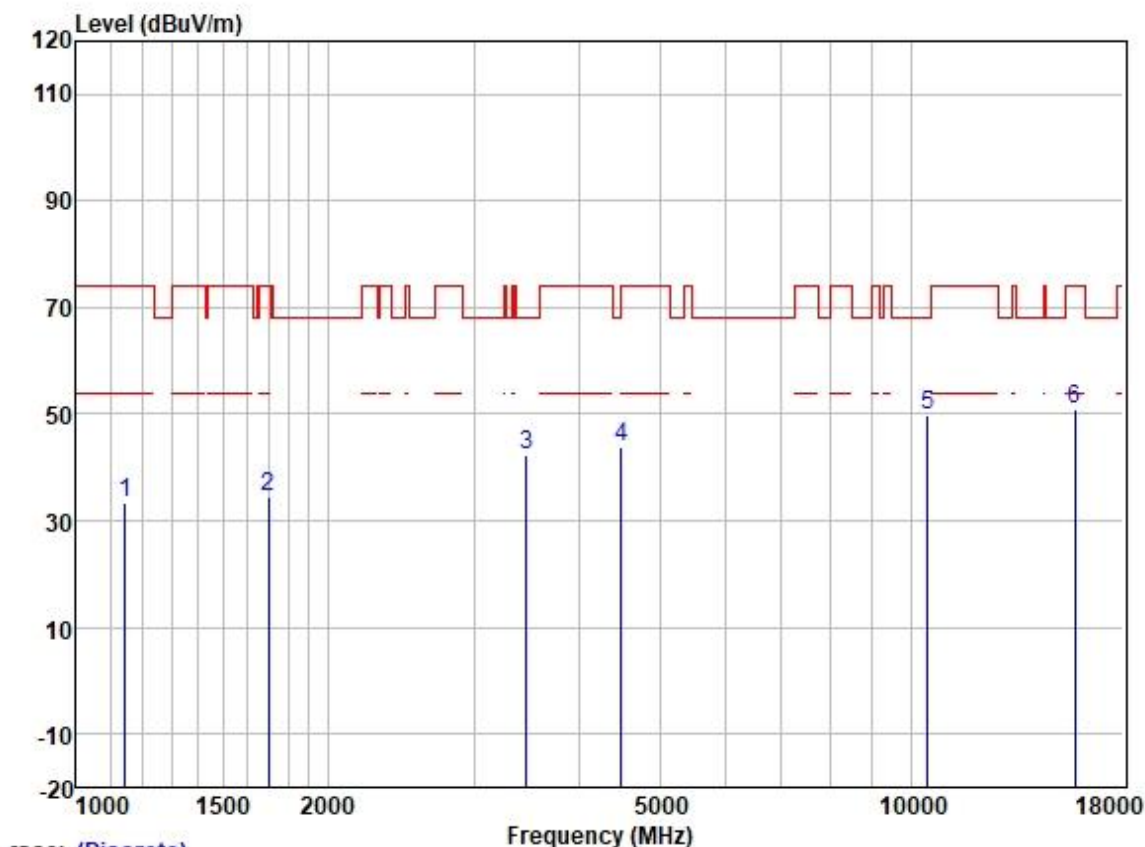

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1145.507	45.06	24.48	2.32	38.42	33.44	74.00	-40.56	HORIZONTAL Peak
2	1697.129	44.02	25.71	2.80	37.89	34.64	74.00	-39.36	HORIZONTAL Peak
3	3465.510	46.02	28.88	4.22	36.95	42.17	68.20	-26.03	HORIZONTAL Peak
4	4495.125	44.99	30.80	5.05	36.82	44.02	68.20	-24.18	HORIZONTAL Peak
5	10480.000	40.38	39.46	7.40	37.36	49.88	68.20	-18.32	HORIZONTAL Peak
6	15720.000	37.70	38.78	9.87	35.39	50.96	74.00	-23.04	HORIZONTAL Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 15; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

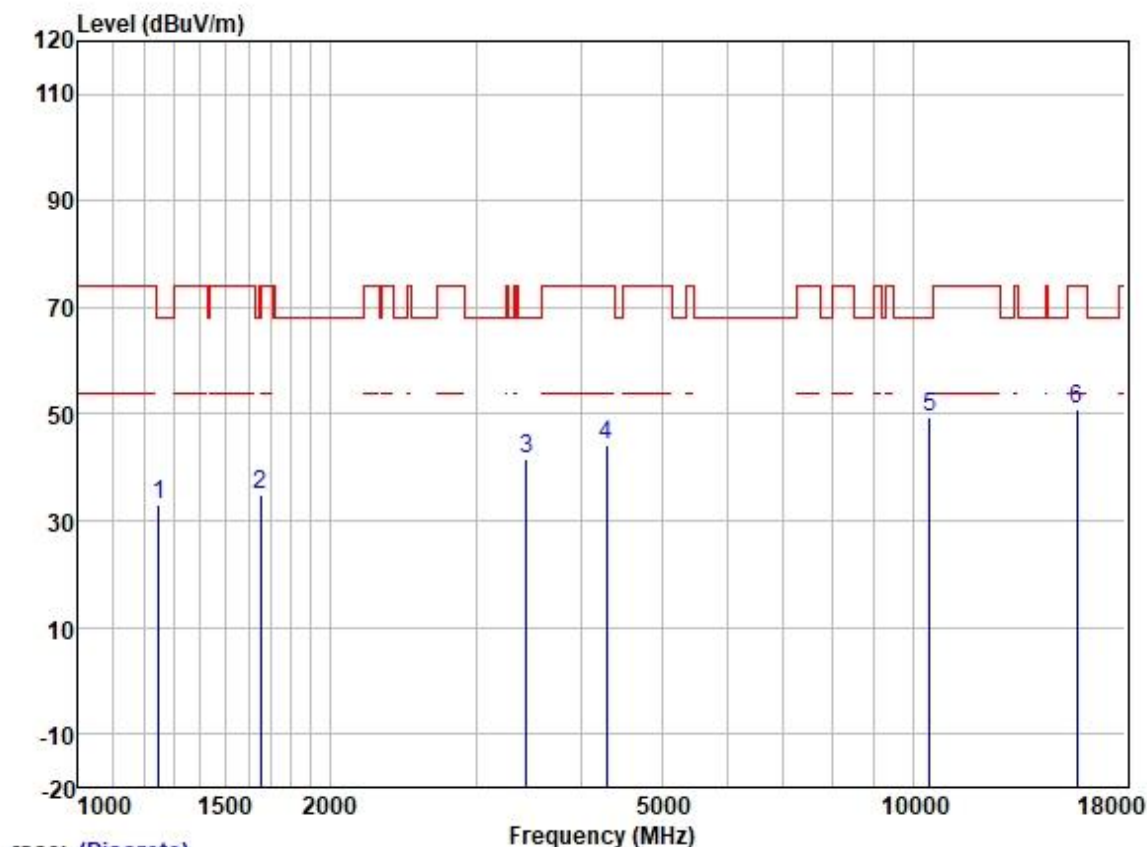

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1249.269	43.99	25.02	2.34	38.35	33.00	68.20	-35.20	VERTICAL	Peak
2	1653.550	44.33	25.64	2.80	37.93	34.84	68.20	-33.36	VERTICAL	Peak
3	3445.535	45.55	28.87	4.18	36.96	41.64	68.20	-26.56	VERTICAL	Peak
4	4291.977	45.94	30.45	4.64	36.81	44.22	74.00	-29.78	VERTICAL	Peak
5	10480.000	40.03	39.46	7.40	37.36	49.53	68.20	-18.67	VERTICAL	Peak
6	15720.000	37.62	38.78	9.87	35.39	50.88	74.00	-23.12	VERTICAL	Peak

Test Mode: 15; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

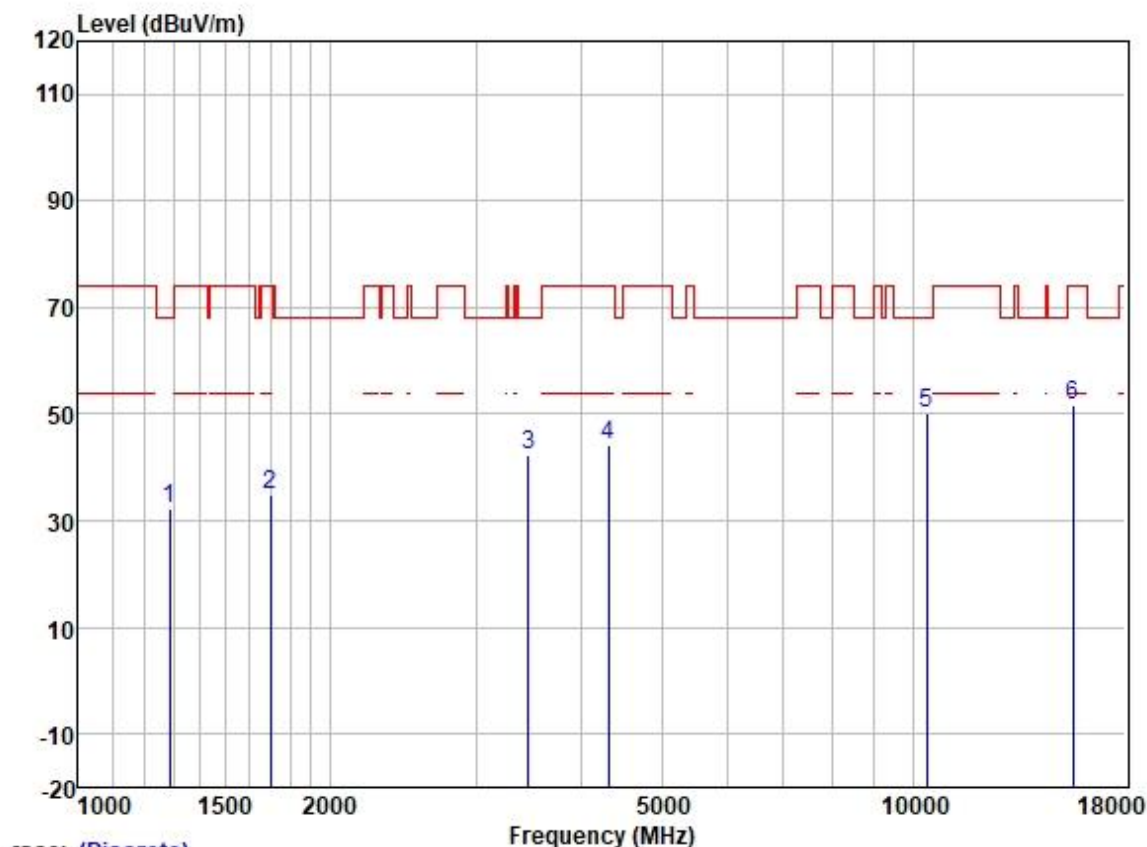

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1285.904	43.00	25.16	2.53	38.33	32.36	68.20	-35.84	HORIZONTAL	Peak
2	1697.129	44.32	25.71	2.80	37.89	34.94	74.00	-39.06	HORIZONTAL	Peak
3	3465.510	46.07	28.88	4.22	36.95	42.22	68.20	-25.98	HORIZONTAL	Peak
4	4316.859	45.85	30.51	4.66	36.81	44.21	74.00	-29.79	HORIZONTAL	Peak
5	10380.000	41.00	39.33	7.32	37.37	50.28	68.20	-17.92	HORIZONTAL	Peak
6	15570.000	38.05	38.99	9.88	35.39	51.53	74.00	-22.47	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 15; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

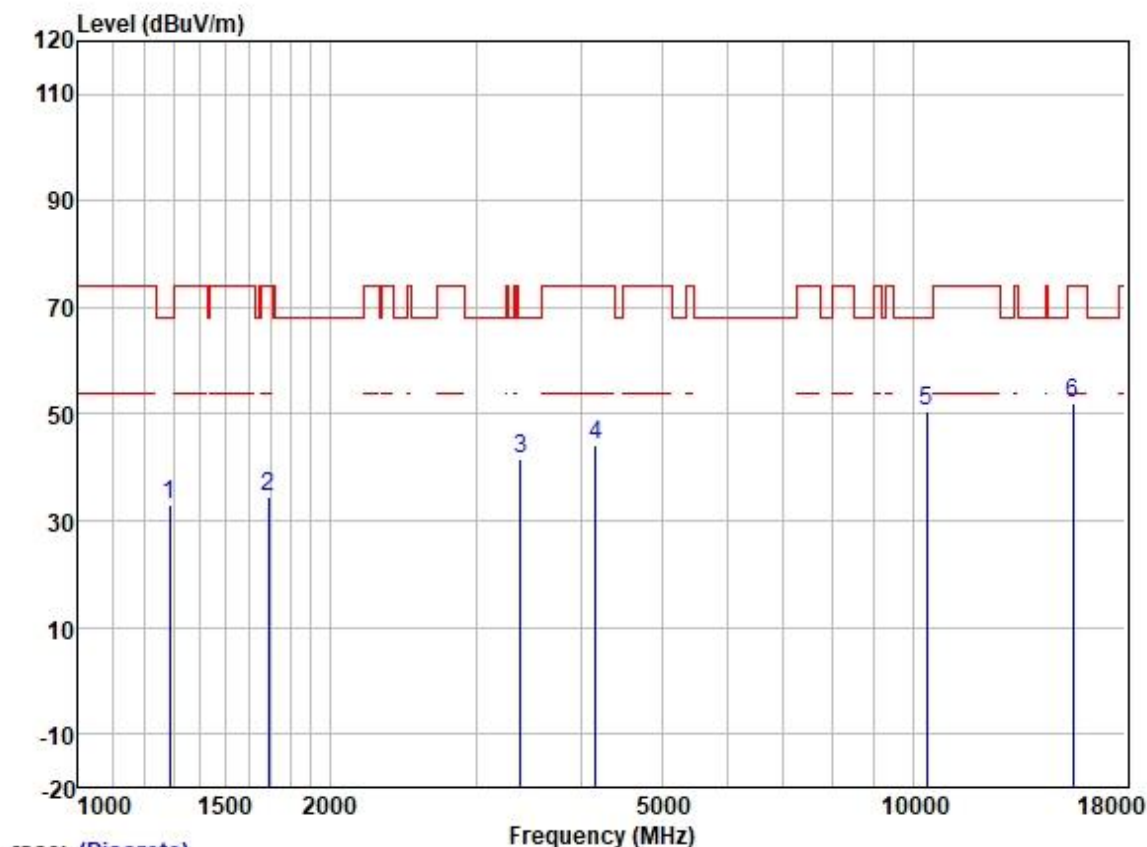


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1285.904	43.55	25.16	2.53	38.33	32.91	68.20	-35.29	VERTICAL	Peak
2	1692.231	43.88	25.70	2.80	37.89	34.49	74.00	-39.51	VERTICAL	Peak
3	3386.297	45.84	28.83	4.10	36.99	41.78	68.20	-26.42	VERTICAL	Peak
4	4169.698	46.30	30.09	4.60	36.80	44.19	74.00	-29.81	VERTICAL	Peak
5	10380.000	41.11	39.33	7.32	37.37	50.39	68.20	-17.81	VERTICAL	Peak
6	15570.000	38.55	38.99	9.88	35.39	52.03	74.00	-21.97	VERTICAL	Peak



Test Mode: 15; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

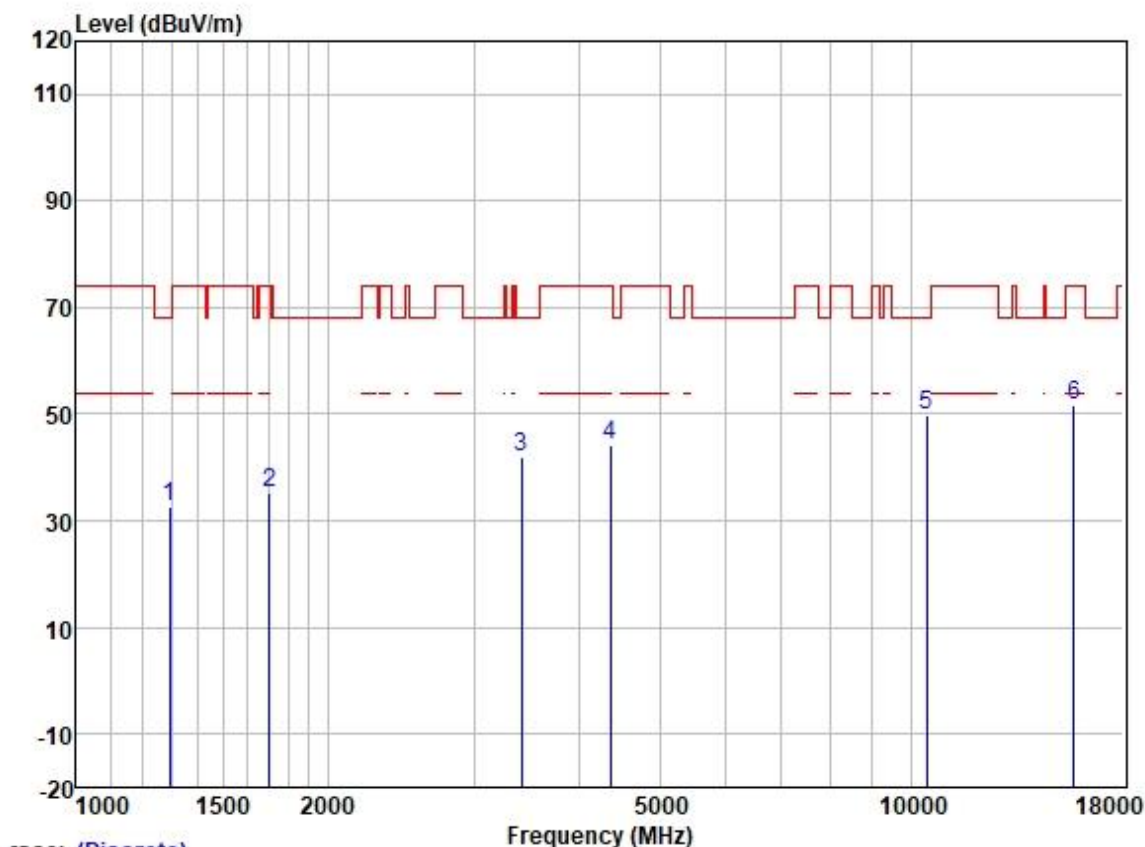

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1293.359	43.38	25.18	2.57	38.31	32.82	68.20	-35.38	HORIZONTAL	Peak
2	1702.042	44.57	25.72	2.80	37.89	35.20	74.00	-38.80	HORIZONTAL	Peak
3	3415.787	45.99	28.85	4.13	36.97	42.00	68.20	-26.20	HORIZONTAL	Peak
4	4367.058	45.74	30.62	4.68	36.81	44.23	74.00	-29.77	HORIZONTAL	Peak
5	10460.000	40.30	39.42	7.37	37.36	49.73	68.20	-18.47	HORIZONTAL	Peak
6	15690.000	38.20	38.86	9.87	35.39	51.54	74.00	-22.46	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 15; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

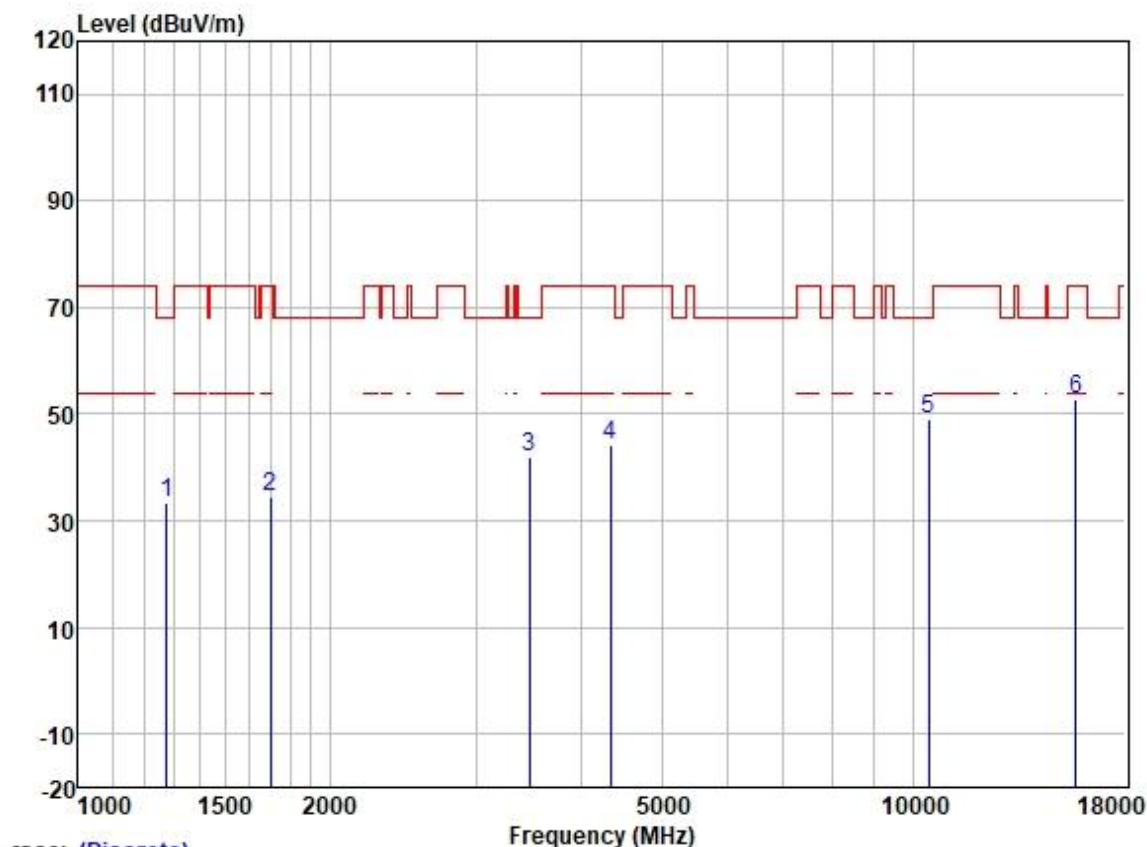


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1274.802	43.99	25.12	2.48	38.33	33.26	68.20	-34.94	VERTICAL	Peak
2	1697.129	43.94	25.71	2.80	37.89	34.56	74.00	-39.44	VERTICAL	Peak
3	3475.541	45.87	28.89	4.25	36.95	42.06	68.20	-26.14	VERTICAL	Peak
4	4341.886	45.93	30.57	4.67	36.81	44.36	74.00	-29.64	VERTICAL	Peak
5	10460.000	39.74	39.42	7.37	37.36	49.17	68.20	-19.03	VERTICAL	Peak
6	15690.000	39.48	38.86	9.87	35.39	52.82	74.00	-21.18	VERTICAL	Peak



Test Mode: 15; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

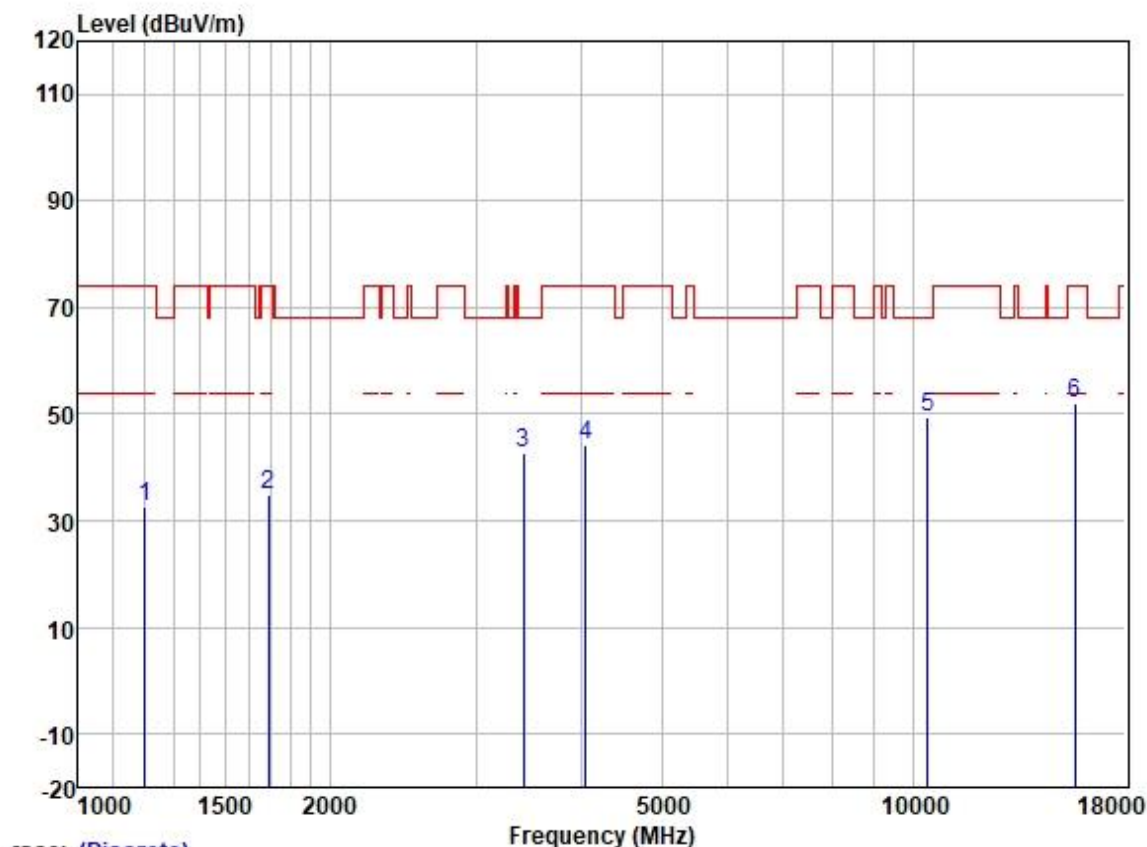

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1203.199	44.15	24.70	2.34	38.39	32.80	74.00	-41.20	HORIZONTAL	Peak
2	1692.231	44.36	25.70	2.80	37.89	34.97	74.00	-39.03	HORIZONTAL	Peak
3	3415.787	46.55	28.85	4.13	36.97	42.56	68.20	-25.64	HORIZONTAL	Peak
4	4050.904	46.57	29.87	4.60	36.80	44.24	74.00	-29.76	HORIZONTAL	Peak
5	10420.000	40.24	39.38	7.35	37.36	49.61	68.20	-18.59	HORIZONTAL	Peak
6	15630.000	38.60	38.92	9.87	35.39	52.00	74.00	-22.00	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 15; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

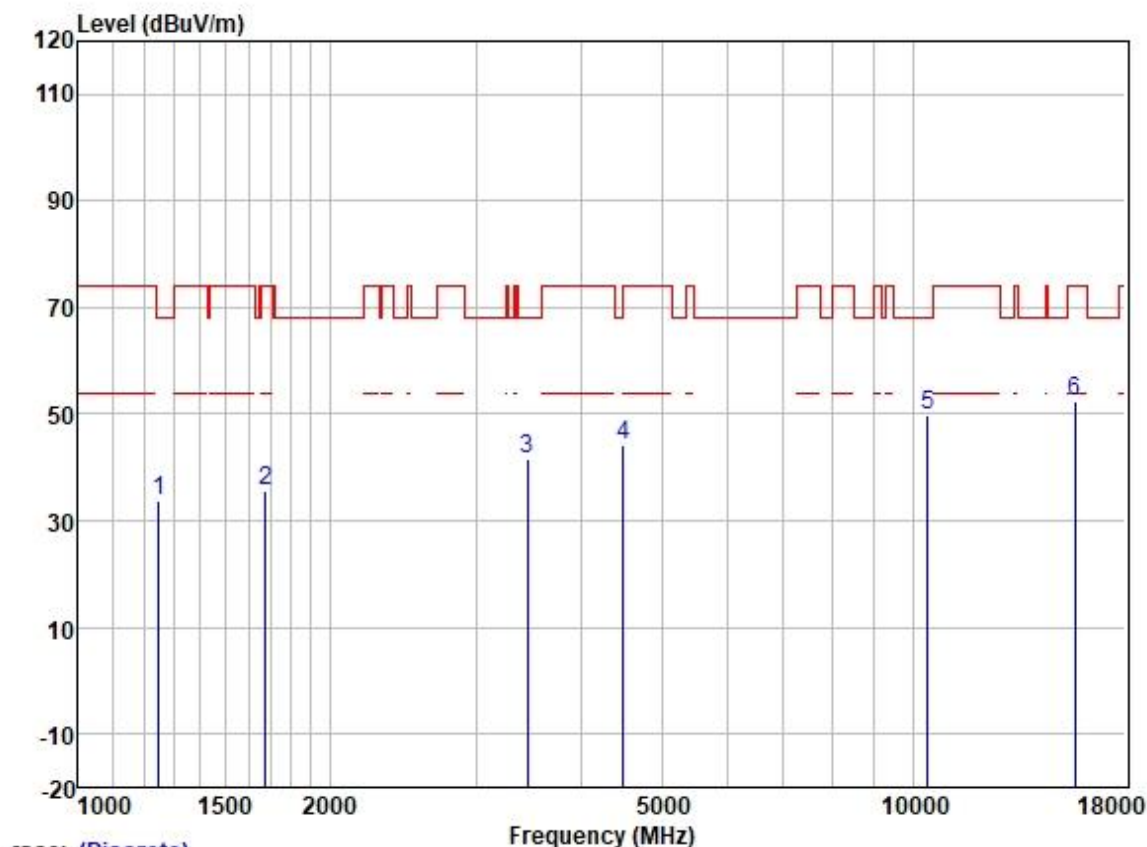


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1249.269	44.66	25.02	2.34	38.35	33.67	68.20	-34.53	VERTICAL	Peak
2	1677.621	45.02	25.68	2.80	37.91	35.59	74.00	-38.41	VERTICAL	Peak
3	3455.508	45.60	28.88	4.20	36.96	41.72	68.20	-26.48	VERTICAL	Peak
4	4495.125	45.32	30.80	5.05	36.82	44.35	68.20	-23.85	VERTICAL	Peak
5	10420.000	40.50	39.38	7.35	37.36	49.87	68.20	-18.33	VERTICAL	Peak
6	15630.000	38.92	38.92	9.87	35.39	52.32	74.00	-21.68	VERTICAL	Peak



Test Mode: 15; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

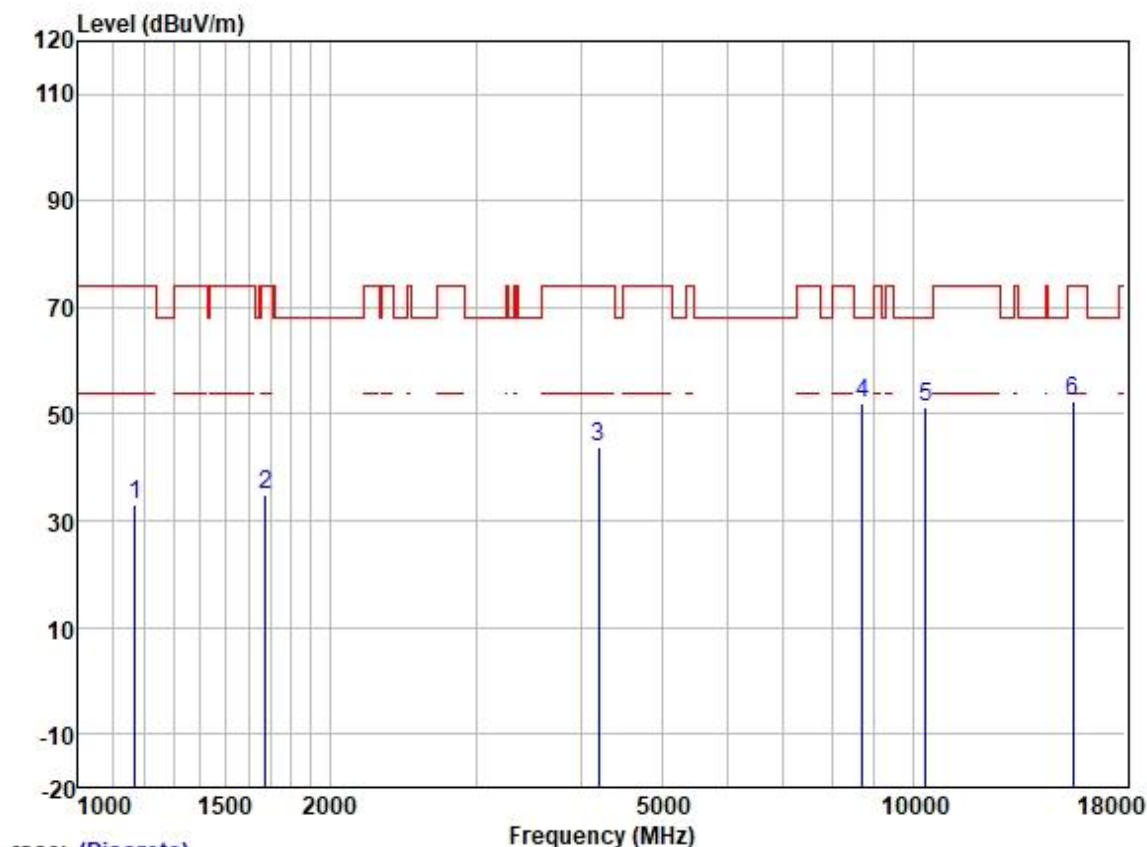

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1168.920	44.54	24.55	2.39	38.40	33.08	74.00	-40.92	HORIZONTAL	Peak
2	1677.621	44.44	25.68	2.80	37.91	35.01	74.00	-38.99	HORIZONTAL	Peak
3	4206.011	45.97	30.18	4.60	36.81	43.94	74.00	-30.06	HORIZONTAL	Peak
4	8713.630	45.08	37.30	7.07	37.55	51.90	68.20	-16.30	HORIZONTAL	Peak
5	10360.000	42.17	39.28	7.29	37.37	51.37	68.20	-16.83	HORIZONTAL	Peak
6	15540.000	38.82	39.05	9.88	35.39	52.36	74.00	-21.64	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 15; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

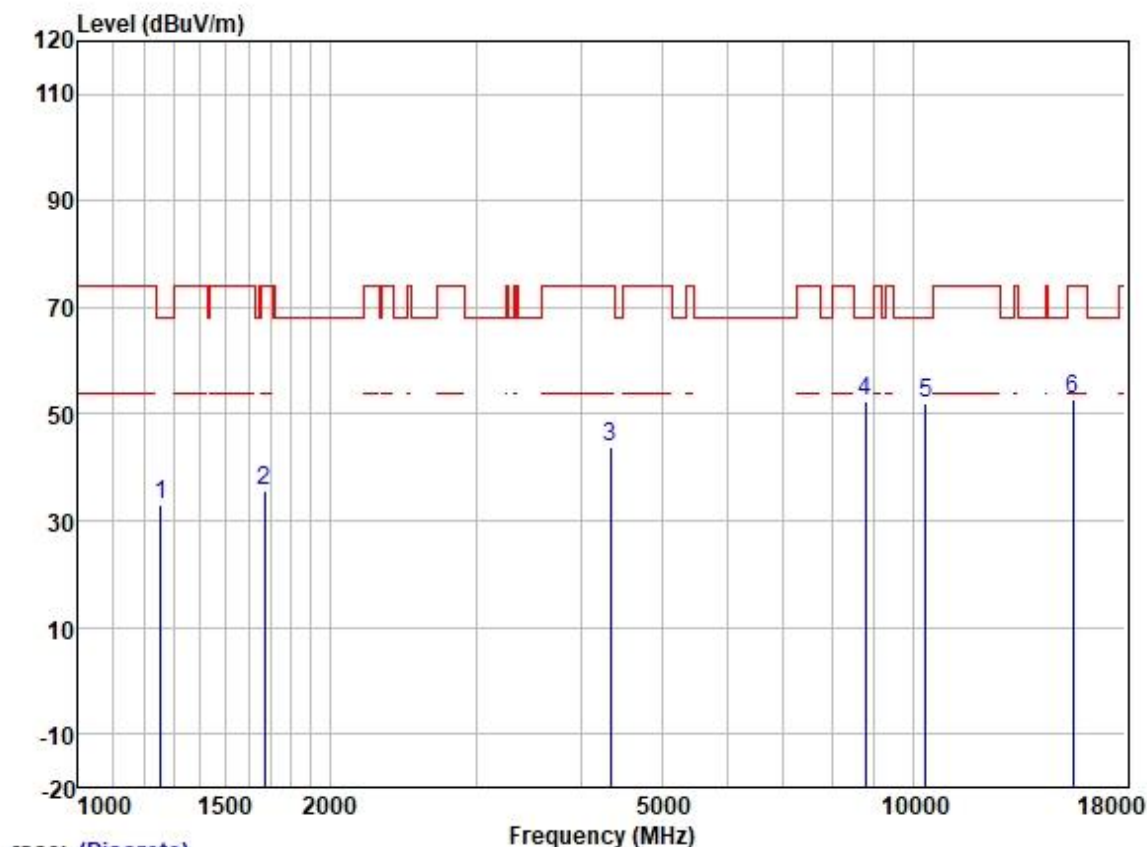

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over		Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit	Pol/Phase	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1256.512	44.03	25.05	2.38	38.35	33.11	68.20	-35.09	VERTICAL	Peak
2	1672.779	45.14	25.67	2.80	37.91	35.70	74.00	-38.30	VERTICAL	Peak
3	4341.886	45.47	30.57	4.67	36.81	43.90	74.00	-30.10	VERTICAL	Peak
4	8764.146	45.43	37.32	7.19	37.54	52.40	68.20	-15.80	VERTICAL	Peak
5	10360.000	42.96	39.28	7.29	37.37	52.16	68.20	-16.04	VERTICAL	Peak
6	15540.000	39.21	39.05	9.88	35.39	52.75	74.00	-21.25	VERTICAL	Peak


Test Mode: 15; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:middle

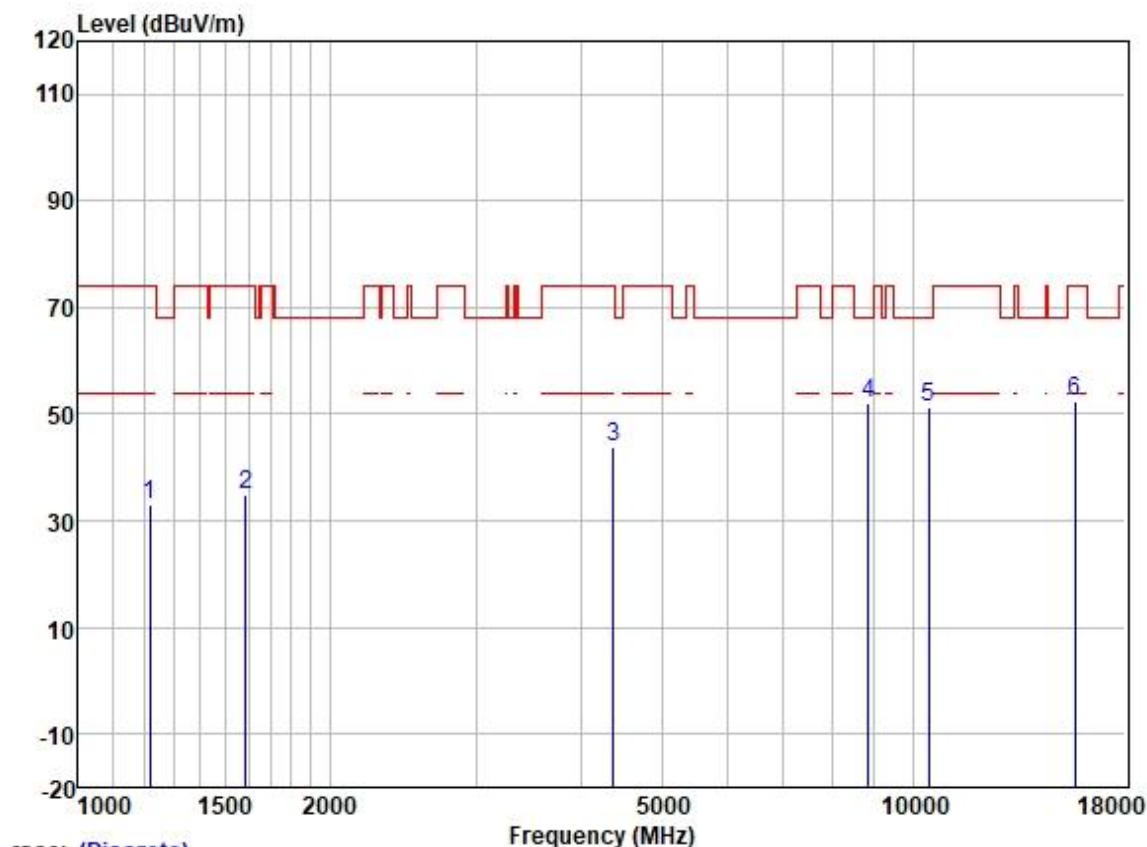

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	44.44	24.79	2.32	38.37	33.18	74.00	-40.82	HORIZONTAL	Peak
2	1587.975	44.62	25.57	2.80	37.98	35.01	74.00	-38.99	HORIZONTAL	Peak
3	4379.699	45.24	30.64	4.69	36.81	43.76	74.00	-30.24	HORIZONTAL	Peak
4	8840.473	44.83	37.35	7.34	37.53	51.99	68.20	-16.21	HORIZONTAL	Peak
5	10440.000	41.97	39.42	7.37	37.36	51.40	68.20	-16.80	HORIZONTAL	Peak
6	15660.000	39.13	38.86	9.87	35.39	52.47	74.00	-21.53	HORIZONTAL	Peak

Test Mode: 15; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:middle

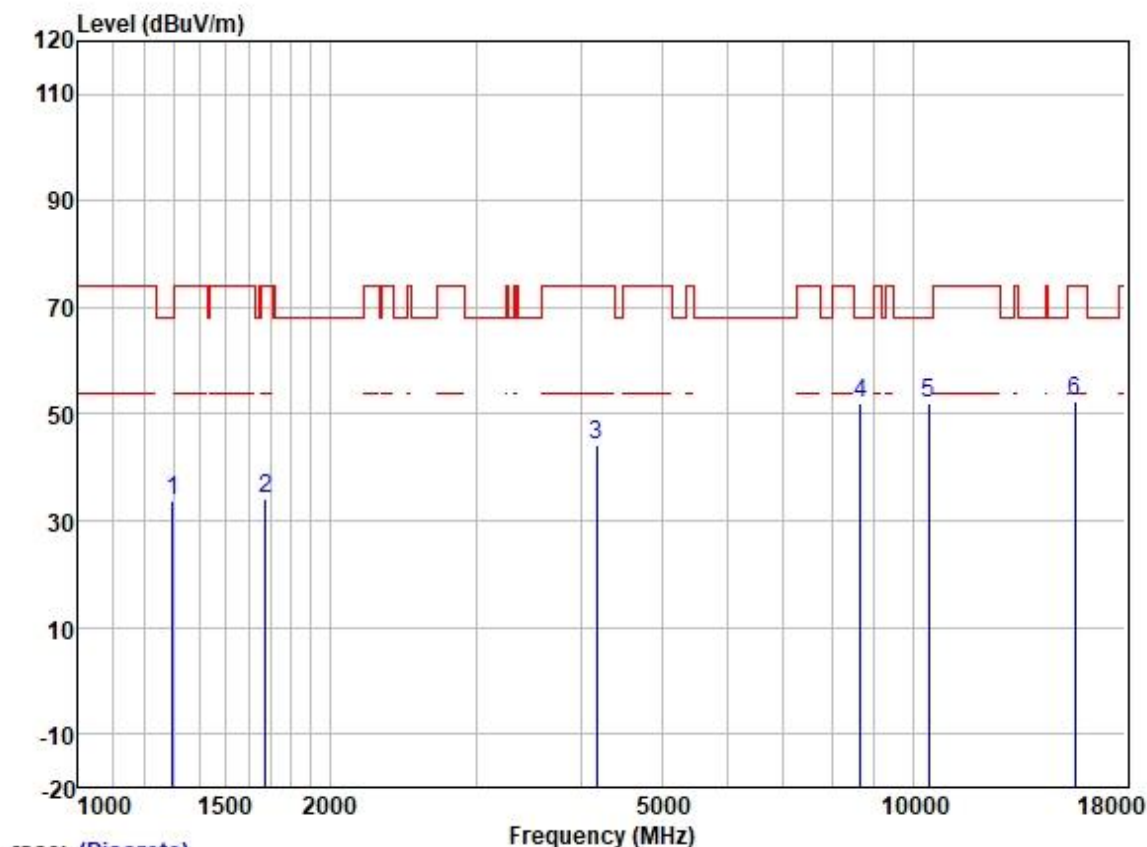

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1297.103	44.38	25.19	2.58	38.31	33.84	68.20	-34.36	VERTICAL	Peak
2	1677.621	43.74	25.68	2.80	37.91	34.31	74.00	-39.69	VERTICAL	Peak
3	4181.768	46.47	30.12	4.60	36.80	44.39	74.00	-29.61	VERTICAL	Peak
4	8663.404	45.30	37.27	6.97	37.55	51.99	68.20	-16.21	VERTICAL	Peak
5	10440.000	42.58	39.42	7.37	37.36	52.01	68.20	-16.19	VERTICAL	Peak
6	15660.000	39.11	38.86	9.87	35.39	52.45	74.00	-21.55	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 15; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:High

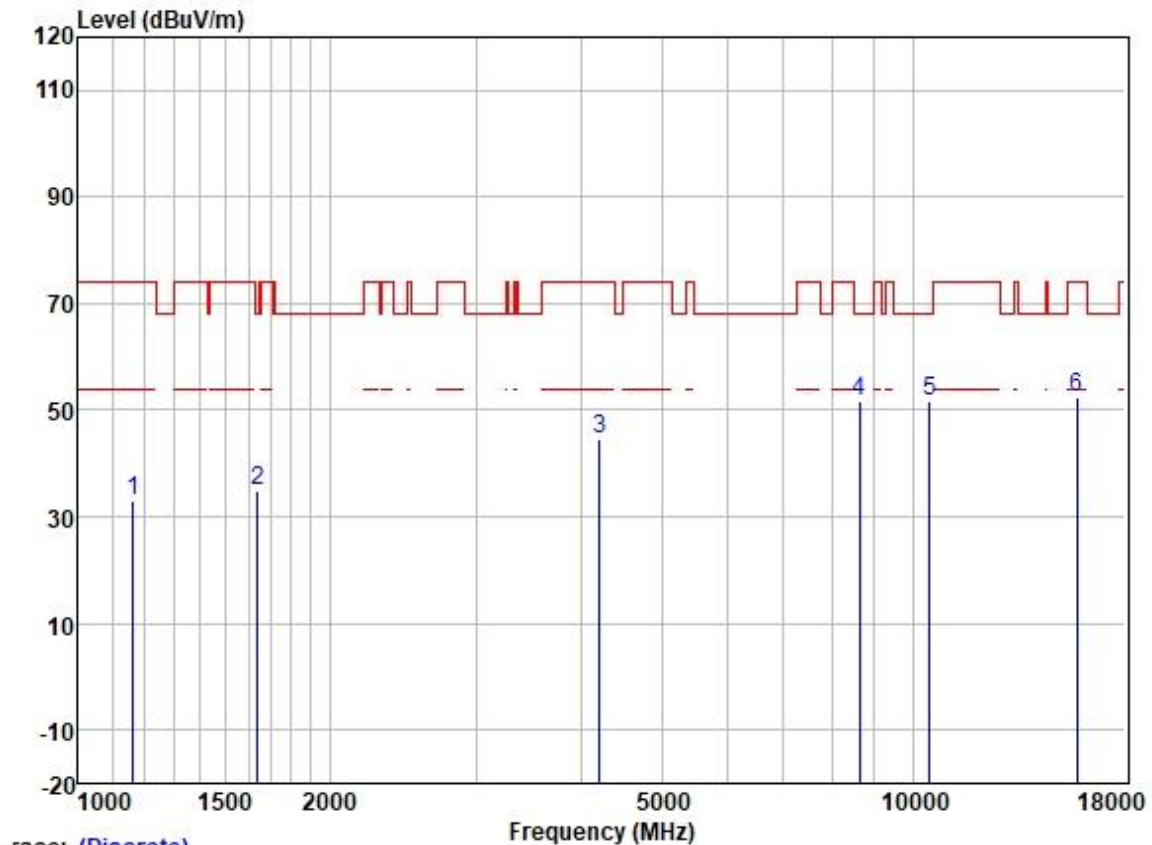

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1162.182	44.55	24.53	2.40	38.42	33.06	74.00	-40.94	HORIZONTAL	Peak
2	1639.274	44.33	25.62	2.80	37.93	34.82	68.20	-33.38	HORIZONTAL	Peak
3	4218.186	46.47	30.22	4.60	36.81	44.48	74.00	-29.52	HORIZONTAL	Peak
4	8638.399	45.03	37.26	6.92	37.55	51.66	68.20	-16.54	HORIZONTAL	Peak
5	10480.000	42.16	39.46	7.40	37.36	51.66	68.20	-16.54	HORIZONTAL	Peak
6	15720.000	39.21	38.78	9.87	35.39	52.47	74.00	-21.53	HORIZONTAL	Peak

Test Mode: 15; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:High

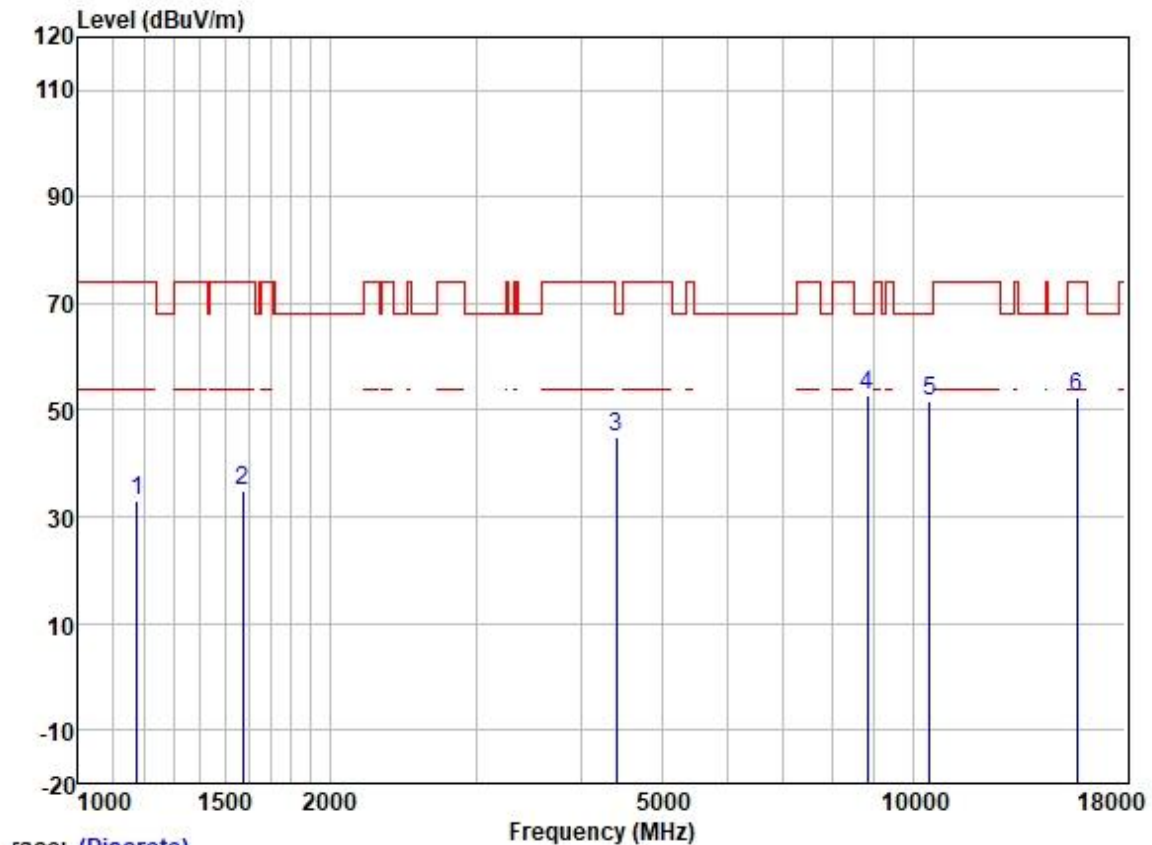

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1175.697	44.51	24.58	2.38	38.40	33.07	74.00	-40.93	VERTICAL	Peak
2	1574.265	44.37	25.56	2.80	38.00	34.73	74.00	-39.27	VERTICAL	Peak
3	4417.841	46.22	30.70	4.74	36.81	44.85	68.20	-23.35	VERTICAL	Peak
4	8814.957	45.52	37.34	7.29	37.53	52.62	68.20	-15.58	VERTICAL	Peak
5	10480.000	42.21	39.46	7.40	37.36	51.71	68.20	-16.49	VERTICAL	Peak
6	15720.000	39.05	38.78	9.87	35.39	52.31	74.00	-21.69	VERTICAL	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch Technical Services Co., Ltd. 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Test Mode: 15; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

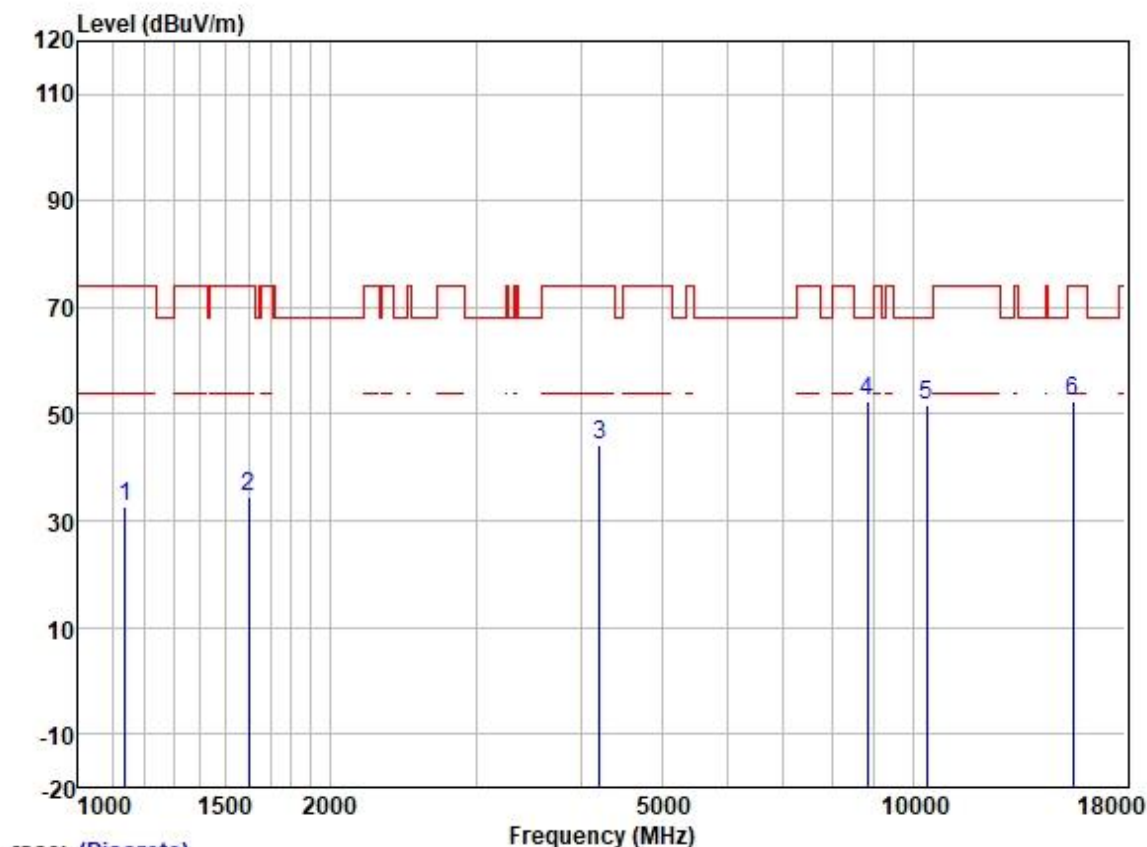

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1138.904	44.33	24.46	2.27	38.42	32.64	74.00	-41.36	HORIZONTAL	Peak
2	1601.804	44.20	25.58	2.80	37.98	34.60	74.00	-39.40	HORIZONTAL	Peak
3	4218.186	46.11	30.22	4.60	36.81	44.12	74.00	-29.88	HORIZONTAL	Peak
4	8814.957	45.34	37.34	7.29	37.53	52.44	68.20	-15.76	HORIZONTAL	Peak
5	10380.000	42.28	39.33	7.32	37.37	51.56	68.20	-16.64	HORIZONTAL	Peak
6	15570.000	39.00	38.99	9.88	35.39	52.48	74.00	-21.52	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 15; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

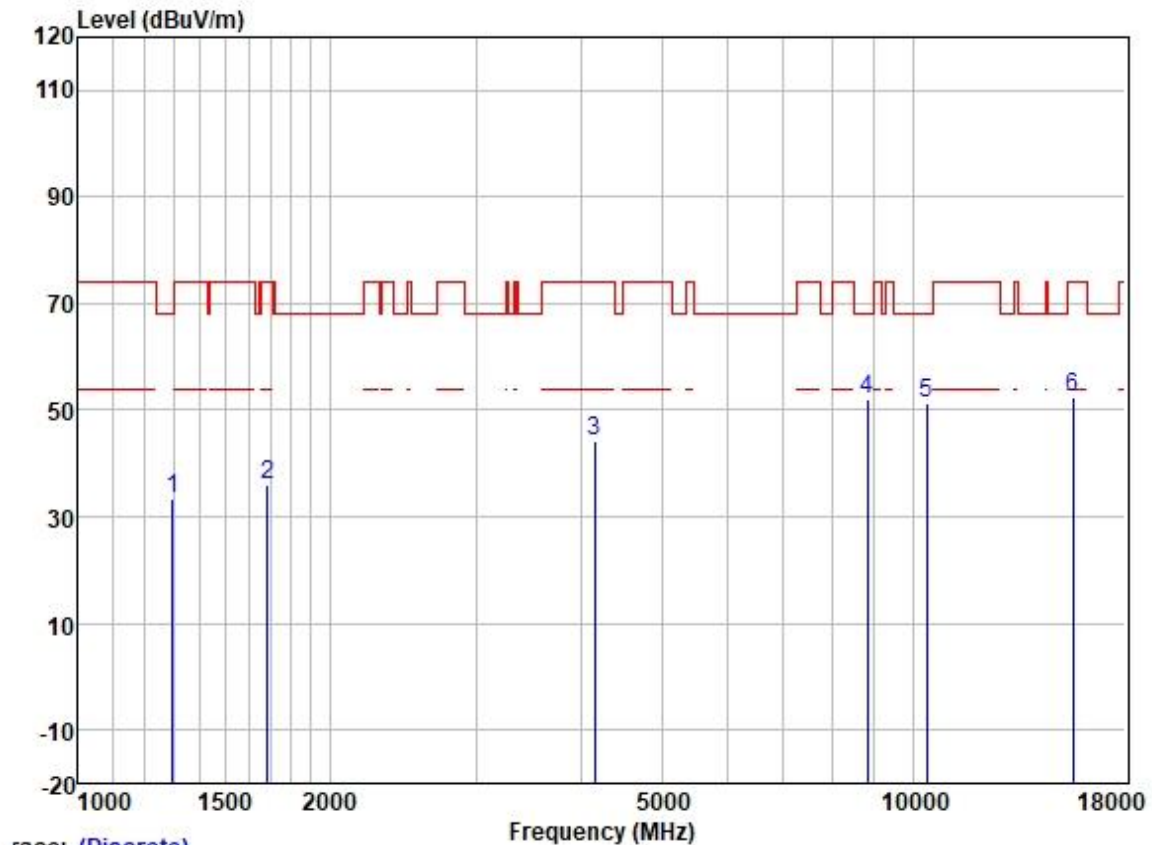

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1297.103	43.97	25.19	2.58	38.31	33.43	68.20	-34.77	VERTICAL	Peak
2	1687.347	45.30	25.69	2.80	37.91	35.88	74.00	-38.12	VERTICAL	Peak
3	4157.664	46.48	30.06	4.60	36.80	44.34	74.00	-29.66	VERTICAL	Peak
4	8814.957	44.93	37.34	7.29	37.53	52.03	68.20	-16.17	VERTICAL	Peak
5	10380.000	41.90	39.33	7.32	37.37	51.18	68.20	-17.02	VERTICAL	Peak
6	15570.000	39.00	38.99	9.88	35.39	52.48	74.00	-21.52	VERTICAL	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch Technical Services Co., Ltd. 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Test Mode: 15; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:High

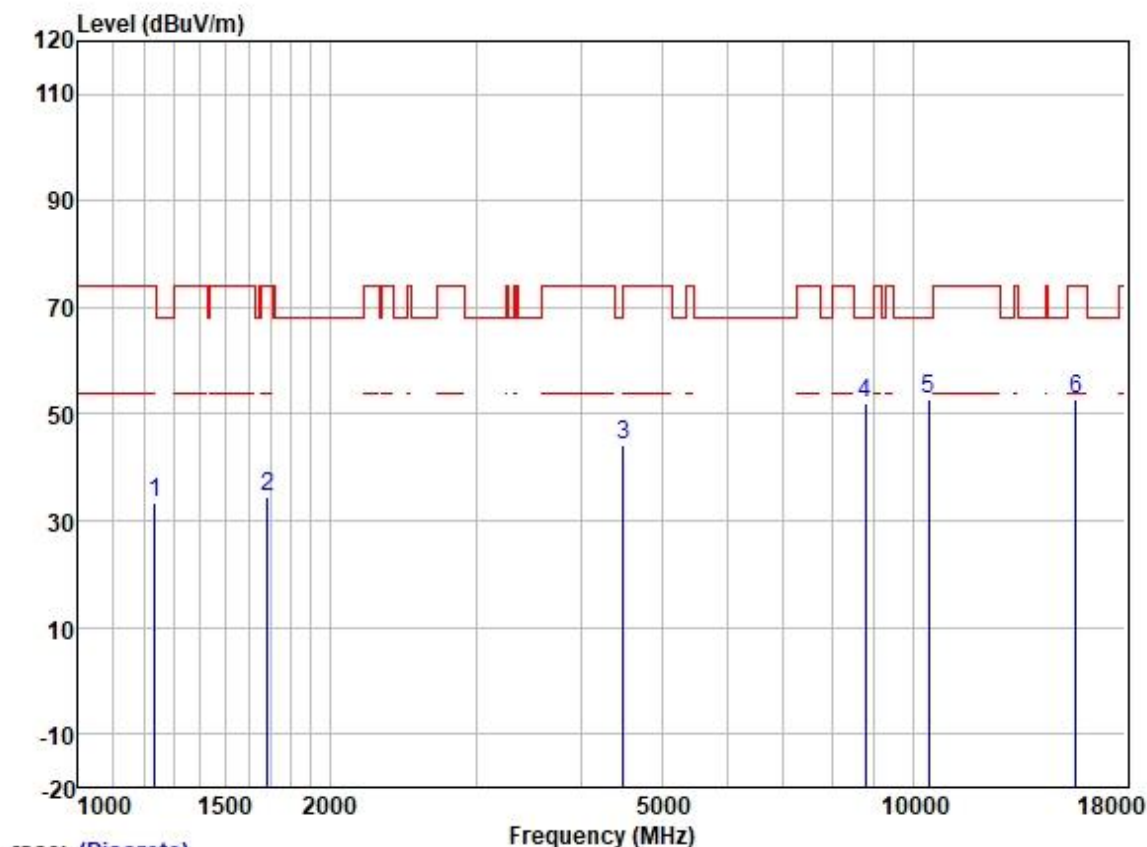


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1234.909	44.35	24.93	2.30	38.37	33.21	74.00	-40.79	HORIZONTAL Peak
2	1687.347	44.10	25.69	2.80	37.91	34.68	74.00	-39.32	HORIZONTAL Peak
3	4495.125	45.09	30.80	5.05	36.82	44.12	68.20	-24.08	HORIZONTAL Peak
4	8764.146	45.09	37.32	7.19	37.54	52.06	68.20	-16.14	HORIZONTAL Peak
5	10460.000	43.35	39.42	7.37	37.36	52.78	68.20	-15.42	HORIZONTAL Peak
6	15690.000	39.42	38.86	9.87	35.39	52.76	74.00	-21.24	HORIZONTAL Peak



Test Mode: 15; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:High

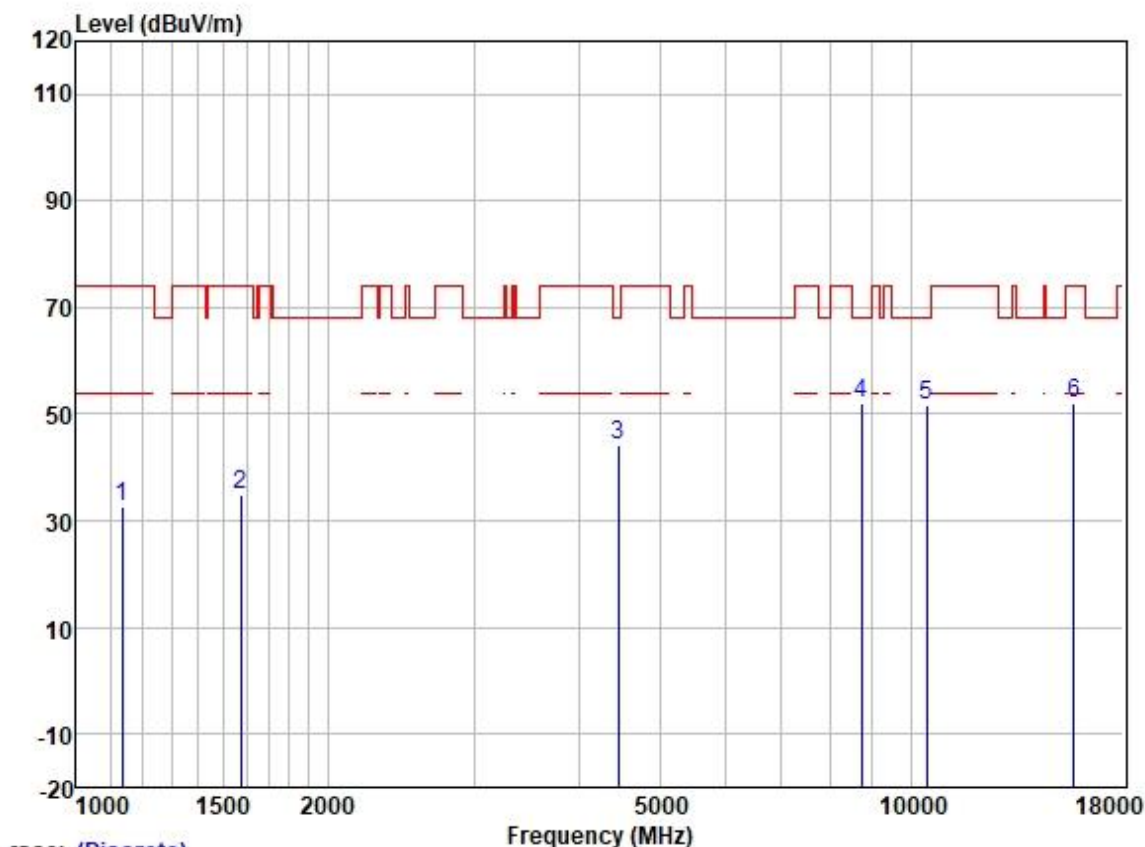

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1135.617	44.52	24.45	2.25	38.43	32.79	74.00	-41.21	VERTICAL	Peak
2	1574.265	44.53	25.56	2.80	38.00	34.89	74.00	-39.11	VERTICAL	Peak
3	4456.315	45.55	30.75	4.88	36.81	44.37	68.20	-23.83	VERTICAL	Peak
4	8738.852	45.02	37.31	7.13	37.54	51.92	68.20	-16.28	VERTICAL	Peak
5	10460.000	42.25	39.42	7.37	37.36	51.68	68.20	-16.52	VERTICAL	Peak
6	15690.000	38.89	38.86	9.87	35.39	52.23	74.00	-21.77	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 15; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:80MHz; Channel:middle

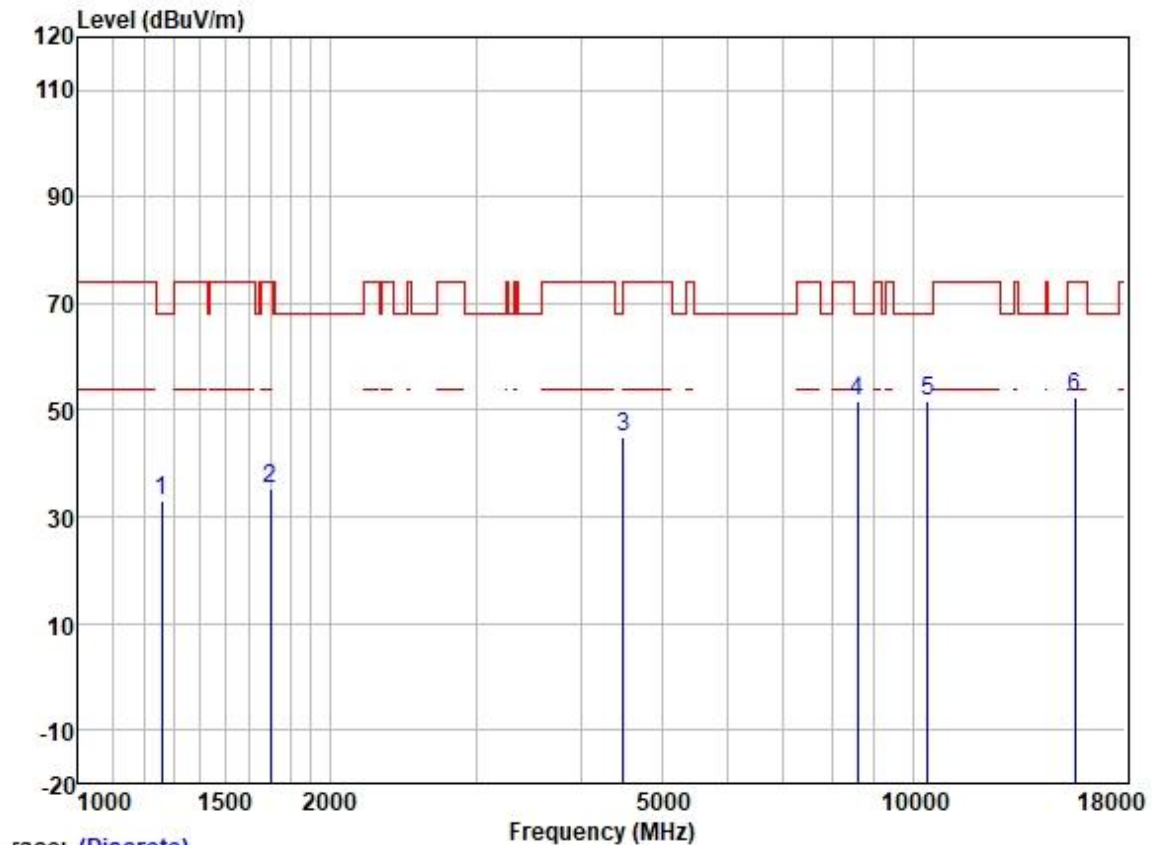


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1260.149	43.92	25.07	2.40	38.35	33.04	68.20	-35.16	HORIZONTAL	Peak
2	1697.129	44.49	25.71	2.80	37.89	35.11	74.00	-38.89	HORIZONTAL	Peak
3	4495.125	45.80	30.80	5.05	36.82	44.83	68.20	-23.37	HORIZONTAL	Peak
4	8588.607	45.26	37.23	6.84	37.56	51.77	68.20	-16.43	HORIZONTAL	Peak
5	10420.000	42.41	39.38	7.35	37.36	51.78	68.20	-16.42	HORIZONTAL	Peak
6	15630.000	39.17	38.92	9.87	35.39	52.57	74.00	-21.43	HORIZONTAL	Peak



Test Mode: 15; Polarity: Vertical; Modulation:802.11ax; Bandwidth:80MHz; Channel:middle

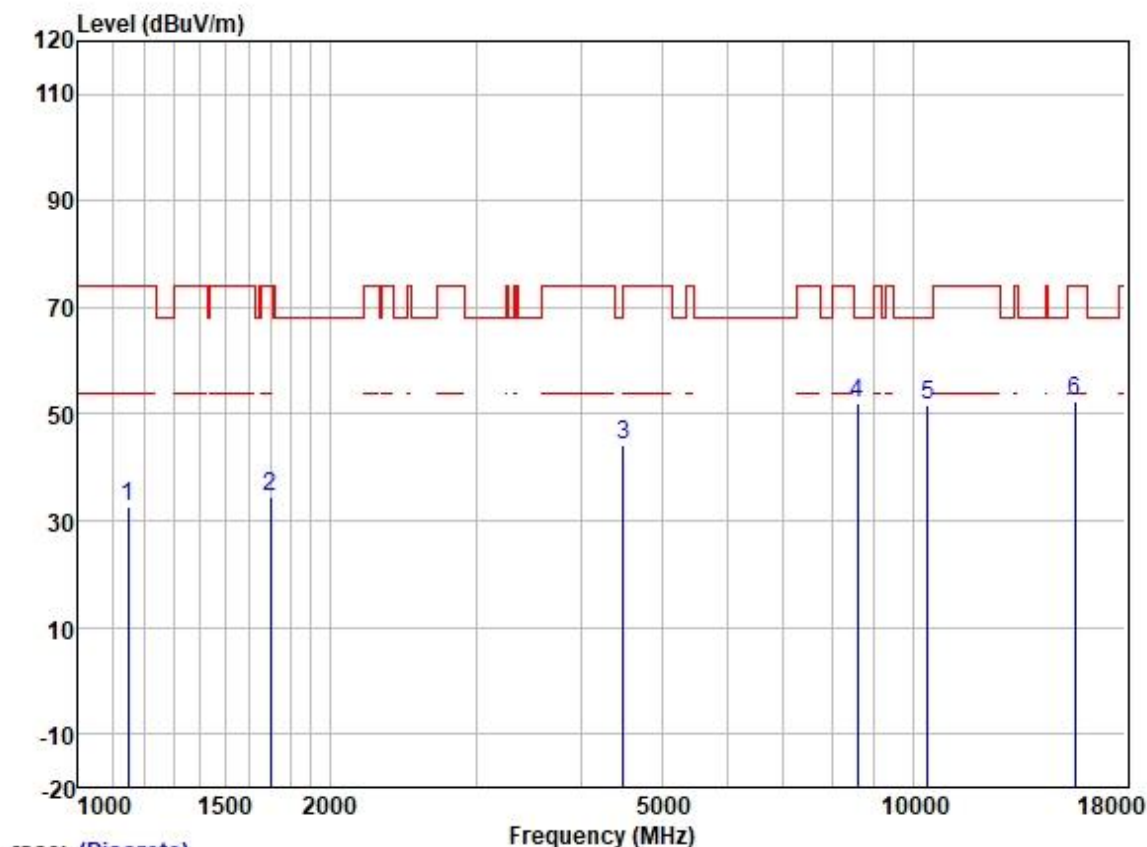


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1148.823	44.21	24.49	2.34	38.42	32.62	74.00	-41.38	VERTICAL	Peak
2	1697.129	43.98	25.71	2.80	37.89	34.60	74.00	-39.40	VERTICAL	Peak
3	4495.125	45.18	30.80	5.05	36.82	44.21	68.20	-23.99	VERTICAL	Peak
4	8588.607	45.64	37.23	6.84	37.56	52.15	68.20	-16.05	VERTICAL	Peak
5	10420.000	42.33	39.38	7.35	37.36	51.70	68.20	-16.50	VERTICAL	Peak
6	15630.000	39.07	38.92	9.87	35.39	52.47	74.00	-21.53	VERTICAL	Peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

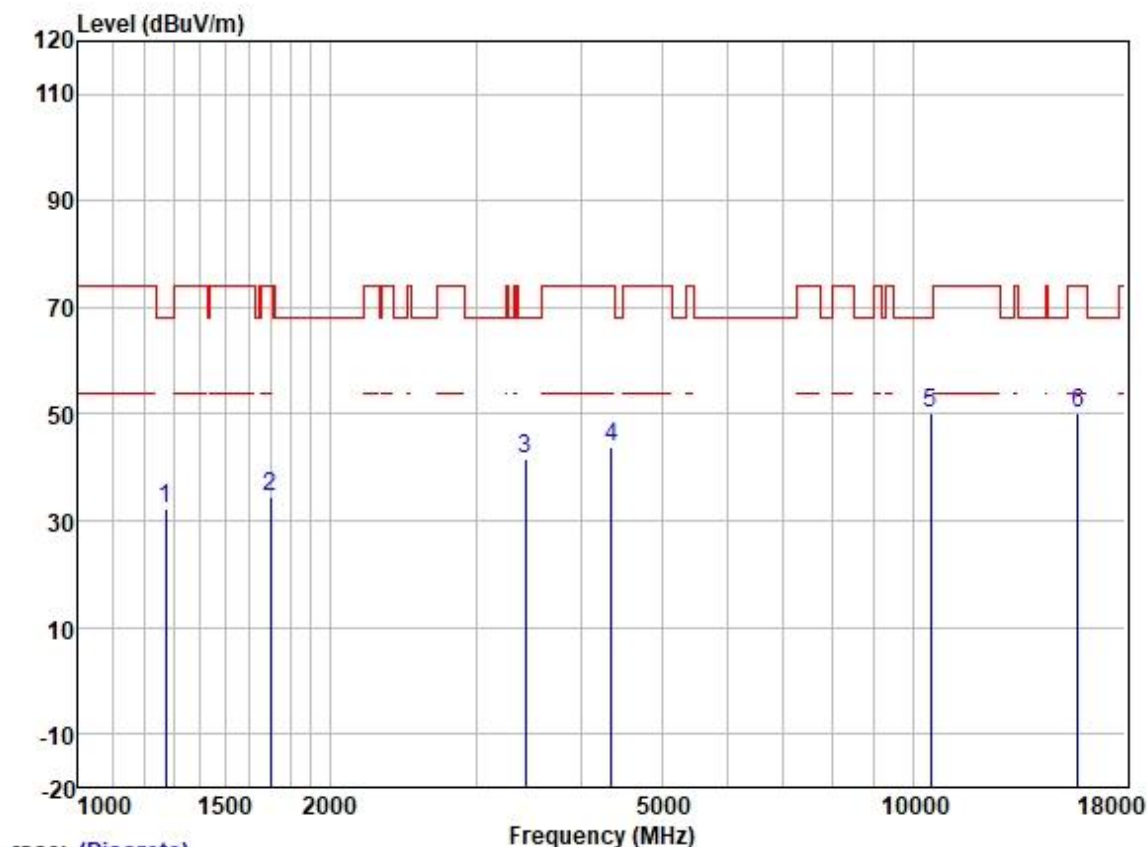

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1271.123	43.18	25.11	2.46	38.33	32.42	68.20	-35.78	HORIZONTAL	Peak
2	1697.129	44.01	25.71	2.80	37.89	34.63	74.00	-39.37	HORIZONTAL	Peak
3	3435.590	45.71	28.87	4.16	36.97	41.77	68.20	-26.43	HORIZONTAL	Peak
4	4354.454	45.37	30.59	4.68	36.81	43.83	74.00	-30.17	HORIZONTAL	Peak
5	10520.000	40.61	39.50	7.42	37.35	50.18	68.20	-18.02	HORIZONTAL	Peak
6	15780.000	37.11	38.70	9.86	35.39	50.28	74.00	-23.72	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 17; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

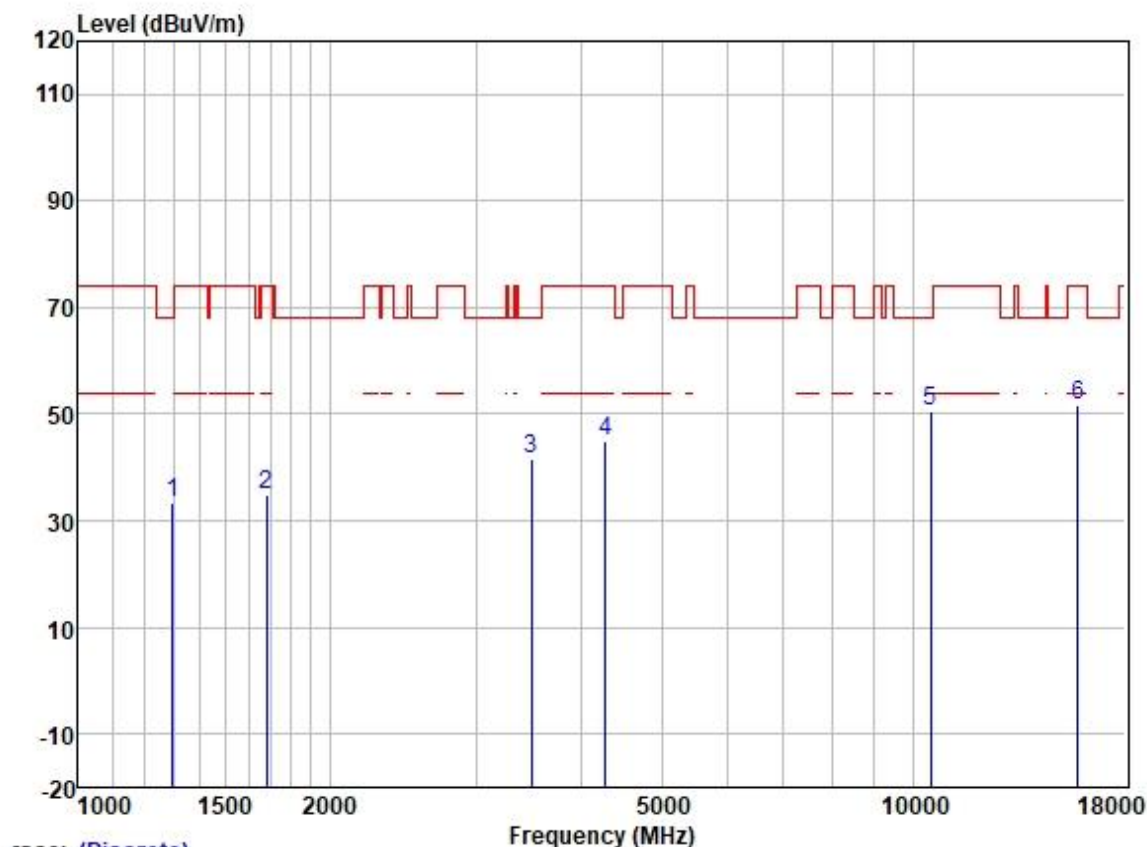

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1297.103	43.95	25.19	2.58	38.31	33.41	68.20	-34.79	VERTICAL	Peak
2	1682.477	44.29	25.68	2.80	37.91	34.86	74.00	-39.14	VERTICAL	Peak
3	3495.691	45.35	28.90	4.30	36.94	41.61	68.20	-26.59	VERTICAL	Peak
4	4279.589	46.57	30.42	4.63	36.81	44.81	74.00	-29.19	VERTICAL	Peak
5	10520.000	40.98	39.50	7.42	37.35	50.55	68.20	-17.65	VERTICAL	Peak
6	15780.000	38.34	38.70	9.86	35.39	51.51	74.00	-22.49	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 17; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

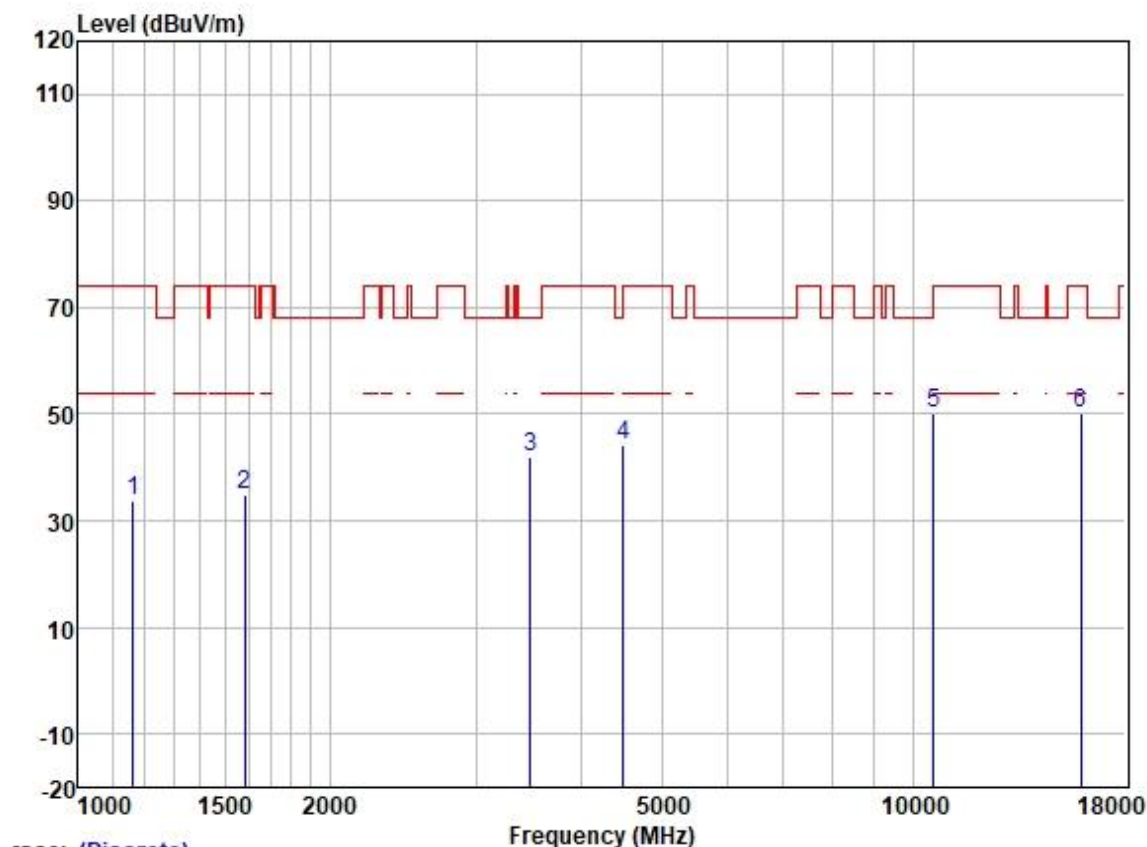

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1162.182	45.13	24.53	2.40	38.42	33.64	74.00	-40.36	HORIZONTAL	Peak
2	1583.392	44.54	25.56	2.80	38.00	34.90	74.00	-39.10	HORIZONTAL	Peak
3	3485.601	45.62	28.89	4.27	36.95	41.83	68.20	-26.37	HORIZONTAL	Peak
4	4495.125	45.11	30.80	5.05	36.82	44.14	68.20	-24.06	HORIZONTAL	Peak
5	10600.000	40.56	39.59	7.46	37.34	50.27	68.20	-17.93	HORIZONTAL	Peak
6	15900.000	37.35	38.44	9.86	35.40	50.25	74.00	-23.75	HORIZONTAL	Peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

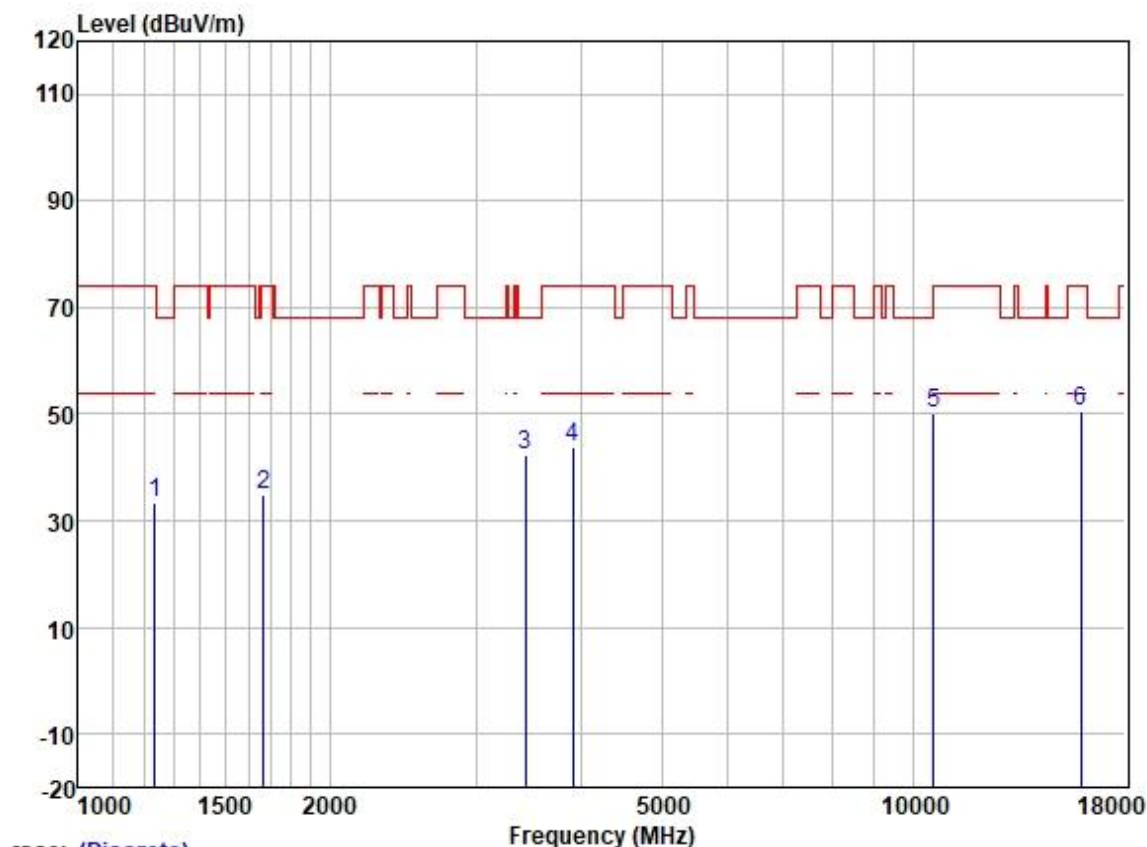


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1234.909	44.58	24.93	2.30	38.37	33.44	74.00	-40.56	VERTICAL	Peak
2	1667.951	44.48	25.66	2.80	37.91	35.03	74.00	-38.97	VERTICAL	Peak
3	3435.590	46.11	28.87	4.16	36.97	42.17	68.20	-26.03	VERTICAL	Peak
4	3912.809	46.44	29.70	4.60	36.82	43.92	74.00	-30.08	VERTICAL	Peak
5	10600.000	40.61	39.59	7.46	37.34	50.32	68.20	-17.88	VERTICAL	Peak
6	15900.000	37.49	38.44	9.86	35.40	50.39	74.00	-23.61	VERTICAL	Peak




Test Mode: 17; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

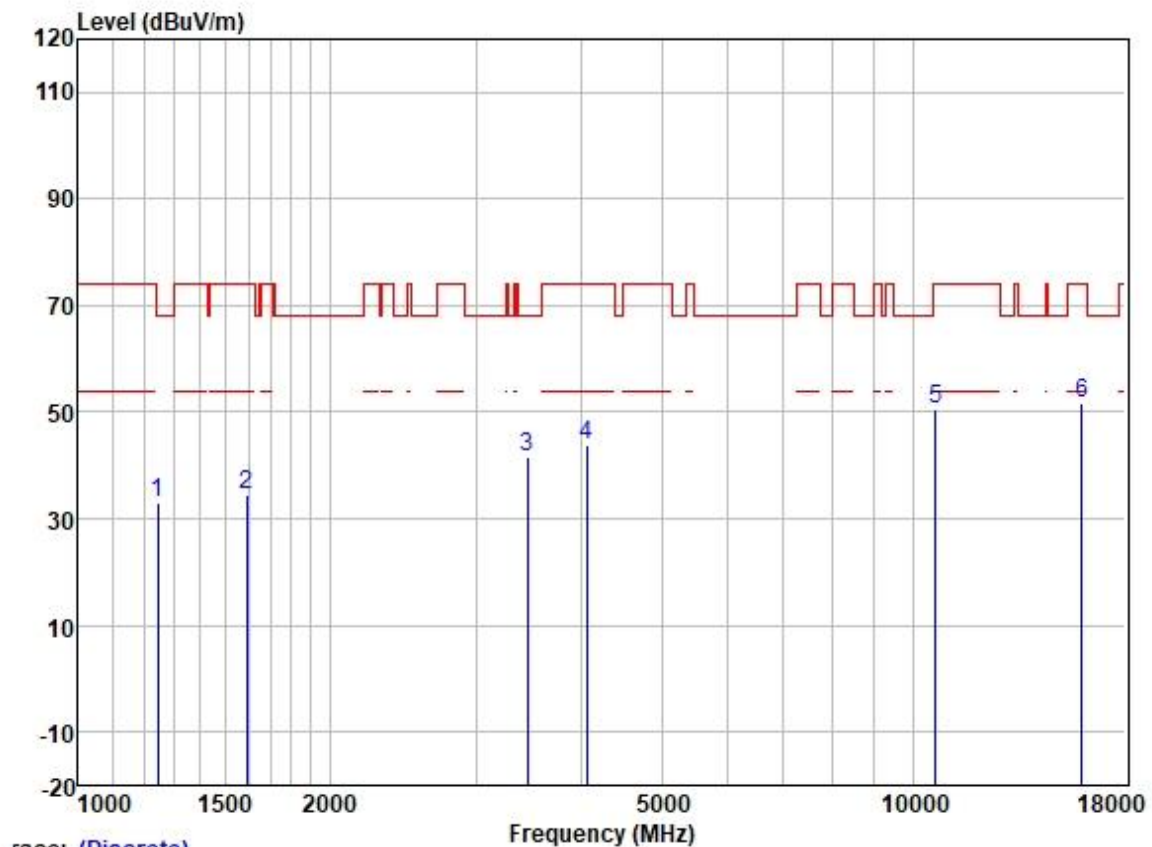

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1245.663	43.87	25.00	2.33	38.35	32.85	68.20	-35.35	HORIZONTAL	Peak
2	1592.571	44.23	25.57	2.80	37.98	34.62	74.00	-39.38	HORIZONTAL	Peak
3	3455.508	45.36	28.88	4.20	36.96	41.48	68.20	-26.72	HORIZONTAL	Peak
4	4062.629	46.11	29.88	4.60	36.80	43.79	74.00	-30.21	HORIZONTAL	Peak
5	10640.000	40.70	39.63	7.48	37.33	50.48	74.00	-23.52	HORIZONTAL	Peak
6	15960.000	38.76	38.37	9.85	35.40	51.58	74.00	-22.42	HORIZONTAL	Peak

Test Mode: 17; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

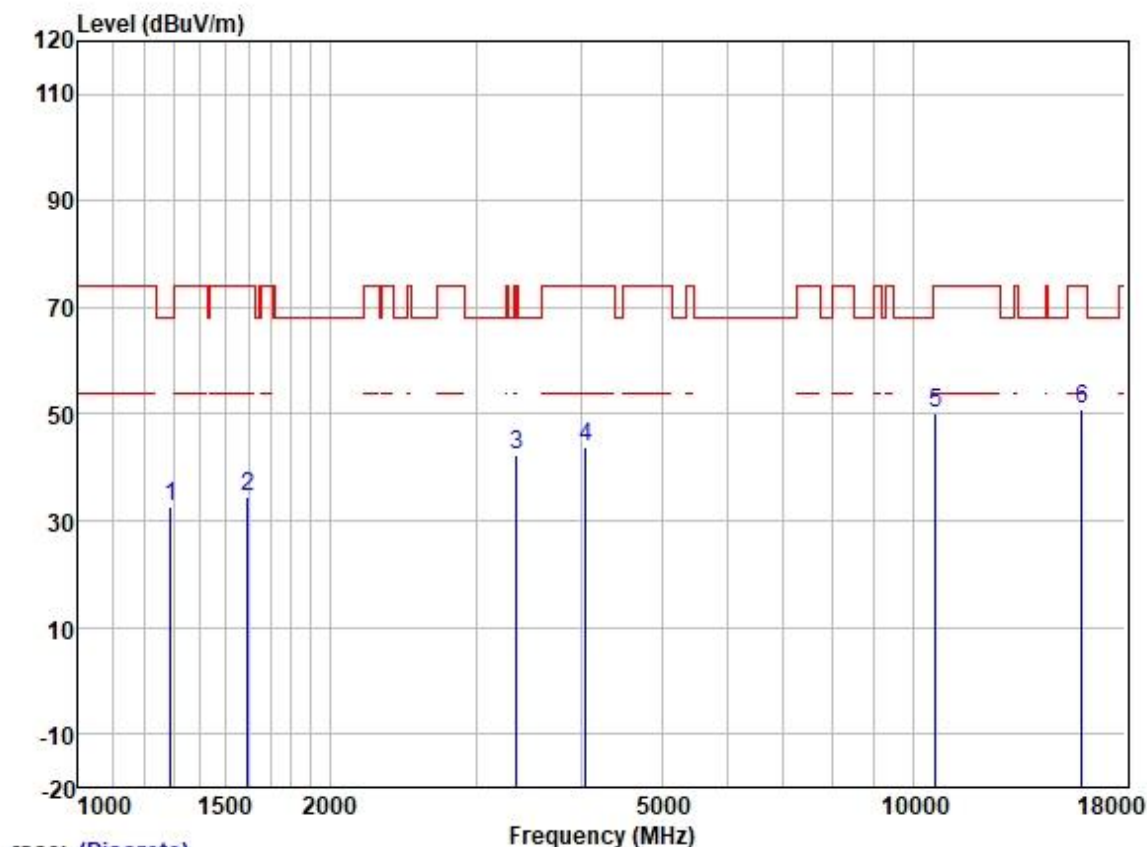


Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	43.30	25.17	2.55	38.31	32.71	68.20	-35.49	VERTICAL	Peak
2	1597.181	44.03	25.58	2.80	37.98	34.43	74.00	-39.57	VERTICAL	Peak
3	3347.371	46.30	28.80	4.08	37.01	42.17	74.00	-31.83	VERTICAL	Peak
4	4050.904	46.23	29.87	4.60	36.80	43.90	74.00	-30.10	VERTICAL	Peak
5	10640.000	40.42	39.63	7.48	37.33	50.20	74.00	-23.80	VERTICAL	Peak
6	15960.000	37.96	38.37	9.85	35.40	50.78	74.00	-23.22	VERTICAL	Peak




Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

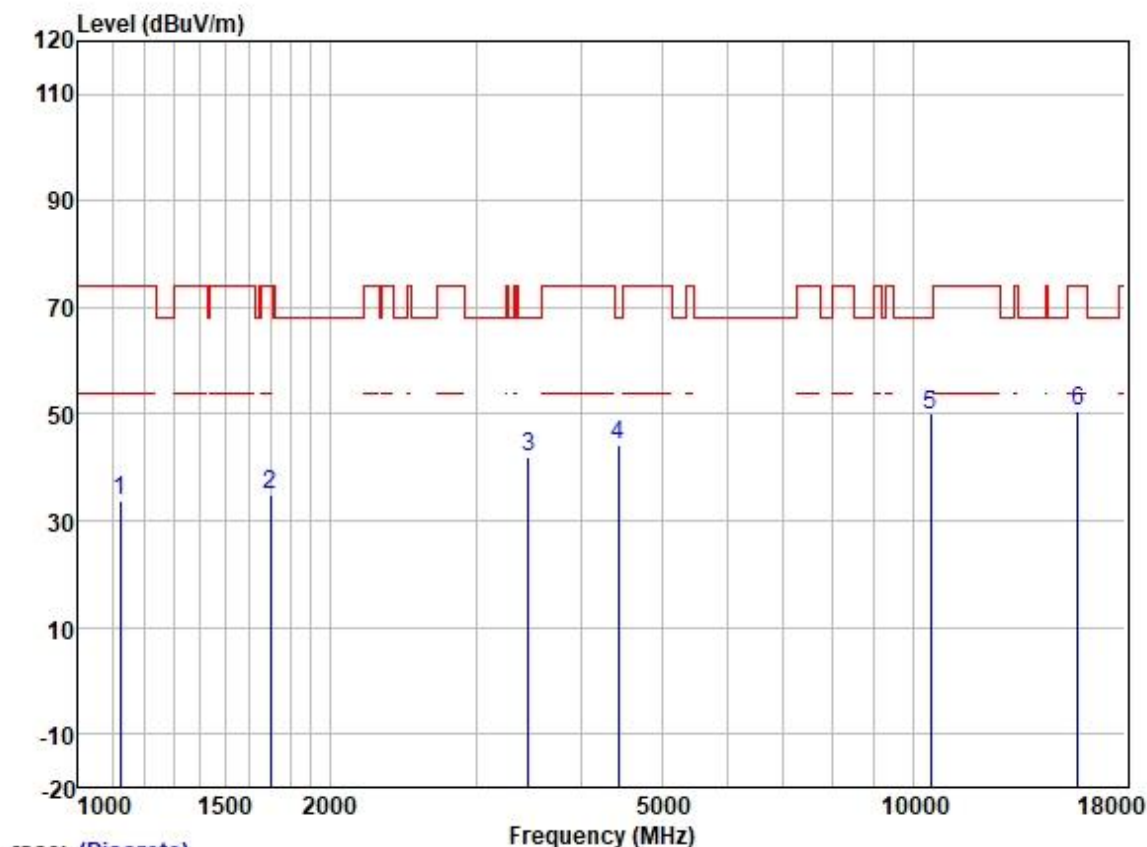

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1122.563	45.56	24.42	2.22	38.43	33.77	74.00	-40.23	HORIZONTAL	Peak
2	1697.129	44.23	25.71	2.80	37.89	34.85	74.00	-39.15	HORIZONTAL	Peak
3	3465.510	45.83	28.88	4.22	36.95	41.98	68.20	-26.22	HORIZONTAL	Peak
4	4443.453	45.39	30.73	4.83	36.81	44.14	68.20	-24.06	HORIZONTAL	Peak
5	10520.000	40.43	39.50	7.42	37.35	50.00	68.20	-18.20	HORIZONTAL	Peak
6	15780.000	37.25	38.70	9.86	35.39	50.42	74.00	-23.58	HORIZONTAL	Peak




Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

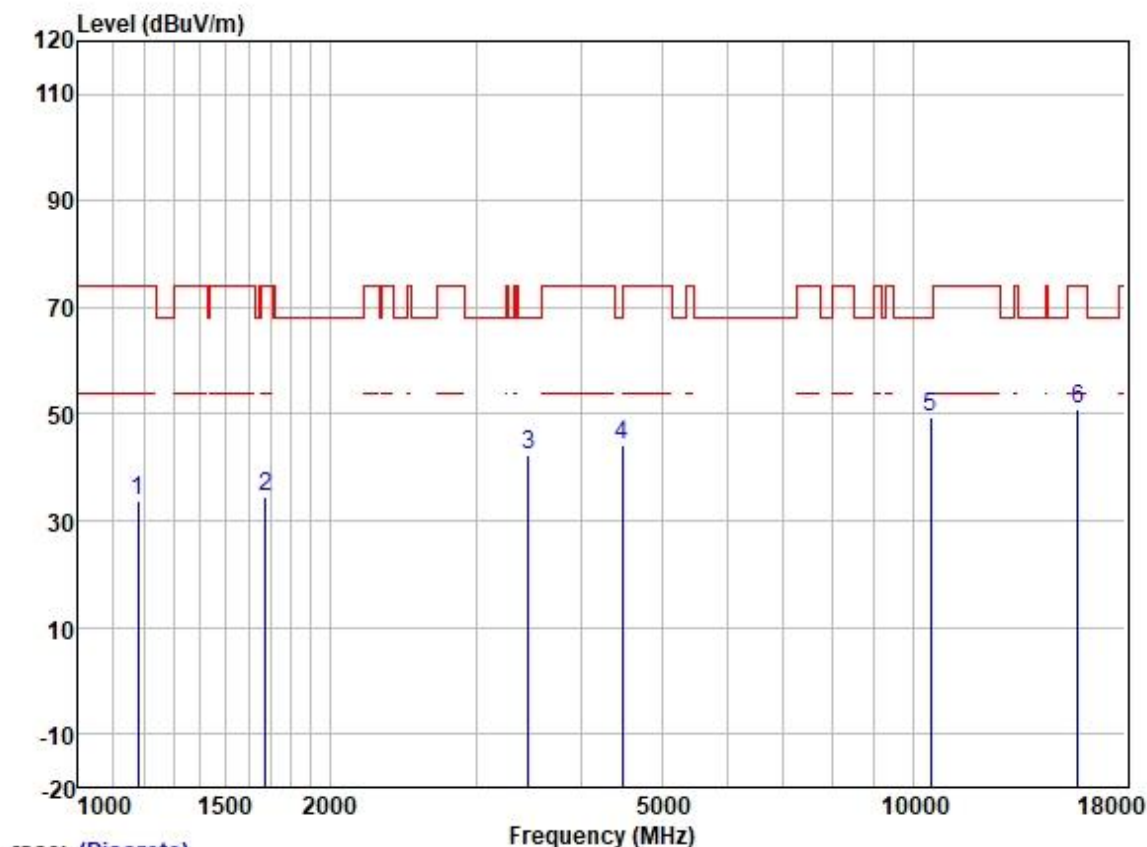

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1179.100	45.04	24.59	2.38	38.40	33.61	74.00	-40.39	VERTICAL	Peak
2	1677.621	44.06	25.68	2.80	37.91	34.63	74.00	-39.37	VERTICAL	Peak
3	3465.510	46.22	28.88	4.22	36.95	42.37	68.20	-25.83	VERTICAL	Peak
4	4482.150	45.12	30.78	4.99	36.81	44.08	68.20	-24.12	VERTICAL	Peak
5	10520.000	40.03	39.50	7.42	37.35	49.60	68.20	-18.60	VERTICAL	Peak
6	15780.000	37.78	38.70	9.86	35.39	50.95	74.00	-23.05	VERTICAL	Peak




Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

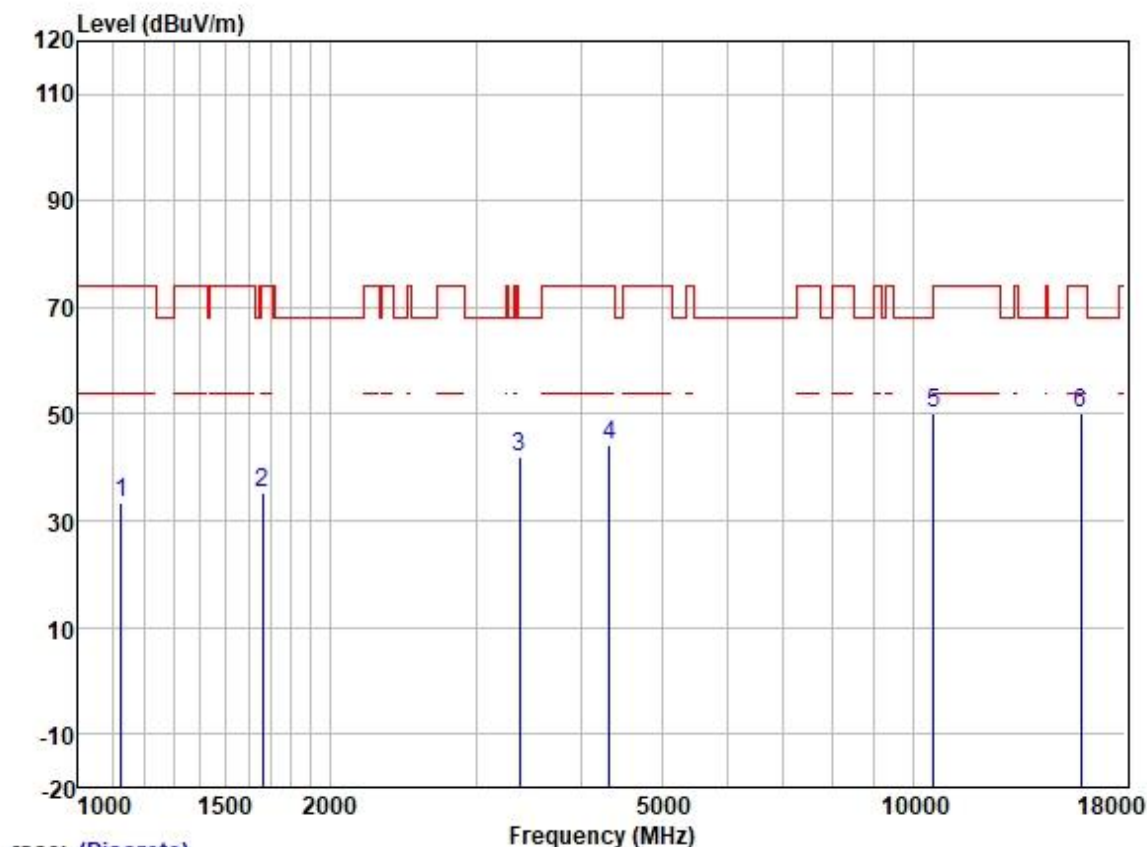

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1125.813	45.11	24.42	2.21	38.43	33.31	74.00	-40.69	HORIZONTAL	Peak
2	1663.137	44.81	25.65	2.80	37.91	35.35	74.00	-38.65	HORIZONTAL	Peak
3	3376.523	45.92	28.83	4.09	36.99	41.85	68.20	-26.35	HORIZONTAL	Peak
4	4329.354	45.75	30.54	4.67	36.81	44.15	74.00	-29.85	HORIZONTAL	Peak
5	10600.000	40.34	39.59	7.46	37.34	50.05	68.20	-18.15	HORIZONTAL	Peak
6	15900.000	37.21	38.44	9.86	35.40	50.11	74.00	-23.89	HORIZONTAL	Peak

Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

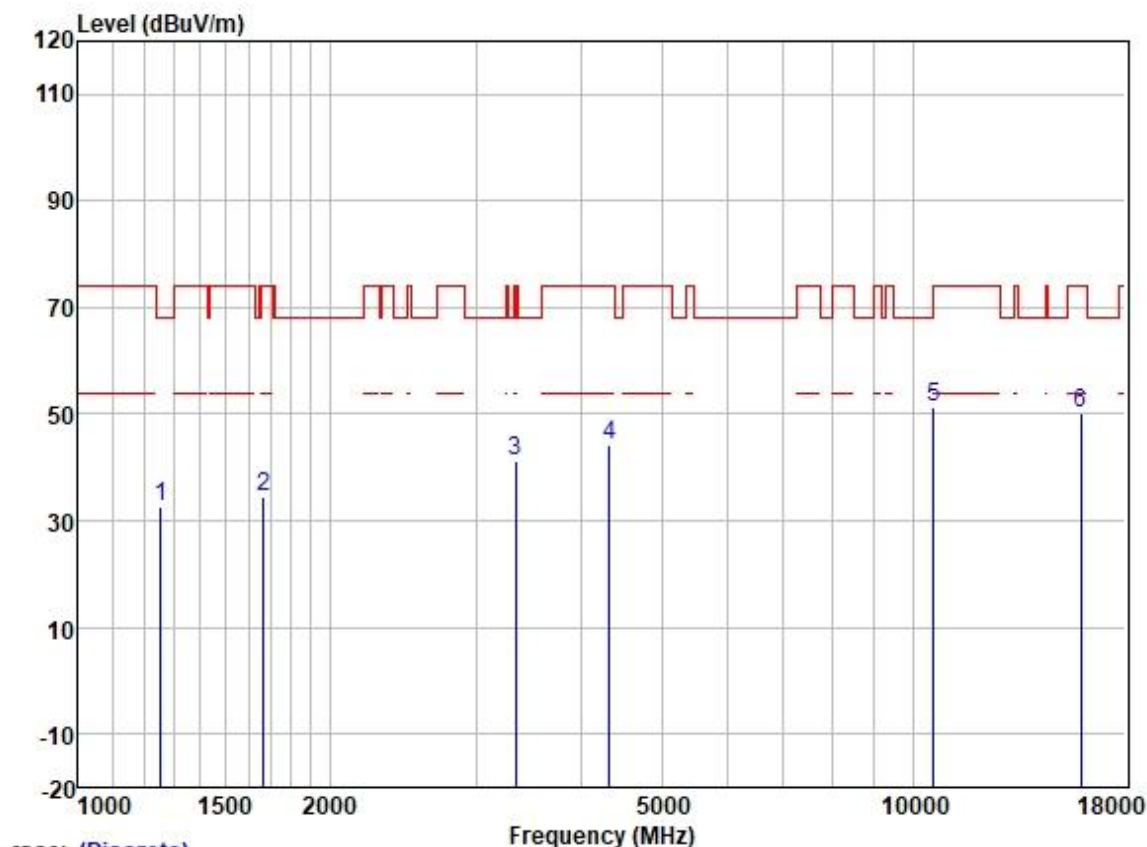

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1256.512	43.68	25.05	2.38	38.35	32.76	68.20	-35.44	VERTICAL	Peak
2	1667.951	43.84	25.66	2.80	37.91	34.39	74.00	-39.61	VERTICAL	Peak
3	3337.710	45.46	28.79	4.08	37.01	41.32	74.00	-32.68	VERTICAL	Peak
4	4329.354	45.82	30.54	4.67	36.81	44.22	74.00	-29.78	VERTICAL	Peak
5	10600.000	41.55	39.59	7.46	37.34	51.26	68.20	-16.94	VERTICAL	Peak
6	15900.000	37.34	38.44	9.86	35.40	50.24	74.00	-23.76	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

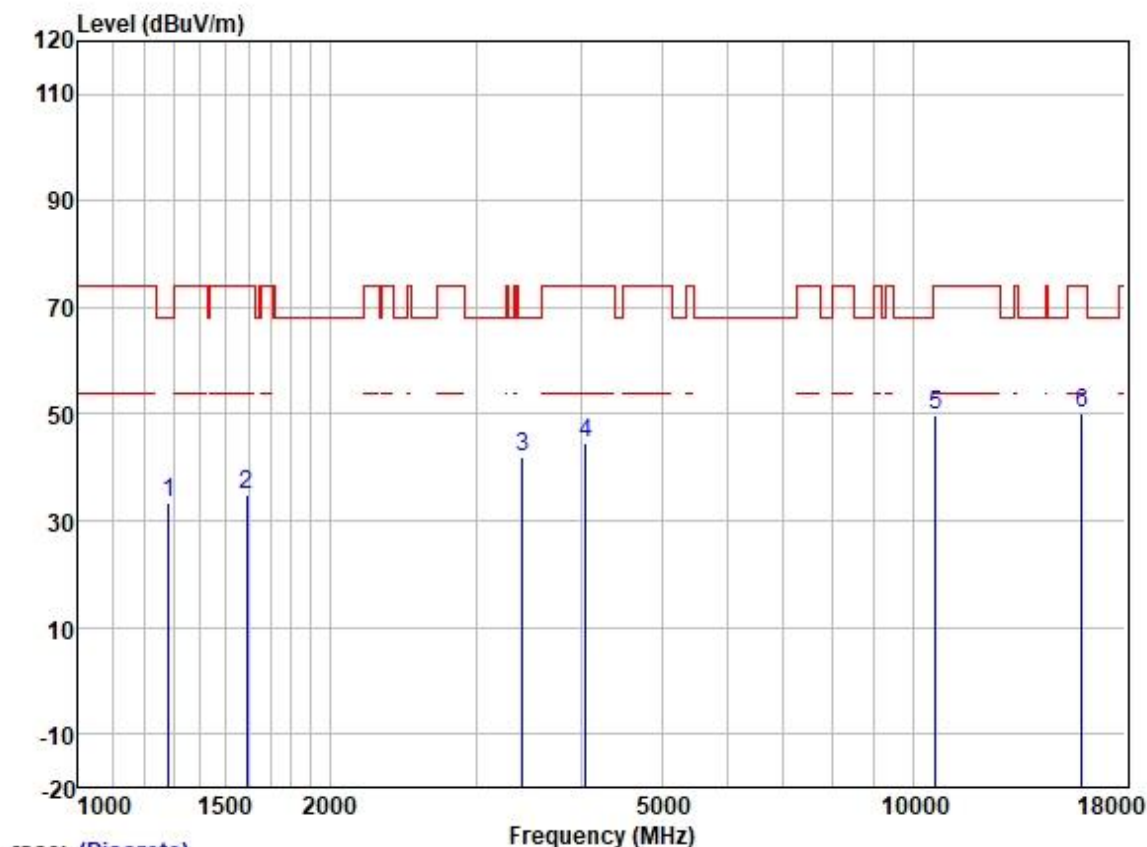

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1282.193	44.11	25.15	2.52	38.33	33.45	68.20	-34.75	HORIZONTAL	Peak
2	1592.571	44.55	25.57	2.80	37.98	34.94	74.00	-39.06	HORIZONTAL	Peak
3	3405.929	45.81	28.85	4.11	36.98	41.79	68.20	-26.41	HORIZONTAL	Peak
4	4050.904	47.01	29.87	4.60	36.80	44.68	74.00	-29.32	HORIZONTAL	Peak
5	10640.000	40.15	39.63	7.48	37.33	49.93	74.00	-24.07	HORIZONTAL	Peak
6	15960.000	37.39	38.37	9.85	35.40	50.21	74.00	-23.79	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

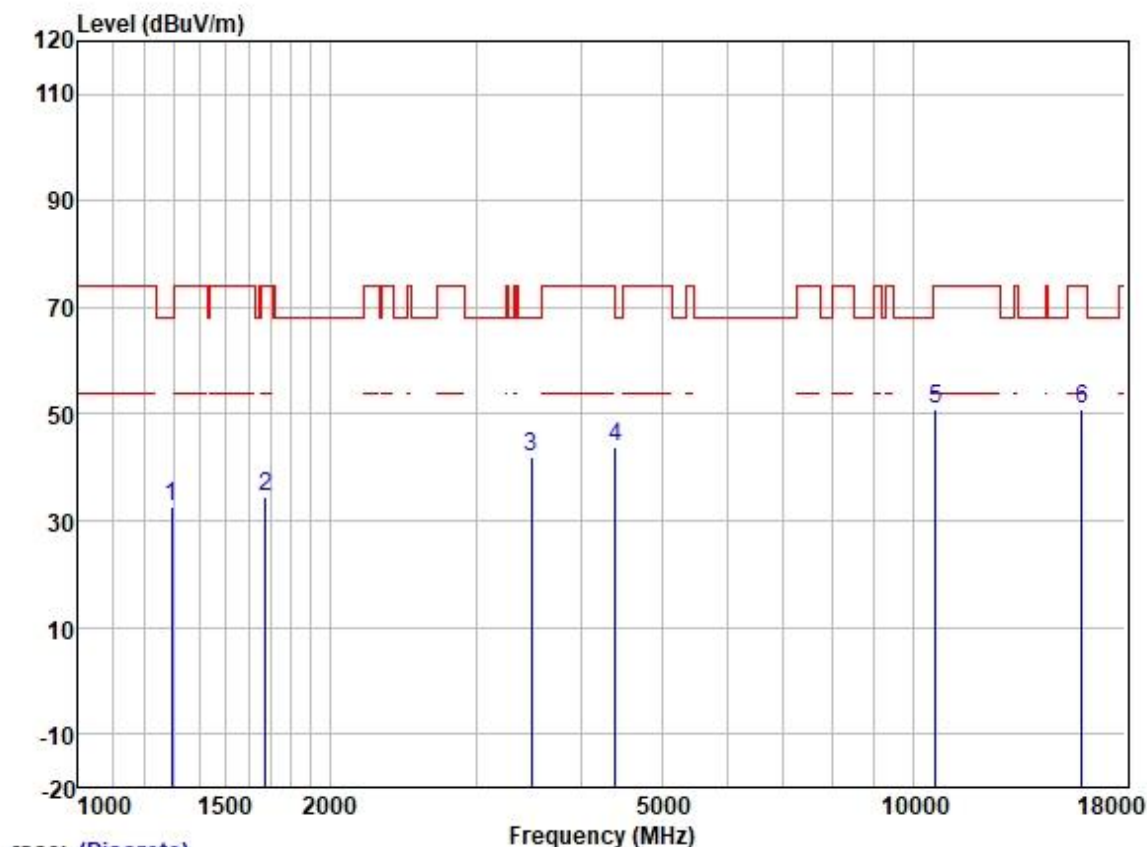


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1293.359	43.16	25.18	2.57	38.31	32.60	68.20	-35.60	VERTICAL	Peak
2	1677.621	44.05	25.68	2.80	37.91	34.62	74.00	-39.38	VERTICAL	Peak
3	3495.691	45.74	28.90	4.30	36.94	42.00	68.20	-26.20	VERTICAL	Peak
4	4405.090	45.45	30.68	4.70	36.81	44.02	68.20	-24.18	VERTICAL	Peak
5	10640.000	41.18	39.63	7.48	37.33	50.96	74.00	-23.04	VERTICAL	Peak
6	15960.000	38.25	38.37	9.85	35.40	51.07	74.00	-22.93	VERTICAL	Peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

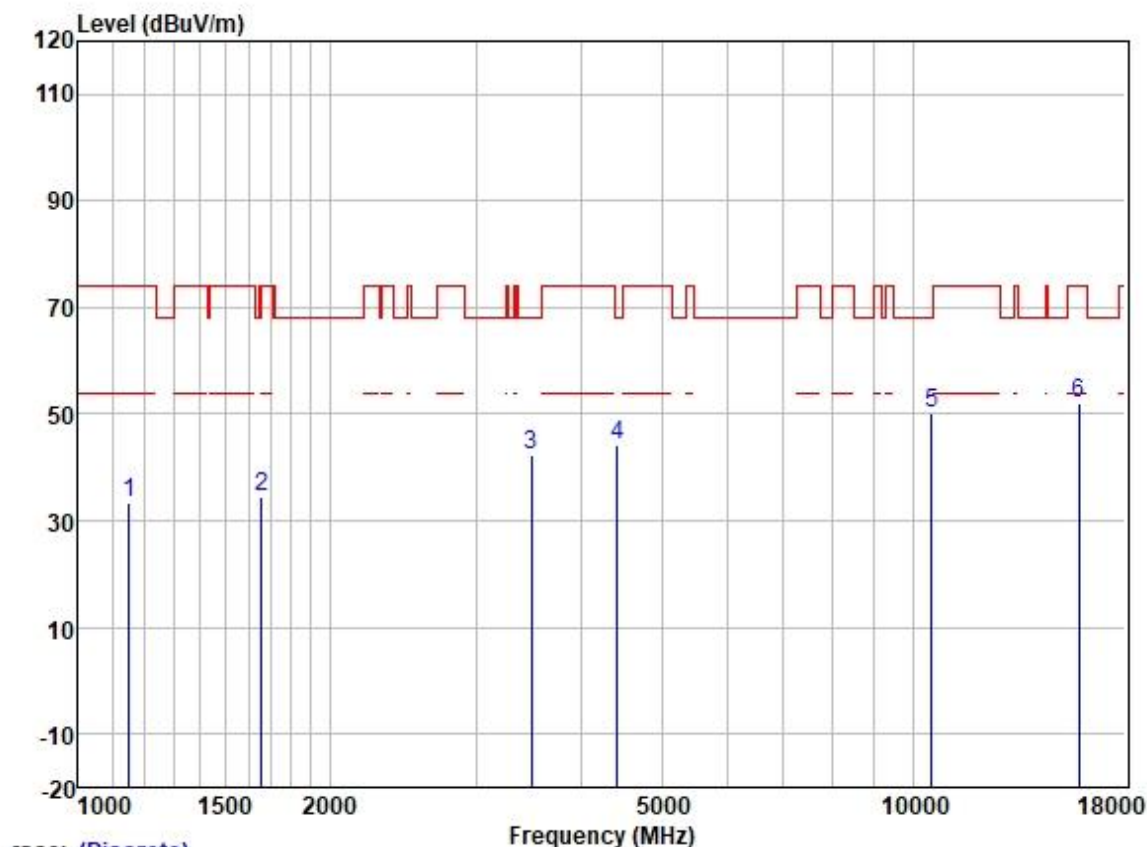

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1152.148	45.08	24.50	2.36	38.42	33.52	74.00	-40.48	HORIZONTAL	Peak
2	1658.337	43.99	25.65	2.80	37.93	34.51	68.20	-33.69	HORIZONTAL	Peak
3	3495.691	45.92	28.90	4.30	36.94	42.18	68.20	-26.02	HORIZONTAL	Peak
4	4430.628	45.52	30.72	4.78	36.81	44.21	68.20	-23.99	HORIZONTAL	Peak
5	10540.000	40.48	39.53	7.43	37.35	50.09	68.20	-18.11	HORIZONTAL	Peak
6	15810.000	38.89	38.61	9.86	35.39	51.97	74.00	-22.03	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

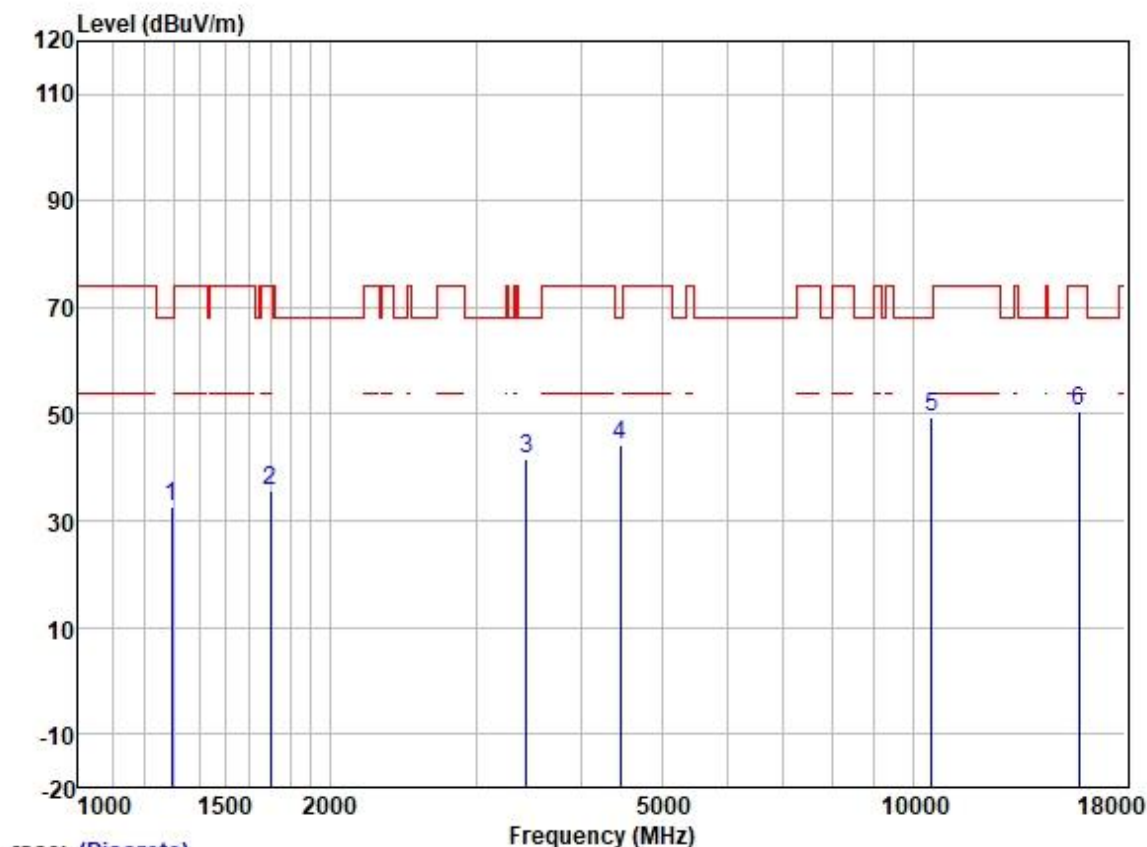

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1293.359	43.09	25.18	2.57	38.31	32.53	68.20	-35.67	VERTICAL	Peak
2	1697.129	45.03	25.71	2.80	37.89	35.65	74.00	-38.35	VERTICAL	Peak
3	3445.535	45.59	28.87	4.18	36.96	41.68	68.20	-26.52	VERTICAL	Peak
4	4456.315	45.48	30.75	4.88	36.81	44.30	68.20	-23.90	VERTICAL	Peak
5	10540.000	39.94	39.53	7.43	37.35	49.55	68.20	-18.65	VERTICAL	Peak
6	15810.000	37.62	38.61	9.86	35.39	50.70	74.00	-23.30	VERTICAL	Peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

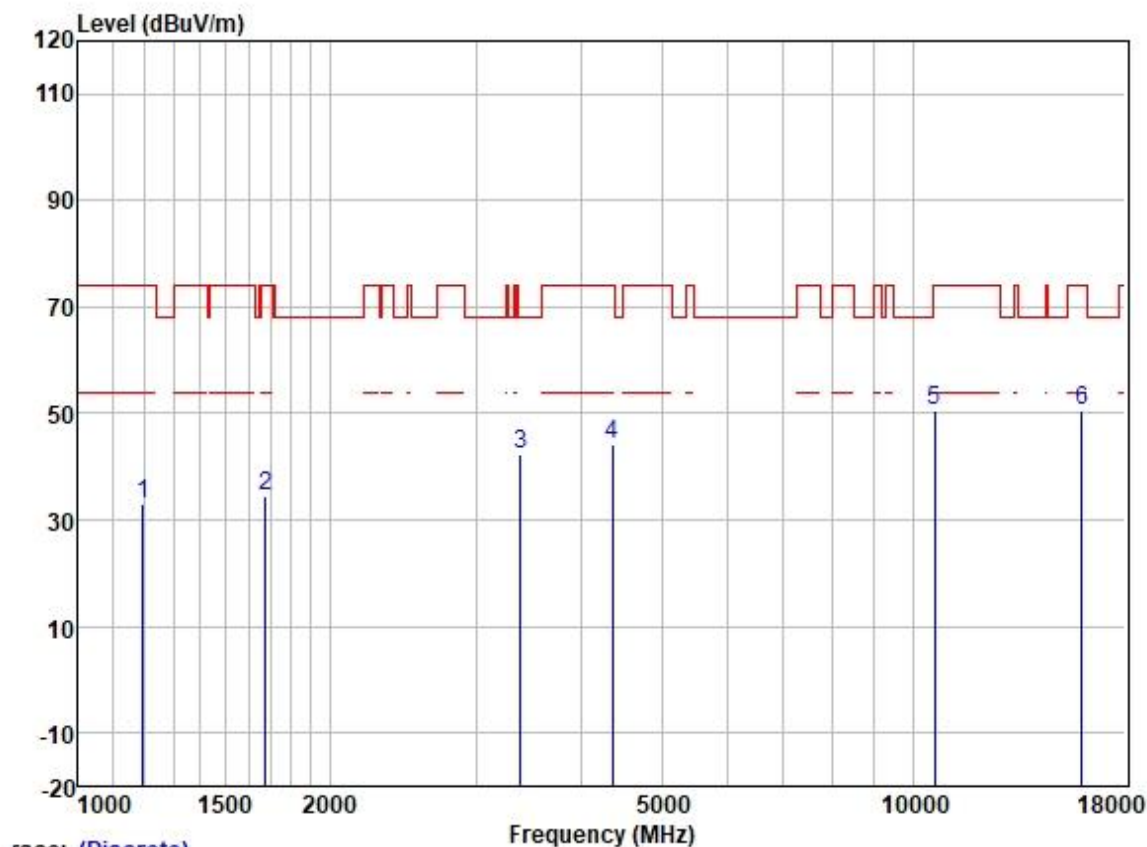


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1196.264	44.41	24.67	2.35	38.39	33.04	74.00	-40.96	HORIZONTAL	Peak
2	1677.621	44.07	25.68	2.80	37.91	34.64	74.00	-39.36	HORIZONTAL	Peak
3	3386.297	46.44	28.83	4.10	36.99	42.38	68.20	-25.82	HORIZONTAL	Peak
4	4367.058	45.71	30.62	4.68	36.81	44.20	74.00	-29.80	HORIZONTAL	Peak
5	10620.000	40.79	39.59	7.46	37.34	50.50	74.00	-23.50	HORIZONTAL	Peak
6	15930.000	37.84	38.37	9.85	35.40	50.66	74.00	-23.34	HORIZONTAL	Peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

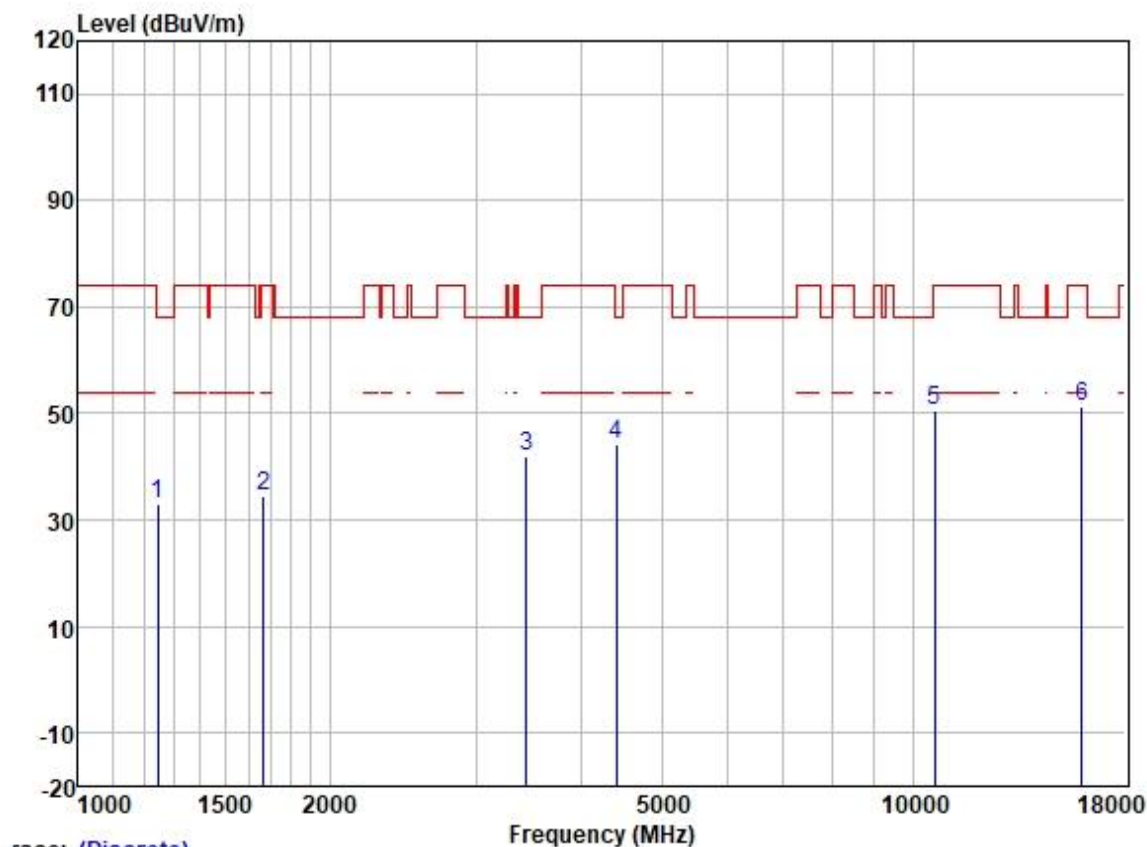

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1245.663	44.20	25.00	2.33	38.35	33.18	68.20	-35.02	VERTICAL	Peak
2	1667.951	44.06	25.66	2.80	37.91	34.61	74.00	-39.39	VERTICAL	Peak
3	3445.535	45.81	28.87	4.18	36.96	41.90	68.20	-26.30	VERTICAL	Peak
4	4417.841	45.74	30.70	4.74	36.81	44.37	68.20	-23.83	VERTICAL	Peak
5	10620.000	40.85	39.59	7.46	37.34	50.56	74.00	-23.44	VERTICAL	Peak
6	15930.000	38.34	38.37	9.85	35.40	51.16	74.00	-22.84	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

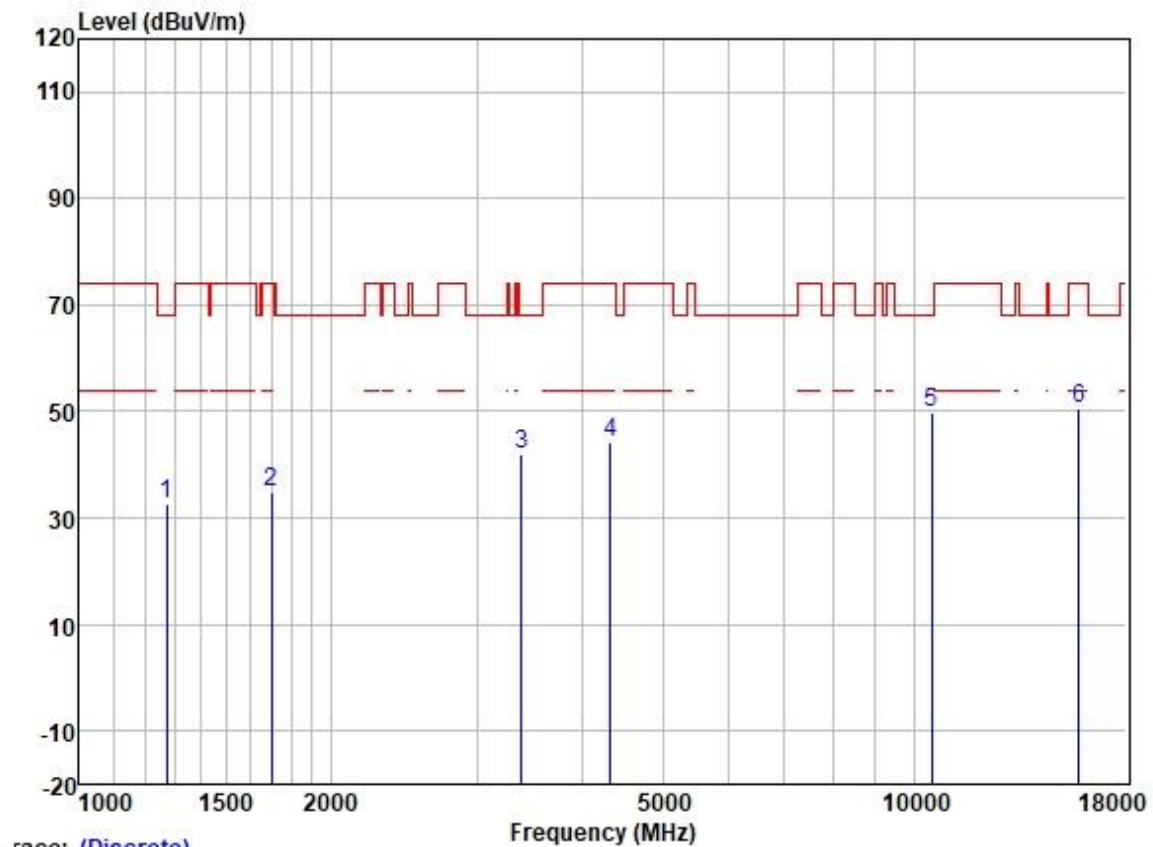


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1271.123	43.45	25.11	2.46	38.33	32.69	68.20	-35.51	HORIZONTAL	Peak
2	1697.129	44.36	25.71	2.80	37.89	34.98	74.00	-39.02	HORIZONTAL	Peak
3	3386.297	45.98	28.83	4.10	36.99	41.92	68.20	-26.28	HORIZONTAL	Peak
4	4329.354	45.73	30.54	4.67	36.81	44.13	74.00	-29.87	HORIZONTAL	Peak
5	10520.000	40.07	39.50	7.42	37.35	49.64	68.20	-18.56	HORIZONTAL	Peak
6	15780.000	37.43	38.70	9.86	35.39	50.60	74.00	-23.40	HORIZONTAL	Peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

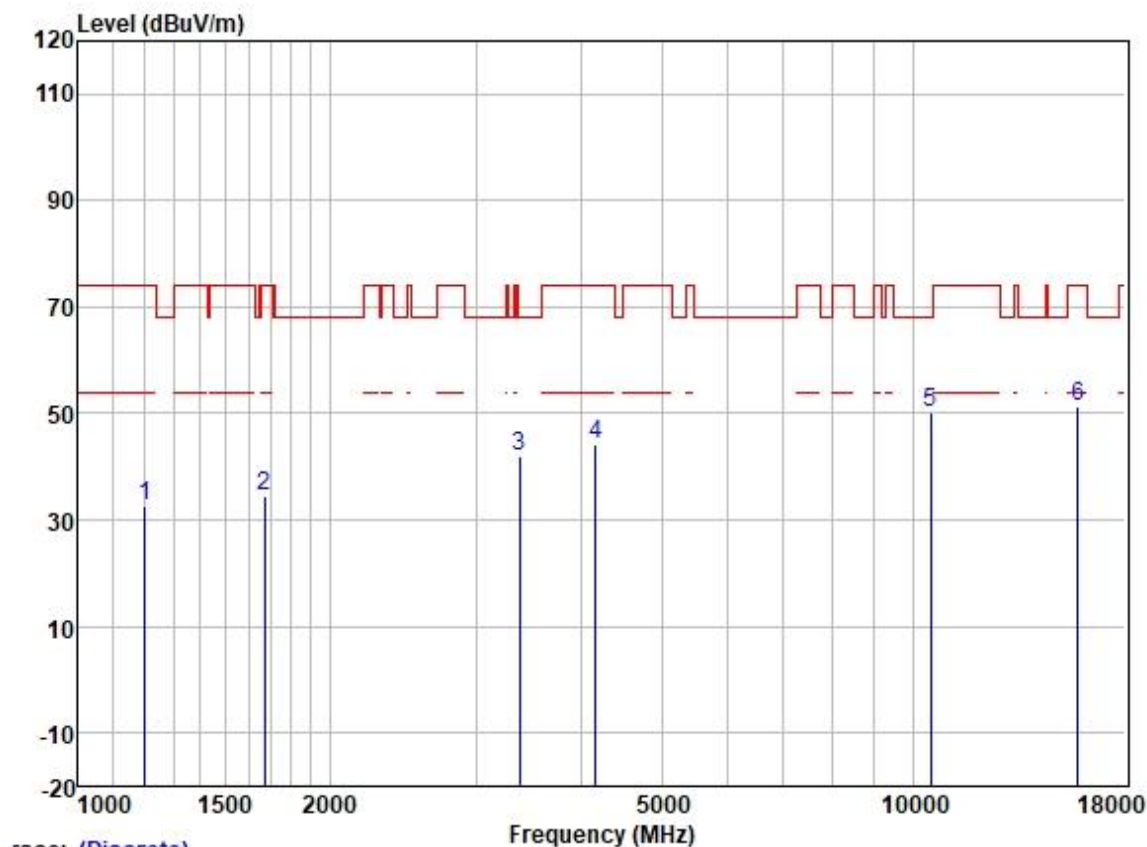


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1203.199	44.09	24.70	2.34	38.39	32.74	74.00	-41.26	VERTICAL	Peak
2	1672.779	43.84	25.67	2.80	37.91	34.40	74.00	-39.60	VERTICAL	Peak
3	3376.523	45.89	28.83	4.09	36.99	41.82	68.20	-26.38	VERTICAL	Peak
4	4169.698	46.44	30.09	4.60	36.80	44.33	74.00	-29.67	VERTICAL	Peak
5	10520.000	40.68	39.50	7.42	37.35	50.25	68.20	-17.95	VERTICAL	Peak
6	15780.000	38.07	38.70	9.86	35.39	51.24	74.00	-22.76	VERTICAL	Peak




Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

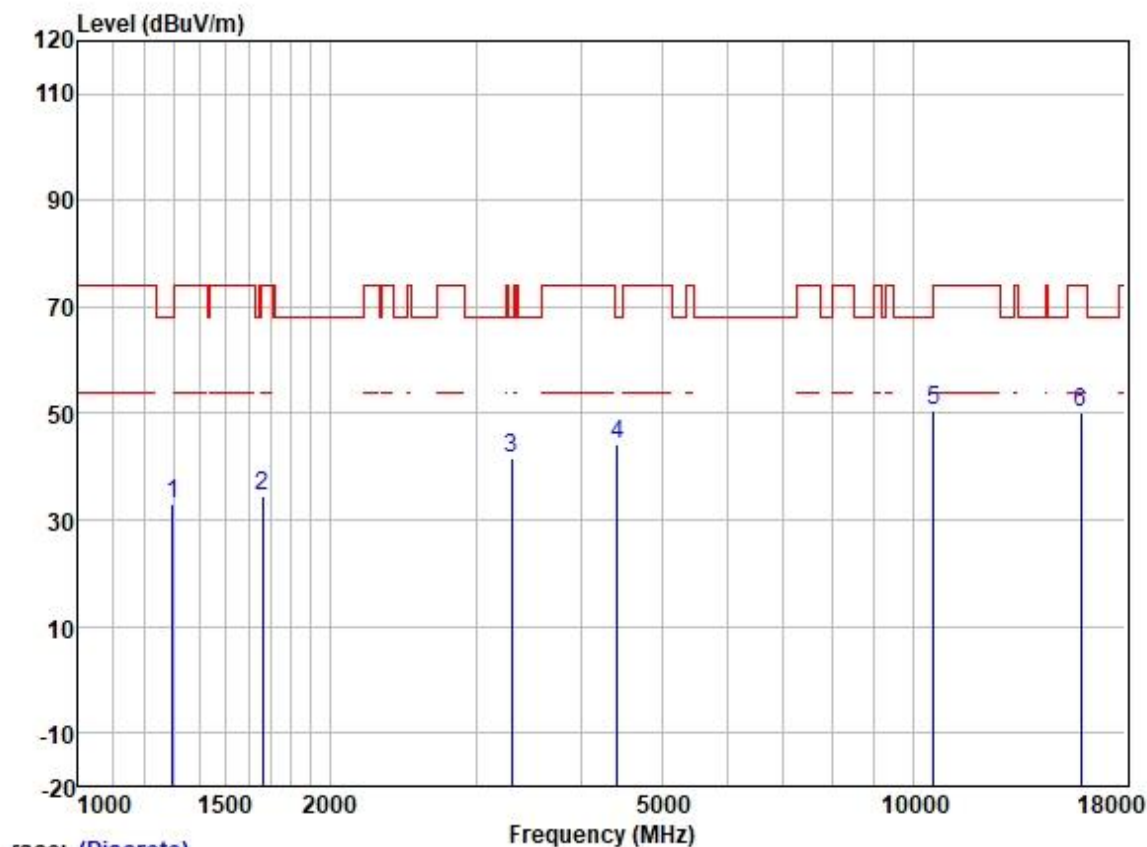

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1297.103	43.60	25.19	2.58	38.31	33.06	68.20	-35.14	HORIZONTAL	Peak
2	1663.137	43.82	25.65	2.80	37.91	34.36	74.00	-39.64	HORIZONTAL	Peak
3	3308.894	45.90	28.76	4.06	37.03	41.69	68.20	-26.51	HORIZONTAL	Peak
4	4430.628	45.34	30.72	4.78	36.81	44.03	68.20	-24.17	HORIZONTAL	Peak
5	10600.000	40.71	39.59	7.46	37.34	50.42	68.20	-17.78	HORIZONTAL	Peak
6	15900.000	37.35	38.44	9.86	35.40	50.25	74.00	-23.75	HORIZONTAL	Peak




Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

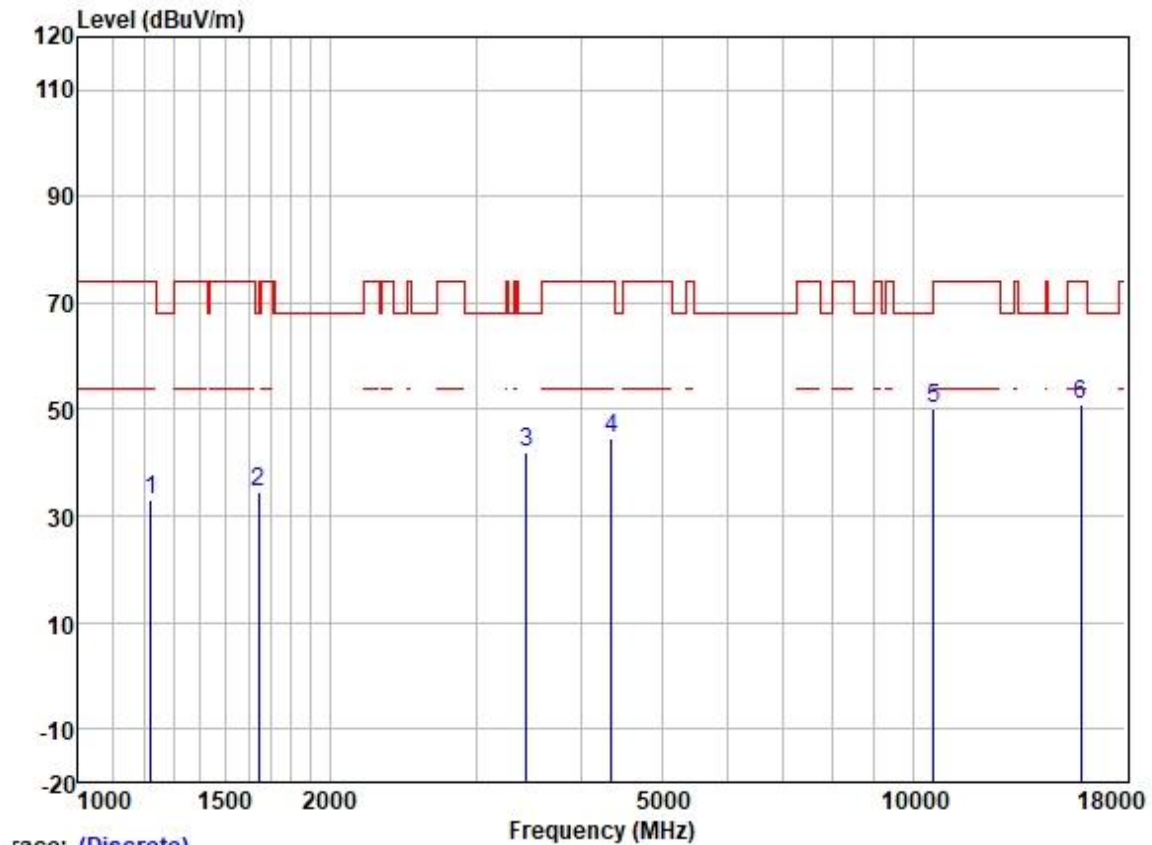

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
		dBuV	dB/m	dB	dB			dB		
1	1220.714	44.31	24.82	2.32	38.37	33.08	74.00	-40.92	VERTICAL	Peak
2	1644.019	44.07	25.63	2.80	37.93	34.57	68.20	-33.63	VERTICAL	Peak
3	3445.535	45.71	28.87	4.18	36.96	41.80	68.20	-26.40	VERTICAL	Peak
4	4354.454	46.00	30.59	4.68	36.81	44.46	74.00	-29.54	VERTICAL	Peak
5	10600.000	40.39	39.59	7.46	37.34	50.10	68.20	-18.10	VERTICAL	Peak
6	15900.000	38.06	38.44	9.86	35.40	50.96	74.00	-23.04	VERTICAL	Peak




Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

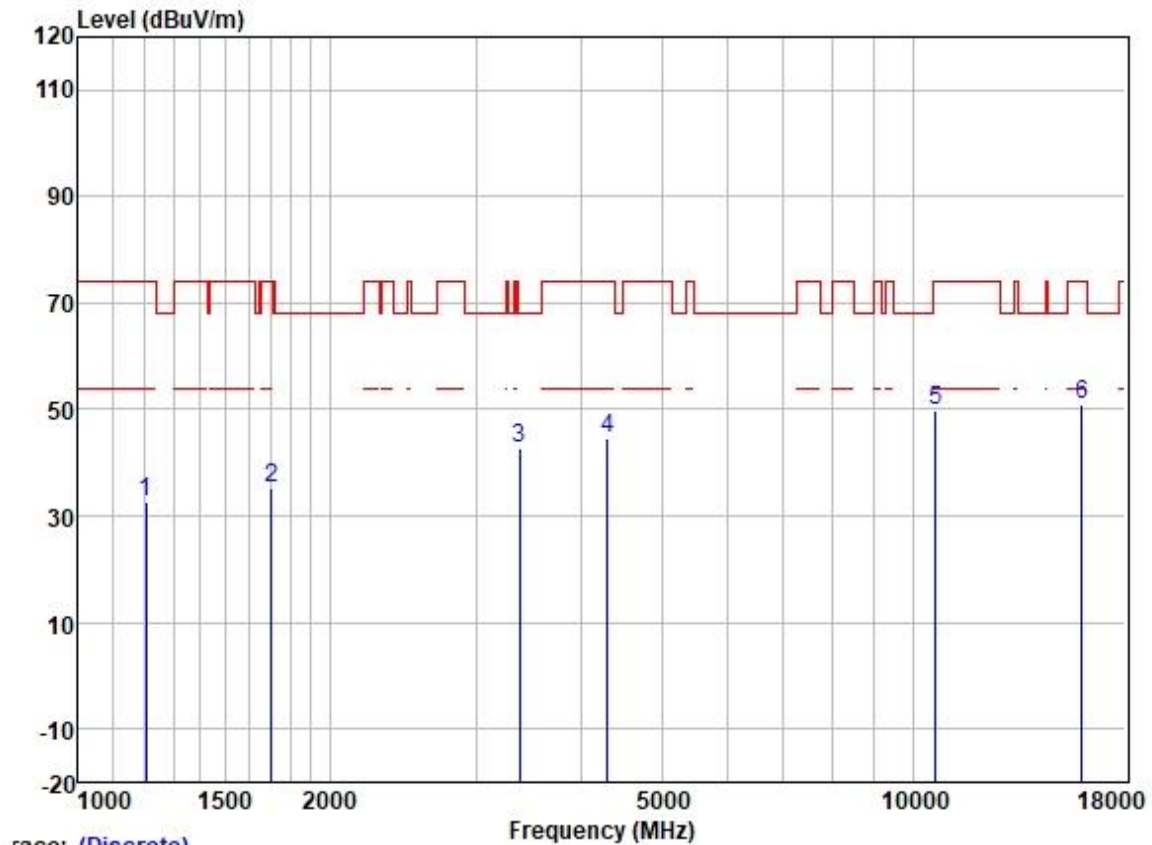

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1206.682	43.83	24.72	2.33	38.39	32.49	74.00	-41.51	HORIZONTAL	Peak
2	1702.042	44.69	25.72	2.80	37.89	35.32	74.00	-38.68	HORIZONTAL	Peak
3	3376.523	46.67	28.83	4.09	36.99	42.60	68.20	-25.60	HORIZONTAL	Peak
4	4304.400	46.25	30.48	4.65	36.81	44.57	74.00	-29.43	HORIZONTAL	Peak
5	10640.000	40.11	39.63	7.48	37.33	49.89	74.00	-24.11	HORIZONTAL	Peak
6	15960.000	37.94	38.37	9.85	35.40	50.76	74.00	-23.24	HORIZONTAL	Peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

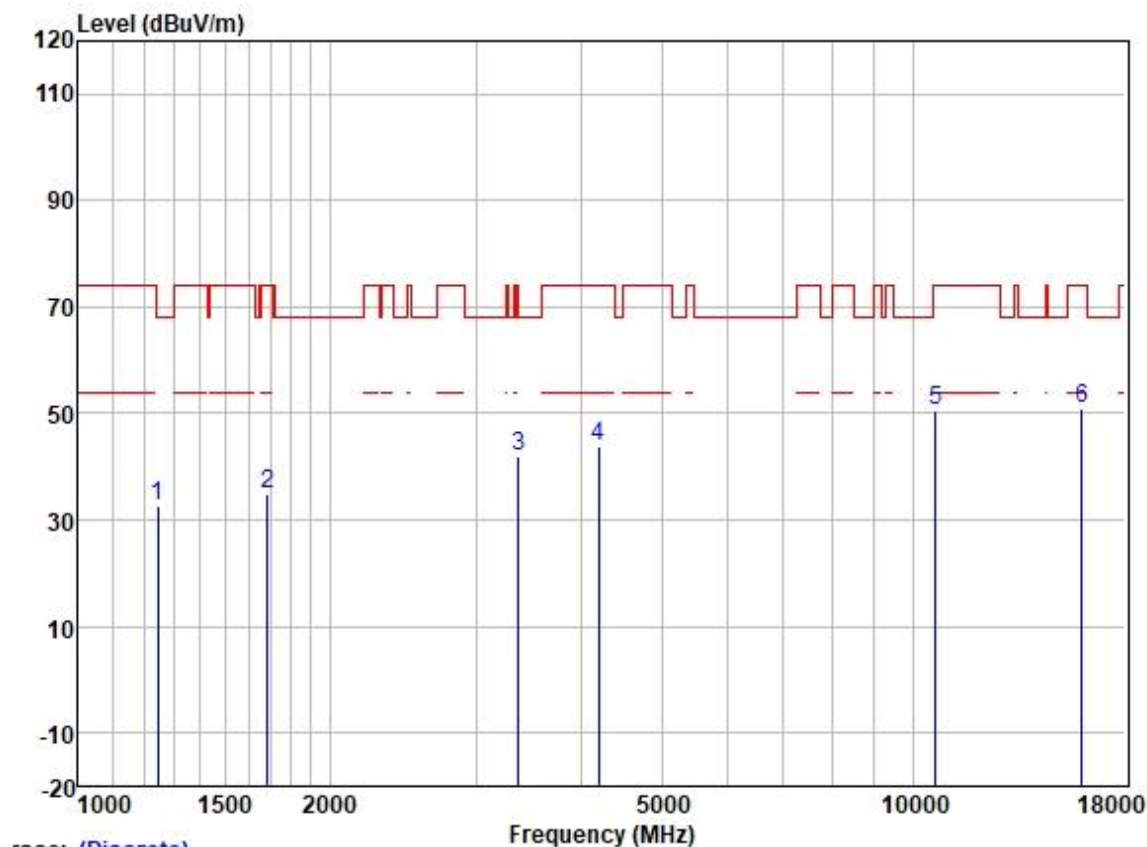


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1245.663	43.59	25.00	2.33	38.35	32.57	68.20	-35.63	VERTICAL	Peak
2	1687.347	44.44	25.69	2.80	37.91	35.02	74.00	-38.98	VERTICAL	Peak
3	3366.778	45.96	28.82	4.09	36.99	41.88	68.20	-26.32	VERTICAL	Peak
4	4206.011	45.98	30.18	4.60	36.81	43.95	74.00	-30.05	VERTICAL	Peak
5	10640.000	40.76	39.63	7.48	37.33	50.54	74.00	-23.46	VERTICAL	Peak
6	15960.000	37.98	38.37	9.85	35.40	50.80	74.00	-23.20	VERTICAL	Peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

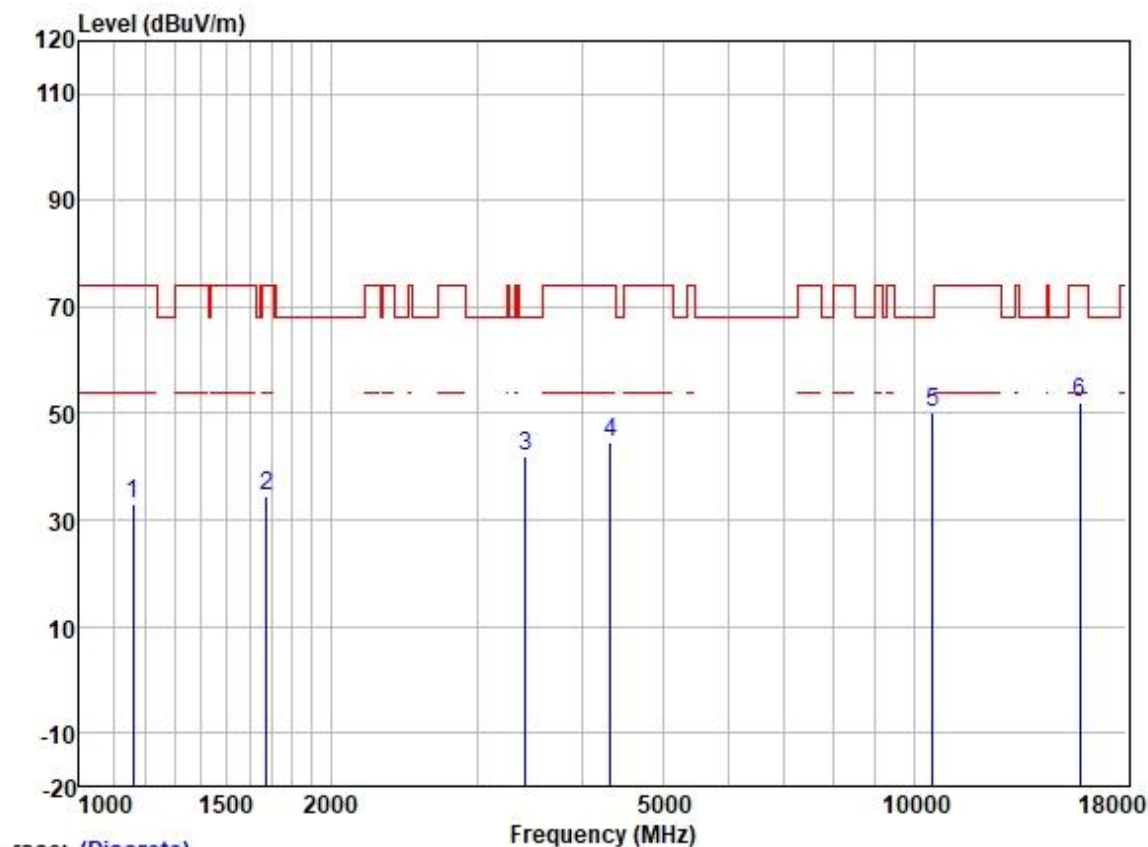

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1158.828	44.46	24.52	2.40	38.42	32.96	74.00	-41.04	HORIZONTAL	Peak
2	1677.621	44.09	25.68	2.80	37.91	34.66	74.00	-39.34	HORIZONTAL	Peak
3	3425.675	45.82	28.86	4.15	36.97	41.86	68.20	-26.34	HORIZONTAL	Peak
4	4329.354	46.05	30.54	4.67	36.81	44.45	74.00	-29.55	HORIZONTAL	Peak
5	10540.000	40.42	39.53	7.43	37.35	50.03	68.20	-18.17	HORIZONTAL	Peak
6	15810.000	38.81	38.61	9.86	35.39	51.89	74.00	-22.11	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

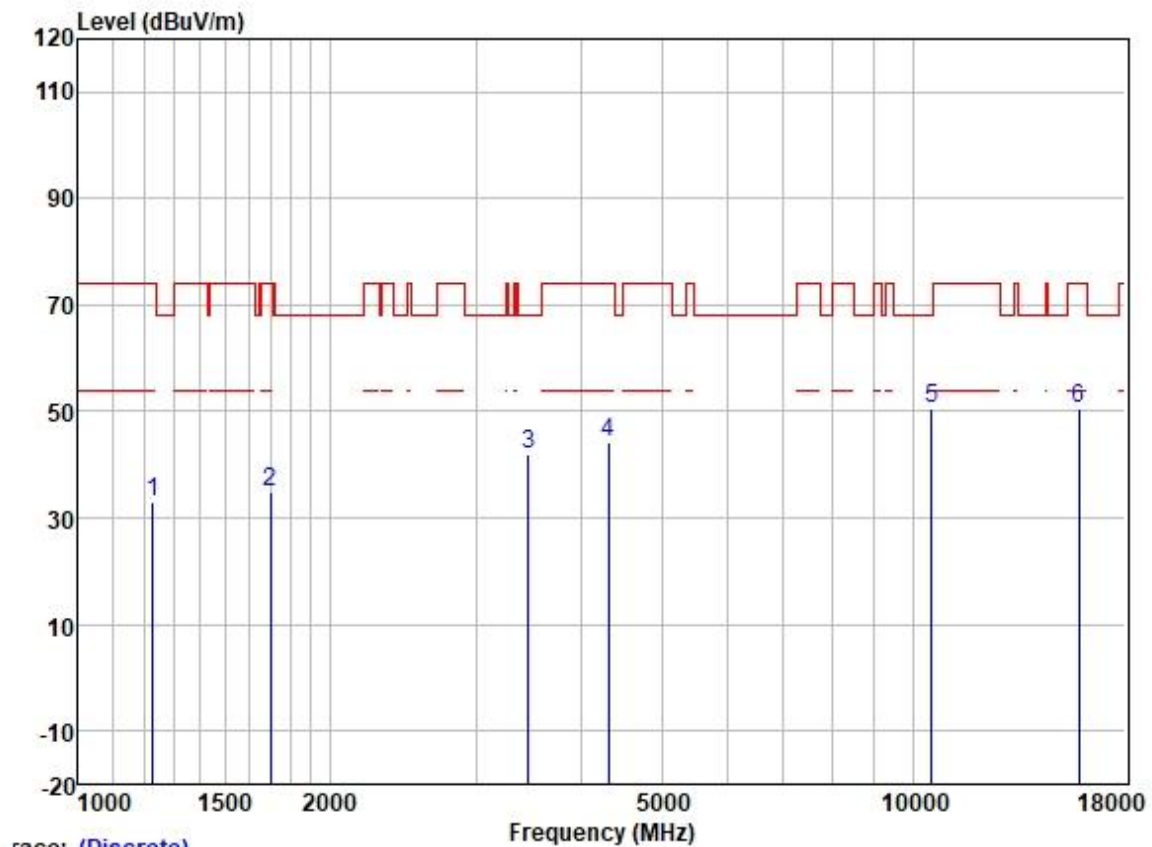


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1227.791	44.14	24.88	2.31	38.37	32.96	74.00	-41.04	VERTICAL	Peak
2	1697.129	44.31	25.71	2.80	37.89	34.93	74.00	-39.07	VERTICAL	Peak
3	3465.510	45.83	28.88	4.22	36.95	41.98	68.20	-26.22	VERTICAL	Peak
4	4316.859	45.97	30.51	4.66	36.81	44.33	74.00	-29.67	VERTICAL	Peak
5	10540.000	40.94	39.53	7.43	37.35	50.55	68.20	-17.65	VERTICAL	Peak
6	15810.000	37.55	38.61	9.86	35.39	50.63	74.00	-23.37	VERTICAL	Peak




Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

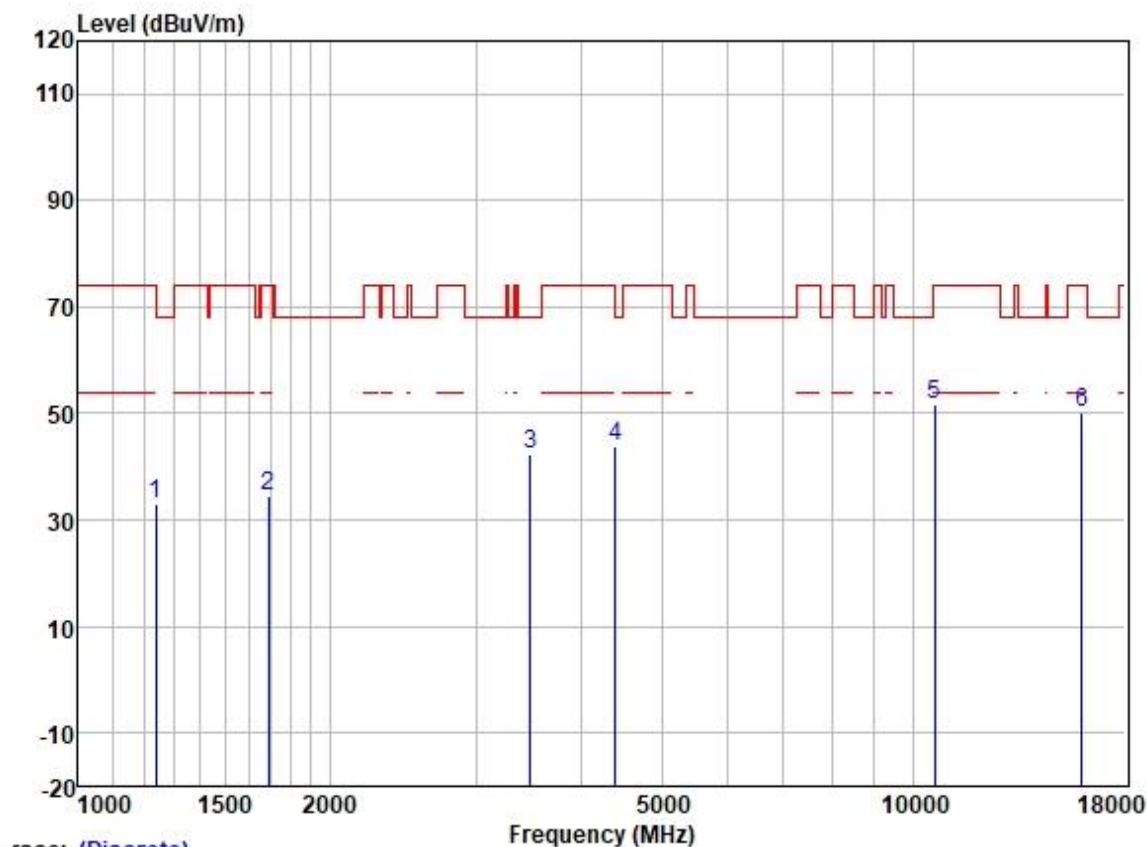

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1238.483	44.10	24.96	2.30	38.35	33.01	74.00	-40.99	HORIZONTAL	Peak
2	1692.231	43.77	25.70	2.80	37.89	34.38	74.00	-39.62	HORIZONTAL	Peak
3	3485.601	46.03	28.89	4.27	36.95	42.24	68.20	-25.96	HORIZONTAL	Peak
4	4405.090	45.23	30.68	4.70	36.81	43.80	68.20	-24.40	HORIZONTAL	Peak
5	10620.000	41.83	39.59	7.46	37.34	51.54	74.00	-22.46	HORIZONTAL	Peak
6	15930.000	37.50	38.37	9.85	35.40	50.32	74.00	-23.68	HORIZONTAL	Peak




Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

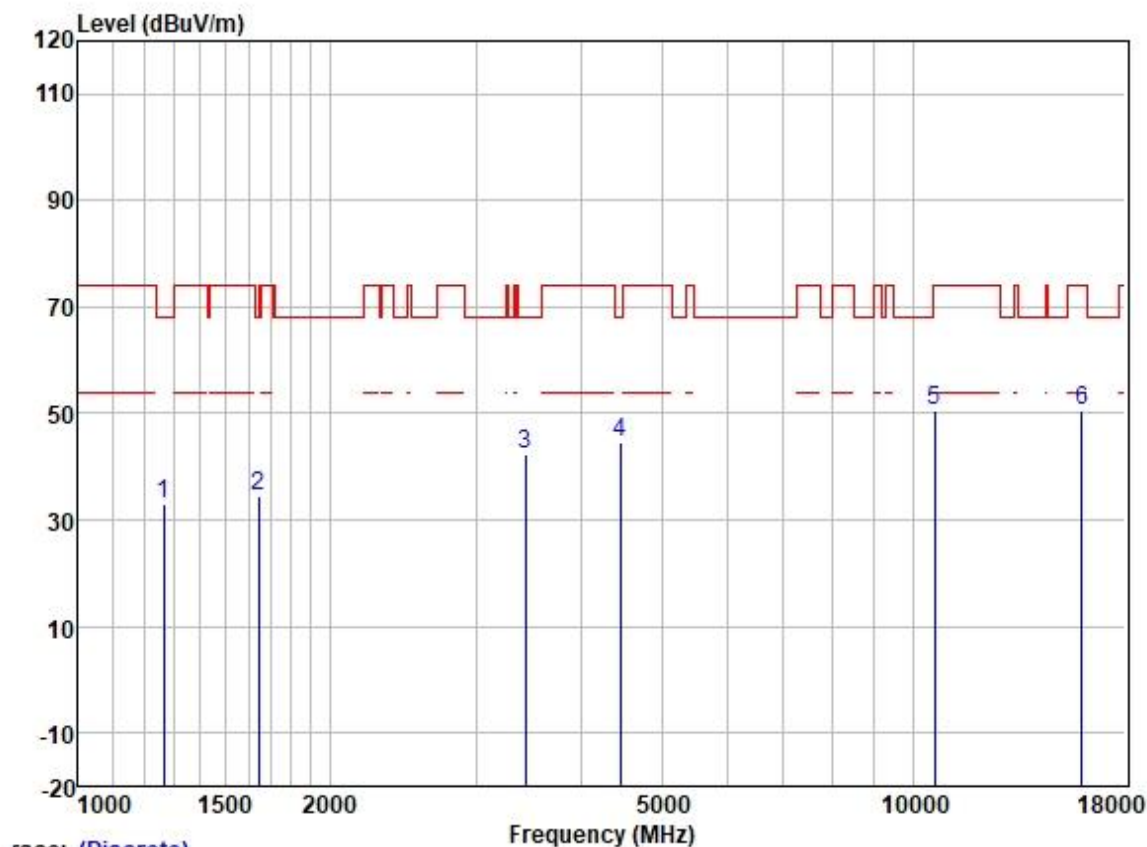

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1267.454	43.63	25.10	2.44	38.33	32.84	68.20	-35.36	VERTICAL	Peak
2	1644.019	44.10	25.63	2.80	37.93	34.60	68.20	-33.60	VERTICAL	Peak
3	3435.590	46.14	28.87	4.16	36.97	42.20	68.20	-26.00	VERTICAL	Peak
4	4456.315	45.83	30.75	4.88	36.81	44.65	68.20	-23.55	VERTICAL	Peak
5	10620.000	40.73	39.59	7.46	37.34	50.44	74.00	-23.56	VERTICAL	Peak
6	15930.000	37.89	38.37	9.85	35.40	50.71	74.00	-23.29	VERTICAL	Peak




Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

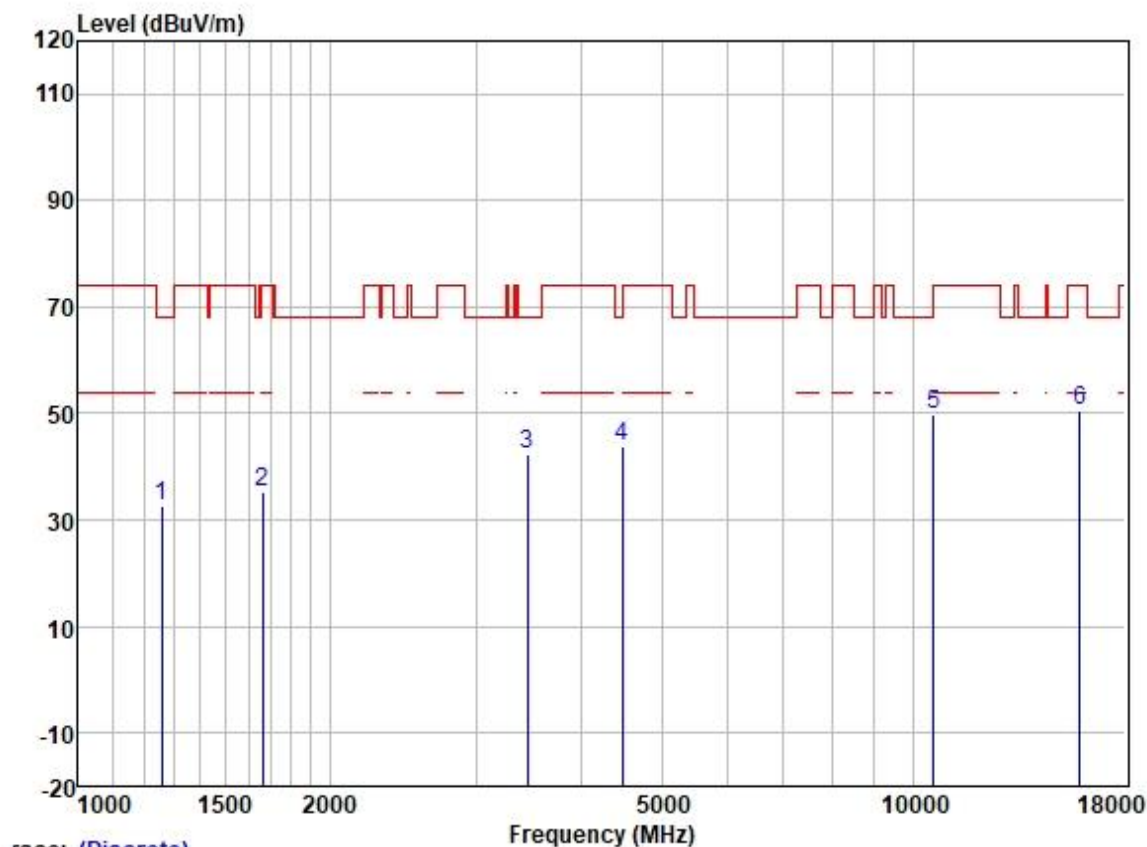

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
		dBuV	dB/m	dB	dB			dB		
1	1260.149	43.49	25.07	2.40	38.35	32.61	68.20	-35.59	HORIZONTAL	Peak
2	1663.137	44.53	25.65	2.80	37.91	35.07	74.00	-38.93	HORIZONTAL	Peak
3	3455.508	46.27	28.88	4.20	36.96	42.39	68.20	-25.81	HORIZONTAL	Peak
4	4482.150	45.06	30.78	4.99	36.81	44.02	68.20	-24.18	HORIZONTAL	Peak
5	10580.000	40.19	39.56	7.45	37.34	49.86	68.20	-18.34	HORIZONTAL	Peak
6	15870.000	37.68	38.52	9.86	35.40	50.66	74.00	-23.34	HORIZONTAL	Peak




Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

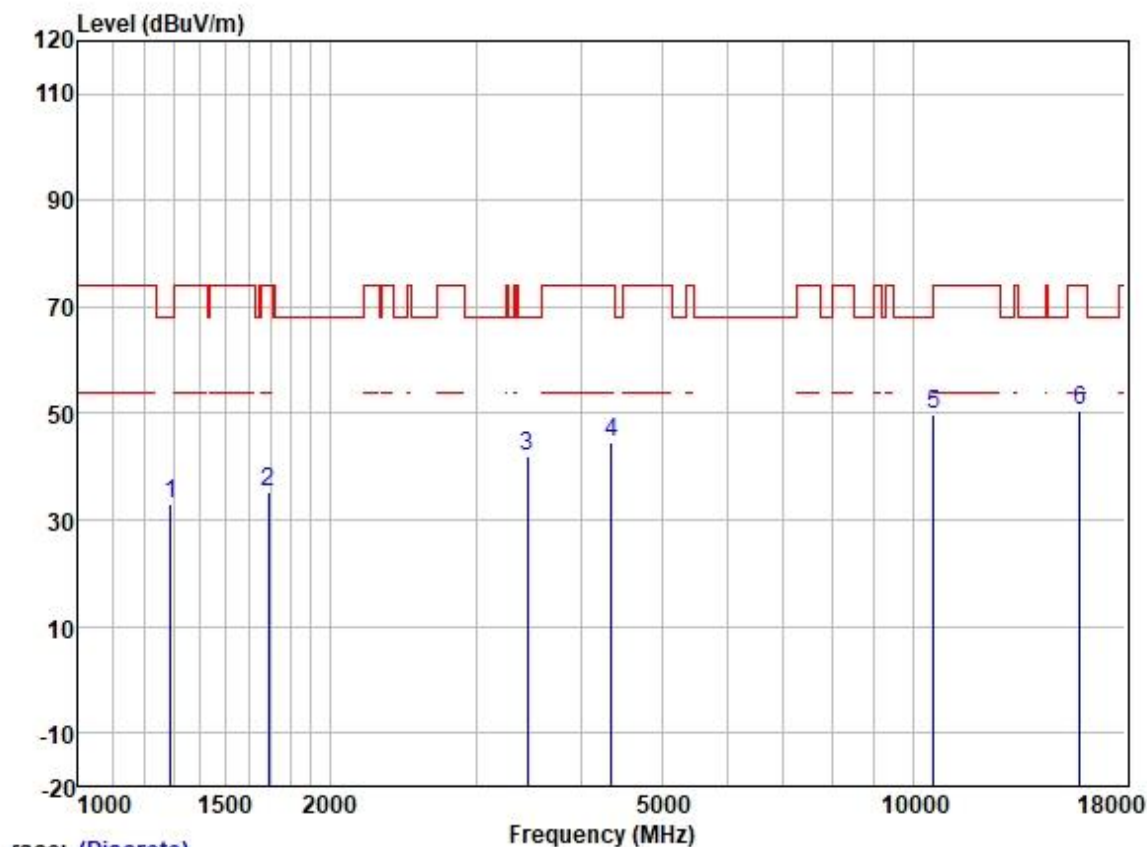

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	43.46	25.17	2.55	38.31	32.87	68.20	-35.33	VERTICAL	Peak
2	1692.231	44.66	25.70	2.80	37.89	35.27	74.00	-38.73	VERTICAL	Peak
3	3455.508	45.73	28.88	4.20	36.96	41.85	68.20	-26.35	VERTICAL	Peak
4	4354.454	46.11	30.59	4.68	36.81	44.57	74.00	-29.43	VERTICAL	Peak
5	10580.000	40.30	39.56	7.45	37.34	49.97	68.20	-18.23	VERTICAL	Peak
6	15870.000	37.62	38.52	9.86	35.40	50.60	74.00	-23.40	VERTICAL	Peak




Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

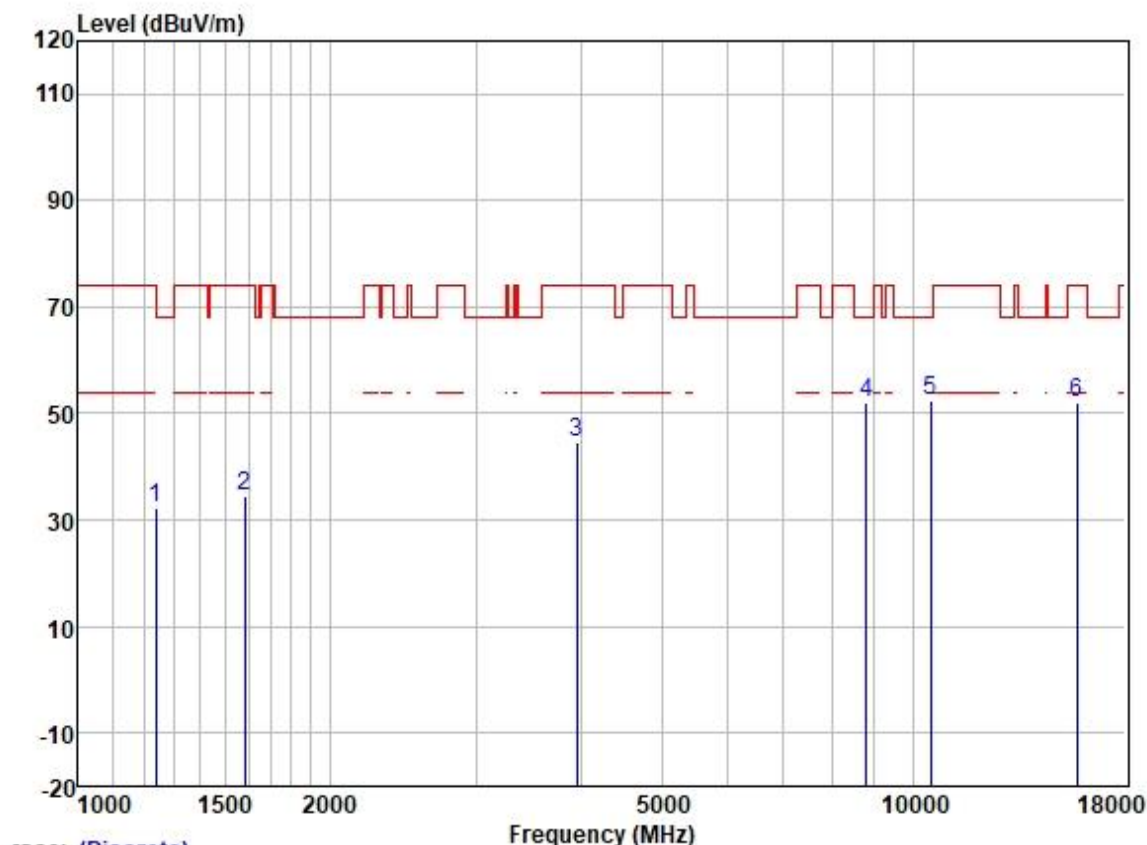

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
		dBuV	dB/m	dB	dB			dB		
1	1238.483	43.49	24.96	2.30	38.35	32.40	74.00	-41.60	HORIZONTAL	Peak
2	1583.392	44.17	25.56	2.80	38.00	34.53	74.00	-39.47	HORIZONTAL	Peak
3	3958.309	47.07	29.75	4.60	36.81	44.61	74.00	-29.39	HORIZONTAL	Peak
4	8789.516	45.05	37.33	7.24	37.54	52.08	68.20	-16.12	HORIZONTAL	Peak
5	10500.000	43.01	39.50	7.42	37.35	52.58	68.20	-15.62	HORIZONTAL	Peak
6	15750.000	38.72	38.70	9.86	35.39	51.89	74.00	-22.11	HORIZONTAL	Peak




Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

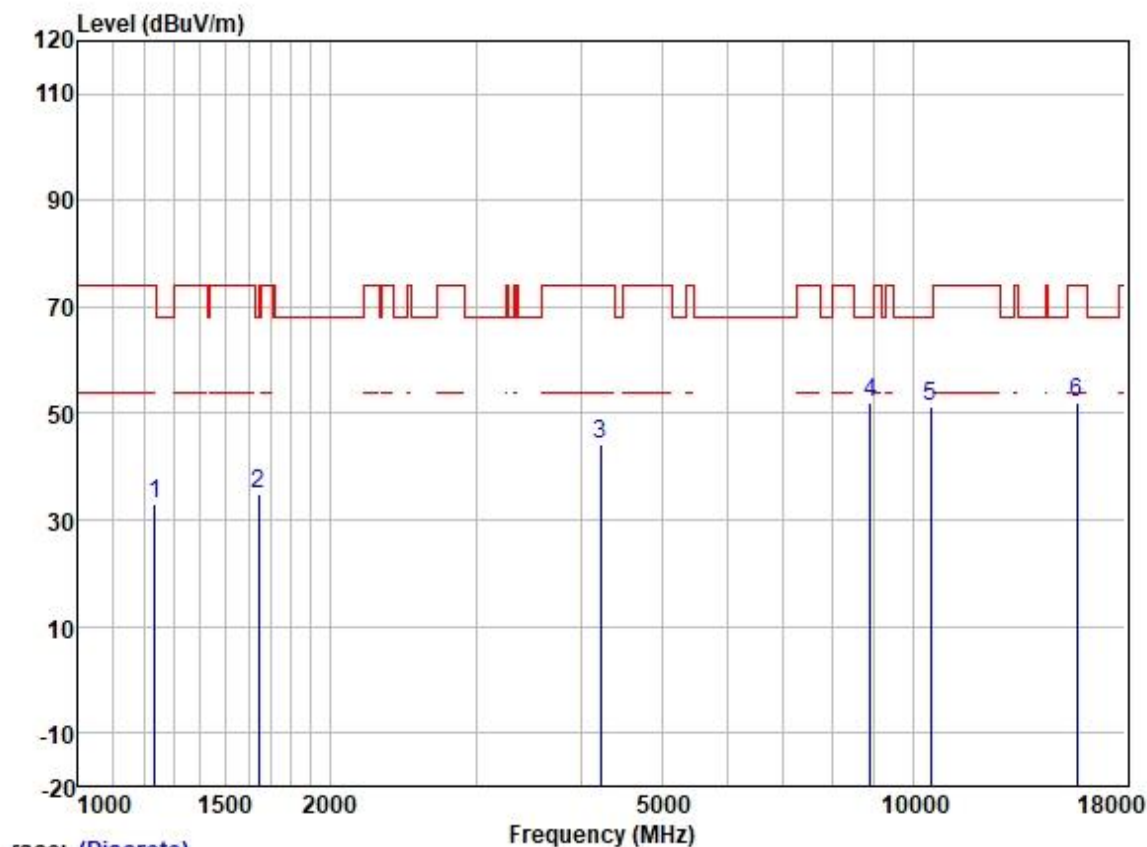

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1234.909	44.11	24.93	2.30	38.37	32.97	74.00	-41.03	VERTICAL	Peak
2	1644.019	44.30	25.63	2.80	37.93	34.80	68.20	-33.40	VERTICAL	Peak
3	4230.396	46.08	30.26	4.61	36.81	44.14	74.00	-29.86	VERTICAL	Peak
4	8891.725	44.67	37.37	7.42	37.52	51.94	68.20	-16.26	VERTICAL	Peak
5	10500.000	41.81	39.50	7.42	37.35	51.38	68.20	-16.82	VERTICAL	Peak
6	15750.000	38.79	38.70	9.86	35.39	51.96	74.00	-22.04	VERTICAL	Peak




Test Mode: 17; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

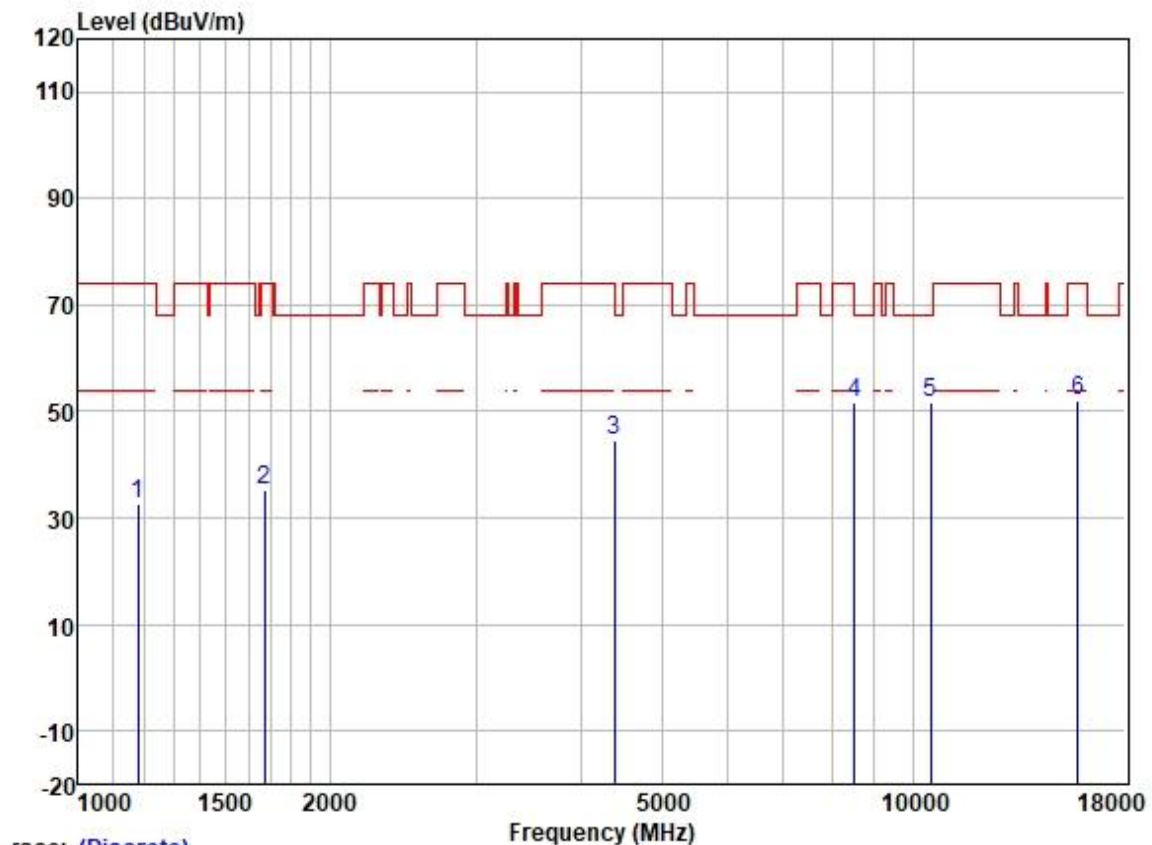

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1179.100	44.14	24.59	2.38	38.40	32.71	74.00	-41.29	HORIZONTAL	Peak
2	1672.779	44.55	25.67	2.80	37.91	35.11	74.00	-38.89	HORIZONTAL	Peak
3	4392.376	46.11	30.66	4.70	36.81	44.66	74.00	-29.34	HORIZONTAL	Peak
4	8514.456	45.19	37.17	6.73	37.57	51.52	68.20	-16.68	HORIZONTAL	Peak
5	10520.000	42.27	39.50	7.42	37.35	51.84	68.20	-16.36	HORIZONTAL	Peak
6	15780.000	38.95	38.70	9.86	35.39	52.12	74.00	-21.88	HORIZONTAL	Peak


Test Mode: 17; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

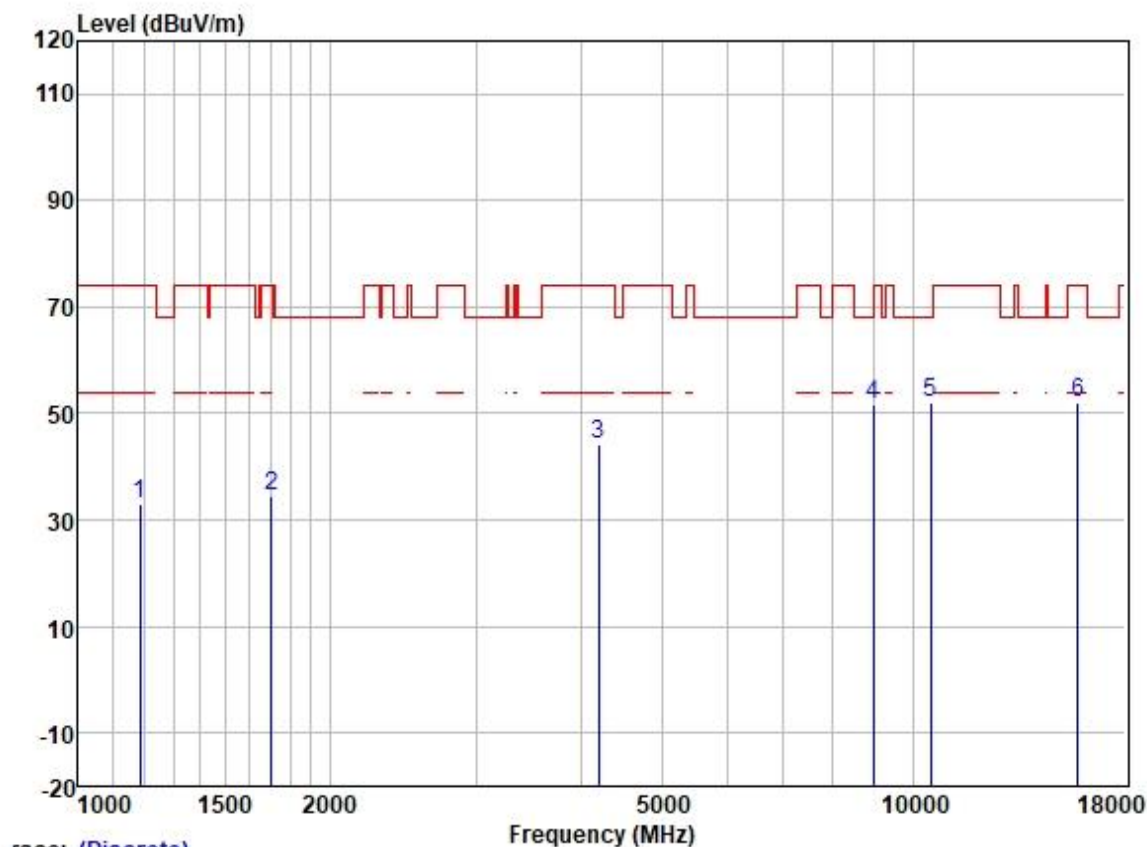

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
		dBuV	dB/m	dB	dB			dB		
1	1185.936	44.26	24.62	2.37	38.40	32.85	74.00	-41.15	VERTICAL	Peak
2	1702.042	43.86	25.72	2.80	37.89	34.49	74.00	-39.51	VERTICAL	Peak
3	4206.011	46.39	30.18	4.60	36.81	44.36	74.00	-29.64	VERTICAL	Peak
4	8969.161	44.40	37.39	7.53	37.51	51.81	68.20	-16.39	VERTICAL	Peak
5	10520.000	42.35	39.50	7.42	37.35	51.92	68.20	-16.28	VERTICAL	Peak
6	15780.000	38.83	38.70	9.86	35.39	52.00	74.00	-22.00	VERTICAL	Peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:middle

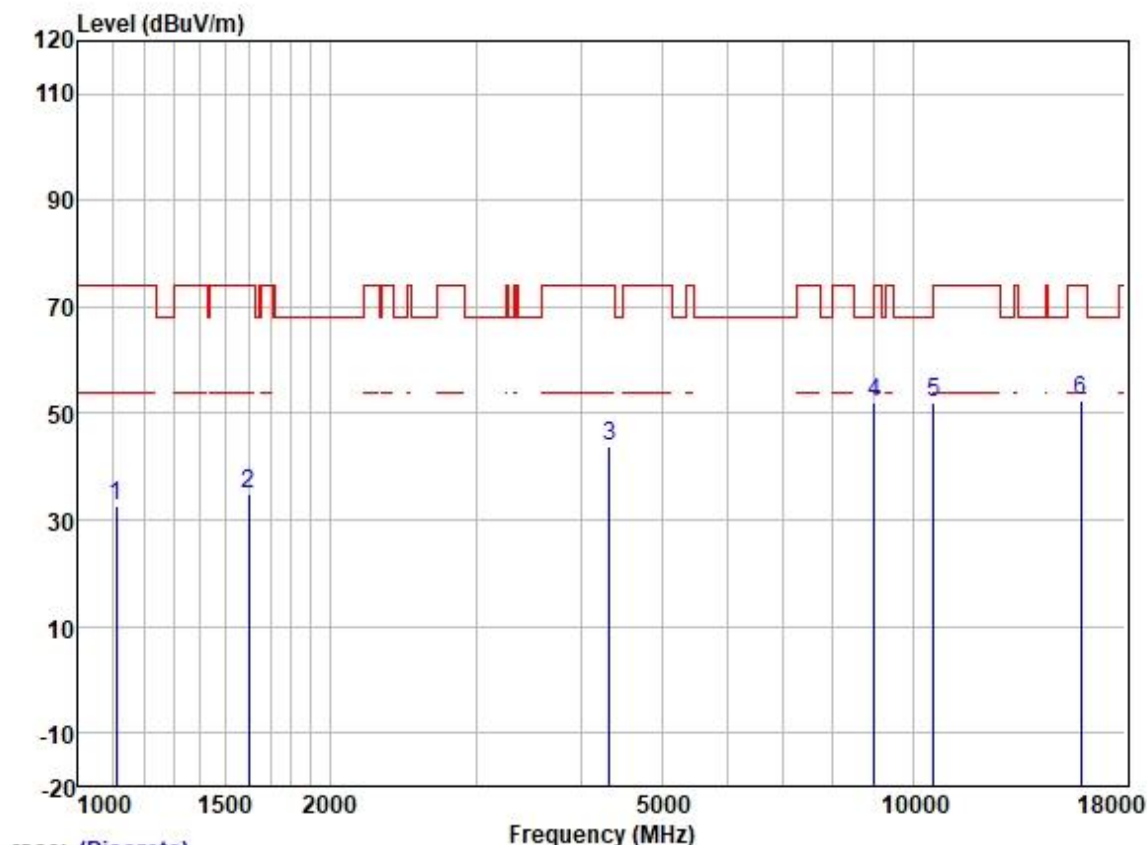

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1109.660	44.41	24.39	2.27	38.45	32.62	74.00	-41.38	HORIZONTAL	Peak
2	1601.804	44.36	25.58	2.80	37.98	34.76	74.00	-39.24	HORIZONTAL	Peak
3	4329.354	45.32	30.54	4.67	36.81	43.72	74.00	-30.28	HORIZONTAL	Peak
4	8995.123	44.49	37.40	7.56	37.50	51.95	68.20	-16.25	HORIZONTAL	Peak
5	10600.000	42.37	39.59	7.46	37.34	52.08	68.20	-16.12	HORIZONTAL	Peak
6	15900.000	39.62	38.44	9.86	35.40	52.52	74.00	-21.48	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 17; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:middle

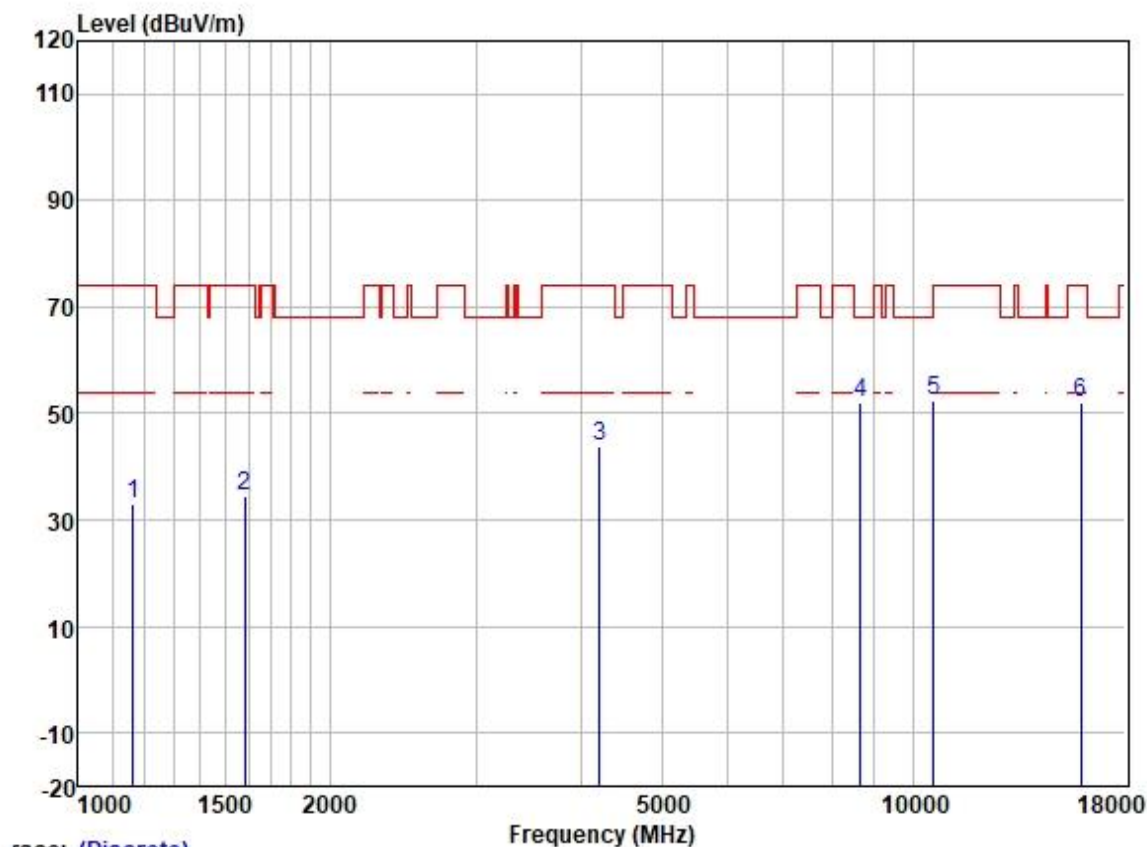

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1162.182	44.66	24.53	2.40	38.42	33.17	74.00	-40.83	VERTICAL	Peak
2	1583.392	44.27	25.56	2.80	38.00	34.63	74.00	-39.37	VERTICAL	Peak
3	4218.186	46.01	30.22	4.60	36.81	44.02	74.00	-29.98	VERTICAL	Peak
4	8663.404	45.44	37.27	6.97	37.55	52.13	68.20	-16.07	VERTICAL	Peak
5	10600.000	42.58	39.59	7.46	37.34	52.29	68.20	-15.91	VERTICAL	Peak
6	15900.000	39.19	38.44	9.86	35.40	52.09	74.00	-21.91	VERTICAL	Peak




Test Mode: 17; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:High

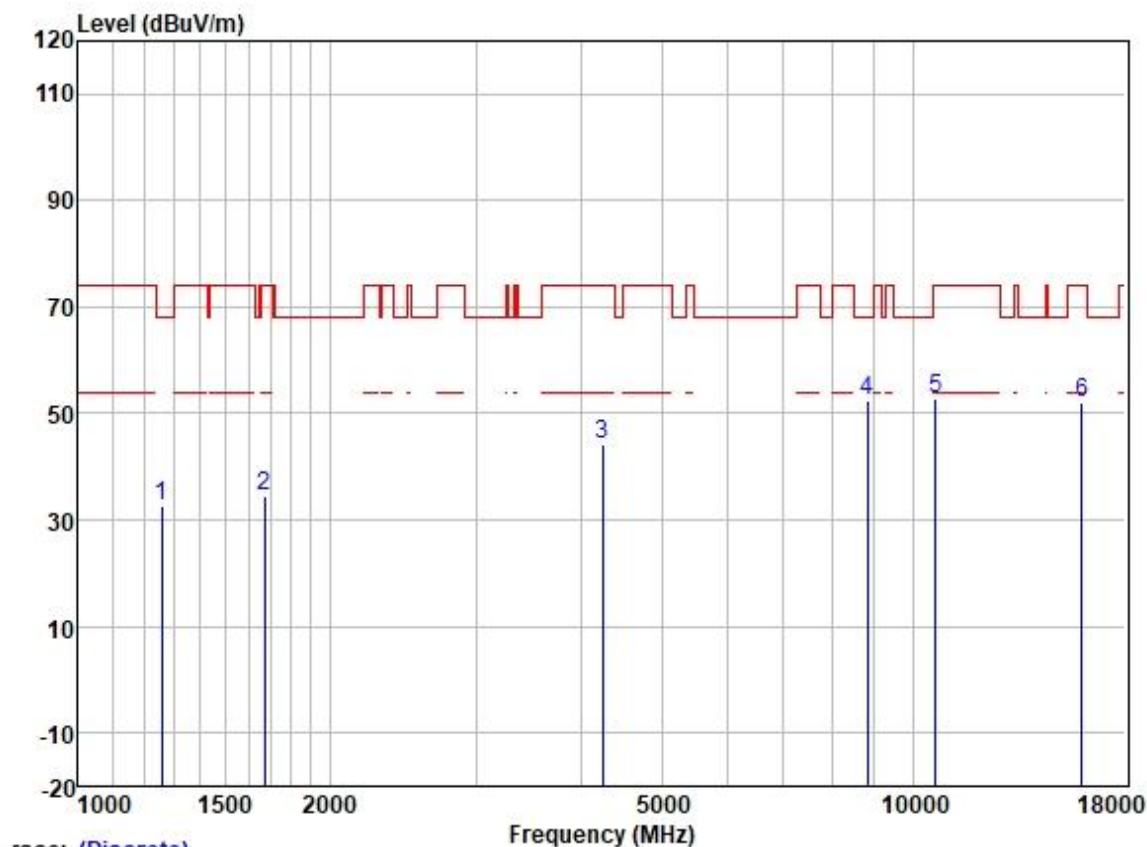

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1260.149	43.45	25.07	2.40	38.35	32.57	68.20	-35.63	HORIZONTAL Peak
2	1672.779	43.84	25.67	2.80	37.91	34.40	74.00	-39.60	HORIZONTAL Peak
3	4242.641	46.17	30.30	4.62	36.81	44.28	74.00	-29.72	HORIZONTAL Peak
4	8814.957	45.37	37.34	7.29	37.53	52.47	68.20	-15.73	HORIZONTAL Peak
5	10640.000	43.02	39.63	7.48	37.33	52.80	74.00	-21.20	HORIZONTAL Peak
6	15960.000	39.25	38.37	9.85	35.40	52.07	74.00	-21.93	HORIZONTAL Peak




Test Mode: 17; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:High

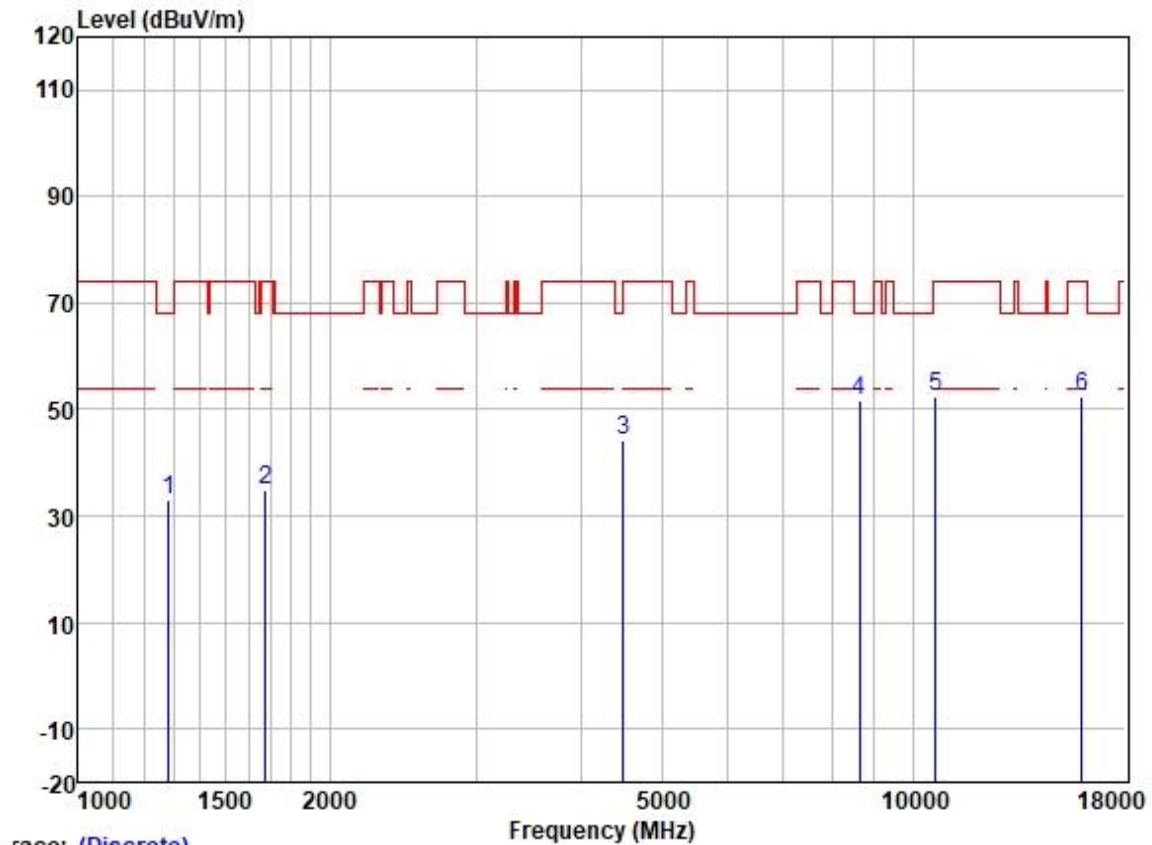

	Freq	ReadAntenna		Cable	Preamp		Limit	Over	Pol/Phase	Remark
		Level	Factor	Loss	Factor	Level	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1282.193	43.75	25.15	2.52	38.33	33.09	68.20	-35.11	VERTICAL	Peak
2	1677.621	44.26	25.68	2.80	37.91	34.83	74.00	-39.17	VERTICAL	Peak
3	4495.125	45.01	30.80	5.05	36.82	44.04	68.20	-24.16	VERTICAL	Peak
4	8638.399	45.06	37.26	6.92	37.55	51.69	68.20	-16.51	VERTICAL	Peak
5	10640.000	42.59	39.63	7.48	37.33	52.37	74.00	-21.63	VERTICAL	Peak
6	15960.000	39.47	38.37	9.85	35.40	52.29	74.00	-21.71	VERTICAL	Peak




Test Mode: 17; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

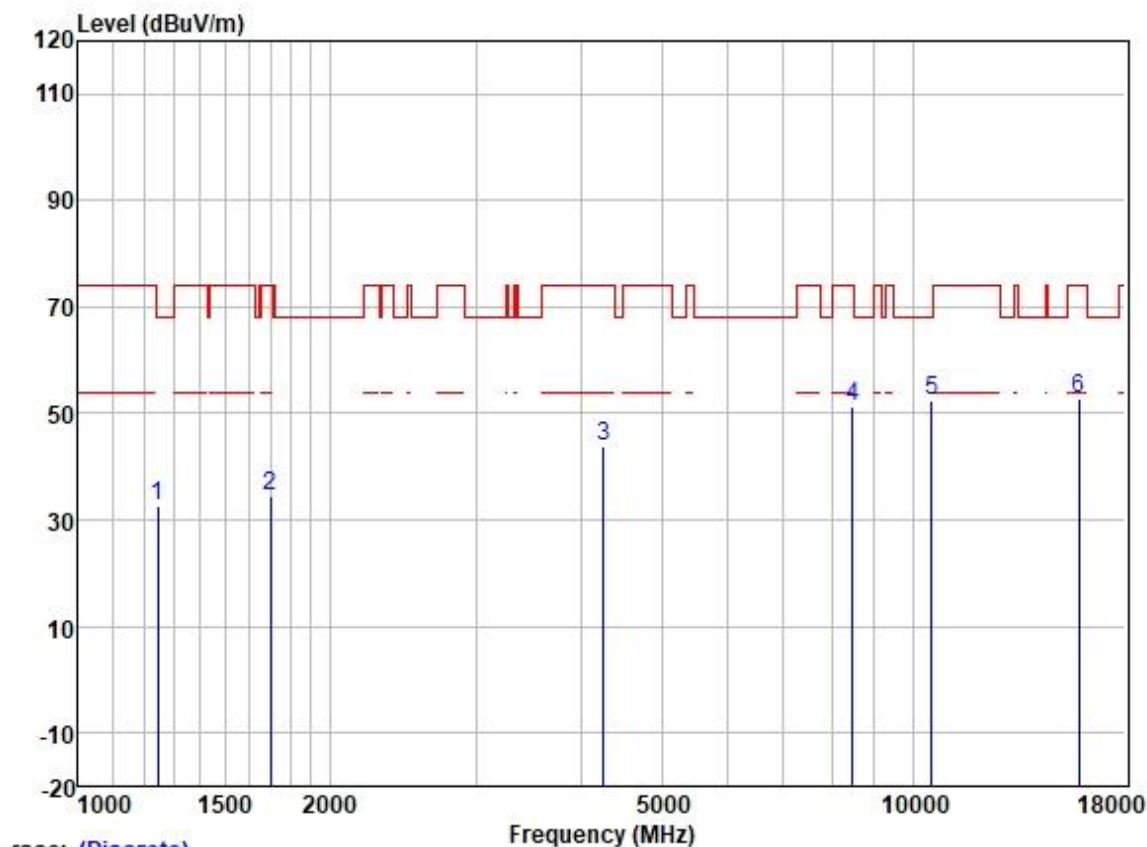

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1245.663	43.81	25.00	2.33	38.35	32.79	68.20	-35.41	HORIZONTAL	Peak
2	1697.129	43.85	25.71	2.80	37.89	34.47	74.00	-39.53	HORIZONTAL	Peak
3	4254.921	45.78	30.34	4.62	36.81	43.93	74.00	-30.07	HORIZONTAL	Peak
4	8465.379	45.19	37.13	6.68	37.57	51.43	74.00	-22.57	HORIZONTAL	Peak
5	10540.000	42.85	39.53	7.43	37.35	52.46	68.20	-15.74	HORIZONTAL	Peak
6	15810.000	39.87	38.61	9.86	35.39	52.95	74.00	-21.05	HORIZONTAL	Peak




Test Mode: 17; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

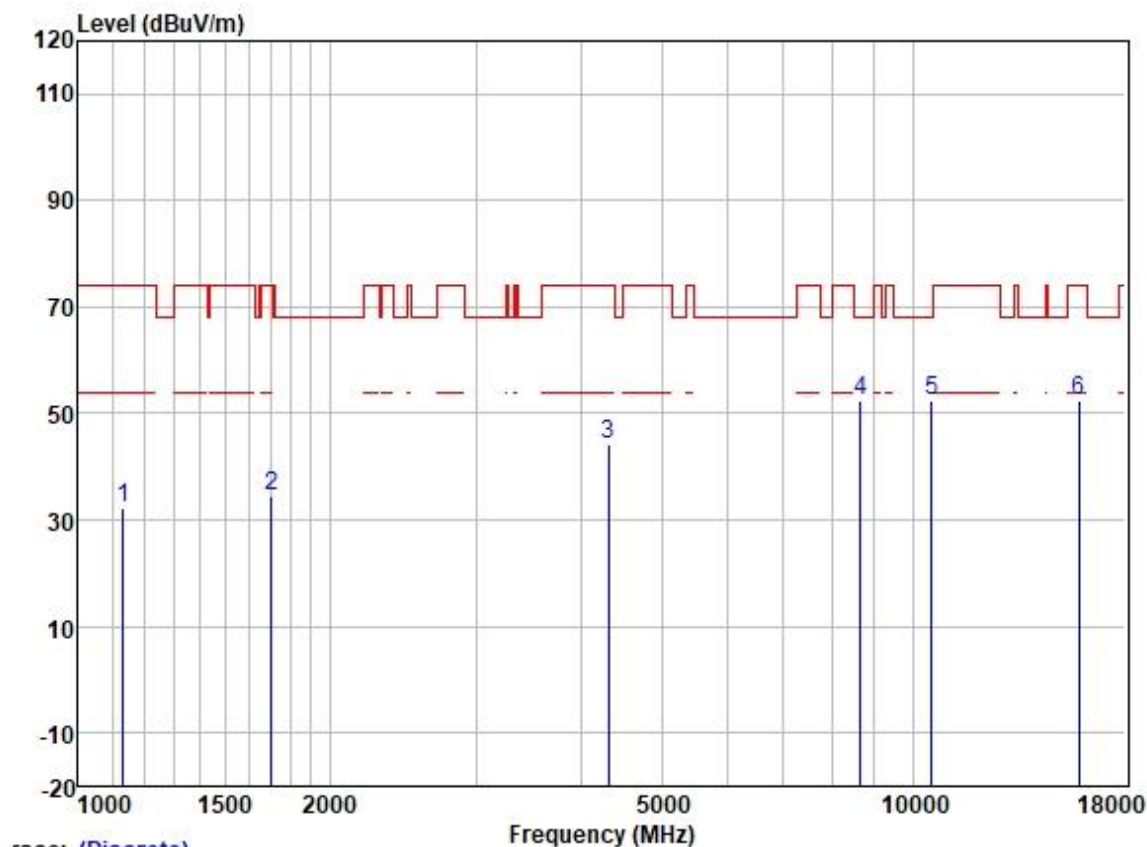

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1132.340	44.17	24.44	2.22	38.43	32.40	74.00	-41.60	VERTICAL	Peak
2	1702.042	44.04	25.72	2.80	37.89	34.67	74.00	-39.33	VERTICAL	Peak
3	4316.859	45.67	30.51	4.66	36.81	44.03	74.00	-29.97	VERTICAL	Peak
4	8663.404	45.73	37.27	6.97	37.55	52.42	68.20	-15.78	VERTICAL	Peak
5	10540.000	42.76	39.53	7.43	37.35	52.37	68.20	-15.83	VERTICAL	Peak
6	15810.000	39.41	38.61	9.86	35.39	52.49	74.00	-21.51	VERTICAL	Peak




Test Mode: 17; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:High

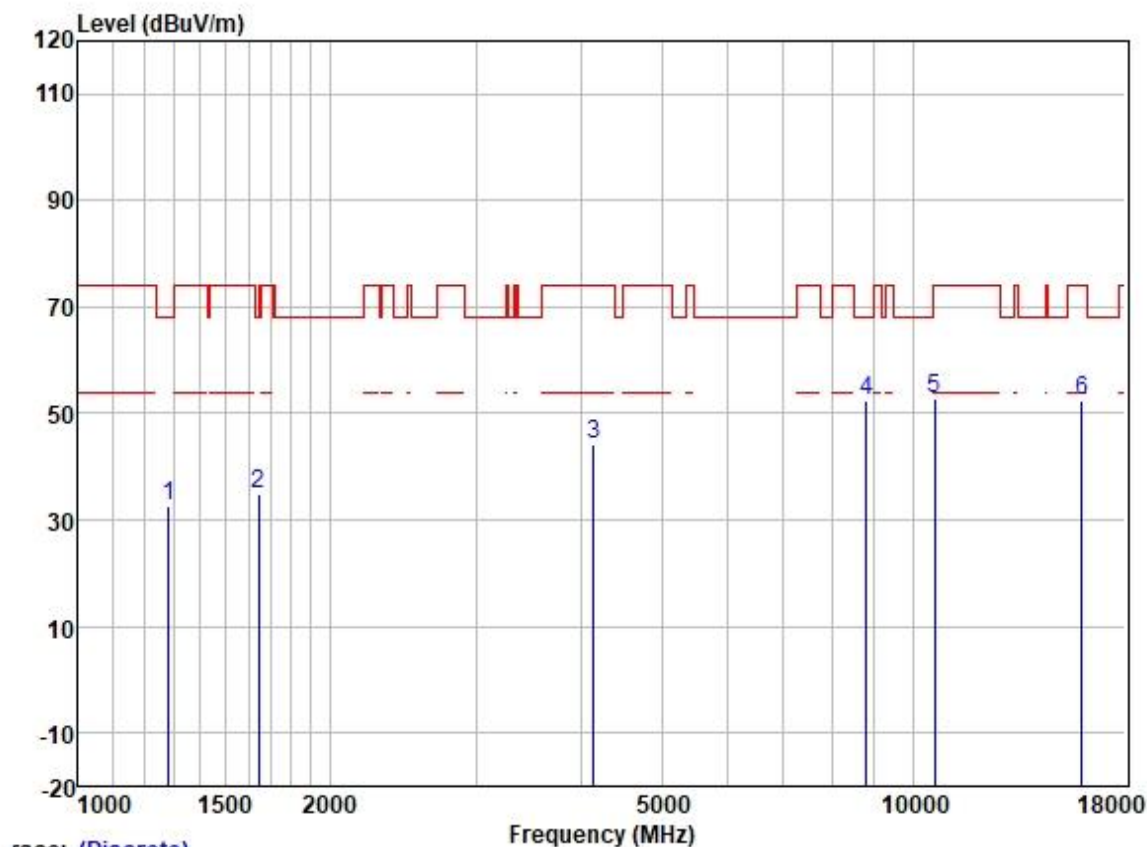

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
		dBuV	dB/m	dB	dB			dB		
1	1282.193	43.44	25.15	2.52	38.33	32.78	68.20	-35.42	HORIZONTAL	Peak
2	1644.019	44.31	25.63	2.80	37.93	34.81	68.20	-33.39	HORIZONTAL	Peak
3	4145.664	46.48	30.03	4.60	36.80	44.31	74.00	-29.69	HORIZONTAL	Peak
4	8789.516	45.23	37.33	7.24	37.54	52.26	68.20	-15.94	HORIZONTAL	Peak
5	10620.000	43.15	39.59	7.46	37.34	52.86	74.00	-21.14	HORIZONTAL	Peak
6	15930.000	39.65	38.37	9.85	35.40	52.47	74.00	-21.53	HORIZONTAL	Peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:High

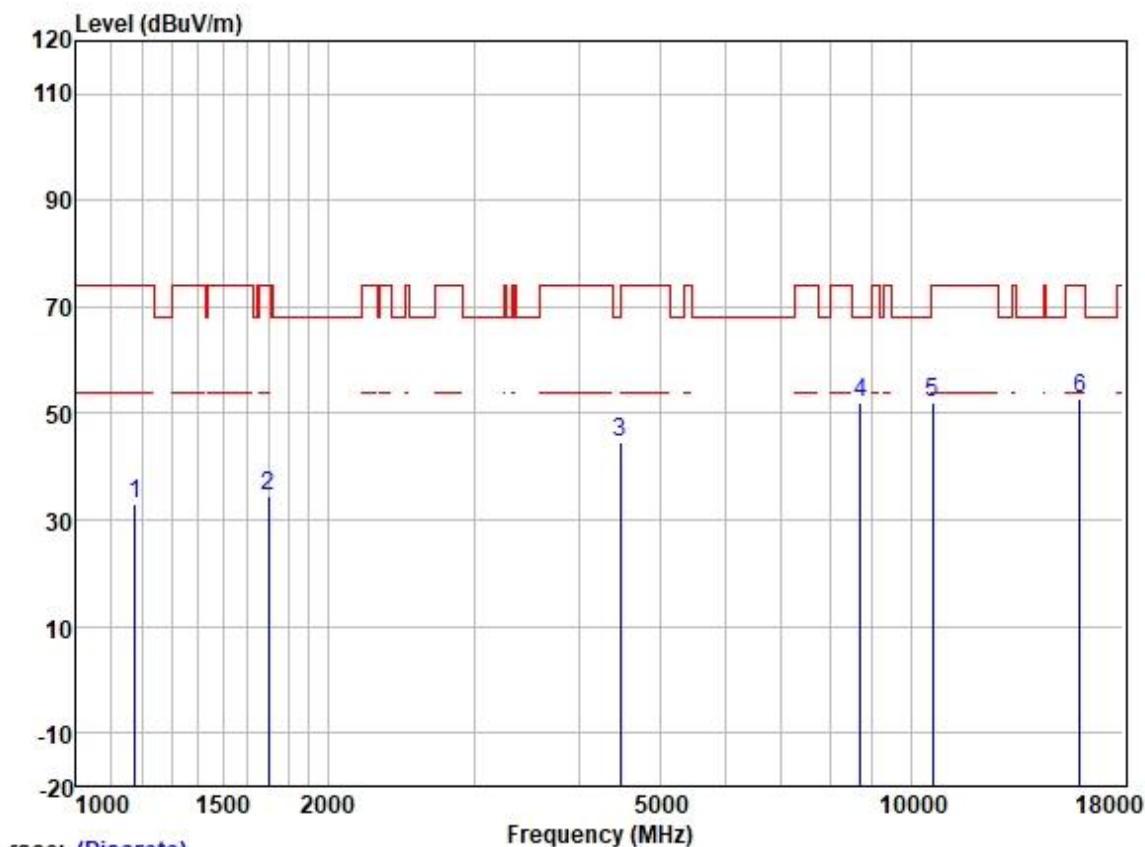

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1175.697	44.32	24.58	2.38	38.40	32.88	74.00	-41.12	VERTICAL	Peak
2	1697.129	43.77	25.71	2.80	37.89	34.39	74.00	-39.61	VERTICAL	Peak
3	4482.150	45.57	30.78	4.99	36.81	44.53	68.20	-23.67	VERTICAL	Peak
4	8713.630	45.21	37.30	7.07	37.55	52.03	68.20	-16.17	VERTICAL	Peak
5	10620.000	42.41	39.59	7.46	37.34	52.12	74.00	-21.88	VERTICAL	Peak
6	15930.000	40.03	38.37	9.85	35.40	52.85	74.00	-21.15	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 17; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:80MHz; Channel:middle

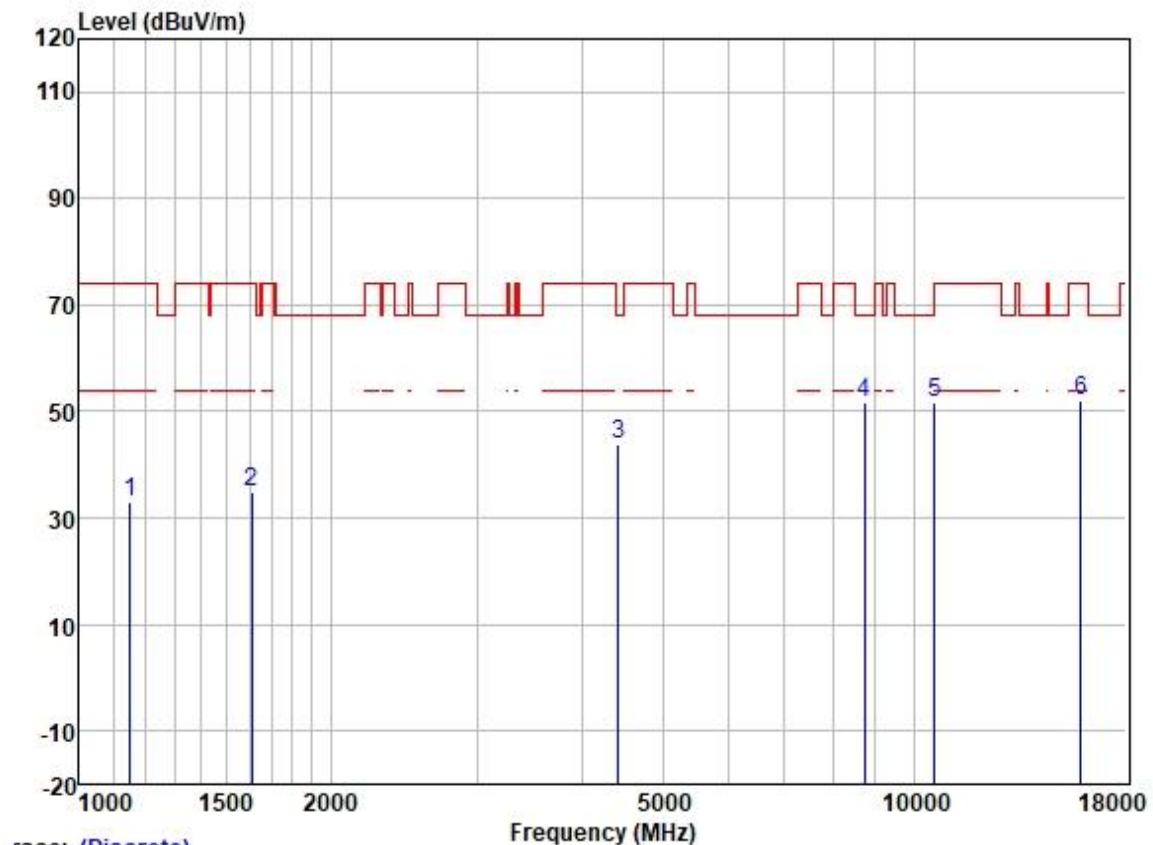

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1152.148	44.75	24.50	2.36	38.42	33.19	74.00	-40.81	HORIZONTAL	Peak
2	1611.091	44.43	25.59	2.80	37.98	34.84	74.00	-39.16	HORIZONTAL	Peak
3	4430.628	45.13	30.72	4.78	36.81	43.82	68.20	-24.38	HORIZONTAL	Peak
4	8738.852	44.69	37.31	7.13	37.54	51.59	68.20	-16.61	HORIZONTAL	Peak
5	10580.000	41.96	39.56	7.45	37.34	51.63	68.20	-16.57	HORIZONTAL	Peak
6	15870.000	39.25	38.52	9.86	35.40	52.23	74.00	-21.77	HORIZONTAL	Peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ax; Bandwidth:80MHz; Channel:middle

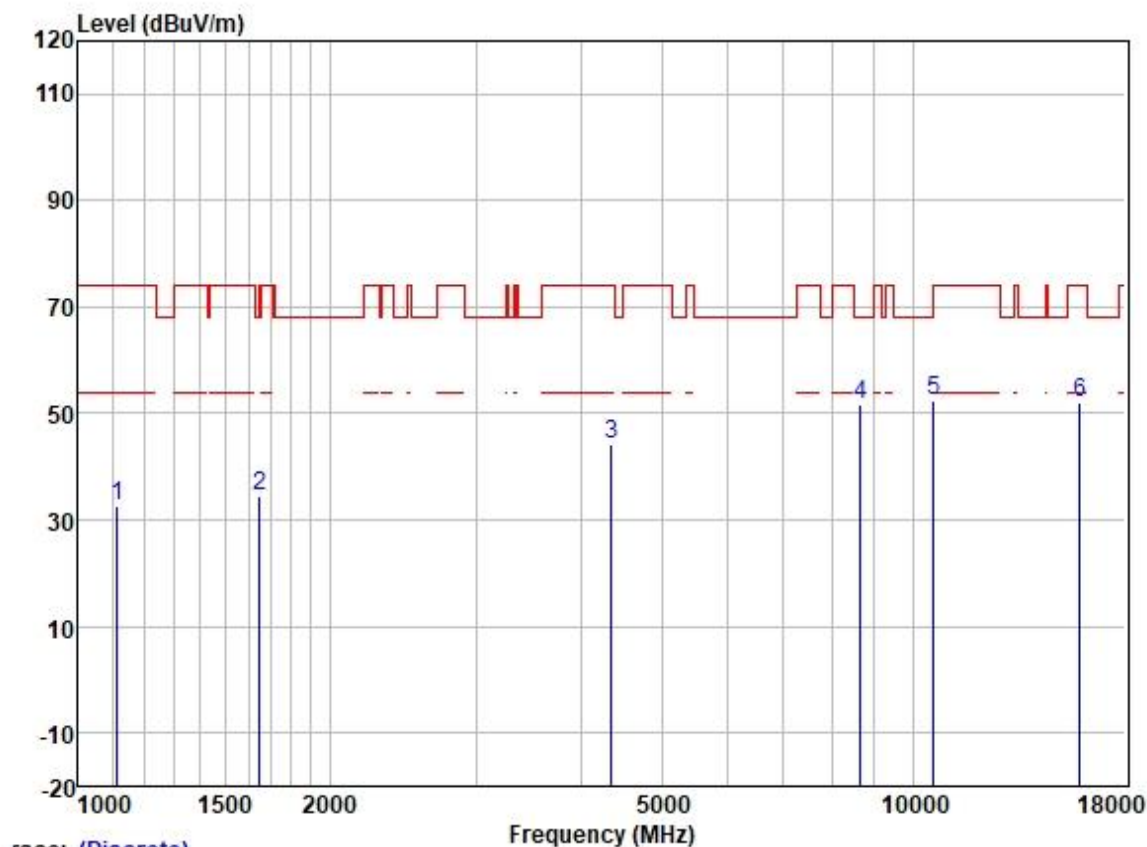

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1112.872	44.43	24.39	2.26	38.43	32.65	74.00	-41.35	VERTICAL	Peak
2	1648.778	44.18	25.63	2.80	37.93	34.68	68.20	-33.52	VERTICAL	Peak
3	4354.454	45.65	30.59	4.68	36.81	44.11	74.00	-29.89	VERTICAL	Peak
4	8663.404	44.89	37.27	6.97	37.55	51.58	68.20	-16.62	VERTICAL	Peak
5	10580.000	42.68	39.56	7.45	37.34	52.35	68.20	-15.85	VERTICAL	Peak
6	15870.000	39.11	38.52	9.86	35.40	52.09	74.00	-21.91	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com