


Test Mode: 17; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:160MHz; Channel:middle



Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1231.345	44.64	24.91	2.31	38.37	33.49	74.00	-40.51	HORIZONTAL	Peak
2	1644.019	43.88	25.63	2.80	37.93	34.38	68.20	-33.82	HORIZONTAL	Peak
3	4354.454	45.50	30.59	4.68	36.81	43.96	74.00	-30.04	HORIZONTAL	Peak
4	8764.146	44.70	37.32	7.19	37.54	51.67	68.20	-16.53	HORIZONTAL	Peak
5	10500.000	41.78	39.50	7.42	37.35	51.35	68.20	-16.85	HORIZONTAL	Peak
6	15750.000	39.11	38.70	9.86	35.39	52.28	74.00	-21.72	HORIZONTAL	Peak

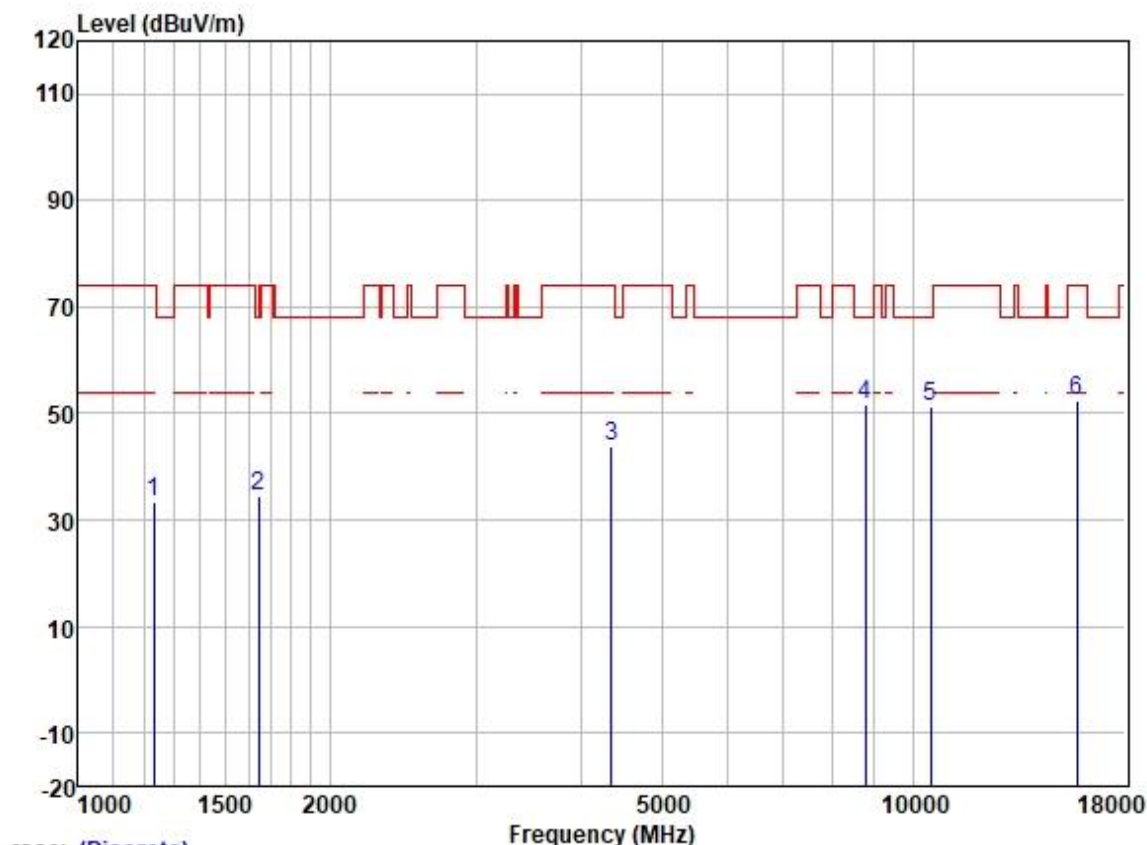

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 17; Polarity: Vertical; Modulation:802.11ax; Bandwidth:160MHz; Channel:middle

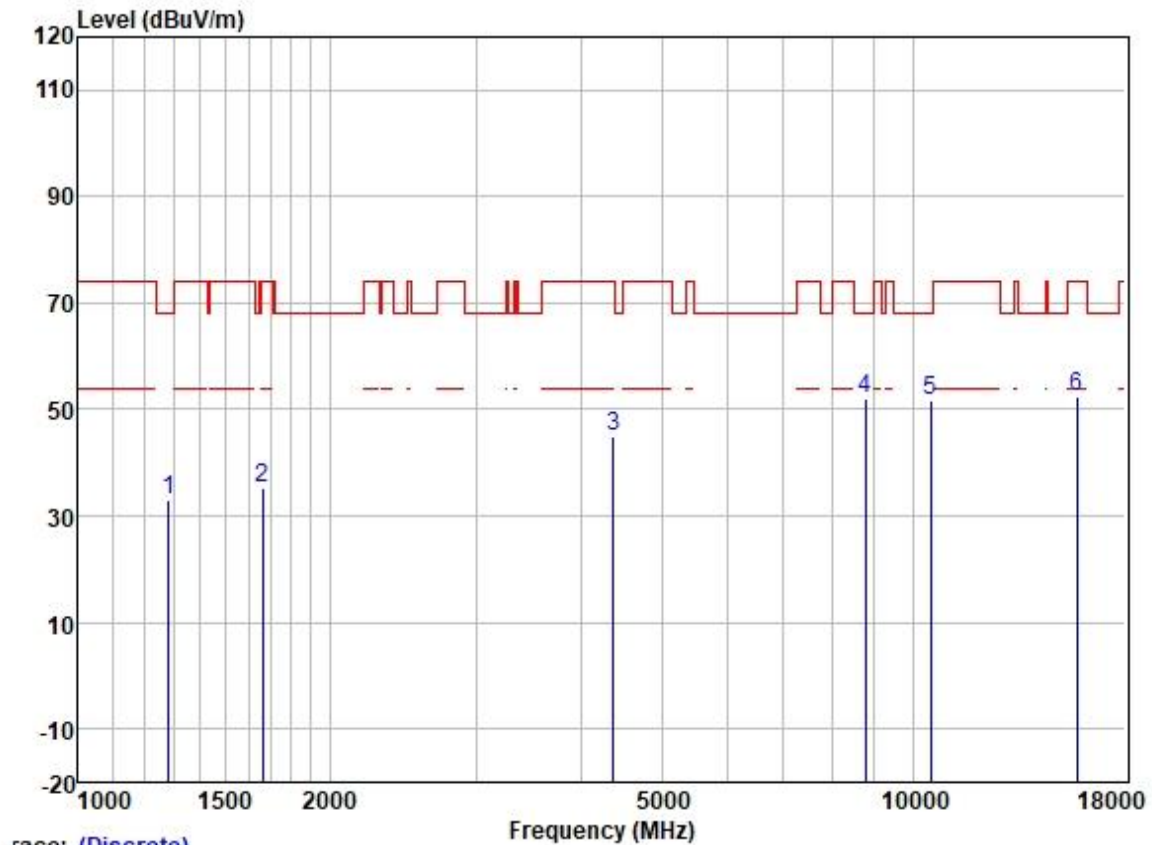


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1282.193	43.49	25.15	2.52	38.33	32.83	68.20	-35.37	VERTICAL	Peak
2	1663.137	44.58	25.65	2.80	37.91	35.12	74.00	-38.88	VERTICAL	Peak
3	4379.699	46.44	30.64	4.69	36.81	44.96	74.00	-29.04	VERTICAL	Peak
4	8764.146	45.17	37.32	7.19	37.54	52.14	68.20	-16.06	VERTICAL	Peak
5	10500.000	41.99	39.50	7.42	37.35	51.56	68.20	-16.64	VERTICAL	Peak
6	15750.000	39.33	38.70	9.86	35.39	52.50	74.00	-21.50	VERTICAL	Peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

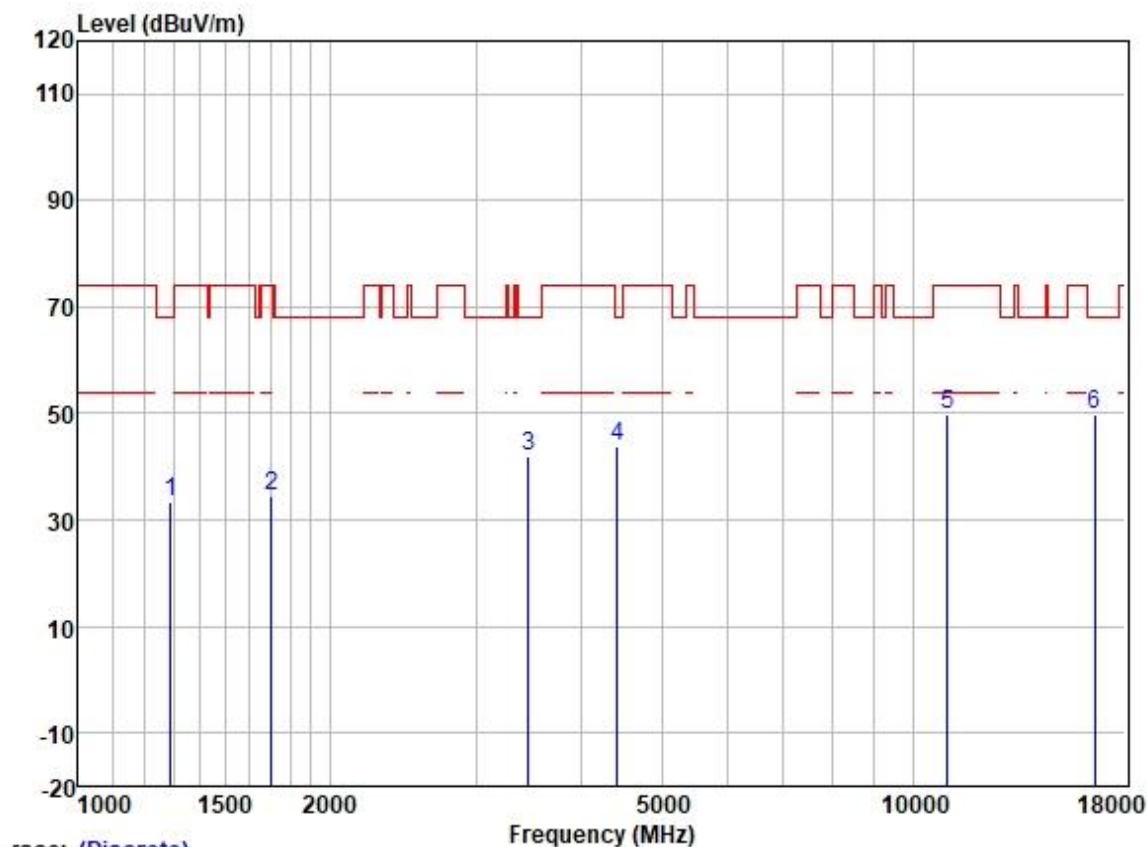

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	43.98	25.17	2.55	38.31	33.39	68.20	-34.81	HORIZONTAL	Peak
2	1702.042	43.86	25.72	2.80	37.89	34.49	74.00	-39.51	HORIZONTAL	Peak
3	3465.510	45.83	28.88	4.22	36.95	41.98	68.20	-26.22	HORIZONTAL	Peak
4	4430.628	45.32	30.72	4.78	36.81	44.01	68.20	-24.19	HORIZONTAL	Peak
5	11000.000	39.16	40.10	7.71	37.25	49.72	74.00	-24.28	HORIZONTAL	Peak
6	16500.000	36.13	39.60	9.44	35.38	49.79	68.20	-18.41	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 19; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

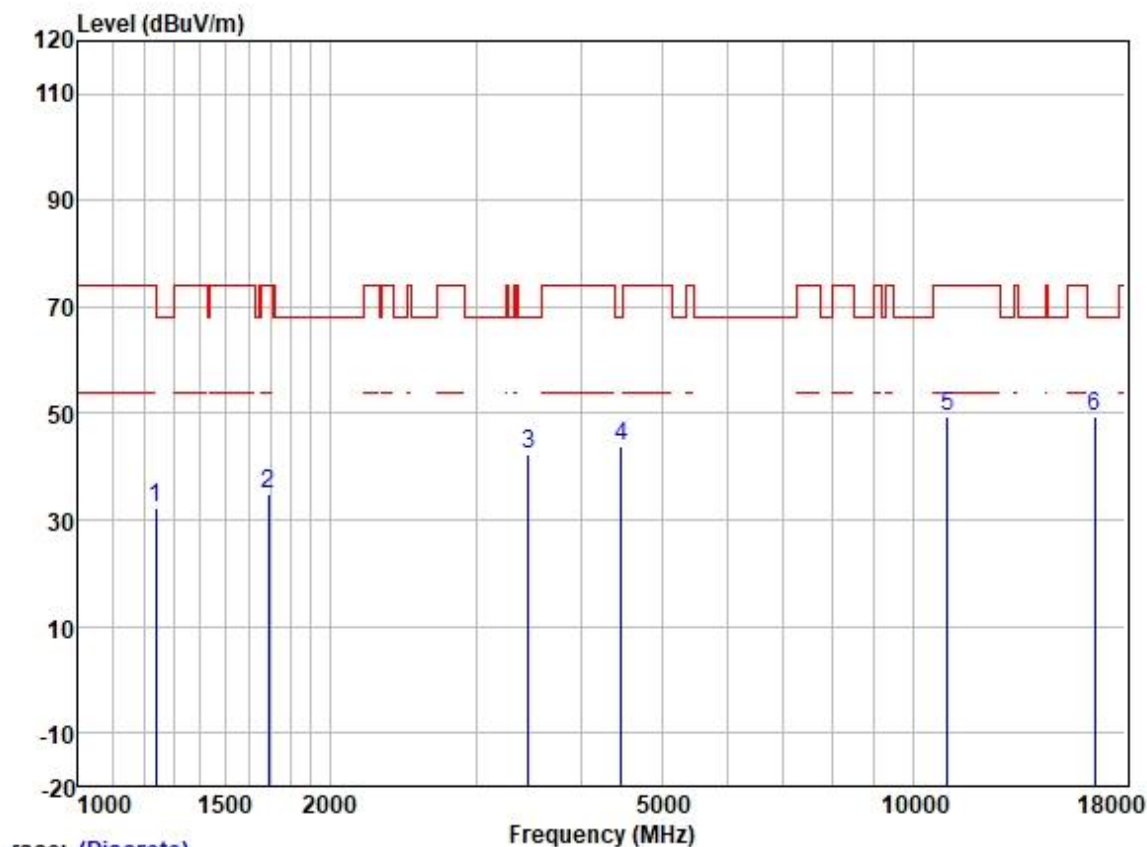

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1238.483	43.53	24.96	2.30	38.35	32.44	74.00	-41.56	VERTICAL	Peak
2	1692.231	44.28	25.70	2.80	37.89	34.89	74.00	-39.11	VERTICAL	Peak
3	3465.510	46.16	28.88	4.22	36.95	42.31	68.20	-25.89	VERTICAL	Peak
4	4469.214	44.86	30.77	4.93	36.81	43.75	68.20	-24.45	VERTICAL	Peak
5	11000.000	38.77	40.10	7.71	37.25	49.33	74.00	-24.67	VERTICAL	Peak
6	16500.000	35.84	39.60	9.44	35.38	49.50	68.20	-18.70	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 19; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

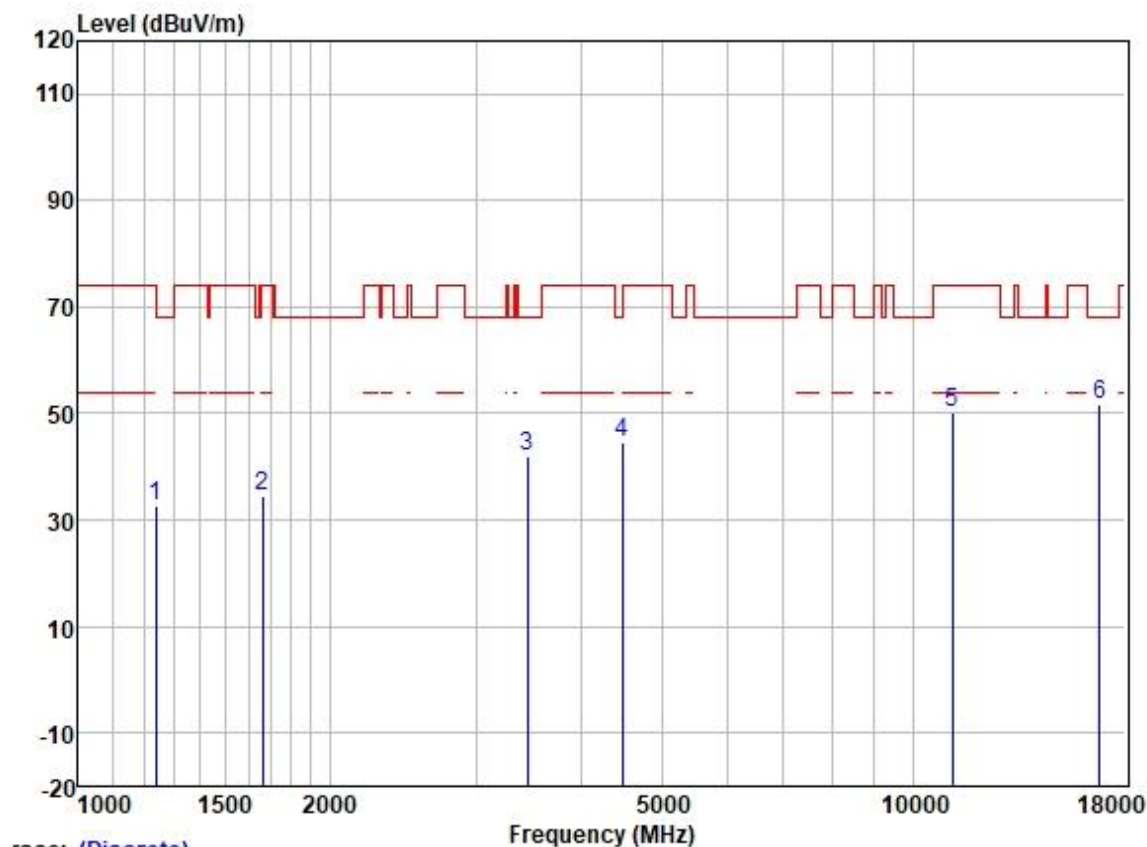

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1238.483	43.71	24.96	2.30	38.35	32.62	74.00	-41.38	HORIZONTAL	Peak
2	1663.137	44.04	25.65	2.80	37.91	34.58	74.00	-39.42	HORIZONTAL	Peak
3	3455.508	46.01	28.88	4.20	36.96	42.13	68.20	-26.07	HORIZONTAL	Peak
4	4482.150	45.45	30.78	4.99	36.81	44.41	68.20	-23.79	HORIZONTAL	Peak
5	11160.000	39.60	40.04	7.90	37.21	50.33	74.00	-23.67	HORIZONTAL	Peak
6	16740.000	37.01	40.49	9.41	35.37	51.54	68.20	-16.66	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 19; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

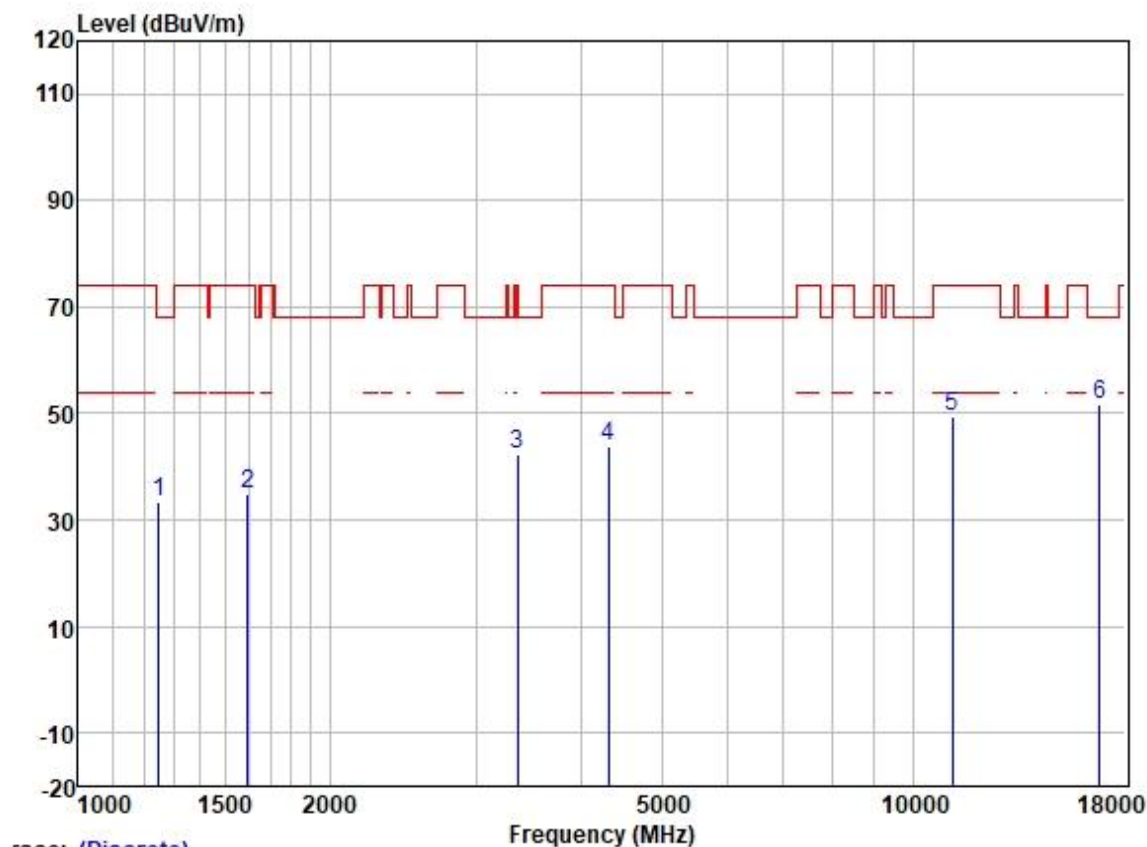

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1249.269	44.47	25.02	2.34	38.35	33.48	68.20	-34.72	VERTICAL	Peak
2	1597.181	44.42	25.58	2.80	37.98	34.82	74.00	-39.18	VERTICAL	Peak
3	3357.061	46.37	28.81	4.09	37.01	42.26	74.00	-31.74	VERTICAL	Peak
4	4316.859	45.50	30.51	4.66	36.81	43.86	74.00	-30.14	VERTICAL	Peak
5	11160.000	38.70	40.04	7.90	37.21	49.43	74.00	-24.57	VERTICAL	Peak
6	16740.000	37.14	40.49	9.41	35.37	51.67	68.20	-16.53	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 19; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

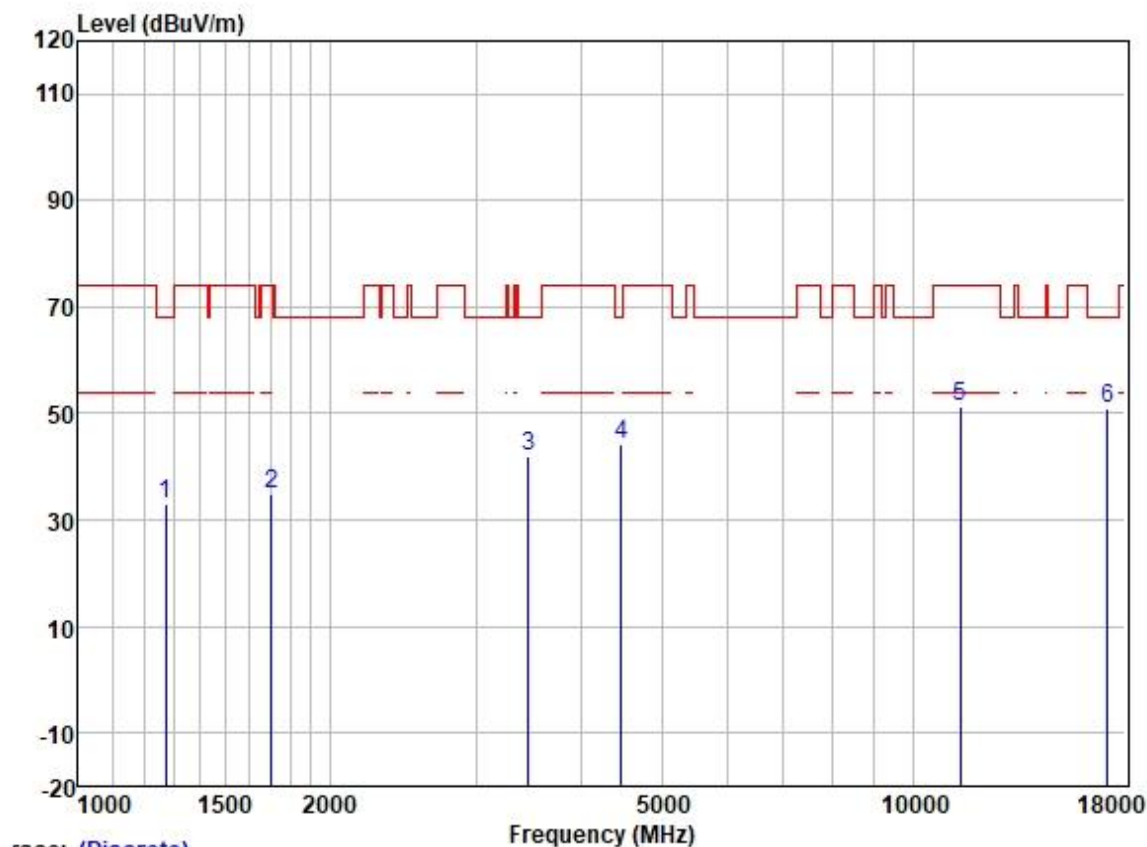

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1271.123	43.62	25.11	2.46	38.33	32.86	68.20	-35.34	HORIZONTAL	Peak
2	1702.042	44.21	25.72	2.80	37.89	34.84	74.00	-39.16	HORIZONTAL	Peak
3	3465.510	45.89	28.88	4.22	36.95	42.04	68.20	-26.16	HORIZONTAL	Peak
4	4469.214	45.45	30.77	4.93	36.81	44.34	68.20	-23.86	HORIZONTAL	Peak
5	11400.000	40.26	39.94	8.28	37.16	51.32	74.00	-22.68	HORIZONTAL	Peak
6	17100.000	34.17	42.32	9.63	35.34	50.78	68.20	-17.42	HORIZONTAL	Peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

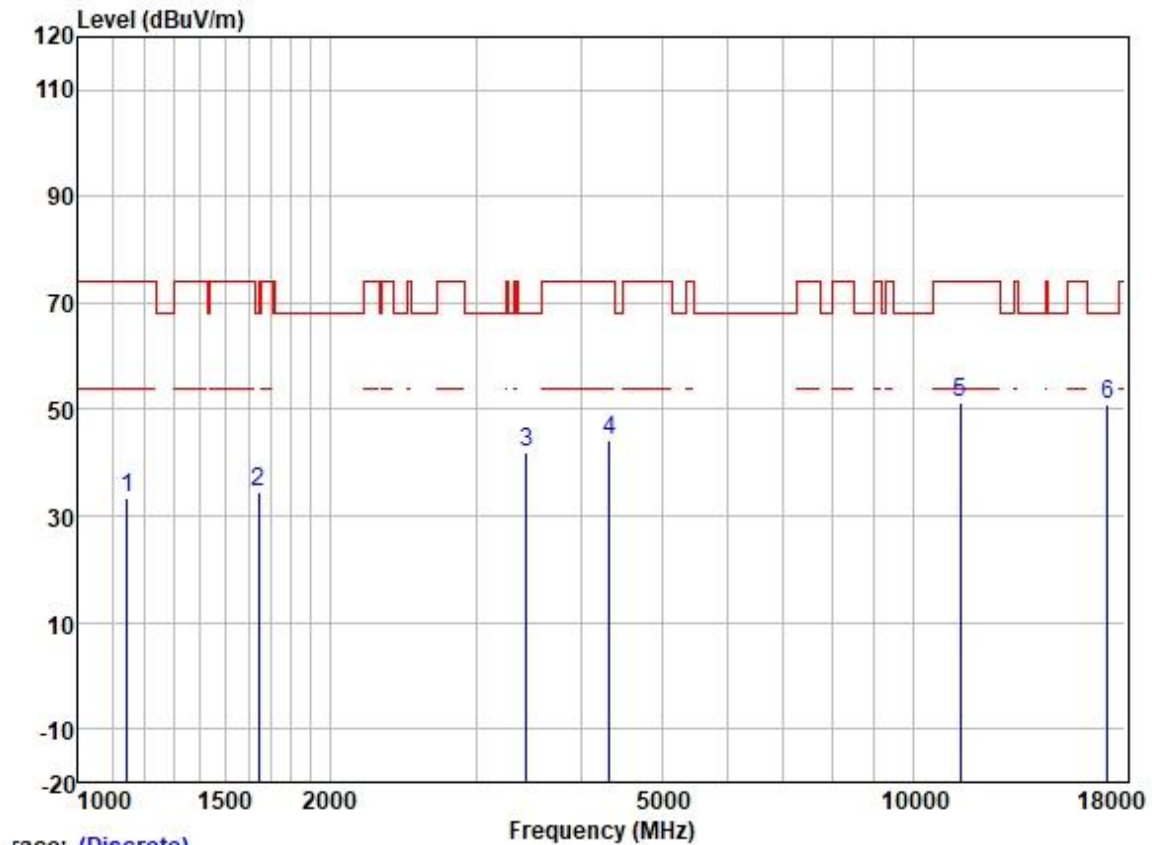


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1145.507	44.85	24.48	2.32	38.42	33.23	74.00	-40.77	VERTICAL	Peak
2	1644.019	44.08	25.63	2.80	37.93	34.58	68.20	-33.62	VERTICAL	Peak
3	3445.535	45.79	28.87	4.18	36.96	41.88	68.20	-26.32	VERTICAL	Peak
4	4329.354	45.95	30.54	4.67	36.81	44.35	74.00	-29.65	VERTICAL	Peak
5	11400.000	40.18	39.94	8.28	37.16	51.24	74.00	-22.76	VERTICAL	Peak
6	17100.000	34.15	42.32	9.63	35.34	50.76	68.20	-17.44	VERTICAL	Peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

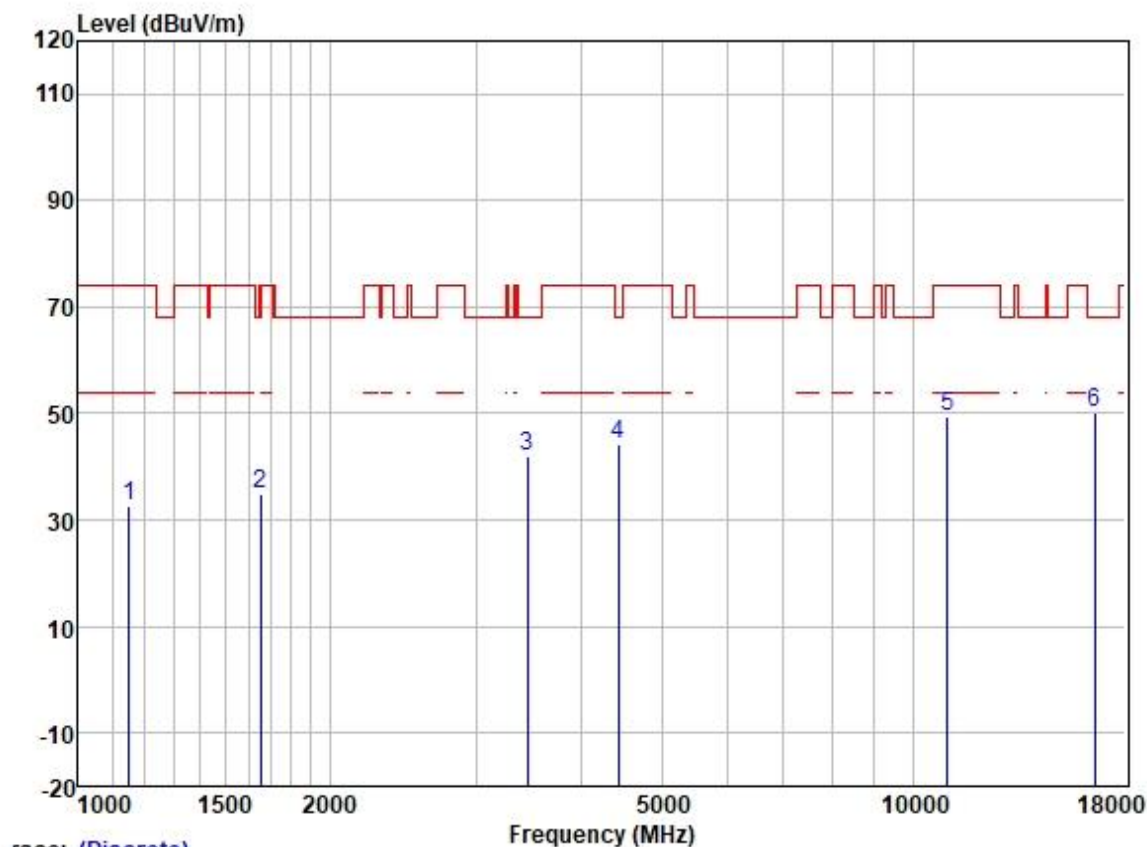

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1152.148	44.20	24.50	2.36	38.42	32.64	74.00	-41.36	HORIZONTAL	Peak
2	1653.550	44.48	25.64	2.80	37.93	34.99	68.20	-33.21	HORIZONTAL	Peak
3	3455.508	45.77	28.88	4.20	36.96	41.89	68.20	-26.31	HORIZONTAL	Peak
4	4443.453	45.64	30.73	4.83	36.81	44.39	68.20	-23.81	HORIZONTAL	Peak
5	11000.000	38.71	40.10	7.71	37.25	49.27	74.00	-24.73	HORIZONTAL	Peak
6	16500.000	36.40	39.60	9.44	35.38	50.06	68.20	-18.14	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

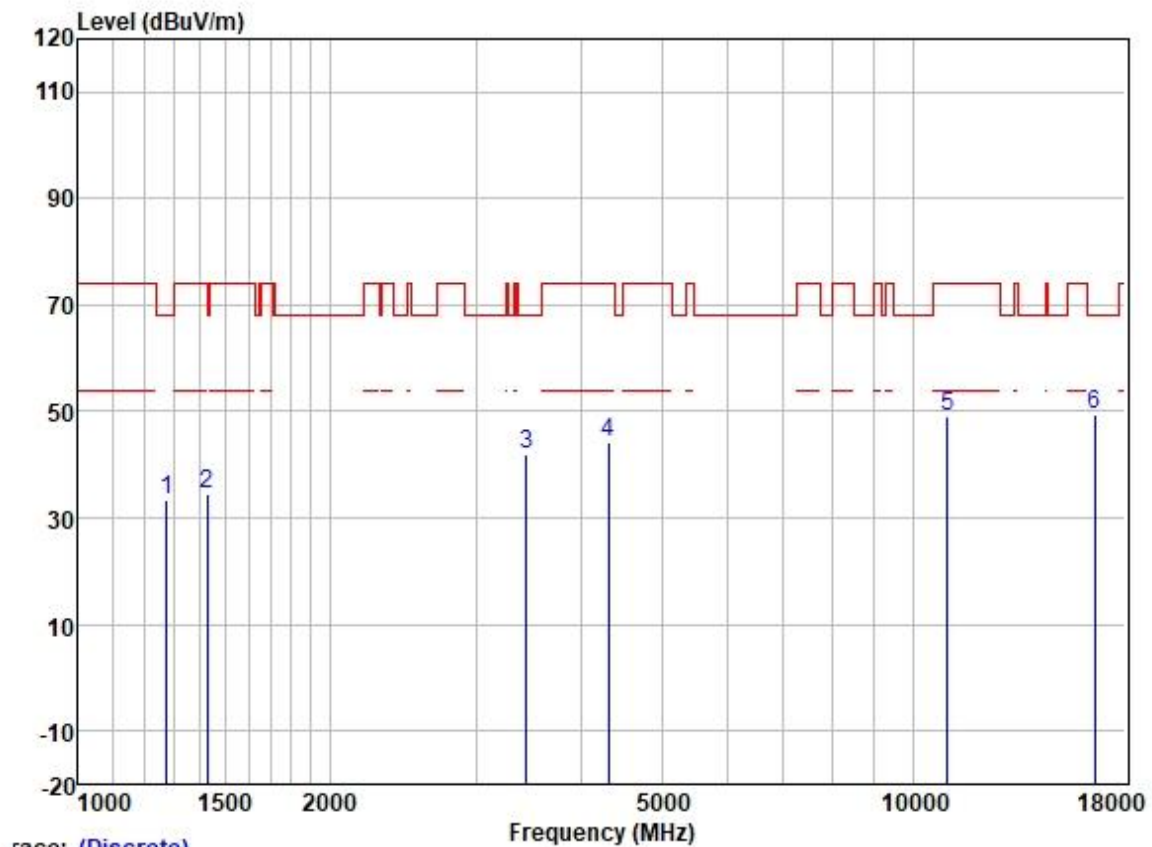

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1274.802	44.02	25.12	2.48	38.33	33.29	68.20	-34.91	VERTICAL	Peak
2	1426.916	44.57	25.43	2.65	38.20	34.45	74.00	-39.55	VERTICAL	Peak
3	3445.535	45.89	28.87	4.18	36.96	41.98	68.20	-26.22	VERTICAL	Peak
4	4316.859	45.95	30.51	4.66	36.81	44.31	74.00	-29.69	VERTICAL	Peak
5	11000.000	38.46	40.10	7.71	37.25	49.02	74.00	-24.98	VERTICAL	Peak
6	16500.000	35.85	39.60	9.44	35.38	49.51	68.20	-18.69	VERTICAL	Peak




Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

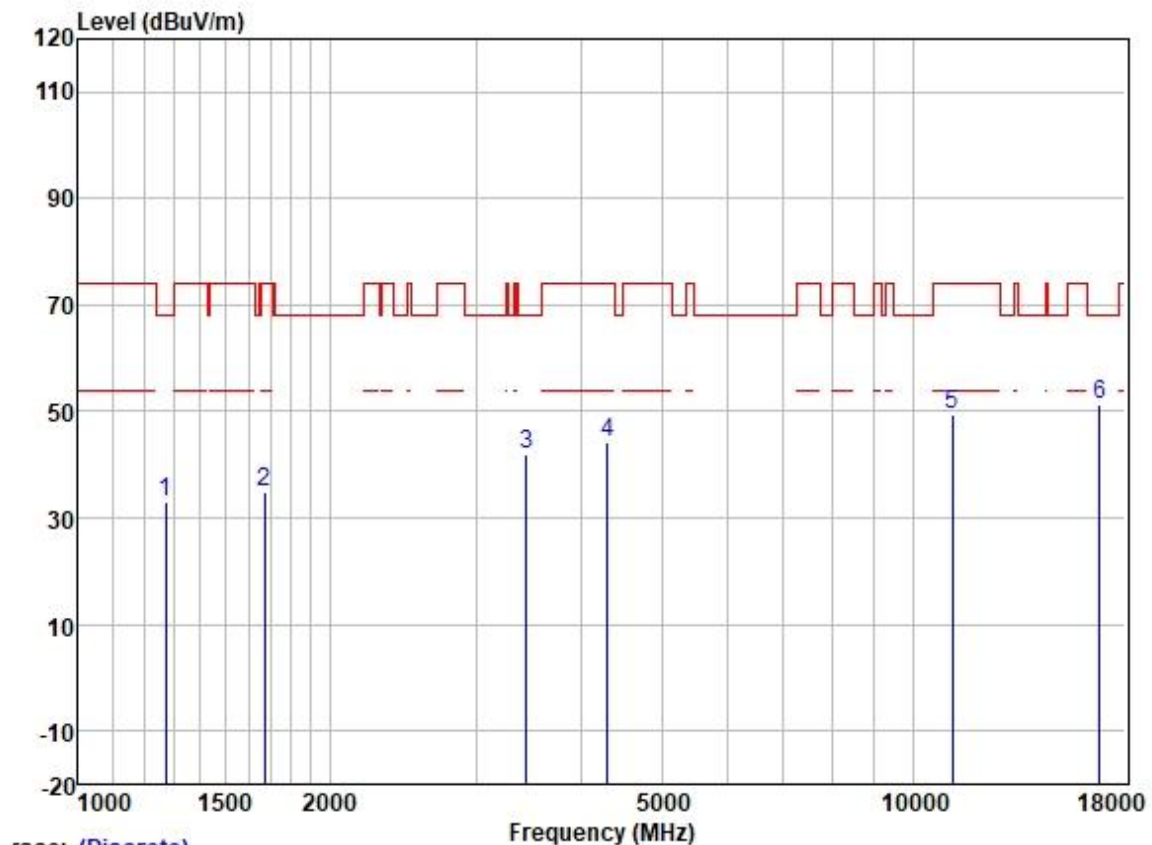

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1271.123	43.76	25.11	2.46	38.33	33.00	68.20	-35.20	HORIZONTAL	Peak
2	1672.779	44.47	25.67	2.80	37.91	35.03	74.00	-38.97	HORIZONTAL	Peak
3	3445.535	45.77	28.87	4.18	36.96	41.86	68.20	-26.34	HORIZONTAL	Peak
4	4304.400	46.00	30.48	4.65	36.81	44.32	74.00	-29.68	HORIZONTAL	Peak
5	11160.000	38.59	40.04	7.90	37.21	49.32	74.00	-24.68	HORIZONTAL	Peak
6	16740.000	36.61	40.49	9.41	35.37	51.14	68.20	-17.06	HORIZONTAL	Peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

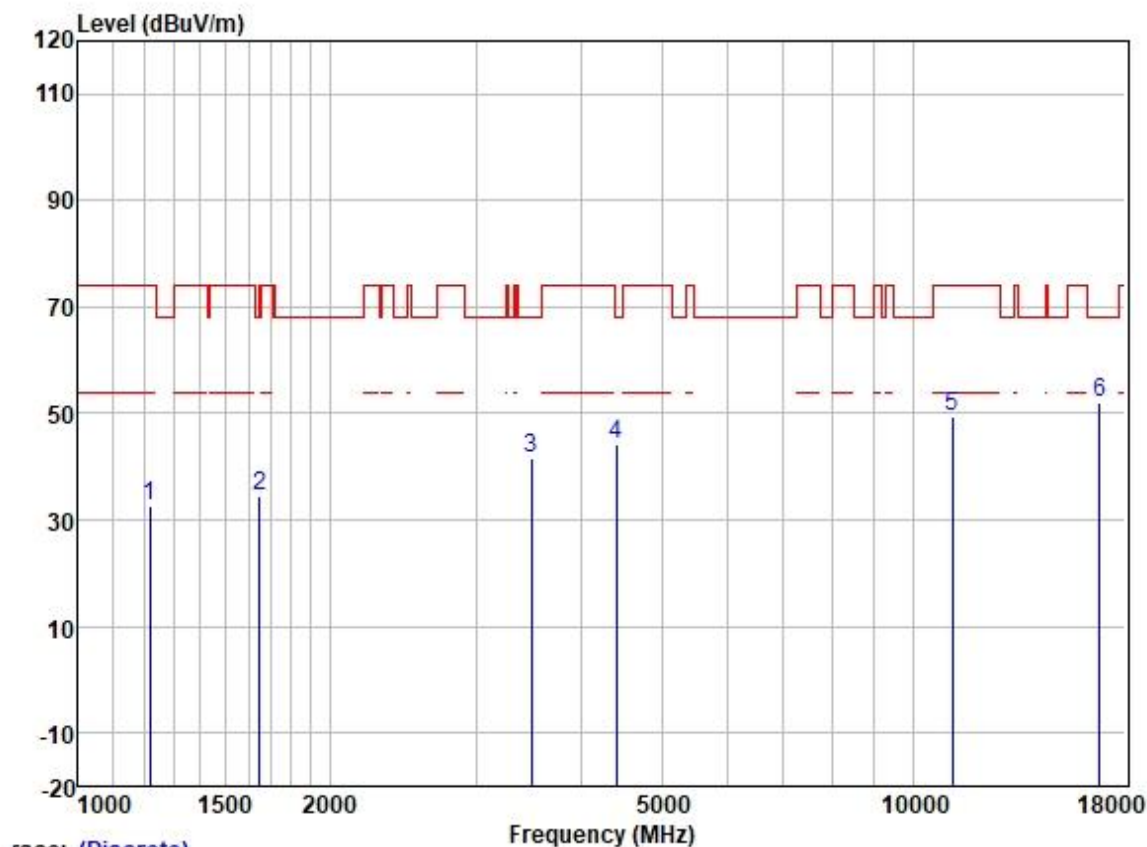

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	44.05	24.79	2.32	38.37	32.79	74.00	-41.21	VERTICAL	Peak
2	1648.778	44.18	25.63	2.80	37.93	34.68	68.20	-33.52	VERTICAL	Peak
3	3495.691	45.28	28.90	4.30	36.94	41.54	68.20	-26.66	VERTICAL	Peak
4	4417.841	45.60	30.70	4.74	36.81	44.23	68.20	-23.97	VERTICAL	Peak
5	11160.000	38.56	40.04	7.90	37.21	49.29	74.00	-24.71	VERTICAL	Peak
6	16740.000	37.56	40.49	9.41	35.37	52.09	68.20	-16.11	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

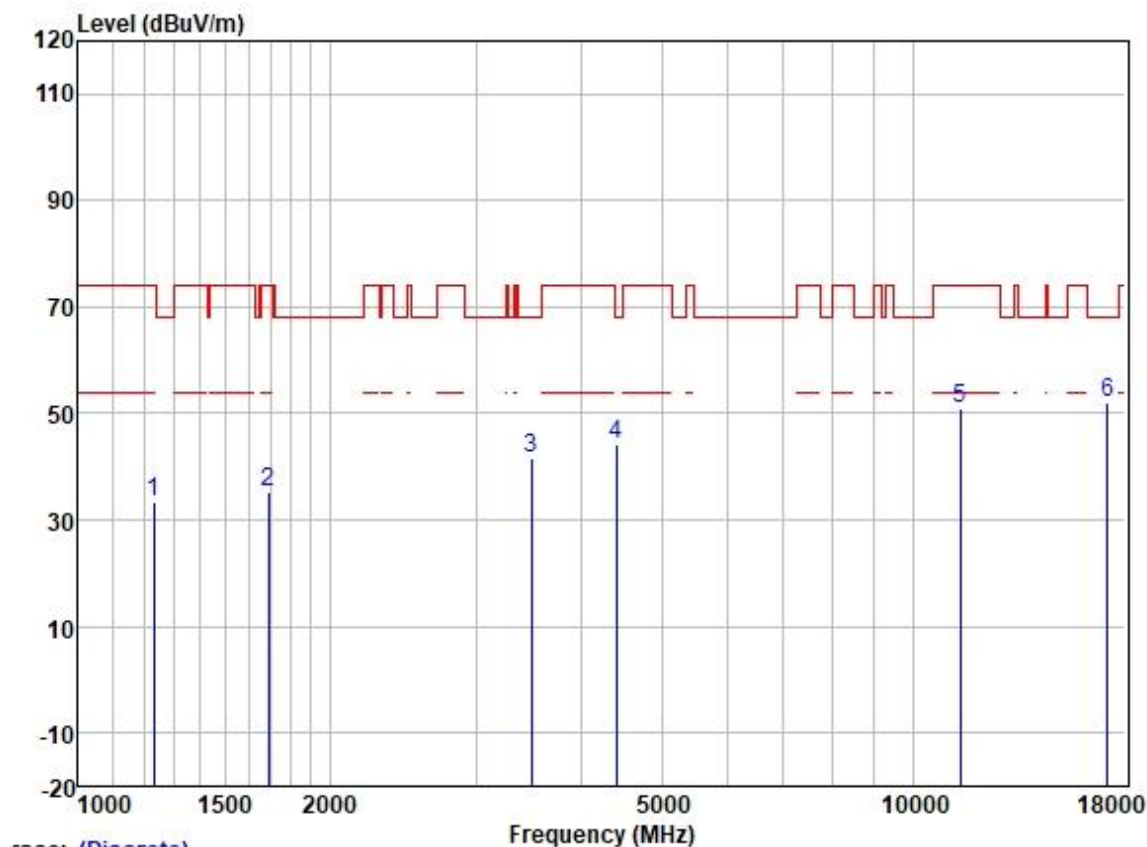

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1231.345	44.50	24.91	2.31	38.37	33.35	74.00	-40.65	HORIZONTAL	Peak
2	1692.231	44.48	25.70	2.80	37.89	35.09	74.00	-38.91	HORIZONTAL	Peak
3	3495.691	45.31	28.90	4.30	36.94	41.57	68.20	-26.63	HORIZONTAL	Peak
4	4417.841	45.45	30.70	4.74	36.81	44.08	68.20	-24.12	HORIZONTAL	Peak
5	11400.000	39.71	39.94	8.28	37.16	50.77	74.00	-23.23	HORIZONTAL	Peak
6	17100.000	35.27	42.32	9.63	35.34	51.88	68.20	-16.32	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

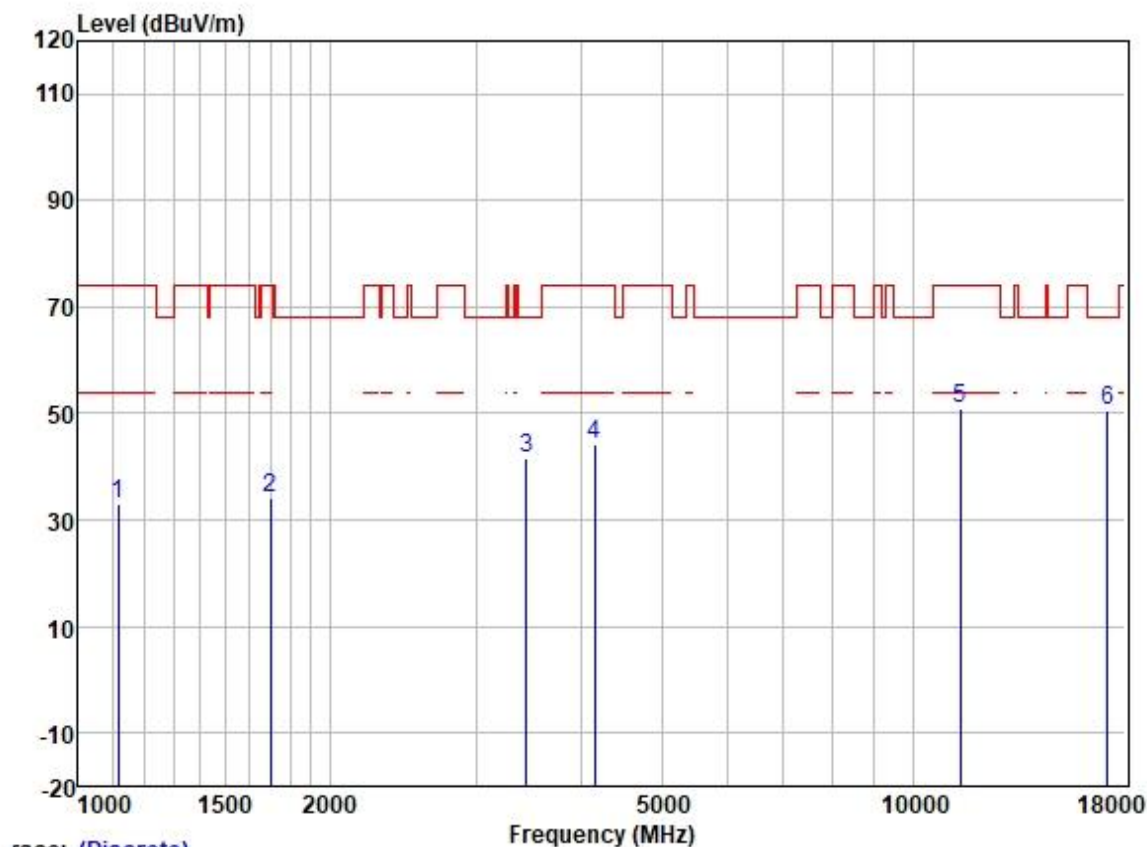


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1116.093	44.67	24.40	2.25	38.43	32.89	74.00	-41.11	VERTICAL	Peak
2	1697.129	43.67	25.71	2.80	37.89	34.29	74.00	-39.71	VERTICAL	Peak
3	3445.535	45.38	28.87	4.18	36.96	41.47	68.20	-26.73	VERTICAL	Peak
4	4157.664	46.39	30.06	4.60	36.80	44.25	74.00	-29.75	VERTICAL	Peak
5	11400.000	39.71	39.94	8.28	37.16	50.77	74.00	-23.23	VERTICAL	Peak
6	17100.000	34.13	42.32	9.63	35.34	50.74	68.20	-17.46	VERTICAL	Peak




Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

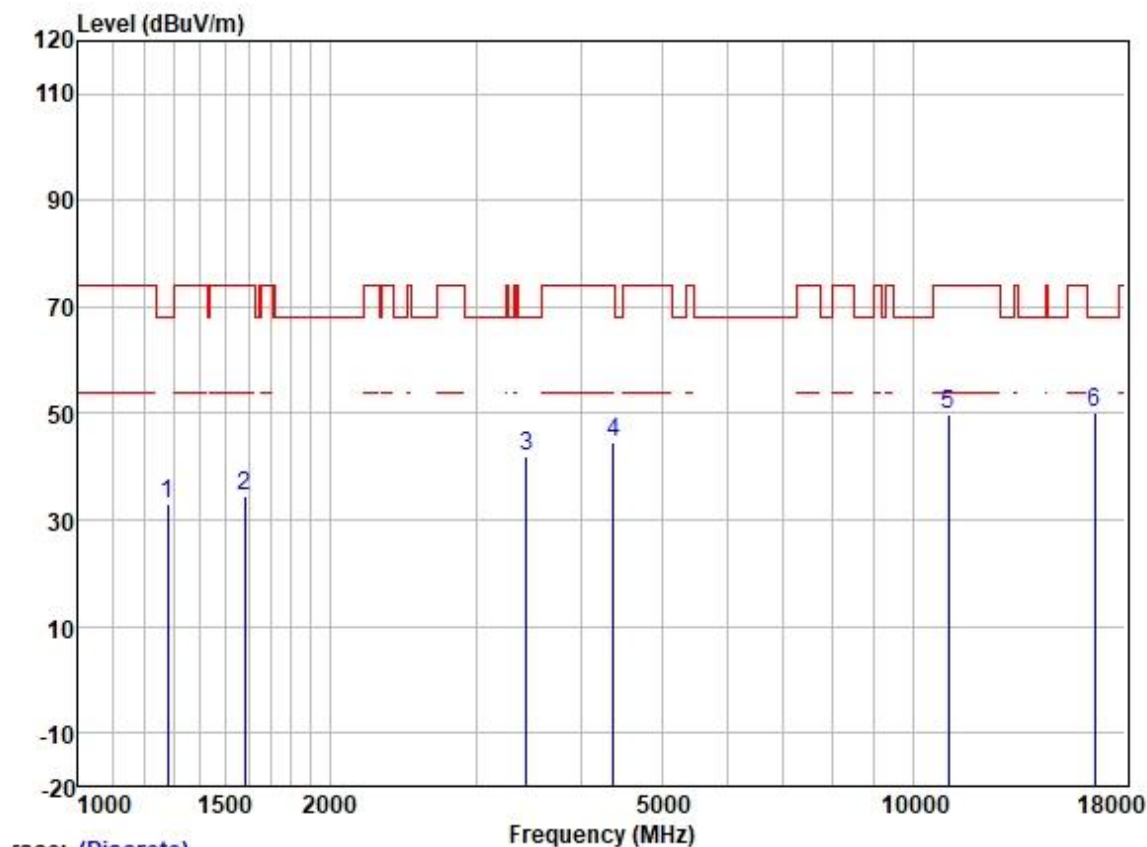

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1278.492	43.72	25.14	2.50	38.33	33.03	68.20	-35.17	HORIZONTAL	Peak
2	1583.392	44.28	25.56	2.80	38.00	34.64	74.00	-39.36	HORIZONTAL	Peak
3	3445.535	45.73	28.87	4.18	36.96	41.82	68.20	-26.38	HORIZONTAL	Peak
4	4379.699	46.21	30.64	4.69	36.81	44.73	74.00	-29.27	HORIZONTAL	Peak
5	11020.000	39.19	40.10	7.71	37.24	49.76	74.00	-24.24	HORIZONTAL	Peak
6	16530.000	36.23	39.76	9.44	35.38	50.05	68.20	-18.15	HORIZONTAL	Peak




Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

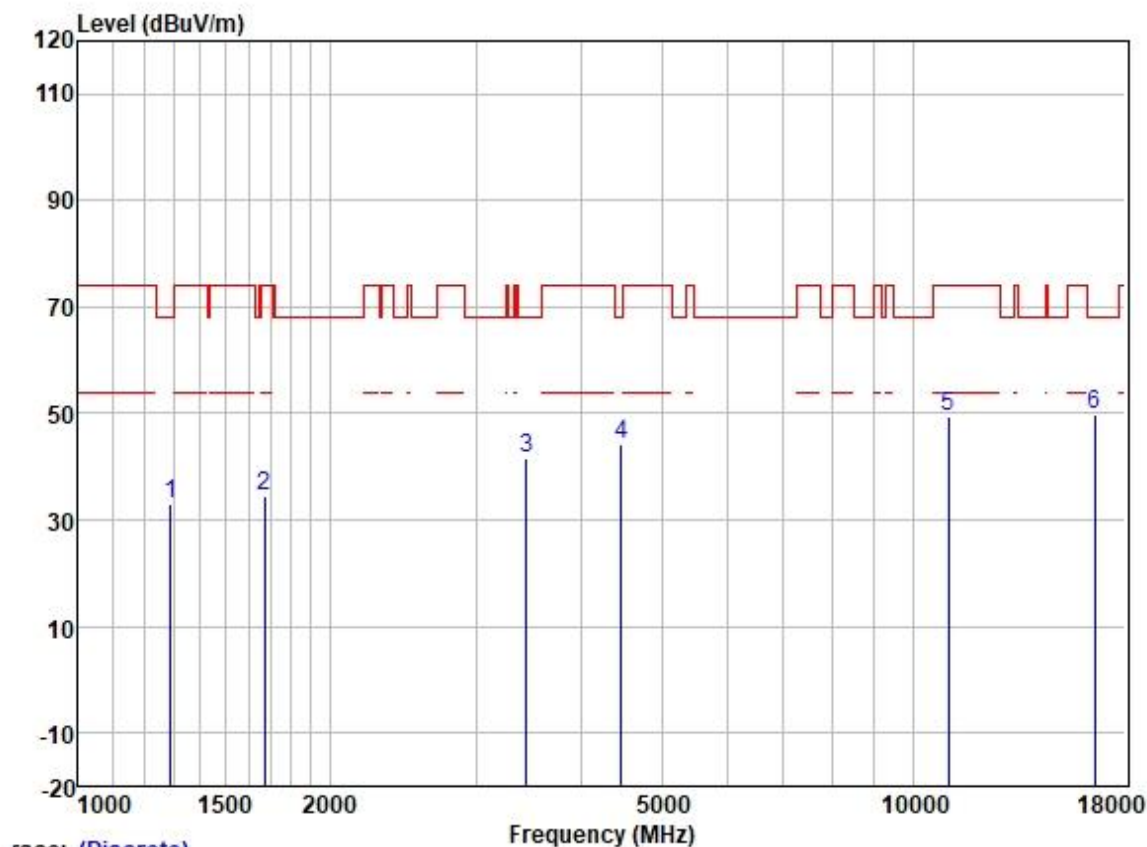

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	dB		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	43.60	25.17	2.55	38.31	33.01	68.20	-35.19	VERTICAL	Peak
2	1672.779	43.97	25.67	2.80	37.91	34.53	74.00	-39.47	VERTICAL	Peak
3	3445.535	45.48	28.87	4.18	36.96	41.57	68.20	-26.63	VERTICAL	Peak
4	4469.214	45.18	30.77	4.93	36.81	44.07	68.20	-24.13	VERTICAL	Peak
5	11020.000	39.02	40.10	7.71	37.24	49.59	74.00	-24.41	VERTICAL	Peak
6	16530.000	35.92	39.76	9.44	35.38	49.74	68.20	-18.46	VERTICAL	Peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

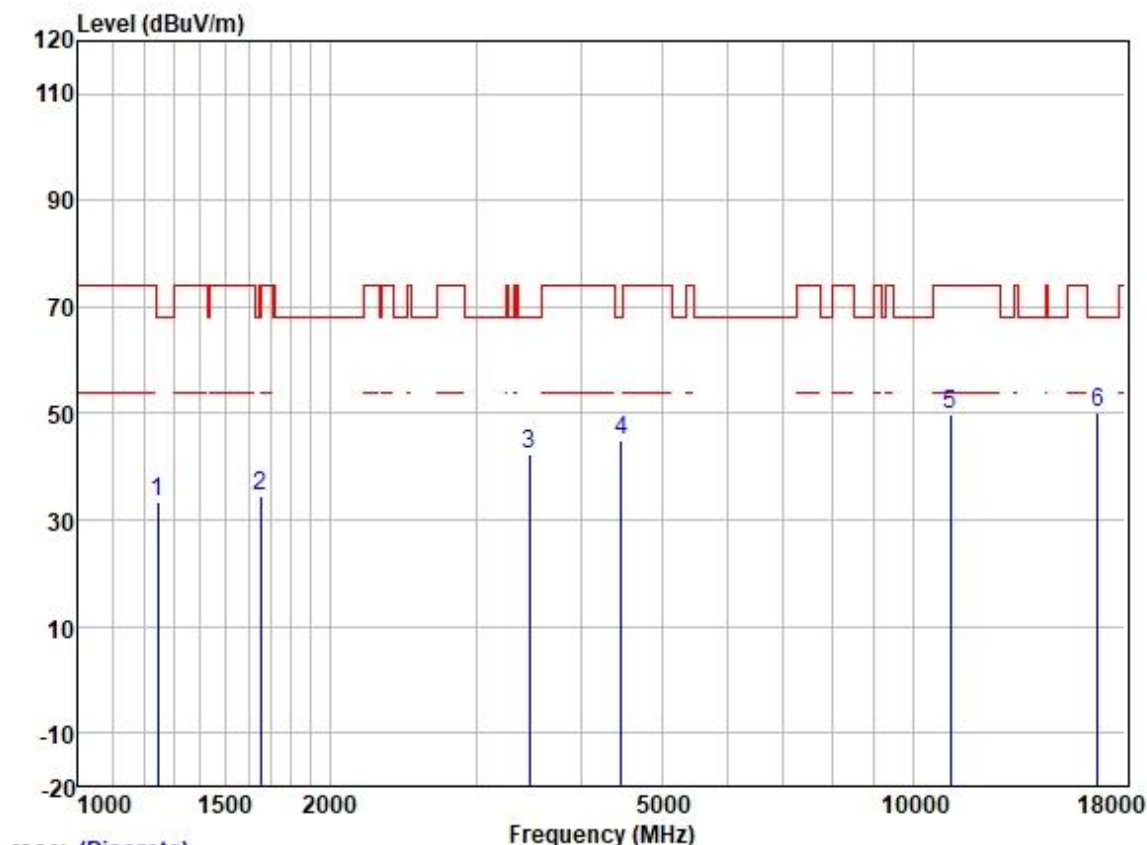

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1245.663	44.32	25.00	2.33	38.35	33.30	68.20	-34.90	HORIZONTAL	Peak
2	1653.550	44.09	25.64	2.80	37.93	34.60	68.20	-33.60	HORIZONTAL	Peak
3	3475.541	46.04	28.89	4.25	36.95	42.23	68.20	-25.97	HORIZONTAL	Peak
4	4469.214	46.13	30.77	4.93	36.81	45.02	68.20	-23.18	HORIZONTAL	Peak
5	11100.000	38.99	40.07	7.82	37.22	49.66	74.00	-24.34	HORIZONTAL	Peak
6	16650.000	36.12	40.10	9.43	35.38	50.27	68.20	-17.93	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

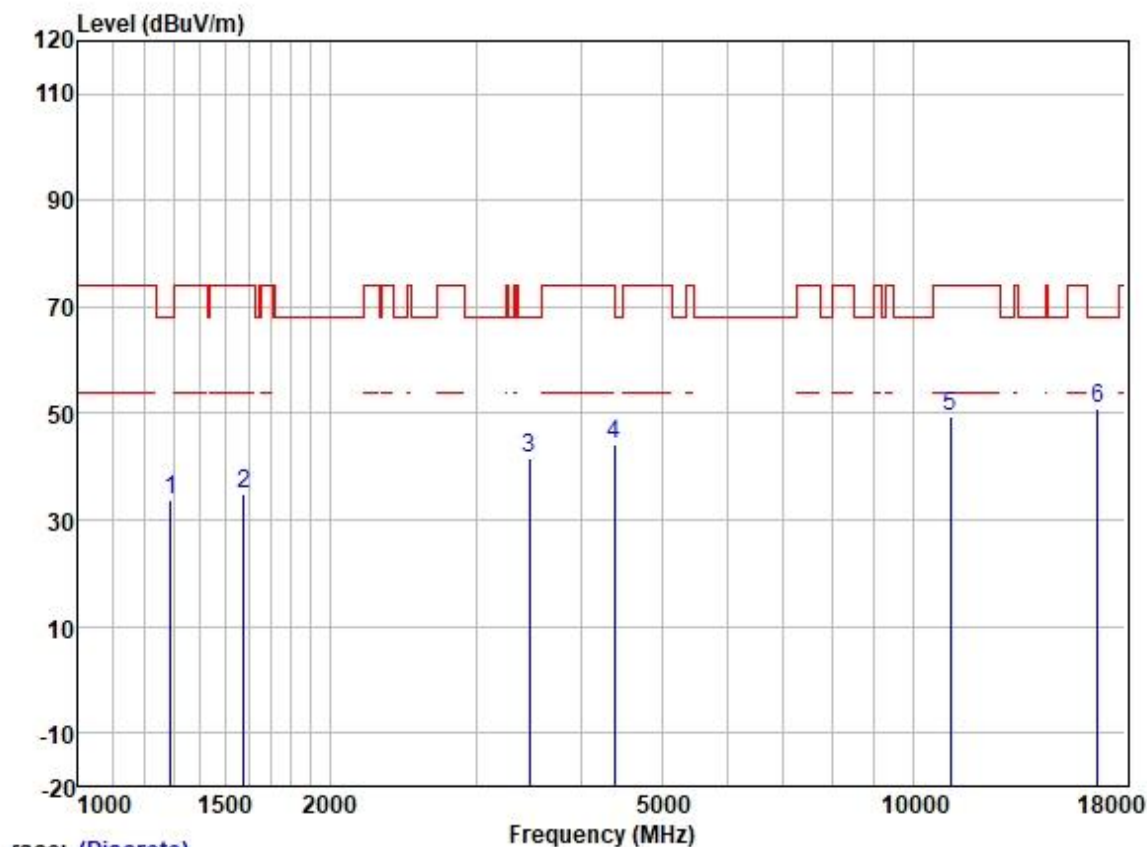

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	44.20	25.17	2.55	38.31	33.61	68.20	-34.59	VERTICAL	Peak
2	1578.822	44.34	25.56	2.80	38.00	34.70	74.00	-39.30	VERTICAL	Peak
3	3475.541	45.49	28.89	4.25	36.95	41.68	68.20	-26.52	VERTICAL	Peak
4	4392.376	45.51	30.66	4.70	36.81	44.06	74.00	-29.94	VERTICAL	Peak
5	11100.000	38.94	40.07	7.82	37.22	49.61	74.00	-24.39	VERTICAL	Peak
6	16650.000	36.76	40.10	9.43	35.38	50.91	68.20	-17.29	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

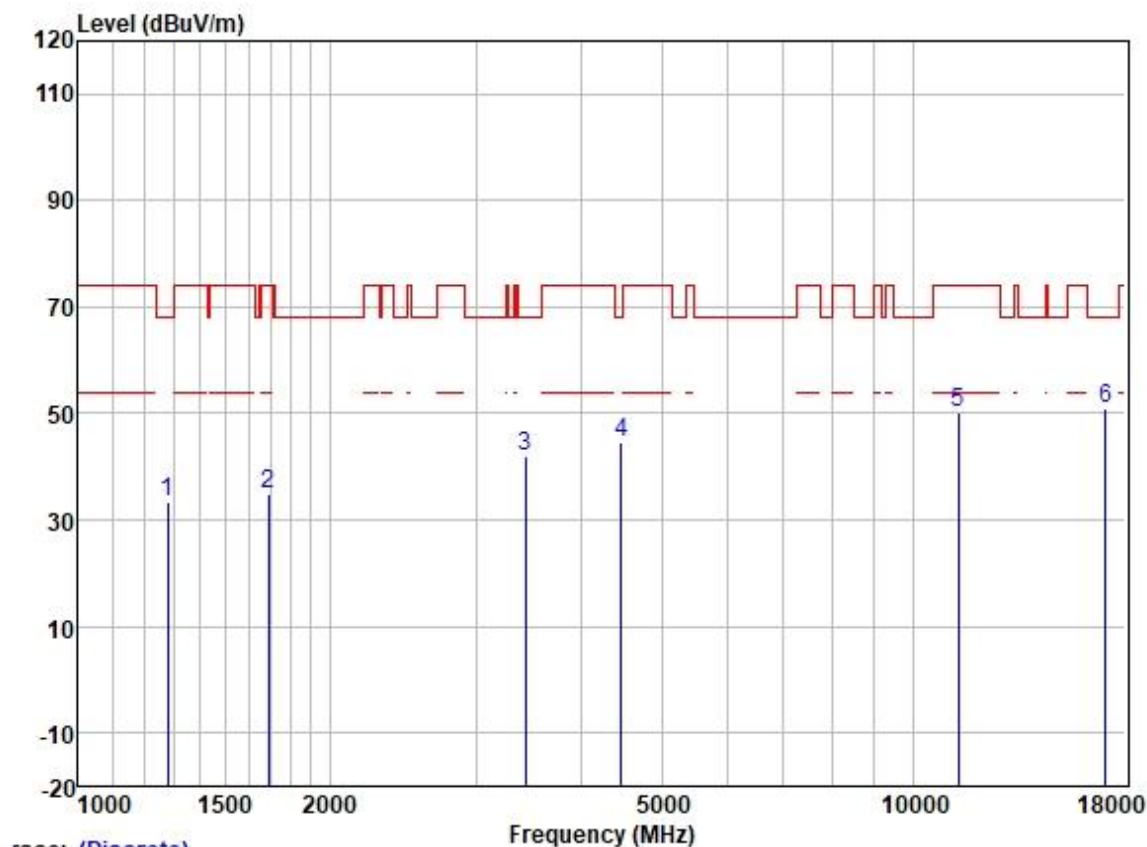

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1278.492	44.22	25.14	2.50	38.33	33.53	68.20	-34.67	HORIZONTAL	Peak
2	1692.231	44.45	25.70	2.80	37.89	35.06	74.00	-38.94	HORIZONTAL	Peak
3	3435.590	46.07	28.87	4.16	36.97	42.13	68.20	-26.07	HORIZONTAL	Peak
4	4469.214	45.83	30.77	4.93	36.81	44.72	68.20	-23.48	HORIZONTAL	Peak
5	11340.000	39.20	39.97	8.18	37.17	50.18	74.00	-23.82	HORIZONTAL	Peak
6	17010.000	35.21	41.75	9.39	35.35	51.00	68.20	-17.20	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

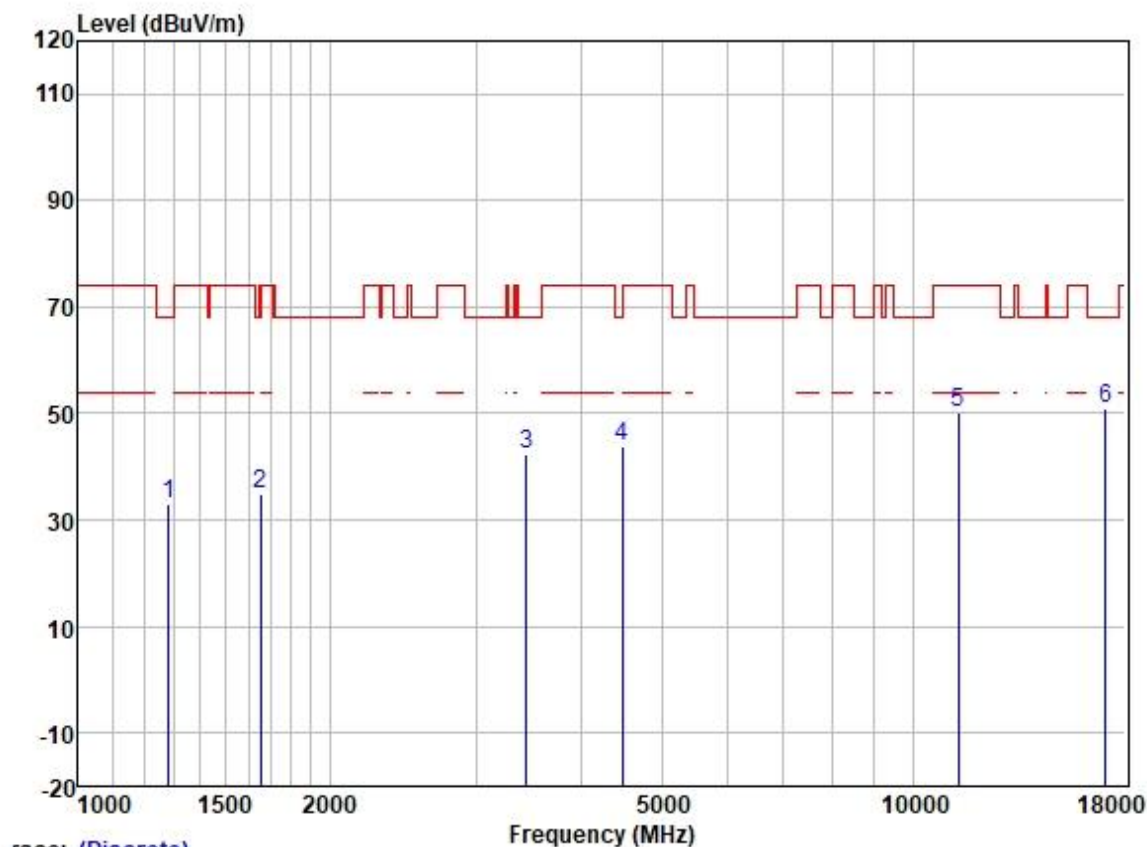

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1282.193	43.70	25.15	2.52	38.33	33.04	68.20	-35.16	VERTICAL	Peak
2	1653.550	44.35	25.64	2.80	37.93	34.86	68.20	-33.34	VERTICAL	Peak
3	3445.535	46.21	28.87	4.18	36.96	42.30	68.20	-25.90	VERTICAL	Peak
4	4482.150	45.03	30.78	4.99	36.81	43.99	68.20	-24.21	VERTICAL	Peak
5	11340.000	39.19	39.97	8.18	37.17	50.17	74.00	-23.83	VERTICAL	Peak
6	17010.000	35.32	41.75	9.39	35.35	51.11	68.20	-17.09	VERTICAL	Peak


Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

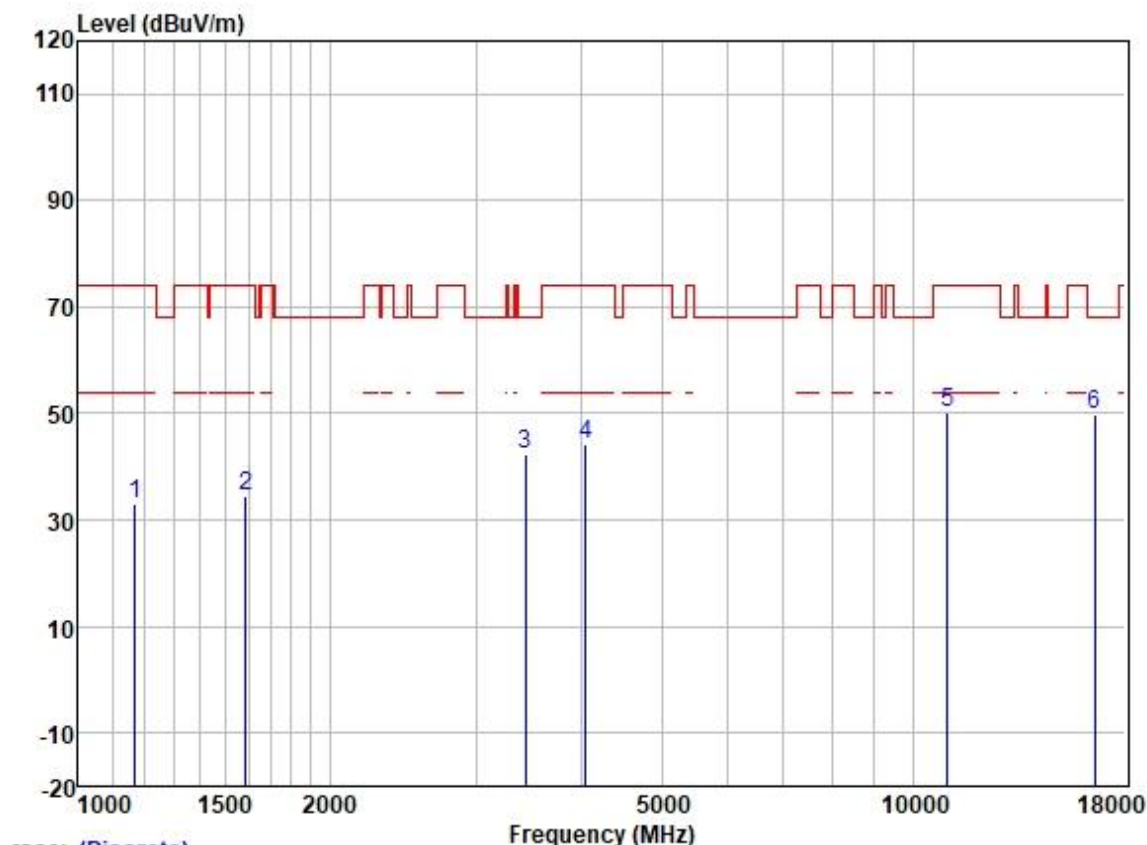

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1168.920	44.32	24.55	2.39	38.40	32.86	74.00	-41.14	HORIZONTAL	Peak
2	1587.975	44.07	25.57	2.80	37.98	34.46	74.00	-39.54	HORIZONTAL	Peak
3	3435.590	46.21	28.87	4.16	36.97	42.27	68.20	-25.93	HORIZONTAL	Peak
4	4050.904	46.39	29.87	4.60	36.80	44.06	74.00	-29.94	HORIZONTAL	Peak
5	11000.000	39.57	40.10	7.71	37.25	50.13	74.00	-23.87	HORIZONTAL	Peak
6	16500.000	36.10	39.60	9.44	35.38	49.76	68.20	-18.44	HORIZONTAL	Peak




Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

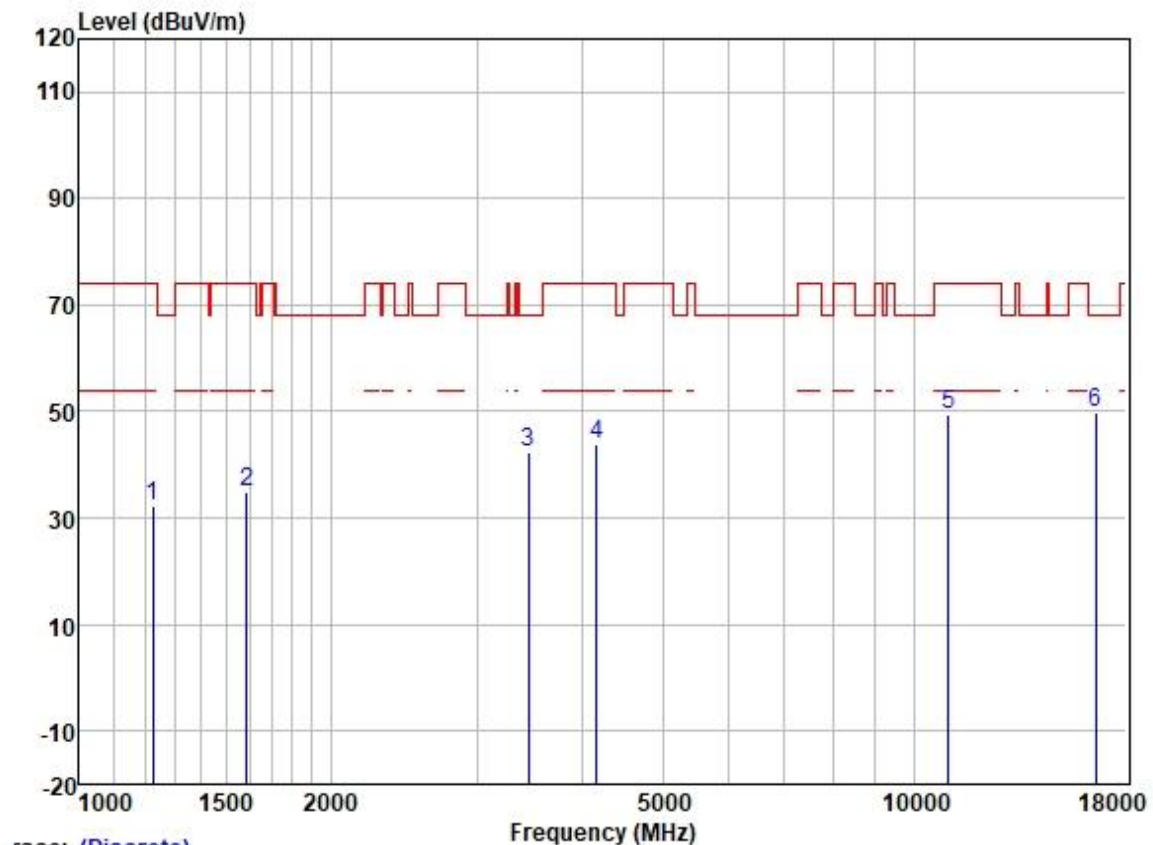

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1224.247	43.63	24.85	2.31	38.37	32.42	74.00	-41.58	VERTICAL	Peak
2	1587.975	44.62	25.57	2.80	37.98	35.01	74.00	-38.99	VERTICAL	Peak
3	3455.508	46.25	28.88	4.20	36.96	42.37	68.20	-25.83	VERTICAL	Peak
4	4169.698	45.86	30.09	4.60	36.80	43.75	74.00	-30.25	VERTICAL	Peak
5	11000.000	38.86	40.10	7.71	37.25	49.42	74.00	-24.58	VERTICAL	Peak
6	16500.000	36.14	39.60	9.44	35.38	49.80	68.20	-18.40	VERTICAL	Peak




Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

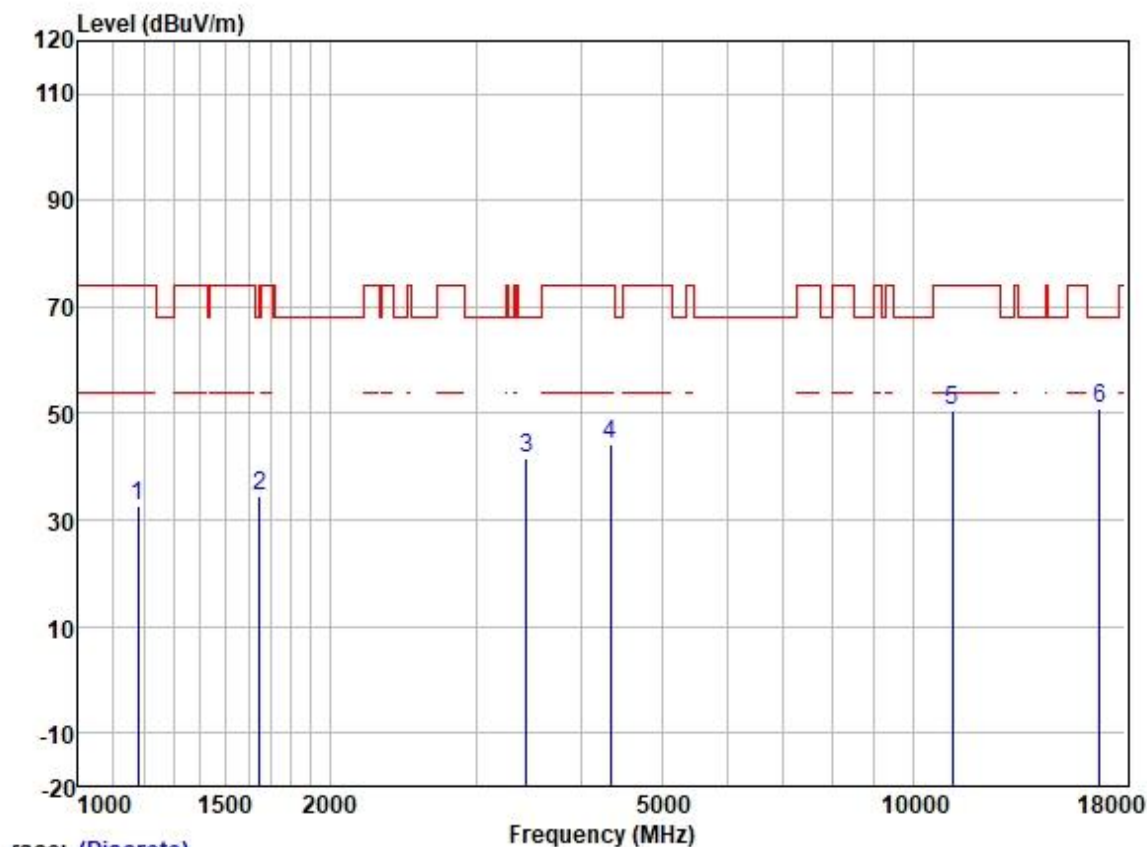

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1179.100	44.18	24.59	2.38	38.40	32.75	74.00	-41.25	HORIZONTAL	Peak
2	1648.778	44.04	25.63	2.80	37.93	34.54	68.20	-33.66	HORIZONTAL	Peak
3	3445.535	45.55	28.87	4.18	36.96	41.64	68.20	-26.56	HORIZONTAL	Peak
4	4341.886	45.83	30.57	4.67	36.81	44.26	74.00	-29.74	HORIZONTAL	Peak
5	11160.000	39.70	40.04	7.90	37.21	50.43	74.00	-23.57	HORIZONTAL	Peak
6	16740.000	36.58	40.49	9.41	35.37	51.11	68.20	-17.09	HORIZONTAL	Peak


Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

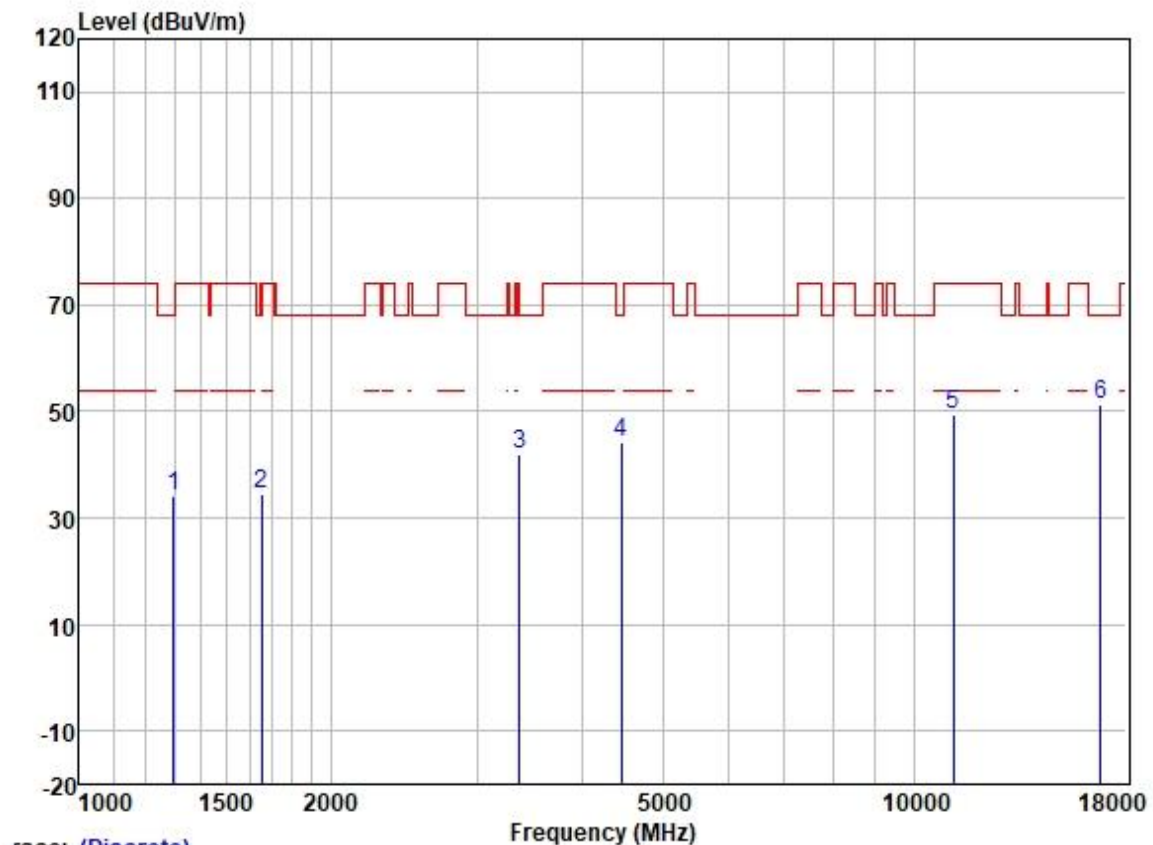

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
		dBuV	dB/m	dB	dB			dB		
1	1297.103	44.80	25.19	2.58	38.31	34.26	68.20	-33.94	VERTICAL	Peak
2	1653.550	44.17	25.64	2.80	37.93	34.68	68.20	-33.52	VERTICAL	Peak
3	3366.778	45.87	28.82	4.09	36.99	41.79	68.20	-26.41	VERTICAL	Peak
4	4456.315	45.29	30.75	4.88	36.81	44.11	68.20	-24.09	VERTICAL	Peak
5	11160.000	38.64	40.04	7.90	37.21	49.37	74.00	-24.63	VERTICAL	Peak
6	16740.000	36.70	40.49	9.41	35.37	51.23	68.20	-16.97	VERTICAL	Peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

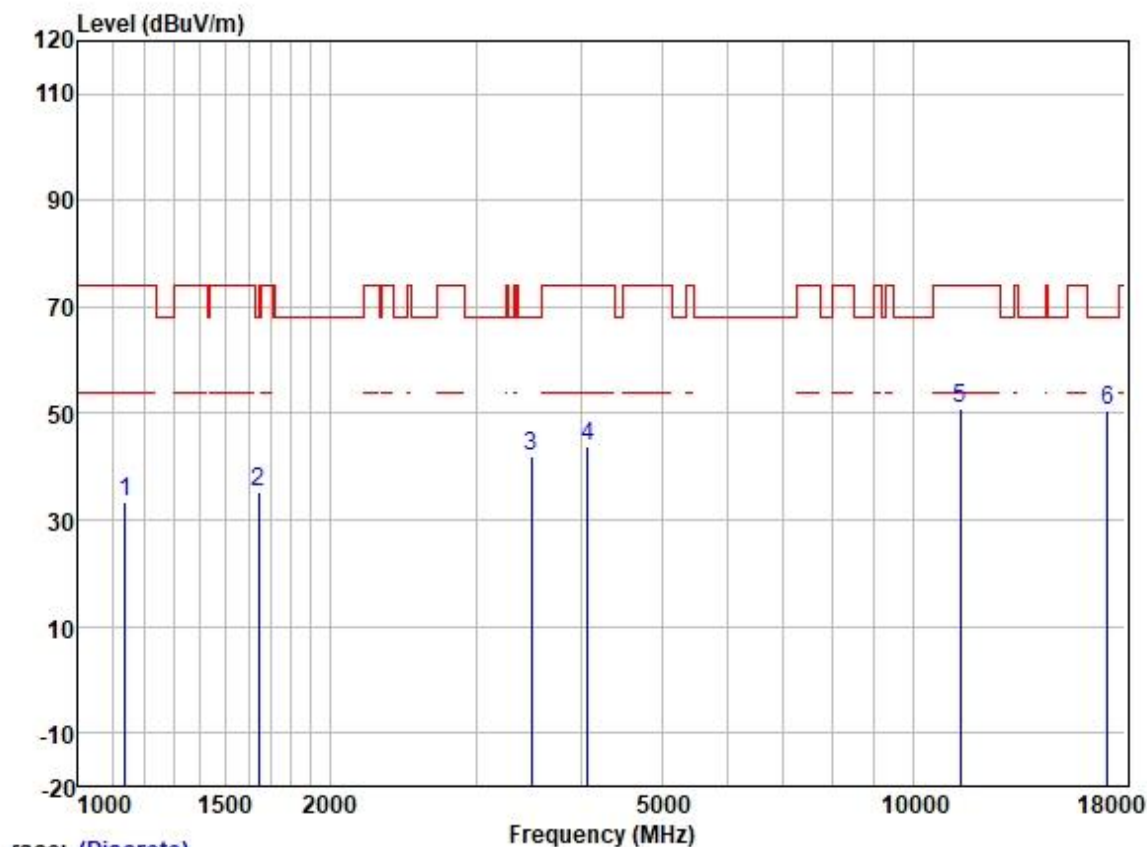


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1138.904	45.15	24.46	2.27	38.42	33.46	74.00	-40.54	HORIZONTAL	Peak
2	1644.019	44.59	25.63	2.80	37.93	35.09	68.20	-33.11	HORIZONTAL	Peak
3	3495.691	45.57	28.90	4.30	36.94	41.83	68.20	-26.37	HORIZONTAL	Peak
4	4074.388	46.17	29.90	4.60	36.80	43.87	74.00	-30.13	HORIZONTAL	Peak
5	11400.000	39.82	39.94	8.28	37.16	50.88	74.00	-23.12	HORIZONTAL	Peak
6	17100.000	34.06	42.32	9.63	35.34	50.67	68.20	-17.53	HORIZONTAL	Peak




Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

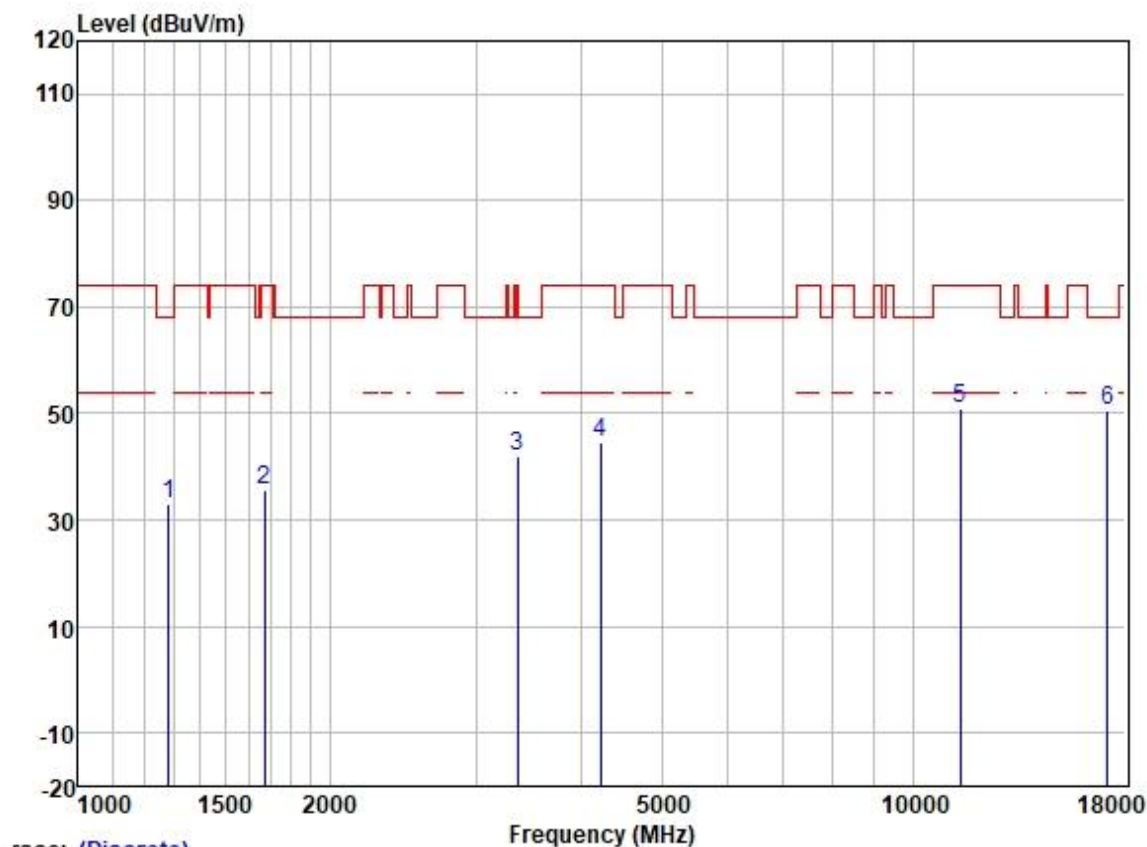

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1282.193	43.78	25.15	2.52	38.33	33.12	68.20	-35.08	VERTICAL	Peak
2	1672.779	45.00	25.67	2.80	37.91	35.56	74.00	-38.44	VERTICAL	Peak
3	3357.061	46.03	28.81	4.09	37.01	41.92	74.00	-32.08	VERTICAL	Peak
4	4230.396	46.52	30.26	4.61	36.81	44.58	74.00	-29.42	VERTICAL	Peak
5	11400.000	39.72	39.94	8.28	37.16	50.78	74.00	-23.22	VERTICAL	Peak
6	17100.000	33.88	42.32	9.63	35.34	50.49	68.20	-17.71	VERTICAL	Peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

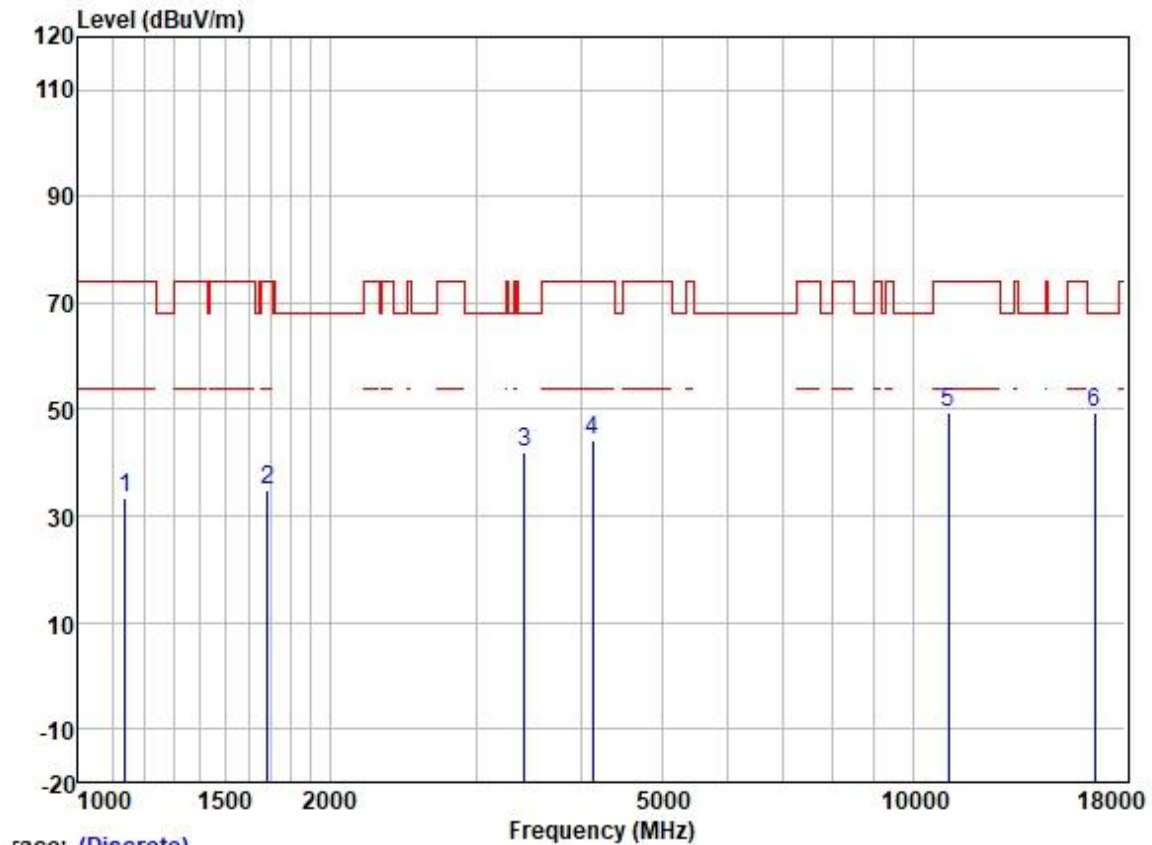


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1138.904	45.07	24.46	2.27	38.42	33.38	74.00	-40.62	HORIZONTAL	Peak
2	1687.347	44.15	25.69	2.80	37.91	34.73	74.00	-39.27	HORIZONTAL	Peak
3	3425.675	45.98	28.86	4.15	36.97	42.02	68.20	-26.18	HORIZONTAL	Peak
4	4133.699	46.28	30.01	4.60	36.80	44.09	74.00	-29.91	HORIZONTAL	Peak
5	11020.000	39.01	40.10	7.71	37.24	49.58	74.00	-24.42	HORIZONTAL	Peak
6	16530.000	35.80	39.76	9.44	35.38	49.62	68.20	-18.58	HORIZONTAL	Peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

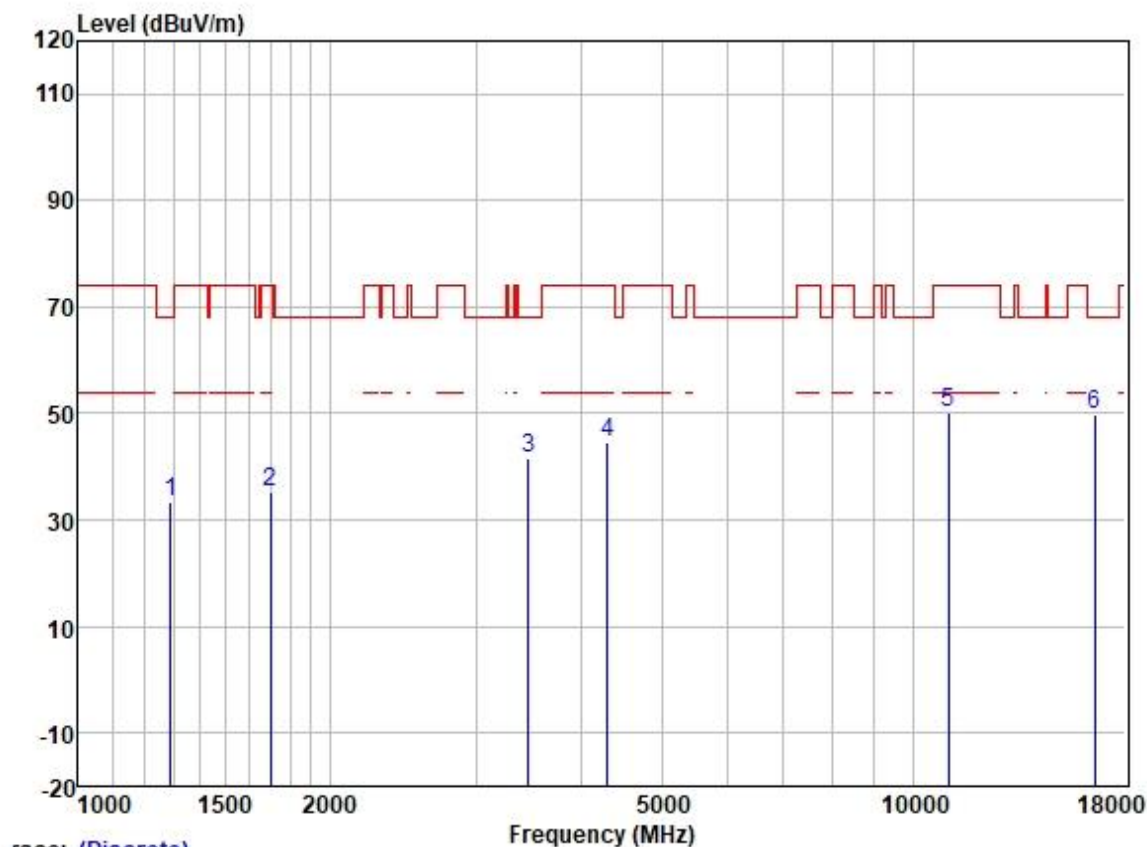

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	43.96	25.17	2.55	38.31	33.37	68.20	-34.83	VERTICAL	Peak
2	1697.129	44.45	25.71	2.80	37.89	35.07	74.00	-38.93	VERTICAL	Peak
3	3465.510	45.62	28.88	4.22	36.95	41.77	68.20	-26.43	VERTICAL	Peak
4	4304.400	46.14	30.48	4.65	36.81	44.46	74.00	-29.54	VERTICAL	Peak
5	11020.000	39.63	40.10	7.71	37.24	50.20	74.00	-23.80	VERTICAL	Peak
6	16530.000	36.06	39.76	9.44	35.38	49.88	68.20	-18.32	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:middle

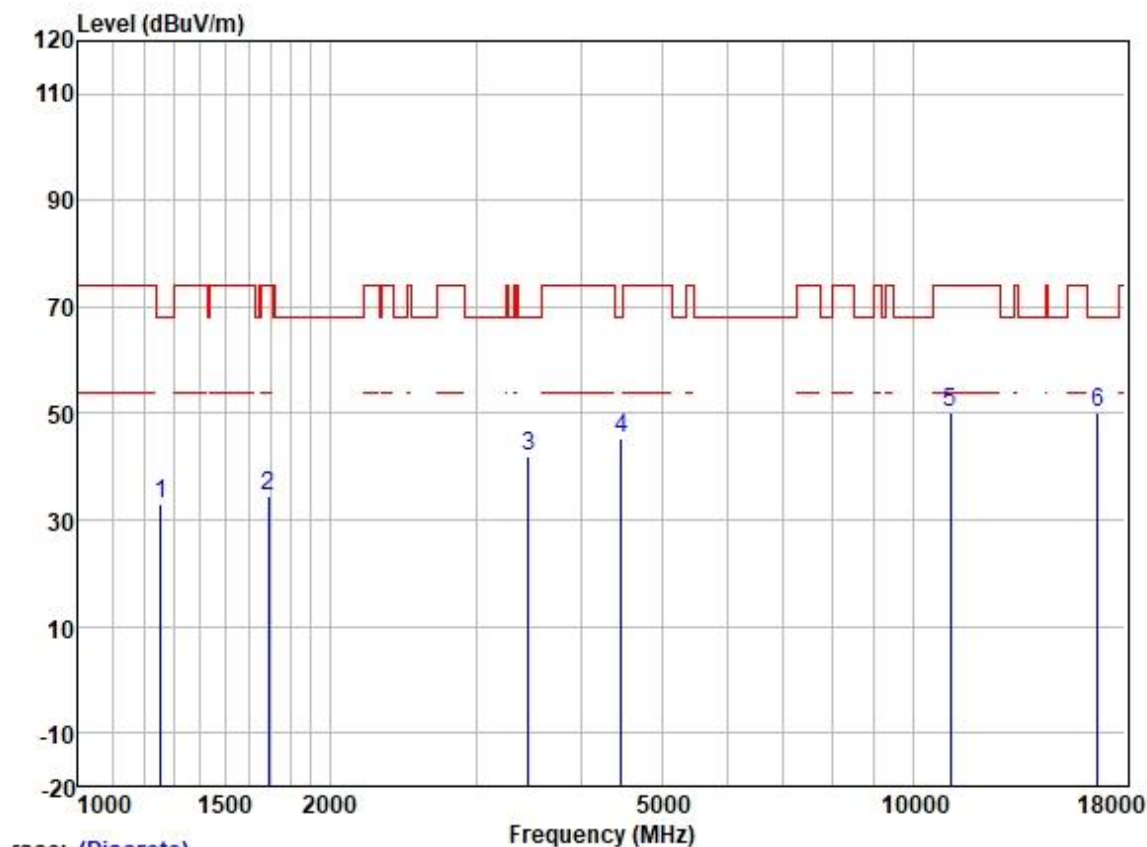

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1256.512	43.85	25.05	2.38	38.35	32.93	68.20	-35.27	HORIZONTAL	Peak
2	1692.231	43.80	25.70	2.80	37.89	34.41	74.00	-39.59	HORIZONTAL	Peak
3	3465.510	45.98	28.88	4.22	36.95	42.13	68.20	-26.07	HORIZONTAL	Peak
4	4469.214	46.36	30.77	4.93	36.81	45.25	68.20	-22.95	HORIZONTAL	Peak
5	11100.000	39.56	40.07	7.82	37.22	50.23	74.00	-23.77	HORIZONTAL	Peak
6	16650.000	35.94	40.10	9.43	35.38	50.09	68.20	-18.11	HORIZONTAL	Peak




Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:middle

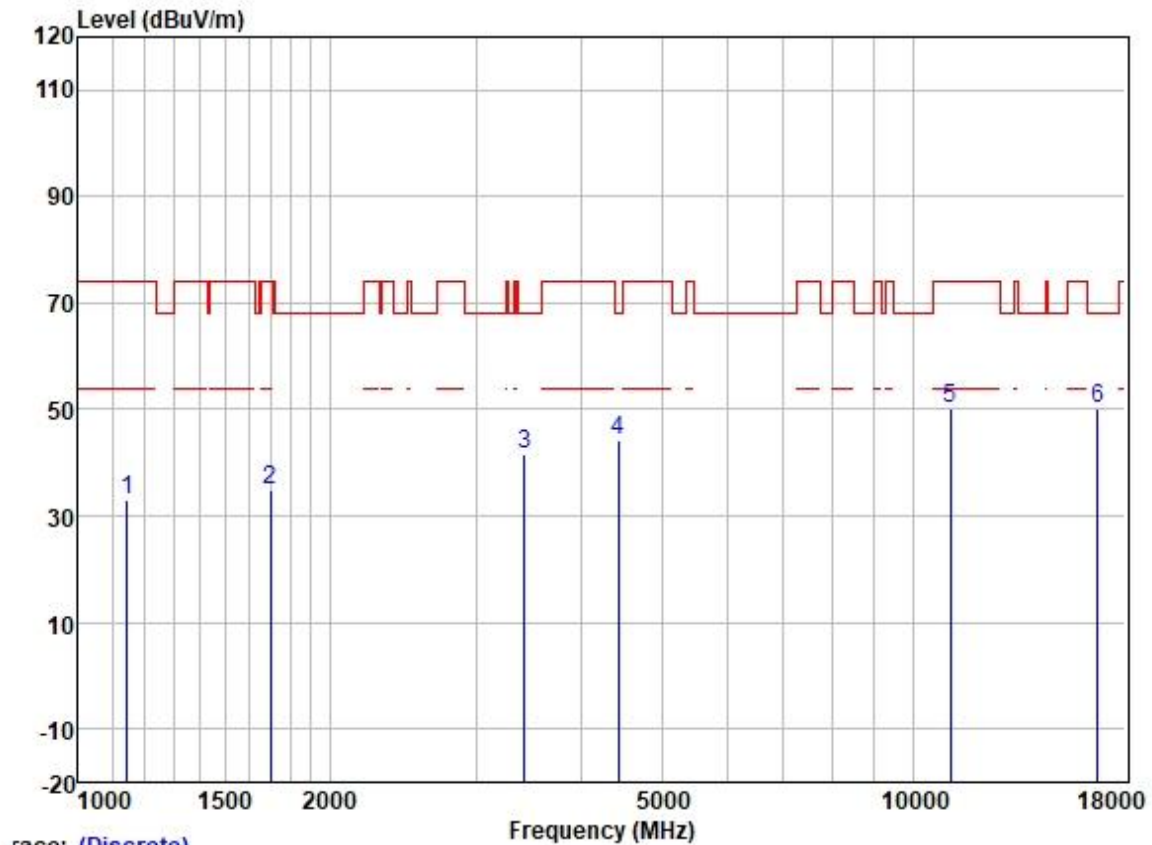

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1145.507	44.45	24.48	2.32	38.42	32.83	74.00	-41.17	VERTICAL	Peak
2	1697.129	44.17	25.71	2.80	37.89	34.79	74.00	-39.21	VERTICAL	Peak
3	3425.675	45.53	28.86	4.15	36.97	41.57	68.20	-26.63	VERTICAL	Peak
4	4443.453	45.43	30.73	4.83	36.81	44.18	68.20	-24.02	VERTICAL	Peak
5	11100.000	39.47	40.07	7.82	37.22	50.14	74.00	-23.86	VERTICAL	Peak
6	16650.000	36.17	40.10	9.43	35.38	50.32	68.20	-17.88	VERTICAL	Peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

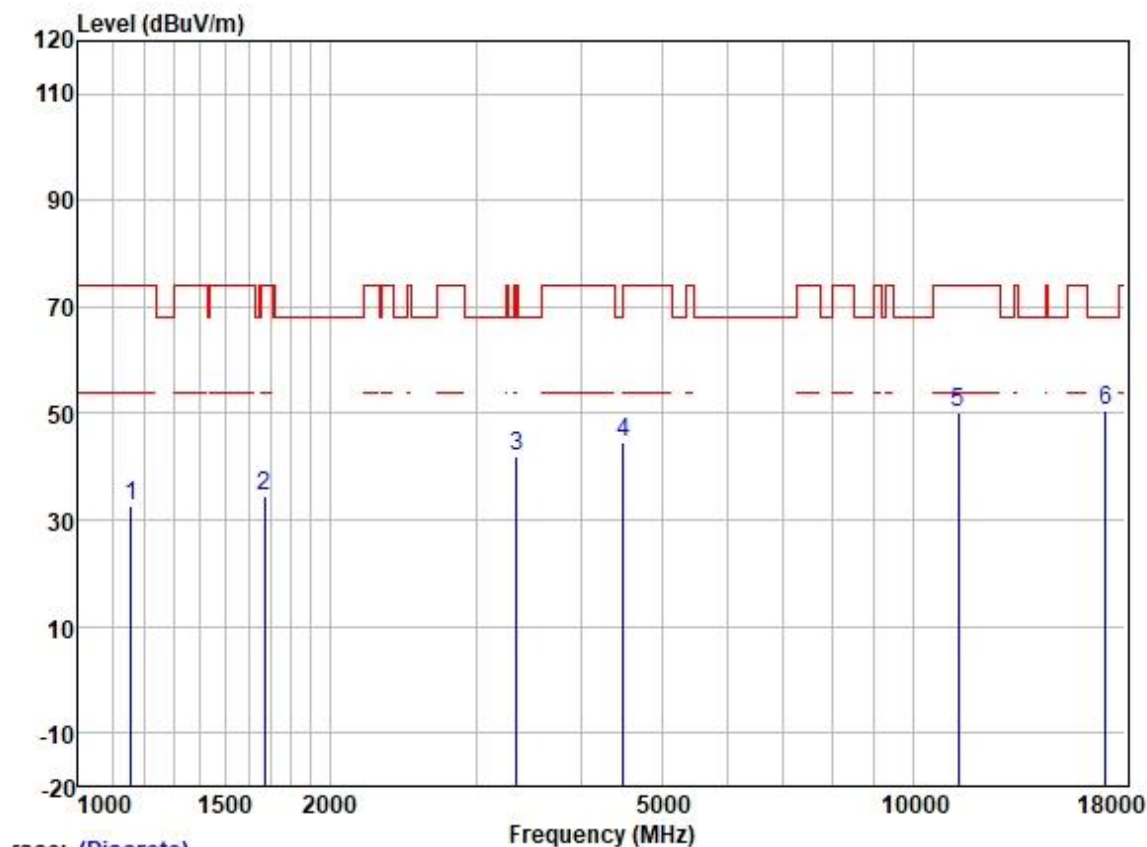

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1155.483	44.30	24.51	2.38	38.42	32.77	74.00	-41.23	HORIZONTAL	Peak
2	1672.779	44.10	25.67	2.80	37.91	34.66	74.00	-39.34	HORIZONTAL	Peak
3	3347.371	45.99	28.80	4.08	37.01	41.86	74.00	-32.14	HORIZONTAL	Peak
4	4495.125	45.42	30.80	5.05	36.82	44.45	68.20	-23.75	HORIZONTAL	Peak
5	11340.000	39.30	39.97	8.18	37.17	50.28	74.00	-23.72	HORIZONTAL	Peak
6	17010.000	34.71	41.75	9.39	35.35	50.50	68.20	-17.70	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

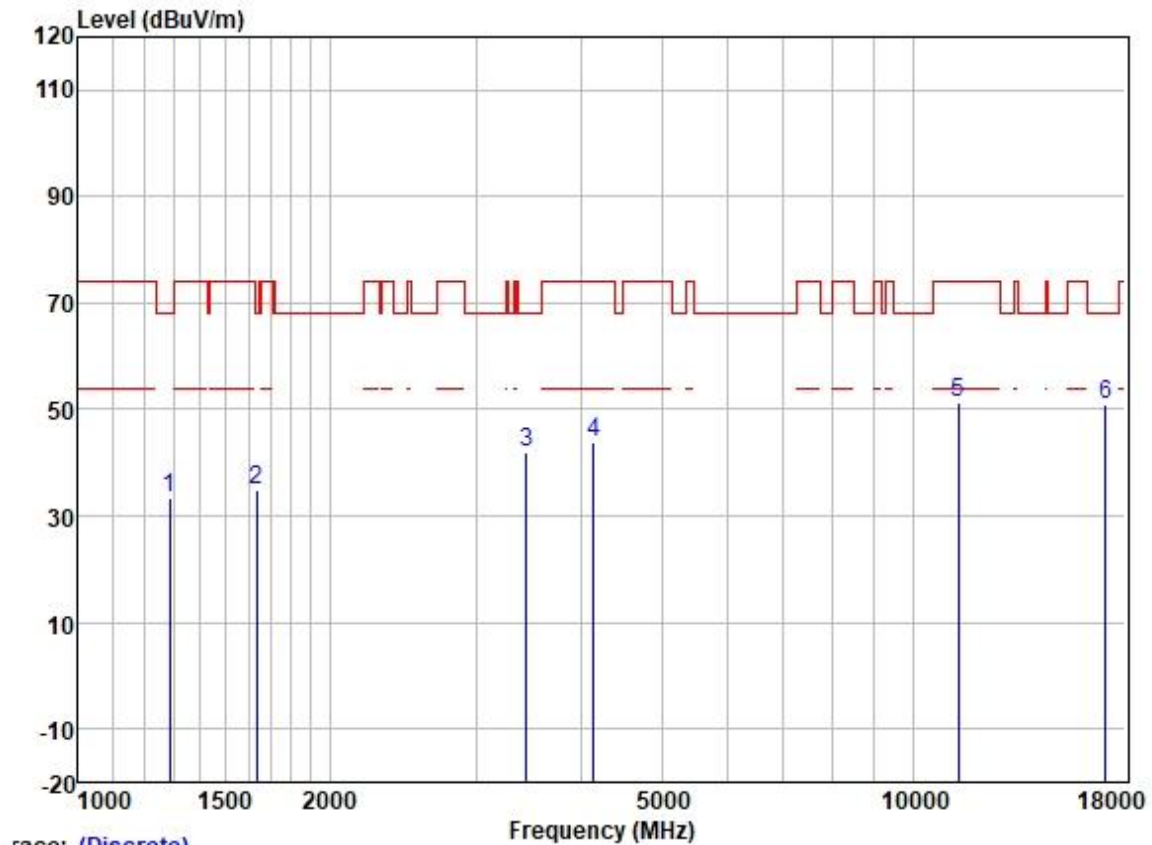

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1285.904	44.16	25.16	2.53	38.33	33.52	68.20	-34.68	VERTICAL	Peak
2	1634.543	44.23	25.62	2.80	37.95	34.70	68.20	-33.50	VERTICAL	Peak
3	3445.535	45.82	28.87	4.18	36.96	41.91	68.20	-26.29	VERTICAL	Peak
4	4145.664	45.96	30.03	4.60	36.80	43.79	74.00	-30.21	VERTICAL	Peak
5	11340.000	40.22	39.97	8.18	37.17	51.20	74.00	-22.80	VERTICAL	Peak
6	17010.000	35.09	41.75	9.39	35.35	50.88	68.20	-17.32	VERTICAL	Peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

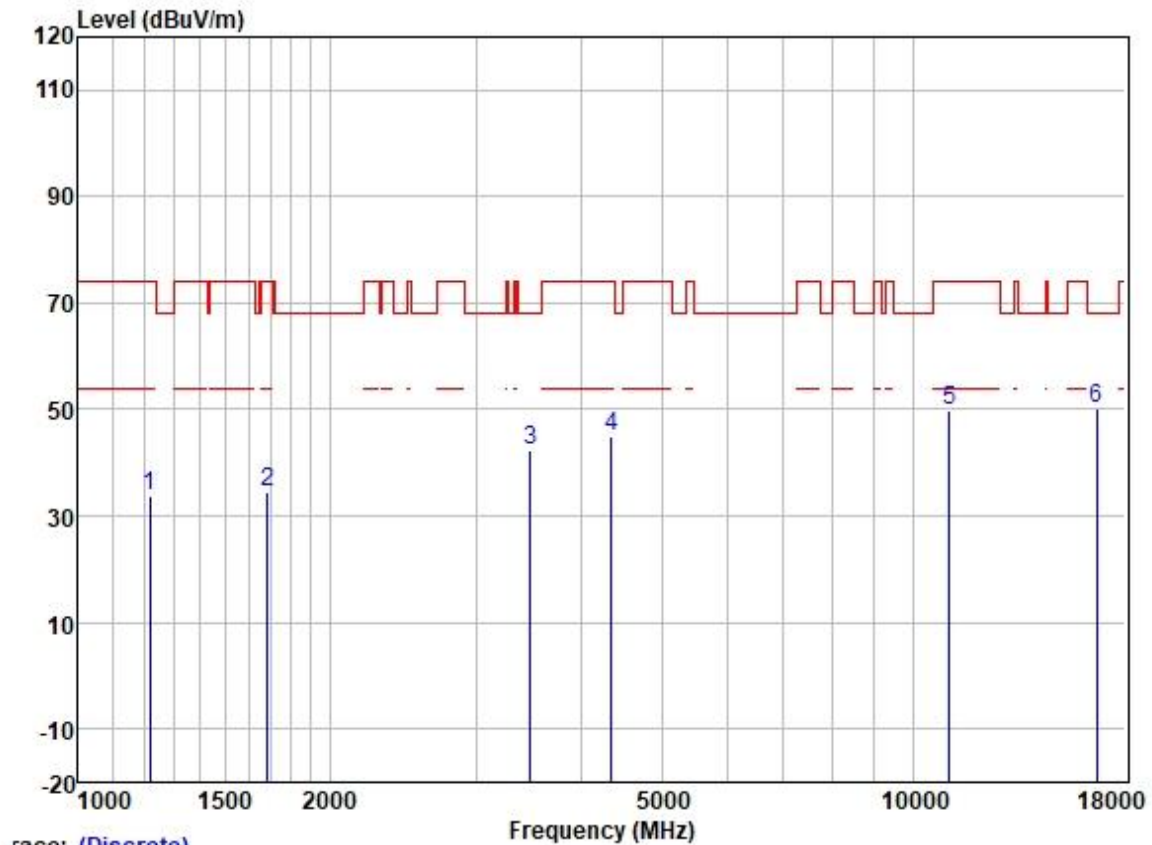


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	45.20	24.79	2.32	38.37	33.94	74.00	-40.06	HORIZONTAL	Peak
2	1687.347	44.04	25.69	2.80	37.91	34.62	74.00	-39.38	HORIZONTAL	Peak
3	3485.601	46.07	28.89	4.27	36.95	42.28	68.20	-25.92	HORIZONTAL	Peak
4	4354.454	46.40	30.59	4.68	36.81	44.86	74.00	-29.14	HORIZONTAL	Peak
5	11060.000	39.03	40.09	7.74	37.23	49.63	74.00	-24.37	HORIZONTAL	Peak
6	16590.000	36.24	39.93	9.43	35.38	50.22	68.20	-17.98	HORIZONTAL	Peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

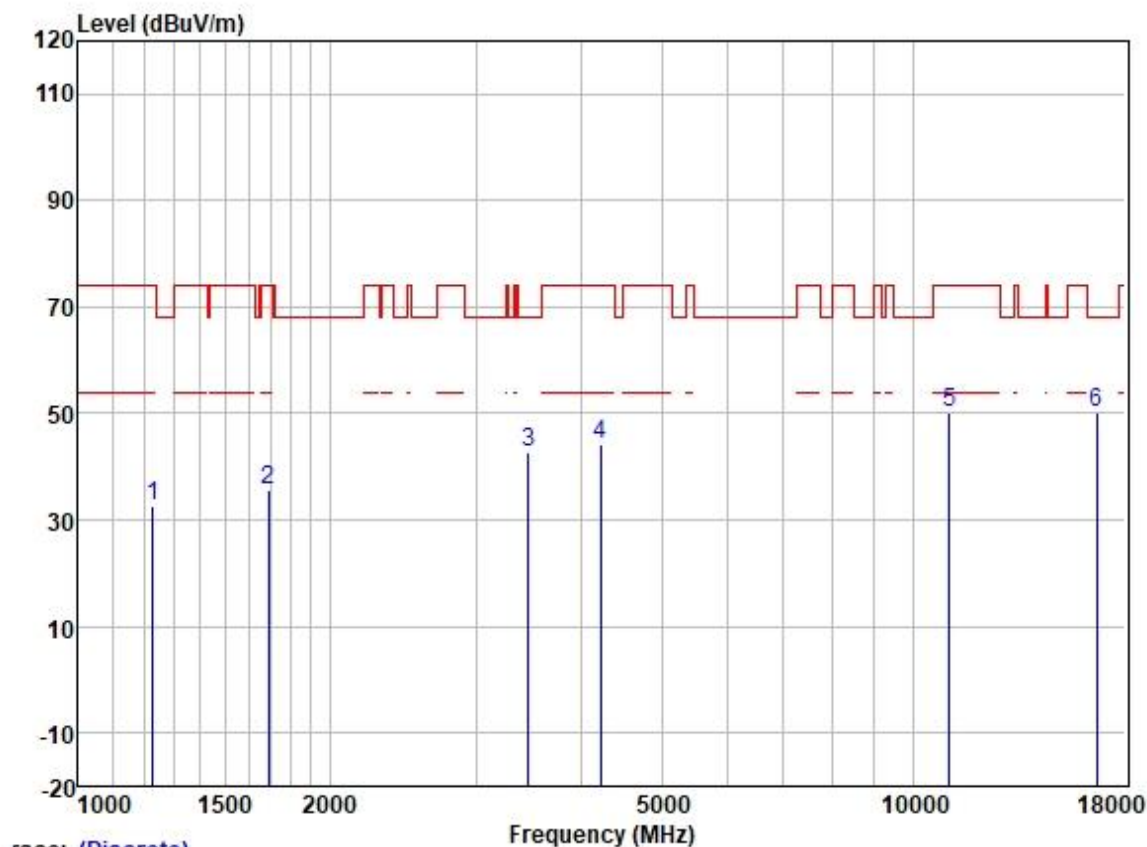


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1227.791	43.86	24.88	2.31	38.37	32.68	74.00	-41.32	VERTICAL	Peak
2	1692.231	44.95	25.70	2.80	37.89	35.56	74.00	-38.44	VERTICAL	Peak
3	3465.510	46.62	28.88	4.22	36.95	42.77	68.20	-25.43	VERTICAL	Peak
4	4230.396	46.16	30.26	4.61	36.81	44.22	74.00	-29.78	VERTICAL	Peak
5	11060.000	39.45	40.09	7.74	37.23	50.05	74.00	-23.95	VERTICAL	Peak
6	16590.000	36.05	39.93	9.43	35.38	50.03	68.20	-18.17	VERTICAL	Peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

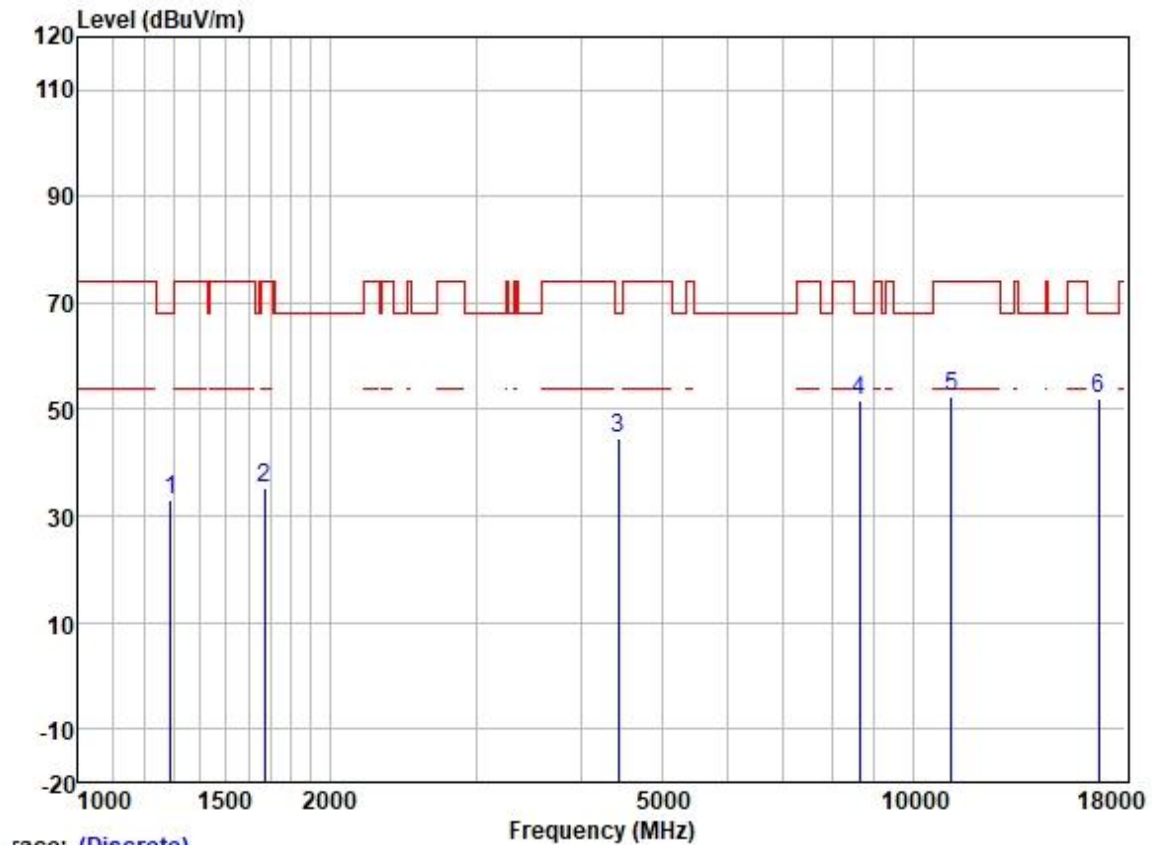


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	43.47	25.17	2.55	38.31	32.88	68.20	-35.32	HORIZONTAL	Peak
2	1672.779	44.63	25.67	2.80	37.91	35.19	74.00	-38.81	HORIZONTAL	Peak
3	4443.453	46.00	30.73	4.83	36.81	44.75	68.20	-23.45	HORIZONTAL	Peak
4	8638.399	44.94	37.26	6.92	37.55	51.57	68.20	-16.63	HORIZONTAL	Peak
5	11140.000	41.66	40.06	7.86	37.21	52.37	74.00	-21.63	HORIZONTAL	Peak
6	16710.000	37.69	40.29	9.42	35.37	52.03	68.20	-16.17	HORIZONTAL	Peak




Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

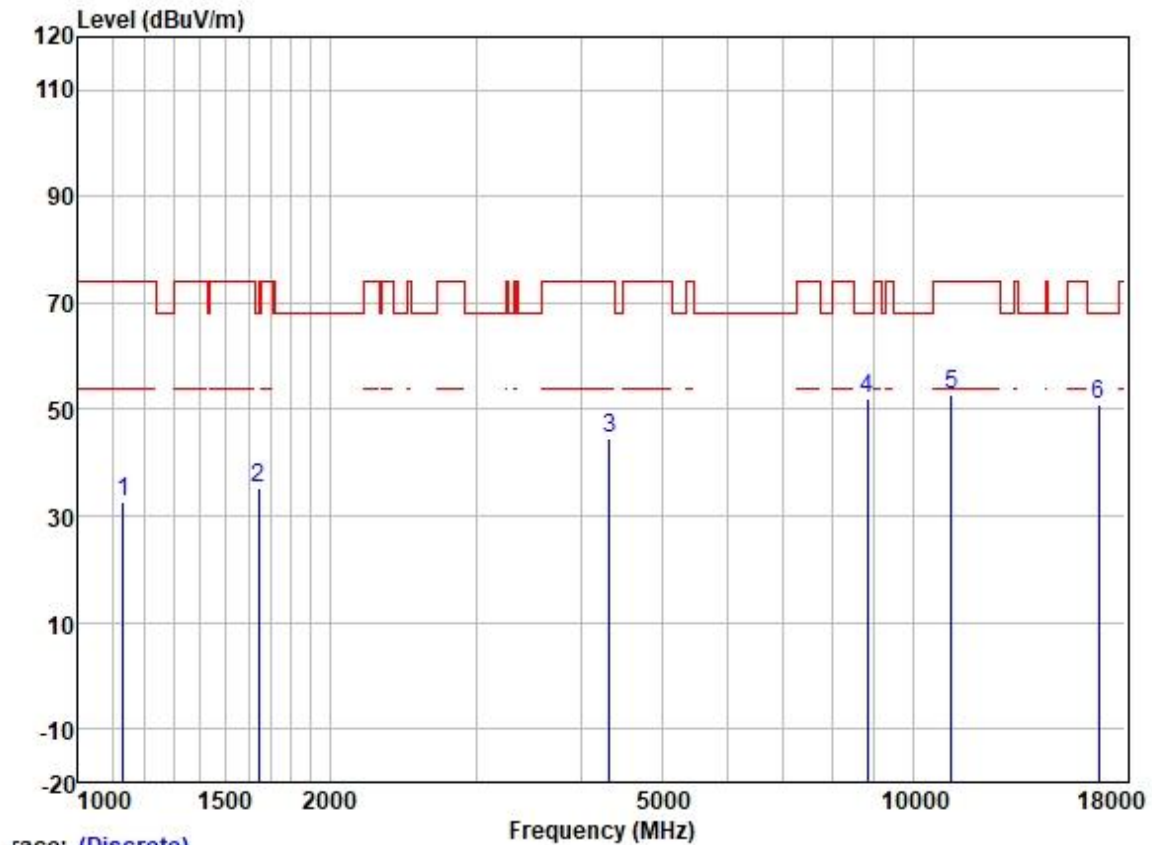

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1132.340	44.59	24.44	2.22	38.43	32.82	74.00	-41.18	VERTICAL	Peak
2	1644.019	44.59	25.63	2.80	37.93	35.09	68.20	-33.11	VERTICAL	Peak
3	4329.354	46.36	30.54	4.67	36.81	44.76	74.00	-29.24	VERTICAL	Peak
4	8814.957	44.99	37.34	7.29	37.53	52.09	68.20	-16.11	VERTICAL	Peak
5	11140.000	41.95	40.06	7.86	37.21	52.66	74.00	-21.34	VERTICAL	Peak
6	16710.000	36.70	40.29	9.42	35.37	51.04	68.20	-17.16	VERTICAL	Peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

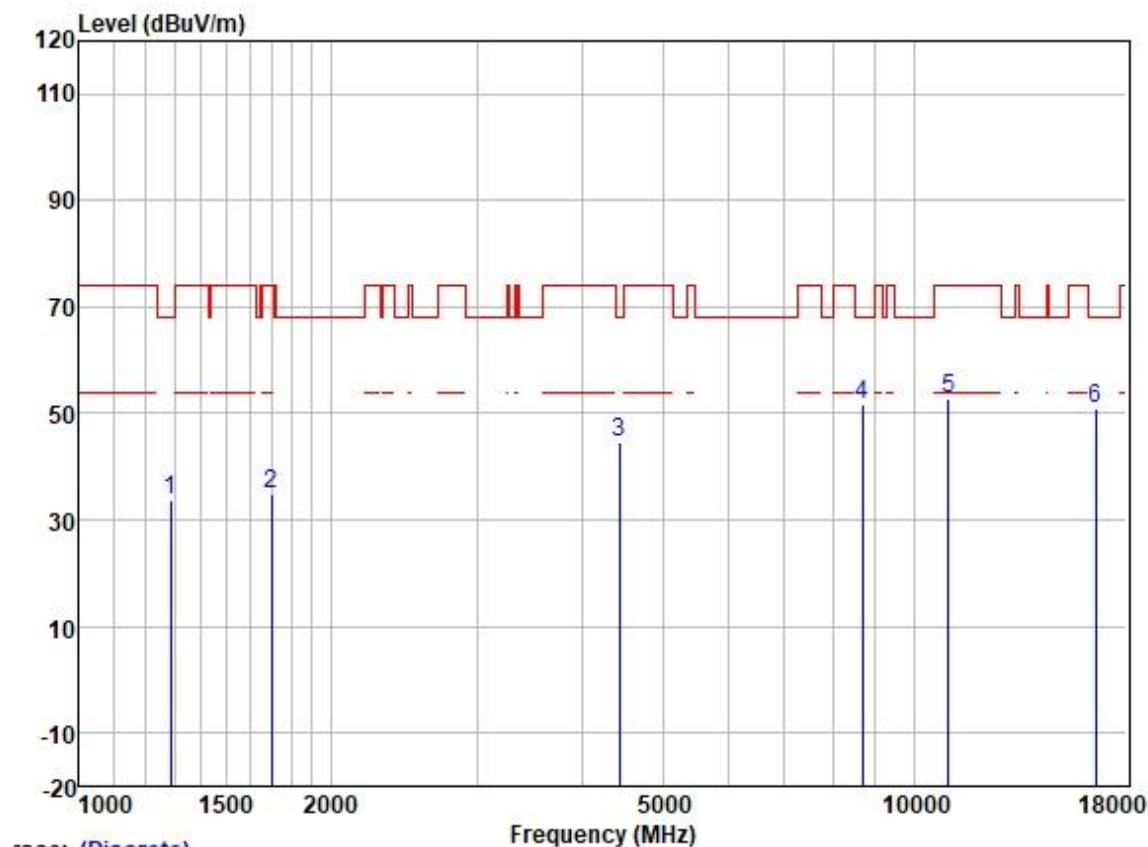

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1285.904	44.28	25.16	2.53	38.33	33.64	68.20	-34.56	HORIZONTAL	Peak
2	1697.129	44.37	25.71	2.80	37.89	34.99	74.00	-39.01	HORIZONTAL	Peak
3	4443.453	45.87	30.73	4.83	36.81	44.62	68.20	-23.58	HORIZONTAL	Peak
4	8688.480	44.83	37.28	7.02	37.55	51.58	68.20	-16.62	HORIZONTAL	Peak
5	11000.000	42.07	40.10	7.71	37.25	52.63	74.00	-21.37	HORIZONTAL	Peak
6	16500.000	37.20	39.60	9.44	35.38	50.86	68.20	-17.34	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 19; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

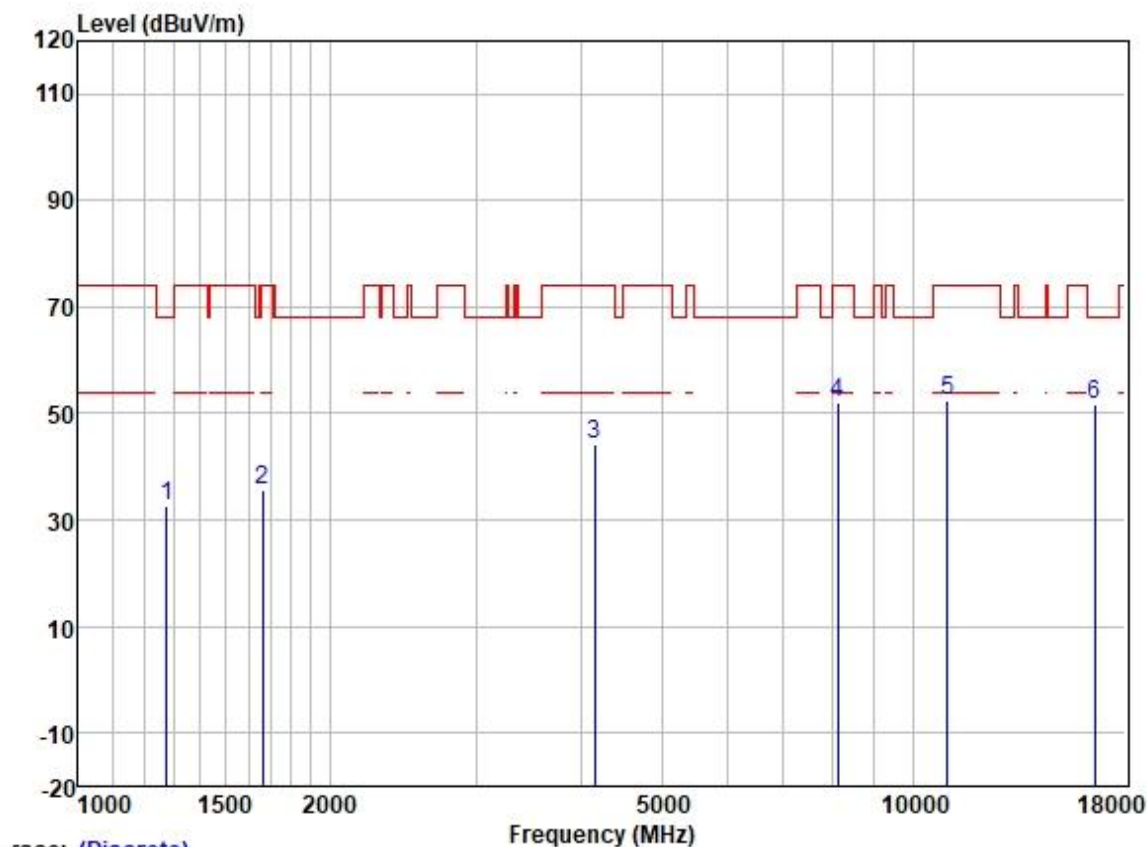

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1274.802	43.37	25.12	2.48	38.33	32.64	68.20	-35.56	VERTICAL	Peak
2	1663.137	45.25	25.65	2.80	37.91	35.79	74.00	-38.21	VERTICAL	Peak
3	4157.664	46.27	30.06	4.60	36.80	44.13	74.00	-29.87	VERTICAL	Peak
4	8129.664	46.40	36.95	6.27	37.59	52.03	74.00	-21.97	VERTICAL	Peak
5	11000.000	41.77	40.10	7.71	37.25	52.33	74.00	-21.67	VERTICAL	Peak
6	16500.000	37.92	39.60	9.44	35.38	51.58	68.20	-16.62	VERTICAL	Peak




Test Mode: 19; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:middle

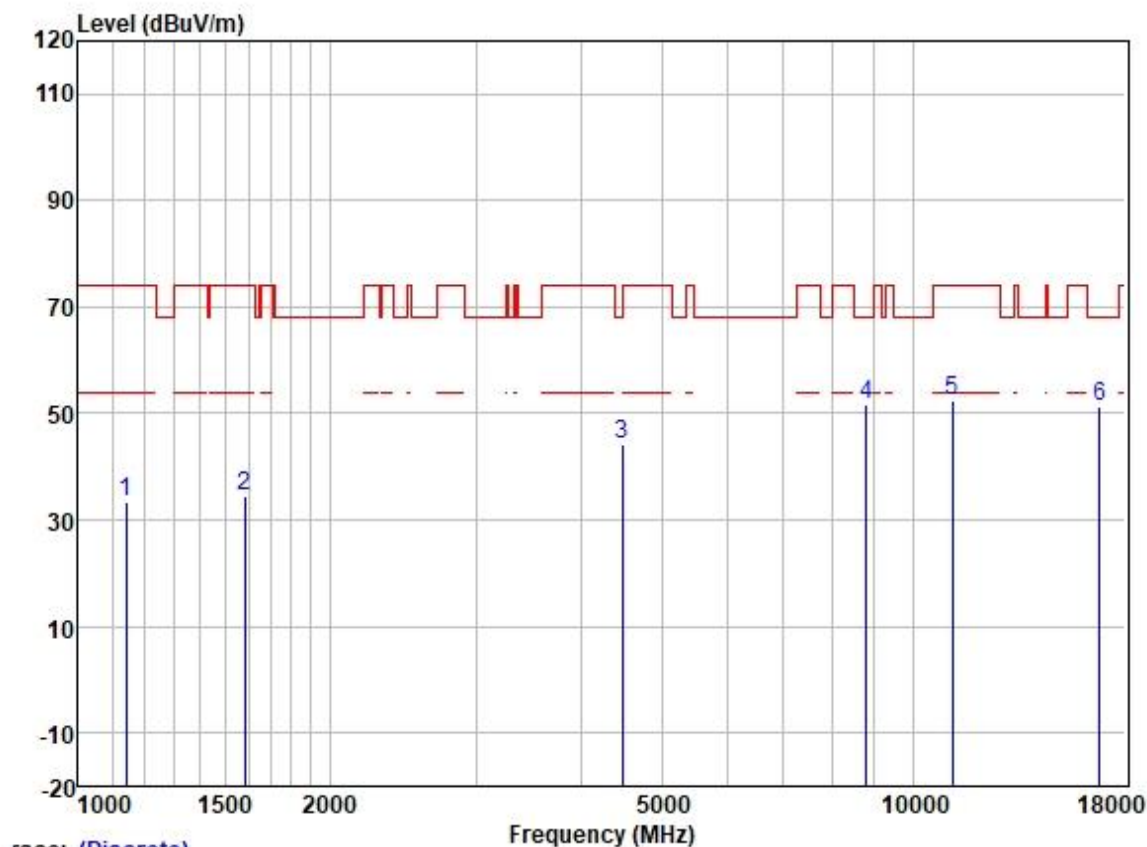

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1142.201	44.90	24.47	2.30	38.42	33.25	74.00	-40.75	HORIZONTAL	Peak
2	1583.392	44.06	25.56	2.80	38.00	34.42	74.00	-39.58	HORIZONTAL	Peak
3	4482.150	45.40	30.78	4.99	36.81	44.36	68.20	-23.84	HORIZONTAL	Peak
4	8789.516	44.73	37.33	7.24	37.54	51.76	68.20	-16.44	HORIZONTAL	Peak
5	11160.000	41.76	40.04	7.90	37.21	52.49	74.00	-21.51	HORIZONTAL	Peak
6	16740.000	36.72	40.49	9.41	35.37	51.25	68.20	-16.95	HORIZONTAL	Peak




Test Mode: 19; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:middle

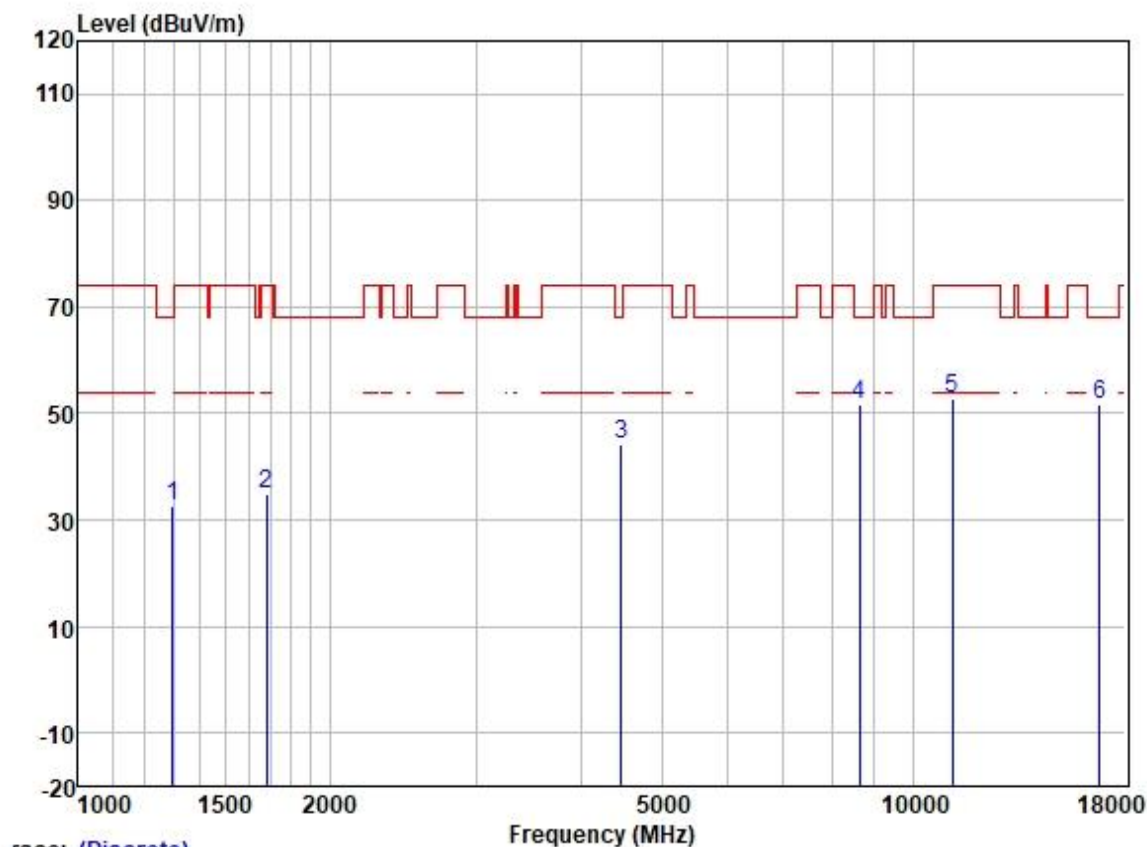

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1297.103	43.26	25.19	2.58	38.31	32.72	68.20	-35.48	VERTICAL	Peak
2	1682.477	44.22	25.68	2.80	37.91	34.79	74.00	-39.21	VERTICAL	Peak
3	4469.214	45.40	30.77	4.93	36.81	44.29	68.20	-23.91	VERTICAL	Peak
4	8638.399	45.10	37.26	6.92	37.55	51.73	68.20	-16.47	VERTICAL	Peak
5	11160.000	42.03	40.04	7.90	37.21	52.76	74.00	-21.24	VERTICAL	Peak
6	16740.000	37.24	40.49	9.41	35.37	51.77	68.20	-16.43	VERTICAL	Peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:High

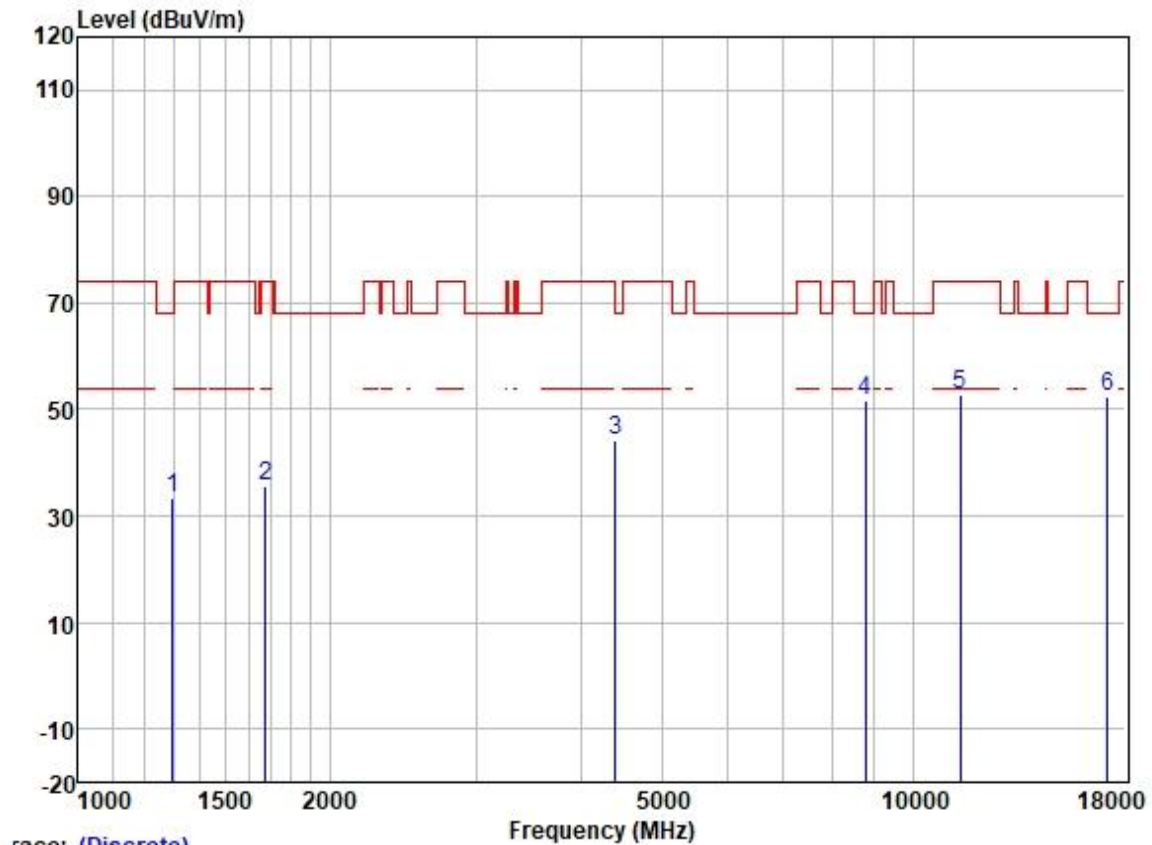


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1297.103	44.08	25.19	2.58	38.31	33.54	68.20	-34.66	HORIZONTAL	Peak
2	1677.621	45.10	25.68	2.80	37.91	35.67	74.00	-38.33	HORIZONTAL	Peak
3	4405.090	45.46	30.68	4.70	36.81	44.03	68.20	-24.17	HORIZONTAL	Peak
4	8764.146	44.64	37.32	7.19	37.54	51.61	68.20	-16.59	HORIZONTAL	Peak
5	11400.000	41.77	39.94	8.28	37.16	52.83	74.00	-21.17	HORIZONTAL	Peak
6	17100.000	35.91	42.32	9.63	35.34	52.52	68.20	-15.68	HORIZONTAL	Peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:High

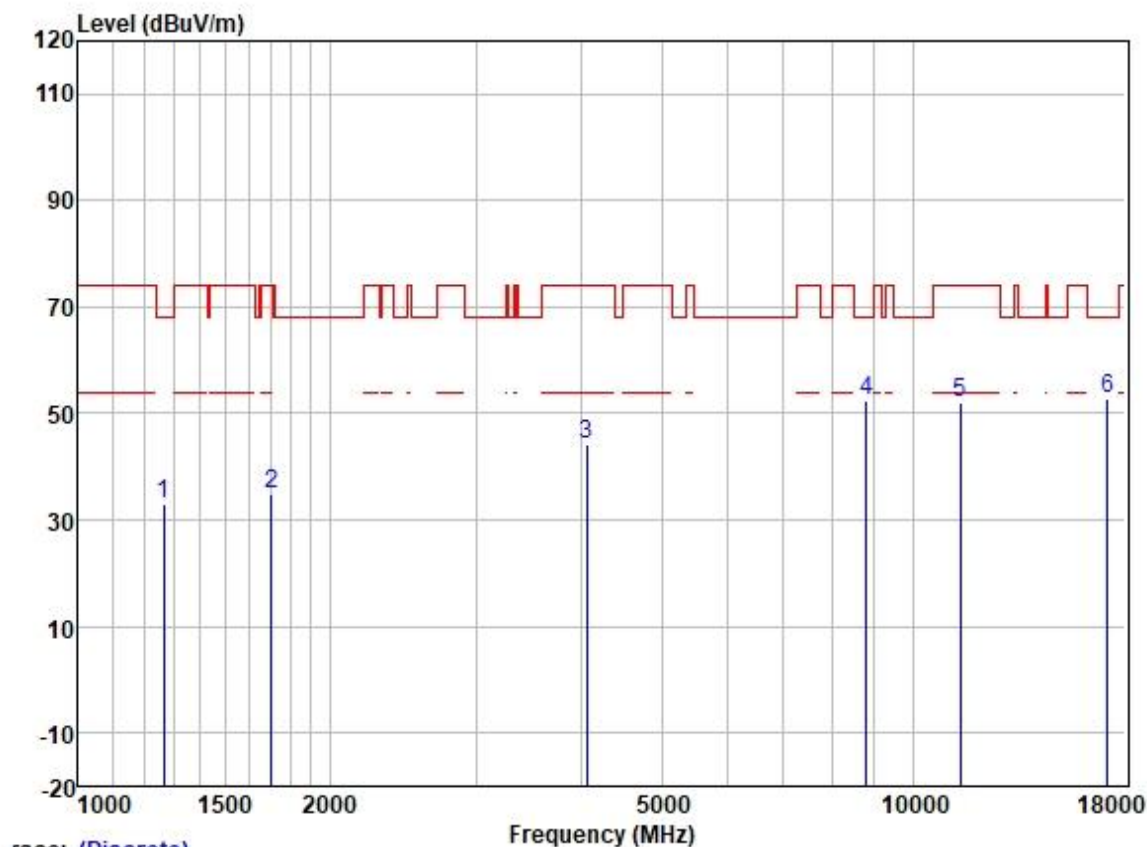

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1267.454	43.89	25.10	2.44	38.33	33.10	68.20	-35.10	VERTICAL	Peak
2	1702.042	44.09	25.72	2.80	37.89	34.72	74.00	-39.28	VERTICAL	Peak
3	4062.629	46.41	29.88	4.60	36.80	44.09	74.00	-29.91	VERTICAL	Peak
4	8789.516	45.24	37.33	7.24	37.54	52.27	68.20	-15.93	VERTICAL	Peak
5	11400.000	40.96	39.94	8.28	37.16	52.02	74.00	-21.98	VERTICAL	Peak
6	17100.000	36.17	42.32	9.63	35.34	52.78	68.20	-15.42	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 19; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

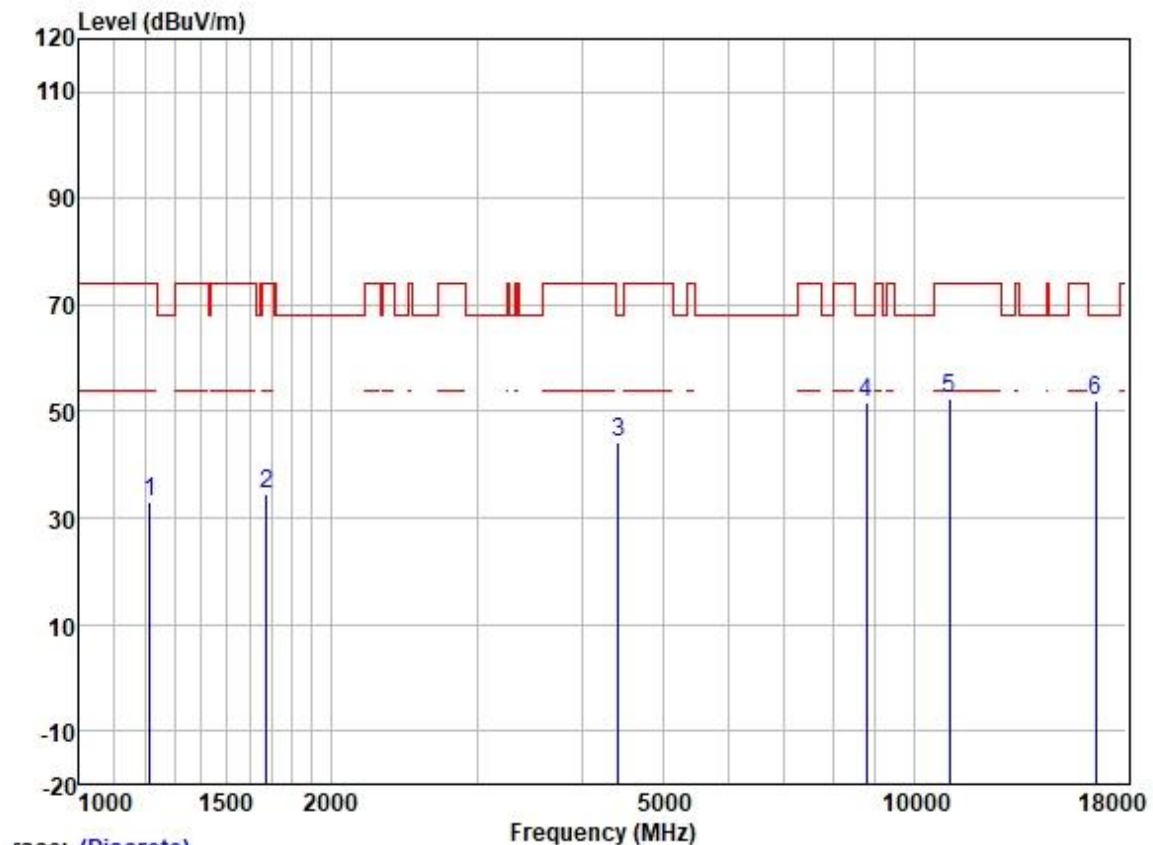

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	44.11	24.77	2.32	38.37	32.83	74.00	-41.17	HORIZONTAL	Peak
2	1677.621	44.01	25.68	2.80	37.91	34.58	74.00	-39.42	HORIZONTAL	Peak
3	4430.628	45.60	30.72	4.78	36.81	44.29	68.20	-23.91	HORIZONTAL	Peak
4	8764.146	44.74	37.32	7.19	37.54	51.71	68.20	-16.49	HORIZONTAL	Peak
5	11020.000	41.88	40.10	7.71	37.24	52.45	74.00	-21.55	HORIZONTAL	Peak
6	16530.000	38.29	39.76	9.44	35.38	52.11	68.20	-16.09	HORIZONTAL	Peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

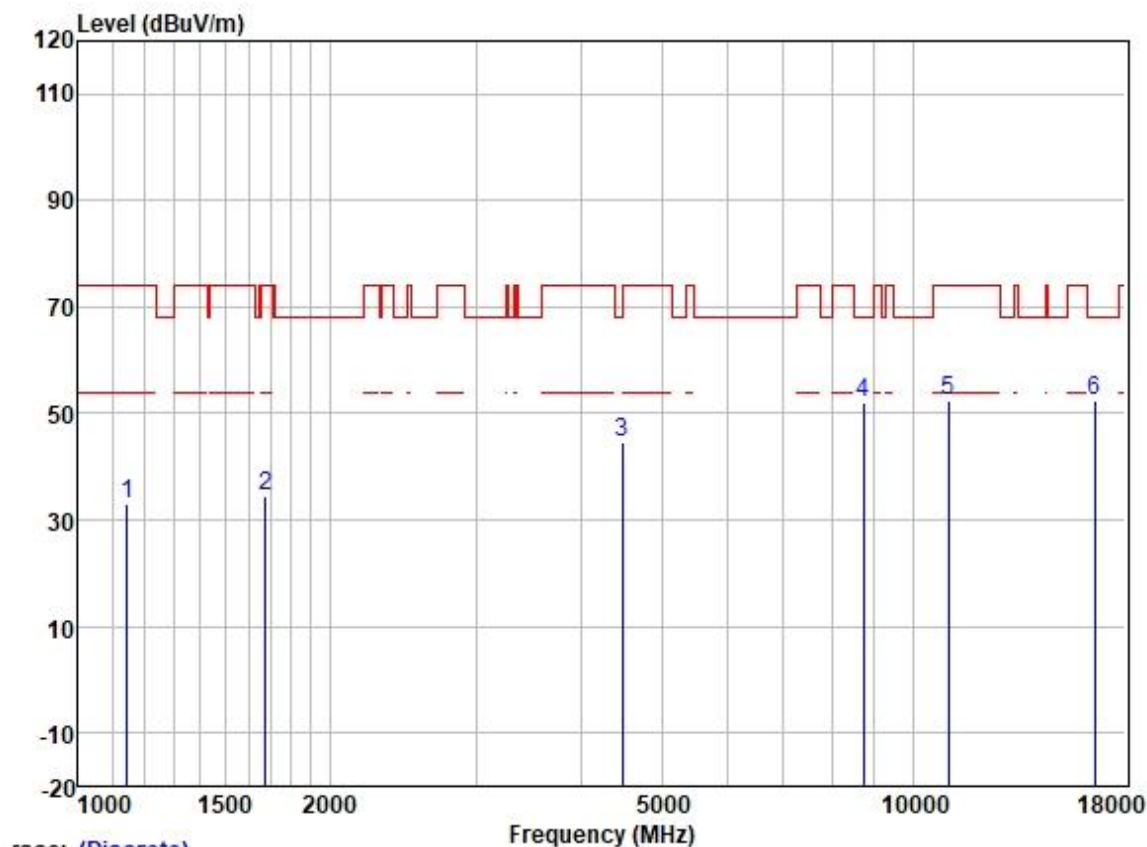

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1145.507	44.55	24.48	2.32	38.42	32.93	74.00	-41.07	VERTICAL	Peak
2	1677.621	43.92	25.68	2.80	37.91	34.49	74.00	-39.51	VERTICAL	Peak
3	4482.150	45.47	30.78	4.99	36.81	44.43	68.20	-23.77	VERTICAL	Peak
4	8738.852	45.33	37.31	7.13	37.54	52.23	68.20	-15.97	VERTICAL	Peak
5	11020.000	42.01	40.10	7.71	37.24	52.58	74.00	-21.42	VERTICAL	Peak
6	16530.000	38.58	39.76	9.44	35.38	52.40	68.20	-15.80	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 19; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:middle

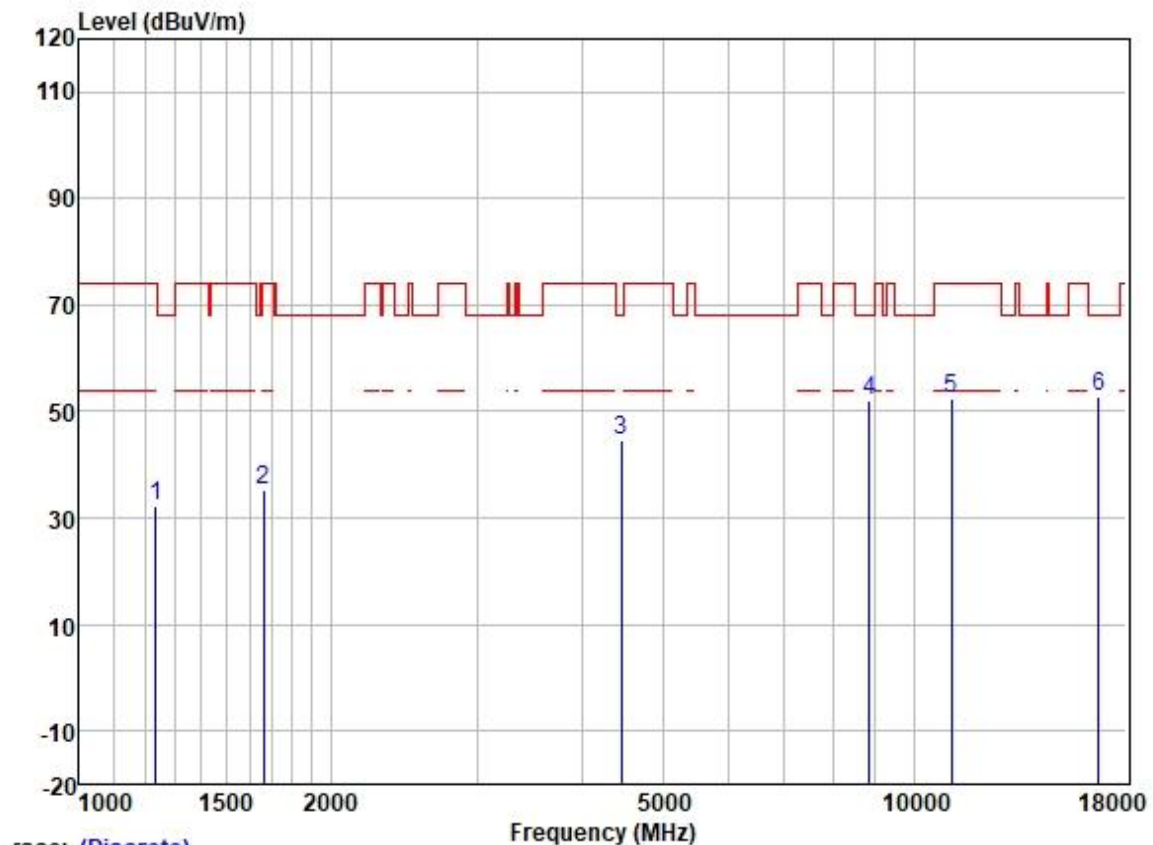


Trace: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1234.909	43.57	24.93	2.30	38.37	32.43	74.00	-41.57	HORIZONTAL	Peak
2	1663.137	44.62	25.65	2.80	37.91	35.16	74.00	-38.84	HORIZONTAL	Peak
3	4456.315	45.76	30.75	4.88	36.81	44.58	68.20	-23.62	HORIZONTAL	Peak
4	8840.473	44.74	37.35	7.34	37.53	51.90	68.20	-16.30	HORIZONTAL	Peak
5	11100.000	41.68	40.07	7.82	37.22	52.35	74.00	-21.65	HORIZONTAL	Peak
6	16650.000	38.82	40.10	9.43	35.38	52.97	68.20	-15.23	HORIZONTAL	Peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:middle

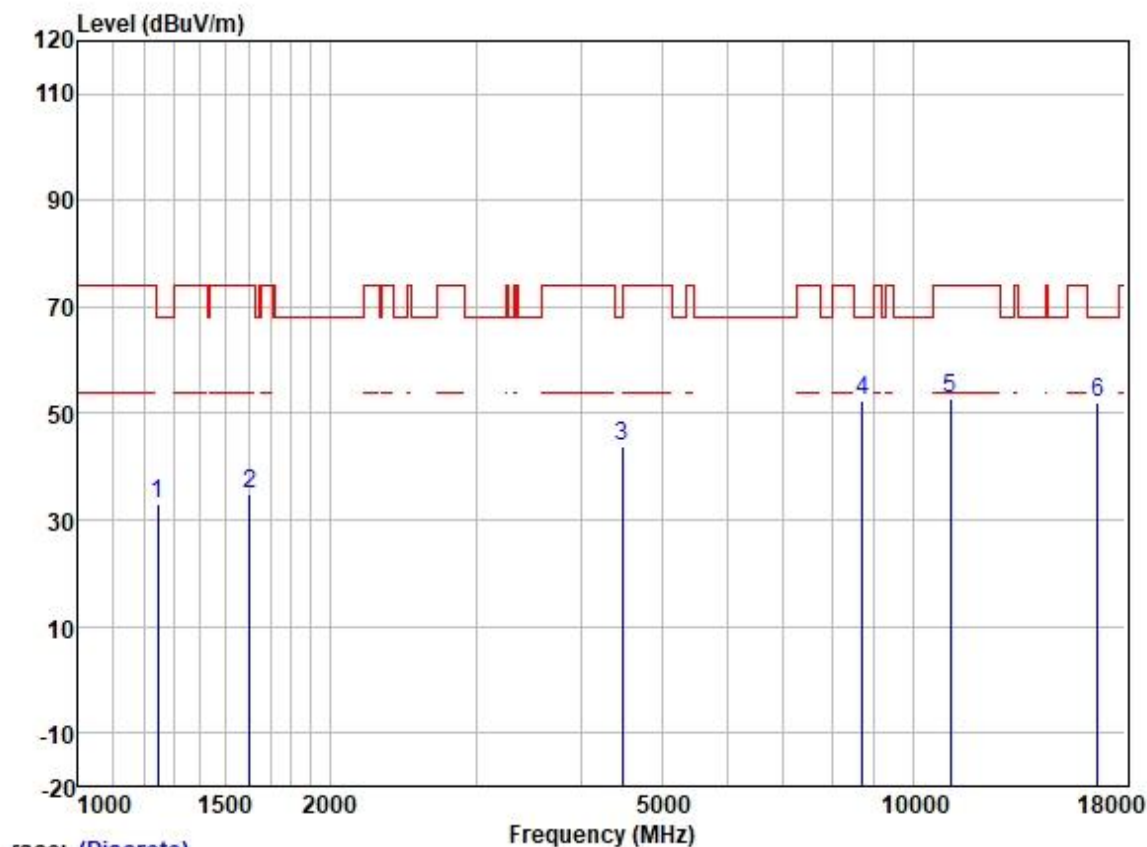

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1245.663	43.93	25.00	2.33	38.35	32.91	68.20	-35.29	VERTICAL	Peak
2	1606.441	44.45	25.59	2.80	37.98	34.86	74.00	-39.14	VERTICAL	Peak
3	4482.150	44.96	30.78	4.99	36.81	43.92	68.20	-24.28	VERTICAL	Peak
4	8713.630	45.56	37.30	7.07	37.55	52.38	68.20	-15.82	VERTICAL	Peak
5	11100.000	42.12	40.07	7.82	37.22	52.79	74.00	-21.21	VERTICAL	Peak
6	16650.000	37.96	40.10	9.43	35.38	52.11	68.20	-16.09	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 19; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:High

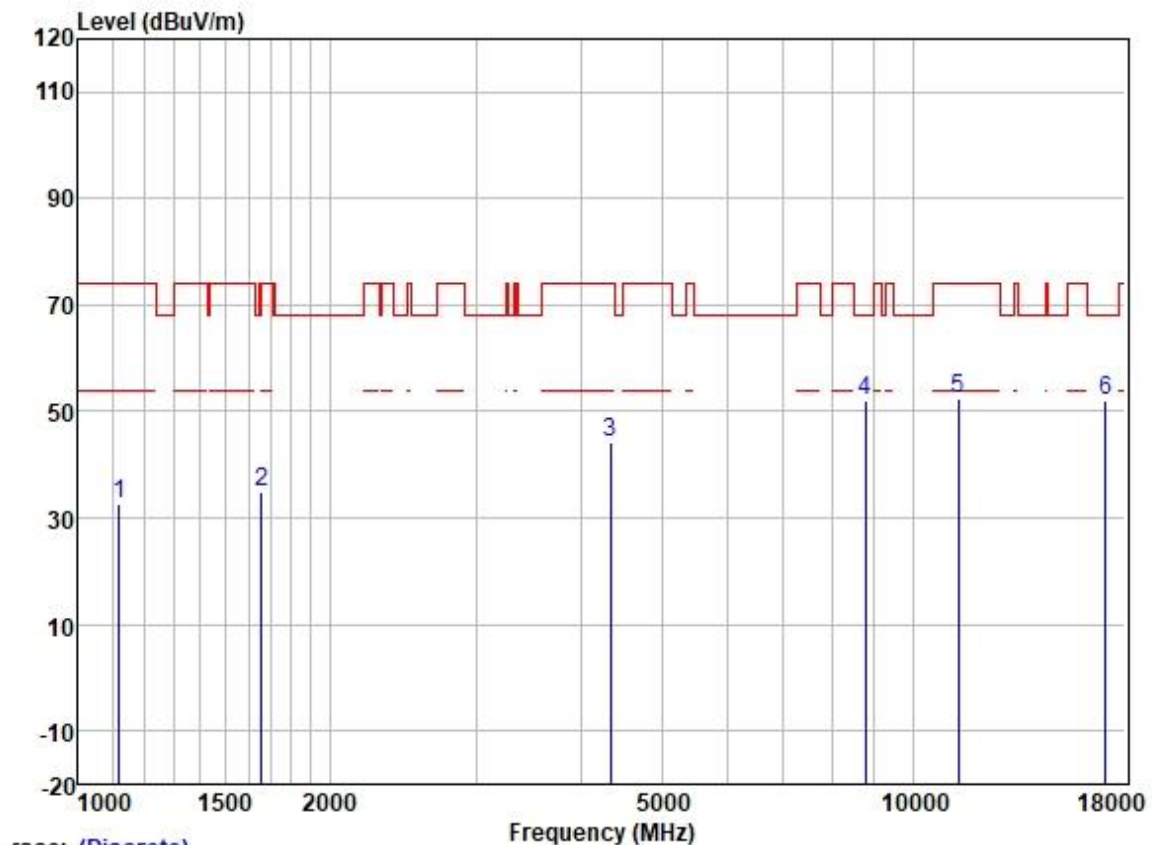


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1119.323	44.43	24.41	2.24	38.43	32.65	74.00	-41.35	HORIZONTAL	Peak
2	1658.337	44.22	25.65	2.80	37.93	34.74	68.20	-33.46	HORIZONTAL	Peak
3	4341.886	45.63	30.57	4.67	36.81	44.06	74.00	-29.94	HORIZONTAL	Peak
4	8764.146	45.00	37.32	7.19	37.54	51.97	68.20	-16.23	HORIZONTAL	Peak
5	11340.000	41.52	39.97	8.18	37.17	52.50	74.00	-21.50	HORIZONTAL	Peak
6	17010.000	36.17	41.75	9.39	35.35	51.96	68.20	-16.24	HORIZONTAL	Peak




Test Mode: 19; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:High

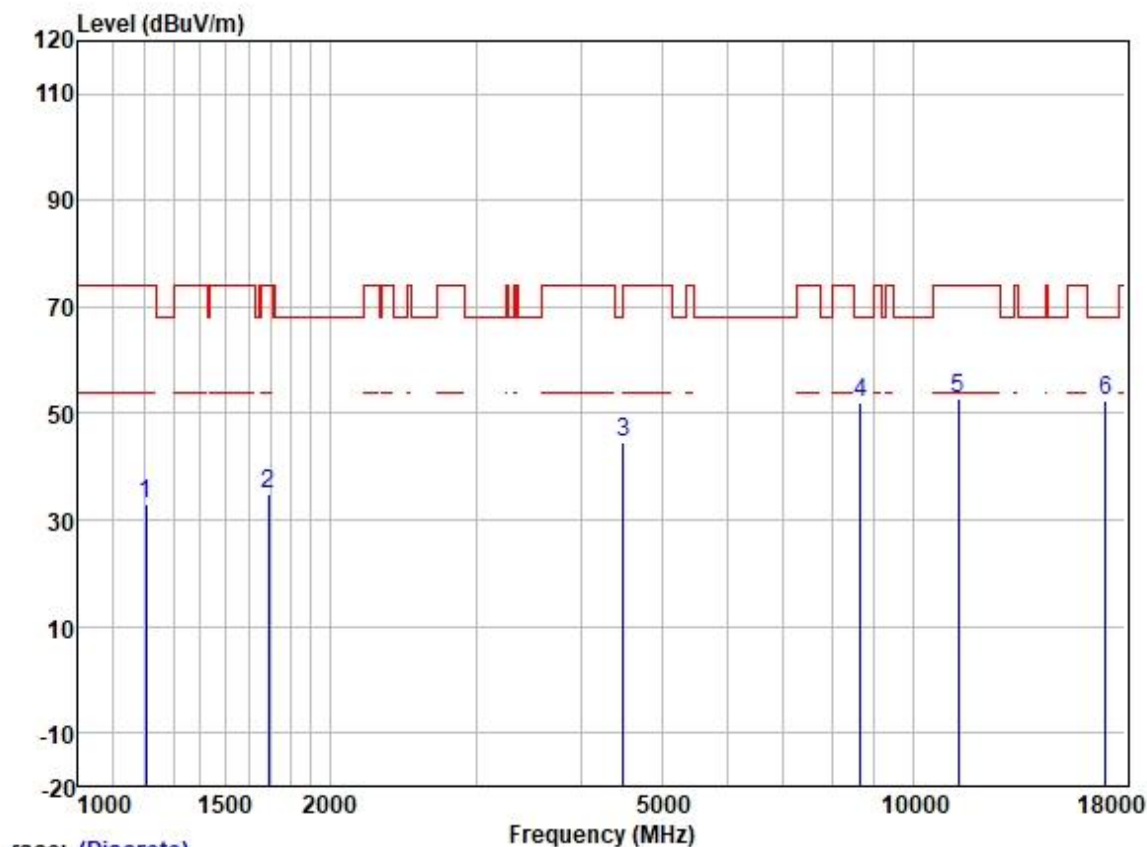

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1206.682	44.37	24.72	2.33	38.39	33.03	74.00	-40.97	VERTICAL	Peak
2	1692.231	44.17	25.70	2.80	37.89	34.78	74.00	-39.22	VERTICAL	Peak
3	4495.125	45.42	30.80	5.05	36.82	44.45	68.20	-23.75	VERTICAL	Peak
4	8663.404	45.43	37.27	6.97	37.55	52.12	68.20	-16.08	VERTICAL	Peak
5	11340.000	41.76	39.97	8.18	37.17	52.74	74.00	-21.26	VERTICAL	Peak
6	17010.000	36.80	41.75	9.39	35.35	52.59	68.20	-15.61	VERTICAL	Peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:80MHz; Channel:middle

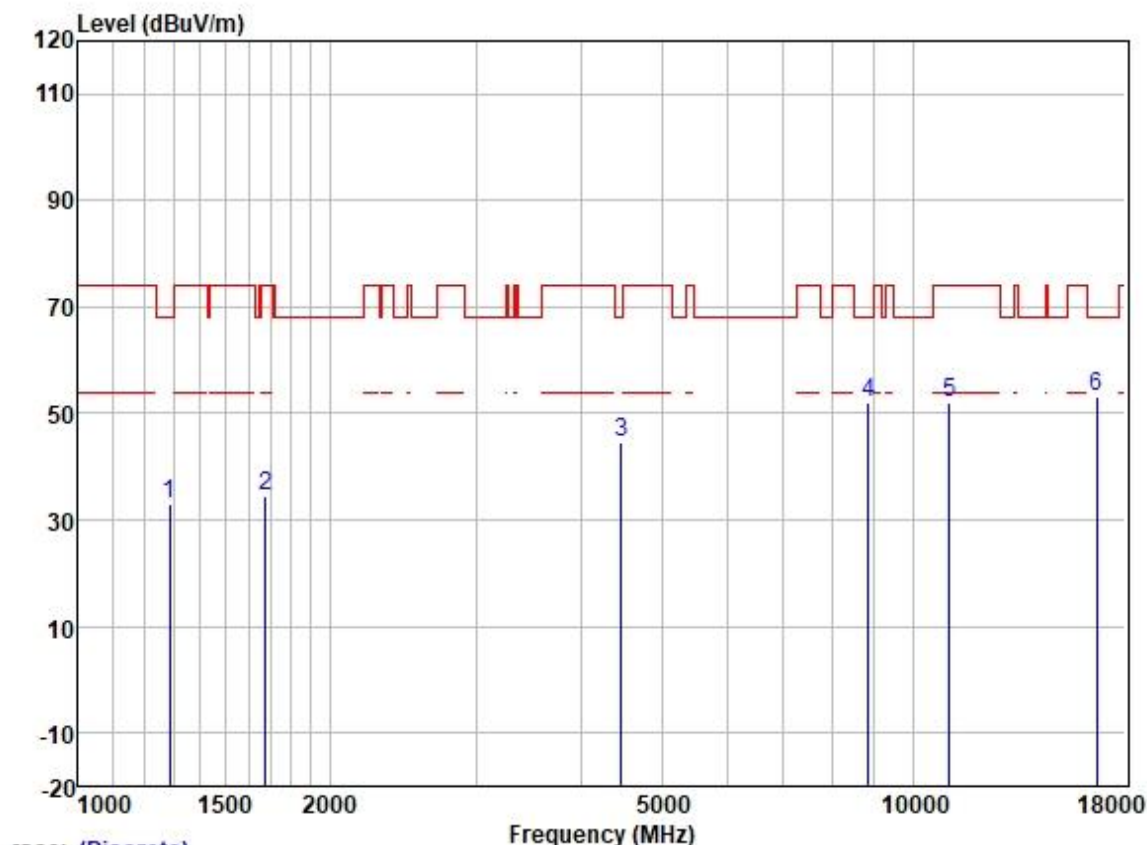

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1285.904	43.63	25.16	2.53	38.33	32.99	68.20	-35.21	HORIZONTAL	Peak
2	1677.621	44.02	25.68	2.80	37.91	34.59	74.00	-39.41	HORIZONTAL	Peak
3	4469.214	45.67	30.77	4.93	36.81	44.56	68.20	-23.64	HORIZONTAL	Peak
4	8840.473	44.88	37.35	7.34	37.53	52.04	68.20	-16.16	HORIZONTAL	Peak
5	11060.000	41.28	40.09	7.74	37.23	51.88	74.00	-22.12	HORIZONTAL	Peak
6	16590.000	39.12	39.93	9.43	35.38	53.10	68.20	-15.10	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 19; Polarity: Vertical; Modulation:802.11ax; Bandwidth:80MHz; Channel:middle

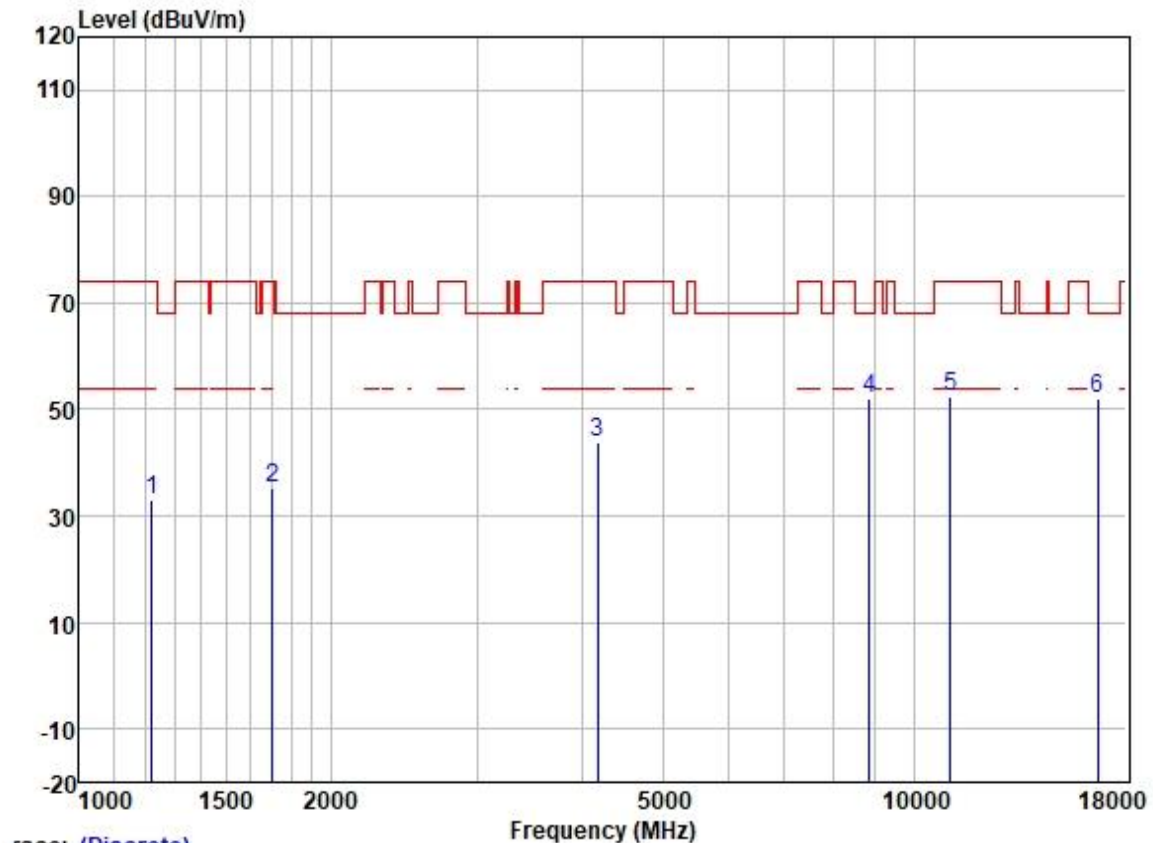


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1220.714	44.18	24.82	2.32	38.37	32.95	74.00	-41.05	VERTICAL	Peak
2	1702.042	44.62	25.72	2.80	37.89	35.25	74.00	-38.75	VERTICAL	Peak
3	4181.768	45.93	30.12	4.60	36.80	43.85	74.00	-30.15	VERTICAL	Peak
4	8840.473	44.90	37.35	7.34	37.53	52.06	68.20	-16.14	VERTICAL	Peak
5	11060.000	41.67	40.09	7.74	37.23	52.27	74.00	-21.73	VERTICAL	Peak
6	16590.000	37.95	39.93	9.43	35.38	51.93	68.20	-16.27	VERTICAL	Peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:160MHz; Channel:middle

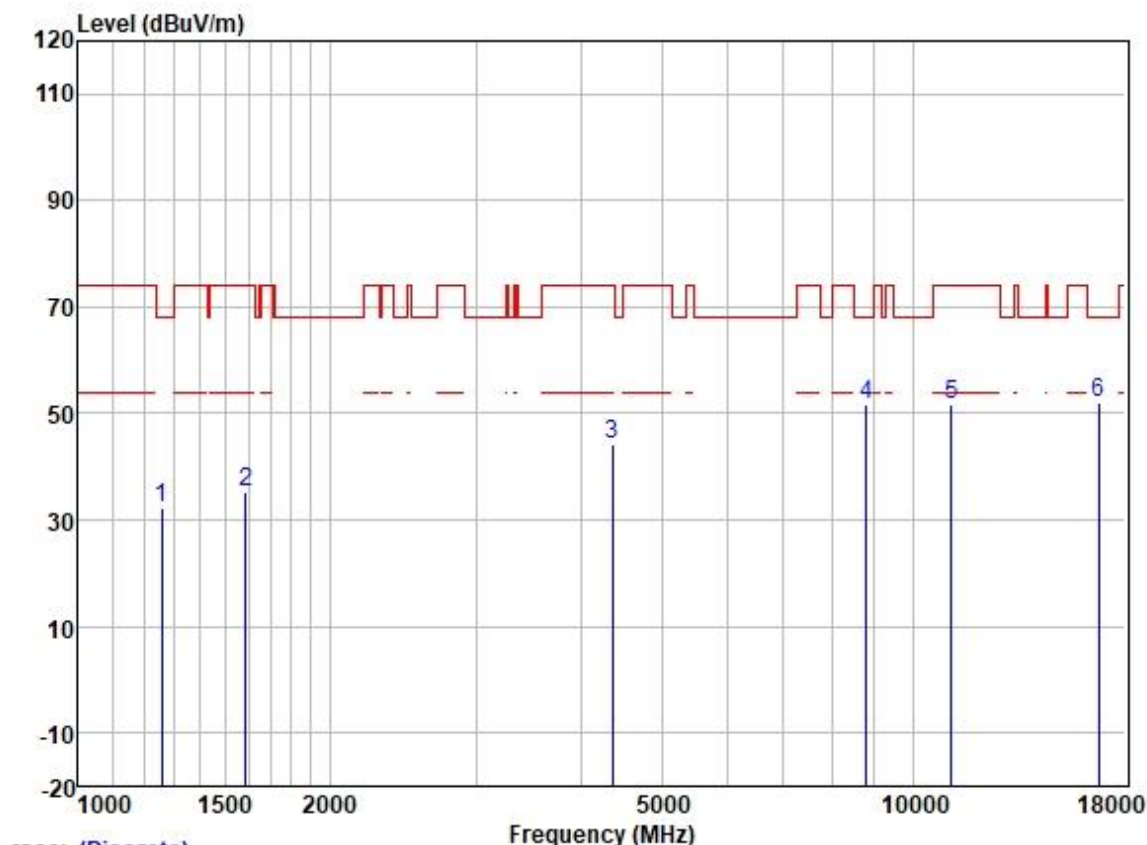

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1260.149	43.33	25.07	2.40	38.35	32.45	68.20	-35.75	HORIZONTAL	Peak
2	1587.975	44.86	25.57	2.80	37.98	35.25	74.00	-38.75	HORIZONTAL	Peak
3	4367.058	45.71	30.62	4.68	36.81	44.20	74.00	-29.80	HORIZONTAL	Peak
4	8789.516	44.74	37.33	7.24	37.54	51.77	68.20	-16.43	HORIZONTAL	Peak
5	11140.000	41.08	40.06	7.86	37.21	51.79	74.00	-22.21	HORIZONTAL	Peak
6	16710.000	37.84	40.29	9.42	35.37	52.18	68.20	-16.02	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 19; Polarity: Vertical; Modulation:802.11ax; Bandwidth:160MHz; Channel:middle

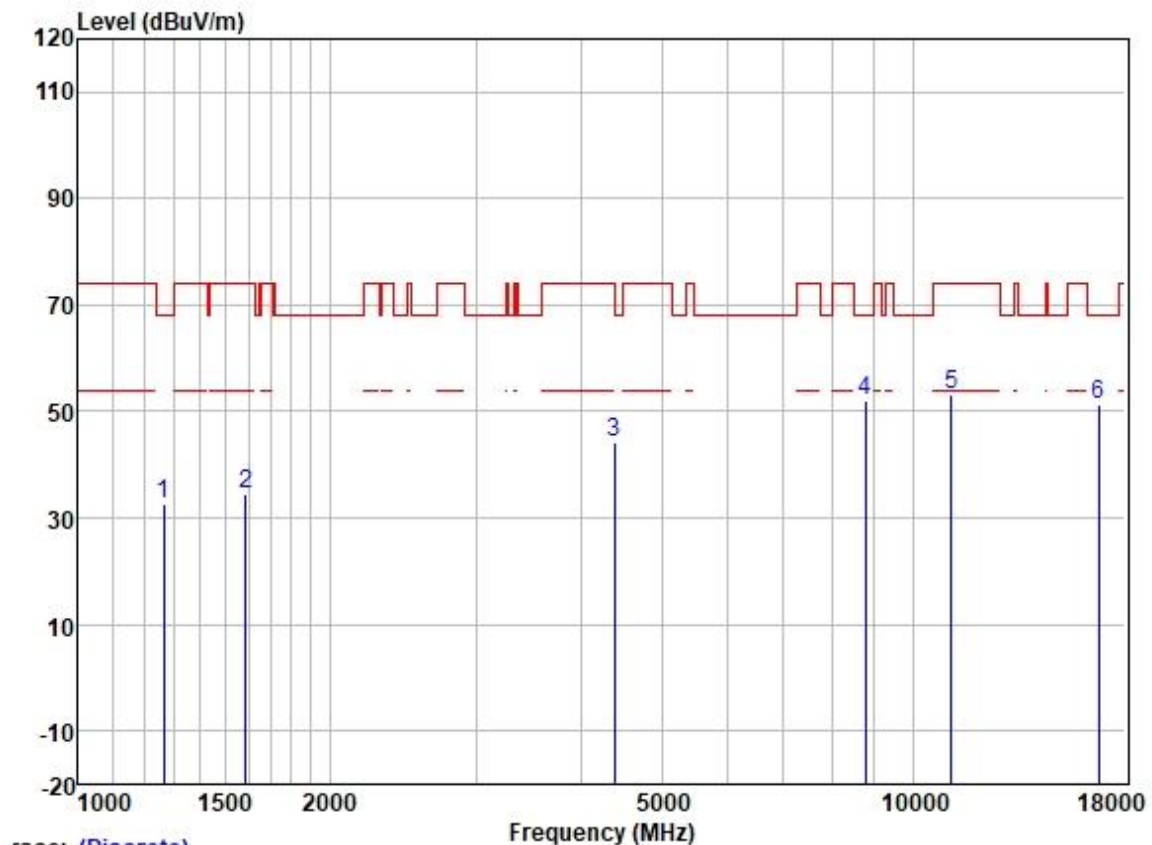


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1267.454	43.31	25.10	2.44	38.33	32.52	68.20	-35.68	VERTICAL	Peak
2	1587.975	44.28	25.57	2.80	37.98	34.67	74.00	-39.33	VERTICAL	Peak
3	4392.376	45.83	30.66	4.70	36.81	44.38	74.00	-29.62	VERTICAL	Peak
4	8764.146	45.07	37.32	7.19	37.54	52.04	68.20	-16.16	VERTICAL	Peak
5	11140.000	42.50	40.06	7.86	37.21	53.21	74.00	-20.79	VERTICAL	Peak
6	16710.000	36.86	40.29	9.42	35.37	51.20	68.20	-17.00	VERTICAL	Peak




Test Mode: 21; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

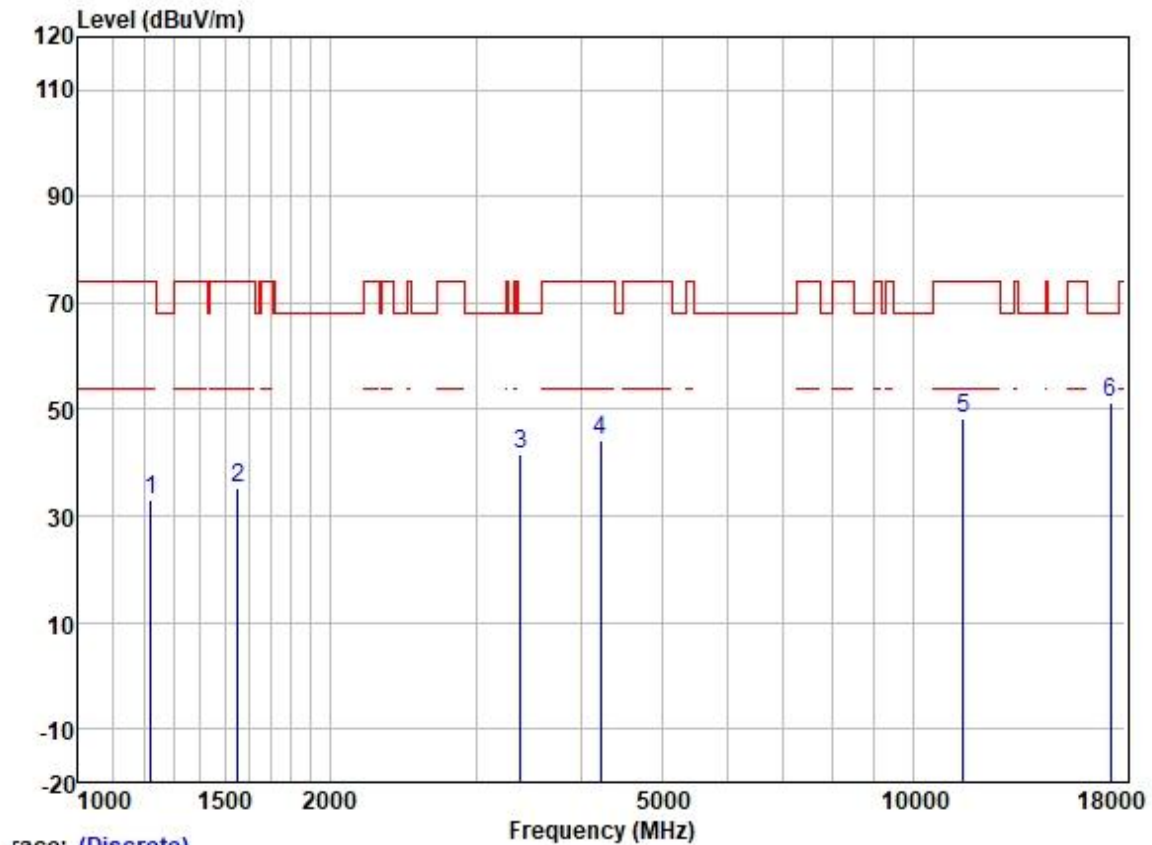

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1220.714	44.29	24.82	2.32	38.37	33.06	74.00	-40.94	HORIZONTAL	Peak
2	1551.677	44.77	25.54	2.80	38.03	35.08	74.00	-38.92	HORIZONTAL	Peak
3	3386.297	45.84	28.83	4.10	36.99	41.78	68.20	-26.42	HORIZONTAL	Peak
4	4230.396	45.98	30.26	4.61	36.81	44.04	74.00	-29.96	HORIZONTAL	Peak
5	11490.000	37.13	39.90	8.41	37.15	48.29	74.00	-25.71	HORIZONTAL	Peak
6	17235.000	33.70	43.01	10.08	35.33	51.46	68.20	-16.74	HORIZONTAL	Peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

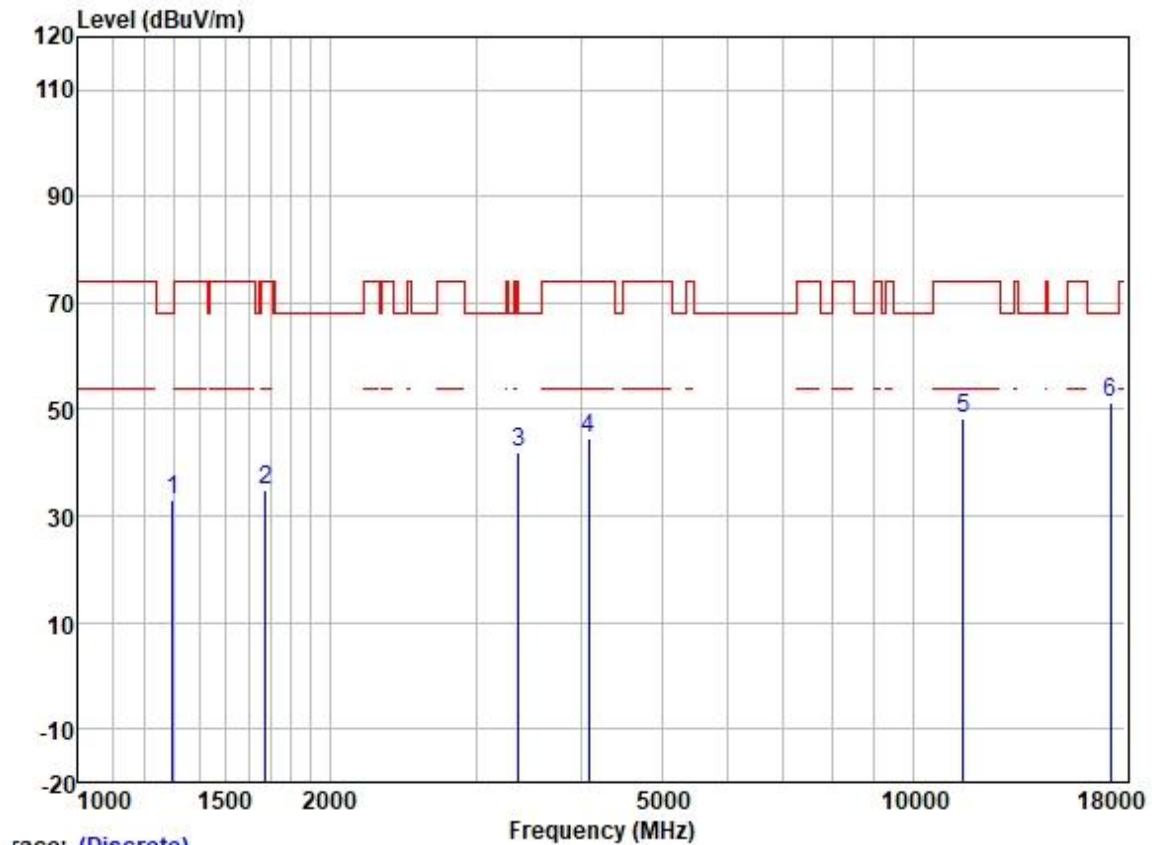

	Freq	Read	Antenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1297.103	43.73	25.19	2.58	38.31	33.19	68.20	-35.01	VERTICAL	Peak
2	1677.621	44.16	25.68	2.80	37.91	34.73	74.00	-39.27	VERTICAL	Peak
3	3366.778	45.98	28.82	4.09	36.99	41.90	68.20	-26.30	VERTICAL	Peak
4	4086.182	47.02	29.92	4.60	36.80	44.74	74.00	-29.26	VERTICAL	Peak
5	11490.000	37.15	39.90	8.41	37.15	48.31	74.00	-25.69	VERTICAL	Peak
6	17235.000	33.73	43.01	10.08	35.33	51.49	68.20	-16.71	VERTICAL	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch Technical Services Co., Ltd. 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com


Test Mode: 21; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

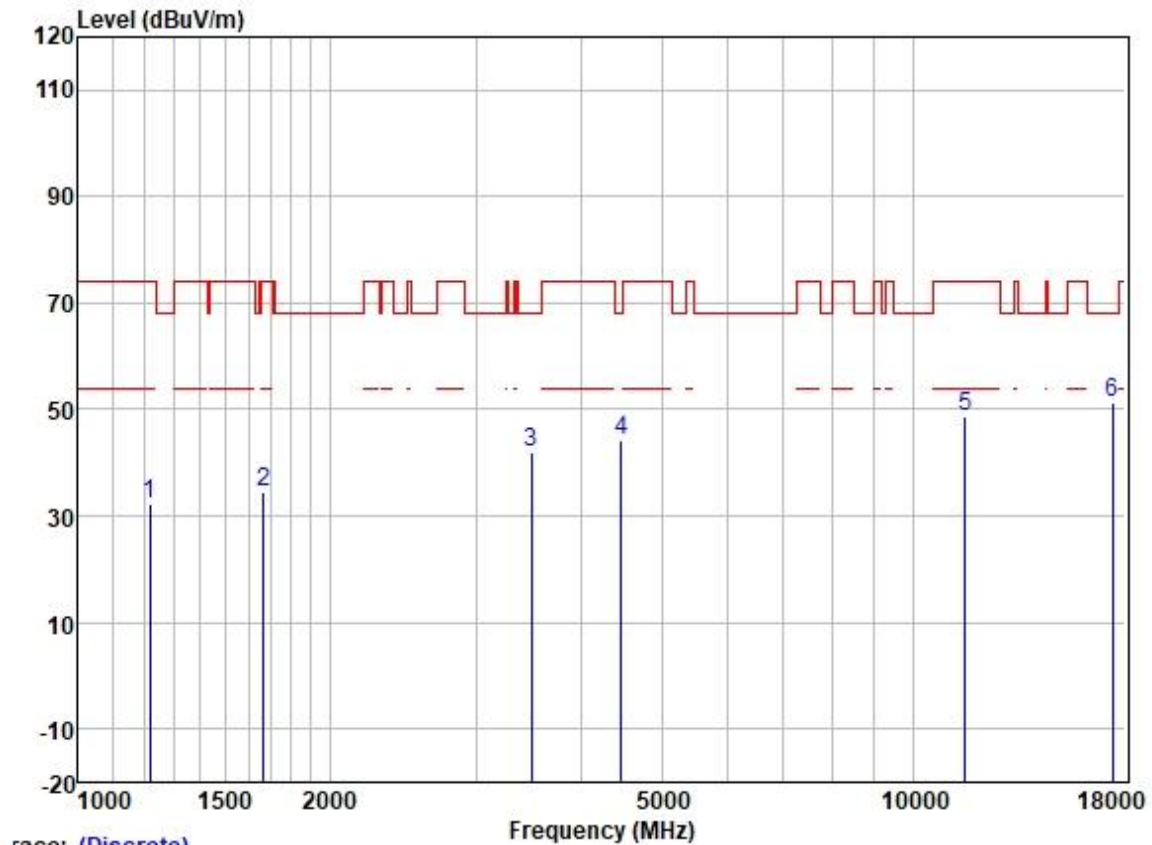

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	dB		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	43.69	24.79	2.32	38.37	32.43	74.00	-41.57	HORIZONTAL	Peak
2	1667.951	43.97	25.66	2.80	37.91	34.52	74.00	-39.48	HORIZONTAL	Peak
3	3495.691	45.72	28.90	4.30	36.94	41.98	68.20	-26.22	HORIZONTAL	Peak
4	4469.214	45.23	30.77	4.93	36.81	44.12	68.20	-24.08	HORIZONTAL	Peak
5	11570.000	37.83	39.78	8.38	37.14	48.85	74.00	-25.15	HORIZONTAL	Peak
6	17355.000	33.02	43.40	10.39	35.32	51.49	68.20	-16.71	HORIZONTAL	Peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

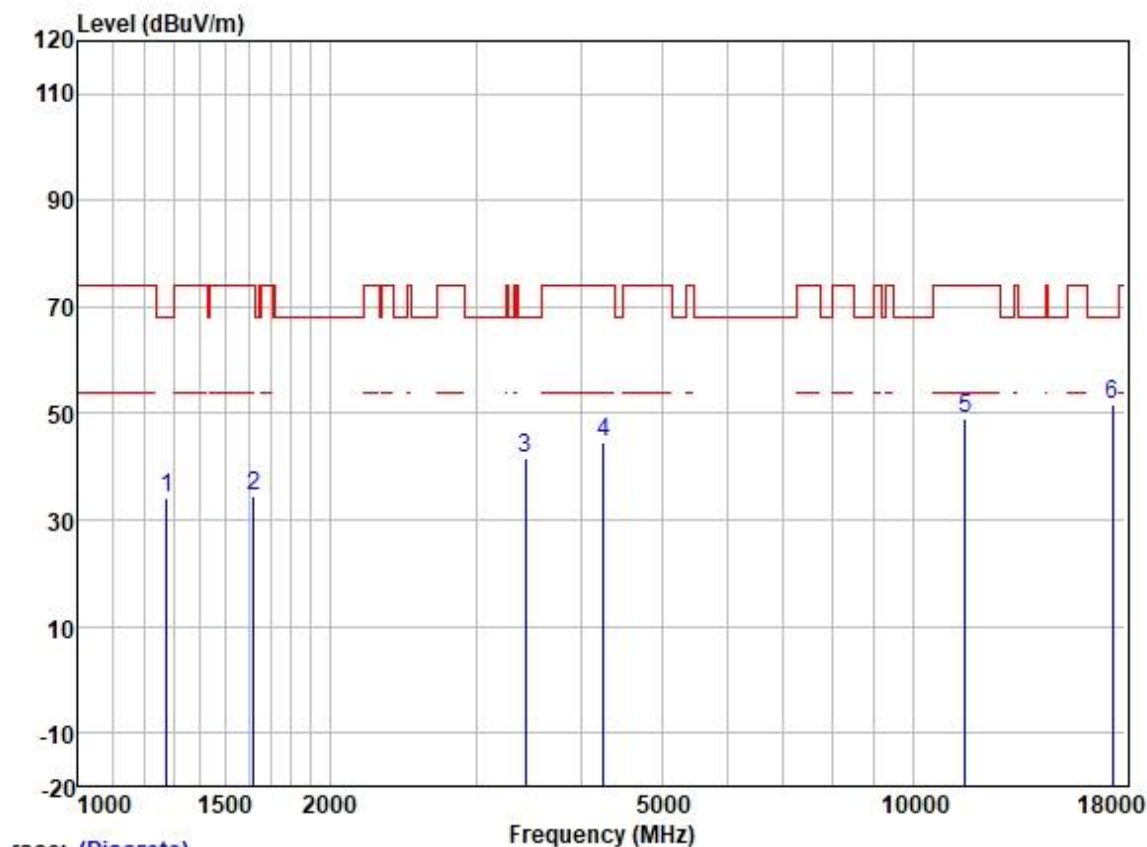

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1274.802	44.74	25.12	2.48	38.33	34.01	68.20	-34.19	VERTICAL	Peak
2	1620.431	44.01	25.60	2.80	37.95	34.46	74.00	-39.54	VERTICAL	Peak
3	3435.590	45.45	28.87	4.16	36.97	41.51	68.20	-26.69	VERTICAL	Peak
4	4254.921	46.49	30.34	4.62	36.81	44.64	74.00	-29.36	VERTICAL	Peak
5	11570.000	38.02	39.78	8.38	37.14	49.04	74.00	-24.96	VERTICAL	Peak
6	17355.000	33.36	43.40	10.39	35.32	51.83	68.20	-16.37	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 21; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

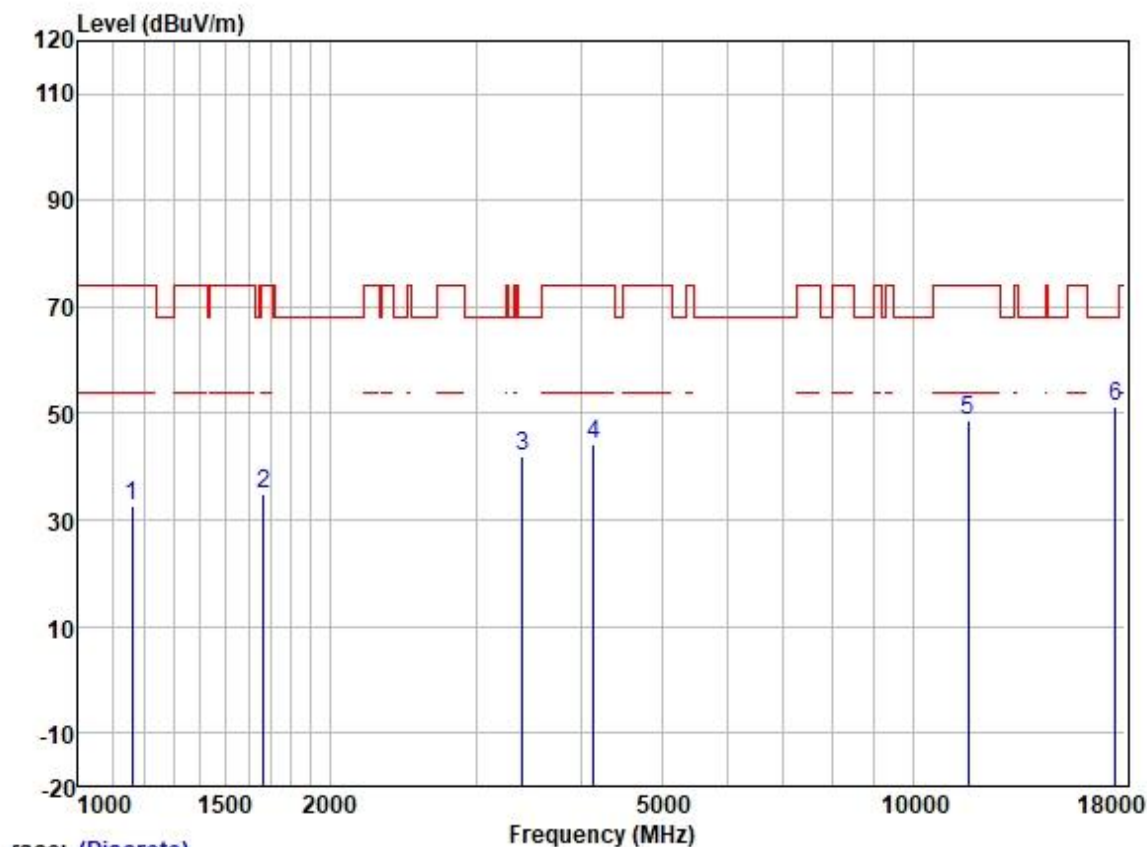

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1158.828	44.31	24.52	2.40	38.42	32.81	74.00	-41.19	HORIZONTAL	Peak
2	1667.951	44.24	25.66	2.80	37.91	34.79	74.00	-39.21	HORIZONTAL	Peak
3	3405.929	45.82	28.85	4.11	36.98	41.80	68.20	-26.40	HORIZONTAL	Peak
4	4145.664	46.32	30.03	4.60	36.80	44.15	74.00	-29.85	HORIZONTAL	Peak
5	11650.000	37.92	39.65	8.35	37.13	48.79	74.00	-25.21	HORIZONTAL	Peak
6	17475.000	32.11	43.90	10.77	35.32	51.46	68.20	-16.74	HORIZONTAL	Peak




Test Mode: 21; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

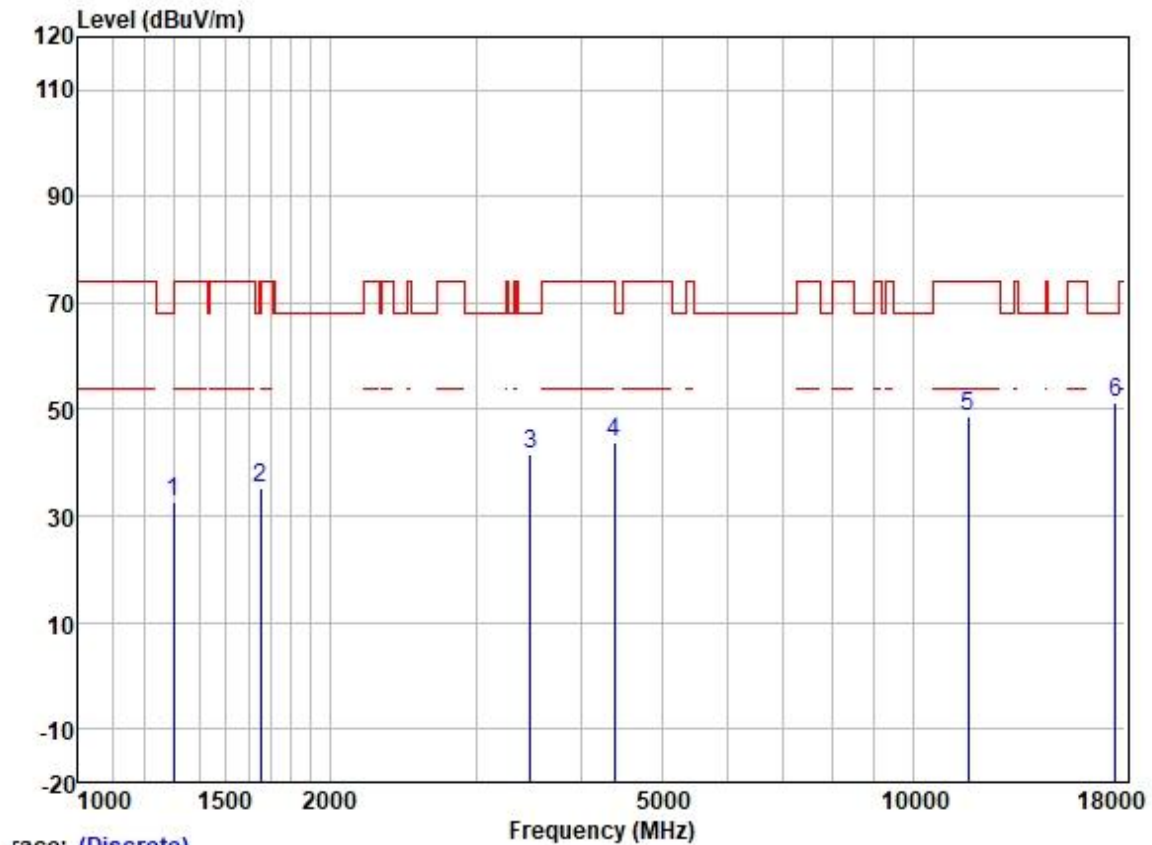

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1300.858	43.27	25.20	2.60	38.31	32.76	74.00	-41.24	VERTICAL	Peak
2	1653.550	44.85	25.64	2.80	37.93	35.36	68.20	-32.84	VERTICAL	Peak
3	3485.601	45.28	28.89	4.27	36.95	41.49	68.20	-26.71	VERTICAL	Peak
4	4392.376	45.32	30.66	4.70	36.81	43.87	74.00	-30.13	VERTICAL	Peak
5	11650.000	37.76	39.65	8.35	37.13	48.63	74.00	-25.37	VERTICAL	Peak
6	17475.000	32.13	43.90	10.77	35.32	51.48	68.20	-16.72	VERTICAL	Peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

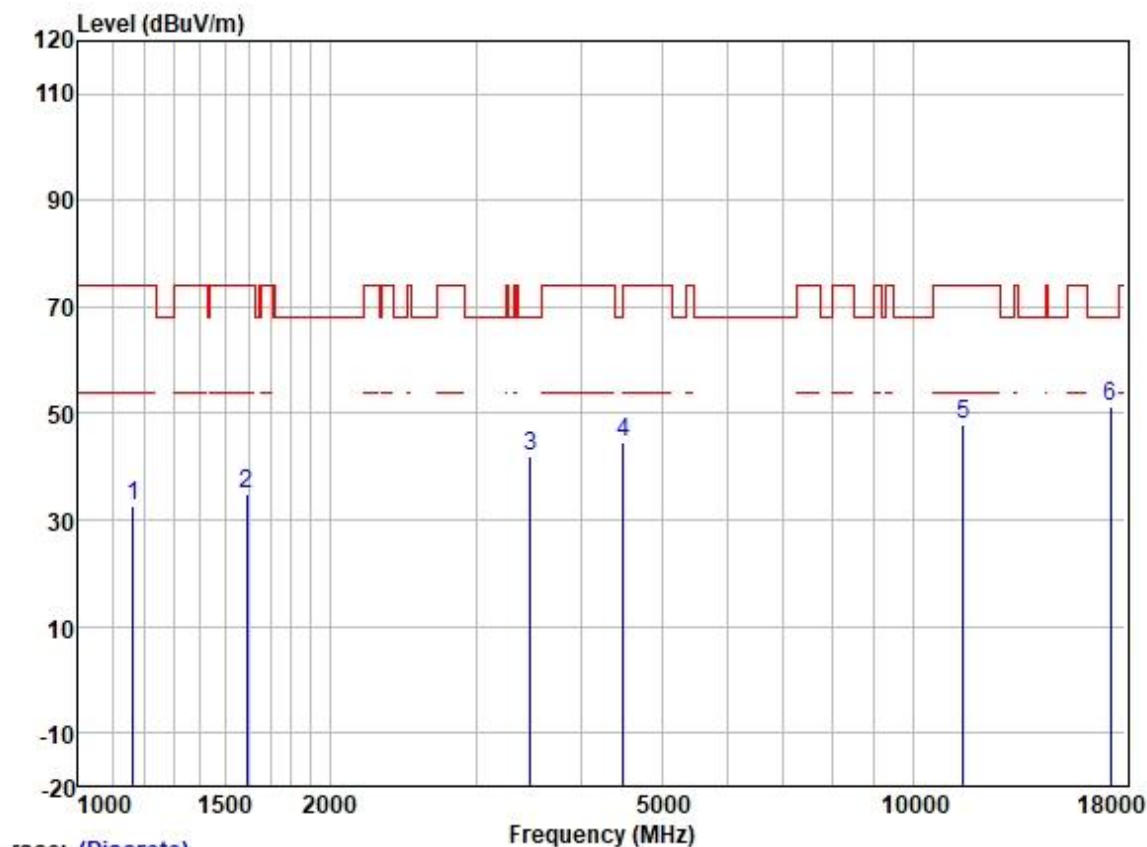

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1162.182	44.25	24.53	2.40	38.42	32.76	74.00	-41.24	HORIZONTAL	Peak
2	1592.571	44.58	25.57	2.80	37.98	34.97	74.00	-39.03	HORIZONTAL	Peak
3	3485.601	45.78	28.89	4.27	36.95	41.99	68.20	-26.21	HORIZONTAL	Peak
4	4495.125	45.42	30.80	5.05	36.82	44.45	68.20	-23.75	HORIZONTAL	Peak
5	11490.000	36.69	39.90	8.41	37.15	47.85	74.00	-26.15	HORIZONTAL	Peak
6	17235.000	33.53	43.01	10.08	35.33	51.29	68.20	-16.91	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

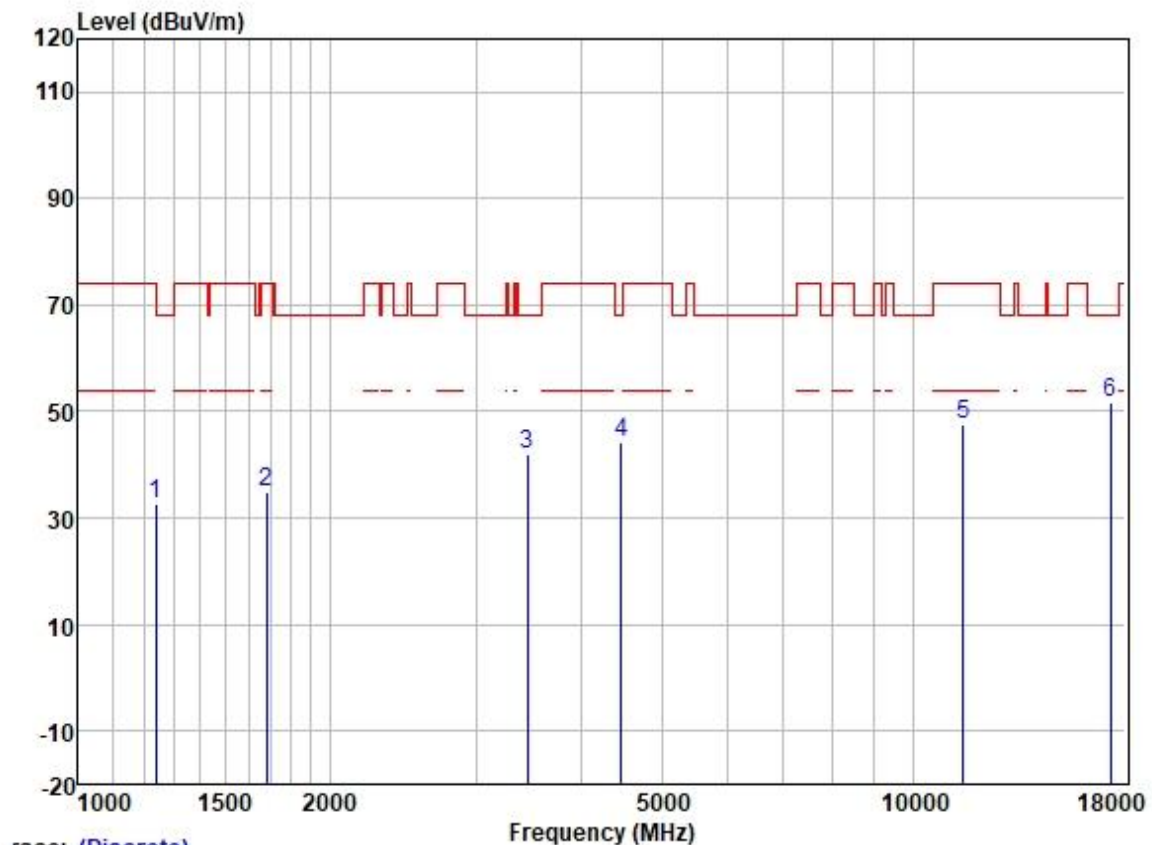

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1238.483	43.63	24.96	2.30	38.35	32.54	74.00	-41.46	VERTICAL	Peak
2	1682.477	44.14	25.68	2.80	37.91	34.71	74.00	-39.29	VERTICAL	Peak
3	3455.508	45.90	28.88	4.20	36.96	42.02	68.20	-26.18	VERTICAL	Peak
4	4469.214	45.35	30.77	4.93	36.81	44.24	68.20	-23.96	VERTICAL	Peak
5	11490.000	36.52	39.90	8.41	37.15	47.68	74.00	-26.32	VERTICAL	Peak
6	17235.000	33.87	43.01	10.08	35.33	51.63	68.20	-16.57	VERTICAL	Peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

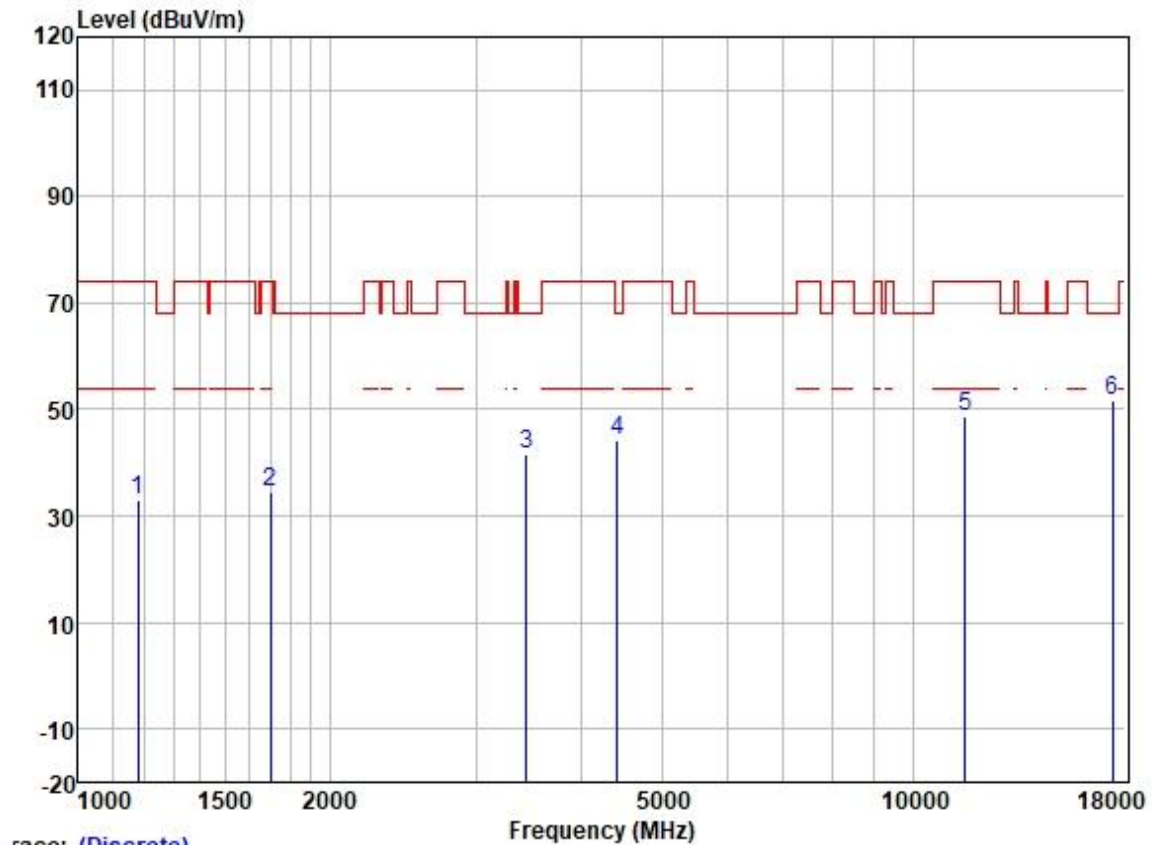


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1179.100	44.43	24.59	2.38	38.40	33.00	74.00	-41.00	HORIZONTAL	Peak
2	1697.129	43.99	25.71	2.80	37.89	34.61	74.00	-39.39	HORIZONTAL	Peak
3	3445.535	45.55	28.87	4.18	36.96	41.64	68.20	-26.56	HORIZONTAL	Peak
4	4430.628	45.67	30.72	4.78	36.81	44.36	68.20	-23.84	HORIZONTAL	Peak
5	11570.000	37.69	39.78	8.38	37.14	48.71	74.00	-25.29	HORIZONTAL	Peak
6	17355.000	33.12	43.40	10.39	35.32	51.59	68.20	-16.61	HORIZONTAL	Peak




Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

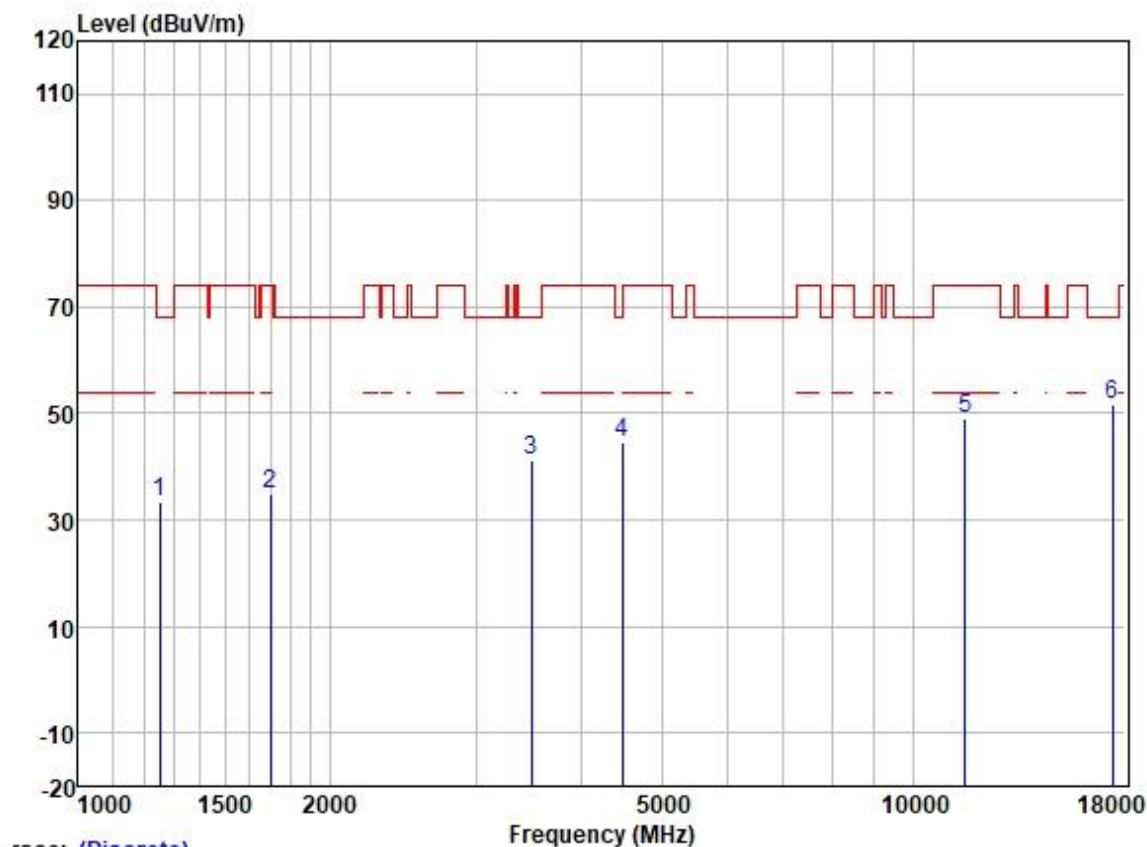

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
		dBuV	dB/m	dB	dB			dB		
1	1252.885	44.35	25.03	2.36	38.35	33.39	68.20	-34.81	VERTICAL	Peak
2	1697.129	44.37	25.71	2.80	37.89	34.99	74.00	-39.01	VERTICAL	Peak
3	3495.691	45.10	28.90	4.30	36.94	41.36	68.20	-26.84	VERTICAL	Peak
4	4482.150	45.48	30.78	4.99	36.81	44.44	68.20	-23.76	VERTICAL	Peak
5	11570.000	37.93	39.78	8.38	37.14	48.95	74.00	-25.05	VERTICAL	Peak
6	17355.000	33.39	43.40	10.39	35.32	51.86	68.20	-16.34	VERTICAL	Peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

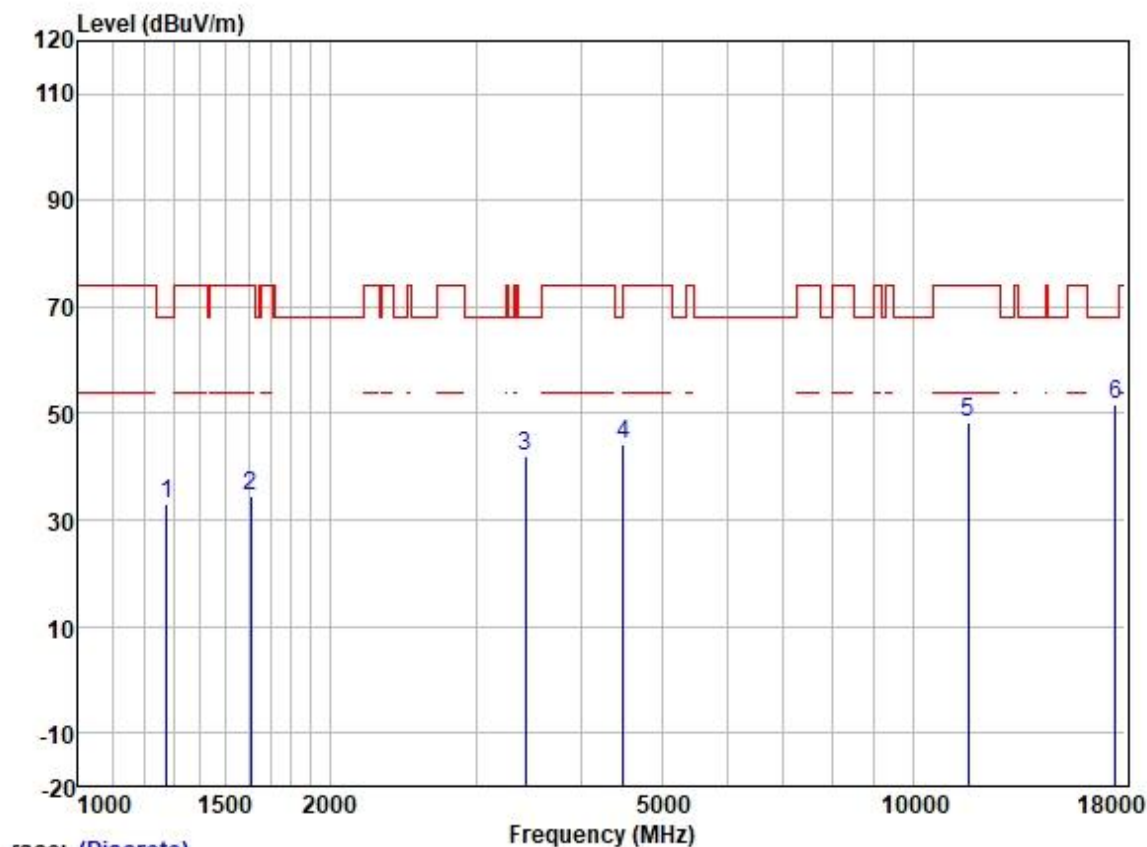


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1274.802	43.56	25.12	2.48	38.33	32.83	68.20	-35.37	HORIZONTAL	Peak
2	1611.091	44.09	25.59	2.80	37.98	34.50	74.00	-39.50	HORIZONTAL	Peak
3	3435.590	45.75	28.87	4.16	36.97	41.81	68.20	-26.39	HORIZONTAL	Peak
4	4495.125	45.03	30.80	5.05	36.82	44.06	68.20	-24.14	HORIZONTAL	Peak
5	11650.000	37.61	39.65	8.35	37.13	48.48	74.00	-25.52	HORIZONTAL	Peak
6	17475.000	32.31	43.90	10.77	35.32	51.66	68.20	-16.54	HORIZONTAL	Peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

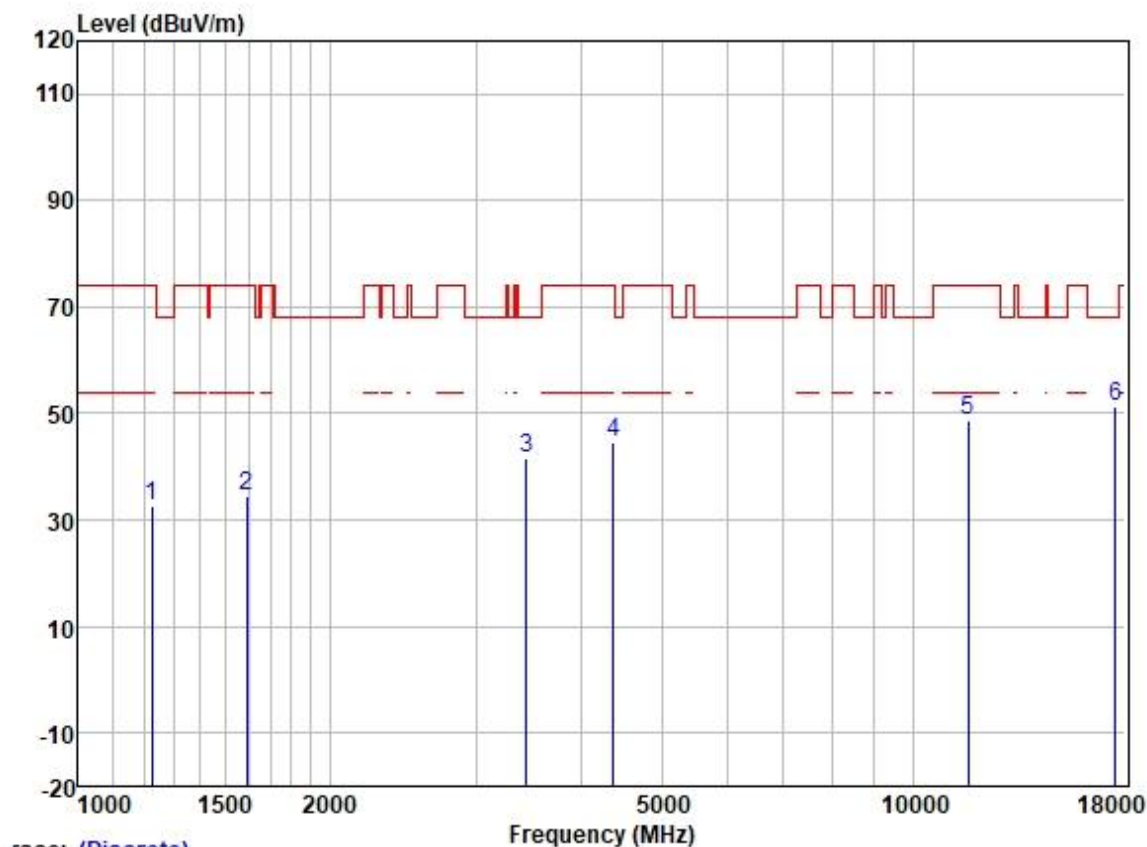

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1224.247	44.03	24.85	2.31	38.37	32.82	74.00	-41.18	VERTICAL	Peak
2	1592.571	44.04	25.57	2.80	37.98	34.43	74.00	-39.57	VERTICAL	Peak
3	3445.535	45.47	28.87	4.18	36.96	41.56	68.20	-26.64	VERTICAL	Peak
4	4379.699	46.00	30.64	4.69	36.81	44.52	74.00	-29.48	VERTICAL	Peak
5	11650.000	37.74	39.65	8.35	37.13	48.61	74.00	-25.39	VERTICAL	Peak
6	17475.000	32.10	43.90	10.77	35.32	51.45	68.20	-16.75	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

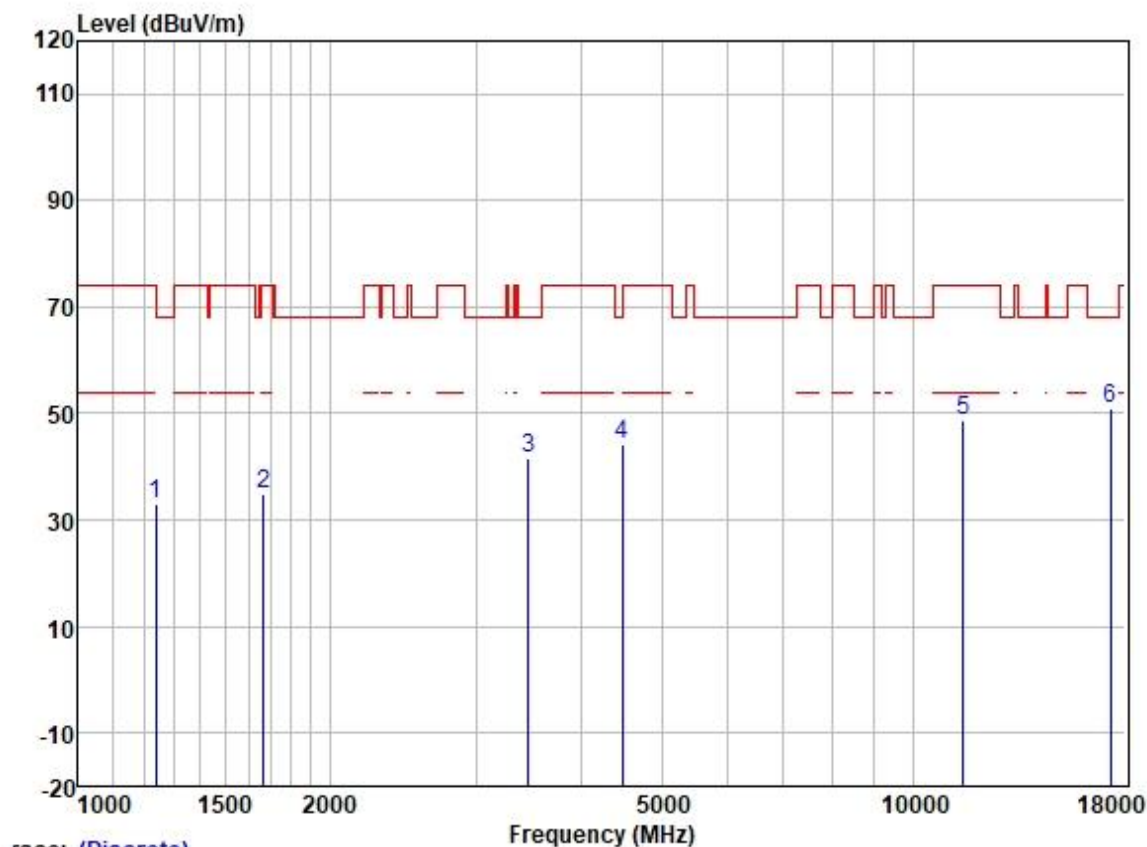

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1238.483	43.96	24.96	2.30	38.35	32.87	74.00	-41.13	HORIZONTAL	Peak
2	1667.951	44.34	25.66	2.80	37.91	34.89	74.00	-39.11	HORIZONTAL	Peak
3	3465.510	45.27	28.88	4.22	36.95	41.42	68.20	-26.78	HORIZONTAL	Peak
4	4482.150	45.21	30.78	4.99	36.81	44.17	68.20	-24.03	HORIZONTAL	Peak
5	11510.000	37.60	39.90	8.41	37.15	48.76	74.00	-25.24	HORIZONTAL	Peak
6	17265.000	32.89	43.21	10.24	35.33	51.01	68.20	-17.19	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

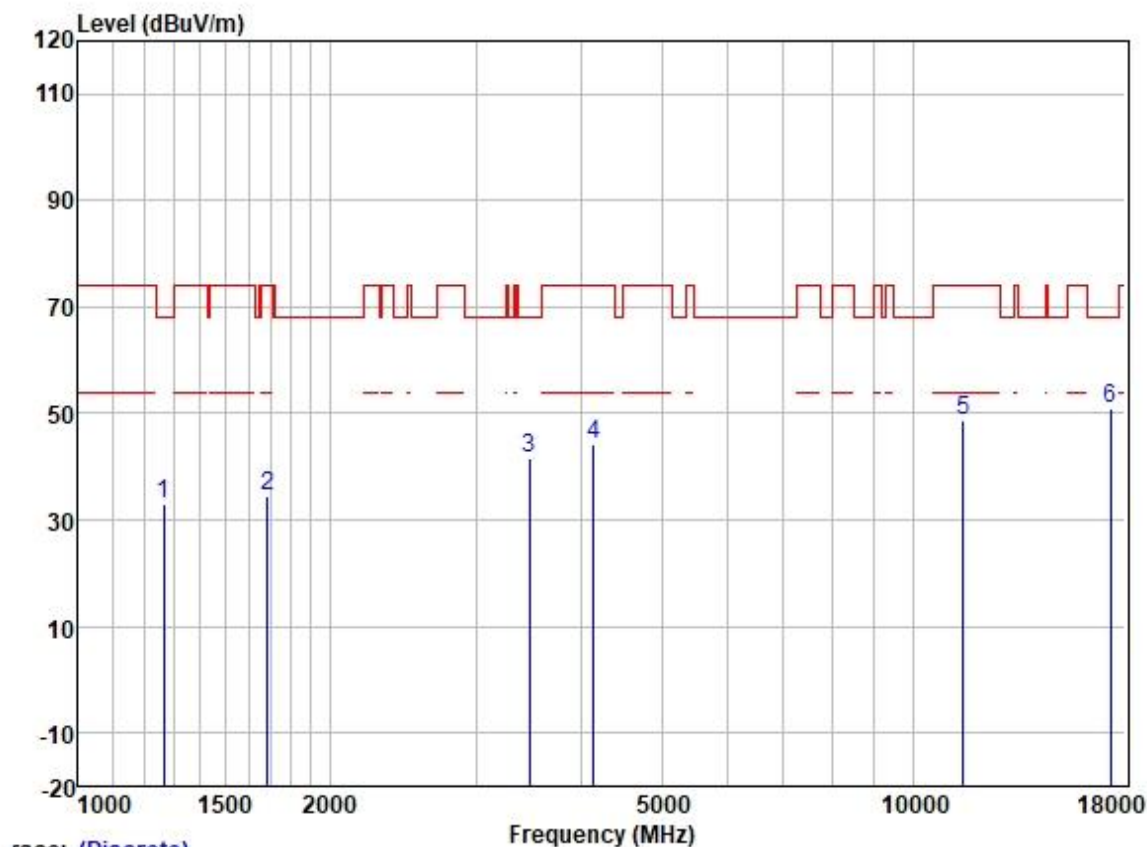


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1267.454	43.93	25.10	2.44	38.33	33.14	68.20	-35.06	VERTICAL	Peak
2	1687.347	44.05	25.69	2.80	37.91	34.63	74.00	-39.37	VERTICAL	Peak
3	3475.541	45.49	28.89	4.25	36.95	41.68	68.20	-26.52	VERTICAL	Peak
4	4145.664	46.29	30.03	4.60	36.80	44.12	74.00	-29.88	VERTICAL	Peak
5	11510.000	37.63	39.90	8.41	37.15	48.79	74.00	-25.21	VERTICAL	Peak
6	17265.000	32.77	43.21	10.24	35.33	50.89	68.20	-17.31	VERTICAL	Peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

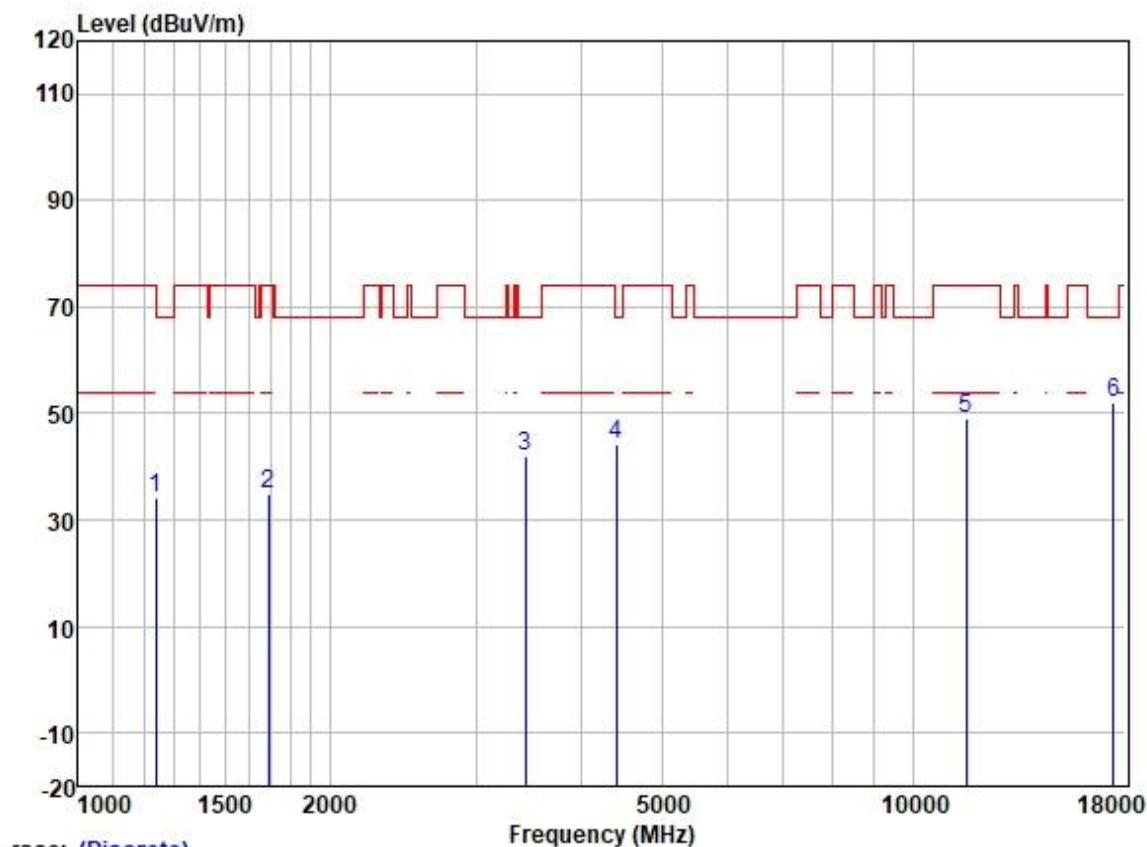


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1238.483	45.08	24.96	2.30	38.35	33.99	74.00	-40.01	HORIZONTAL	Peak
2	1692.231	44.20	25.70	2.80	37.89	34.81	74.00	-39.19	HORIZONTAL	Peak
3	3435.590	45.77	28.87	4.16	36.97	41.83	68.20	-26.37	HORIZONTAL	Peak
4	4417.841	45.76	30.70	4.74	36.81	44.39	68.20	-23.81	HORIZONTAL	Peak
5	11590.000	38.10	39.72	8.37	37.14	49.05	74.00	-24.95	HORIZONTAL	Peak
6	17385.000	33.11	43.57	10.53	35.32	51.89	68.20	-16.31	HORIZONTAL	Peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

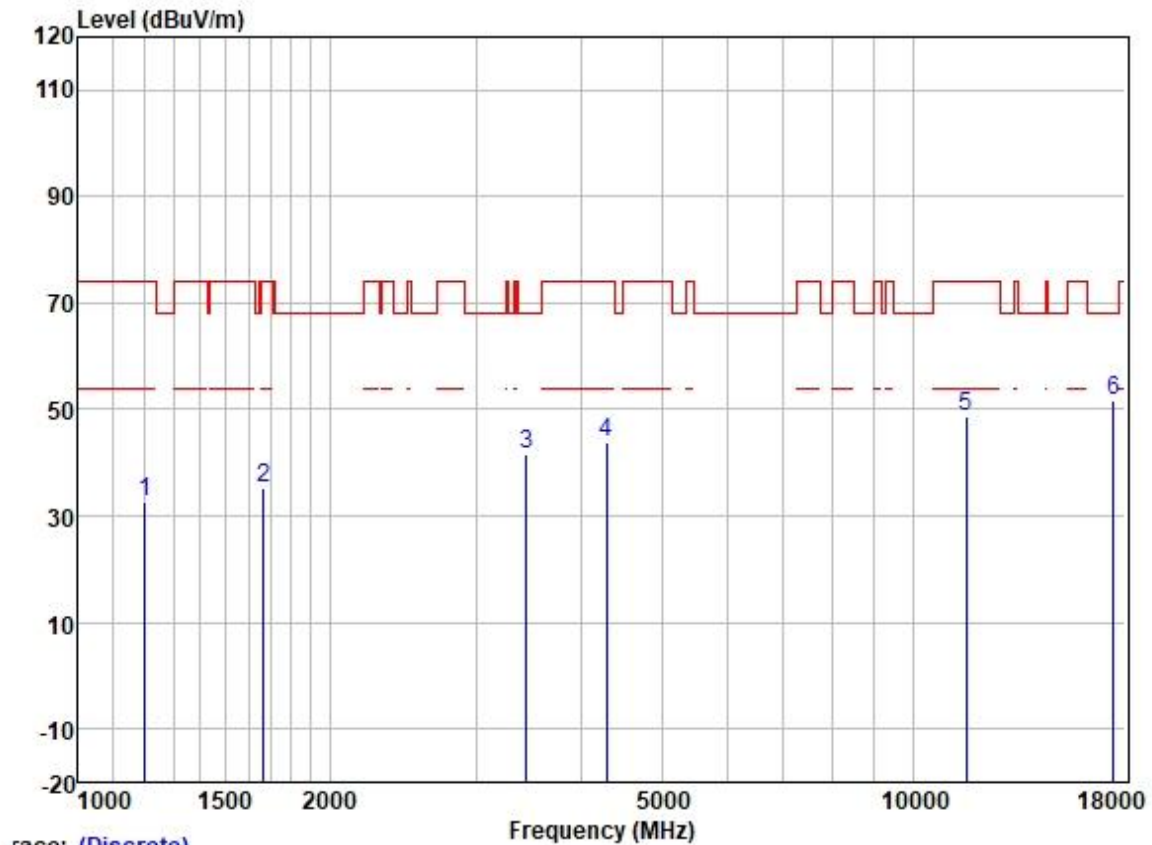


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1203.199	44.03	24.70	2.34	38.39	32.68	74.00	-41.32	VERTICAL	Peak
2	1667.951	44.68	25.66	2.80	37.91	35.23	74.00	-38.77	VERTICAL	Peak
3	3445.535	45.63	28.87	4.18	36.96	41.72	68.20	-26.48	VERTICAL	Peak
4	4291.977	45.55	30.45	4.64	36.81	43.83	74.00	-30.17	VERTICAL	Peak
5	11590.000	37.91	39.72	8.37	37.14	48.86	74.00	-25.14	VERTICAL	Peak
6	17385.000	32.75	43.57	10.53	35.32	51.53	68.20	-16.67	VERTICAL	Peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

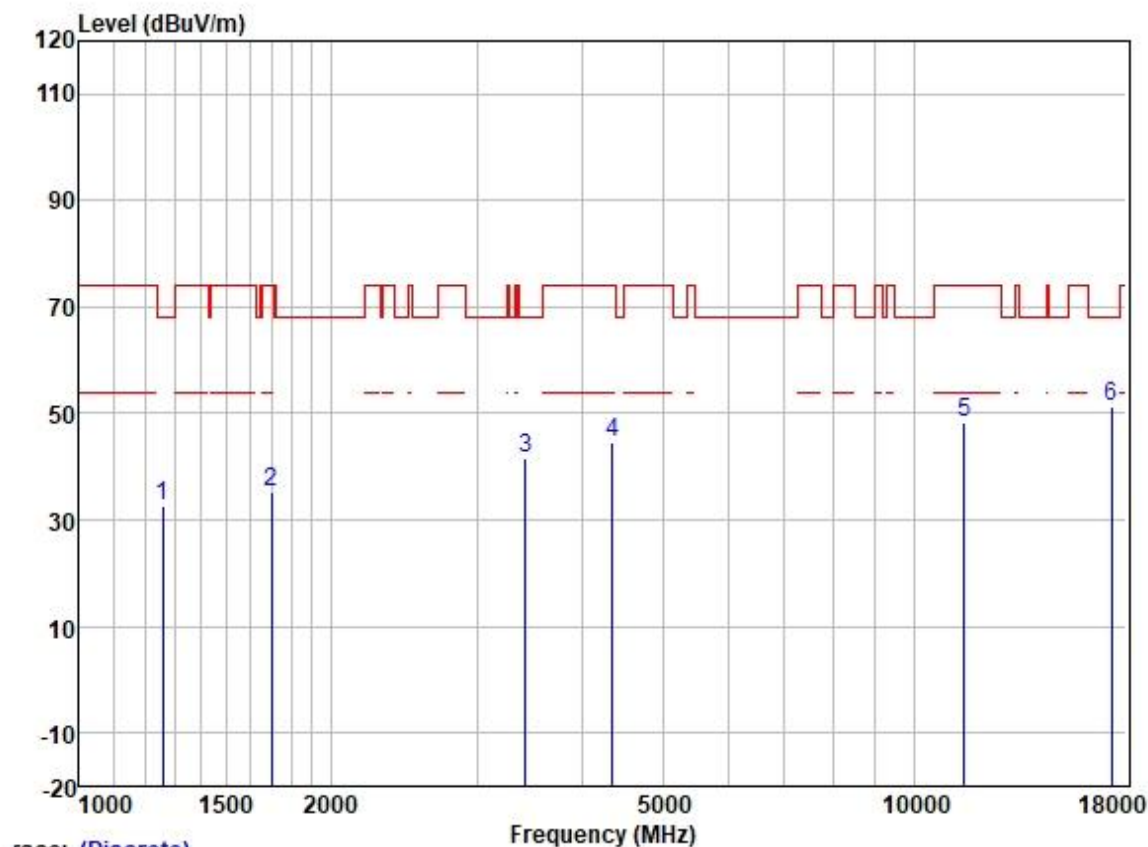


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1260.149	43.46	25.07	2.40	38.35	32.58	68.20	-35.62	HORIZONTAL	Peak
2	1697.129	44.50	25.71	2.80	37.89	35.12	74.00	-38.88	HORIZONTAL	Peak
3	3425.675	45.41	28.86	4.15	36.97	41.45	68.20	-26.75	HORIZONTAL	Peak
4	4354.454	46.04	30.59	4.68	36.81	44.50	74.00	-29.50	HORIZONTAL	Peak
5	11490.000	37.10	39.90	8.41	37.15	48.26	74.00	-25.74	HORIZONTAL	Peak
6	17235.000	33.47	43.01	10.08	35.33	51.23	68.20	-16.97	HORIZONTAL	Peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

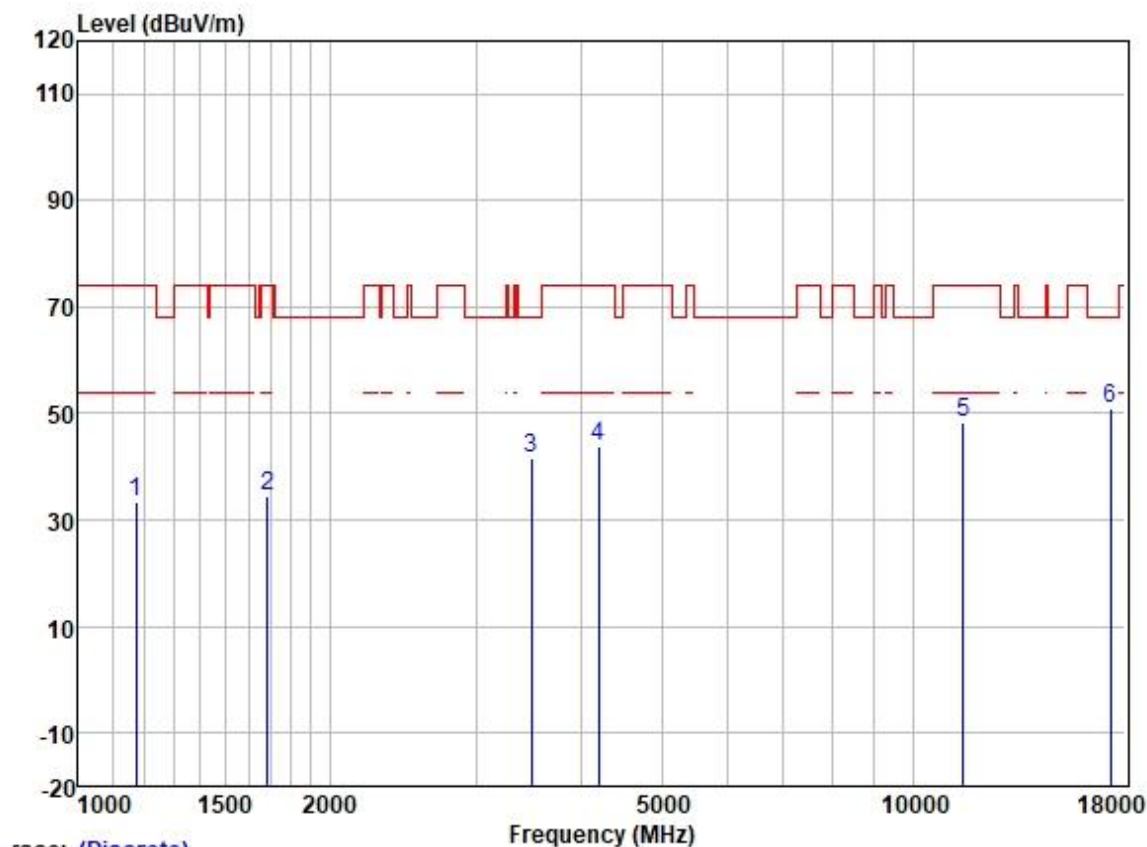


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1172.303	44.88	24.56	2.39	38.40	33.43	74.00	-40.57	VERTICAL	Peak
2	1687.347	43.93	25.69	2.80	37.91	34.51	74.00	-39.49	VERTICAL	Peak
3	3495.691	45.43	28.90	4.30	36.94	41.69	68.20	-26.51	VERTICAL	Peak
4	4206.011	46.01	30.18	4.60	36.81	43.98	74.00	-30.02	VERTICAL	Peak
5	11490.000	37.00	39.90	8.41	37.15	48.16	74.00	-25.84	VERTICAL	Peak
6	17235.000	33.04	43.01	10.08	35.33	50.80	68.20	-17.40	VERTICAL	Peak




Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

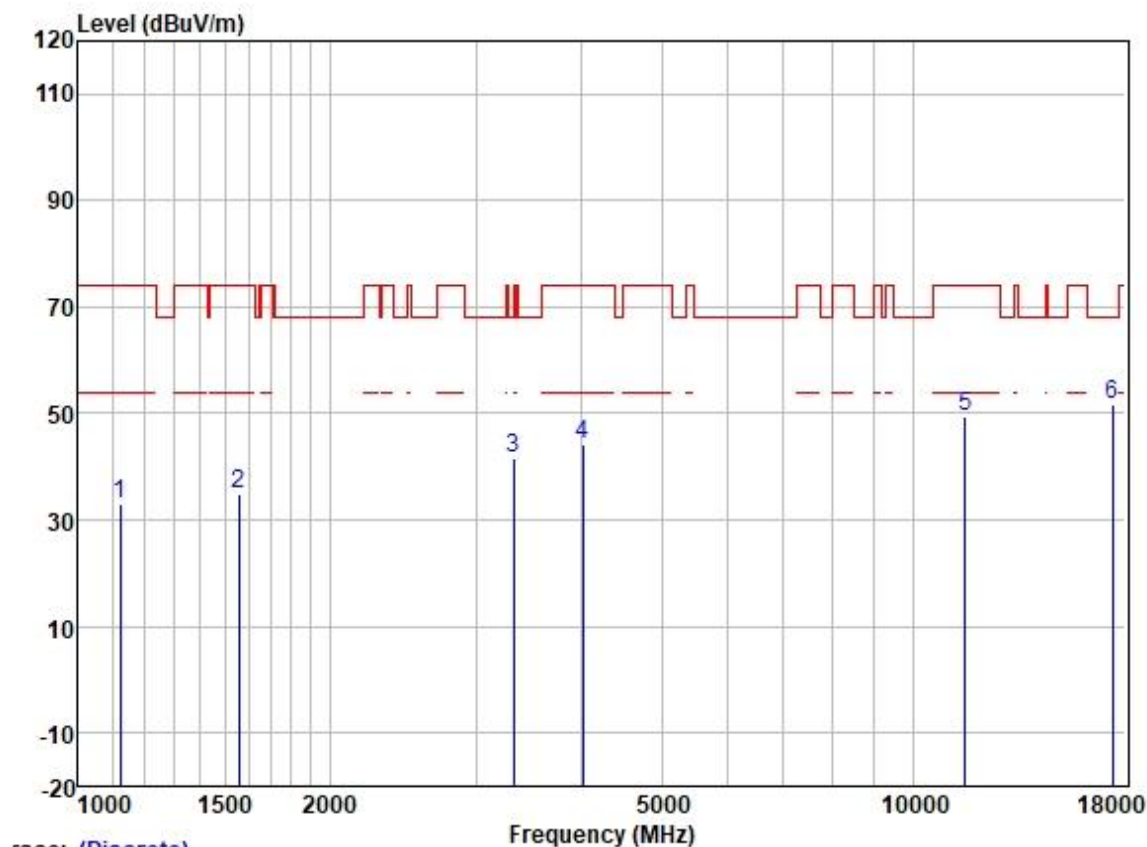

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1122.563	44.83	24.42	2.22	38.43	33.04	74.00	-40.96	HORIZONTAL Peak
2	1556.169	44.58	25.54	2.80	38.03	34.89	74.00	-39.11	HORIZONTAL Peak
3	3328.077	45.82	28.78	4.07	37.02	41.65	68.20	-26.55	HORIZONTAL Peak
4	4027.554	46.44	29.83	4.60	36.80	44.07	74.00	-29.93	HORIZONTAL Peak
5	11570.000	38.28	39.78	8.38	37.14	49.30	74.00	-24.70	HORIZONTAL Peak
6	17355.000	33.03	43.40	10.39	35.32	51.50	68.20	-16.70	HORIZONTAL Peak




Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

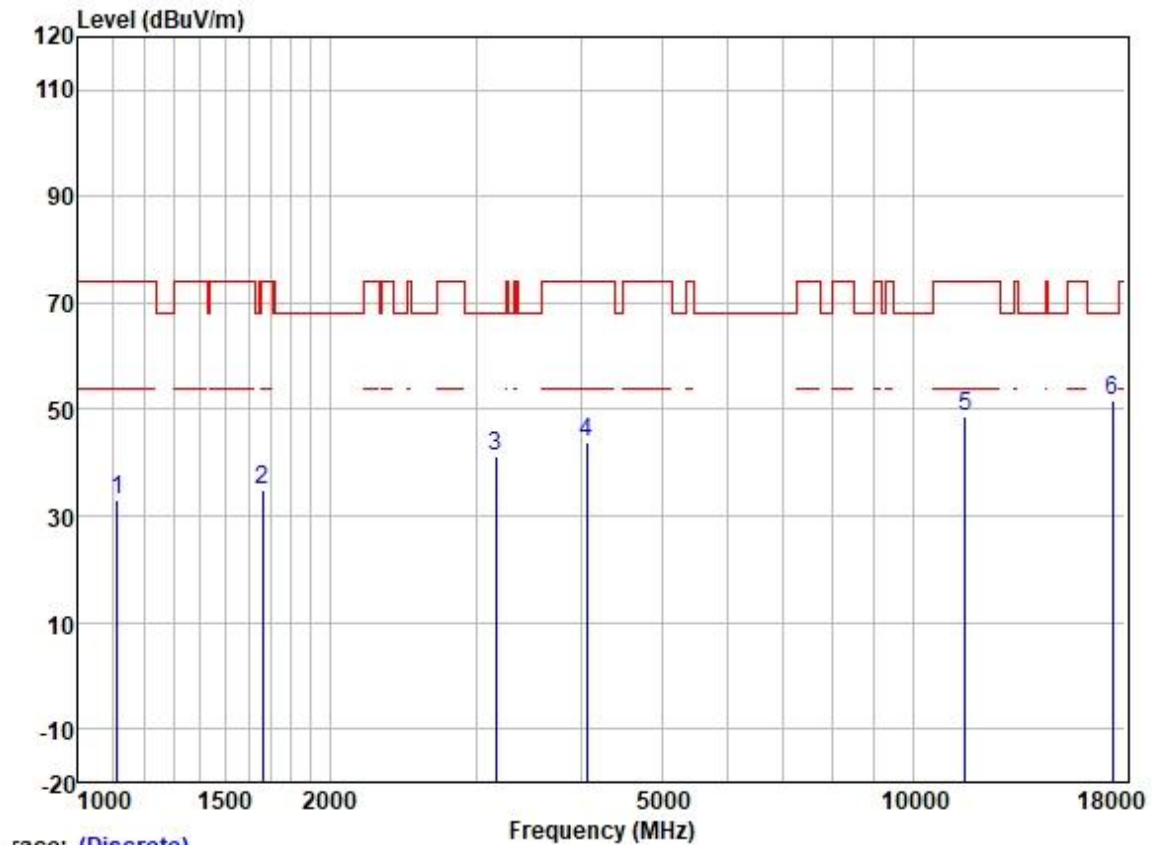

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
		dBuV	dB/m	dB	dB			dB		
1	1112.872	44.63	24.39	2.26	38.43	32.85	74.00	-41.15	VERTICAL	Peak
2	1663.137	44.31	25.65	2.80	37.91	34.85	74.00	-39.15	VERTICAL	Peak
3	3168.500	45.95	28.55	3.98	37.10	41.38	68.20	-26.82	VERTICAL	Peak
4	4062.629	46.33	29.88	4.60	36.80	44.01	74.00	-29.99	VERTICAL	Peak
5	11570.000	37.63	39.78	8.38	37.14	48.65	74.00	-25.35	VERTICAL	Peak
6	17355.000	33.35	43.40	10.39	35.32	51.82	68.20	-16.38	VERTICAL	Peak




Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

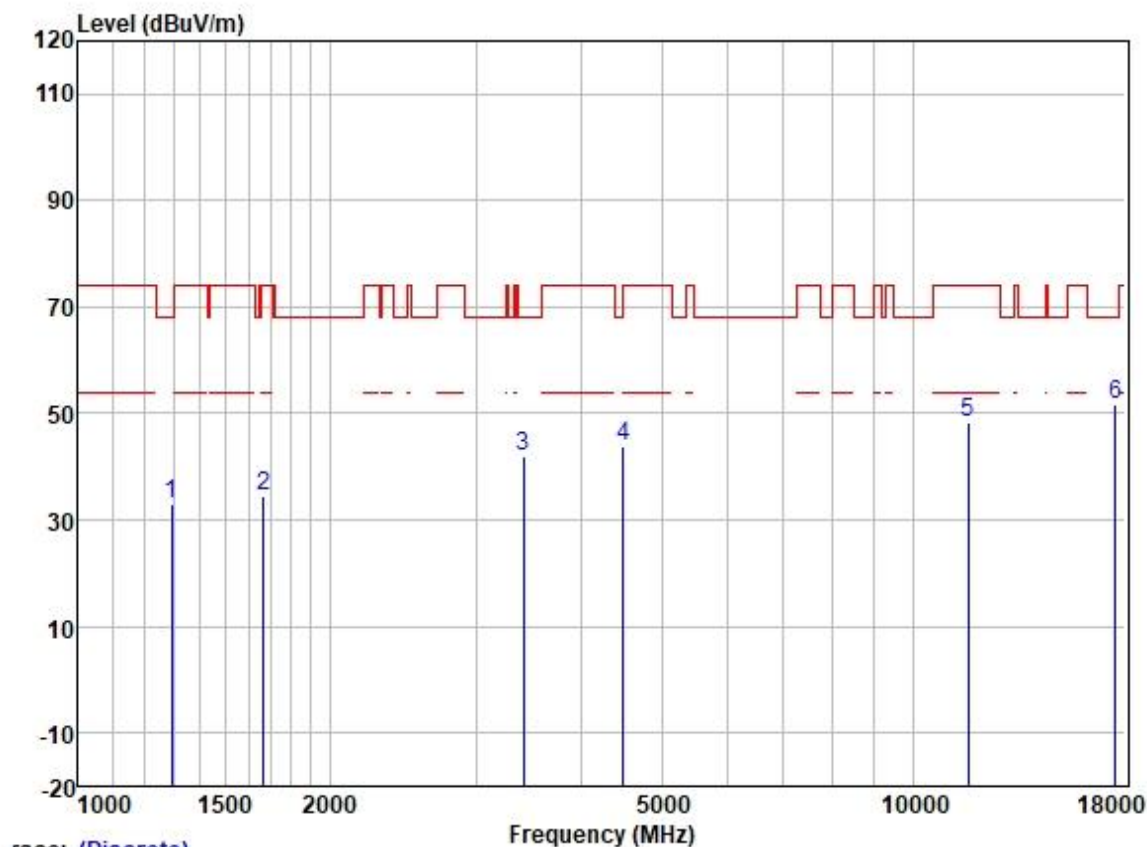

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1293.359	43.44	25.18	2.57	38.31	32.88	68.20	-35.32	HORIZONTAL	Peak
2	1667.951	44.01	25.66	2.80	37.91	34.56	74.00	-39.44	HORIZONTAL	Peak
3	3415.787	45.90	28.85	4.13	36.97	41.91	68.20	-26.29	HORIZONTAL	Peak
4	4495.125	44.64	30.80	5.05	36.82	43.67	68.20	-24.53	HORIZONTAL	Peak
5	11650.000	37.60	39.65	8.35	37.13	48.47	74.00	-25.53	HORIZONTAL	Peak
6	17475.000	32.39	43.90	10.77	35.32	51.74	68.20	-16.46	HORIZONTAL	Peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

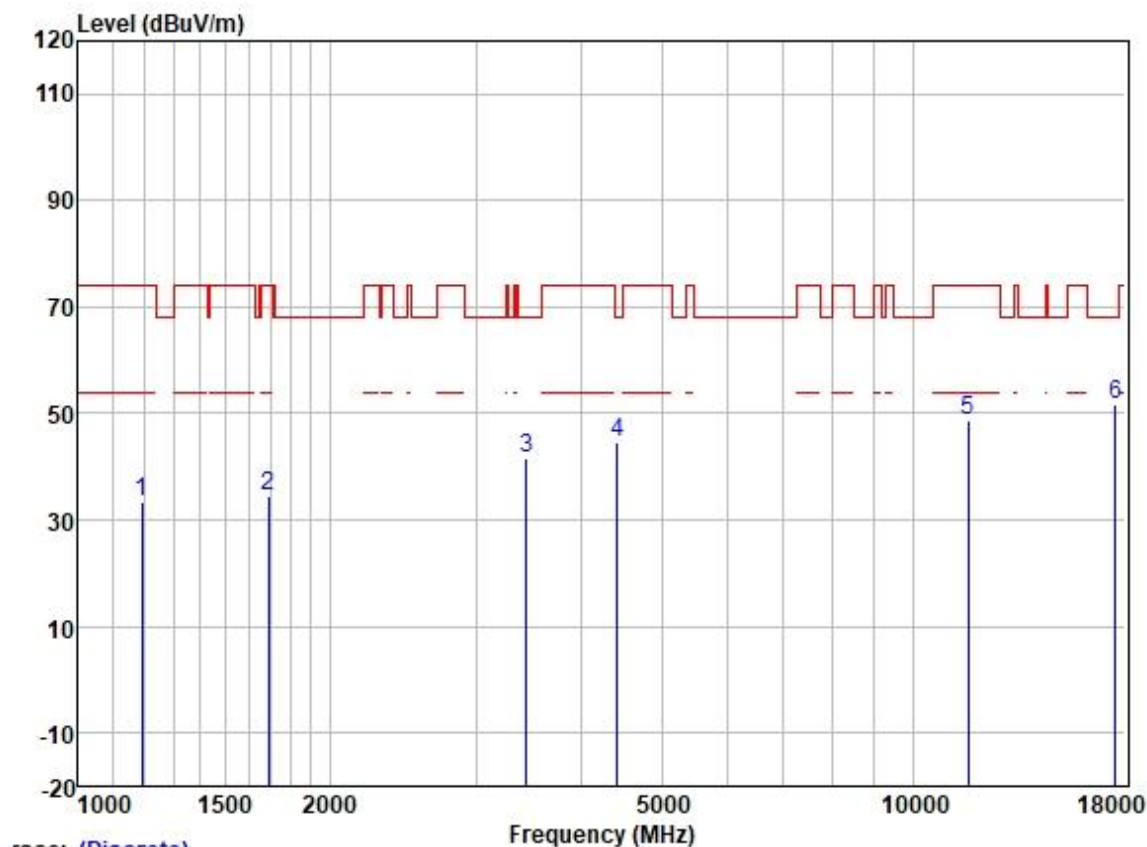

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1192.811	44.87	24.65	2.36	38.39	33.49	74.00	-40.51	VERTICAL	Peak
2	1692.231	44.03	25.70	2.80	37.89	34.64	74.00	-39.36	VERTICAL	Peak
3	3445.535	45.53	28.87	4.18	36.96	41.62	68.20	-26.58	VERTICAL	Peak
4	4430.628	45.92	30.72	4.78	36.81	44.61	68.20	-23.59	VERTICAL	Peak
5	11650.000	37.72	39.65	8.35	37.13	48.59	74.00	-25.41	VERTICAL	Peak
6	17475.000	32.43	43.90	10.77	35.32	51.78	68.20	-16.42	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

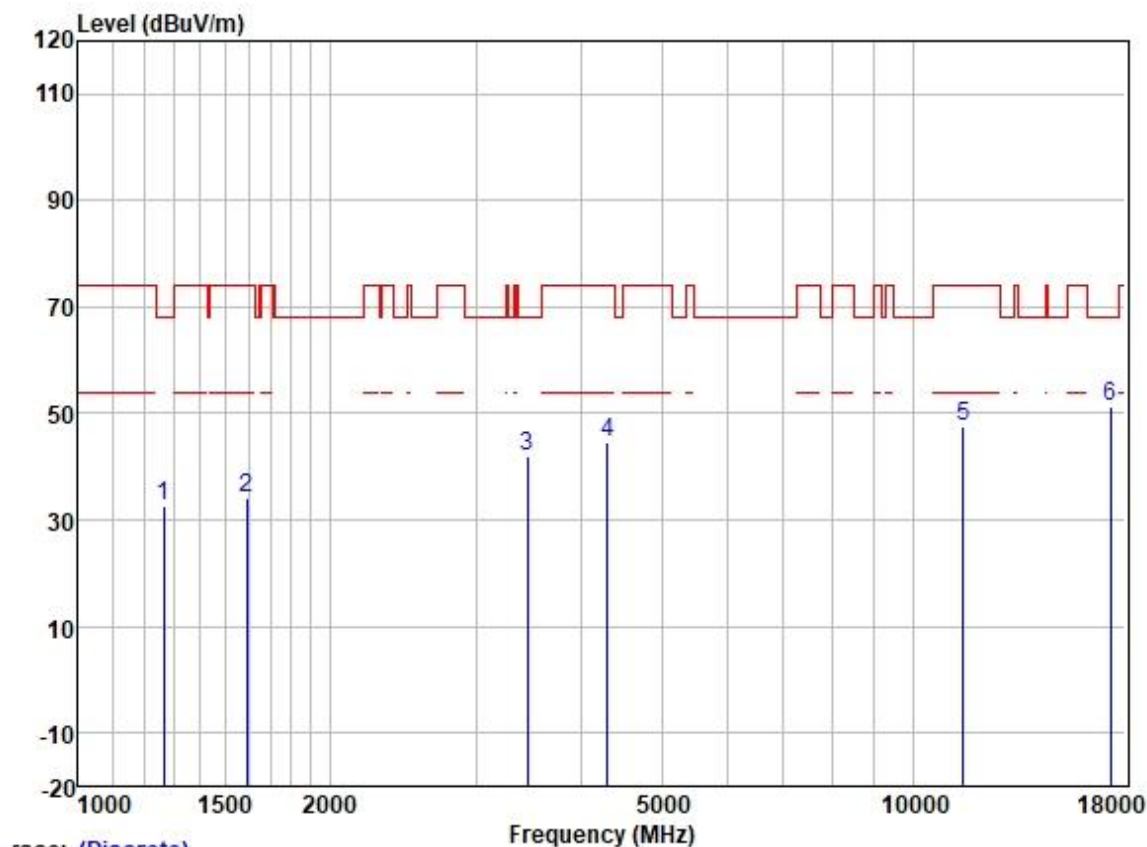

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1267.454	43.36	25.10	2.44	38.33	32.57	68.20	-35.63	HORIZONTAL	Peak
2	1592.571	43.87	25.57	2.80	37.98	34.26	74.00	-39.74	HORIZONTAL	Peak
3	3455.508	45.91	28.88	4.20	36.96	42.03	68.20	-26.17	HORIZONTAL	Peak
4	4304.400	46.31	30.48	4.65	36.81	44.63	74.00	-29.37	HORIZONTAL	Peak
5	11510.000	36.56	39.90	8.41	37.15	47.72	74.00	-26.28	HORIZONTAL	Peak
6	17265.000	33.17	43.21	10.24	35.33	51.29	68.20	-16.91	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

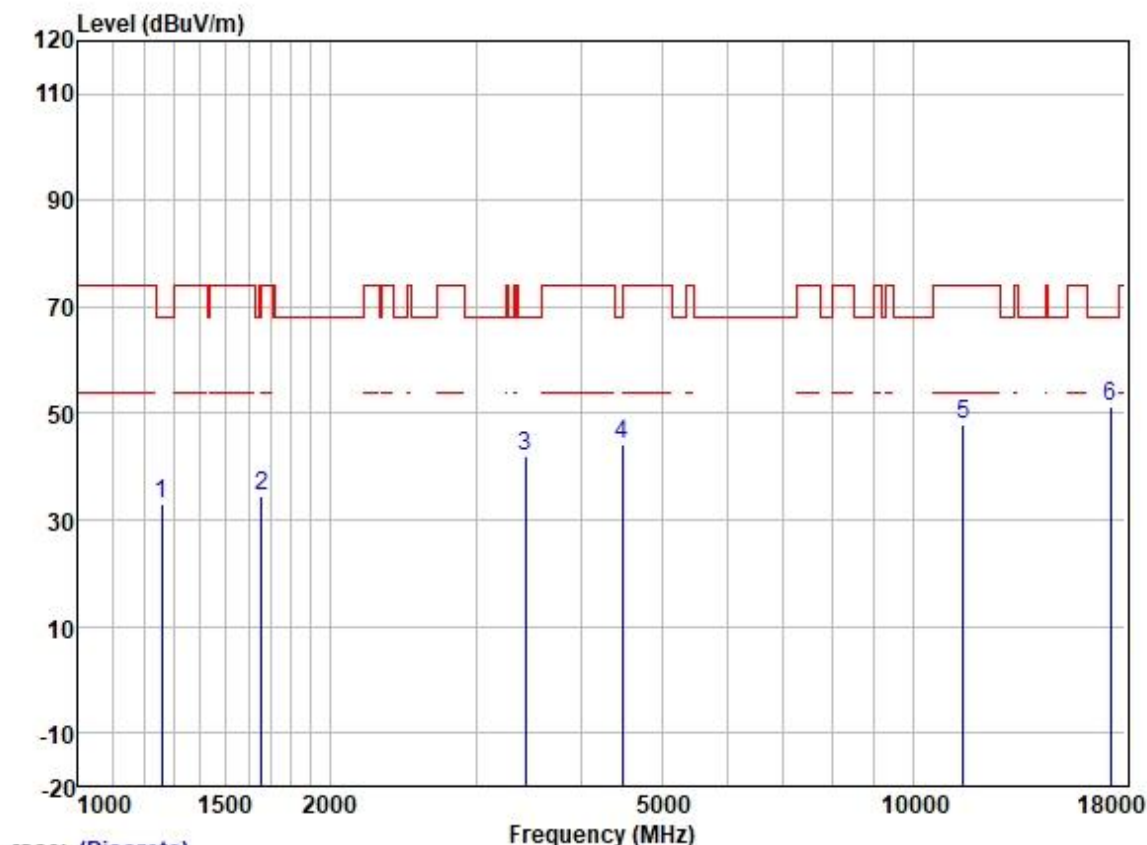

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1260.149	43.76	25.07	2.40	38.35	32.88	68.20	-35.32	VERTICAL	Peak
2	1658.337	44.03	25.65	2.80	37.93	34.55	68.20	-33.65	VERTICAL	Peak
3	3435.590	45.88	28.87	4.16	36.97	41.94	68.20	-26.26	VERTICAL	Peak
4	4482.150	45.15	30.78	4.99	36.81	44.11	68.20	-24.09	VERTICAL	Peak
5	11510.000	36.88	39.90	8.41	37.15	48.04	74.00	-25.96	VERTICAL	Peak
6	17265.000	33.03	43.21	10.24	35.33	51.15	68.20	-17.05	VERTICAL	Peak

