


Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High



Trace: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	44.61	24.79	2.32	38.37	33.35	74.00	-40.65	HORIZONTAL	Peak
2	1658.337	44.46	25.65	2.80	37.93	34.98	68.20	-33.22	HORIZONTAL	Peak
3	3445.535	46.12	28.87	4.18	36.96	42.21	68.20	-25.99	HORIZONTAL	Peak
4	4430.628	45.33	30.72	4.78	36.81	44.02	68.20	-24.18	HORIZONTAL	Peak
5	11590.000	37.74	39.72	8.37	37.14	48.69	74.00	-25.31	HORIZONTAL	Peak
6	17385.000	33.41	43.57	10.53	35.32	52.19	68.20	-16.01	HORIZONTAL	Peak

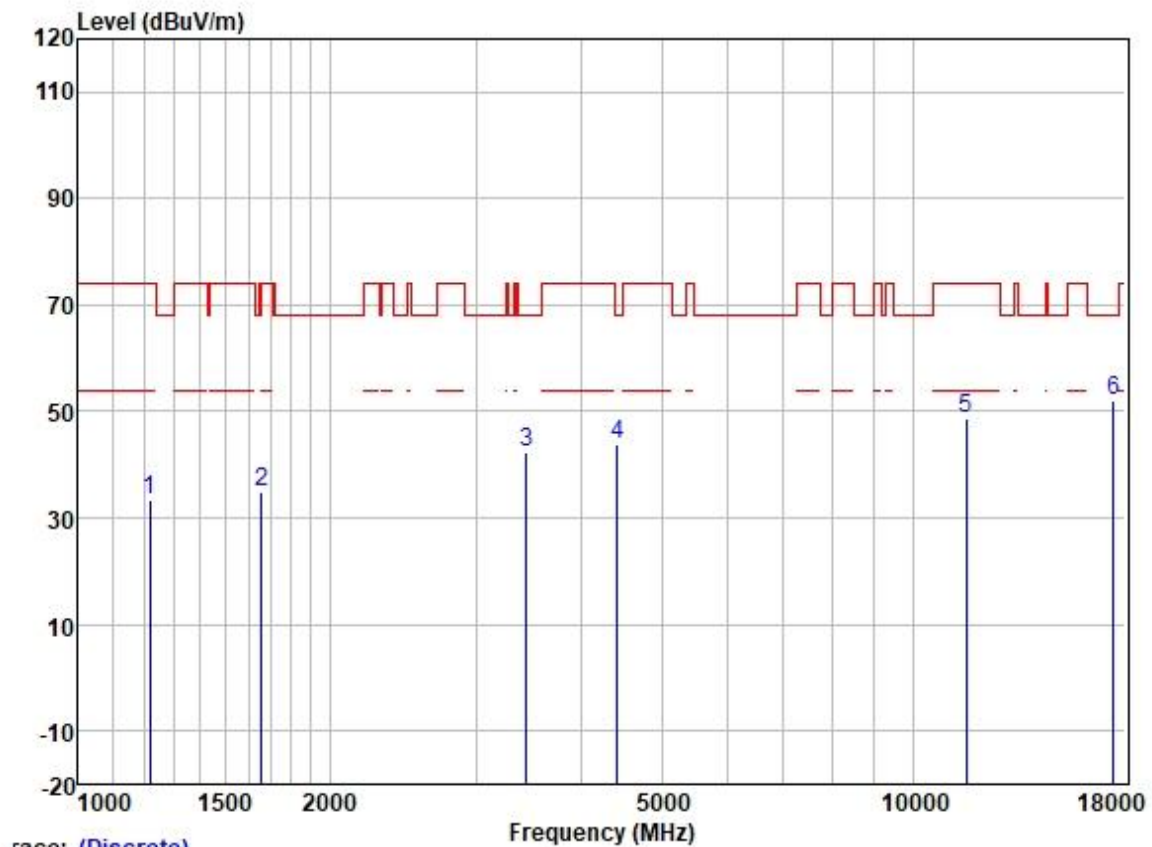


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch Technical Services Co., Ltd. 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

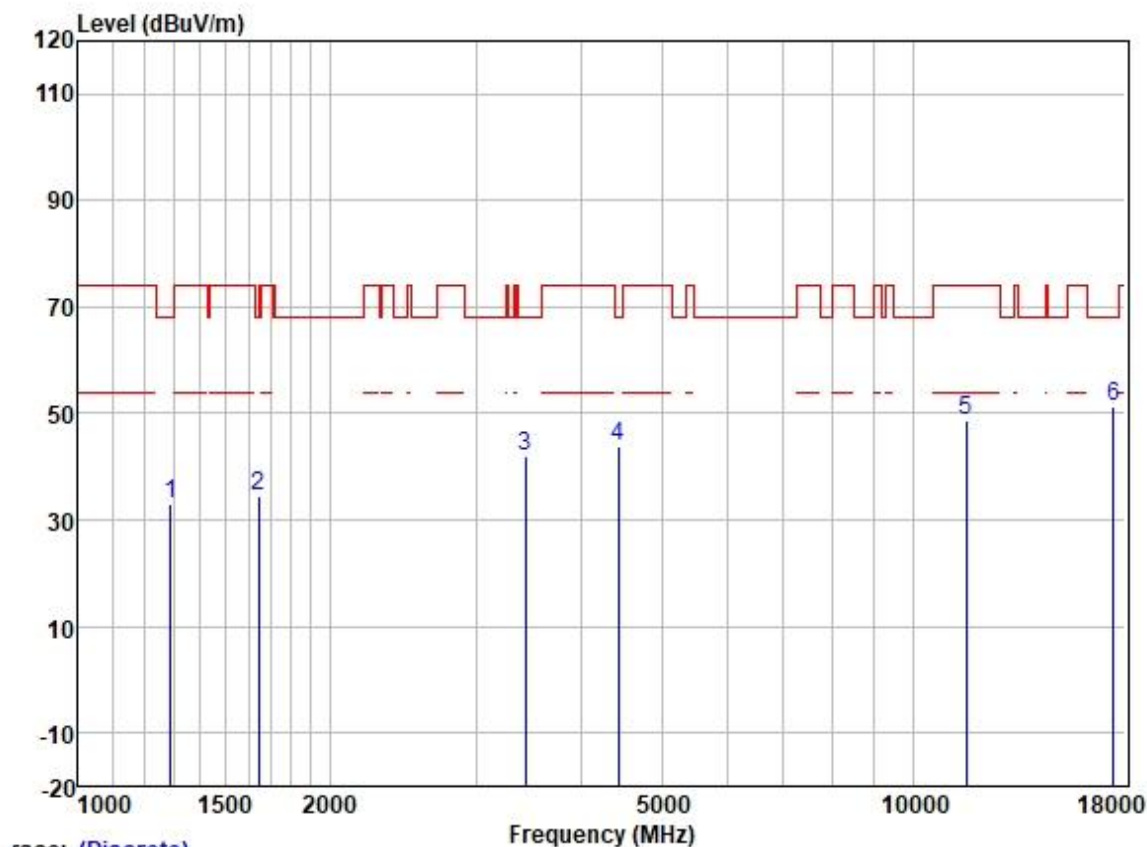

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	43.69	25.17	2.55	38.31	33.10	68.20	-35.10	VERTICAL	Peak
2	1644.019	44.17	25.63	2.80	37.93	34.67	68.20	-33.53	VERTICAL	Peak
3	3435.590	46.04	28.87	4.16	36.97	42.10	68.20	-26.10	VERTICAL	Peak
4	4443.453	45.18	30.73	4.83	36.81	43.93	68.20	-24.27	VERTICAL	Peak
5	11590.000	37.78	39.72	8.37	37.14	48.73	74.00	-25.27	VERTICAL	Peak
6	17385.000	32.71	43.57	10.53	35.32	51.49	68.20	-16.71	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

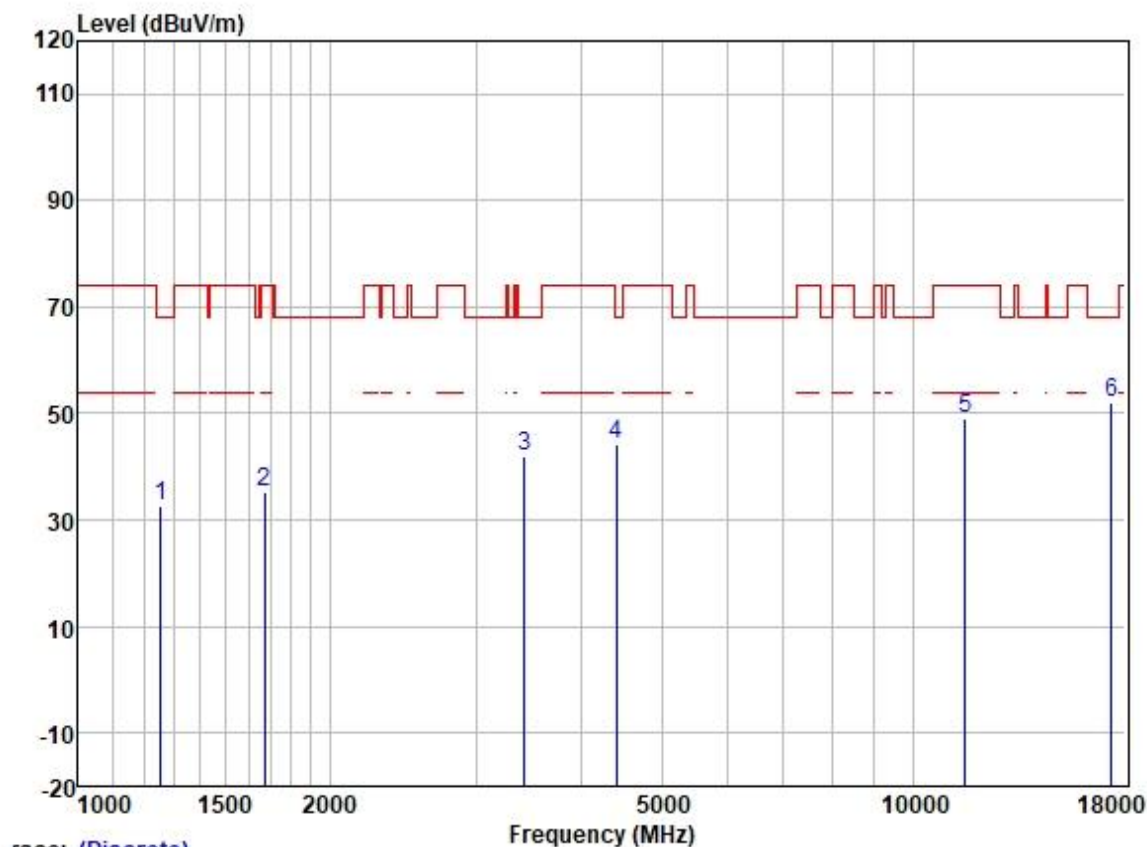

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1256.512	43.63	25.05	2.38	38.35	32.71	68.20	-35.49	HORIZONTAL	Peak
2	1672.779	44.74	25.67	2.80	37.91	35.30	74.00	-38.70	HORIZONTAL	Peak
3	3425.675	45.90	28.86	4.15	36.97	41.94	68.20	-26.26	HORIZONTAL	Peak
4	4417.841	45.52	30.70	4.74	36.81	44.15	68.20	-24.05	HORIZONTAL	Peak
5	11550.000	38.11	39.84	8.40	37.14	49.21	74.00	-24.79	HORIZONTAL	Peak
6	17325.000	33.75	43.40	10.39	35.32	52.22	68.20	-15.98	HORIZONTAL	Peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

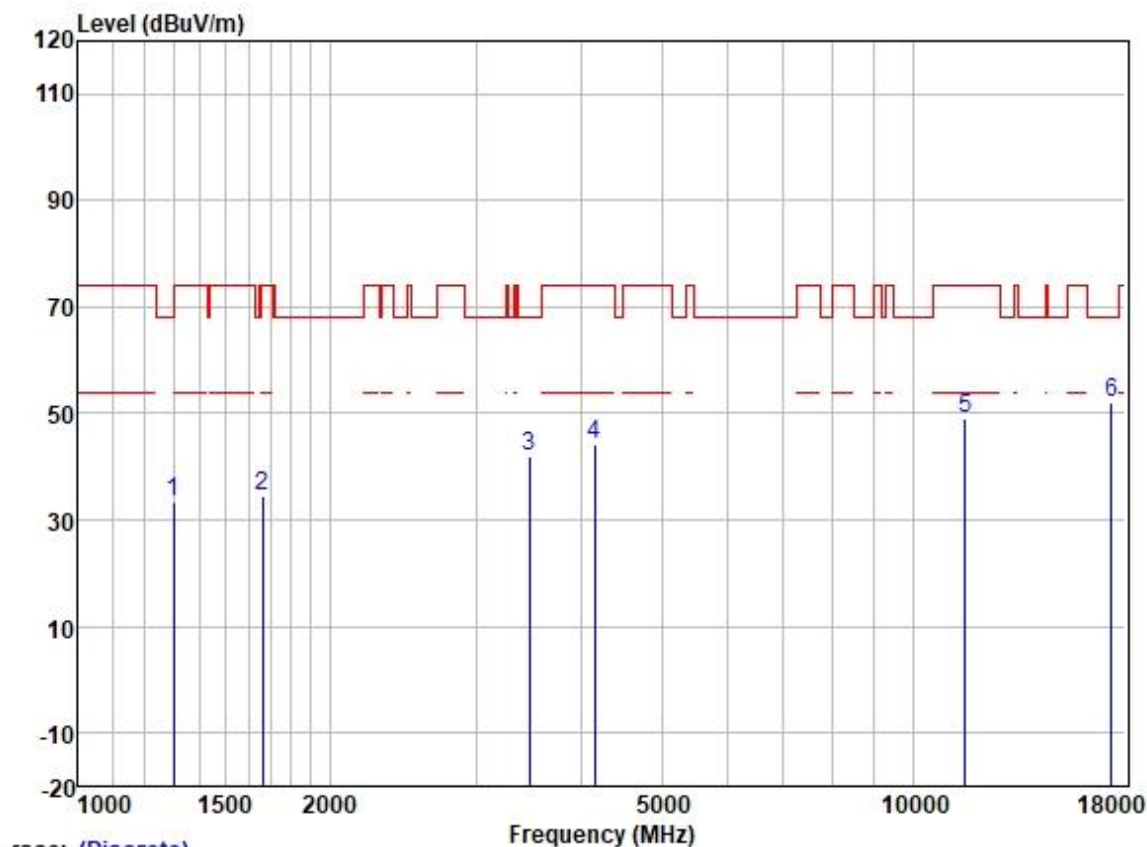

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1300.858	43.96	25.20	2.60	38.31	33.45	74.00	-40.55	VERTICAL	Peak
2	1663.137	43.95	25.65	2.80	37.91	34.49	74.00	-39.51	VERTICAL	Peak
3	3475.541	45.76	28.89	4.25	36.95	41.95	68.20	-26.25	VERTICAL	Peak
4	4157.664	46.38	30.06	4.60	36.80	44.24	74.00	-29.76	VERTICAL	Peak
5	11550.000	38.01	39.84	8.40	37.14	49.11	74.00	-24.89	VERTICAL	Peak
6	17325.000	33.47	43.40	10.39	35.32	51.94	68.20	-16.26	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 21; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

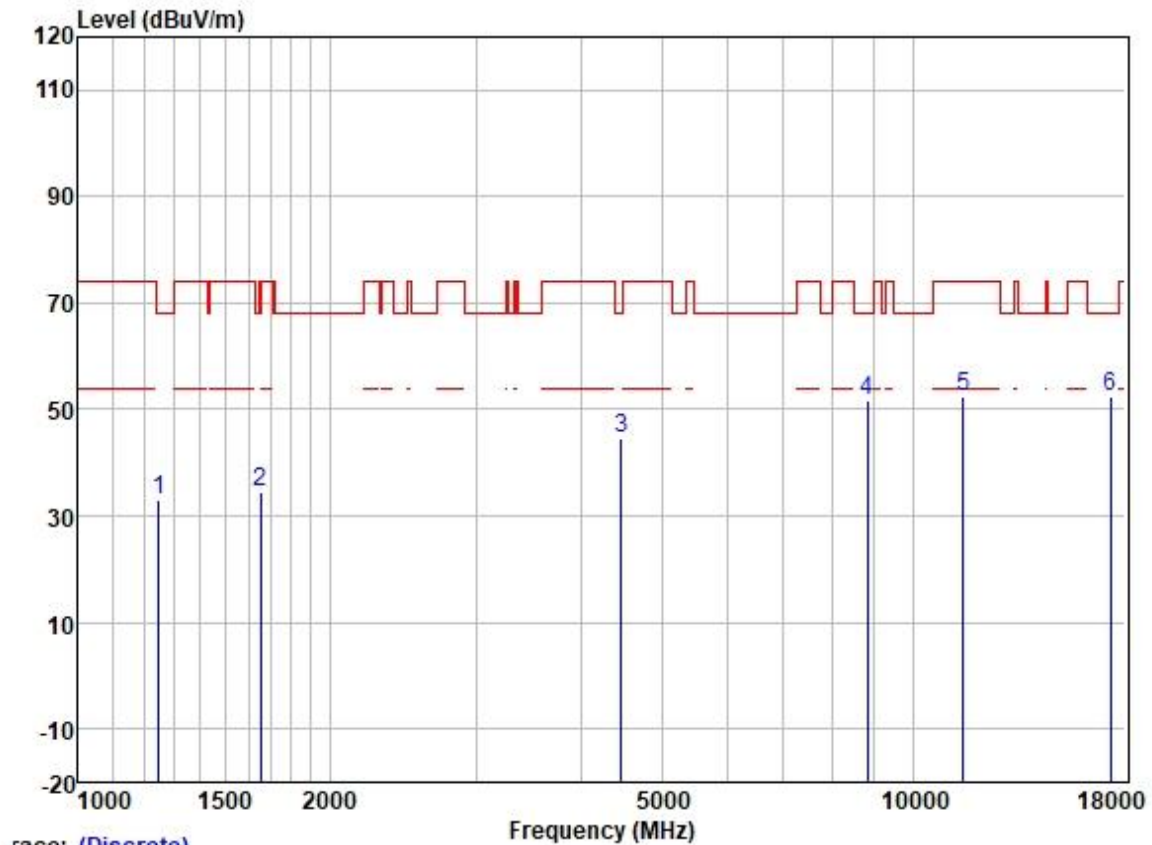

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1249.269	44.11	25.02	2.34	38.35	33.12	68.20	-35.08	HORIZONTAL	Peak
2	1653.550	44.09	25.64	2.80	37.93	34.60	68.20	-33.60	HORIZONTAL	Peak
3	4469.214	45.73	30.77	4.93	36.81	44.62	68.20	-23.58	HORIZONTAL	Peak
4	8814.957	44.46	37.34	7.29	37.53	51.56	68.20	-16.64	HORIZONTAL	Peak
5	11490.000	41.26	39.90	8.41	37.15	52.42	74.00	-21.58	HORIZONTAL	Peak
6	17235.000	34.61	43.01	10.08	35.33	52.37	68.20	-15.83	HORIZONTAL	Peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

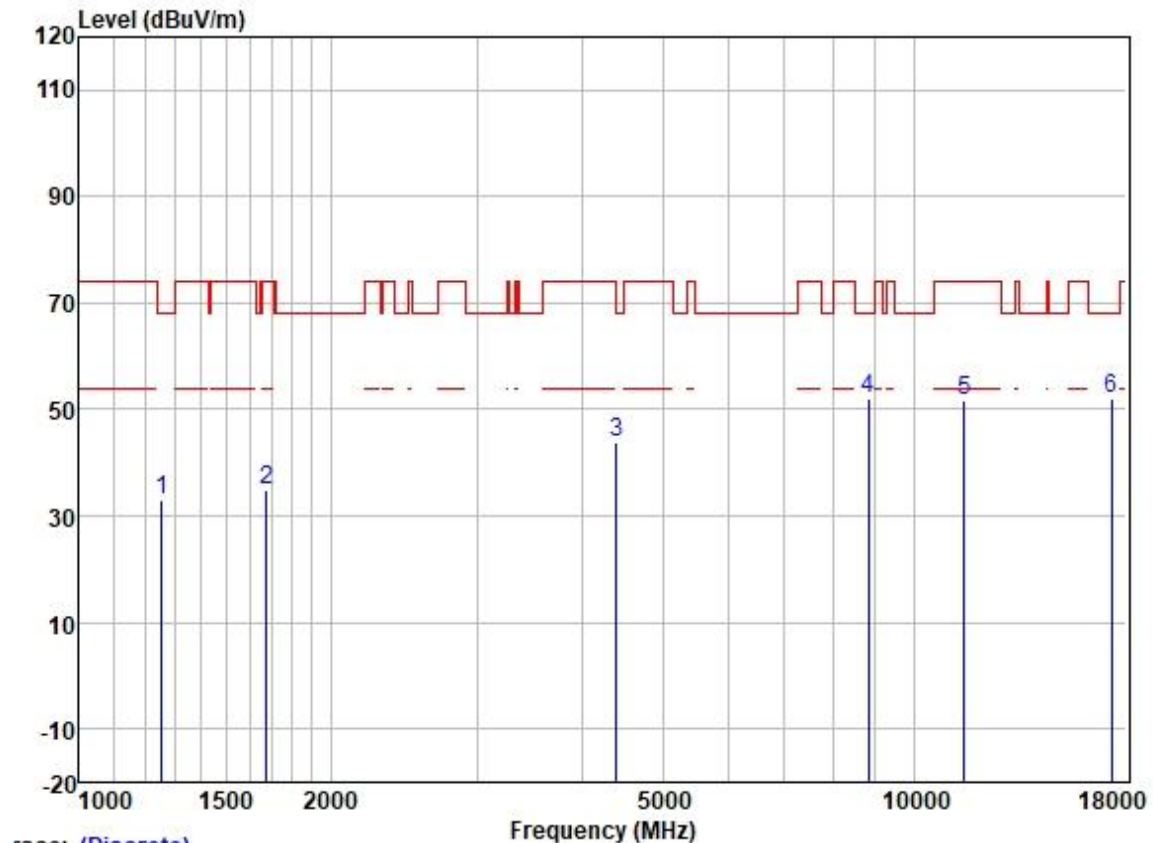

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
		dBuV	dB/m	dB	dB			dB		
1	1256.512	44.08	25.05	2.38	38.35	33.16	68.20	-35.04	VERTICAL	Peak
2	1677.621	44.32	25.68	2.80	37.91	34.89	74.00	-39.11	VERTICAL	Peak
3	4405.090	45.32	30.68	4.70	36.81	43.89	68.20	-24.31	VERTICAL	Peak
4	8814.957	44.85	37.34	7.29	37.53	51.95	68.20	-16.25	VERTICAL	Peak
5	11490.000	40.58	39.90	8.41	37.15	51.74	74.00	-22.26	VERTICAL	Peak
6	17235.000	34.43	43.01	10.08	35.33	52.19	68.20	-16.01	VERTICAL	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch Technical Services Co., Ltd. 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Test Mode: 21; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:middle

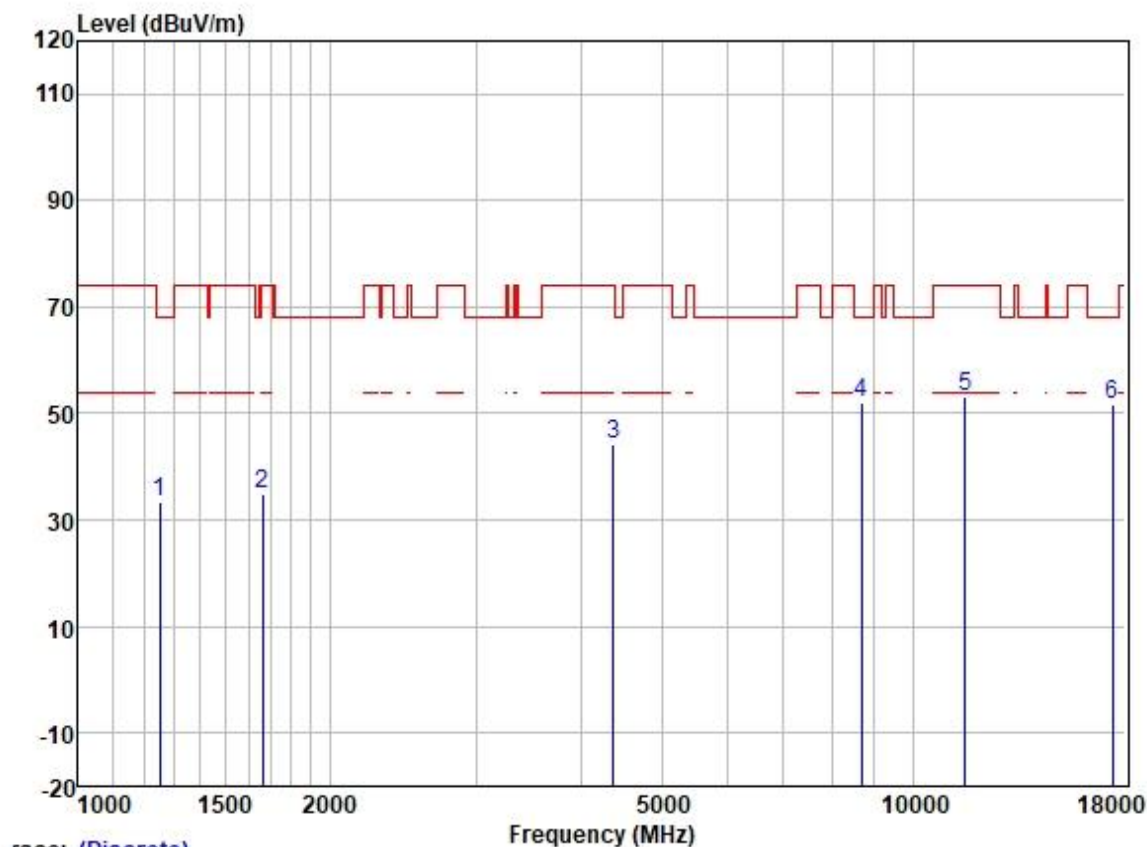

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1252.885	44.23	25.03	2.36	38.35	33.27	68.20	-34.93	HORIZONTAL	Peak
2	1663.137	44.37	25.65	2.80	37.91	34.91	74.00	-39.09	HORIZONTAL	Peak
3	4379.699	45.73	30.64	4.69	36.81	44.25	74.00	-29.75	HORIZONTAL	Peak
4	8688.480	45.43	37.28	7.02	37.55	52.18	68.20	-16.02	HORIZONTAL	Peak
5	11570.000	41.97	39.78	8.38	37.14	52.99	74.00	-21.01	HORIZONTAL	Peak
6	17355.000	33.35	43.40	10.39	35.32	51.82	68.20	-16.38	HORIZONTAL	Peak


Test Mode: 21; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:middle

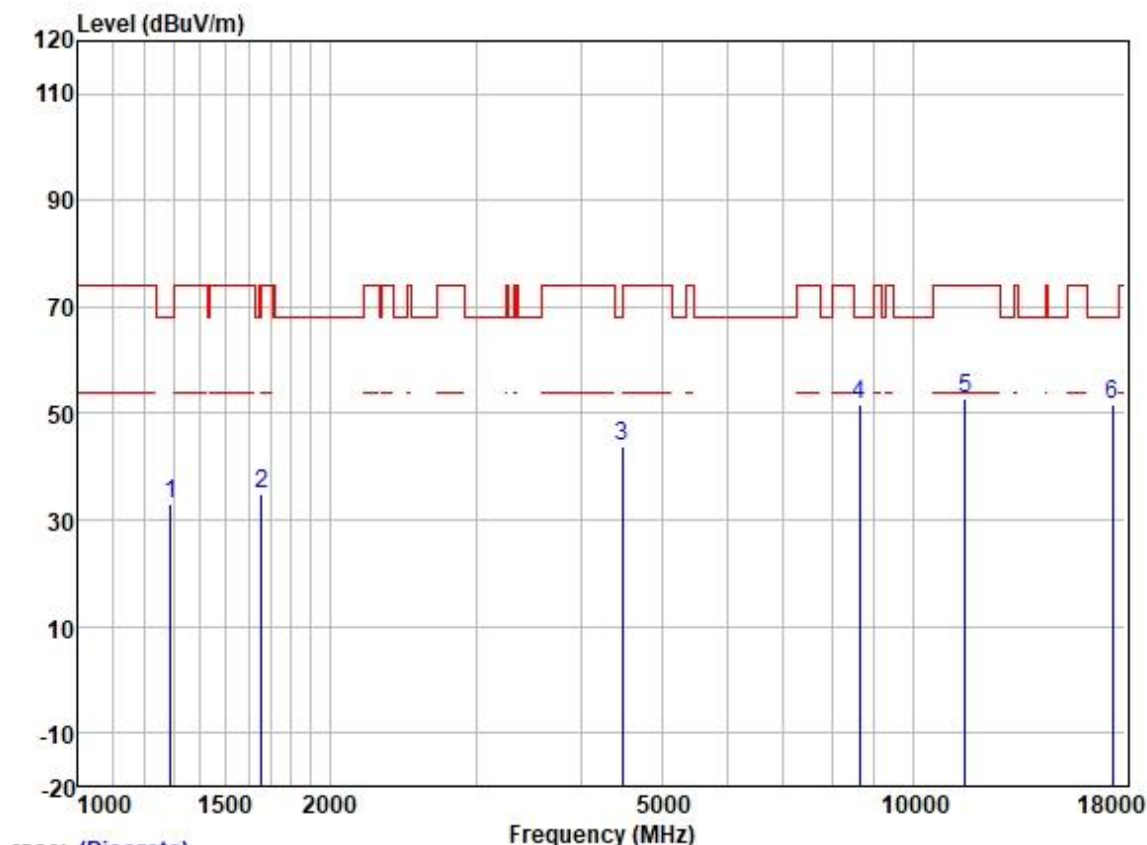

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	43.71	25.17	2.55	38.31	33.12	68.20	-35.08	VERTICAL	Peak
2	1658.337	44.28	25.65	2.80	37.93	34.80	68.20	-33.40	VERTICAL	Peak
3	4482.150	44.87	30.78	4.99	36.81	43.83	68.20	-24.37	VERTICAL	Peak
4	8638.399	45.21	37.26	6.92	37.55	51.84	68.20	-16.36	VERTICAL	Peak
5	11570.000	41.85	39.78	8.38	37.14	52.87	74.00	-21.13	VERTICAL	Peak
6	17355.000	33.30	43.40	10.39	35.32	51.77	68.20	-16.43	VERTICAL	Peak




Test Mode: 21; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:High

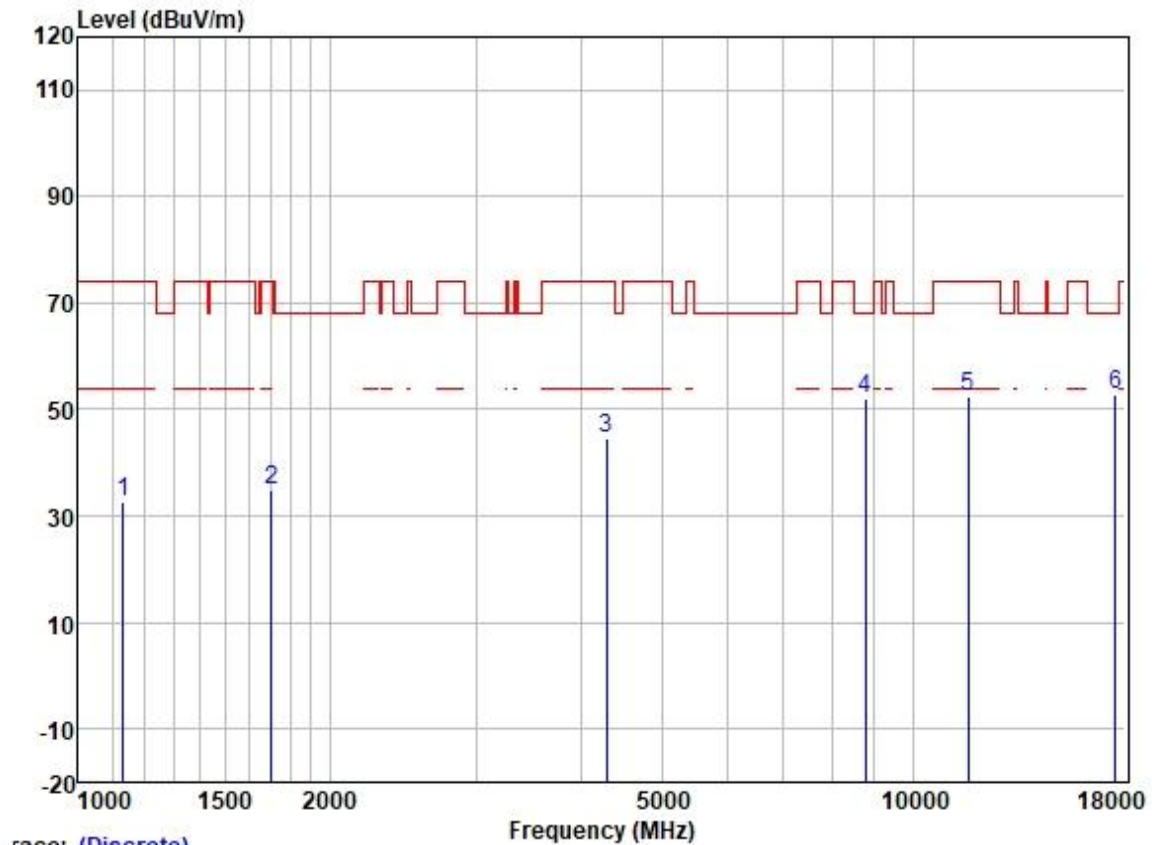

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1132.340	44.49	24.44	2.22	38.43	32.72	74.00	-41.28	HORIZONTAL	Peak
2	1702.042	44.38	25.72	2.80	37.89	35.01	74.00	-38.99	HORIZONTAL	Peak
3	4291.977	46.13	30.45	4.64	36.81	44.41	74.00	-29.59	HORIZONTAL	Peak
4	8764.146	44.92	37.32	7.19	37.54	51.89	68.20	-16.31	HORIZONTAL	Peak
5	11650.000	41.46	39.65	8.35	37.13	52.33	74.00	-21.67	HORIZONTAL	Peak
6	17475.000	33.58	43.90	10.77	35.32	52.93	68.20	-15.27	HORIZONTAL	Peak




Test Mode: 21; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:High

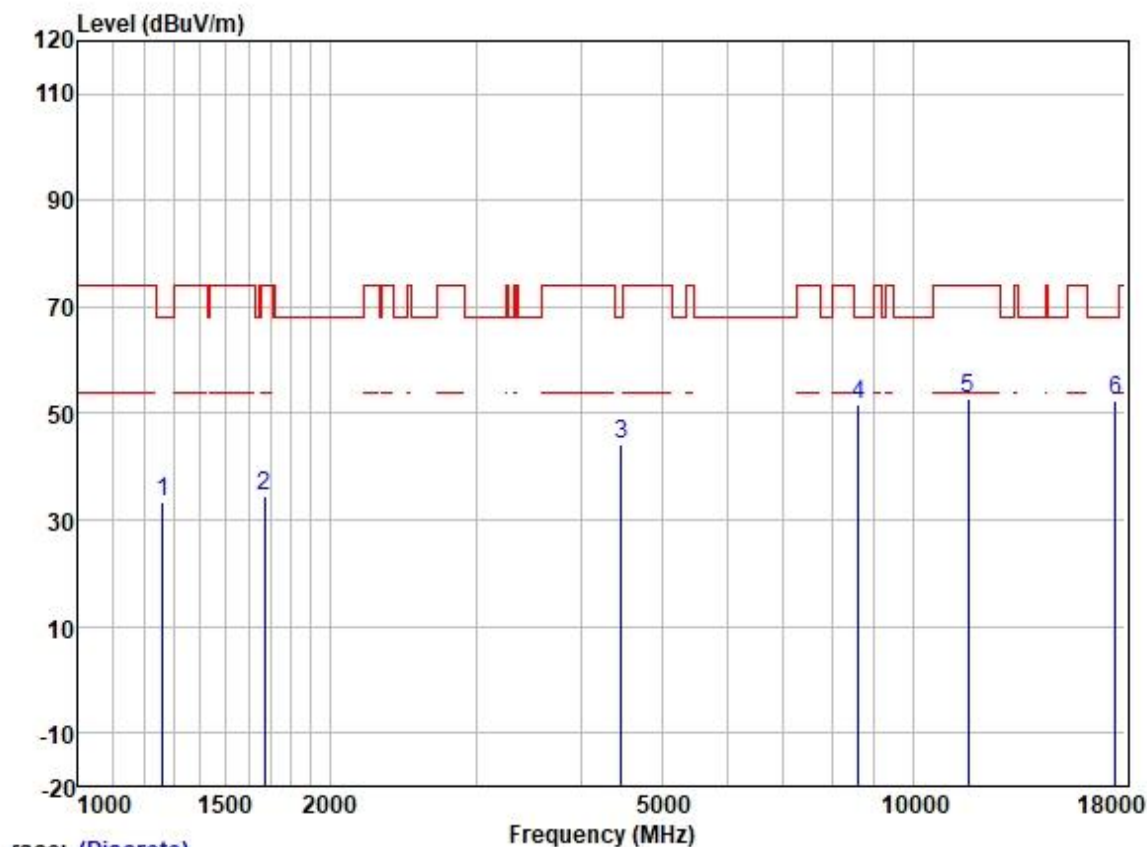

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1263.796	44.05	25.08	2.42	38.33	33.22	68.20	-34.98	VERTICAL	Peak
2	1672.779	43.77	25.67	2.80	37.91	34.33	74.00	-39.67	VERTICAL	Peak
3	4469.214	45.21	30.77	4.93	36.81	44.10	68.20	-24.10	VERTICAL	Peak
4	8613.468	45.28	37.24	6.88	37.56	51.84	68.20	-16.36	VERTICAL	Peak
5	11650.000	42.05	39.65	8.35	37.13	52.92	74.00	-21.08	VERTICAL	Peak
6	17475.000	33.12	43.90	10.77	35.32	52.47	68.20	-15.73	VERTICAL	Peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

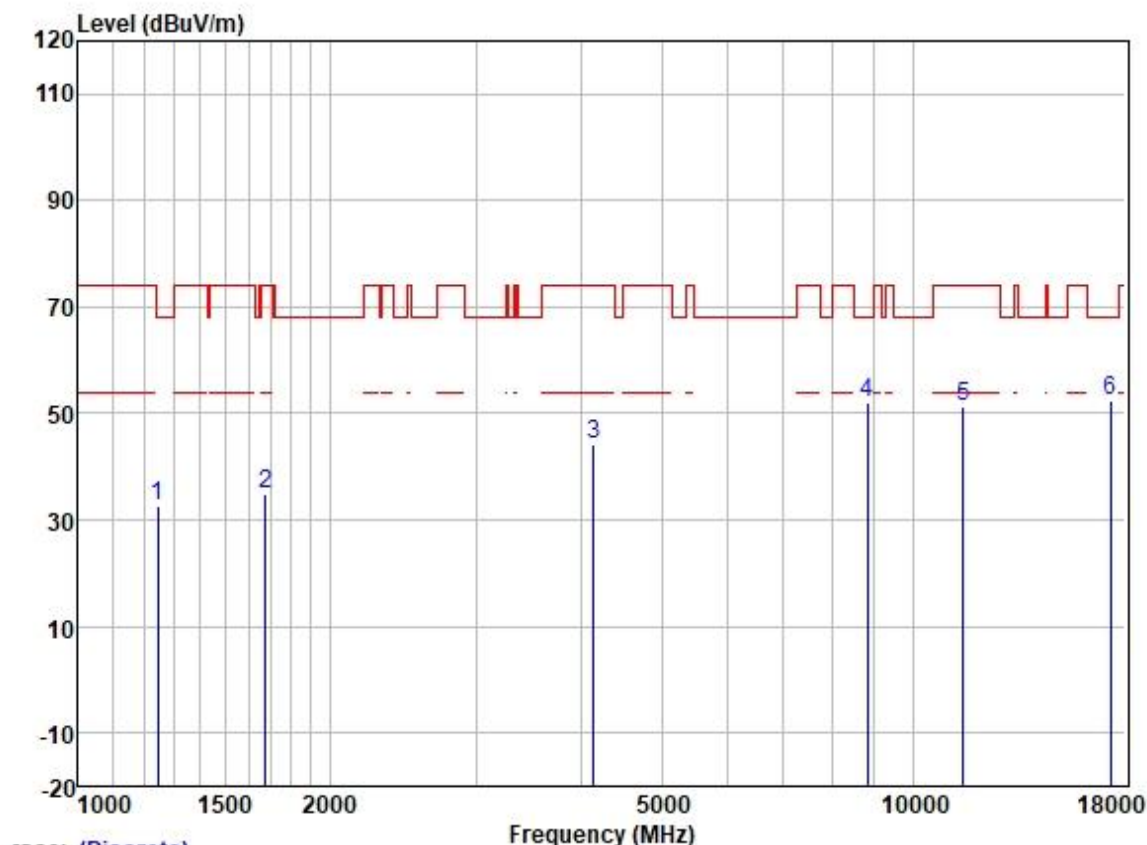


Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
		dBuV	dB/m	dB	dB			dB		
1	1245.663	43.65	25.00	2.33	38.35	32.63	68.20	-35.57	HORIZONTAL	Peak
2	1677.621	44.23	25.68	2.80	37.91	34.80	74.00	-39.20	HORIZONTAL	Peak
3	4145.664	46.54	30.03	4.60	36.80	44.37	74.00	-29.63	HORIZONTAL	Peak
4	8814.957	44.77	37.34	7.29	37.53	51.87	68.20	-16.33	HORIZONTAL	Peak
5	11510.000	40.33	39.90	8.41	37.15	51.49	74.00	-22.51	HORIZONTAL	Peak
6	17265.000	34.15	43.21	10.24	35.33	52.27	68.20	-15.93	HORIZONTAL	Peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

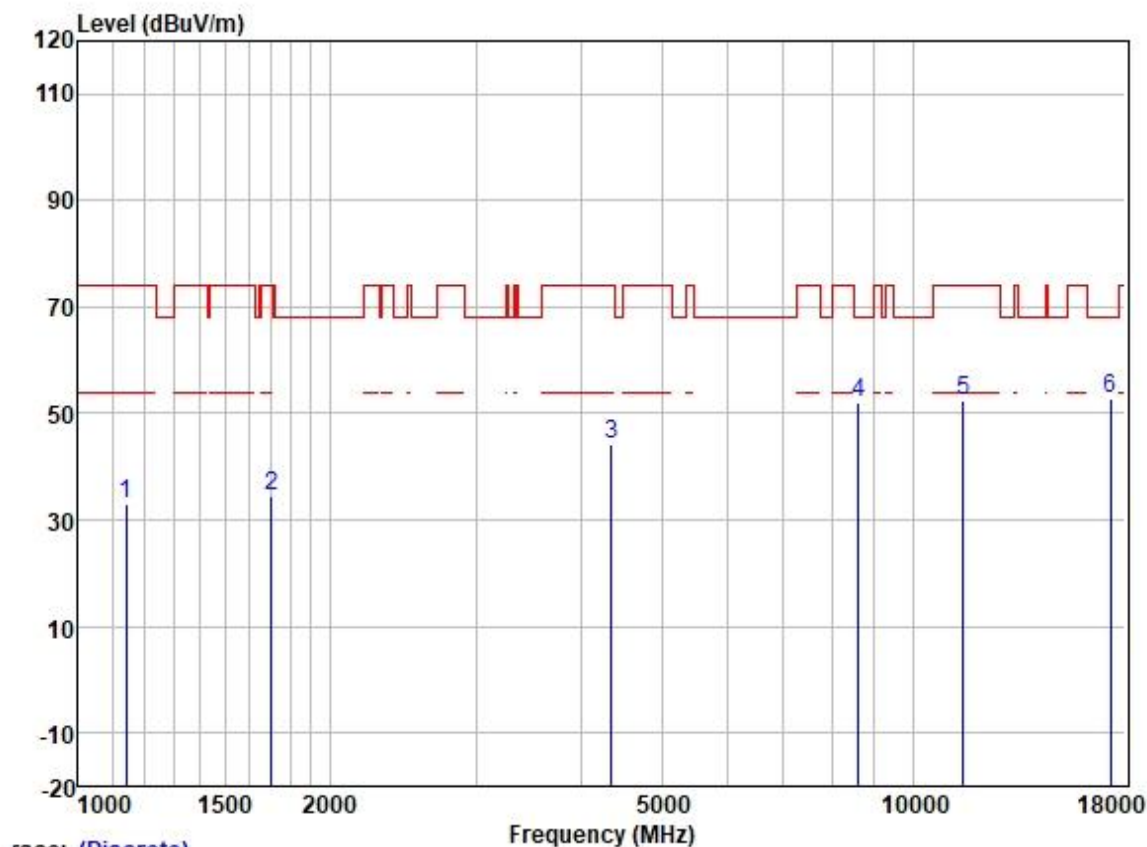


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1142.201	44.82	24.47	2.30	38.42	33.17	74.00	-40.83	VERTICAL	Peak
2	1702.042	43.91	25.72	2.80	37.89	34.54	74.00	-39.46	VERTICAL	Peak
3	4354.454	45.63	30.59	4.68	36.81	44.09	74.00	-29.91	VERTICAL	Peak
4	8613.468	45.31	37.24	6.88	37.56	51.87	68.20	-16.33	VERTICAL	Peak
5	11510.000	41.44	39.90	8.41	37.15	52.60	74.00	-21.40	VERTICAL	Peak
6	17265.000	34.54	43.21	10.24	35.33	52.66	68.20	-15.54	VERTICAL	Peak




Test Mode: 21; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:High

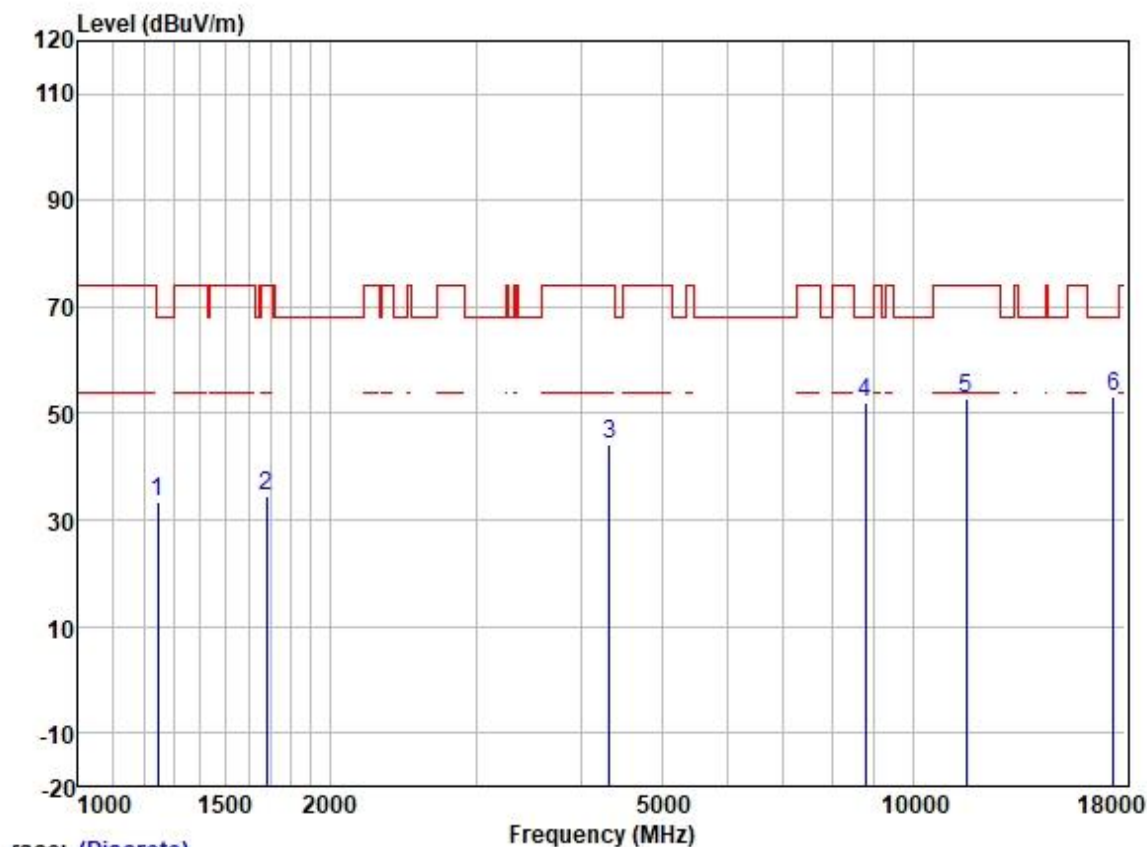

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit		
		dBuV	dB/m	dB	dB			dB		
1	1245.663	44.50	25.00	2.33	38.35	33.48	68.20	-34.72	HORIZONTAL	Peak
2	1682.477	43.85	25.68	2.80	37.91	34.42	74.00	-39.58	HORIZONTAL	Peak
3	4329.354	45.67	30.54	4.67	36.81	44.07	74.00	-29.93	HORIZONTAL	Peak
4	8764.146	45.10	37.32	7.19	37.54	52.07	68.20	-16.13	HORIZONTAL	Peak
5	11590.000	41.91	39.72	8.37	37.14	52.86	74.00	-21.14	HORIZONTAL	Peak
6	17385.000	34.21	43.57	10.53	35.32	52.99	68.20	-15.21	HORIZONTAL	Peak




Test Mode: 21; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:High

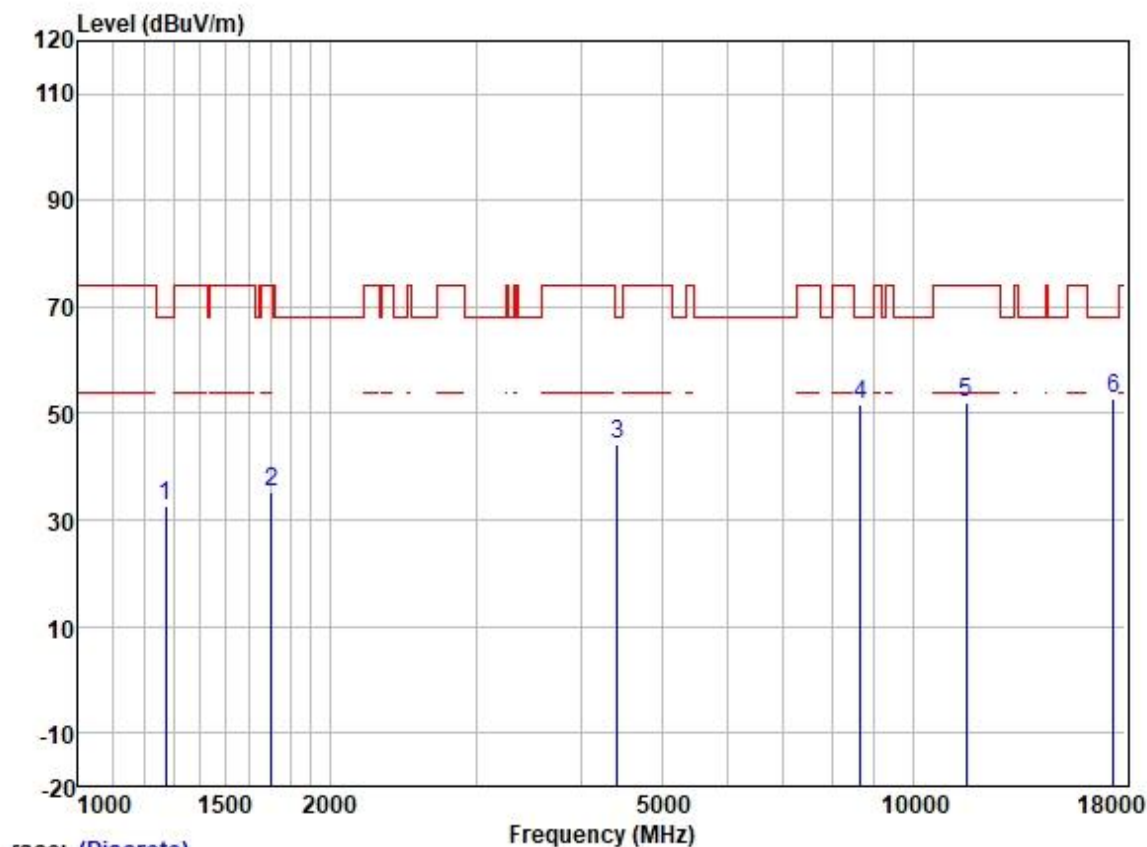

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1271.123	43.54	25.11	2.46	38.33	32.78	68.20	-35.42	VERTICAL	Peak
2	1702.042	44.52	25.72	2.80	37.89	35.15	74.00	-38.85	VERTICAL	Peak
3	4430.628	45.53	30.72	4.78	36.81	44.22	68.20	-23.98	VERTICAL	Peak
4	8663.404	45.05	37.27	6.97	37.55	51.74	68.20	-16.46	VERTICAL	Peak
5	11590.000	41.28	39.72	8.37	37.14	52.23	74.00	-21.77	VERTICAL	Peak
6	17385.000	33.84	43.57	10.53	35.32	52.62	68.20	-15.58	VERTICAL	Peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:80MHz; Channel:middle

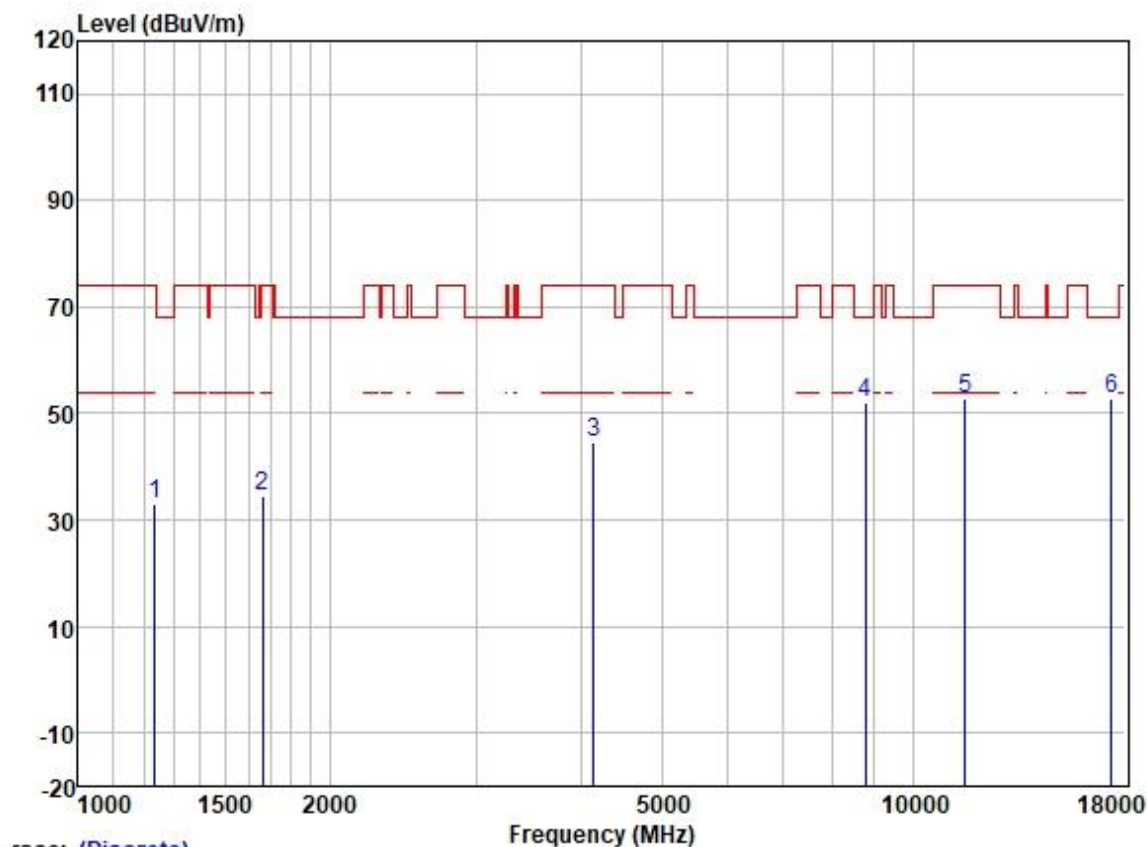

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1234.909	44.11	24.93	2.30	38.37	32.97	74.00	-41.03	HORIZONTAL	Peak
2	1663.137	44.11	25.65	2.80	37.91	34.65	74.00	-39.35	HORIZONTAL	Peak
3	4145.664	46.73	30.03	4.60	36.80	44.56	74.00	-29.44	HORIZONTAL	Peak
4	8764.146	45.01	37.32	7.19	37.54	51.98	68.20	-16.22	HORIZONTAL	Peak
5	11550.000	41.56	39.84	8.40	37.14	52.66	74.00	-21.34	HORIZONTAL	Peak
6	17325.000	34.38	43.40	10.39	35.32	52.85	68.20	-15.35	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 21; Polarity: Vertical; Modulation:802.11ax; Bandwidth:80MHz; Channel:middle

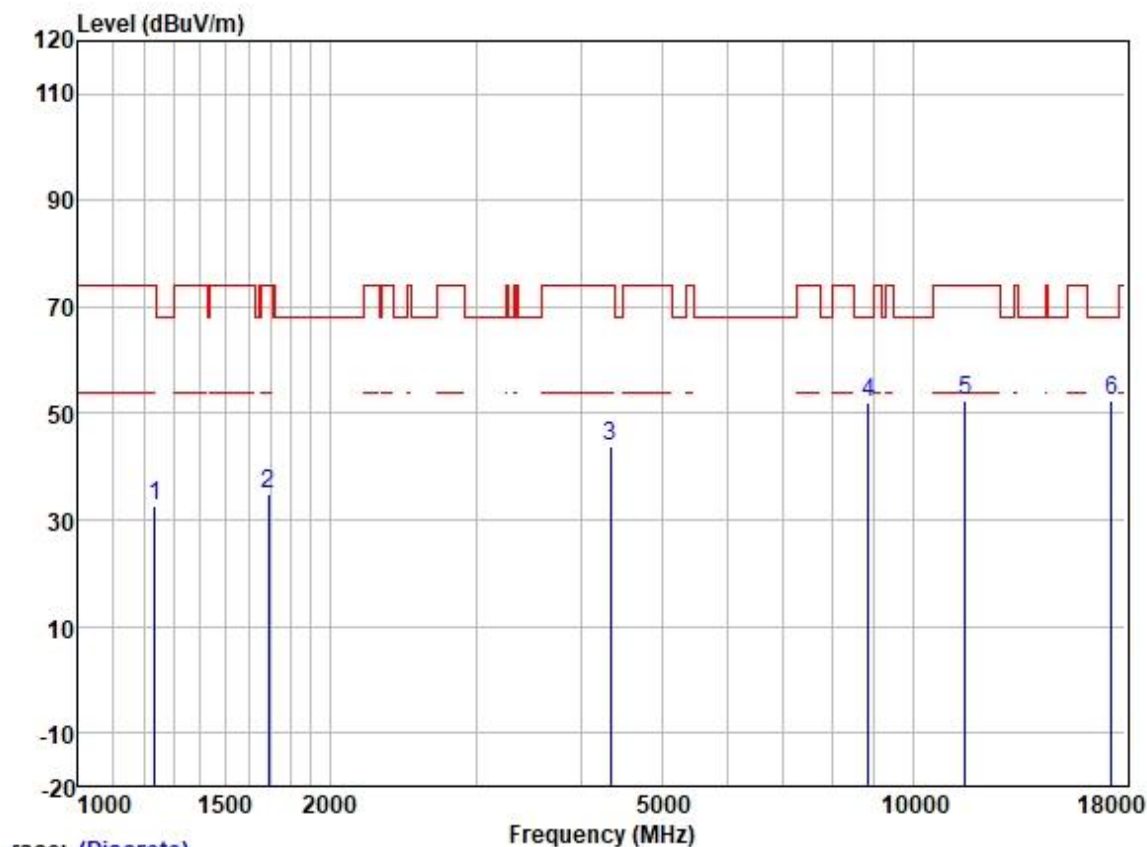

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1234.909	43.68	24.93	2.30	38.37	32.54	74.00	-41.46	VERTICAL	Peak
2	1692.231	44.17	25.70	2.80	37.89	34.78	74.00	-39.22	VERTICAL	Peak
3	4341.886	45.43	30.57	4.67	36.81	43.86	74.00	-30.14	VERTICAL	Peak
4	8840.473	44.78	37.35	7.34	37.53	51.94	68.20	-16.26	VERTICAL	Peak
5	11550.000	41.35	39.84	8.40	37.14	52.45	74.00	-21.55	VERTICAL	Peak
6	17325.000	33.85	43.40	10.39	35.32	52.32	68.20	-15.88	VERTICAL	Peak



8 Test Setup Photo

Refer to Appendix - Test Setup Photo for GZCR2204000437AT

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for GZCR2204000437AT

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com