

TEST REPORT

Application No.: GZCR2205000598AT
Applicant: DT Research, Inc.
Address of Applicant: 3RD FL NO 36 WUQUAN 7TH RD WUGU DISTRICT, NEW TAIPEI, Taiwan
Manufacturer: DT Research, Inc.
Address of Manufacturer: 2000 Concourse Drive, San Jose, CA 95131, USA
Factory: DT Research, Inc. Taiwan Branch
Address of Factory: 6F., No.36 Wuquan 7 th Rd., Wugu Dist. New Taipei City 248 Taiwan
Equipment Under Test (EUT):
EUT Name: Mobile Tablet
Model No.: 313T/MD, 313xxxxx(x= 0-9, A-Z, - or null, or ., or /) ♣
 ♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.

Trade Mark:



FCC ID: YE3600-AX210NG
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2022-05-16
Date of Test: 2022-05-17 to 2022-05-30
Date of Issue: 2022-06-08

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Kobe Jian
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kazhu Road, Solentech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
 Guangzhou Branch EMC Laboratory. 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2022-06-08		Original

Authorized for issue by				
				
		Curry Wu/Project Engineer		
				
		Ricky Liu/Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions (Below 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions (Above 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

Remark:

Model No.: 313T/MD, 313xxxx(x= 0-9, A-Z, - or null, or ., or /)

Only the model 313T/MD was tested, since according to the declaration from the applicant, the electrical circuit design, layout, components used, internal wiring and functions were identical for all the above models, with only difference on model No..

This report is prepared for FCC class II permissive change.

The modular approval by TCB, FCC ID:YE3600-AX210NG, Granted on 05/06/2022.

The module installed into host platform mentioned above is electronically and mechanically identical to the original certified module. The Original FCC testing on module under FCC ID: PD9AX210NG was performed with an antenna of higher gain, and the antenna was connected to the module in an open environment. The current host platform under application is used a new antenna of the same type and higher gain than the original certified module. Also, the band above 6GHz(5925-7125MHz) is blocked by the software for the module, and it is installed inside the host platform enclosure.

Therefore in this report Conducted Emissions at AC Power Line (150kHz-30MHz), Radiated Emissions which fall in the restricted bands and Radiated Spurious Emissions were fully retested on model 313T/MD and shown the data in this report.

3 Contents

	Page
1 Cover Page	1
2 Test Summary.....	3
3 Contents	5
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units.....	7
4.3 Measurement Uncertainty	7
4.4 Test Location	7
4.5 Test Facility.....	8
4.6 Deviation from Standards.....	8
4.7 Abnormalities from Standard Conditions.....	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement.....	11
6.1 Antenna Requirement	11
6.1.1 Test Requirement:	11
6.1.2 Conclusion	11
7 Radio Spectrum Matter Test Results.....	12
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	12
7.1.1 E.U.T. Operation.....	12
7.1.2 Test Mode Description	12
7.1.3 Test Setup Diagram	13
7.1.4 Measurement Procedure and Data.....	13
7.2 Radiated Emissions which fall in the restricted bands	16
7.2.1 E.U.T. Operation.....	16
7.2.2 Test Mode Description	16
7.2.3 Test Setup Diagram	17
7.2.4 Measurement Procedure and Data.....	18
7.3 Radiated Spurious Emissions (Below 1GHz)	67
7.3.1 E.U.T. Operation.....	67
7.3.2 Test Mode Description	67
7.3.3 Test Setup Diagram	68
7.3.4 Measurement Procedure and Data.....	69
7.4 Radiated Spurious Emissions (Above 1GHz).....	72
7.4.1 E.U.T. Operation.....	72
7.4.2 Test Mode Description	72
7.4.3 Test Setup Diagram	73
7.4.4 Measurement Procedure and Data.....	74
8 Test Setup Photo	135
9 EUT Constructional Details (EUT Photos).....	135



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:

Medical AC Adapter1

Model: EM10681V

AC Input: AC 100-240V, 2.0-1.0A, 50-60Hz

Output: DC 19V, 3.78A, 72W

Medical AC Adapter2

Model: EM11011M-190

AC Input: AC 100-240V, 2.0-1.0A, 50-60Hz

Output: DC 19.0V, 6.31A, 120.0W

Rechargeable Lithium-Ion Polymer Battery

Model: ACC-006-60K(3ICP9/36/115)

Rated Capacity: 5400mAh

Voltage: DC 11.4V

Watt-Hour: 61.56Wh

Max Charge Voltage: 13.05V

Wall Mount Cradle1: ACC-008-113MD(with R1.1 PCBA)

Wall Mount Cradle2: ACC-008-113MD(with R1.2 PCBA)

Desktop Cradle: ACC-008-72HMD

Keyboard Cradle: ACC-KB13TS-M1

Test Voltage:

AC 120V, 60Hz

Note: Both nominal AC 120V, 60Hz and AC 240 V, 60Hz are required for testing in accordance with FCC KDB174176, this report only shows the results of the worst test result(AC 120V, 60Hz);

Cable(s):

DC cable: 180cm with a ferrite core

Operation Frequency:

802.11b/g/n/ax(HT20): 2412MHz to 2472MHz

802.11n/ax(HT40): 2422MHz to 2462MHz

802.11b: DSSS(CCK, DQPSK, DBPSK)

Modulation Type:

802.11g/n: OFDM(QPSK, BPSK, 16QAM, 64QAM)

802.11ax: OFDMA(QPSK, BPSK, 16QAM, 64QAM, 256QAM, 1024QAM)

Channel Numbers:

802.11b/g/n/ax HT20: 13 Channels

802.11n/ax HT40: 9 Channels

Antenna Type:

PIFA Antenna

Antenna Gain:

Antenna1: 1.8dBi, Antenna2: 2.5dBi

Note: MIMO for 802.11n/ax.



Channel list for 802.11b/g/n/ax(HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	5	2432MHz	9	2452MHz	13	2472MHz
2	2417MHz	6	2437MHz	10	2457MHz		
3	2422MHz	7	2442MHz	11	2462MHz		
4	2427MHz	8	2447MHz	12	2467MHz		

Channel list for 802.11n/ax(HT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz
4	2427MHz	7	2442MHz	10	2457MHz
5	2432MHz	8	2447MHz	11	2462MHz

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	±2.76dB
Radiated Emissions which fall in the restricted bands	±5.00dB (30MHz-1GHz; 3m); ± 5.12dB (1GHz-6GHz); ± 5.38dB (6GHz-18GHz); ± 5.61dB (18GHz-40GHz)
Radiated Spurious Emissions (Below 1GHz)	±5.00dB (30MHz-1GHz; 3m); ±4.38dB (30MHz-1GHz; 10m);
Radiated Spurious Emissions (Above 1GHz)	± 5.12dB (1GHz-6GHz); ± 5.38dB (6GHz-18GHz); ± 5.61dB (18GHz-40GHz)

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555

Fax: +86 20 82075059

No tests were sub-contracted.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch EMC Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ChangZhou ZhongYu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Network	Rohde & Schwarz	ENV216	EMC0118	2021-12-23	2022-12-22
Two-Line V-Network-GZ	Rohde & Schwarz	ENV216	EMC2135	2021-09-24	2022-09-23
Coaxial Cable	HangTianXing	2m	EMC0107	2020-09-09	2022-09-08
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A
EMI Test Receiver(9kHz-3.6GHz)	Rohde & Schwarz	ESR3	EMC2221	2021-06-01	2022-05-31

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver (20Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-12-17	2022-12-16
Chamber cable(Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020-09-09	2022-09-08
Horn Antenna(1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-12-17	2022-12-16
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2021-12-17	2022-12-16
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
MXE EMI Receiver (10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2021-11-01	2022-10-31
EXA Signal Analyzer(10Hz-44GHz)	Keysight	N9010A	EMC2138	2021-09-16	2022-09-15
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2021-07-29	2022-07-28
Horn Antenna(14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2021-08-30	2022-08-29

Radiated Spurious Emissions Below 1GHz					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver (10Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-12-17	2022-12-16
Chamber cable	HangTianXing	N/A	EMC0542	2020-09-09	2022-09-08



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Trilog Broadband Antenna (25MHz-1GHz)- Lab	SCHWARZBECK MESS-ELEKTRONIK	VULB 9168	SEM003-18	2022-03-03	2025-03-02
Amplifier(9kHz-1.3GHz)	HP	8447F	EMC2065	2021-05-19	2022-05-18
High Pass Filter (915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2021-12-17	2022-12-16
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2019-10-20	2022-10-19
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Active Loop Antenna	Fischer Custom Communications Inc.	F-1000-4-8- 9/10-L-1M	EMC0704	2022-04-01	2025-03-31

Radiated Spurious Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver (20Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-12-17	2022-12-16
Chamber cable(Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020-09-09	2022-09-08
Horn Antenna(1GHz- 18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-12-17	2022-12-16
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2021-12-17	2022-12-16
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
MXE EMI Receiver (10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2021-11-01	2022-10-31
EXA Signal Analyzer (10Hz-44GHz)	Keysight	N9010A	EMC2138	2021-09-16	2022-09-15
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2021-07-29	2022-07-28
Horn Antenna(14- 40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2021-08-30	2022-08-29

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2021-07-05	2022-07-05
DMM	Fluke	73	EMC0007	2021-07-05	2022-07-05



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.198 Kazhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

15.203 Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of 15.211, 15.213, 15.217, 15.219, 15.221, or 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna connector is a IPEX type that comply with Part15.203, the best case gain of the antenna1 is 1.8dBi, antenna2 is 2.5dBi.

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 21.5 °C

Humidity: 48.4 % RH

Atmospheric Pressure: 1015 mbar


7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
--------------------------	--------------	-------------

Final test	16	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter1).
------------	----	---

Pre-scan	31	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter2).
----------	----	---

7.1.3 Test Setup Diagram

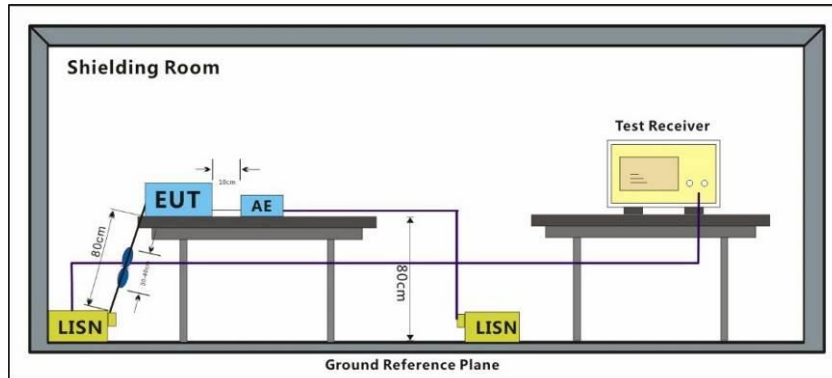


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 50\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: $\text{LISN} = \text{Read Level} + \text{Cable Loss} + \text{LISN Factor}$


Test Mode: 16; Line: Live line

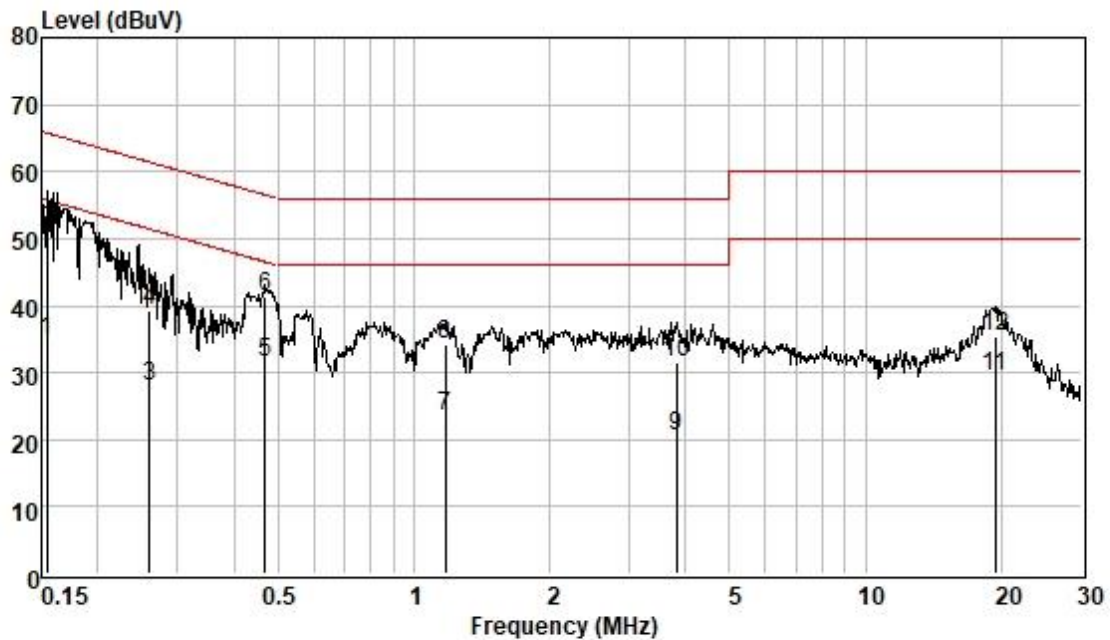

Pol : LINE
Mode :
Model :

	Freque	Read	Cable	LISN	Measured	Limit	Over	Remark
	nc	Level	Loss	Factor	Level	Line	Limit	
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.154	25.05	0.06	9.54	34.65	55.78	-21.13	Average
2	0.154	41.41	0.06	9.54	51.01	65.78	-14.77	QP
3	0.260	18.47	0.06	9.57	28.10	51.42	-23.32	Average
4	0.260	29.68	0.06	9.57	39.31	61.42	-22.11	QP
5	0.469	21.84	0.07	9.59	31.50	46.54	-15.04	Average
6	0.469	31.57	0.07	9.59	41.23	56.54	-15.31	QP
7	1.172	13.95	0.08	9.60	23.63	46.00	-22.37	Average
8	1.172	24.40	0.08	9.60	34.08	56.00	-21.92	QP
9	3.820	10.81	0.16	9.64	20.61	46.00	-25.39	Average
10	3.820	21.72	0.16	9.64	31.52	56.00	-24.48	QP
11	19.326	19.33	0.36	9.84	29.53	50.00	-20.47	Average
12	19.326	25.17	0.36	9.84	35.37	60.00	-24.63	QP

Test Mode: 16; Line: Neutral Line

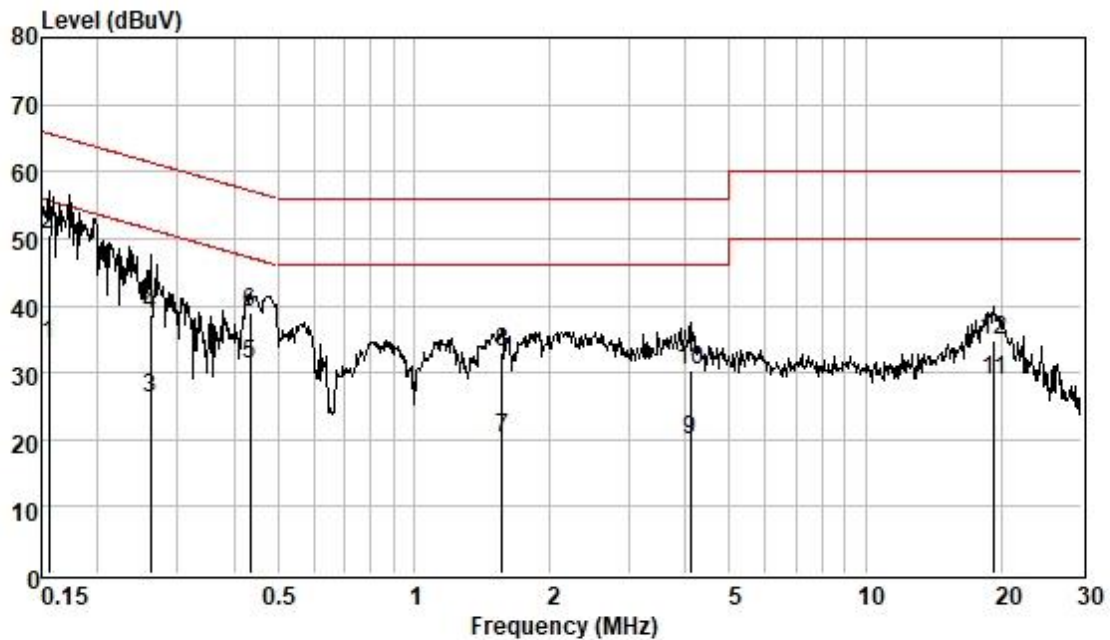Pol : NEUTRAL
Mode :
Model :

	Freque	Read	Cable	LISN	Measured	Limit	Over	Remark
	nc	Level	Loss	Factor	Level	Line	Limit	
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.156	24.70	0.06	9.53	34.29	55.69	-21.40	Average
2	0.156	41.10	0.06	9.53	50.69	65.69	-15.00	QP
3	0.262	16.69	0.06	9.56	26.31	51.38	-25.07	Average
4	0.262	29.18	0.06	9.56	38.80	61.38	-22.58	QP
5	0.435	21.50	0.06	9.58	31.14	47.15	-16.01	Average
6	0.435	29.44	0.06	9.58	39.08	57.15	-18.07	QP
7	1.568	10.58	0.10	9.59	20.27	46.00	-25.73	Average
8	1.568	23.32	0.10	9.59	33.01	56.00	-22.99	QP
9	4.092	10.22	0.17	9.63	20.02	46.00	-25.98	Average
10	4.092	20.61	0.17	9.63	30.41	56.00	-25.59	QP
11	19.224	18.57	0.36	9.89	28.82	50.00	-21.18	Average
12	19.224	24.41	0.36	9.89	34.66	60.00	-25.34	QP

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 20.2 °C

Humidity: 53.3 % RH

Atmospheric Pressure: 1015 mbar

7.2.2 Test Mode Description

Pre-scan / Mode
Final test Code Description

Pre-scan 15

TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter1).

Final test 16

Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter1).

Pre-scan 30

TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter2).

Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter2).

Pre-scan 31

7.2.3 Test Setup Diagram

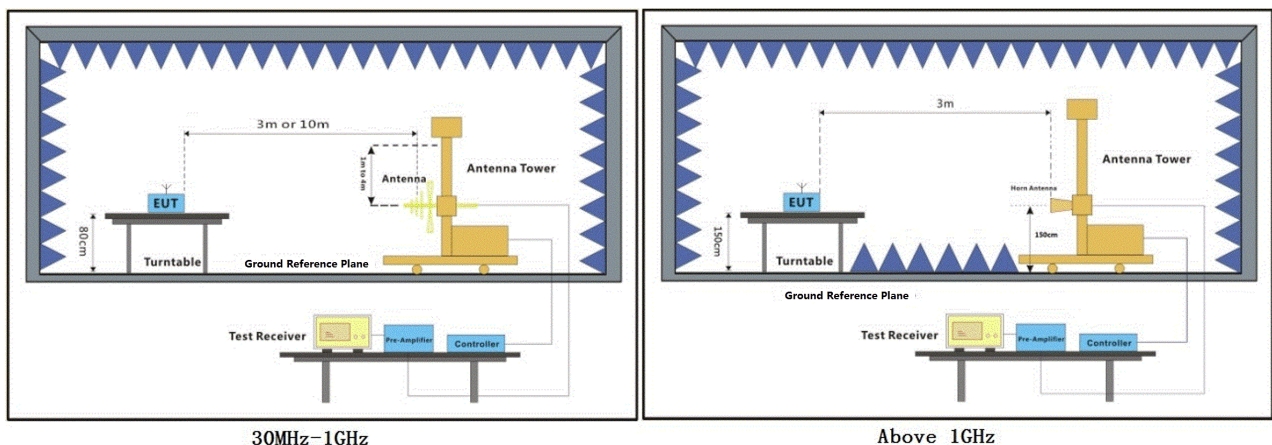

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

7.2.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Remark 3: For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the widest bandwidth which can be covered the same channel (center frequency) on modes with narrower bandwidth that have the same or lower output power for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.

Test Mode: 16; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

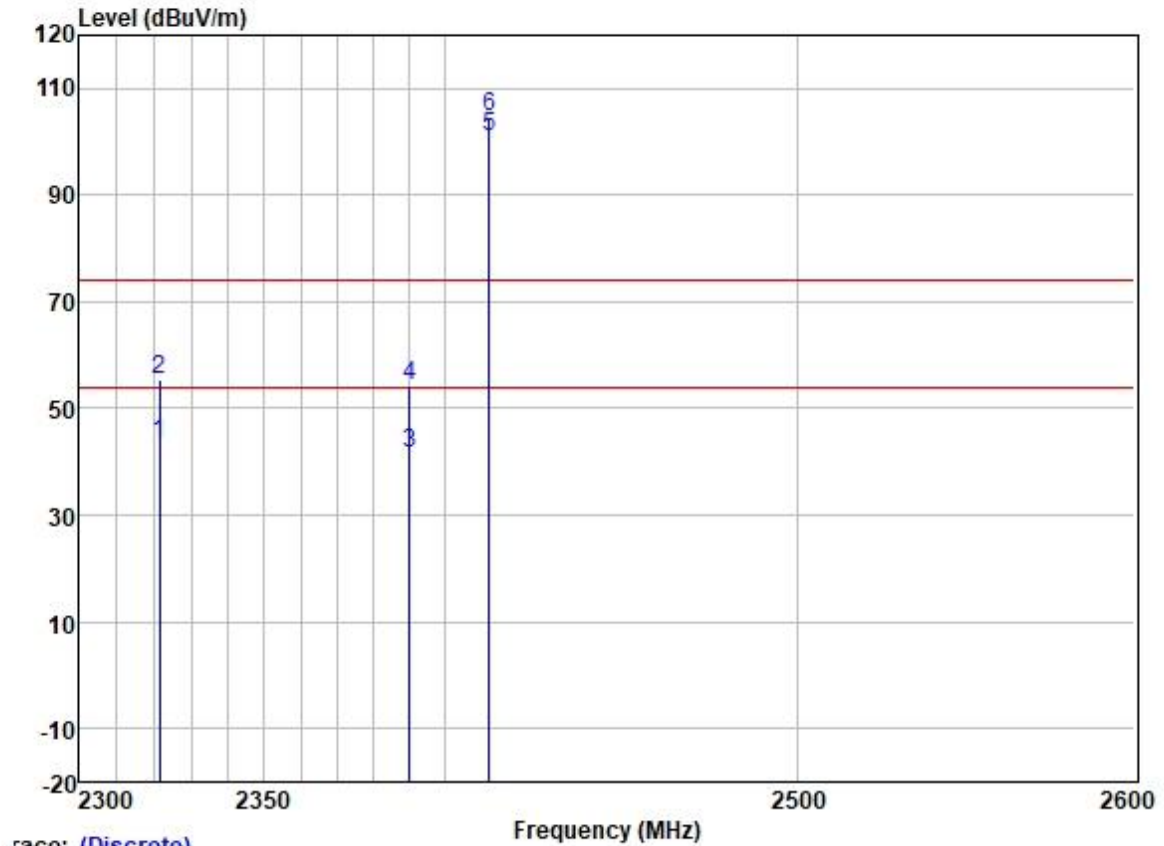


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2321.376	50.67	27.17	3.33	37.62	43.55	54.00	-10.45	HORIZONTAL	Average
2	2321.376	62.44	27.17	3.33	37.62	55.32	74.00	-18.68	HORIZONTAL	Peak
3	2390.000	48.21	27.33	3.48	37.59	41.43	54.00	-12.57	HORIZONTAL	Average
4	2390.000	61.22	27.33	3.48	37.59	54.44	74.00	-19.56	HORIZONTAL	Peak
5 *	2412.000	107.67	27.38	3.47	37.59	100.93	54.00	46.93	HORIZONTAL	Average
6 *	2412.000	111.31	27.38	3.47	37.59	104.57	74.00	30.57	HORIZONTAL	Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

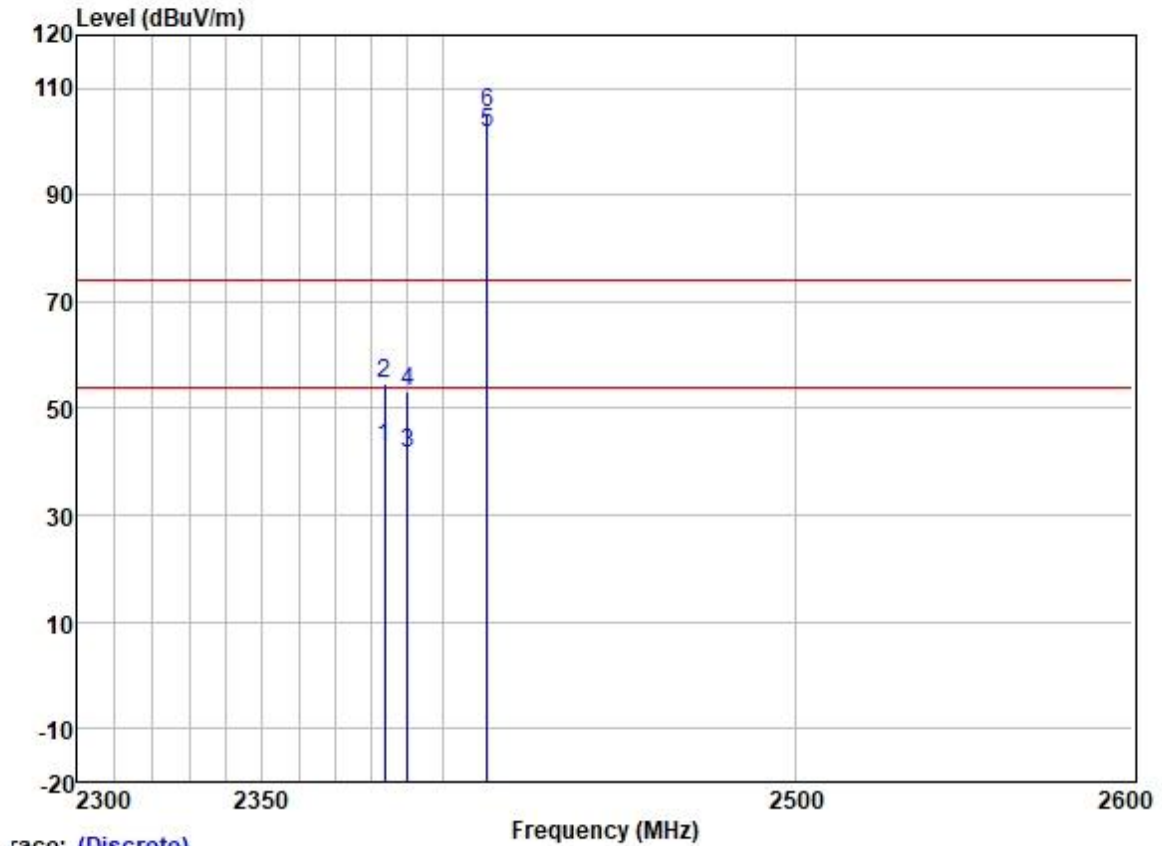


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2383.562	49.44	27.33	3.48	37.60	42.65	54.00	-11.35	VERTICAL	Average
2	2383.562	61.31	27.33	3.48	37.60	54.52	74.00	-19.48	VERTICAL	Peak
3	2390.000	48.42	27.33	3.48	37.59	41.64	54.00	-12.36	VERTICAL	Average
4	2390.000	59.91	27.33	3.48	37.59	53.13	74.00	-20.87	VERTICAL	Peak
5 *	2412.000	108.46	27.38	3.47	37.59	101.72	54.00	47.72	VERTICAL	Average
6 *	2412.000	112.34	27.38	3.47	37.59	105.60	74.00	31.60	VERTICAL	Peak

Test Mode: 16; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:11

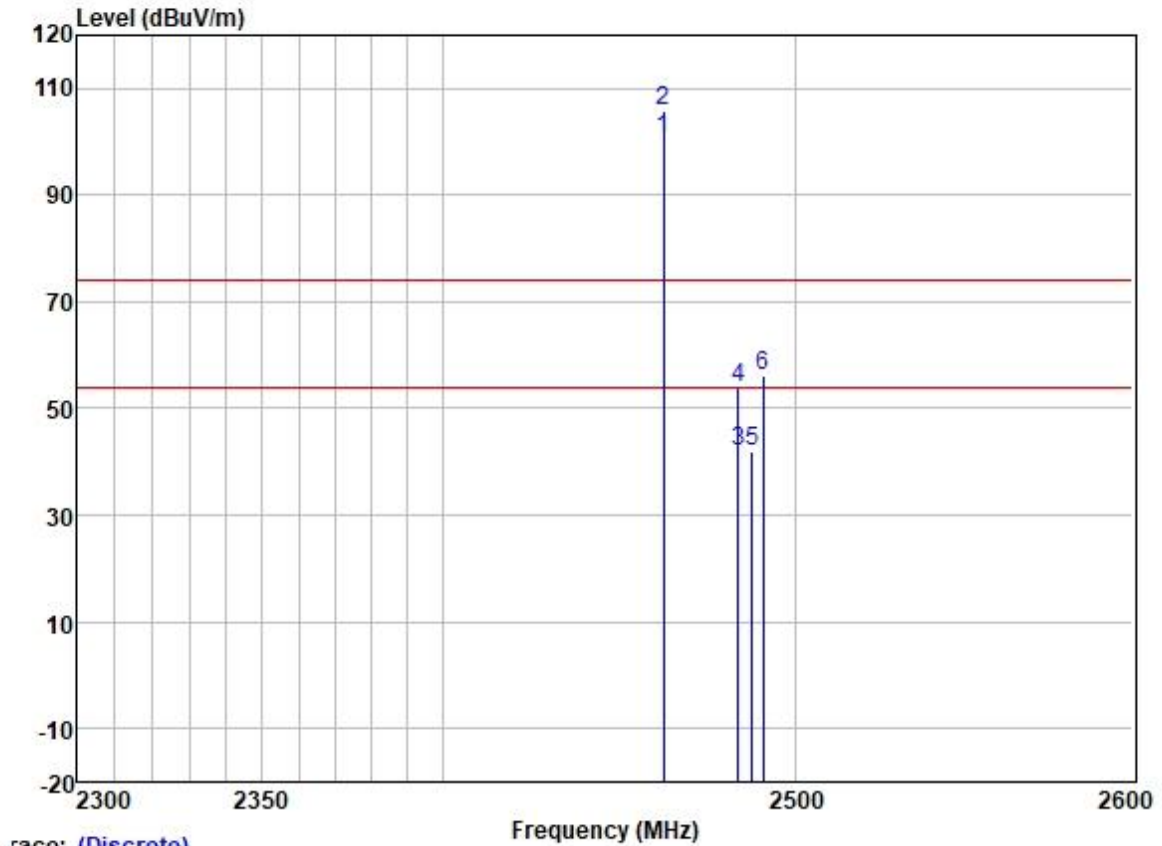


		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2462.000	107.39	27.45	3.50	37.58	100.76	54.00	46.76	HORIZONTAL Average
2	*	2462.000	112.46	27.45	3.50	37.58	105.83	74.00	31.83	HORIZONTAL Peak
3		2483.500	48.39	27.48	3.53	37.57	41.83	54.00	-12.17	HORIZONTAL Average
4		2483.500	60.40	27.48	3.53	37.57	53.84	74.00	-20.16	HORIZONTAL Peak
5		2487.455	48.70	27.48	3.53	37.57	42.14	54.00	-11.86	HORIZONTAL Average
6		2490.774	62.75	27.49	3.47	37.56	56.15	74.00	-17.85	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:11

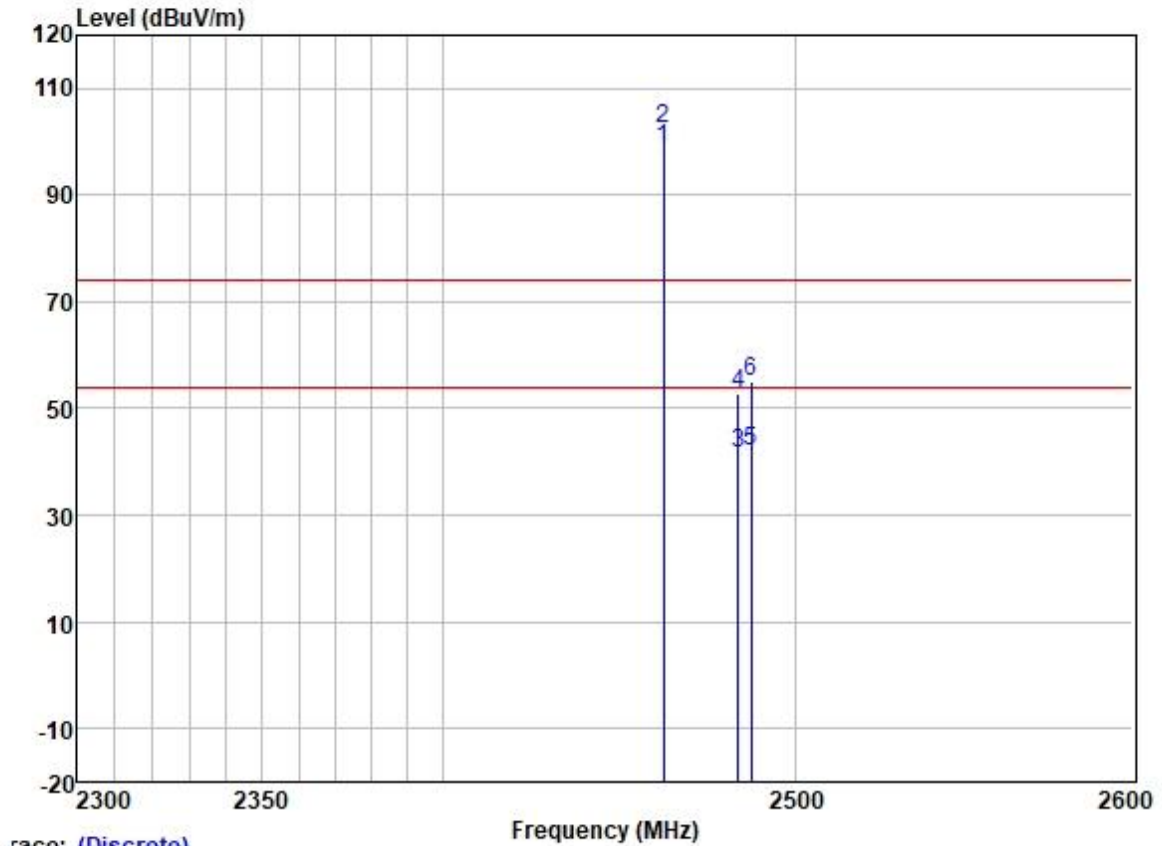

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	2462.000	105.26	27.45	3.50	37.58	98.63	54.00	44.63	VERTICAL	Average
2 *	2462.000	109.26	27.45	3.50	37.58	102.63	74.00	28.63	VERTICAL	Peak
3	2483.500	48.13	27.48	3.53	37.57	41.57	54.00	-12.43	VERTICAL	Average
4	2483.500	59.28	27.48	3.53	37.57	52.72	74.00	-21.28	VERTICAL	Peak
5	2487.104	48.39	27.48	3.53	37.57	41.83	54.00	-12.17	VERTICAL	Average
6	2487.104	61.46	27.48	3.53	37.57	54.90	74.00	-19.10	VERTICAL	Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:12

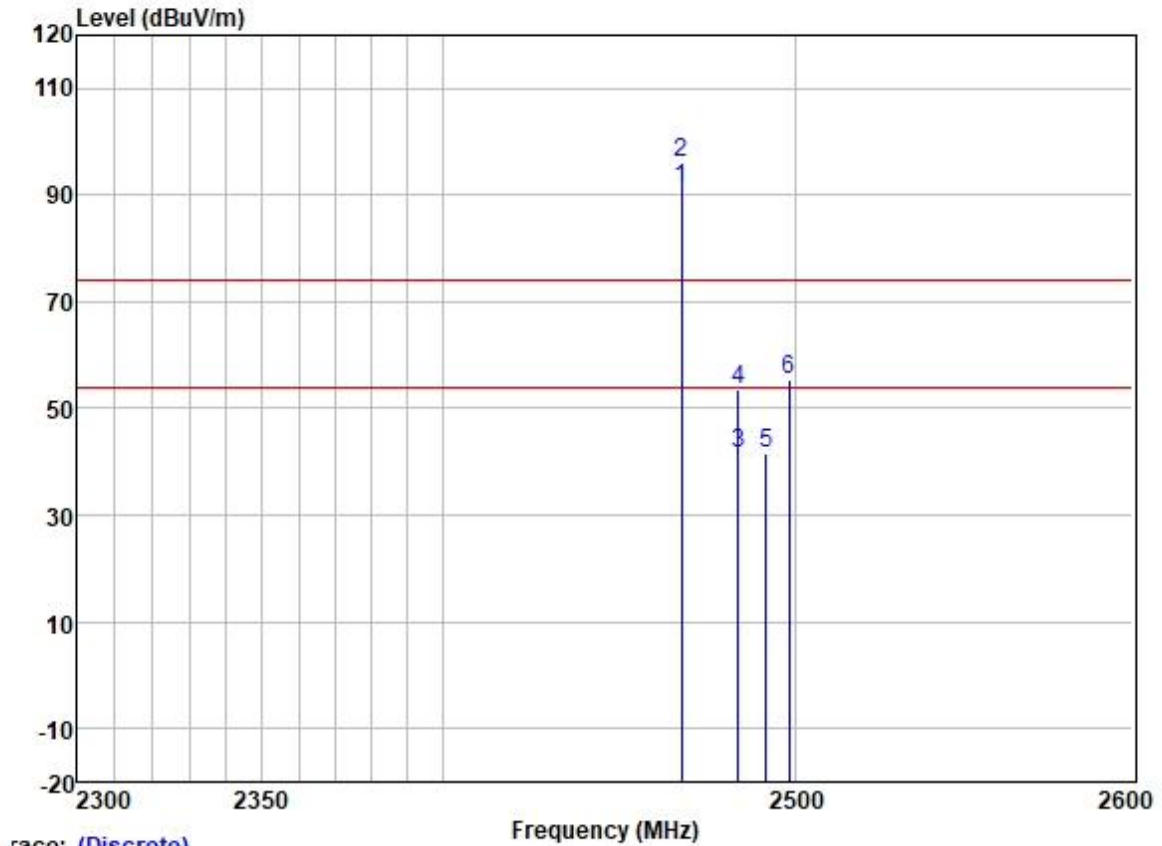

Trace: (Discrete)

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2467.000	98.04	27.45	3.50	37.57	91.42	54.00	37.42	HORIZONTAL Average
2	*	2467.000	102.88	27.45	3.50	37.57	96.26	74.00	22.26	HORIZONTAL Peak
3		2483.500	47.98	27.48	3.53	37.57	41.42	54.00	-12.58	HORIZONTAL Average
4		2483.500	60.07	27.48	3.53	37.57	53.51	74.00	-20.49	HORIZONTAL Peak
5		2491.529	48.28	27.49	3.47	37.56	41.68	54.00	-12.32	HORIZONTAL Average
6		2498.082	62.15	27.50	3.40	37.56	55.49	74.00	-18.51	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:12

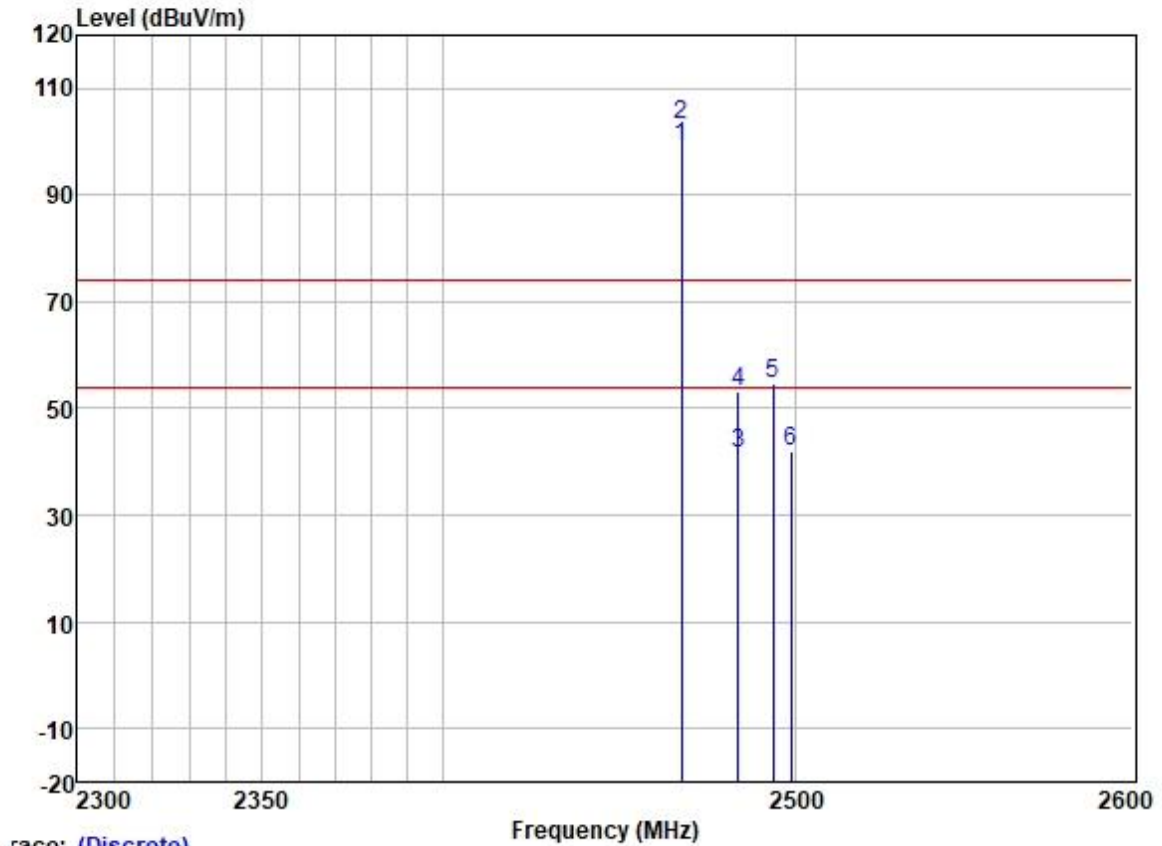

Trace: (Discrete)


		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	*	2467.000	105.75	27.45	3.50	37.57	99.13	54.00	45.13	VERTICAL	Average
2	*	2467.000	109.67	27.45	3.50	37.57	103.05	74.00	29.05	VERTICAL	Peak
3		2483.500	48.26	27.48	3.53	37.57	41.70	54.00	-12.30	VERTICAL	Average
4		2483.500	59.66	27.48	3.53	37.57	53.10	74.00	-20.90	VERTICAL	Peak
5		2493.594	61.45	27.49	3.47	37.56	54.85	74.00	-19.15	VERTICAL	Peak
6		2498.738	48.61	27.50	3.40	37.56	41.95	54.00	-12.05	VERTICAL	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 16; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:13

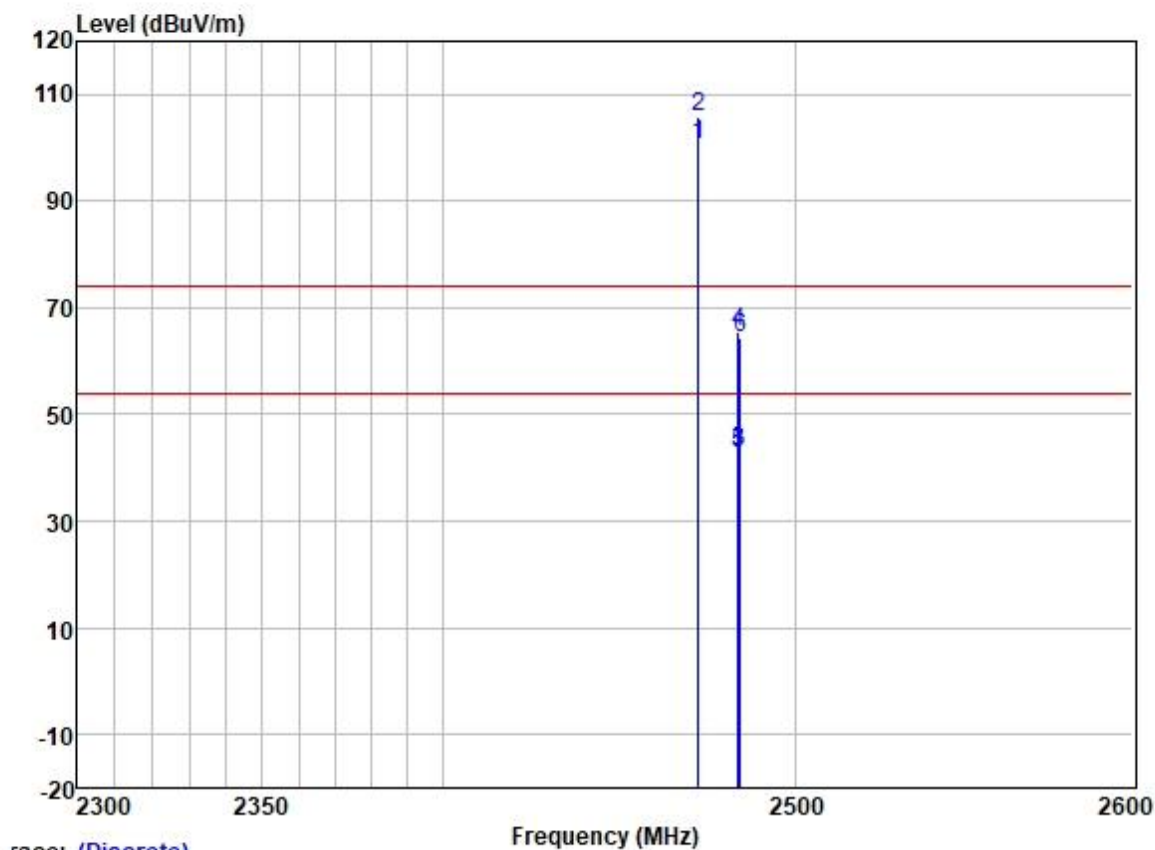

race: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	2472.000	107.24	27.46	3.55	37.57	100.68	54.00	46.68	HORIZONTAL	Average
2 *	2472.000	112.27	27.46	3.55	37.57	105.71	74.00	31.71	HORIZONTAL	Peak
3	2483.500	49.74	27.48	3.53	37.57	43.18	54.00	-10.82	HORIZONTAL	Average
4	2483.500	72.04	27.48	3.53	37.57	65.48	74.00	-8.52	HORIZONTAL	Peak
5	2483.890	49.31	27.48	3.53	37.57	42.75	54.00	-11.25	HORIZONTAL	Average
6	2484.091	71.00	27.48	3.53	37.57	64.44	74.00	-9.56	HORIZONTAL	Peak




Unless otherwise agreed in writing this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a dispute from their legal obligations. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443.

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory.

中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com


Test Mode: 16; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:13

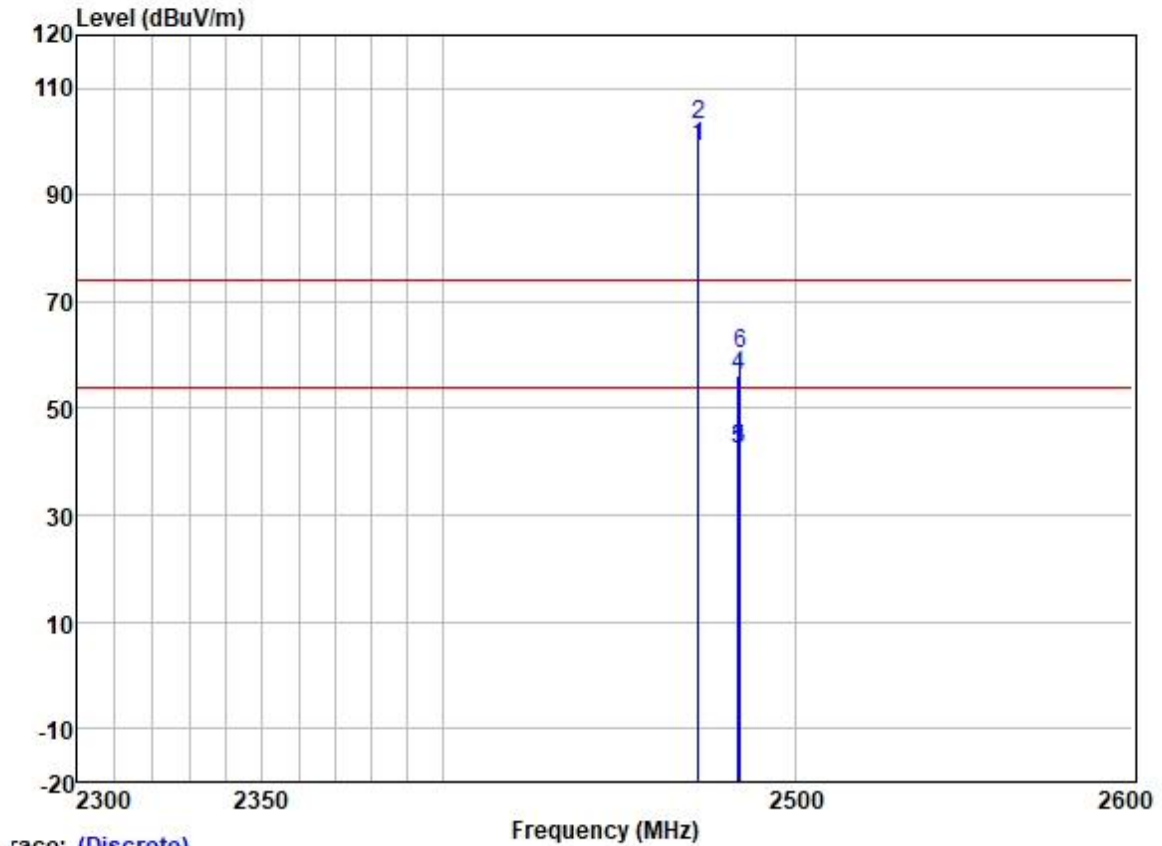

Trace: (Discrete)


		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	*	2472.000	105.82	27.46	3.55	37.57	99.26	54.00	45.26	VERTICAL	Average
2	*	2472.000	109.86	27.46	3.55	37.57	103.30	74.00	29.30	VERTICAL	Peak
3		2483.500	49.03	27.48	3.53	37.57	42.47	54.00	-11.53	VERTICAL	Average
4		2483.500	62.88	27.48	3.53	37.57	56.32	74.00	-17.68	VERTICAL	Peak
5		2483.890	48.76	27.48	3.53	37.57	42.20	54.00	-11.80	VERTICAL	Average
6		2483.990	66.89	27.48	3.53	37.57	60.33	74.00	-13.67	VERTICAL	Peak

Test Mode: 16; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

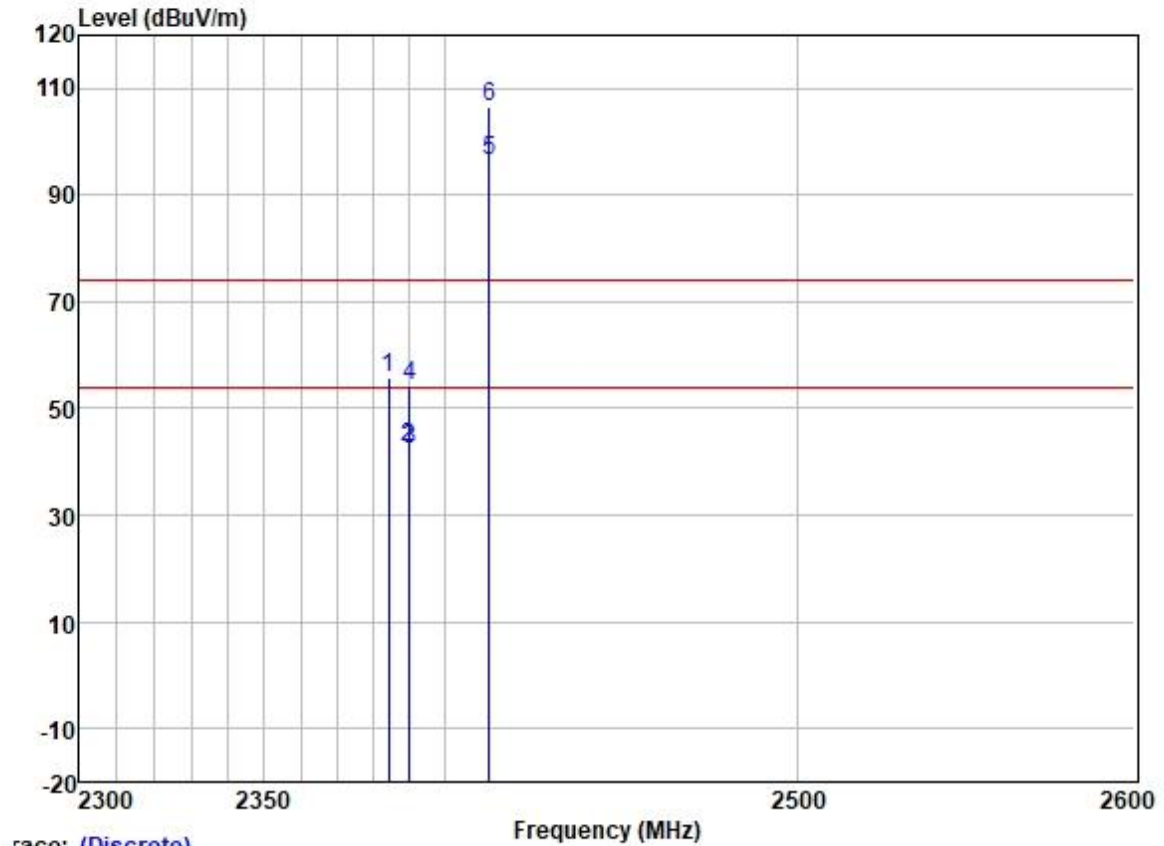

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2384.045	62.58	27.33	3.48	37.60	55.79	74.00	-18.21	HORIZONTAL	Peak
2	2389.484	49.33	27.33	3.48	37.59	42.55	54.00	-11.45	HORIZONTAL	Average
3	2390.000	49.27	27.33	3.48	37.59	42.49	54.00	-11.51	HORIZONTAL	Average
4	2390.000	61.01	27.33	3.48	37.59	54.23	74.00	-19.77	HORIZONTAL	Peak
5 *	2412.000	103.36	27.38	3.47	37.59	96.62	54.00	42.62	HORIZONTAL	Average
6 *	2412.000	113.47	27.38	3.47	37.59	106.73	74.00	32.73	HORIZONTAL	Peak


Test Mode: 16; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

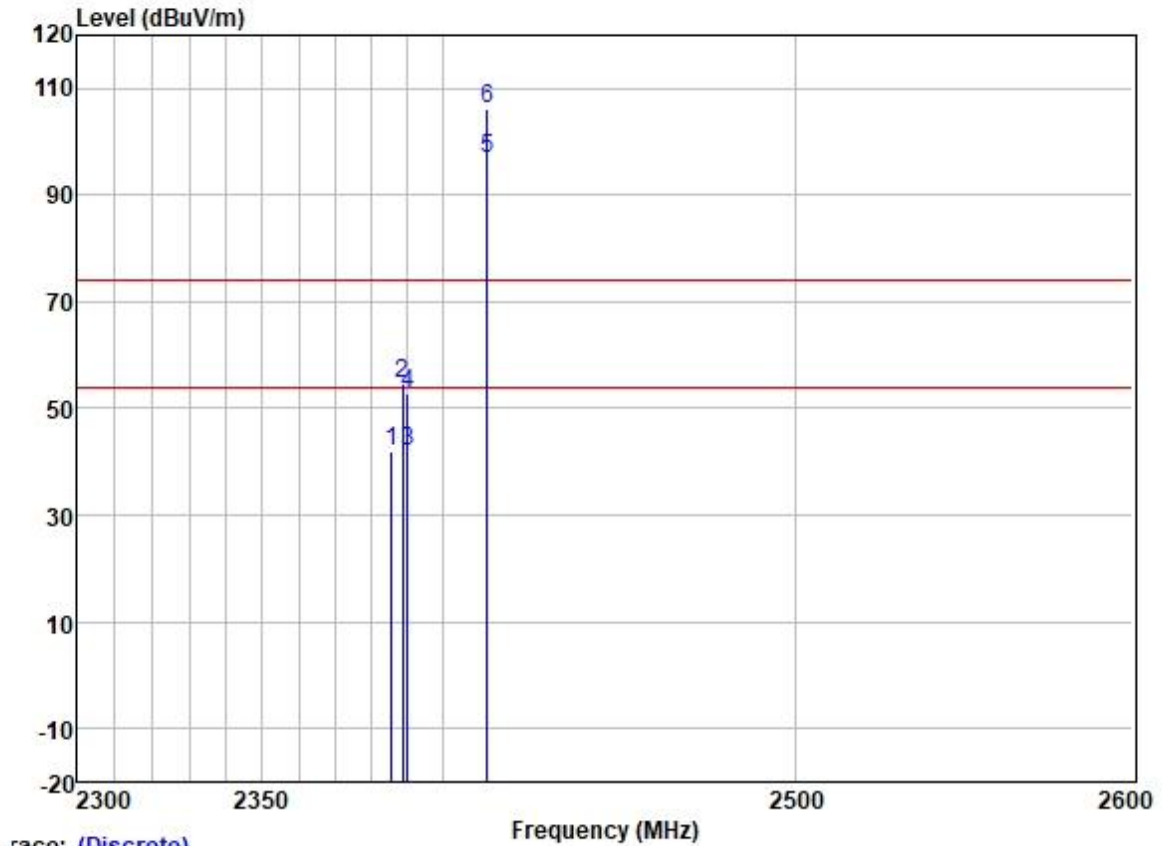

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2385.494	48.86	27.33	3.48	37.60	42.07	54.00	-11.93	VERTICAL
2	2388.516	61.43	27.33	3.48	37.59	54.65	74.00	-19.35	VERTICAL
3	2390.000	48.59	27.33	3.48	37.59	41.81	54.00	-12.19	VERTICAL
4	2390.000	59.47	27.33	3.48	37.59	52.69	74.00	-21.31	VERTICAL
5 *	2412.000	103.78	27.38	3.47	37.59	97.04	54.00	43.04	VERTICAL
6 *	2412.000	112.95	27.38	3.47	37.59	106.21	74.00	32.21	VERTICAL

Test Mode: 16; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:11

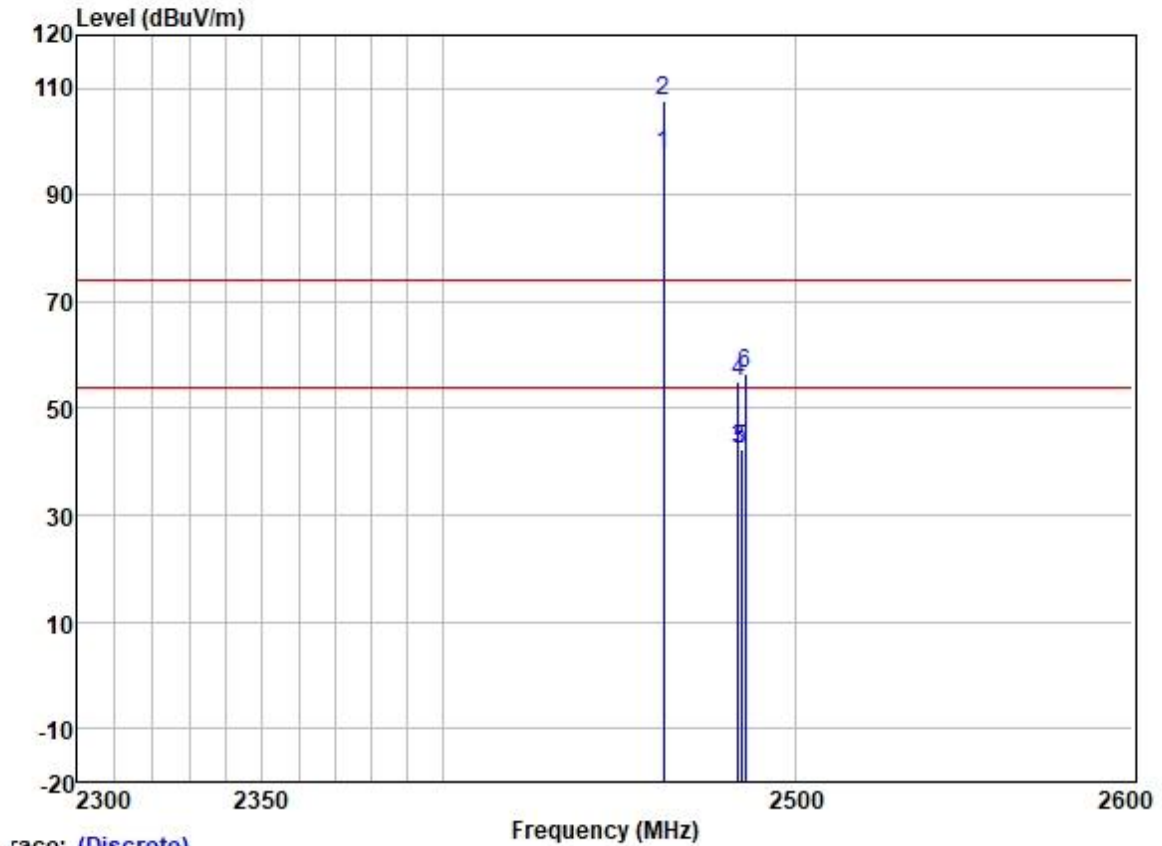

Trace: (Discrete)


		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2462.000	104.09	27.45	3.50	37.58	97.46	54.00	43.46	HORIZONTAL Average
2	*	2462.000	114.14	27.45	3.50	37.58	107.51	74.00	33.51	HORIZONTAL Peak
3		2483.500	48.80	27.48	3.53	37.57	42.24	54.00	-11.76	HORIZONTAL Average
4		2483.500	61.49	27.48	3.53	37.57	54.93	74.00	-19.07	HORIZONTAL Peak
5		2484.292	48.83	27.48	3.53	37.57	42.27	54.00	-11.73	HORIZONTAL Average
6		2485.546	63.19	27.48	3.53	37.57	56.63	74.00	-17.37	HORIZONTAL Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 16; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:11

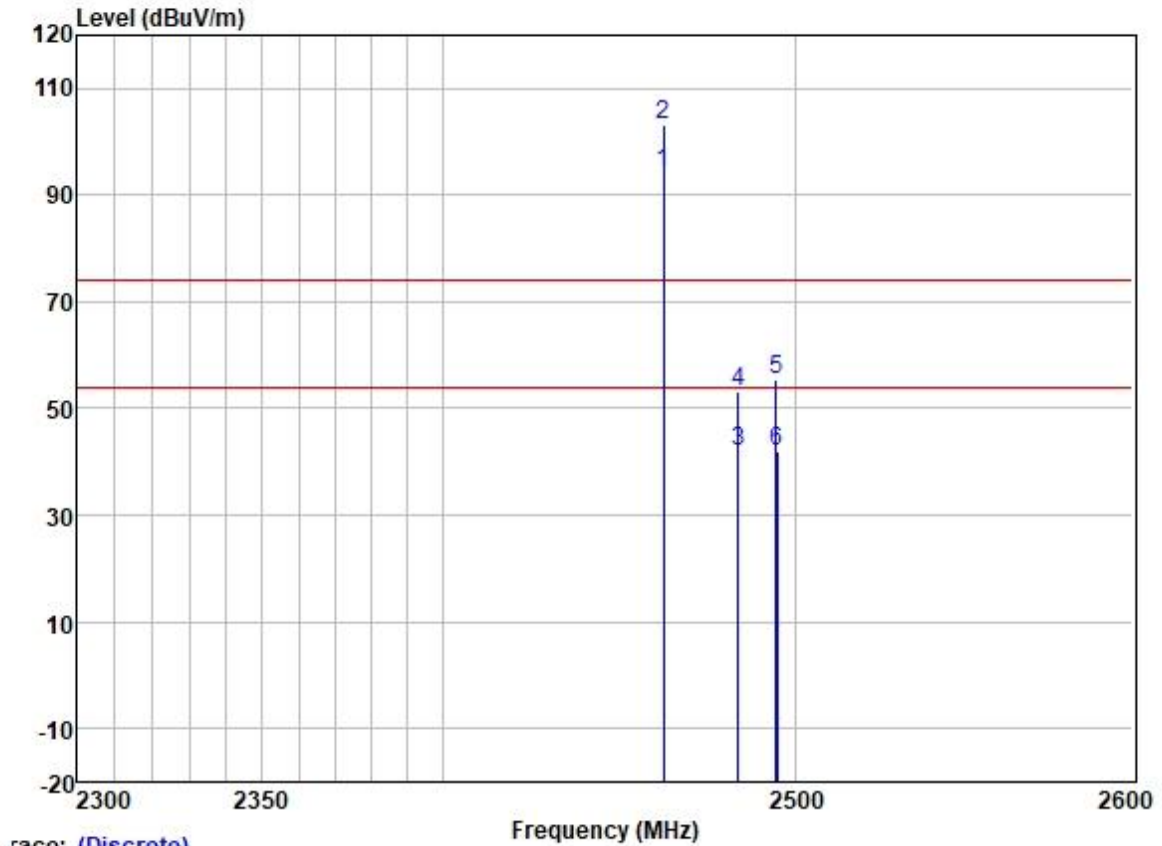

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	*	2462.000	100.96	27.45	3.50	37.58	94.33	54.00	40.33	VERTICAL	Average
2	*	2462.000	109.83	27.45	3.50	37.58	103.20	74.00	29.20	VERTICAL	Peak
3		2483.500	48.42	27.48	3.53	37.57	41.86	54.00	-12.14	VERTICAL	Average
4		2483.500	59.84	27.48	3.53	37.57	53.28	74.00	-20.72	VERTICAL	Peak
5		2494.299	61.84	27.49	3.47	37.56	55.24	74.00	-18.76	VERTICAL	Peak
6		2494.803	48.59	27.49	3.47	37.56	41.99	54.00	-12.01	VERTICAL	Average


Test Mode: 16; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:12

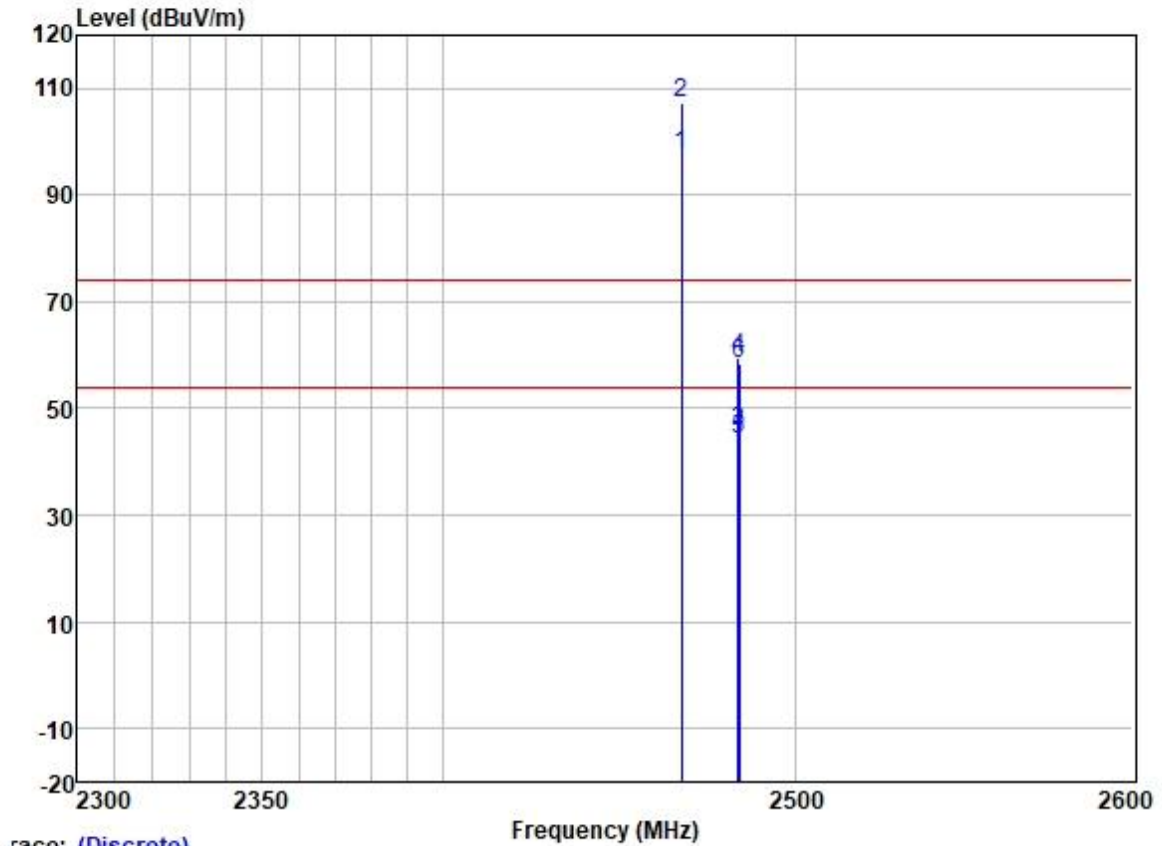

Trace: (Discrete)

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2467.000	104.32	27.45	3.50	37.57	97.70	54.00	43.70	HORIZONTAL Average
2	*	2467.000	113.98	27.45	3.50	37.57	107.36	74.00	33.36	HORIZONTAL Peak
3		2483.500	52.20	27.48	3.53	37.57	45.64	54.00	-8.36	HORIZONTAL Average
4		2483.500	66.26	27.48	3.53	37.57	59.70	74.00	-14.30	HORIZONTAL Peak
5		2483.790	50.89	27.48	3.53	37.57	44.33	54.00	-9.67	HORIZONTAL Average
6		2483.890	64.90	27.48	3.53	37.57	58.34	74.00	-15.66	HORIZONTAL Peak


Test Mode: 16; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:12

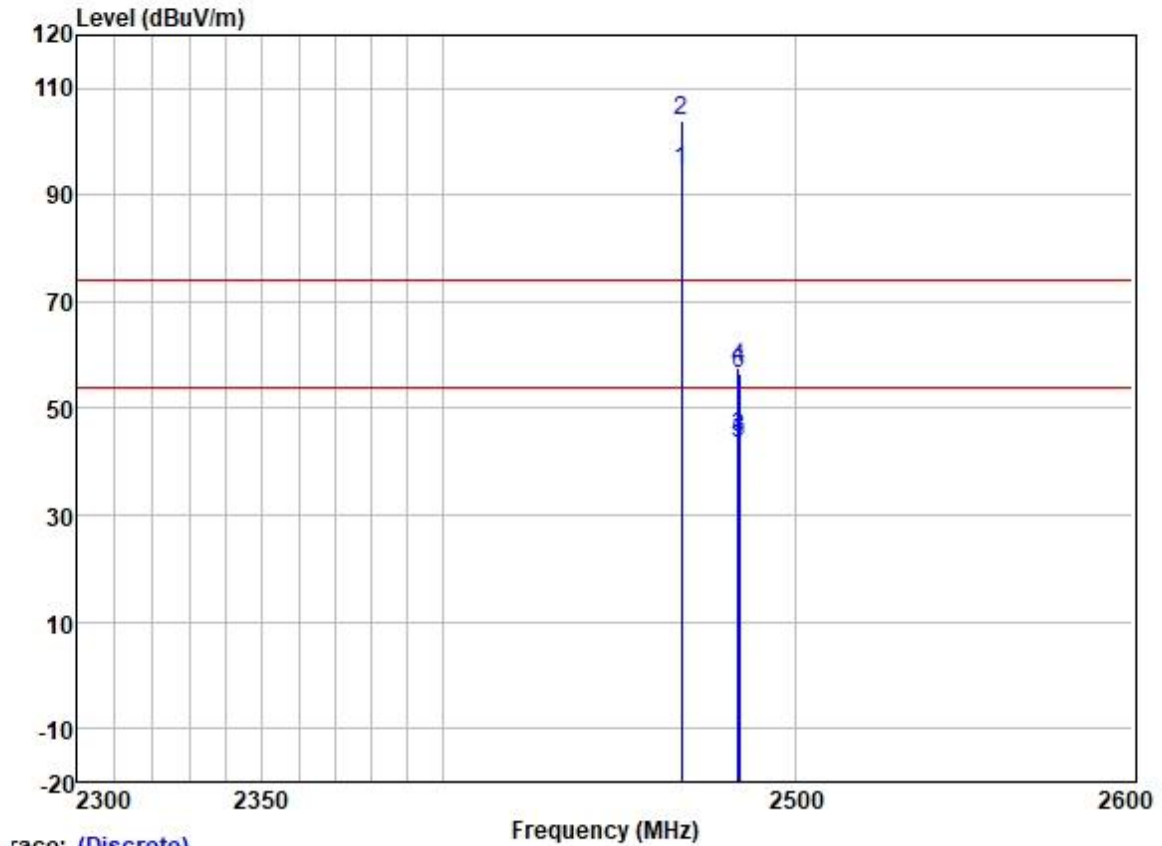

race: (Discrete)

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	*	2467.000	101.38	27.45	3.50	37.57	94.76	54.00	40.76	VERTICAL	Average
2	*	2467.000	110.49	27.45	3.50	37.57	103.87	74.00	29.87	VERTICAL	Peak
3		2483.500	51.13	27.48	3.53	37.57	44.57	54.00	-9.43	VERTICAL	Average
4		2483.500	64.34	27.48	3.53	37.57	57.78	74.00	-16.22	VERTICAL	Peak
5		2483.790	50.06	27.48	3.53	37.57	43.50	54.00	-10.50	VERTICAL	Average
6		2483.790	63.03	27.48	3.53	37.57	56.47	74.00	-17.53	VERTICAL	Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:13

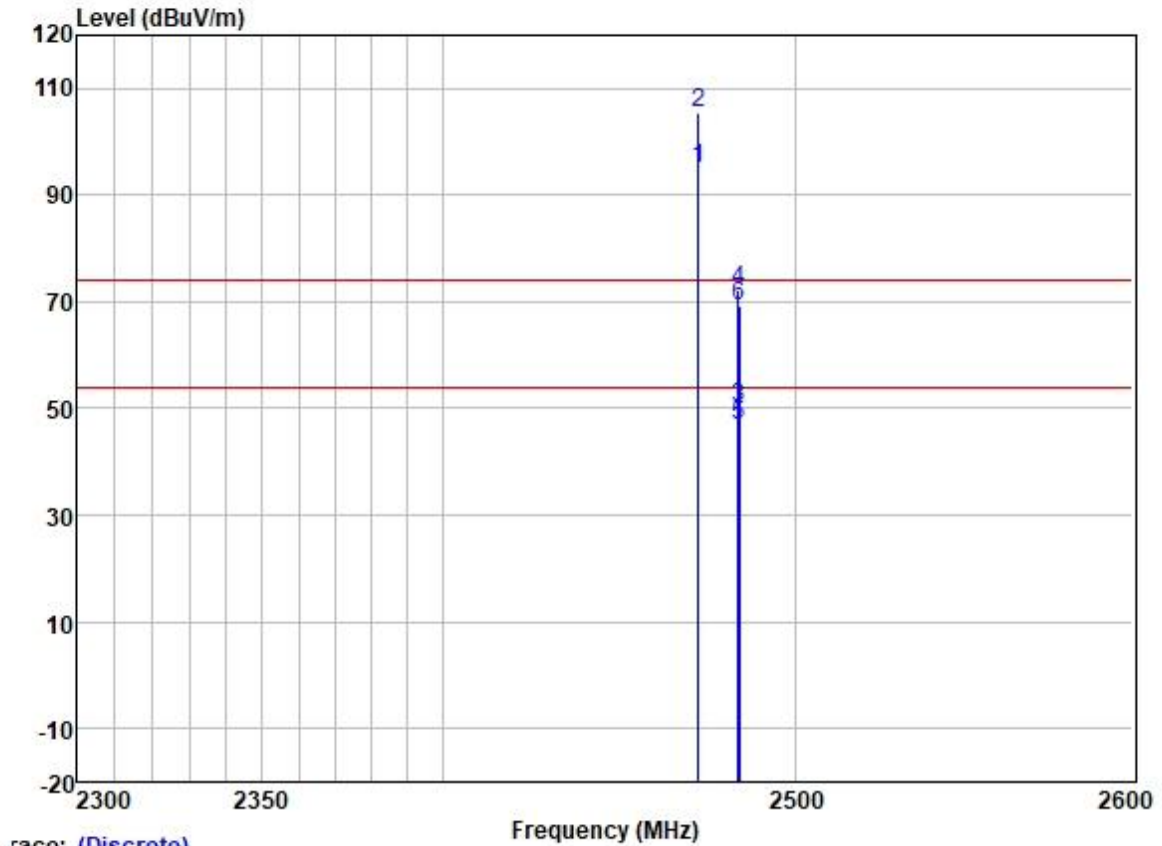

Trace: (Discrete)


		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2472.000	101.70	27.46	3.55	37.57	95.14	54.00	41.14	HORIZONTAL Average
2	*	2472.000	111.97	27.46	3.55	37.57	105.41	74.00	31.41	HORIZONTAL Peak
3		2483.500	56.69	27.48	3.53	37.57	50.13	54.00	-3.87	HORIZONTAL Average
4		2483.500	78.82	27.48	3.53	37.57	72.26	74.00	-1.74	HORIZONTAL Peak
5		2483.790	53.42	27.48	3.53	37.57	46.86	54.00	-7.14	HORIZONTAL Average
6		2483.790	75.75	27.48	3.53	37.57	69.19	74.00	-4.81	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:13

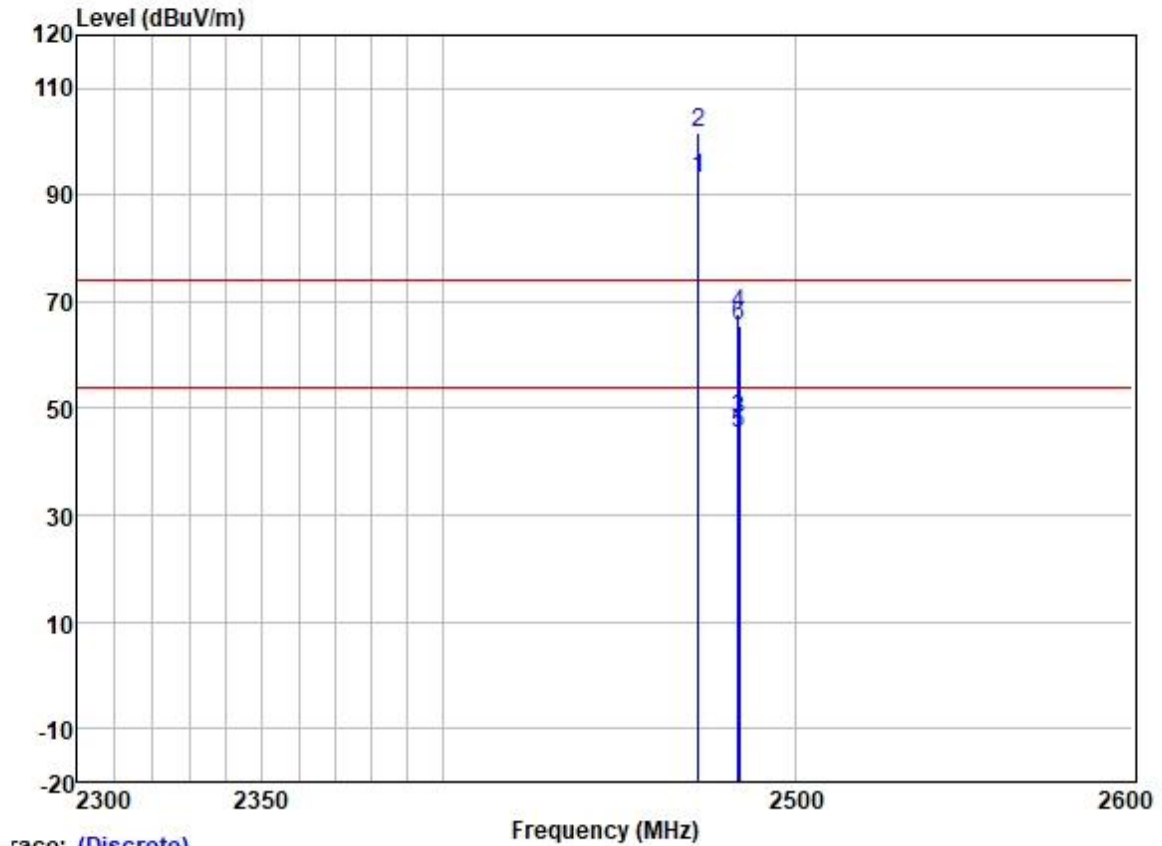

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	*	2472.000	99.50	27.46	3.55	37.57	92.94	54.00	38.94	VERTICAL	Average
2	*	2472.000	108.37	27.46	3.55	37.57	101.81	74.00	27.81	VERTICAL	Peak
3		2483.500	54.44	27.48	3.53	37.57	47.88	54.00	-6.12	VERTICAL	Average
4		2483.500	74.28	27.48	3.53	37.57	67.72	74.00	-6.28	VERTICAL	Peak
5		2483.790	51.89	27.48	3.53	37.57	45.33	54.00	-8.67	VERTICAL	Average
6		2483.790	72.16	27.48	3.53	37.57	65.60	74.00	-8.40	VERTICAL	Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

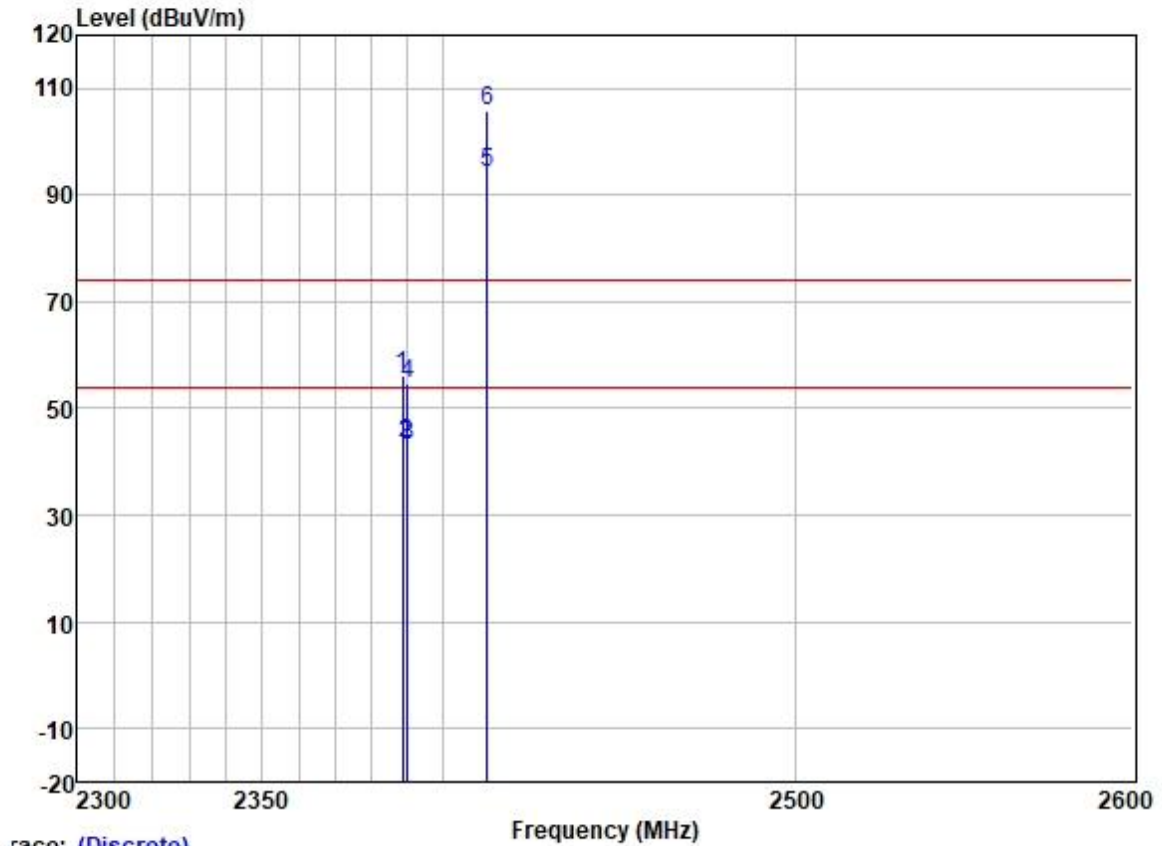

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2388.395	62.95	27.33	3.48	37.59	56.17	74.00	-17.83	HORIZONTAL Peak
2	2389.726	50.10	27.33	3.48	37.59	43.32	54.00	-10.68	HORIZONTAL Average
3	2390.000	50.03	27.33	3.48	37.59	43.25	54.00	-10.75	HORIZONTAL Average
4	2390.000	61.44	27.33	3.48	37.59	54.66	74.00	-19.34	HORIZONTAL Peak
5 *	2412.000	100.83	27.38	3.47	37.59	94.09	54.00	40.09	HORIZONTAL Average
6 *	2412.000	112.54	27.38	3.47	37.59	105.80	74.00	31.80	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

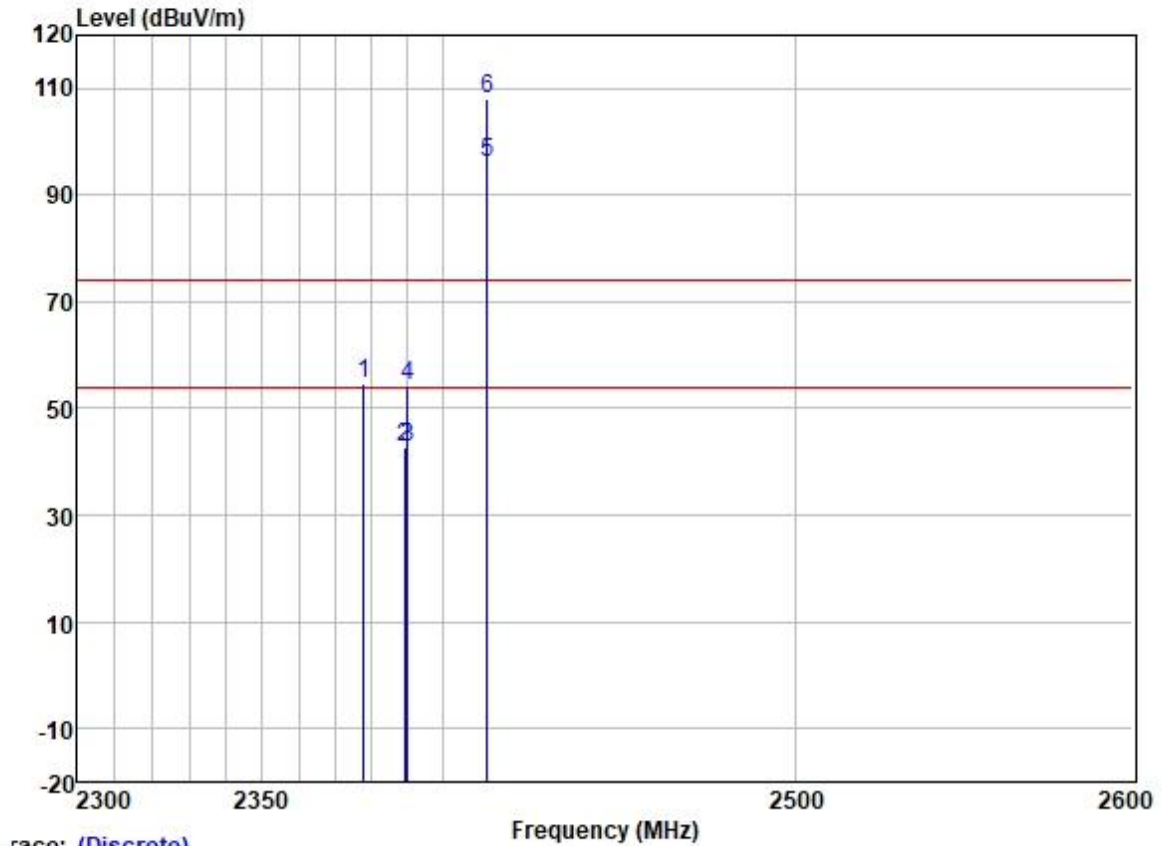

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2377.775	61.67	27.31	3.46	37.60	54.84	74.00	-19.16	VERTICAL	Peak
2	2389.121	49.48	27.33	3.48	37.59	42.70	54.00	-11.30	VERTICAL	Average
3	2390.000	49.45	27.33	3.48	37.59	42.67	54.00	-11.33	VERTICAL	Average
4	2390.000	61.06	27.33	3.48	37.59	54.28	74.00	-19.72	VERTICAL	Peak
5 *	2412.000	103.01	27.38	3.47	37.59	96.27	54.00	42.27	VERTICAL	Average
6 *	2412.000	114.71	27.38	3.47	37.59	107.97	74.00	33.97	VERTICAL	Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:11

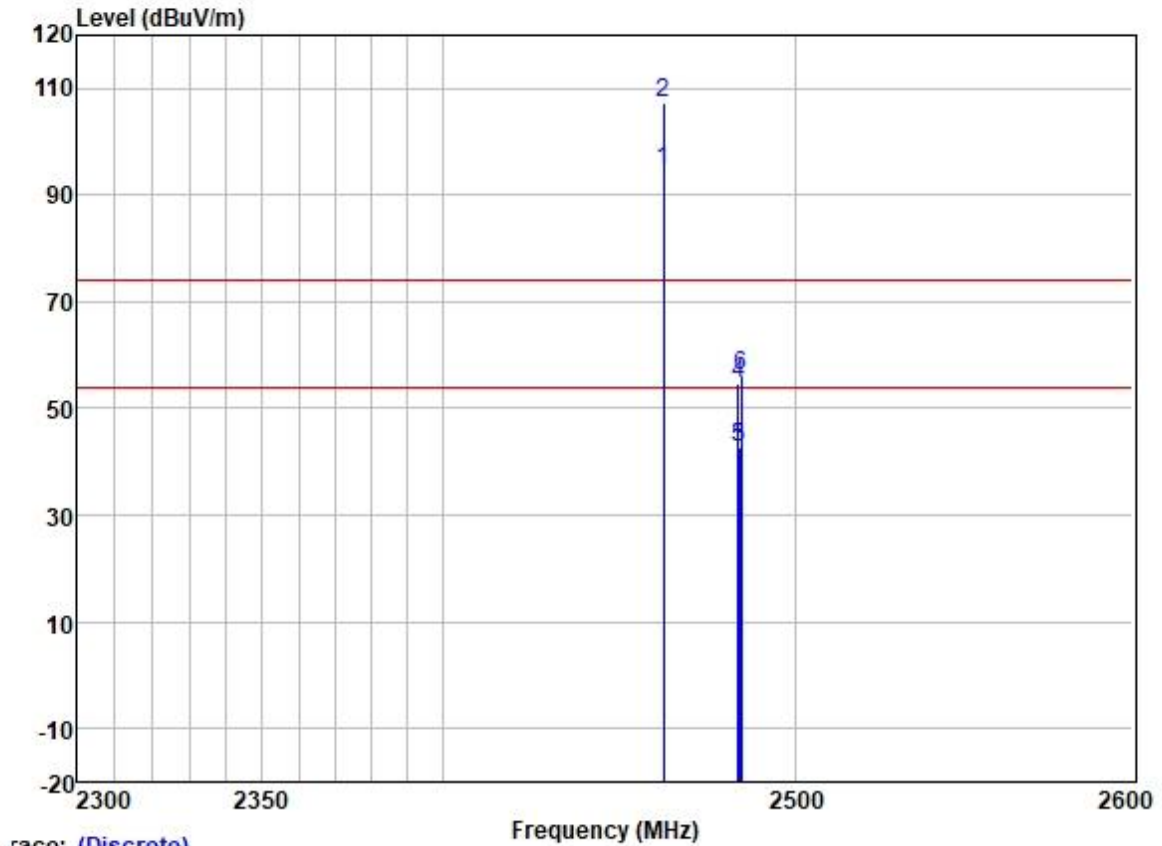

race: (Discrete)

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2462.000	101.33	27.45	3.50	37.58	94.70	54.00	40.70	HORIZONTAL Average
2	*	2462.000	113.86	27.45	3.50	37.58	107.23	74.00	33.23	HORIZONTAL Peak
3		2483.500	49.35	27.48	3.53	37.57	42.79	54.00	-11.21	HORIZONTAL Average
4		2483.500	61.35	27.48	3.53	37.57	54.79	74.00	-19.21	HORIZONTAL Peak
5		2483.790	49.32	27.48	3.53	37.57	42.76	54.00	-11.24	HORIZONTAL Average
6		2484.392	62.85	27.48	3.53	37.57	56.29	74.00	-17.71	HORIZONTAL Peak


Test Mode: 16; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:11

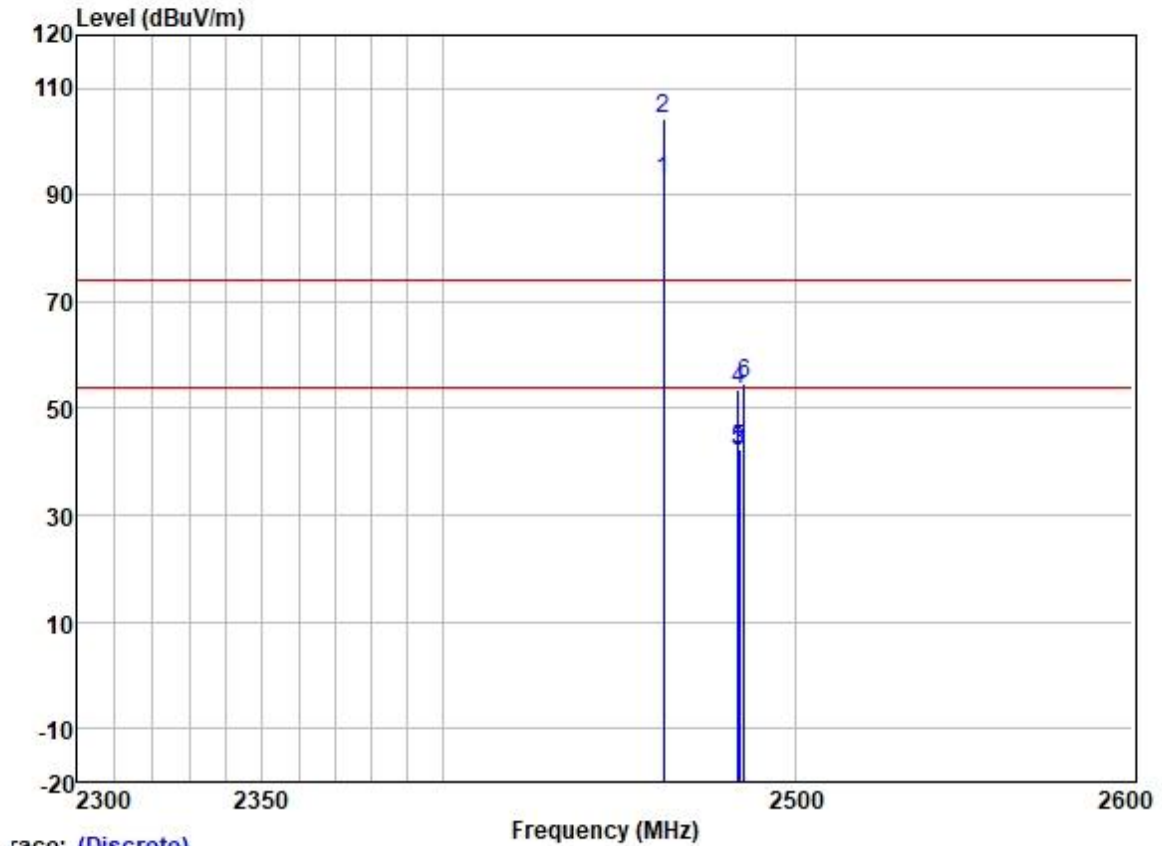

Trace: (Discrete)

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	*	2462.000	99.40	27.45	3.50	37.58	92.77	54.00	38.77	VERTICAL	Average
2	*	2462.000	110.88	27.45	3.50	37.58	104.25	74.00	30.25	VERTICAL	Peak
3		2483.500	48.69	27.48	3.53	37.57	42.13	54.00	-11.87	VERTICAL	Average
4		2483.500	60.25	27.48	3.53	37.57	53.69	74.00	-20.31	VERTICAL	Peak
5		2483.840	48.95	27.48	3.53	37.57	42.39	54.00	-11.61	VERTICAL	Average
6		2485.295	61.30	27.48	3.53	37.57	54.74	74.00	-19.26	VERTICAL	Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:12

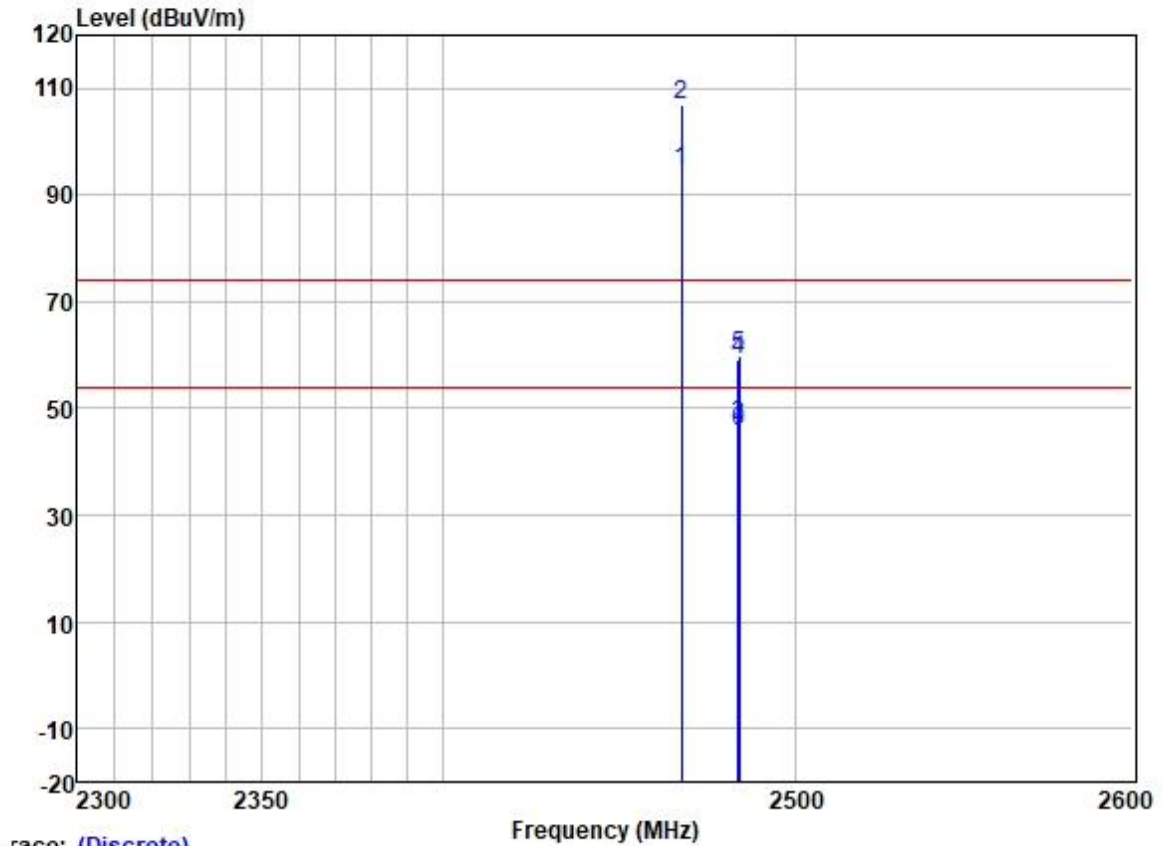

Trace: (Discrete)

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2467.000	101.20	27.45	3.50	37.57	94.58	54.00	40.58	HORIZONTAL Average
2	*	2467.000	113.73	27.45	3.50	37.57	107.11	74.00	33.11	HORIZONTAL Peak
3		2483.500	53.28	27.48	3.53	37.57	46.72	54.00	-7.28	HORIZONTAL Average
4		2483.500	65.76	27.48	3.53	37.57	59.20	74.00	-14.80	HORIZONTAL Peak
5		2483.790	66.27	27.48	3.53	37.57	59.71	74.00	-14.29	HORIZONTAL Peak
6		2483.840	52.18	27.48	3.53	37.57	45.62	54.00	-8.38	HORIZONTAL Average


Test Mode: 16; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:12

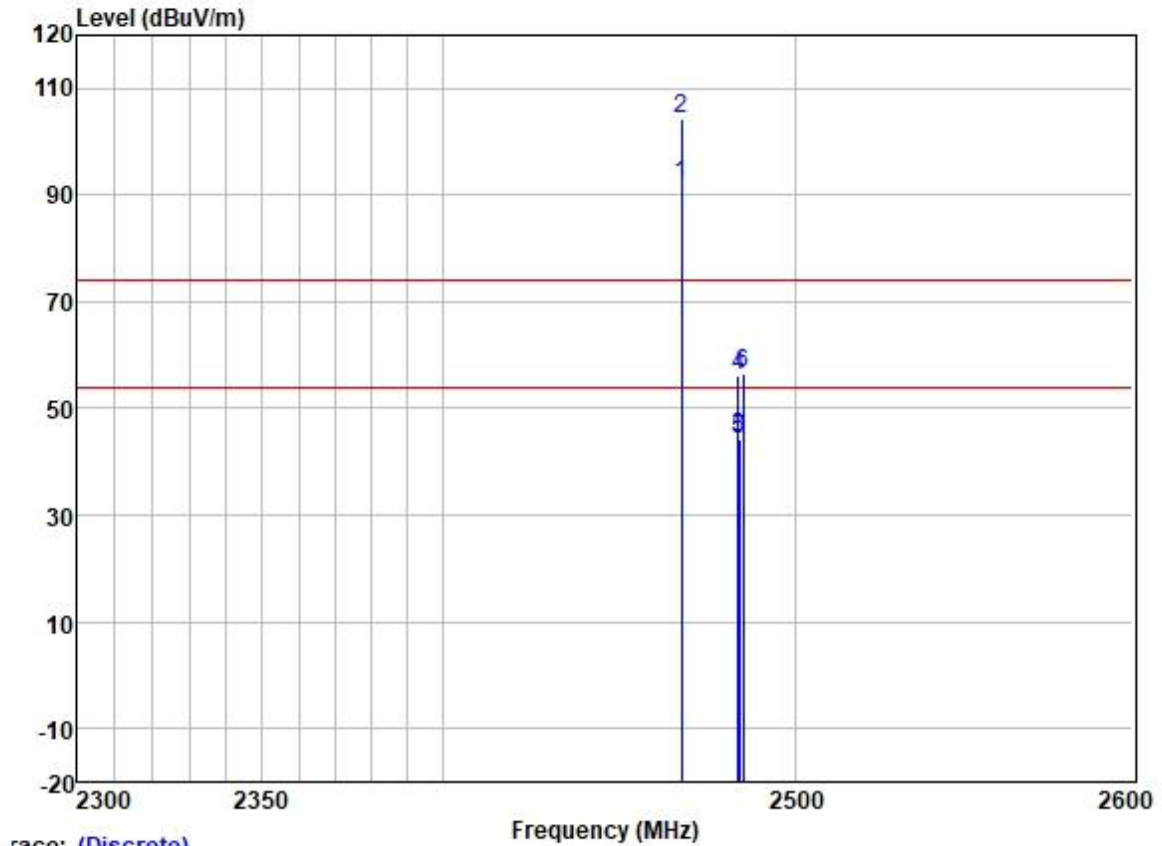

Trace: (Discrete)

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	*	2467.000	98.44	27.45	3.50	37.57	91.82	54.00	37.82	VERTICAL	Average
2	*	2467.000	111.08	27.45	3.50	37.57	104.46	74.00	30.46	VERTICAL	Peak
3		2483.500	51.32	27.48	3.53	37.57	44.76	54.00	-9.24	VERTICAL	Average
4		2483.500	62.74	27.48	3.53	37.57	56.18	74.00	-17.82	VERTICAL	Peak
5		2483.840	50.78	27.48	3.53	37.57	44.22	54.00	-9.78	VERTICAL	Average
6		2484.793	63.07	27.48	3.53	37.57	56.51	74.00	-17.49	VERTICAL	Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:13

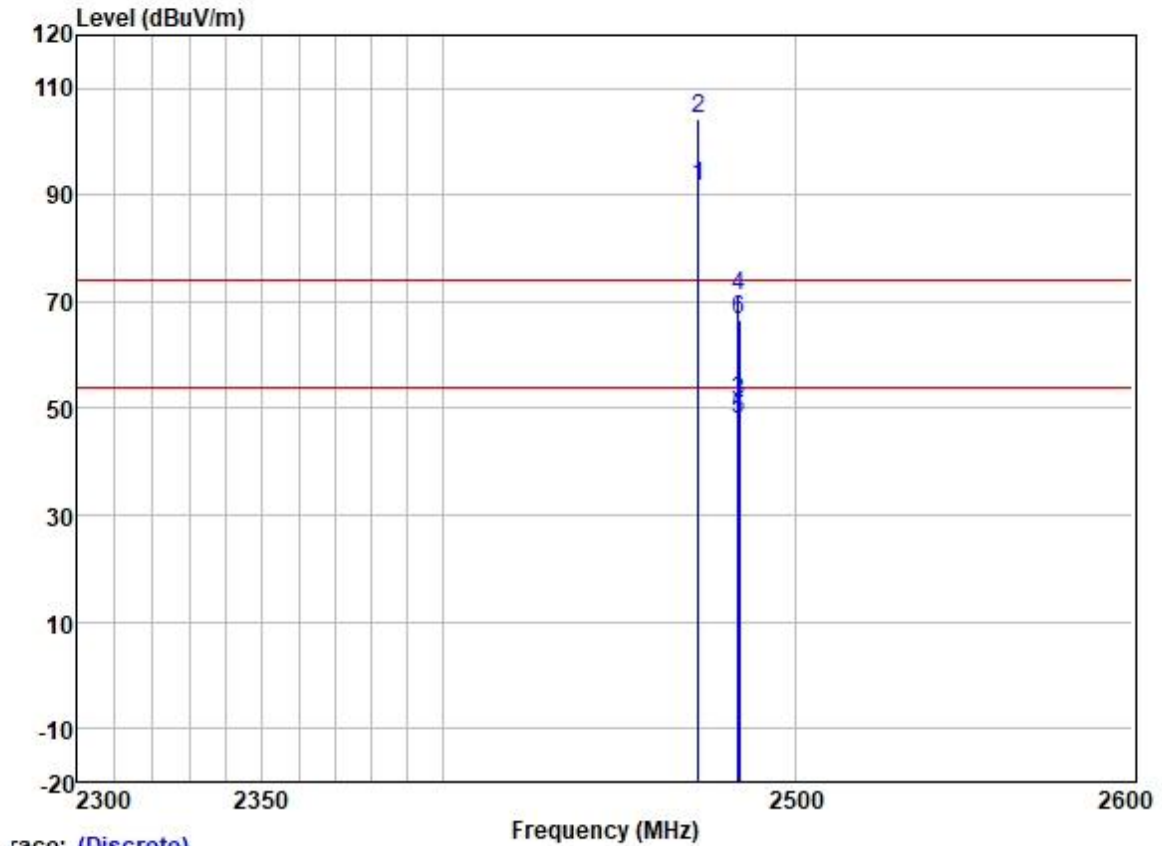

Trace: (Discrete)


		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2472.000	98.20	27.46	3.55	37.57	91.64	54.00	37.64	HORIZONTAL Average
2	*	2472.000	110.94	27.46	3.55	37.57	104.38	74.00	30.38	HORIZONTAL Peak
3		2483.500	57.95	27.48	3.53	37.57	51.39	54.00	-2.61	HORIZONTAL Average
4		2483.500	77.60	27.48	3.53	37.57	71.04	74.00	-2.96	HORIZONTAL Peak
5		2483.790	54.55	27.48	3.53	37.57	47.99	54.00	-6.01	HORIZONTAL Average
6		2483.840	73.34	27.48	3.53	37.57	66.78	74.00	-7.22	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:13

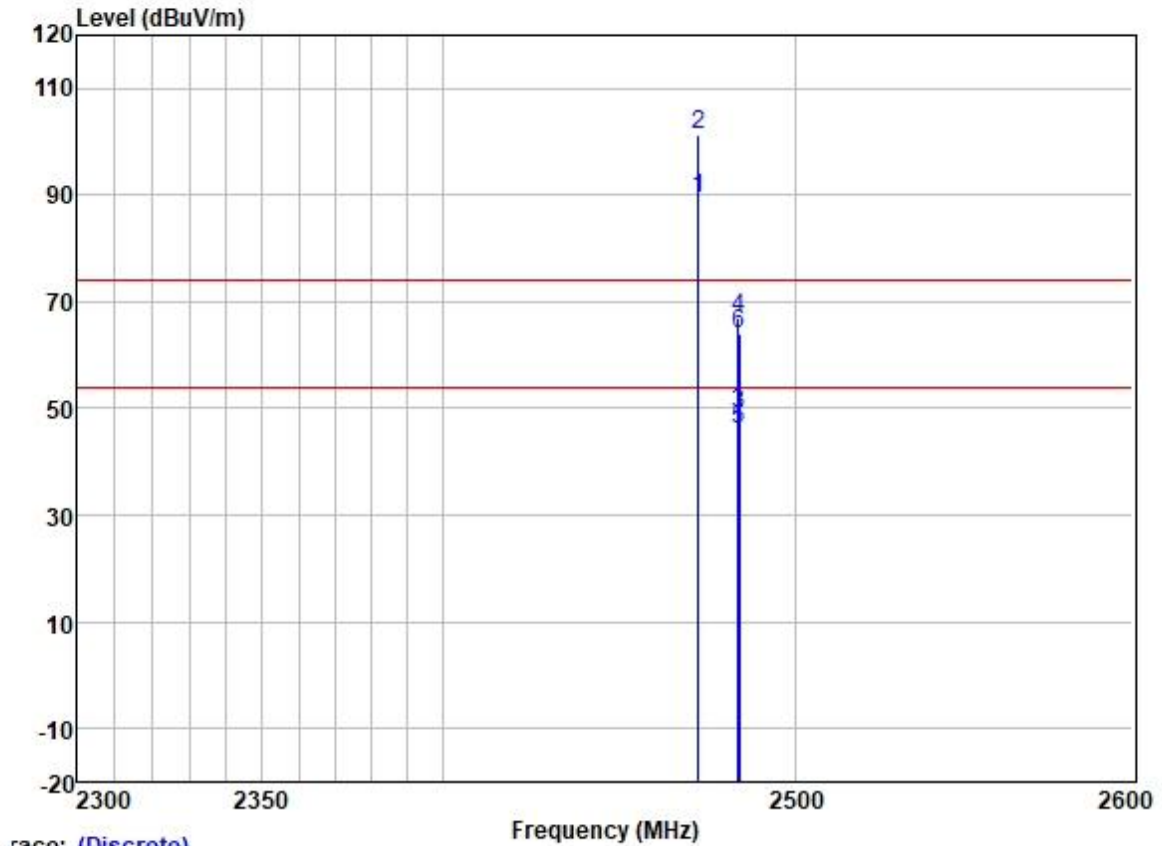


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	2472.000	95.97	27.46	3.55	37.57	89.41	54.00	35.41	VERTICAL	Average
2 *	2472.000	108.06	27.46	3.55	37.57	101.50	74.00	27.50	VERTICAL	Peak
3	2483.500	55.67	27.48	3.53	37.57	49.11	54.00	-4.89	VERTICAL	Average
4	2483.500	73.66	27.48	3.53	37.57	67.10	74.00	-6.90	VERTICAL	Peak
5	2483.790	52.65	27.48	3.53	37.57	46.09	54.00	-7.91	VERTICAL	Average
6	2483.790	70.71	27.48	3.53	37.57	64.15	74.00	-9.85	VERTICAL	Peak

Test Mode: 16; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

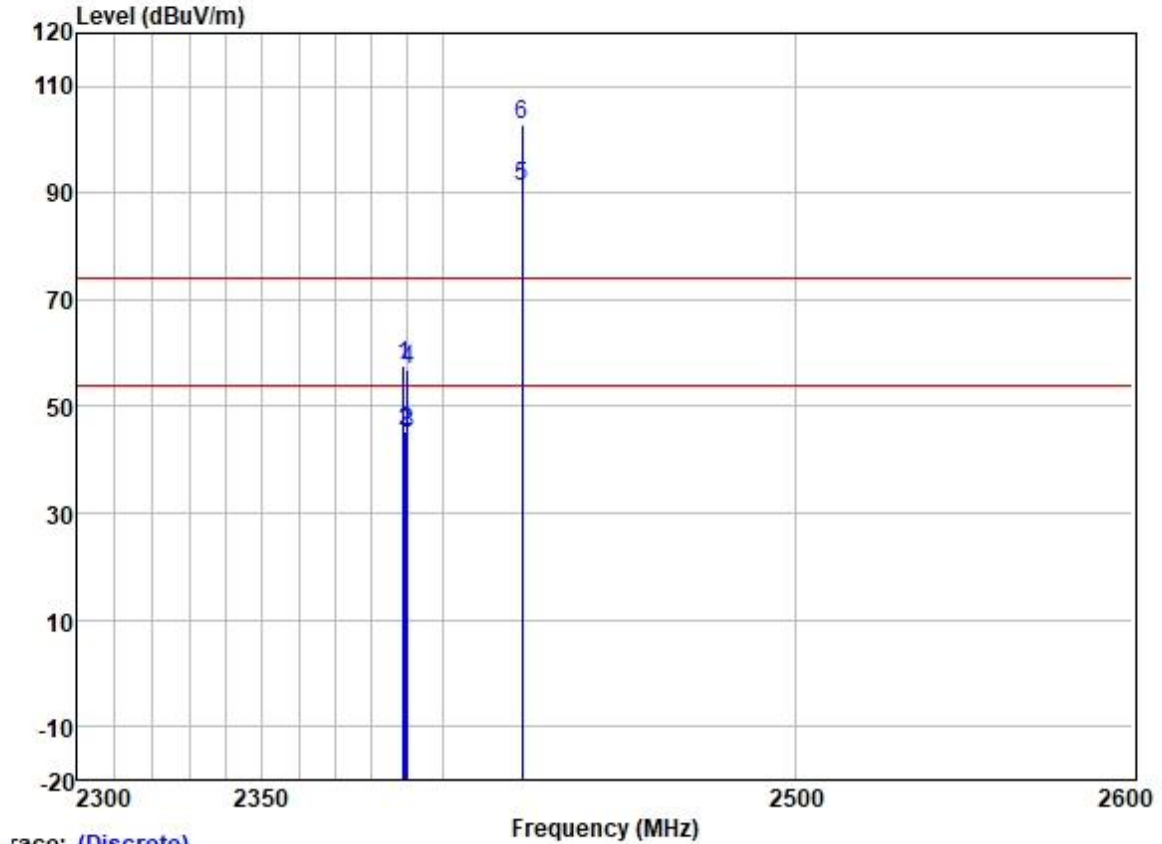


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2388.775	64.48	27.33	3.48	37.59	57.70	74.00	-16.30	HORIZONTAL	Peak
2	2389.376	52.00	27.33	3.48	37.59	45.22	54.00	-8.78	HORIZONTAL	Average
3	2390.000	51.77	27.33	3.48	37.59	44.99	54.00	-9.01	HORIZONTAL	Average
4	2390.000	63.55	27.33	3.48	37.59	56.77	74.00	-17.23	HORIZONTAL	Peak
5 *	2422.000	97.96	27.39	3.45	37.58	91.22	54.00	37.22	HORIZONTAL	Average
6 *	2422.000	109.39	27.39	3.45	37.58	102.65	74.00	28.65	HORIZONTAL	Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

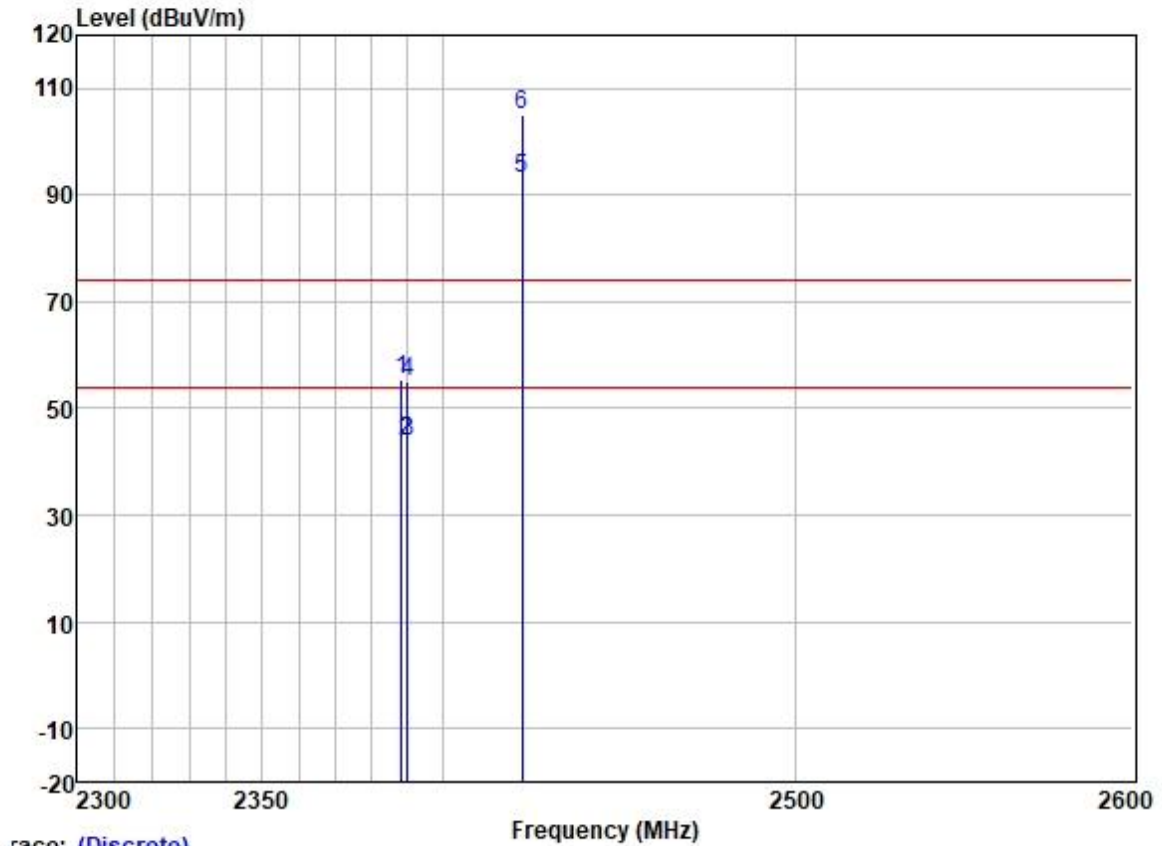

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2388.174	62.14	27.33	3.48	37.59	55.36	74.00	-18.64	VERTICAL	Peak
2	2389.526	50.53	27.33	3.48	37.59	43.75	54.00	-10.25	VERTICAL	Average
3	2390.000	50.46	27.33	3.48	37.59	43.68	54.00	-10.32	VERTICAL	Average
4	2390.000	61.89	27.33	3.48	37.59	55.11	74.00	-18.89	VERTICAL	Peak
5 *	2422.000	99.96	27.39	3.45	37.58	93.22	54.00	39.22	VERTICAL	Average
6 *	2422.000	111.99	27.39	3.45	37.58	105.25	74.00	31.25	VERTICAL	Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:9

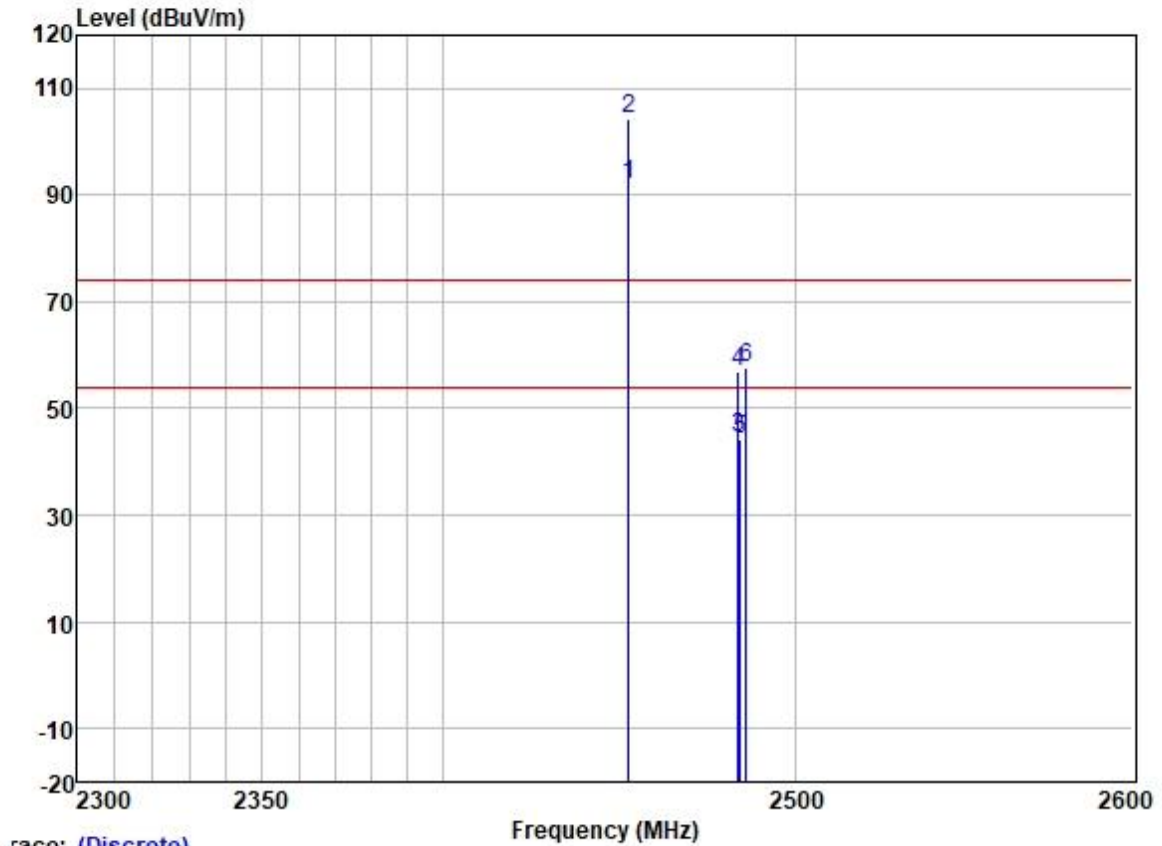

Trace: (Discrete)

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2452.000	98.63	27.43	3.40	37.58	91.88	54.00	37.88	HORIZONTAL Average
2	*	2452.000	111.17	27.43	3.40	37.58	104.42	74.00	30.42	HORIZONTAL Peak
3		2483.500	50.98	27.48	3.53	37.57	44.42	54.00	-9.58	HORIZONTAL Average
4		2483.500	63.42	27.48	3.53	37.57	56.86	74.00	-17.14	HORIZONTAL Peak
5		2483.935	50.88	27.48	3.53	37.57	44.32	54.00	-9.68	HORIZONTAL Average
6		2485.841	64.27	27.48	3.53	37.57	57.71	74.00	-16.29	HORIZONTAL Peak


Test Mode: 16; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:9

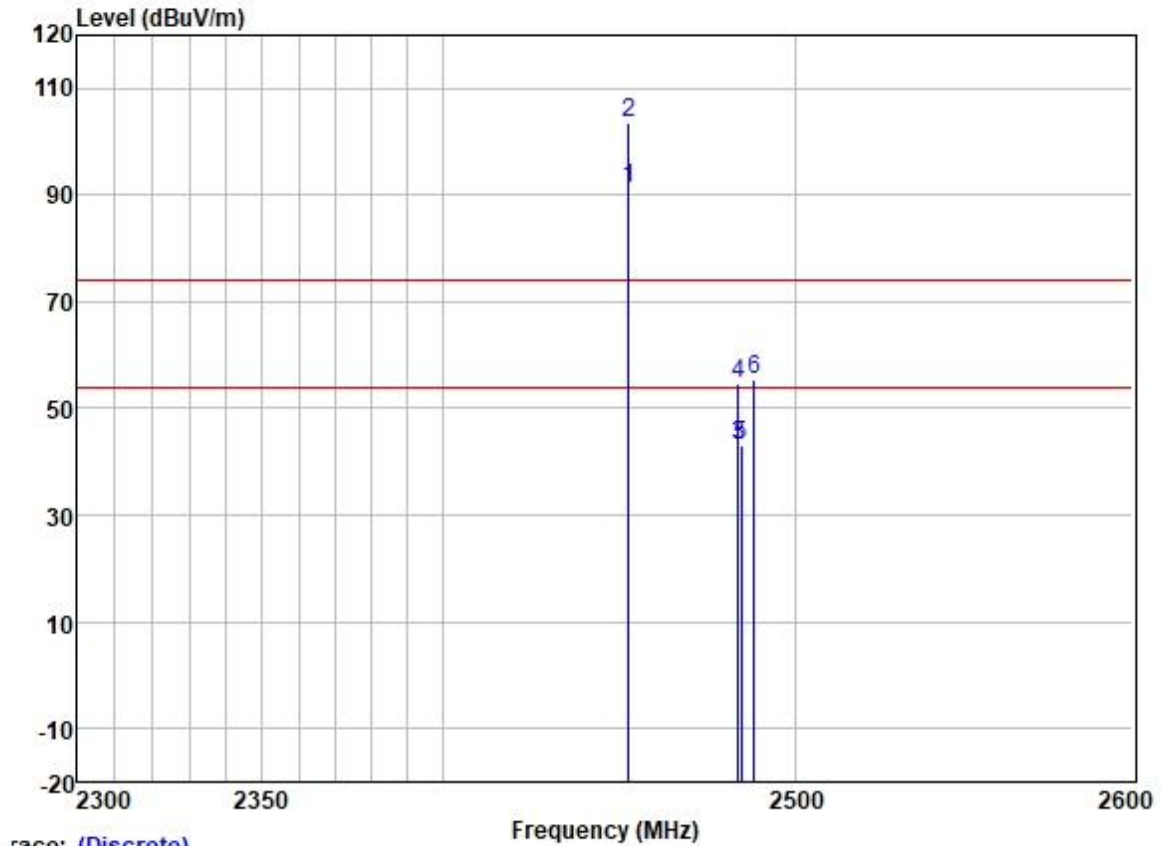

Trace: (Discrete)

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	*	2452.000	97.98	27.43	3.40	37.58	91.23	54.00	37.23	VERTICAL	Average
2	*	2452.000	110.28	27.43	3.40	37.58	103.53	74.00	29.53	VERTICAL	Peak
3		2483.500	49.75	27.48	3.53	37.57	43.19	54.00	-10.81	VERTICAL	Average
4		2483.500	61.19	27.48	3.53	37.57	54.63	74.00	-19.37	VERTICAL	Peak
5		2484.358	49.64	27.48	3.53	37.57	43.08	54.00	-10.92	VERTICAL	Average
6		2488.030	61.95	27.48	3.53	37.56	55.40	74.00	-18.60	VERTICAL	Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:10

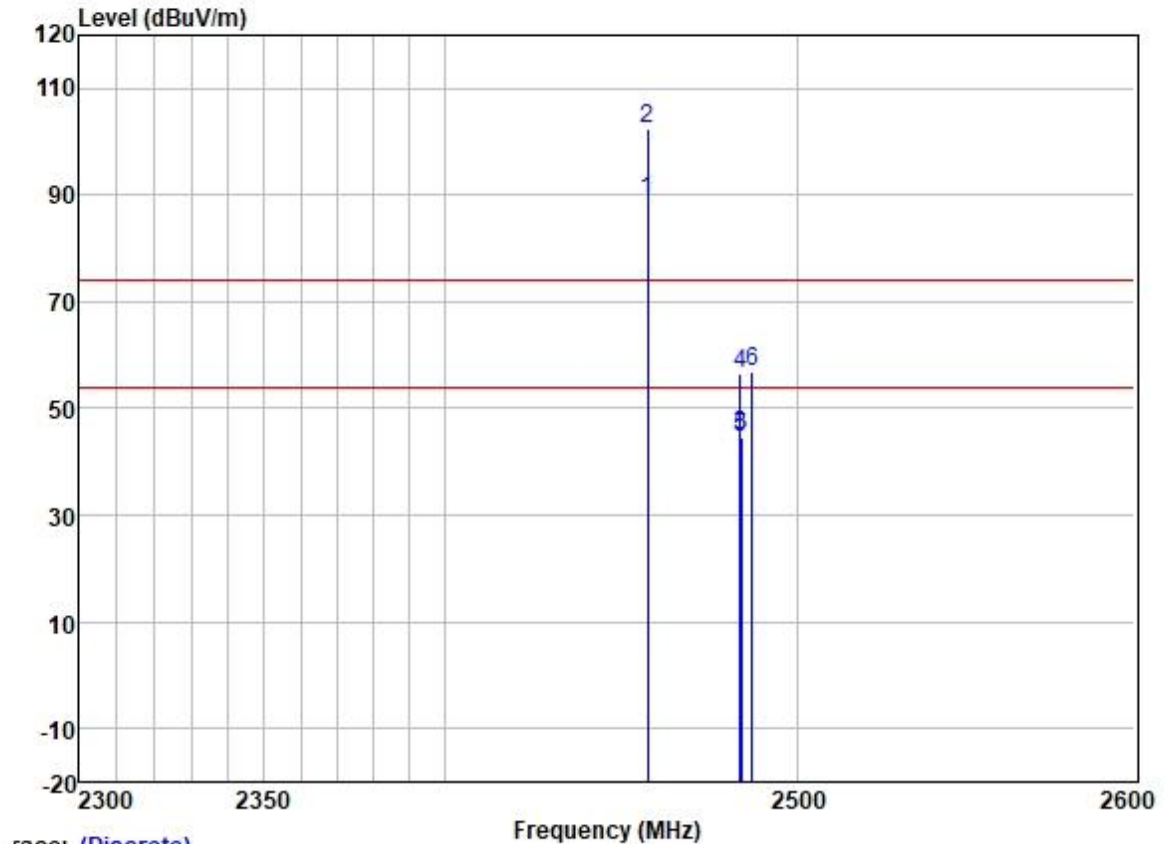

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	2457.000	95.53	27.44	3.45	37.58	88.84	54.00	34.84	HORIZONTAL	Average
2 *	2457.000	109.10	27.44	3.45	37.58	102.41	74.00	28.41	HORIZONTAL	Peak
3	2483.500	51.51	27.48	3.53	37.57	44.95	54.00	-9.05	HORIZONTAL	Average
4	2483.500	63.13	27.48	3.53	37.57	56.57	74.00	-17.43	HORIZONTAL	Peak
5	2483.865	51.09	27.48	3.53	37.57	44.53	54.00	-9.47	HORIZONTAL	Average
6	2487.041	63.63	27.48	3.53	37.57	57.07	74.00	-16.93	HORIZONTAL	Peak


Test Mode: 16; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:10

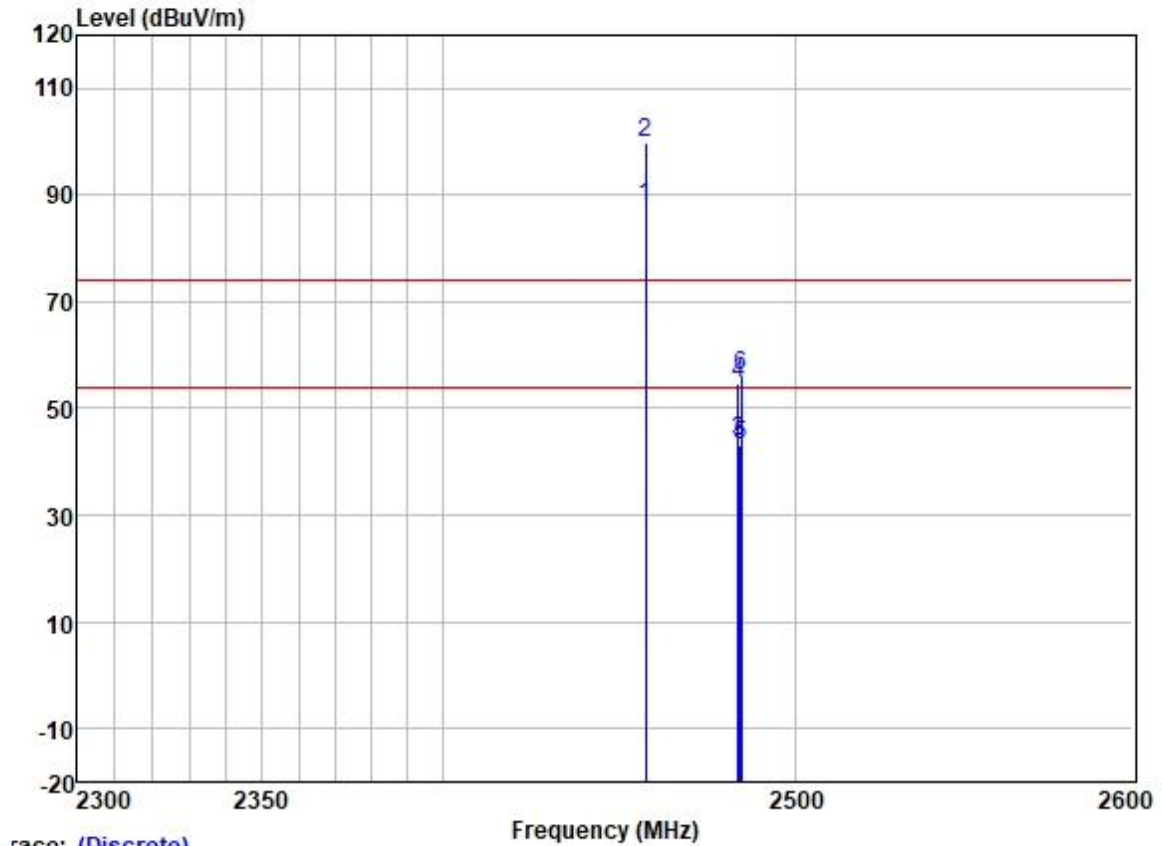

Trace: (Discrete)


		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	*	2457.000	94.73	27.44	3.45	37.58	88.04	54.00	34.04	VERTICAL	Average
2	*	2457.000	106.57	27.44	3.45	37.58	99.88	74.00	25.88	VERTICAL	Peak
3		2483.500	50.30	27.48	3.53	37.57	43.74	54.00	-10.26	VERTICAL	Average
4		2483.500	61.30	27.48	3.53	37.57	54.74	74.00	-19.26	VERTICAL	Peak
5		2483.935	49.76	27.48	3.53	37.57	43.20	54.00	-10.80	VERTICAL	Average
6		2484.358	62.57	27.48	3.53	37.57	56.01	74.00	-17.99	VERTICAL	Peak

Test Mode: 16; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:11

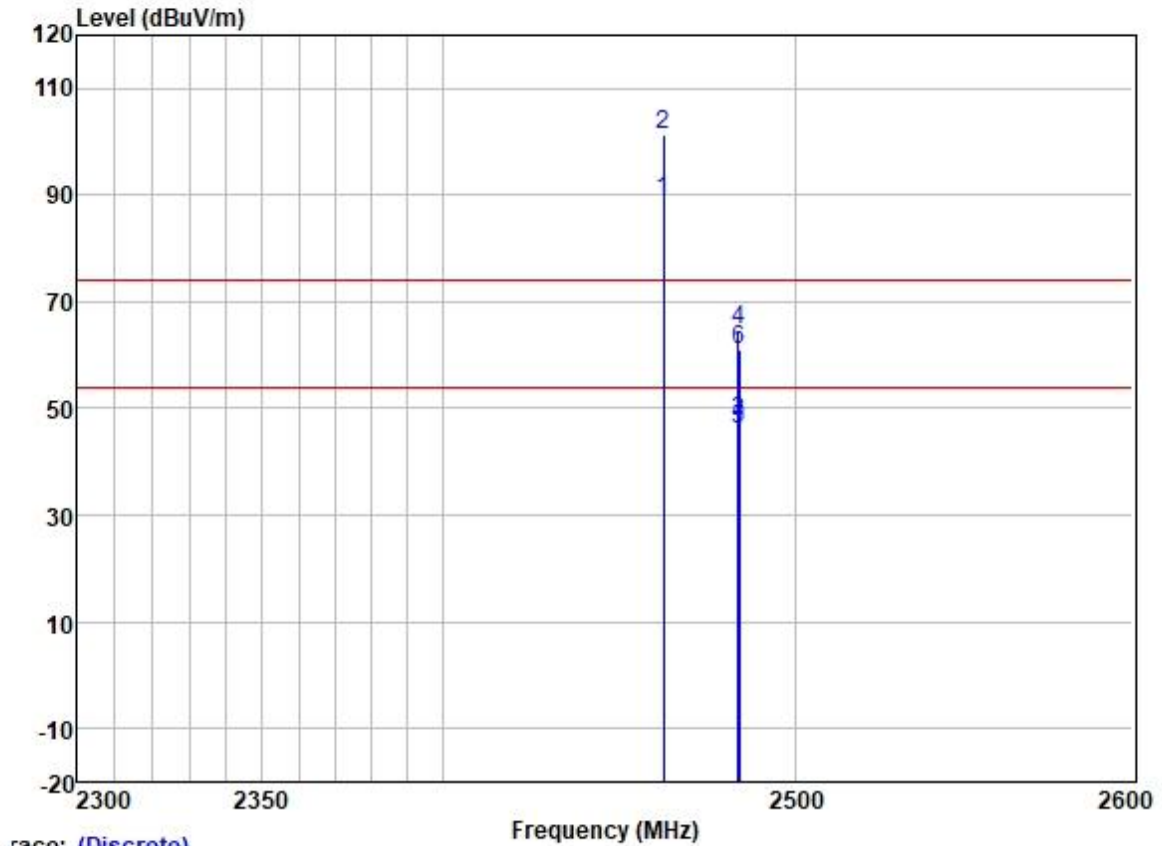

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2462.000	95.54	27.45	3.50	37.58	88.91	54.00	34.91	HORIZONTAL Average
2	*	2462.000	107.94	27.45	3.50	37.58	101.31	74.00	27.31	HORIZONTAL Peak
3		2483.500	54.16	27.48	3.53	37.57	47.60	54.00	-6.40	HORIZONTAL Average
4		2483.500	71.19	27.48	3.53	37.57	64.63	74.00	-9.37	HORIZONTAL Peak
5		2483.865	52.78	27.48	3.53	37.57	46.22	54.00	-7.78	HORIZONTAL Average
6		2483.865	67.43	27.48	3.53	37.57	60.87	74.00	-13.13	HORIZONTAL Peak


Test Mode: 16; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:11

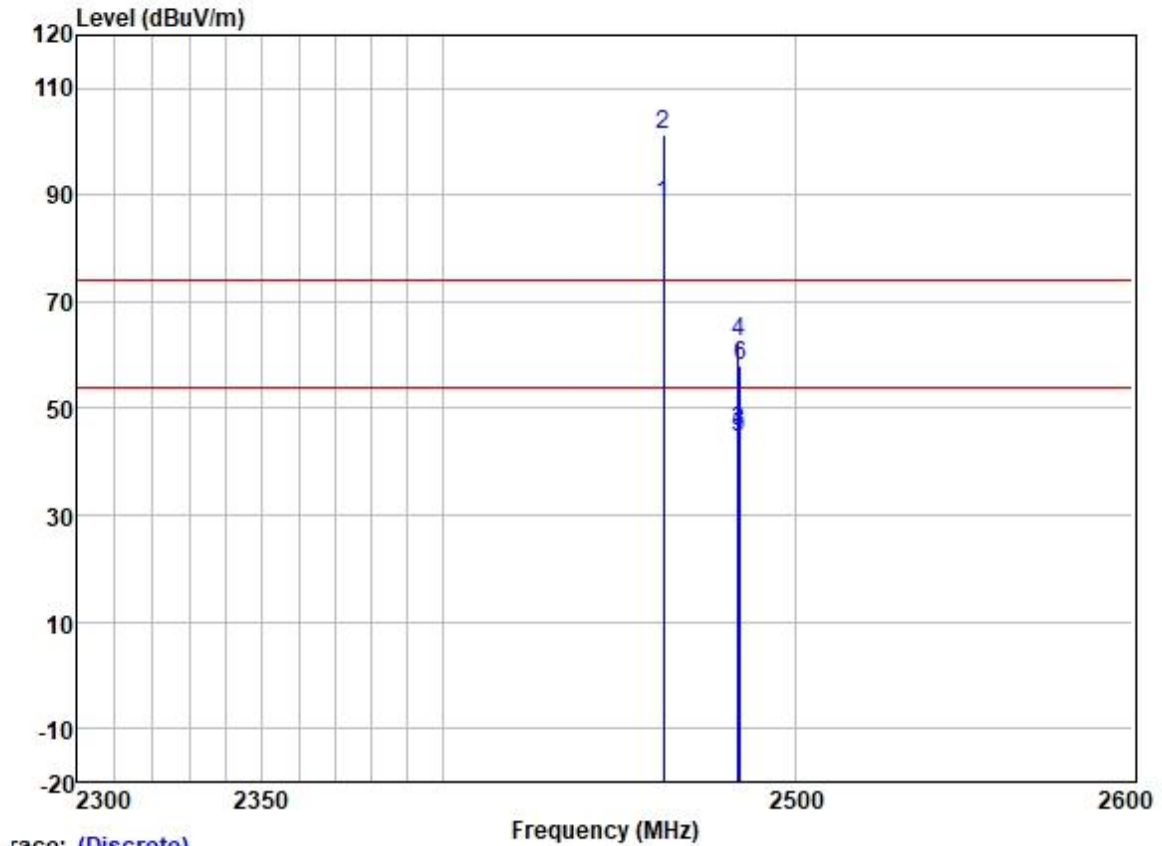

Trace: (Discrete)

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	*	2462.000	94.98	27.45	3.50	37.58	88.35	54.00	34.35	VERTICAL	Average
2	*	2462.000	107.99	27.45	3.50	37.58	101.36	74.00	27.36	VERTICAL	Peak
3		2483.500	52.27	27.48	3.53	37.57	45.71	54.00	-8.29	VERTICAL	Average
4		2483.500	68.89	27.48	3.53	37.57	62.33	74.00	-11.67	VERTICAL	Peak
5		2483.865	50.96	27.48	3.53	37.57	44.40	54.00	-9.60	VERTICAL	Average
6		2483.935	64.63	27.48	3.53	37.57	58.07	74.00	-15.93	VERTICAL	Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

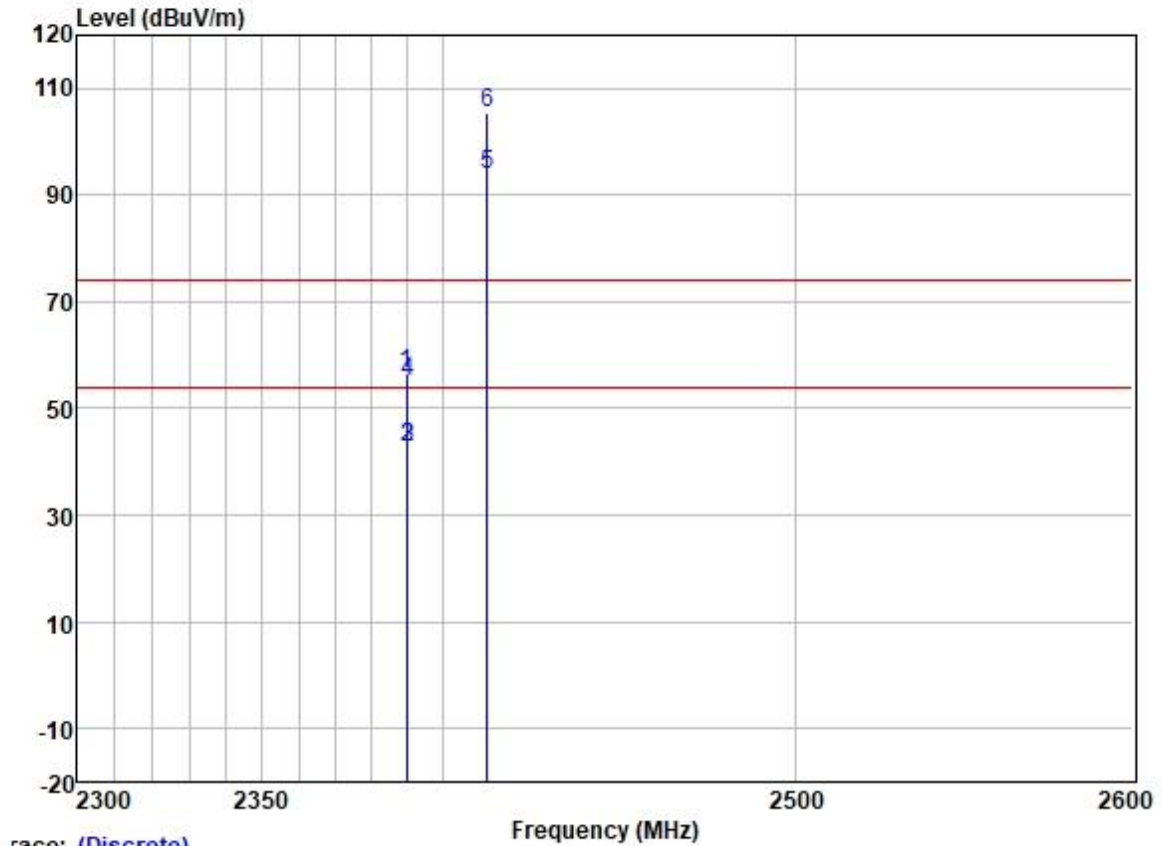

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2389.484	63.26	27.33	3.48	37.59	56.48	74.00	-17.52	HORIZONTAL	Peak
2	2389.968	49.38	27.33	3.48	37.59	42.60	54.00	-11.40	HORIZONTAL	Average
3	2390.000	49.38	27.33	3.48	37.59	42.60	54.00	-11.40	HORIZONTAL	Average
4	2390.000	61.79	27.33	3.48	37.59	55.01	74.00	-18.99	HORIZONTAL	Peak
5 *	2412.000	100.66	27.38	3.47	37.59	93.92	54.00	39.92	HORIZONTAL	Average
6 *	2412.000	112.19	27.38	3.47	37.59	105.45	74.00	31.45	HORIZONTAL	Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

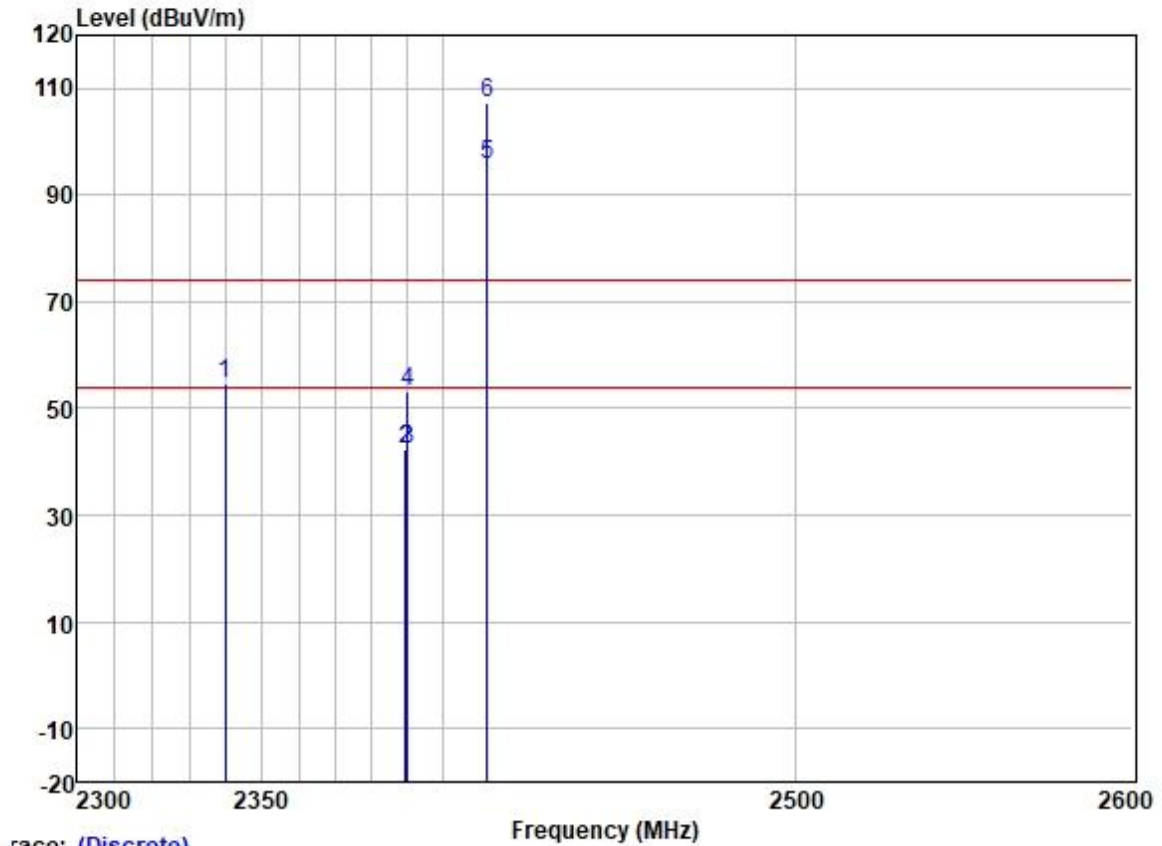

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2339.788	61.53	27.22	3.37	37.61	54.51	74.00	-19.49	VERTICAL	Peak
2	2389.363	49.11	27.33	3.48	37.59	42.33	54.00	-11.67	VERTICAL	Average
3	2390.000	49.07	27.33	3.48	37.59	42.29	54.00	-11.71	VERTICAL	Average
4	2390.000	59.99	27.33	3.48	37.59	53.21	74.00	-20.79	VERTICAL	Peak
5 *	2412.000	102.47	27.38	3.47	37.59	95.73	54.00	41.73	VERTICAL	Average
6 *	2412.000	114.21	27.38	3.47	37.59	107.47	74.00	33.47	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 16; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:11

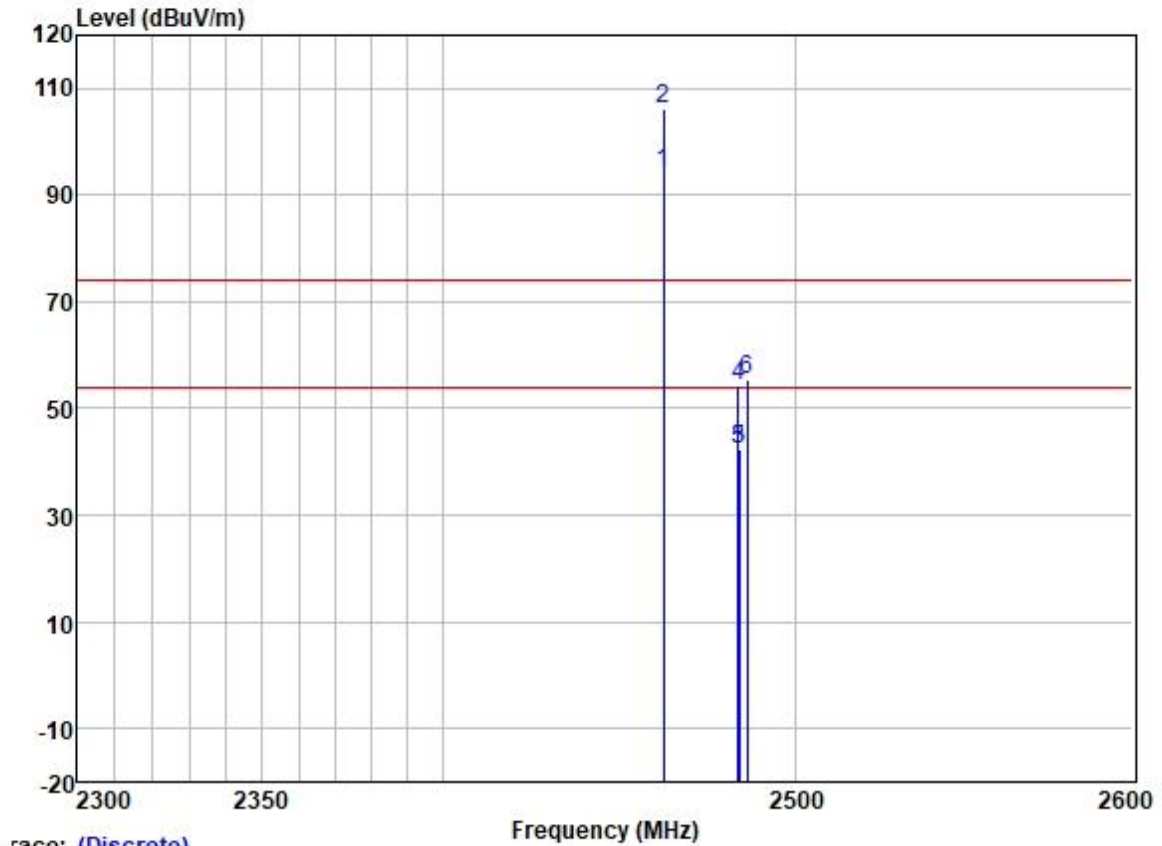

Trace: (Discrete)


		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2462.000	100.91	27.45	3.50	37.58	94.28	54.00	40.28	HORIZONTAL Average
2	*	2462.000	112.92	27.45	3.50	37.58	106.29	74.00	32.29	HORIZONTAL Peak
3		2483.500	48.91	27.48	3.53	37.57	42.35	54.00	-11.65	HORIZONTAL Average
4		2483.500	60.92	27.48	3.53	37.57	54.36	74.00	-19.64	HORIZONTAL Peak
5		2483.790	48.97	27.48	3.53	37.57	42.41	54.00	-11.59	HORIZONTAL Average
6		2486.049	61.91	27.48	3.53	37.57	55.35	74.00	-18.65	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:11

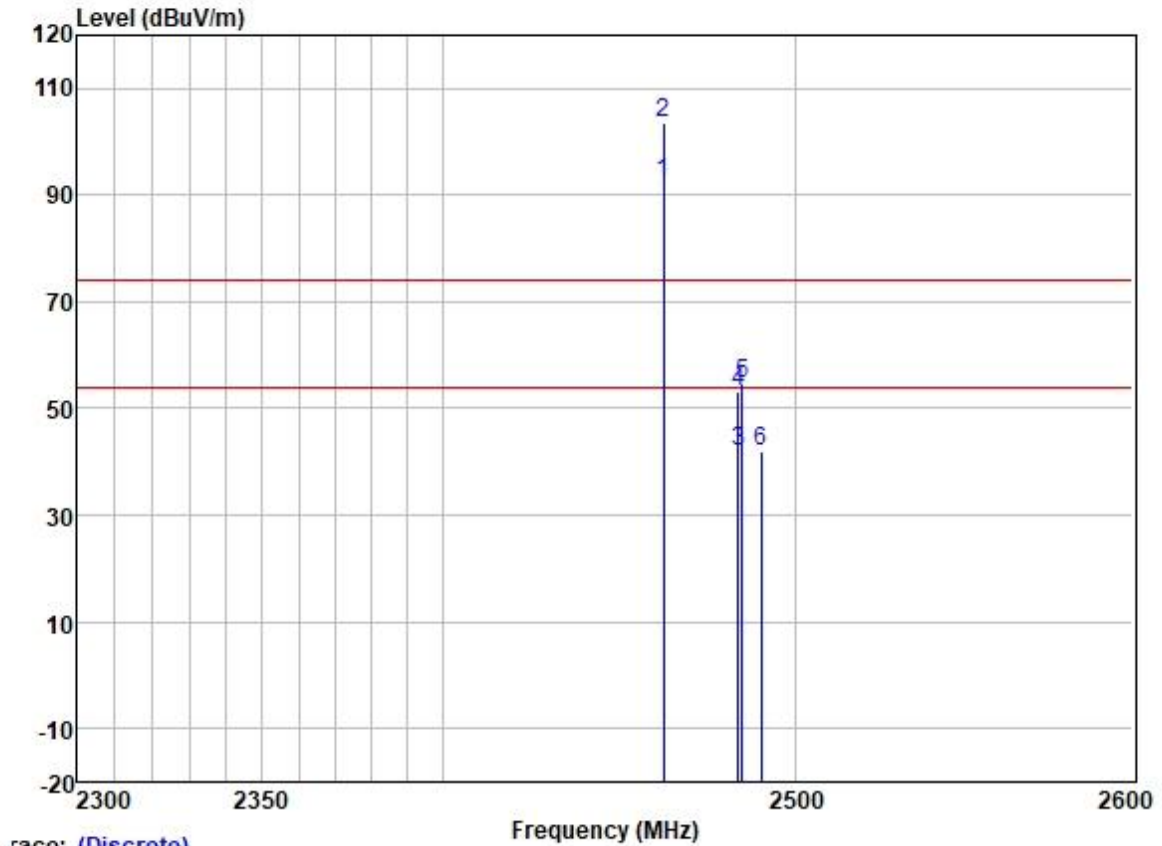

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	2462.000	98.94	27.45	3.50	37.58	92.31	54.00	38.31	VERTICAL	Average
2 *	2462.000	110.17	27.45	3.50	37.58	103.54	74.00	29.54	VERTICAL	Peak
3	2483.500	48.41	27.48	3.53	37.57	41.85	54.00	-12.15	VERTICAL	Average
4	2483.500	59.74	27.48	3.53	37.57	53.18	74.00	-20.82	VERTICAL	Peak
5	2484.593	61.22	27.48	3.53	37.57	54.66	74.00	-19.34	VERTICAL	Peak
6	2489.969	48.73	27.49	3.47	37.56	42.13	54.00	-11.87	VERTICAL	Average


Test Mode: 16; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:12

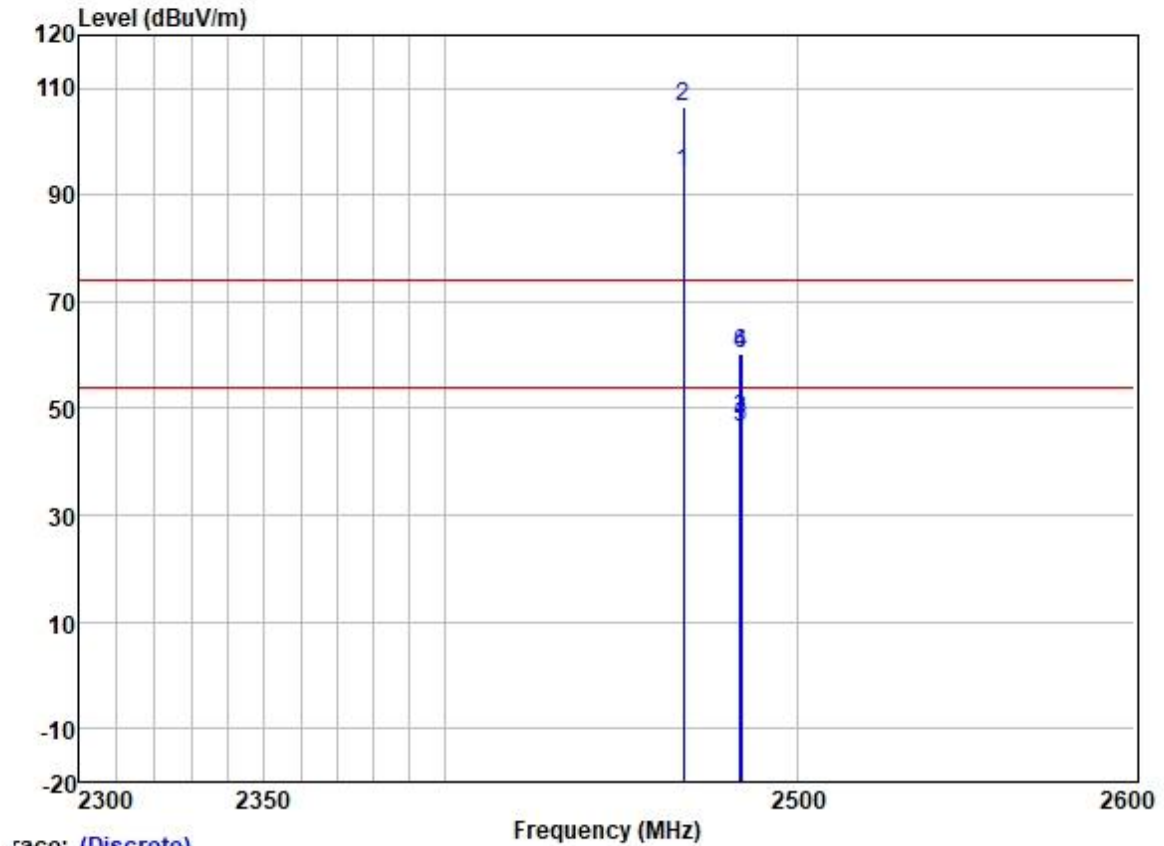

Trace: (Discrete)

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2467.000	101.01	27.45	3.50	37.57	94.39	54.00	40.39	HORIZONTAL Average
2	*	2467.000	113.08	27.45	3.50	37.57	106.46	74.00	32.46	HORIZONTAL Peak
3		2483.500	54.33	27.48	3.53	37.57	47.77	54.00	-6.23	HORIZONTAL Average
4		2483.500	67.00	27.48	3.53	37.57	60.44	74.00	-13.56	HORIZONTAL Peak
5		2483.790	53.01	27.48	3.53	37.57	46.45	54.00	-7.55	HORIZONTAL Average
6		2483.790	66.94	27.48	3.53	37.57	60.38	74.00	-13.62	HORIZONTAL Peak


Test Mode: 16; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:12

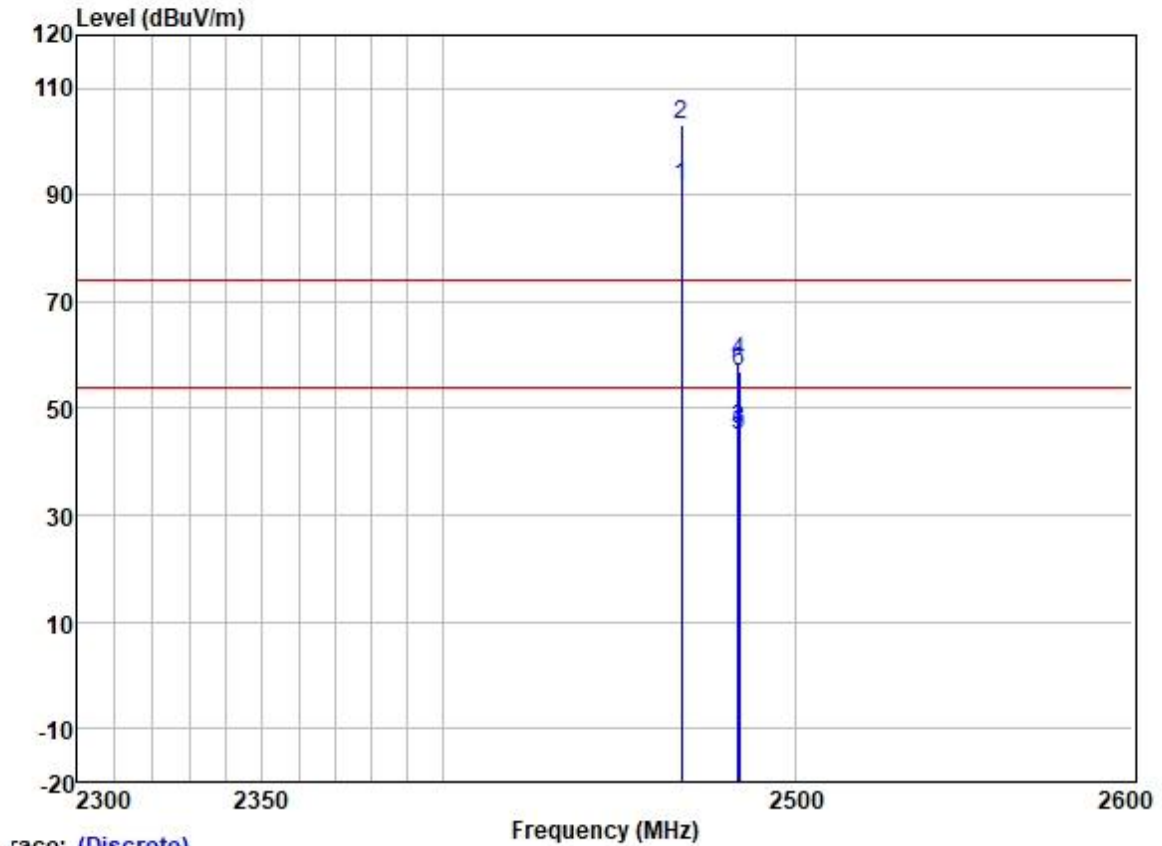

Trace: (Discrete)


		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	*	2467.000	98.20	27.45	3.50	37.57	91.58	54.00	37.58	VERTICAL	Average
2	*	2467.000	109.98	27.45	3.50	37.57	103.36	74.00	29.36	VERTICAL	Peak
3		2483.500	52.46	27.48	3.53	37.57	45.90	54.00	-8.10	VERTICAL	Average
4		2483.500	65.26	27.48	3.53	37.57	58.70	74.00	-15.30	VERTICAL	Peak
5		2483.790	51.36	27.48	3.53	37.57	44.80	54.00	-9.20	VERTICAL	Average
6		2483.890	63.34	27.48	3.53	37.57	56.78	74.00	-17.22	VERTICAL	Peak

Test Mode: 16; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:13

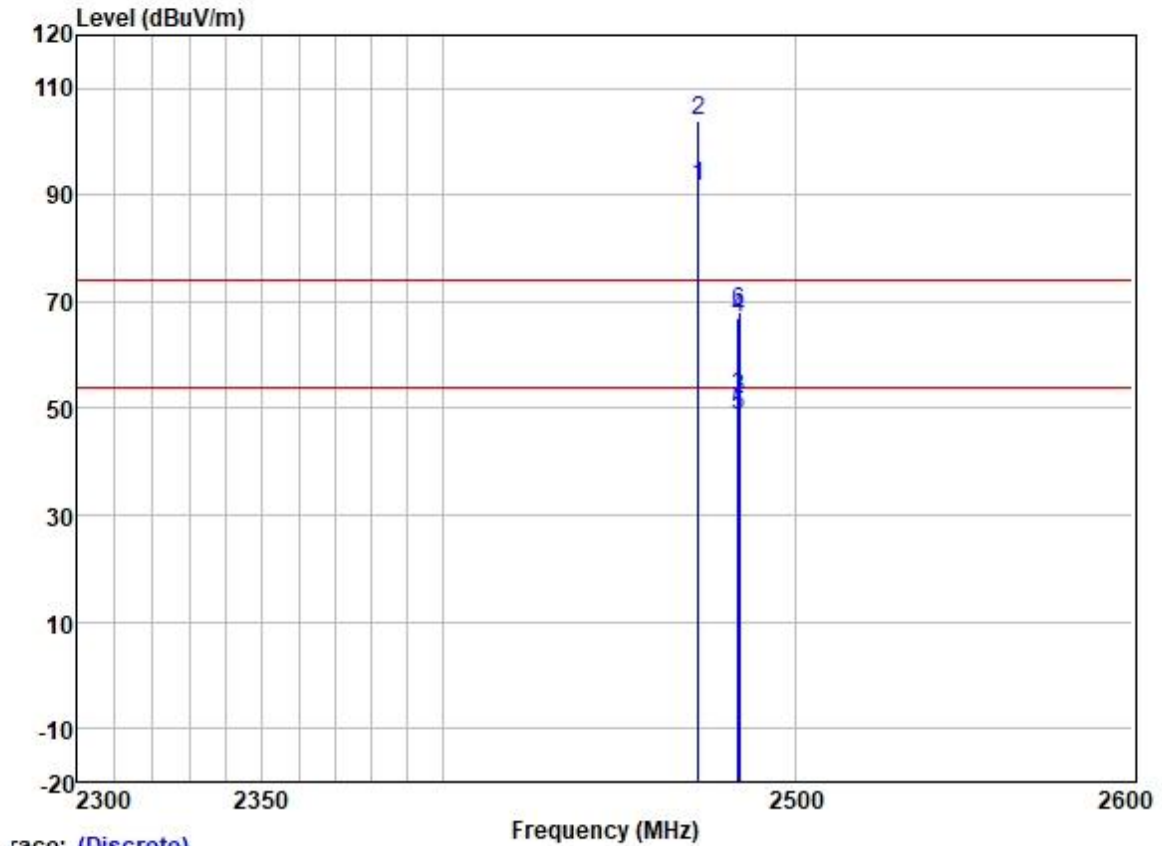

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2472.000	98.06	27.46	3.55	37.57	91.50	54.00	37.50	HORIZONTAL Average
2	*	2472.000	110.48	27.46	3.55	37.57	103.92	74.00	29.92	HORIZONTAL Peak
3		2483.500	58.77	27.48	3.53	37.57	52.21	54.00	-1.79	HORIZONTAL Average
4		2483.500	73.45	27.48	3.53	37.57	66.89	74.00	-7.11	HORIZONTAL Peak
5		2483.790	55.23	27.48	3.53	37.57	48.67	54.00	-5.33	HORIZONTAL Average
6		2483.790	74.81	27.48	3.53	37.57	68.25	74.00	-5.75	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:13

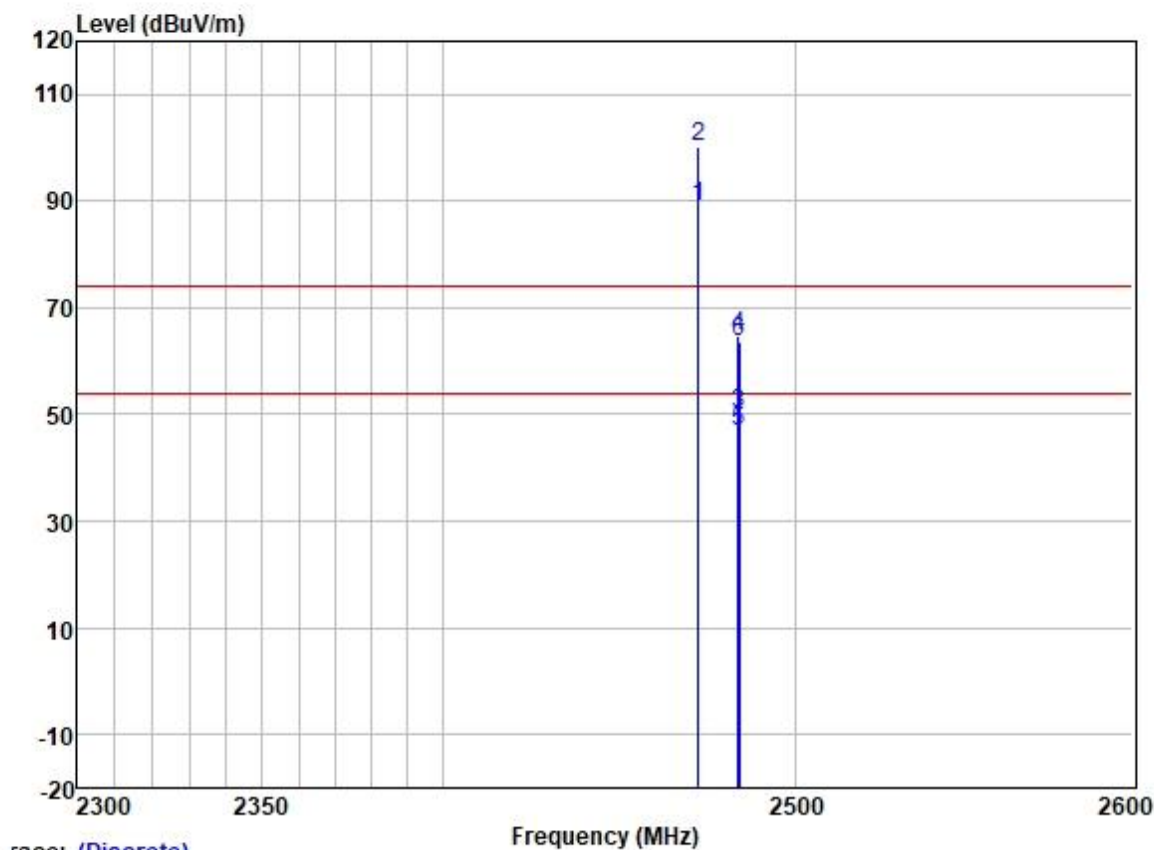

race: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	2472.000	95.55	27.46	3.55	37.57	88.99	54.00	34.99	VERTICAL	Average
2 *	2472.000	106.80	27.46	3.55	37.57	100.24	74.00	26.24	VERTICAL	Peak
3	2483.500	56.58	27.48	3.53	37.57	50.02	54.00	-3.98	VERTICAL	Average
4	2483.500	71.33	27.48	3.53	37.57	64.77	74.00	-9.23	VERTICAL	Peak
5	2483.790	53.49	27.48	3.53	37.57	46.93	54.00	-7.07	VERTICAL	Average
6	2483.840	70.18	27.48	3.53	37.57	63.62	74.00	-10.38	VERTICAL	Peak




Unless otherwise agreed in writing this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a dispute from their legal obligations. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443.

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory.


中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Test Mode: 16; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

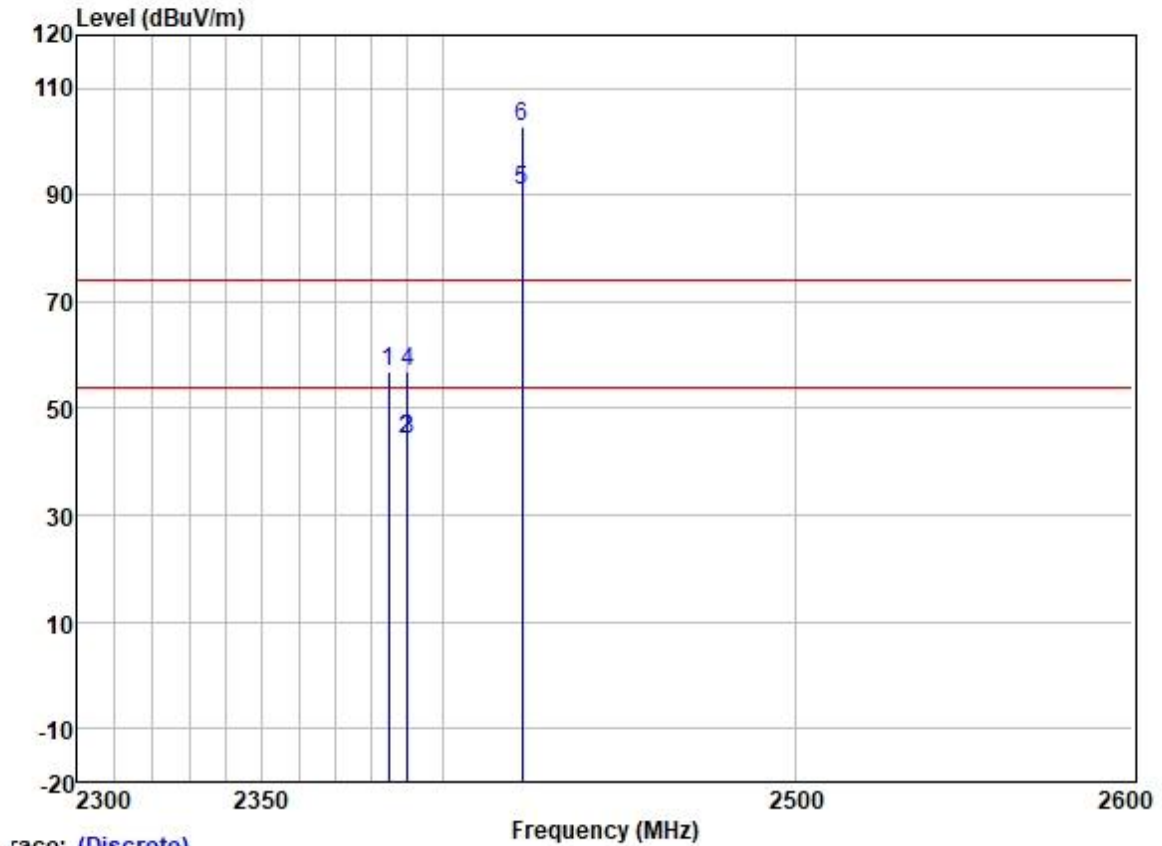

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2384.571	63.72	27.33	3.48	37.60	56.93	74.00	-17.07	HORIZONTAL	Peak
2	2389.677	51.13	27.33	3.48	37.59	44.35	54.00	-9.65	HORIZONTAL	Average
3	2390.000	51.06	27.33	3.48	37.59	44.28	54.00	-9.72	HORIZONTAL	Average
4	2390.000	63.81	27.33	3.48	37.59	57.03	74.00	-16.97	HORIZONTAL	Peak
5 *	2422.000	97.46	27.39	3.45	37.58	90.72	54.00	36.72	HORIZONTAL	Average
6 *	2422.000	109.46	27.39	3.45	37.58	102.72	74.00	28.72	HORIZONTAL	Peak


Test Mode: 16; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

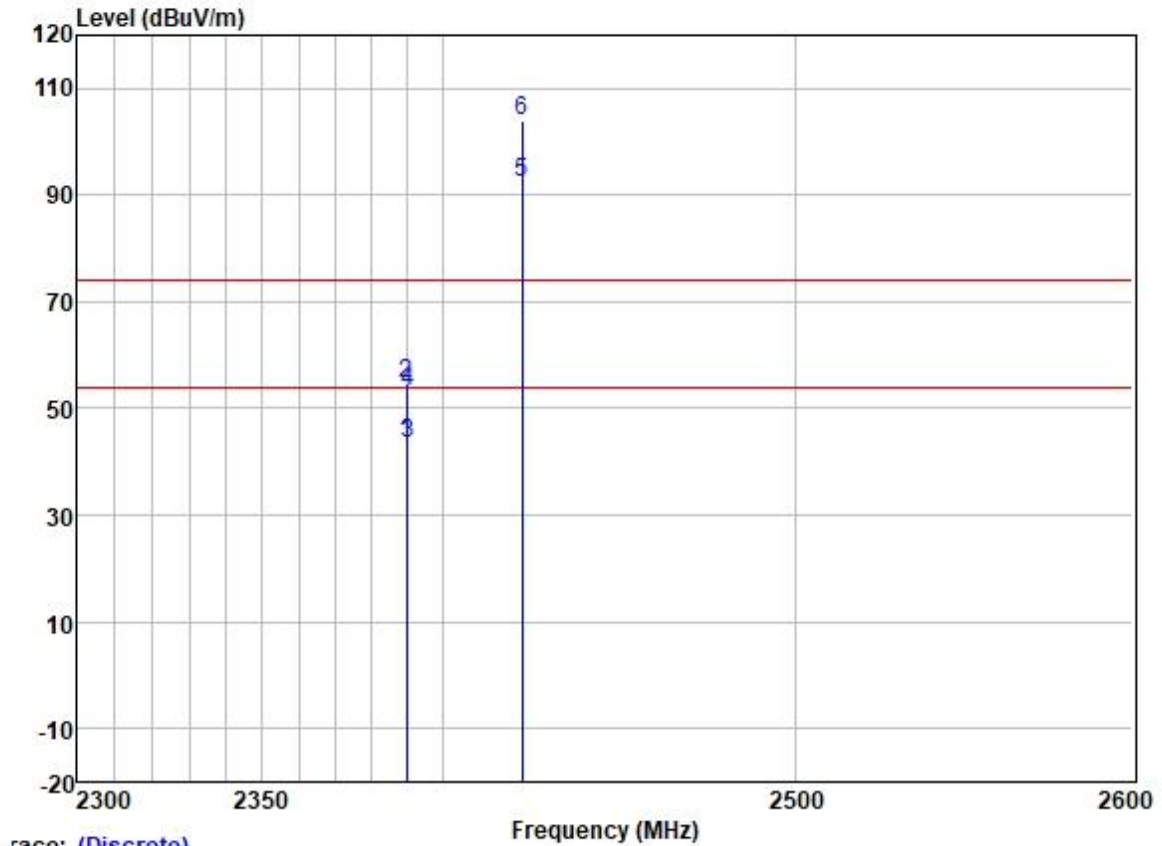

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2389.526	50.41	27.33	3.48	37.59	43.63	54.00	-10.37	VERTICAL	Average
2	2389.526	61.54	27.33	3.48	37.59	54.76	74.00	-19.24	VERTICAL	Peak
3	2390.000	50.20	27.33	3.48	37.59	43.42	54.00	-10.58	VERTICAL	Average
4	2390.000	60.03	27.33	3.48	37.59	53.25	74.00	-20.75	VERTICAL	Peak
5 *	2422.000	99.20	27.39	3.45	37.58	92.46	54.00	38.46	VERTICAL	Average
6 *	2422.000	110.80	27.39	3.45	37.58	104.06	74.00	30.06	VERTICAL	Peak

Test Mode: 16; Polarity: Horizontal; Modulation: 802.11ax; Bandwidth: 40MHz; Channel: 9

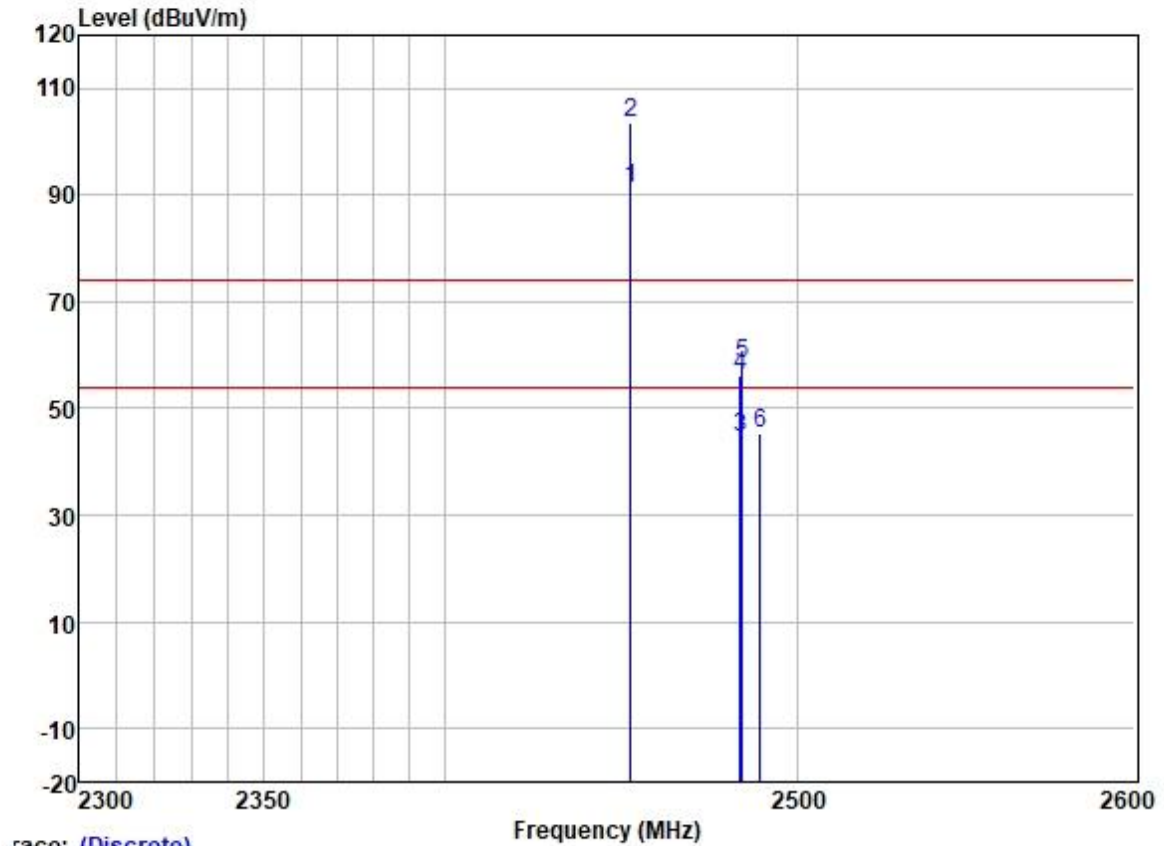

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2452.000	98.11	27.43	3.40	37.58	91.36	54.00	37.36	HORIZONTAL Average
2	*	2452.000	110.31	27.43	3.40	37.58	103.56	74.00	29.56	HORIZONTAL Peak
3		2483.500	51.29	27.48	3.53	37.57	44.73	54.00	-9.27	HORIZONTAL Average
4		2483.500	62.87	27.48	3.53	37.57	56.31	74.00	-17.69	HORIZONTAL Peak
5		2484.147	65.13	27.48	3.53	37.57	58.57	74.00	-15.43	HORIZONTAL Peak
6		2489.302	52.01	27.49	3.47	37.56	45.41	54.00	-8.59	HORIZONTAL Average


Test Mode: 16; Polarity: Vertical; Modulation: 802.11ax; Bandwidth: 40MHz; Channel: 9

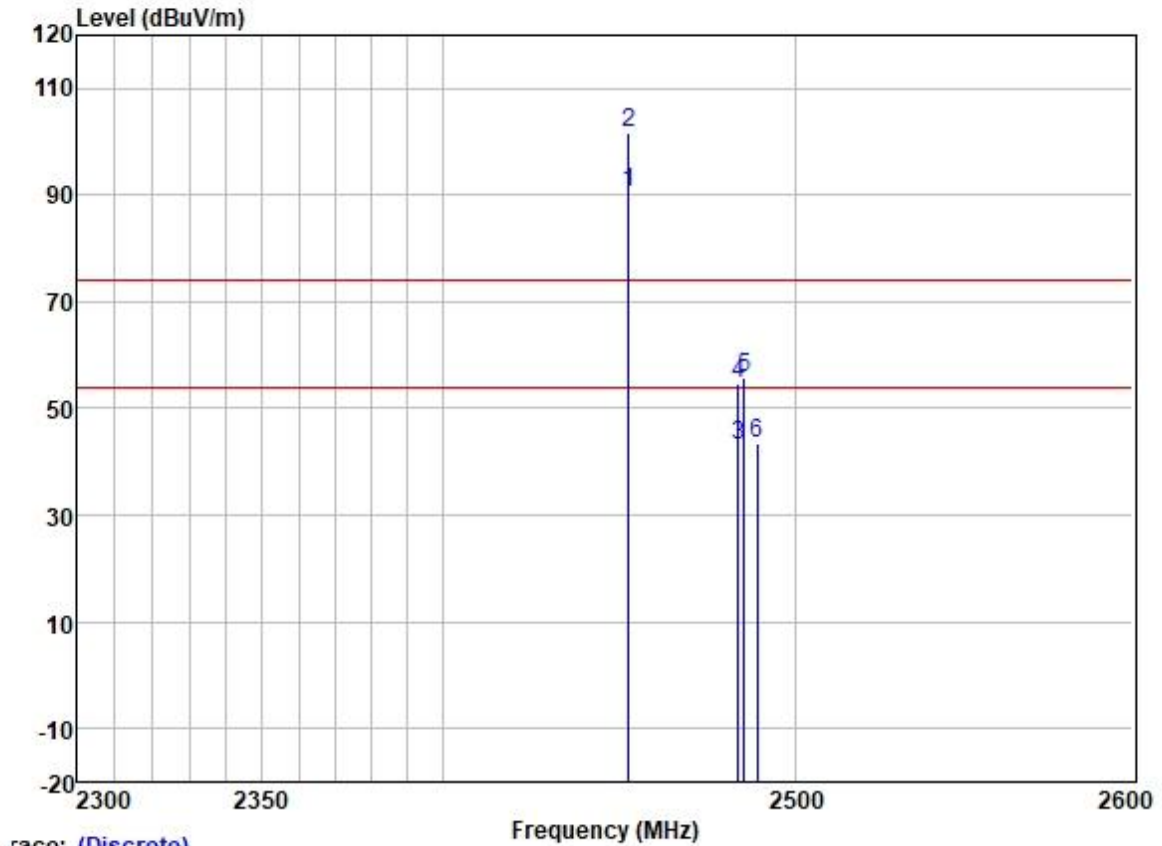

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	2452.000	97.34	27.43	3.40	37.58	90.59	54.00	36.59	VERTICAL	Average
2 *	2452.000	108.59	27.43	3.40	37.58	101.84	74.00	27.84	VERTICAL	Peak
3	2483.500	49.79	27.48	3.53	37.57	43.23	54.00	-10.77	VERTICAL	Average
4	2483.500	61.13	27.48	3.53	37.57	54.57	74.00	-19.43	VERTICAL	Peak
5	2485.205	62.35	27.48	3.53	37.57	55.79	74.00	-18.21	VERTICAL	Peak
6	2488.807	50.03	27.48	3.53	37.56	43.48	54.00	-10.52	VERTICAL	Average


Test Mode: 16; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:10

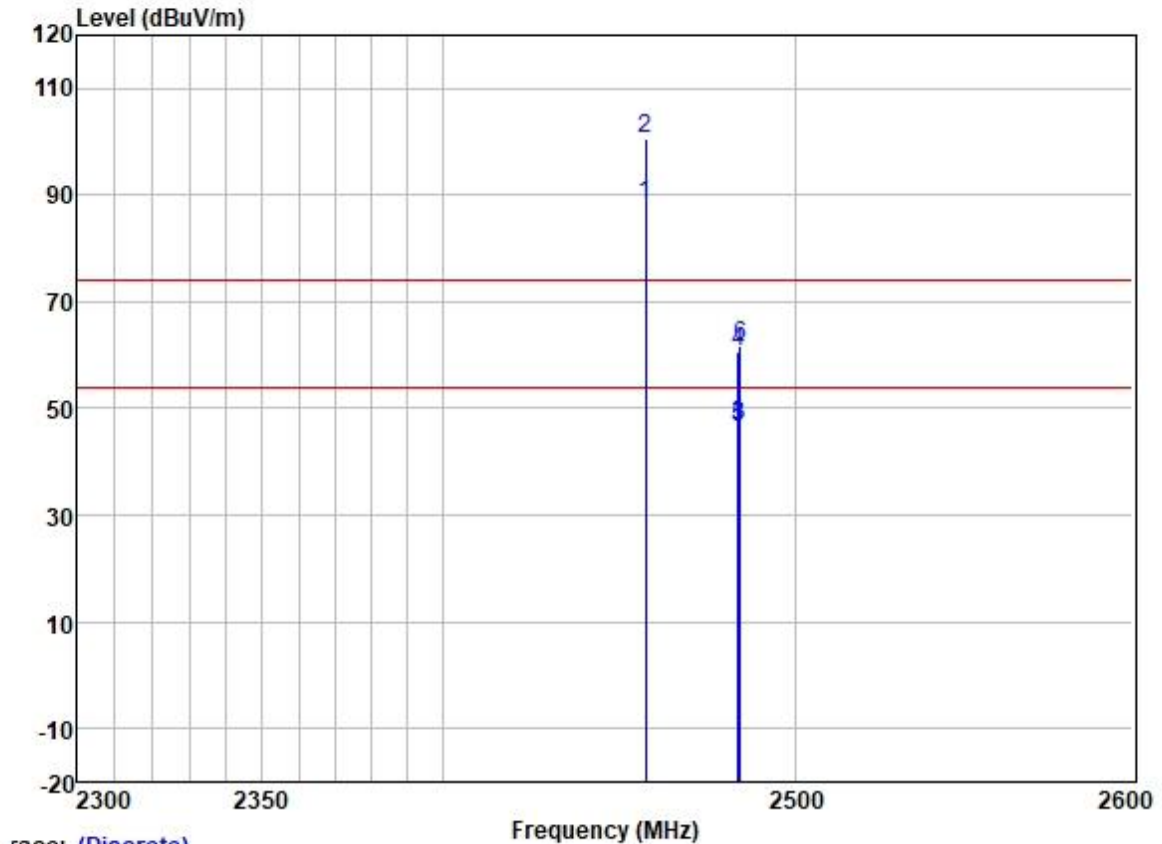

Trace: (Discrete)

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	*	2457.000	94.97	27.44	3.45	37.58	88.28	54.00	34.28	HORIZONTAL Average
2	*	2457.000	107.26	27.44	3.45	37.58	100.57	74.00	26.57	HORIZONTAL Peak
3		2483.500	53.48	27.48	3.53	37.57	46.92	54.00	-7.08	HORIZONTAL Average
4		2483.500	67.07	27.48	3.53	37.57	60.51	74.00	-13.49	HORIZONTAL Peak
5		2483.865	52.89	27.48	3.53	37.57	46.33	54.00	-7.67	HORIZONTAL Average
6		2483.935	68.18	27.48	3.53	37.57	61.62	74.00	-12.38	HORIZONTAL Peak


Test Mode: 16; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:10

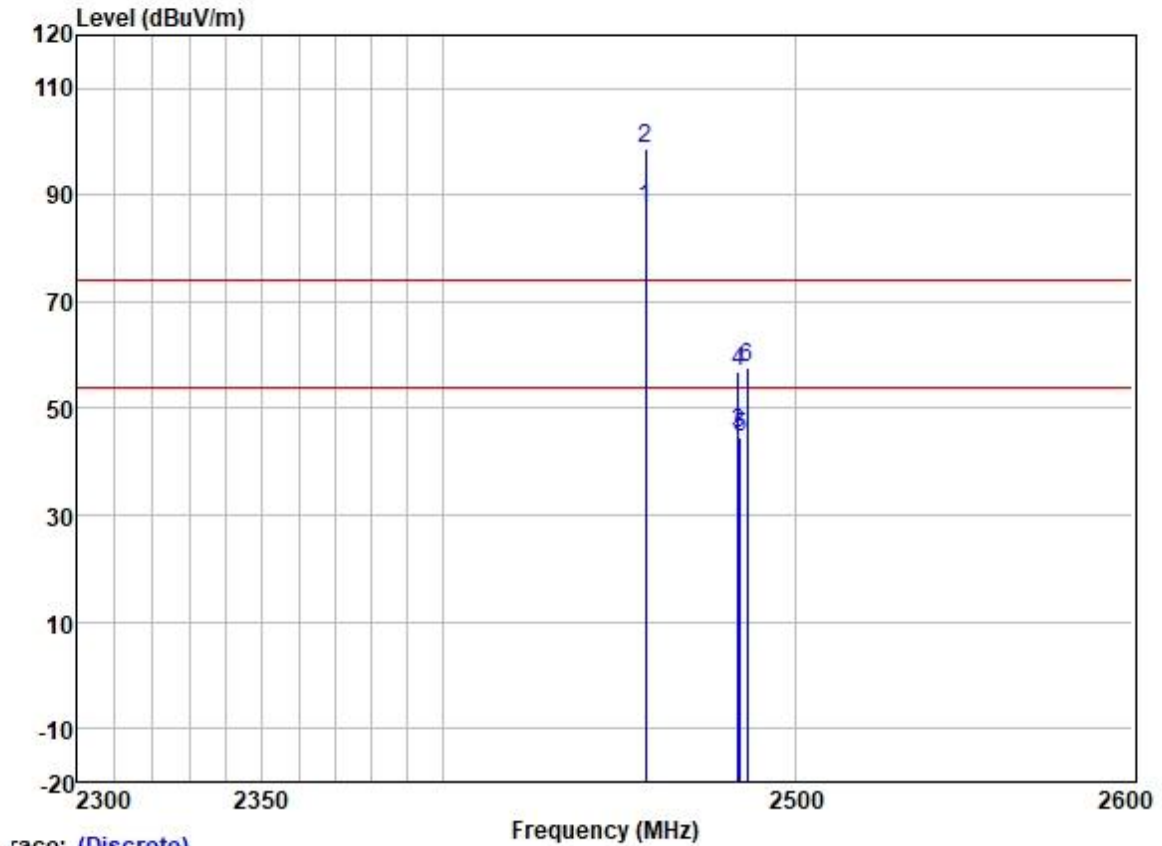

race: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	2457.000	94.04	27.44	3.45	37.58	87.35	54.00	33.35	VERTICAL	Average
2 *	2457.000	105.59	27.44	3.45	37.58	98.90	74.00	24.90	VERTICAL	Peak
3	2483.500	51.85	27.48	3.53	37.57	45.29	54.00	-8.71	VERTICAL	Average
4	2483.500	63.63	27.48	3.53	37.57	57.07	74.00	-16.93	VERTICAL	Peak
5	2483.935	51.15	27.48	3.53	37.57	44.59	54.00	-9.41	VERTICAL	Average
6	2485.911	64.35	27.48	3.53	37.57	57.79	74.00	-16.21	VERTICAL	Peak


Test Mode: 16; Polarity: Horizontal; Modulation: 802.11ax; Bandwidth: 40MHz; Channel: 11

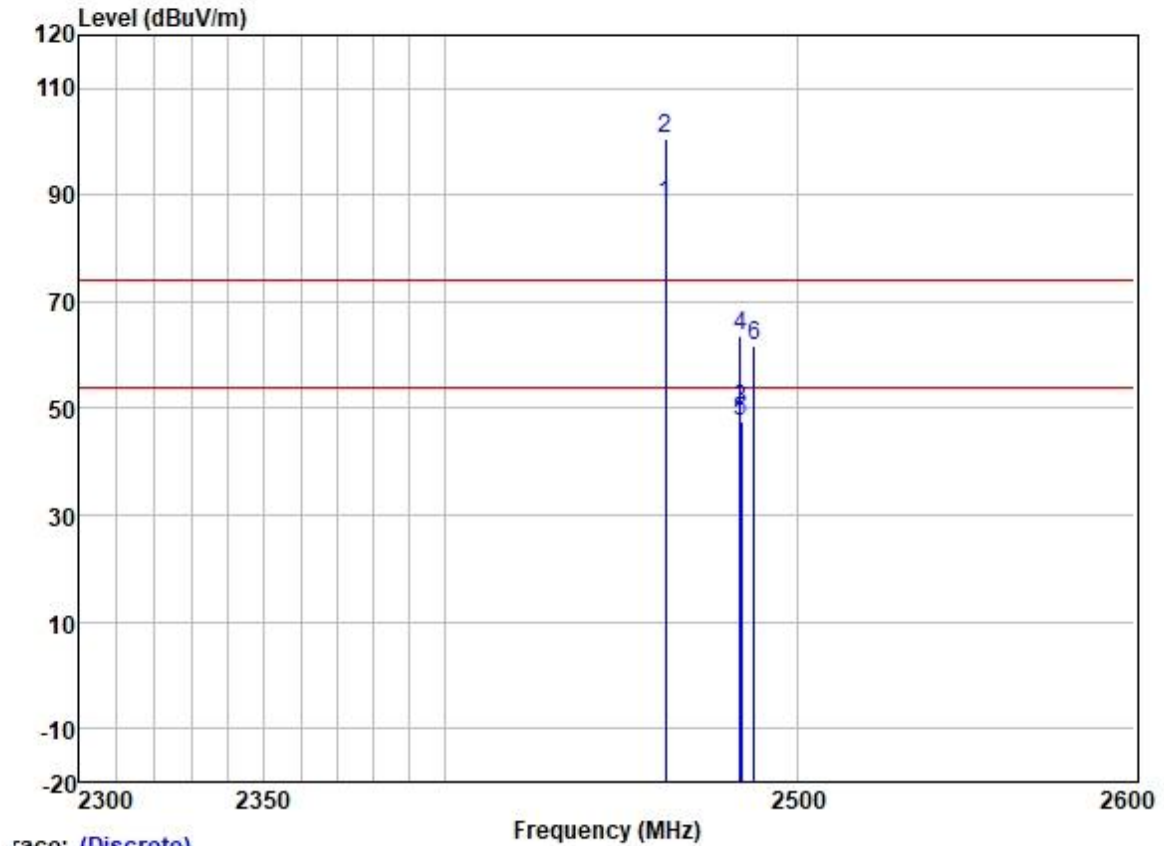

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	2462.000	95.01	27.45	3.50	37.58	88.38	54.00	34.38	HORIZONTAL	Average
2 *	2462.000	107.32	27.45	3.50	37.58	100.69	74.00	26.69	HORIZONTAL	Peak
3	2483.500	56.21	27.48	3.53	37.57	49.65	54.00	-4.35	HORIZONTAL	Average
4	2483.500	70.18	27.48	3.53	37.57	63.62	74.00	-10.38	HORIZONTAL	Peak
5	2483.865	53.95	27.48	3.53	37.57	47.39	54.00	-6.61	HORIZONTAL	Average
6	2487.535	68.37	27.48	3.53	37.56	61.82	74.00	-12.18	HORIZONTAL	Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:11

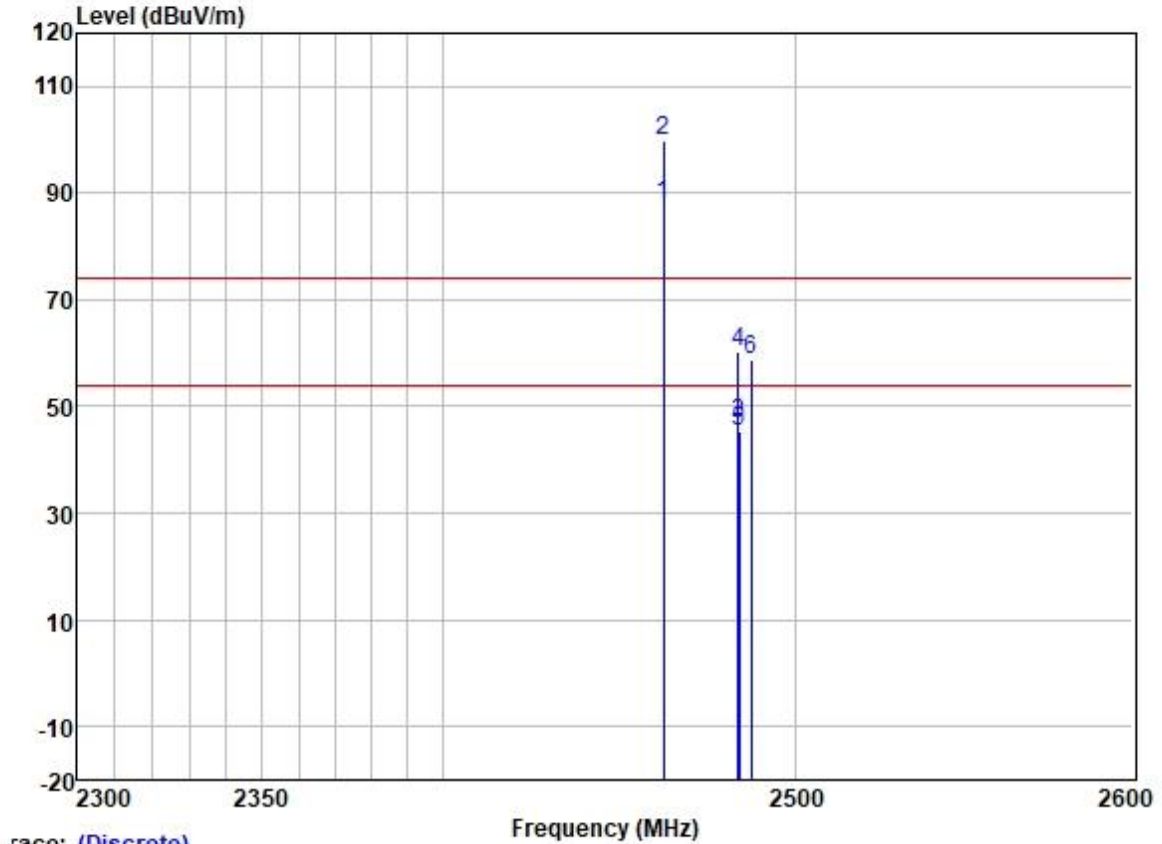

Trace: (Discrete)

		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	*	2462.000	94.38	27.45	3.50	37.58	87.75	54.00	33.75	VERTICAL	Average
2	*	2462.000	106.55	27.45	3.50	37.58	99.92	74.00	25.92	VERTICAL	Peak
3		2483.500	53.55	27.48	3.53	37.57	46.99	54.00	-7.01	VERTICAL	Average
4		2483.500	66.90	27.48	3.53	37.57	60.34	74.00	-13.66	VERTICAL	Peak
5		2483.865	52.06	27.48	3.53	37.57	45.50	54.00	-8.50	VERTICAL	Average
6		2487.323	65.38	27.48	3.53	37.57	58.82	74.00	-15.18	VERTICAL	Peak

7.3 Radiated Spurious Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 20.2 °C

Humidity: 45.2 % RH

Atmospheric Pressure: 1015 mbar

7.3.2 Test Mode Description

Pre-scan / Mode
Final test Code

Description**Pre-scan 15**

TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter1).

Final test 16

Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter1).

Pre-scan 30

TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter2).

Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter2).

Pre-scan 31

7.3.3 Test Setup Diagram

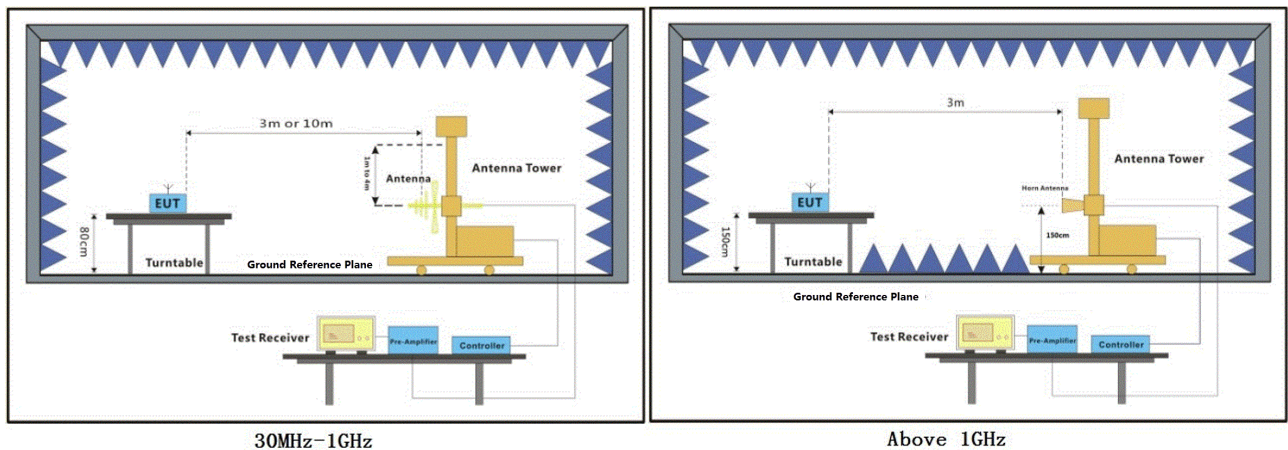

7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1) Through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor


3) Scan from 9kHz to 1 GHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 16; Polarity: Horizontal; Modulation: 802.11b; Bandwidth: 20MHz; Channel: Low

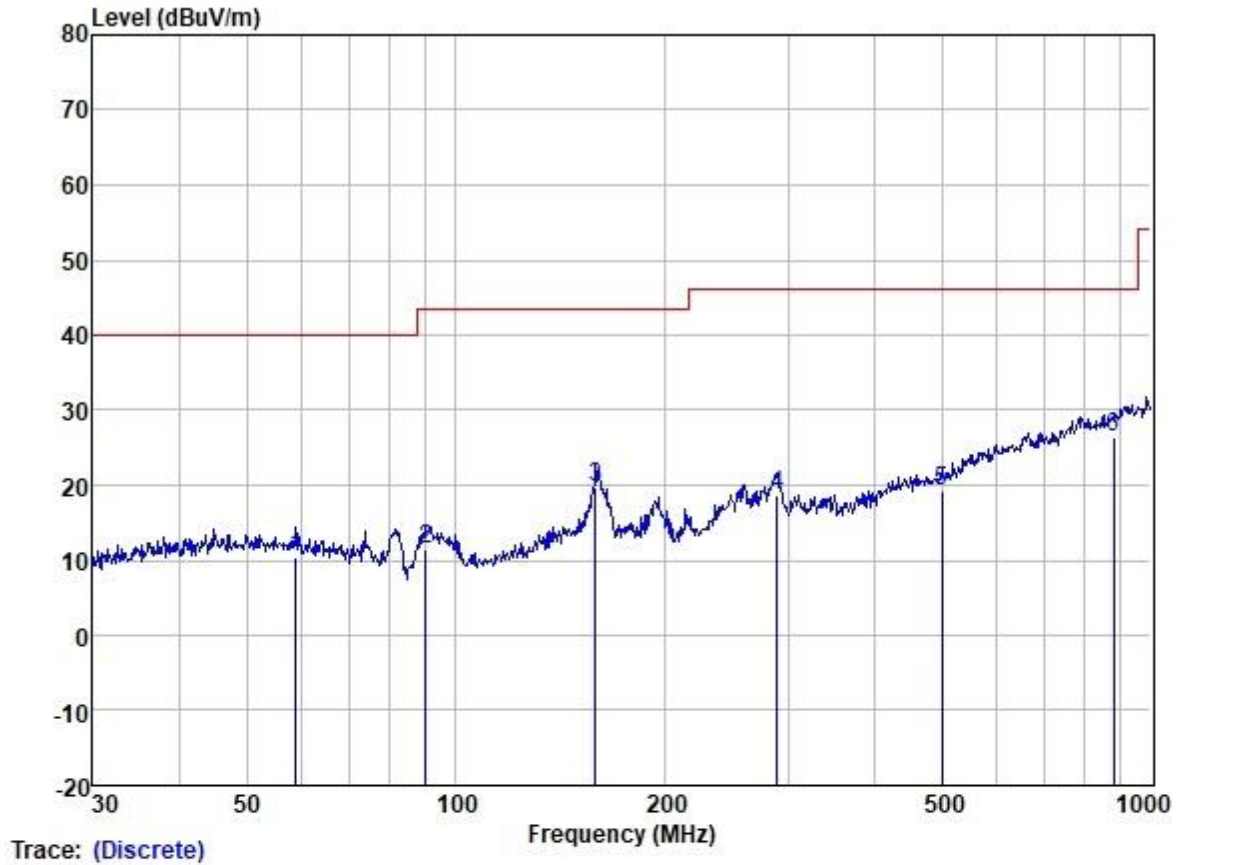

Site : SGS
Job :
Model :
Power :
Test Mode :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	58.819	23.36	13.02	1.24	27.09	10.53	40.00	-29.47	HORIZONTAL	QP
2	90.537	29.27	7.65	1.62	27.01	11.53	43.50	-31.97	HORIZONTAL	QP
3	158.668	30.74	13.36	2.33	26.68	19.75	43.50	-23.75	HORIZONTAL	QP
4	290.017	29.15	12.96	3.12	26.50	18.73	46.00	-27.27	HORIZONTAL	QP
5	499.425	24.92	17.68	4.39	27.90	19.09	46.00	-26.91	HORIZONTAL	QP
6	884.503	24.71	22.75	6.79	27.72	26.53	46.00	-19.47	HORIZONTAL	QP

Test Mode: 16; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

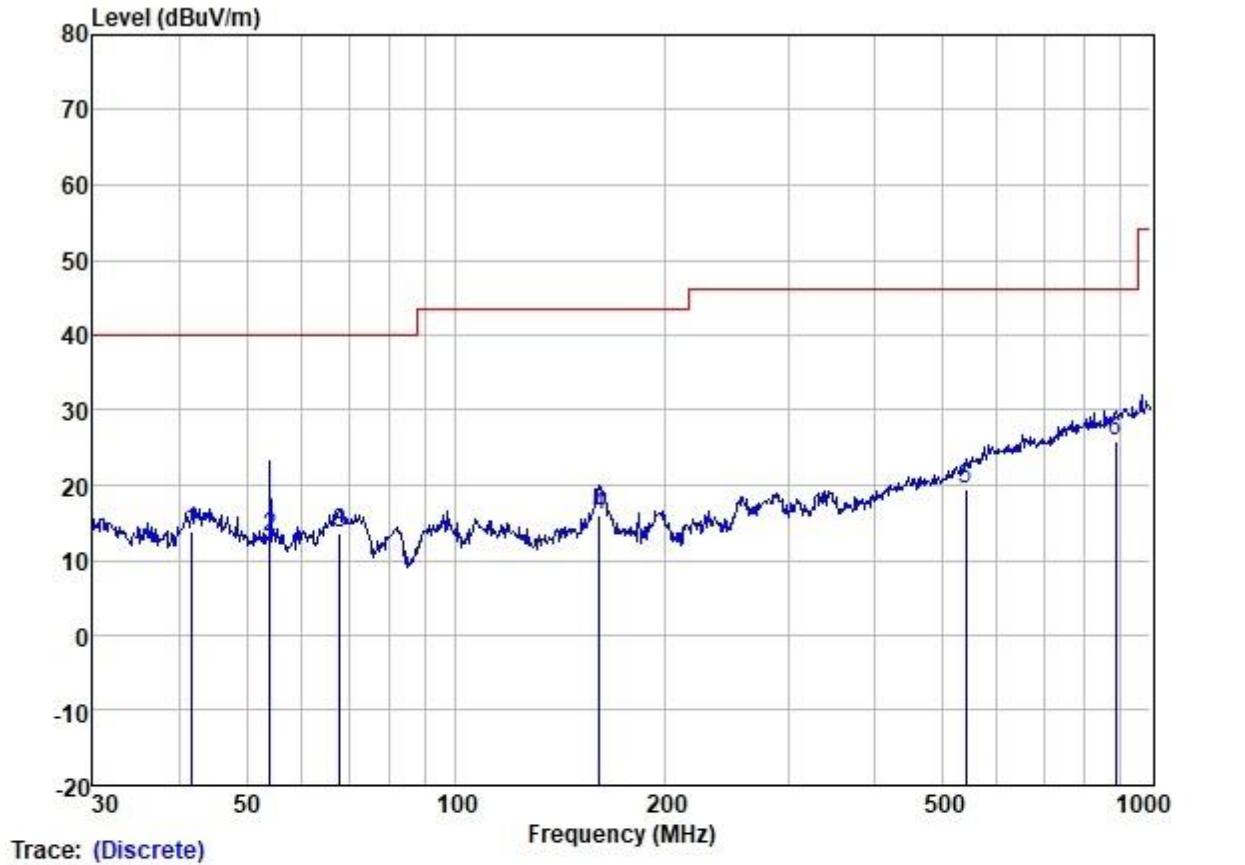

Site : SGS
Job :
Model :
Power :
Test Mode :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	41.713	26.56	13.23	1.11	27.10	13.80	40.00	-26.20	VERTICAL	QP
2	53.882	25.53	13.46	1.18	27.10	13.07	40.00	-26.93	VERTICAL	QP
3	67.913	27.72	11.65	1.39	27.07	13.69	40.00	-26.31	VERTICAL	QP
4	160.909	27.15	13.29	2.34	26.67	16.11	43.50	-27.39	VERTICAL	QP
5	541.373	24.58	18.31	4.70	28.02	19.57	46.00	-26.43	VERTICAL	QP
6	890.728	23.38	23.22	6.86	27.71	25.75	46.00	-20.25	VERTICAL	QP

7.4 Radiated Spurious Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 20.2 °C

Humidity: 53.3 % RH

Atmospheric Pressure: 1015 mbar

7.4.2 Test Mode Description

Pre-scan / Mode
Final test Code

Description

Pre-scan 15

TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter1).

Final test 16

Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter1).

Pre-scan 30

TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter2).

Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT20); data rate @ HT0/HT8 is the worst case of IEEE 802.11n(HT40); data rate @ HE0 is the worst case of IEEE 802.11ax(HT20); data rate @ HE0 is the worst case of IEEE 802.11ax(HT40). Only the data of worst case is recorded in the report(Adapter2).

Pre-scan 31

7.4.3 Test Setup Diagram

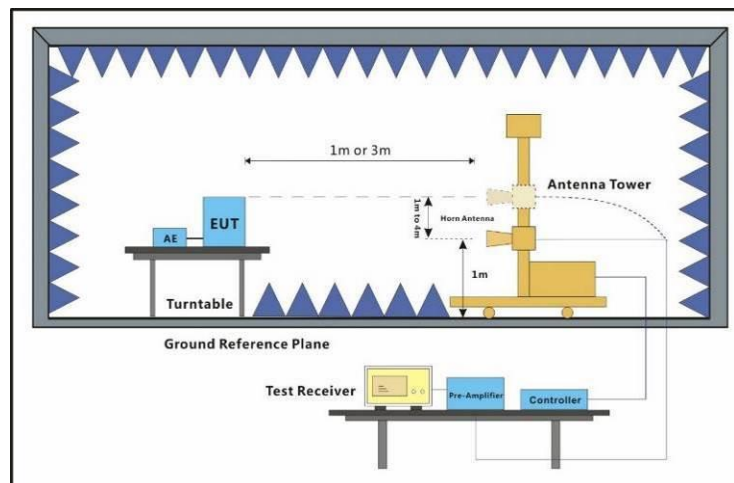

7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) The field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


4) For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 16; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

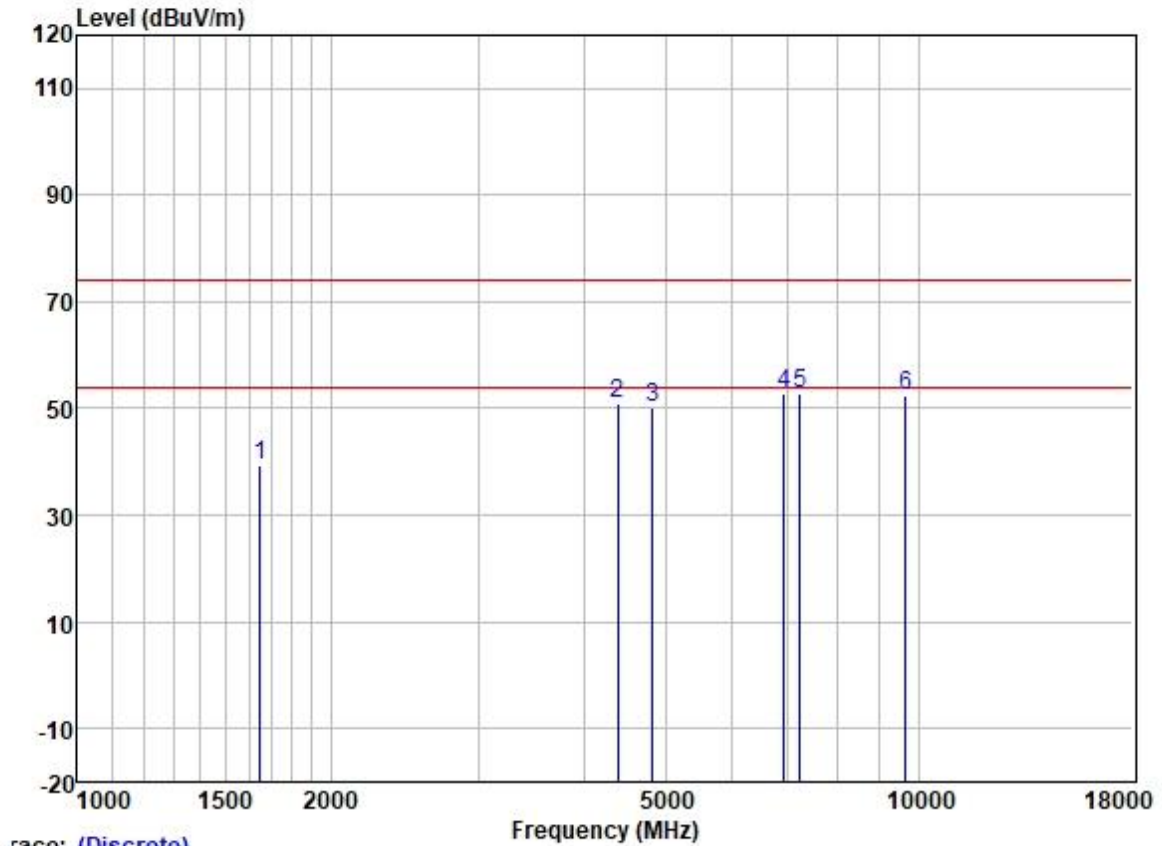

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1648.778	48.96	25.63	2.80	37.93	39.46	74.00	-34.54	HORIZONTAL	Peak
2	4392.376	52.53	30.66	4.70	36.81	51.08	74.00	-22.92	HORIZONTAL	Peak
3	4824.000	50.14	31.45	5.42	36.83	50.18	74.00	-23.82	HORIZONTAL	Peak
4	6914.763	49.18	34.89	5.81	37.19	52.69	74.00	-21.31	HORIZONTAL	Peak
5	7236.000	48.38	35.70	6.03	37.39	52.72	74.00	-21.28	HORIZONTAL	Peak
6	9648.000	44.52	38.40	7.06	37.42	52.56	74.00	-21.44	HORIZONTAL	Peak


Test Mode: 16; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

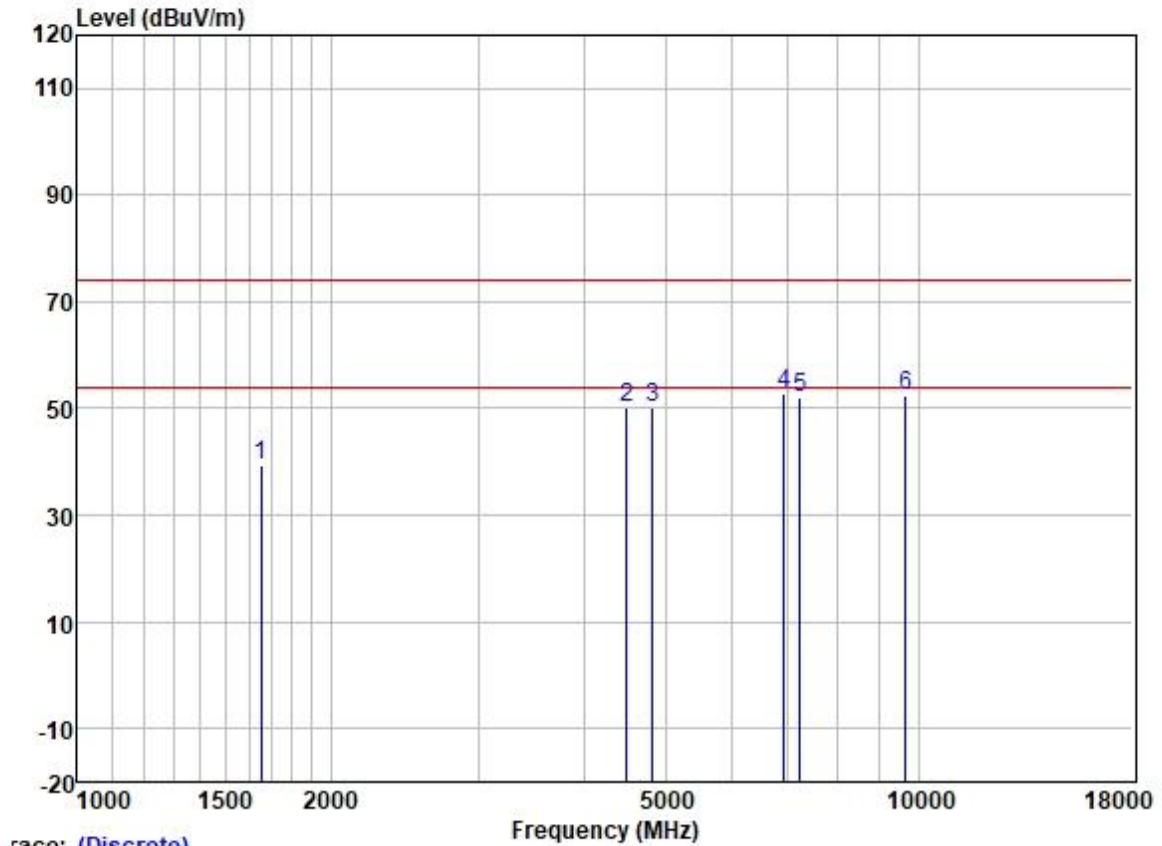

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1653.550	48.82	25.64	2.80	37.93	39.33	74.00	-34.67	VERTICAL	Peak
2	4495.125	51.08	30.80	5.05	36.82	50.11	74.00	-23.89	VERTICAL	Peak
3	4824.000	50.29	31.45	5.42	36.83	50.33	74.00	-23.67	VERTICAL	Peak
4	6914.763	49.37	34.89	5.81	37.19	52.88	74.00	-21.12	VERTICAL	Peak
5	7236.000	47.77	35.70	6.03	37.39	52.11	74.00	-21.89	VERTICAL	Peak
6	9648.000	44.54	38.40	7.06	37.42	52.58	74.00	-21.42	VERTICAL	Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

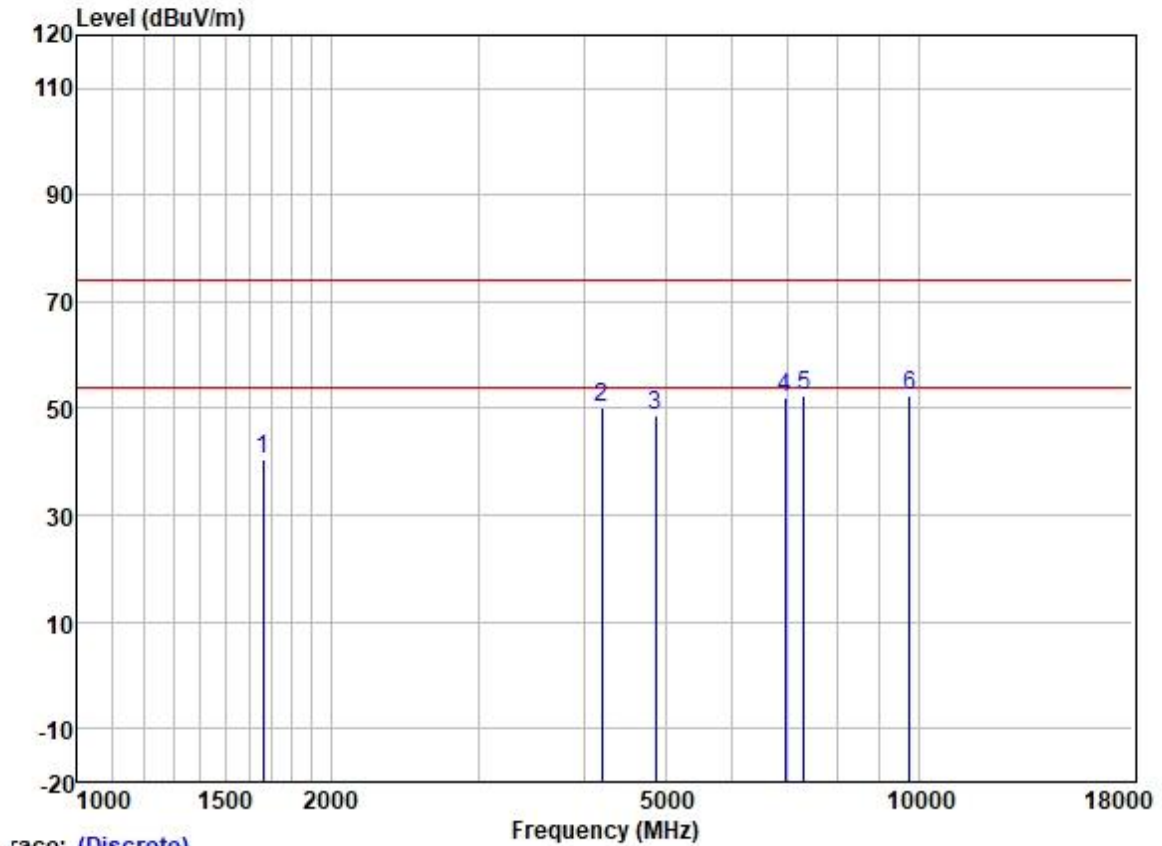

Trace: (Discrete)


		ReadAntenna		Cable	Preamp		Limit	Over	Pol/Phase	Remark
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1663.137	49.80	25.65	2.80	37.91	40.34	74.00	-33.66	HORIZONTAL	Peak
2	4206.011	52.28	30.18	4.60	36.81	50.25	74.00	-23.75	HORIZONTAL	Peak
3	4874.000	48.61	31.54	5.50	36.84	48.81	74.00	-25.19	HORIZONTAL	Peak
4	6934.778	48.56	34.92	5.81	37.19	52.10	74.00	-21.90	HORIZONTAL	Peak
5	7311.000	47.68	35.93	6.11	37.42	52.30	74.00	-21.70	HORIZONTAL	Peak
6	9748.000	44.31	38.50	7.02	37.41	52.42	74.00	-21.58	HORIZONTAL	Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

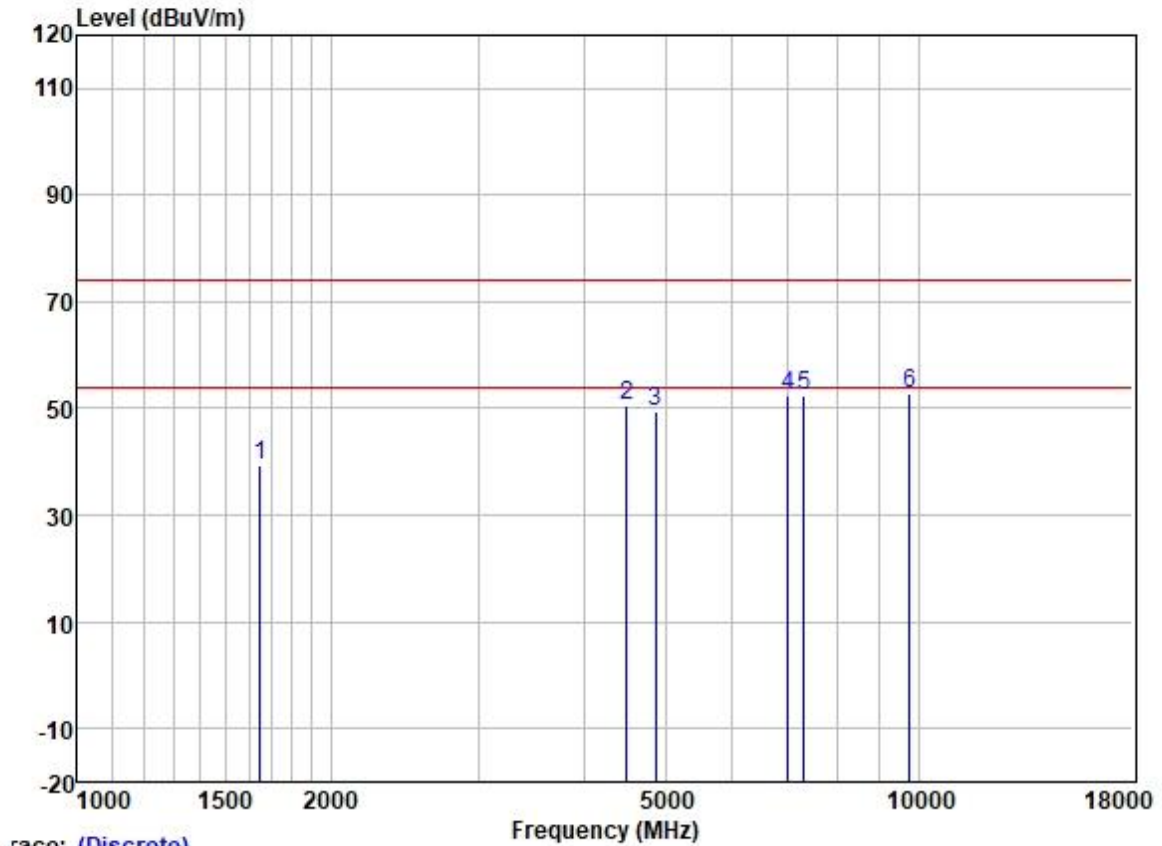

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1648.778	48.99	25.63	2.80	37.93	39.49	74.00	-34.51	VERTICAL	Peak
2	4495.125	51.70	30.80	5.05	36.82	50.73	74.00	-23.27	VERTICAL	Peak
3	4874.000	49.26	31.54	5.50	36.84	49.46	74.00	-24.54	VERTICAL	Peak
4	6995.172	48.91	35.00	5.81	37.25	52.47	74.00	-21.53	VERTICAL	Peak
5	7311.000	47.87	35.93	6.11	37.42	52.49	74.00	-21.51	VERTICAL	Peak
6	9748.000	44.60	38.50	7.02	37.41	52.71	74.00	-21.29	VERTICAL	Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:11

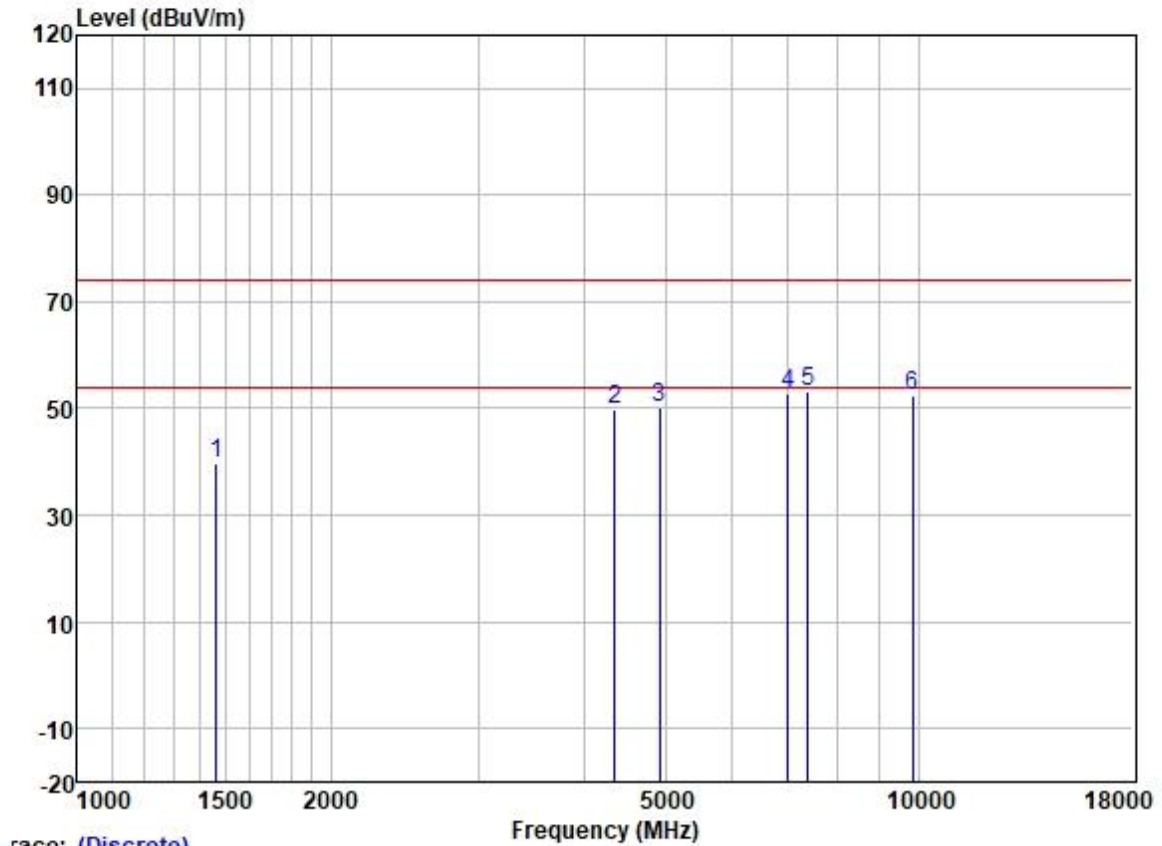

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1464.522	49.47	25.47	2.74	38.13	39.55	74.00	-34.45	HORIZONTAL Peak
2	4354.454	51.21	30.59	4.68	36.81	49.67	74.00	-24.33	HORIZONTAL Peak
3	4924.000	49.64	31.62	5.60	36.84	50.02	74.00	-23.98	HORIZONTAL Peak
4	6995.172	49.16	35.00	5.81	37.25	52.72	74.00	-21.28	HORIZONTAL Peak
5	7386.000	48.08	36.17	6.19	37.45	52.99	74.00	-21.01	HORIZONTAL Peak
6	9848.000	44.19	38.58	6.99	37.41	52.35	74.00	-21.65	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:11

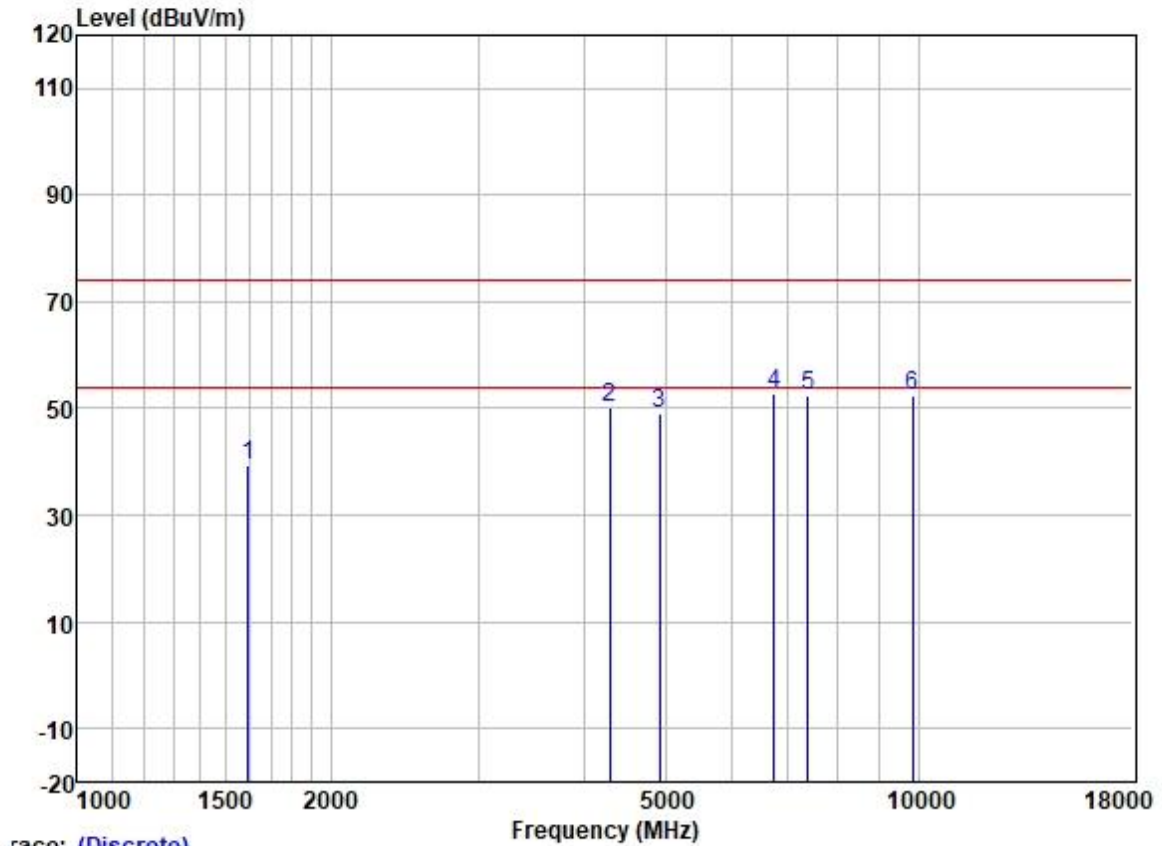


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1597.181	48.78	25.58	2.80	37.98	39.18	74.00	-34.82	VERTICAL	Peak
2	4291.977	52.04	30.45	4.64	36.81	50.32	74.00	-23.68	VERTICAL	Peak
3	4924.000	48.63	31.62	5.60	36.84	49.01	74.00	-24.99	VERTICAL	Peak
4	6737.207	49.54	34.50	5.82	37.09	52.77	74.00	-21.23	VERTICAL	Peak
5	7386.000	47.50	36.17	6.19	37.45	52.41	74.00	-21.59	VERTICAL	Peak
6	9848.000	44.17	38.58	6.99	37.41	52.33	74.00	-21.67	VERTICAL	Peak

Test Mode: 16; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:12

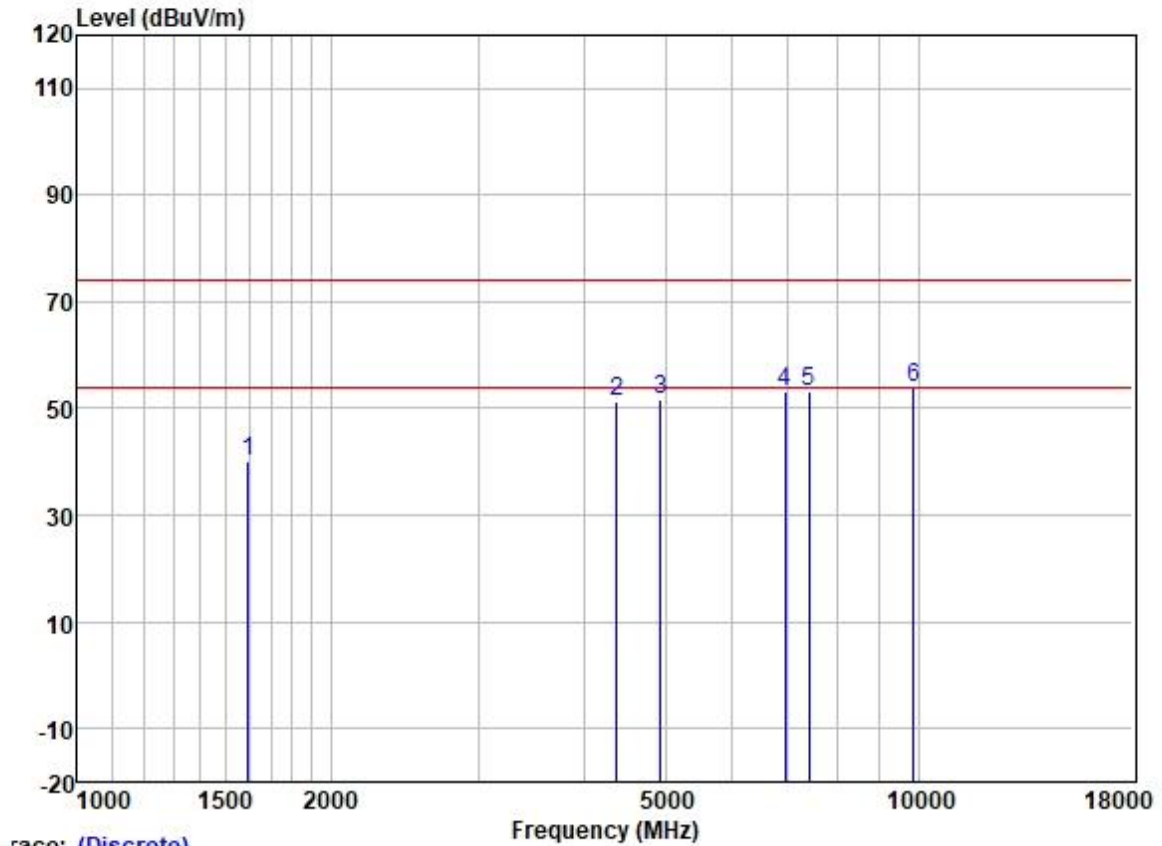

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1597.181	49.77	25.58	2.80	37.98	40.17	74.00	-33.83	HORIZONTAL	Peak
2	4379.699	52.71	30.64	4.69	36.81	51.23	74.00	-22.77	HORIZONTAL	Peak
3	4934.000	51.39	31.62	5.60	36.84	51.77	74.00	-22.23	HORIZONTAL	Peak
4	6934.778	49.59	34.92	5.81	37.19	53.13	74.00	-20.87	HORIZONTAL	Peak
5	7401.000	48.15	36.22	6.20	37.46	53.11	74.00	-20.89	HORIZONTAL	Peak
6	9868.000	45.80	38.60	6.98	37.41	53.97	74.00	-20.03	HORIZONTAL	Peak


Test Mode: 16; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:12

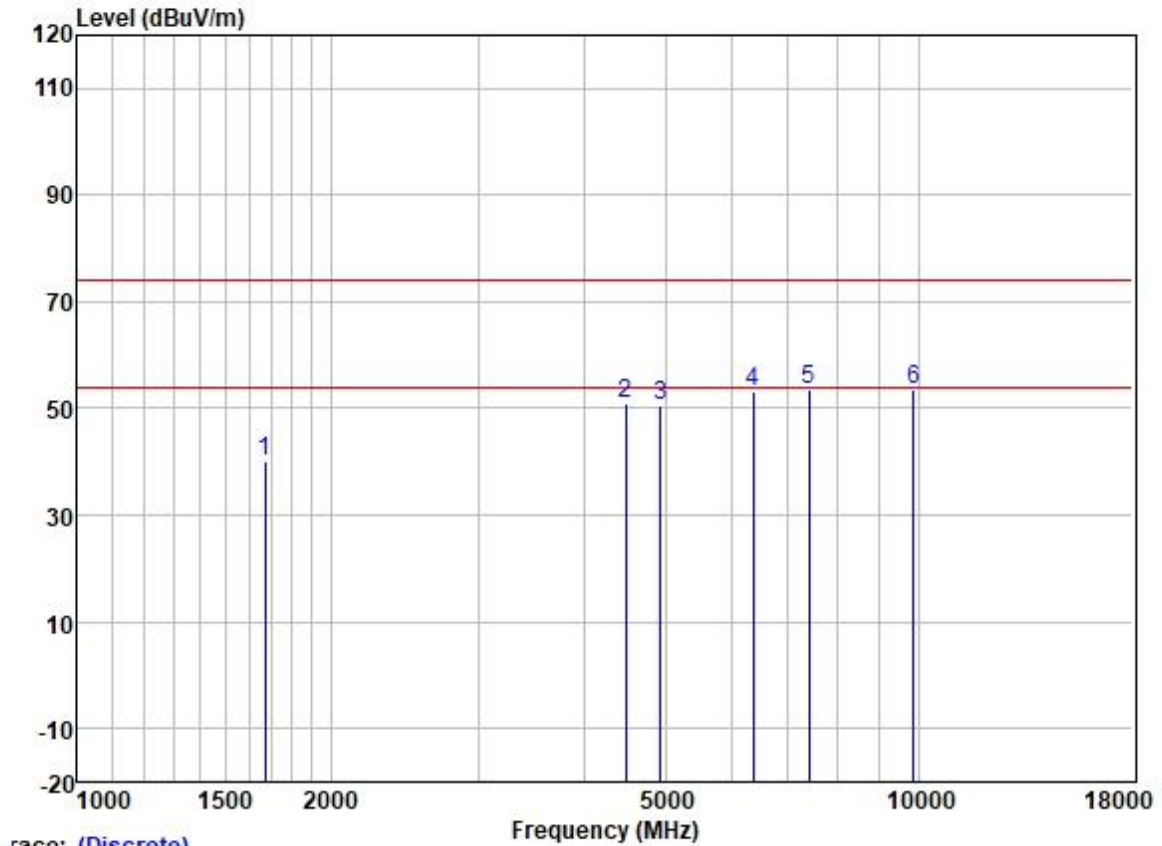

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1672.779	49.52	25.67	2.80	37.91	40.08	74.00	-33.92	VERTICAL	Peak
2	4482.150	51.92	30.78	4.99	36.81	50.88	74.00	-23.12	VERTICAL	Peak
3	4934.000	50.20	31.62	5.60	36.84	50.58	74.00	-23.42	VERTICAL	Peak
4	6358.789	50.76	33.63	5.92	36.97	53.34	74.00	-20.66	VERTICAL	Peak
5	7401.000	48.57	36.22	6.20	37.46	53.53	74.00	-20.47	VERTICAL	Peak
6	9868.000	45.36	38.60	6.98	37.41	53.53	74.00	-20.47	VERTICAL	Peak

Test Mode: 16; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:13

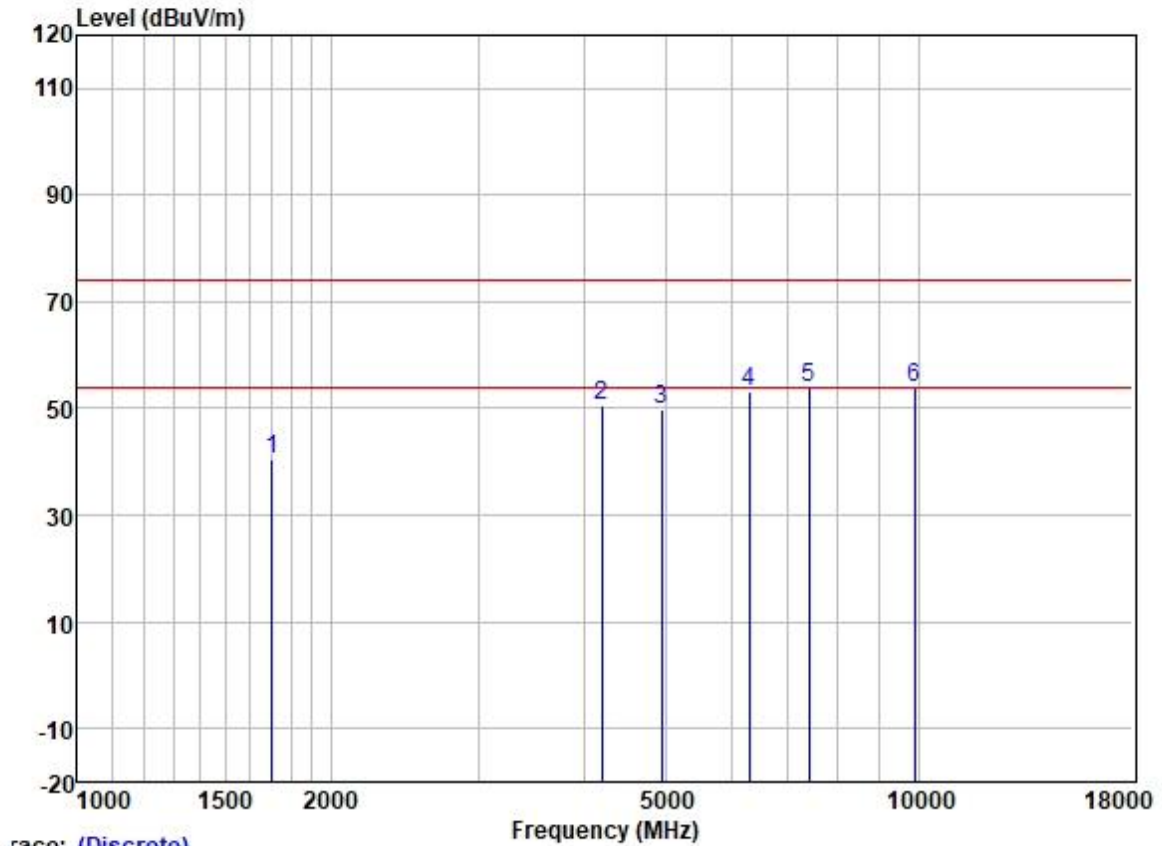

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1702.042	49.84	25.72	2.80	37.89	40.47	74.00	-33.53	HORIZONTAL	Peak
2	4206.011	52.60	30.18	4.60	36.81	50.57	74.00	-23.43	HORIZONTAL	Peak
3	4944.000	49.26	31.64	5.62	36.84	49.68	74.00	-24.32	HORIZONTAL	Peak
4	6285.695	50.82	33.37	5.98	36.95	53.22	74.00	-20.78	HORIZONTAL	Peak
5	7416.000	48.88	36.22	6.20	37.47	53.83	74.00	-20.17	HORIZONTAL	Peak
6	9888.000	45.55	38.63	6.97	37.41	53.74	74.00	-20.26	HORIZONTAL	Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:13

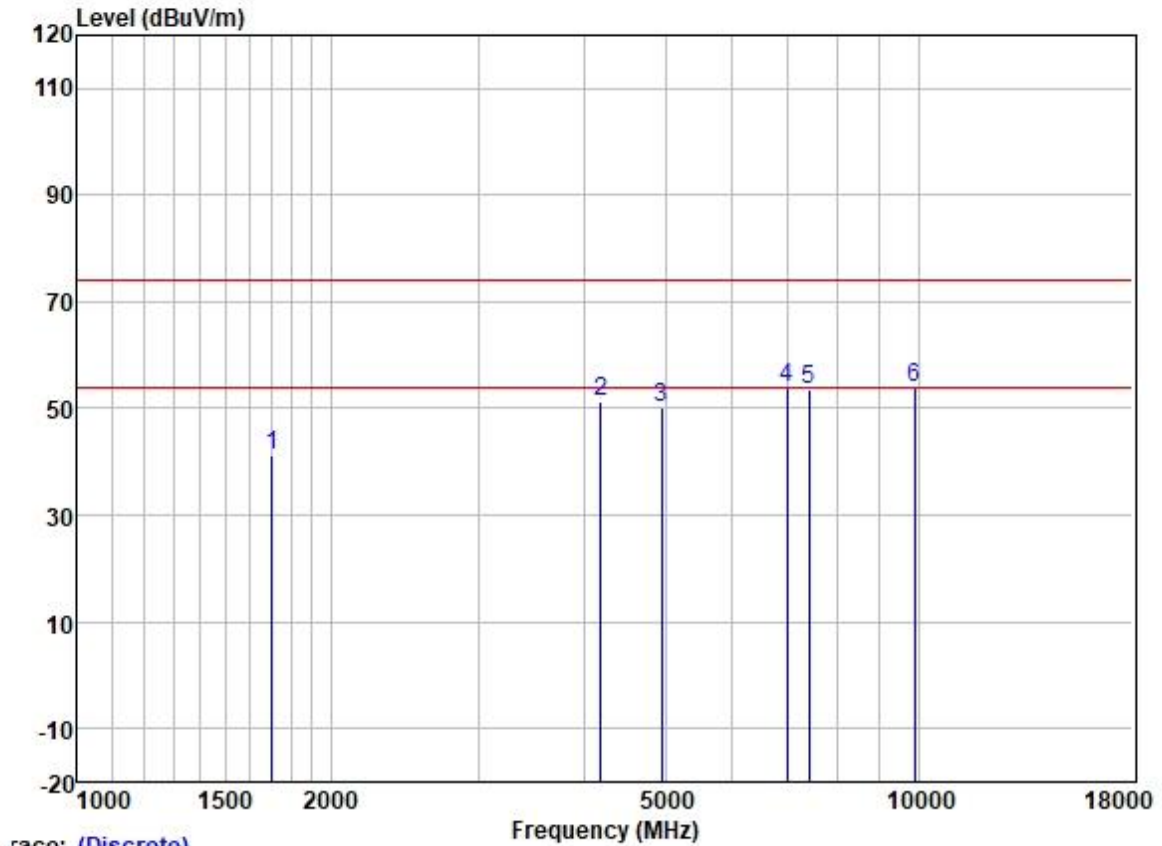

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1702.042	50.45	25.72	2.80	37.89	41.08	74.00	-32.92	VERTICAL	Peak
2	4193.872	53.19	30.15	4.60	36.81	51.13	74.00	-22.87	VERTICAL	Peak
3	4944.000	49.88	31.64	5.62	36.84	50.30	74.00	-23.70	VERTICAL	Peak
4	6974.982	50.19	34.97	5.81	37.23	53.74	74.00	-20.26	VERTICAL	Peak
5	7416.000	48.51	36.22	6.20	37.47	53.46	74.00	-20.54	VERTICAL	Peak
6	9888.000	45.70	38.63	6.97	37.41	53.89	74.00	-20.11	VERTICAL	Peak