

Appendix B

Detailed Test Results

1. LTE
LTE Band 2
LTE Band 4
LTE Band 5
LTE Band 12
LTE Band 14
LTE Band 17
LTE Band 30
LTE Band 48
LTE Band 66
2. WIFI
WIFI 2.4G
WIFI 5G
WIFI 6E
PD
3. BT
BT

Test Laboratory: SGS-SAR Lab

DT382WH LTE Band 2 20M QPSK 50RB0 18900 CH Top side 0mm

DUT: DT382WH; Type: Rugged Tablet; Serial: 038WW25172062

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: HSL1950;Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.418 \text{ S/m}$; $\epsilon_r = 40.592$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.69, 7.69, 7.69); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x17x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.36 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.23 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.993 W/kg; SAR(10 g) = 0.510 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 1.50 W/kg

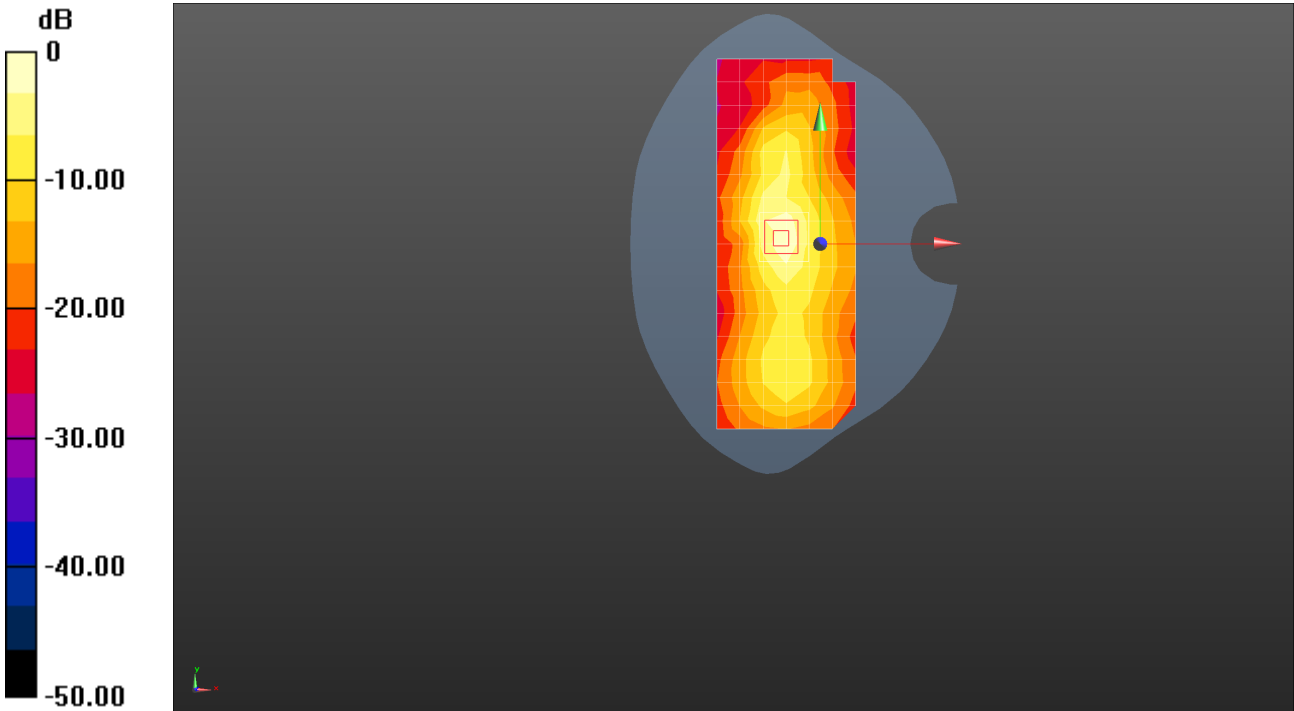

0 dB = 1.36 W/kg = 1.34 dBW/kg

Test Laboratory: SGS-SAR Lab

DT382WH LTE Band 4 20M QPSK 50RB0 20175CH Top side 0mm

DUT: DT382WH; Type: Rugged Tablet; Serial: 038WW25172062

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.342 \text{ S/m}$; $\epsilon_r = 40.462$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.02, 8.02, 8.02); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x17x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.59 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.85 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.630 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 1.88 W/kg

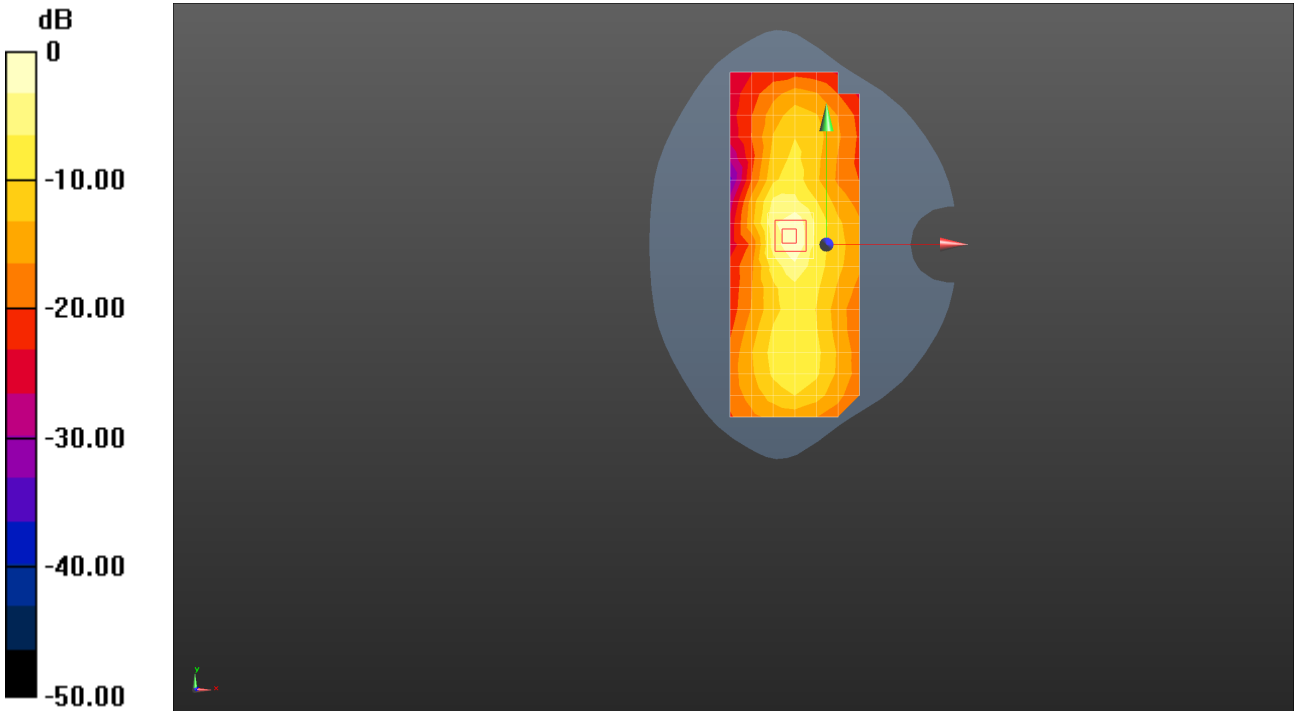

0 dB = 1.59 W/kg = 2.01 dBW/kg

Test Laboratory: SGS-SAR Lab

DT382WH LTE Band 5 10M QPSK 1RB0 20525CH Back side 0mm

DUT: DT382WH; Type: Rugged Tablet; Serial:038WW25172062

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL835;Medium parameters used (interpolated): $f = 836.5\text{ MHz}$; $\sigma = 0.926\text{ S/m}$; $\epsilon_r = 40.089$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42); Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2025/1/20
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.982 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.64 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.524 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 71.1%

Maximum value of SAR (measured) = 1.02 W/kg

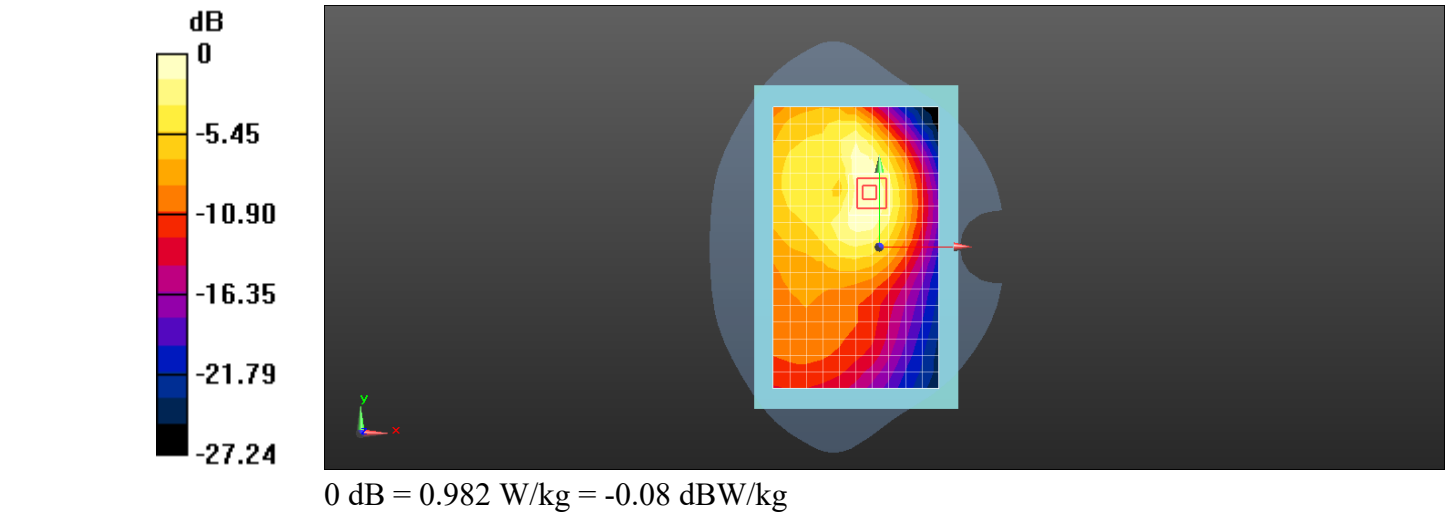

Test Laboratory: SGS-SAR Lab

DT382WH LTE Band 12 10M QPSK 1RB25 23095CHBack side 0mm

DUT: DT382WH; Type: Rugged Tablet; Serial:038WW25172062

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used (interpolated): $f = 707.5 \text{ MHz}$; $\sigma = 0.883 \text{ S/m}$; $\epsilon_r = 40.462$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.1, 10.82, 10.65); Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2025/1/20
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.794 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.52 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.922 W/kg

SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.422 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 67.4%

Maximum value of SAR (measured) = 0.802 W/kg

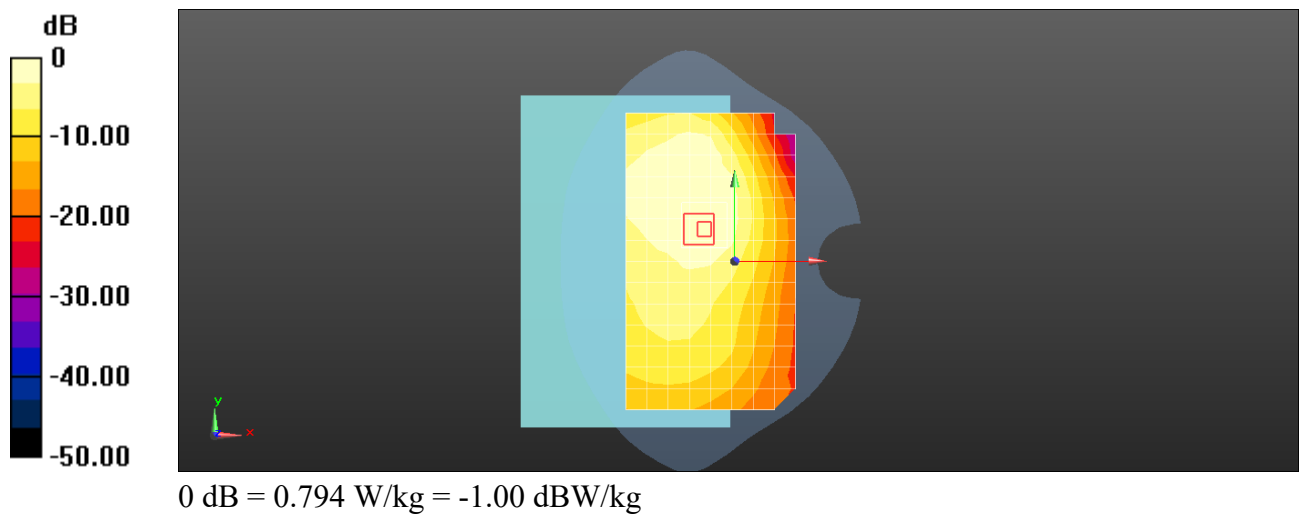

Test Laboratory: SGS-SAR Lab

DT382WH LTE Band 14 10M QPSK 1RB0 23330CH Back side 0mm

DUT: DT382WH; Type: Rugged Tablet; Serial:038WW25172062

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 793 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 793 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 40.159$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.1, 10.82, 10.65); Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2025/1/20
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.816 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.59 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.960 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.437 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 65.8%

Maximum value of SAR (measured) = 0.847 W/kg

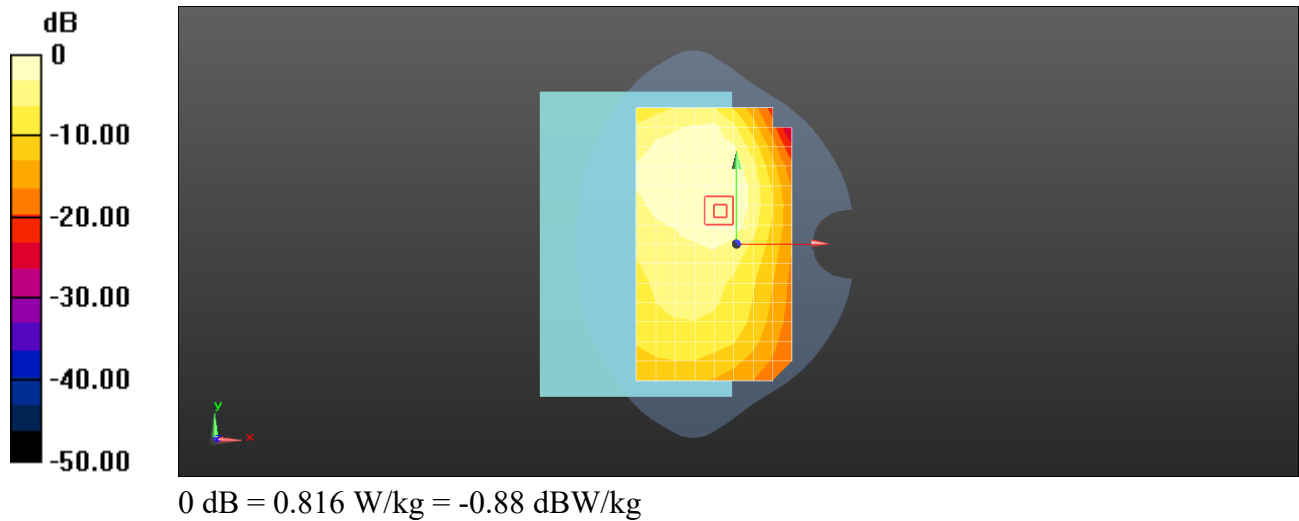

Test Laboratory: SGS-SAR Lab

DT382WH LTE Band 17 10M QPSK 1RB25 23790CH Back side 0mm

DUT: DT382WH; Type: Rugged Tablet; Serial:038WW25172062

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 710 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.884 \text{ S/m}$; $\epsilon_r = 40.45$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.1, 10.82, 10.65); Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2025/1/20
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.751 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.26 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.907 W/kg

SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.408 W/kg

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.3%

Maximum value of SAR (measured) = 0.795 W/kg

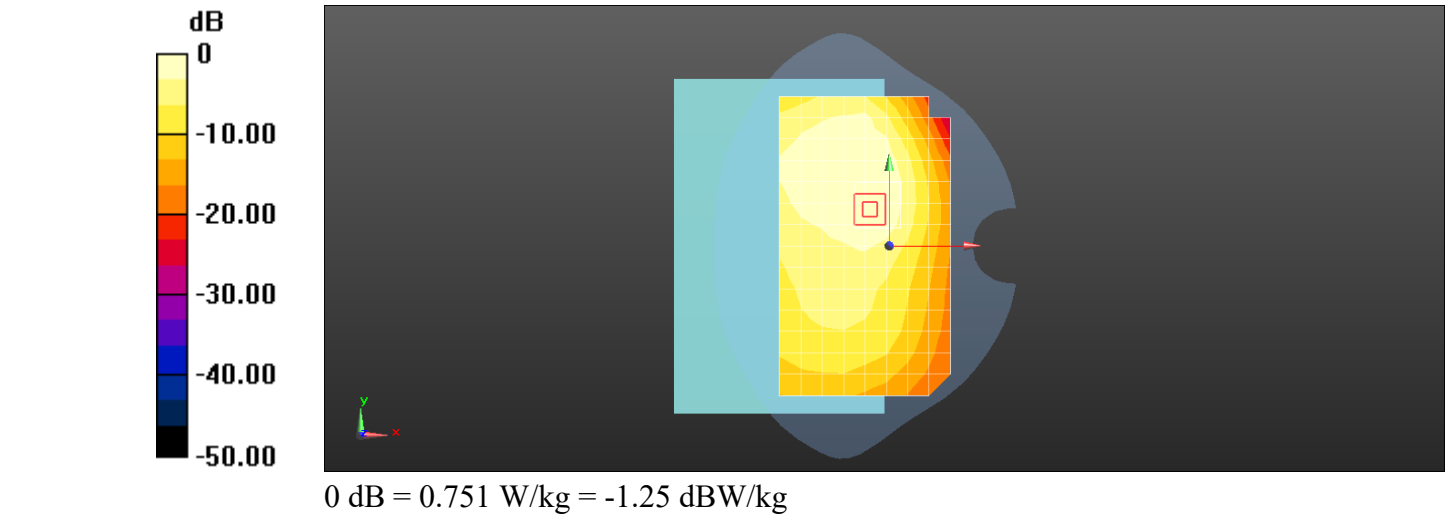

Test Laboratory: SGS-SAR Lab

DT382WH LTE Band 30 10M QPSK 25R0 27710CH Top side 0mm

DUT: DT382WH; Type: Rugged Tablet; Serial: 038WW25172062

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz;Duty Cycle: 1:1

Medium: HSL2300;Medium parameters used: $f = 2310\text{ MHz}$; $\sigma = 1.67\text{ S/m}$; $\epsilon_r = 39.274$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.6, 7.6, 7.6); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.892 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.91 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.939 W/kg; SAR(10 g) = 0.476 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 62.3%

Maximum value of SAR (measured) = 1.36 W/kg

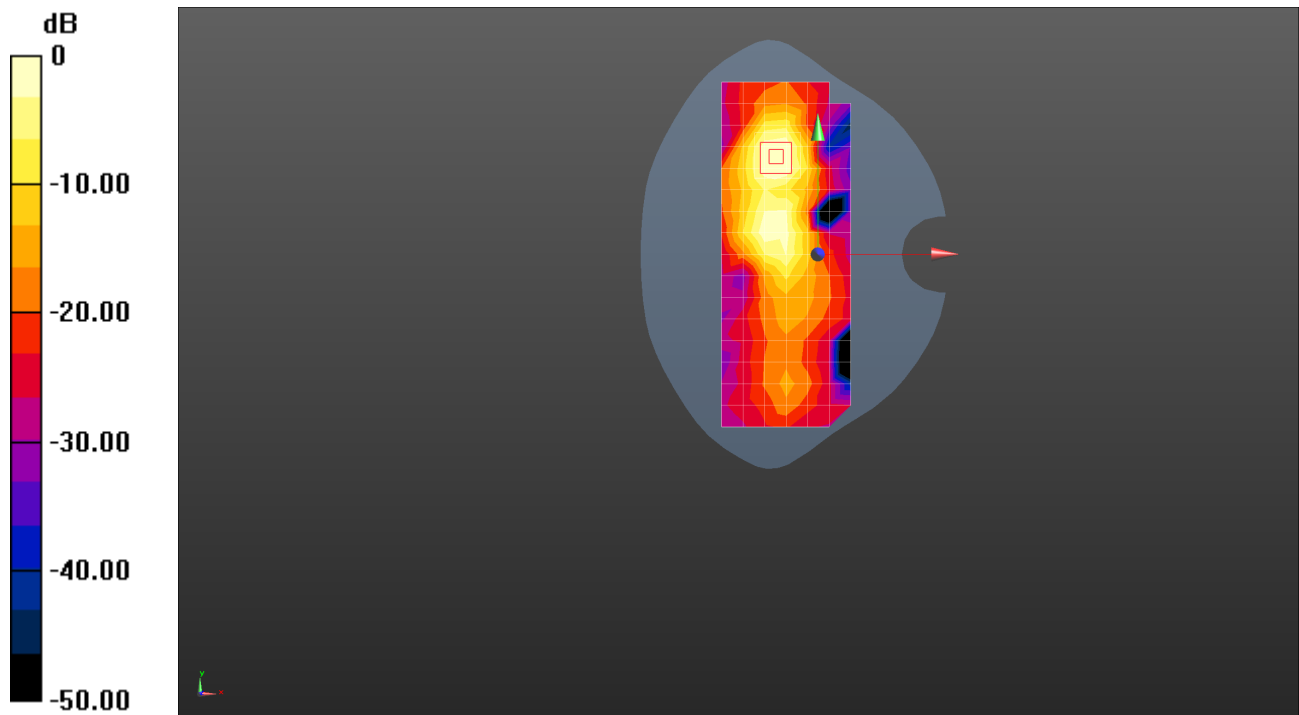

0 dB = 0.892 W/kg = -0.49 dBW/kg

Test Laboratory: SGS-SAR Lab

DT382WH LTE Band 48 20M QPSK 1RB0 55340CH Top side 0mm

DUT: DT382WH; Type: Rugged Tablet; Serial: 038WW25172062

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3560 MHz;Duty Cycle: 1:1.58016

Medium: HSL3500;Medium parameters used: $f = 3560 \text{ MHz}$; $\sigma = 2.964 \text{ S/m}$; $\epsilon_r = 37.868$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(6.69, 6.69, 6.69); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x25x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.47 W/kg

Configuration/Body/Zoom Scan (6x6x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 10.54 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.928 W/kg; SAR(10 g) = 0.433 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.4%

Maximum value of SAR (measured) = 1.49 W/kg

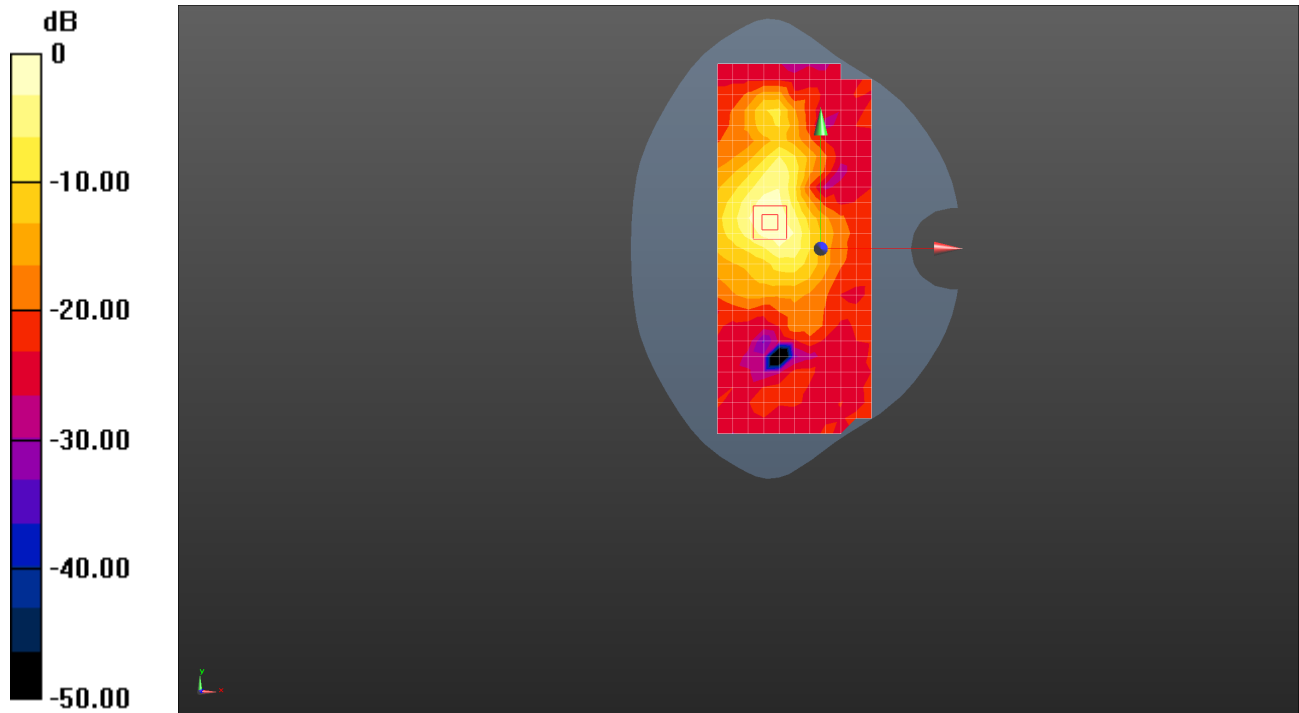

0 dB = 1.47 W/kg = 1.69 dBW/kg

Test Laboratory: SGS-SAR Lab

DT382WH LTE Band 66 20M QPSK 5RB0 13202CHTop side 0mm

DUT: DT382WH; Type: Rugged Tablet; Serial: 038WW25172062

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1720 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1720 \text{ MHz}$; $\sigma = 1.335 \text{ S/m}$; $\epsilon_r = 40.469$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.02, 8.02, 8.02); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x17x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.58 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.31 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.629 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 1.87 W/kg

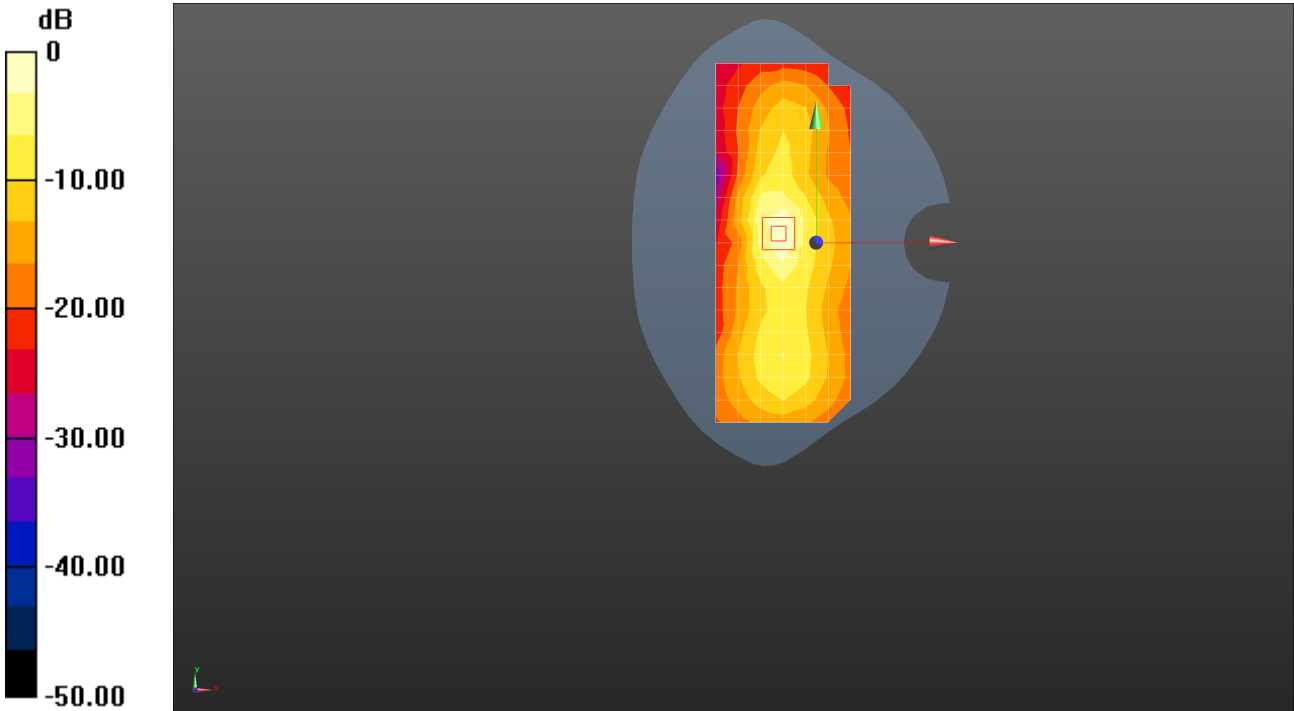

0 dB = 1.58 W/kg = 1.98 dBW/kg

Test Laboratory: SGS-SAR Lab

DT382WH WIFI 2.4G 802.11n HT40 3CH Right side 0mm MIMO

DUT: DT382WH; Type: Rugged Tablet; Serial:038WW25172062

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2422 MHz;Duty Cycle: 1:1.012


Medium: HSL2450;Medium parameters used: $f = 2422 \text{ MHz}$; $\sigma = 1.779 \text{ S/m}$; $\epsilon_r = 38.418$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.32, 7.85, 7.73); Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2025/1/20
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 1.02 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 3.546 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.87 W/kg
SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.453 W/kg
Smallest distance from peaks to all points 3 dB below = 8 mm
Ratio of SAR at M2 to SAR at M1 = 57.4%
Maximum value of SAR (measured) = 1.60 W/kg

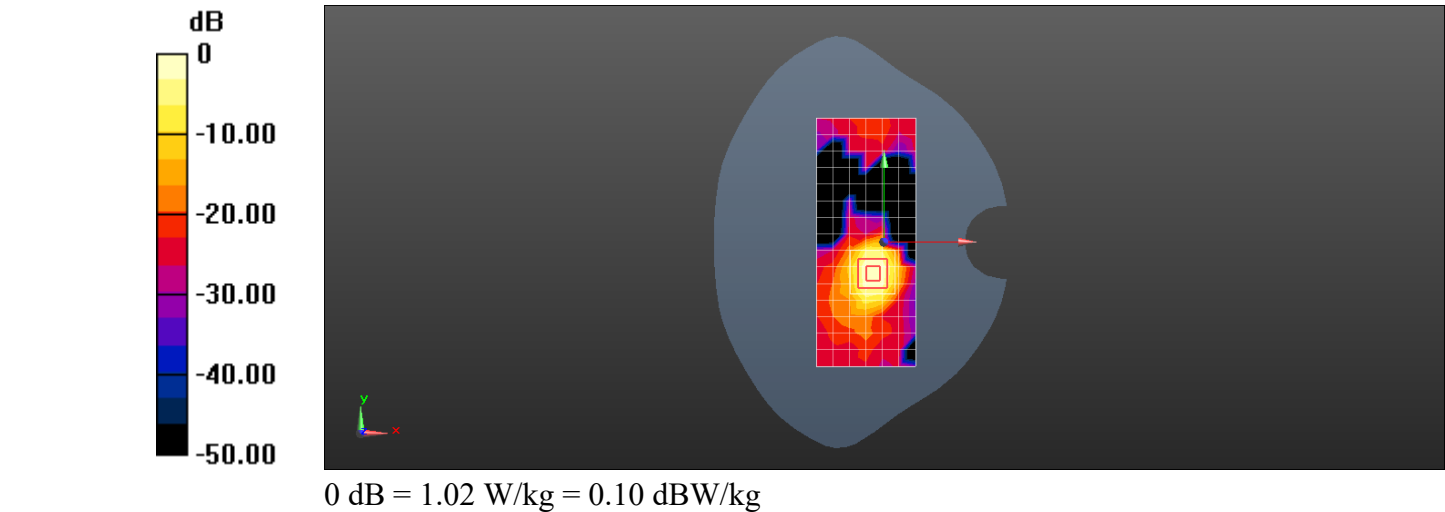

Test Laboratory: SGS-SAR Lab

DT382WH WIFI 5G 802.11ac VHT60M50CH Right side 0mm MIMO

DUT: DT382WH; Type: Rugged Tablet; Serial: 038WW25172062

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5250 MHz;Duty Cycle: 1:1.012

Medium: HSL5G;Medium parameters used: $f = 5250 \text{ MHz}$; $\sigma = 4.873 \text{ S/m}$; $\epsilon_r = 36.942$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(5.22, 5.22, 5.22); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.05 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.973 V/m; Power Drift = -0.09dB


Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.272 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 63%

Maximum value of SAR (measured) = 2.55 W/kg

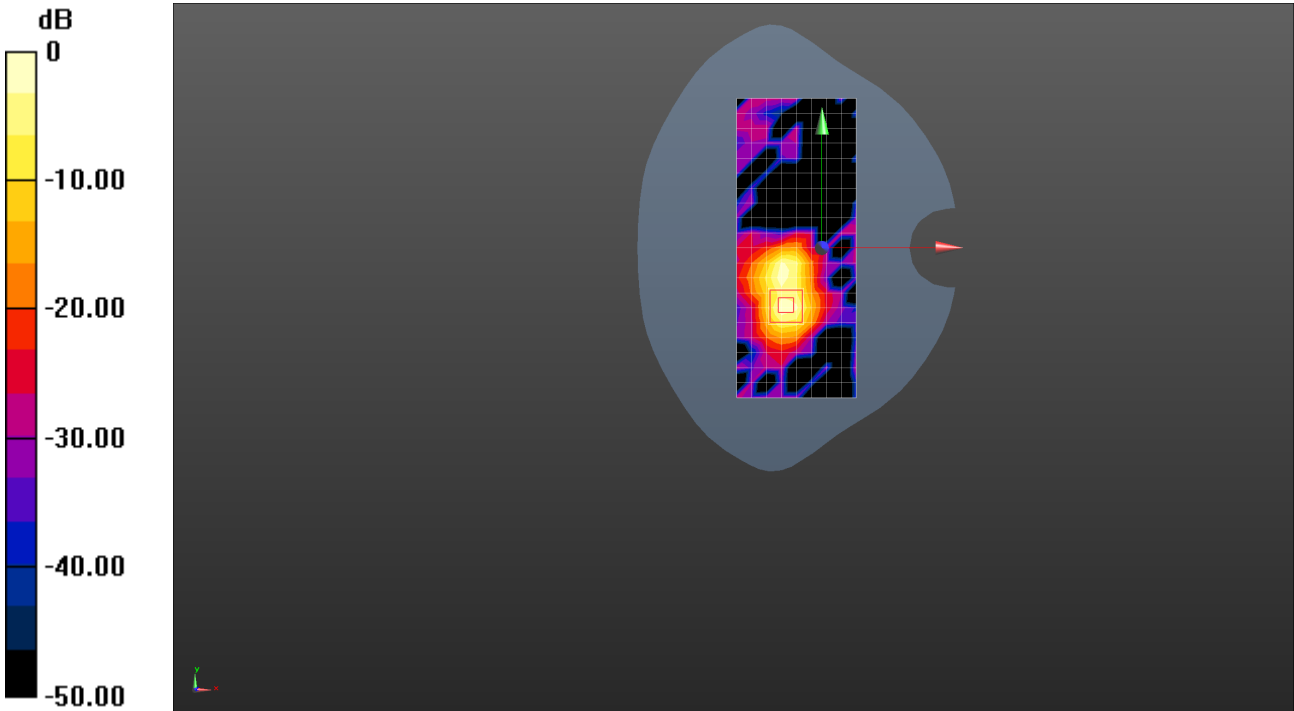

0 dB = 2.05 W/kg = 3.12 dBW/kg

Measurement Report for Device, EDGE RIGHT, U-NII-6, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 111 (6505.000 MHz)


Device

Communication System: U-NII-6; Frequency: 6505.000
Medium: Head Simulating Liquid. Medium parameters used: f= 6505.000 MHz; σ = 6.31 S/m; ϵ_r = 34.3

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(5.2, 4.96, 5.11); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (64.0 mm x 192.0 mm): Measurement Grid: 8.0 mm x 8.0 mm
SAR (1g) = 0.976 W/kg; SAR (10g) = 0.272 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 24.0 mm): Measurement Grid: 3.0 mm x 3.0 mm x 1.5 mm
Power Drift = N/A dB
SAR (1g) = 1.10 W/kg; SAR (8g) = 0.310 W/kg; SAR (10g) = 0.262 W/kg
psAPD (4.0cm2, sq) [W/m2]=6.20
M2/M1 [%]=49.4
Dist 3dB Peak [mm]=6.1

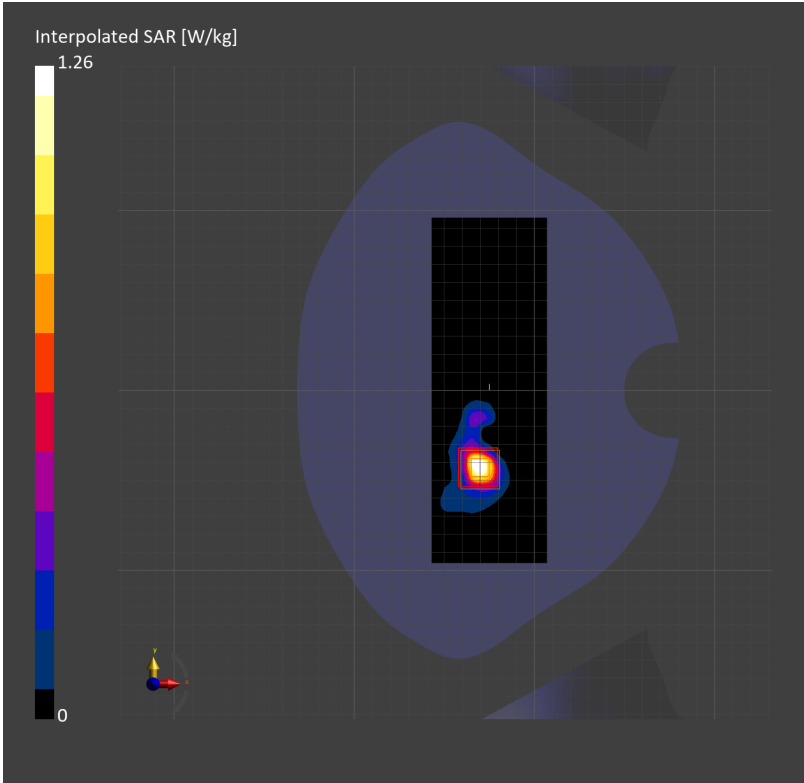

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	238.0 x 155.0 x 38.0	Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	FRONT, 2.00	U-NII-7	WLAN, 10755-AAC	6665.0, 143	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1777	Air –	EUmmWV4 – SN9533_F1–55GHz, 2024-08-23	DAE4ip Sn1826, 2025-02-17

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	Y

Measurement Results

Scan Type	5G Scan
Date	2025-07-21
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	2.92
psPDtot+ [W/m²]	5.64
psPDmod+ [W/m²]	13.2
E _{max} [V/m]	73.9
Power Drift [dB]	0.05

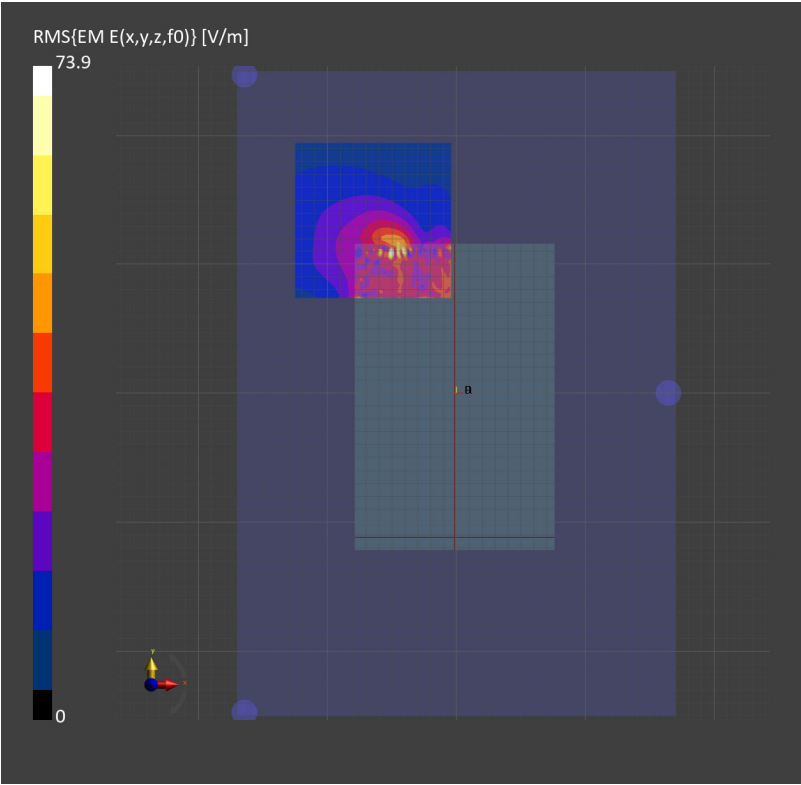

Test Laboratory: SGS-SAR Lab

DT382WH Bluetooth DH5 78CH Top side 0mm Ant3

DUT: DT382WH; Type: Rugged Tablet; Serial: 038WW25172062

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz;Duty Cycle: 1:1.286

Medium: HSL2450;Medium parameters used: $f = 2480 \text{ MHz}$; $\sigma = 1.806 \text{ S/m}$; $\epsilon_r = 38.331$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.35, 7.35, 7.35); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (15x6x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.155 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.600 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.069 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

Maximum value of SAR (measured) = 0.176 W/kg

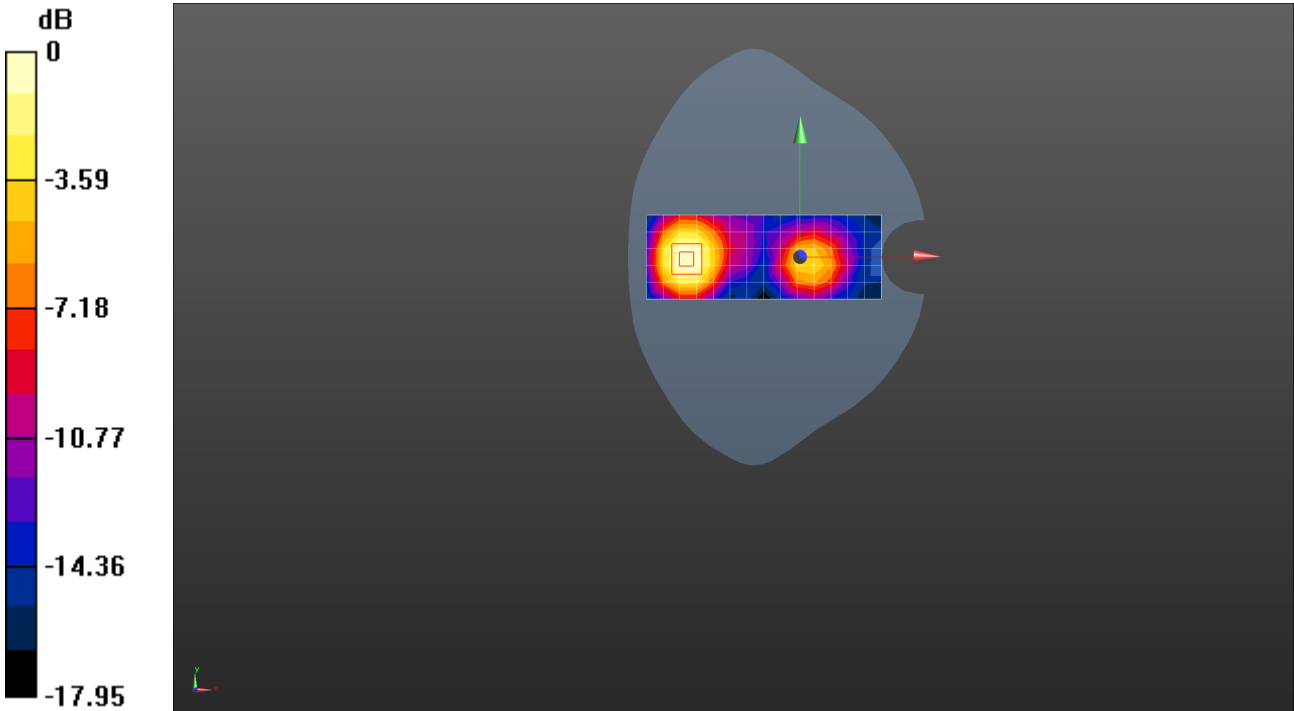

0 dB = 0.155 W/kg = -8.10 dBW/kg