



198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

Email: sgs_internet_operations@sgs.com

FEDERAL COMMUNICATIONS COMMISSION

Registration number: 282399

Report No.: GLEMO10040107901

Page: 1 of 16

FCC ID: YEJCTSHEHQIWEI

TEST REPORT

Application No.:	GLEMO100401079RF
Applicant:	CREATE TOYS FACTORY
Equipment under Test (EUT)	
Name:	R/C CAR SERIES
Basic Model No.:	2010B, 2006C *
Addition Model No.:	2010C, 2010D, 8001, 8002, 2012, 2013, 2020, 2021, 2022, 2100. *
*	Please refer to section 3 of this report which indicates which item was actually tested and which were electrically identical.
FCC ID:	YEJCTSHEHQIWEI
Function:	Radio toys with 27.145MHz as a carrier.
Standards:	FCC PART 15, SUBPART C: 2009 (Section 15.227)
Date of Receipt:	2010-04-19
Date of Issue:	2010-05-24
Test Result :	PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above. Please refer to section 3 of this report for further details.

Authorized Signature:

Stephen Guo
Lab Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Revision Record					
Version	Chapter	Date	Modifier	Remark	
00		2010-05-24		Original	

Authorized for issue by:			
Tested By		2010-04-26 to 2010-04-27	Date
	(David Liu) / Project Engineer		
Prepared By		2010-05-05	Date
	(Millie Li) / Clerk		
Checked By		2010-05-24	Date
	(Jeffrey Chen) / Reviewer		

3 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Radiated Emission	FCC PART 15:2009	Section 15.227	PASS
Occupied Bandwidth	FCC PART 15:2009	Section 15.215	PASS
Tx: In this whole report Tx (or tx) means Transmitter.			
Rx: In this whole report Rx (or rx) means Receiver.			
RF: In this whole report RF means Radiated Frequency.			
♣ Item No.: 2010B, 2006C, 2010C, 2010D, 8001, 8002, 2012, 2013, 2020, 2021, 2022, 2100.			
According to the declaration of the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference being the outer.			
Therefore only one model 2010B was tested in this report.			

4 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 DETAILS OF E.U.T.	5
5.4 DESCRIPTION OF SUPPORT UNITS.....	5
5.5 STANDARDS APPLICABLE FOR TESTING	5
5.6 TEST LOCATION.....	5
5.7 DEVIATION FROM STANDARDS.....	5
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	5
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	5
5.10 TEST FACILITY	6
6 EQUIPMENTS USED DURING TEST.....	7
7 TEST RESULTS	8
7.1 E.U.T. TEST CONDITIONS	8
7.2 RADIATED EMISSIONS	9
7.2.1 <i>Measurement Record:</i>	12
7.3 OCCUPIED BANDWIDTH	15

5 General Information

5.1 Client Information

Applicant: CREATE TOYS FACTORY
Address of Applicant: 1-2 Floor, No.6 Building Longtian Guanghua Industrial park, Chengjiang Road, Chenghai District, Shantou City, Guangdong, China

5.2 General Description of E.U.T.

EUT Name: R/C CAR SERIES
Basic Model No.: 2010B, 2006C
Addition Model No.: 2010C, 2010D, 8001, 8002, 2012, 2013, 2020, 2021, 2022, 2100.

5.3 Details of E.U.T.

EUT Power Supply: DC 3.0V (2 x1.5V size "AA" batteries)

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Standards Applicable for Testing

The customer requested FCC tests for the EUT.

The standard used was FCC PART 15, SUBPART C: 2009 (Section 15.227).

5.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,
Guangzhou, Guangdong, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

5.7 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

5.10 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

Date of Registration: February 18, 2009. Valid until February 18, 2011.

- **VCCI (Registration No.: R-2460 and C-2584)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460 and C-2584 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01:2006-10 and Rules of procedure IECEE 02:2006-10, and the relevant IECEE CB-Scheme Operational documents.

This certificate was issued Aug.6.2009 and valid until May.19.2012.

6 Equipments Used during Test

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	N/A	N/A
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2010-01-25	2011-01-25
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	10036	2009-07-18	2010-07-18
N/A	EMI Test Software	Audix	E3	N/A	N/A	N/A
EMC0514	Coaxial cable	SGS	N/A	N/A	2009-12-09	2010-12-09
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2009-12-20	2010-12-20
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2009-12-20	2010-12-20
EMC0517	Horn Antenna	Rohde & Schwarz	HF906	100095	2009-09-15	2010-09-15
EMC0040	Spectrum Analyzer	Rohde & Schwarz	FSP30	100324	2009-12-05	2010-12-05
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2010-01-25	2011-01-25
EMC0049	Amplifier	Agilent	8447D	2944A10862	2010-02-23	2011-02-23
EMC0075	310N Amplifier	Sonama	310N	272683	2009-10-26	2010-10-26
EMC0523	Active Loop Antenna	EMCO	6502	42963	2009-11-17	2010-11-17
EMC0530	10m Semi- Anechoic Chamber	ETS	N/A	N/A	2009-06-02	2010-06-02

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0006	DMM	Fluke	73	70681569	2009-12-16	2010-12-16
EMC0007	DMM	Fluke	73	70671122	2009-12-16	2010-12-16

7 Test Results

7.1 E.U.T. test conditions

Power supply:	DC 3.0V (New batteries)	
Requirements:	15.31(e) :For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.	
Type of antenna:	Integral	
Operating Environment:		
Temperature:	22-25.0 °C	
Humidity:	48-55% RH	
Atmospheric Pressure:	1001-1010 mbar	
Test frequencies:	According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:	
Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Test nominal frequency: 27.145 MHz.

7.2 Radiated Emissions

Test Date: 2010-04-26

Test Method: ANSI C63.4:2003

EUT Operation: operating

Status: Kept Tx operating with modulation mode and standby mode.

Equipment Used: Refer to section 6 for details.

Frequency Range: FCC Part15 C Section 15.33

(a) Unless otherwise noted in the specific rule section under which the equipment operates for an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

Test Requirement: FCC Part15 C Section 15.227

15.227(a) :The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.

15.227(b) :The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

Out of band emissions shall not exceed:

40.0 dB μ V/m between 30MHz & 88MHz

43.5 dB μ V/m between 88MHz & 216MHz

46.0 dB μ V/m between 216MHz & 960MHz

54.0 dB μ V/m above 960MHz

Test Procedure:**1)9K to 30MHz emissions:**

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.4 section 8.2.1. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

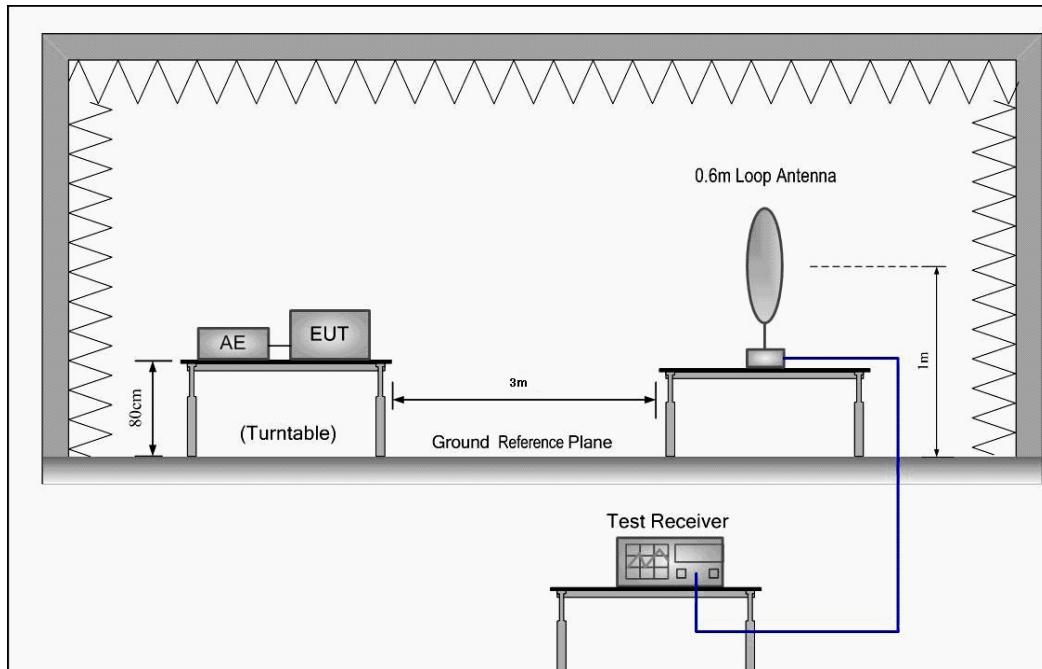
2)30MHz to 1GHz emissions:

For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI 63.4. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

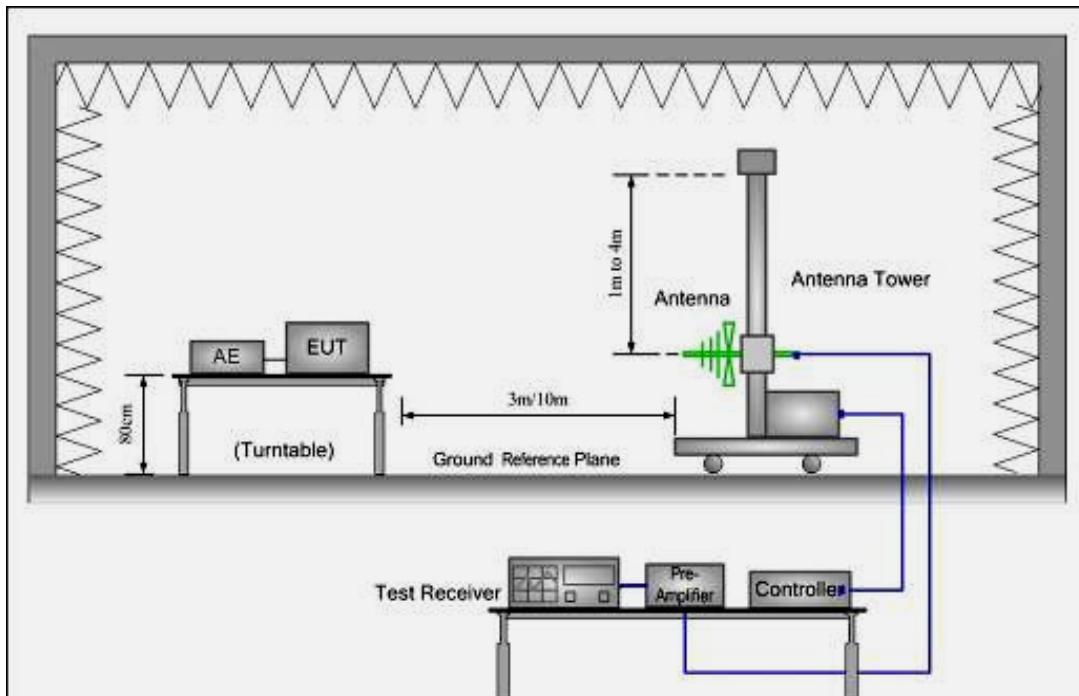
3)1GHz to 40GHz emissions:

For testing performed with the horn antenna, testing was performed in accordance to ANSI 63.4. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

Detector: Peak Scan (9kHz resolution bandwidth for 9kHz to 30MHz;
120kHz resolution bandwidth for 30MHz to 1000MHz)

Test Configuration:**1) 9K to 30MHz emissions:**

2) 30MHz to 1GHz emissions:



7.2.1 Measurement Record:

1) Emissions below 30MHz:

Vertical:

Test Frequency (MHz)	Peak (dB μ V/m)			Limits (dB μ V/m)	Margin (dB)		
	X	Y	Z		X	Y	Z
27.145	66.0	67.0	63.2	100.0	34.0	33.0	36.8
Test Frequency (MHz)	Average (dB μ V/m)			Limits	Margin (dB)		
	X	Y	Z	(dB μ V/m)	X	Y	Z
27.145	60.0	65.0	62.0	80.0	20.0	15.0	18.0

Remark:

Y: EUT as Radiated Emission test setup photograph in section 8 of this report.

X: rotate EUT by 90° clockwise.

Z: rotate EUT by 90° vertically.

According to ANSI Standard C63.4-2003, the portable equipment shall be tested with X, Y, Z axis of the EUT to find the maximum emissions. Other equipment shall be put in normal use status to find the maximum emissions.

Pre-test the EUT in X, Y, Z axis with antenna in vertical and horizontal, found the worst case is in vertical and report it.

2) other emissions

Remark:

When an emission was found, the table was rotated to produce the maximum signal strength. was performed in the 3m chamber using the spectrum analyser in peak detection mode. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. The worst case emissions were reported.

According to 15.35 (b) When average radiated emission measurements are specified in the regulations, including emission measurements below 1000 MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules, e.g., see Section 15.255.

The field strength is calculated by adding the Antenna Factor, Cable Factor & Peramplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss - Peramplifier Factor.

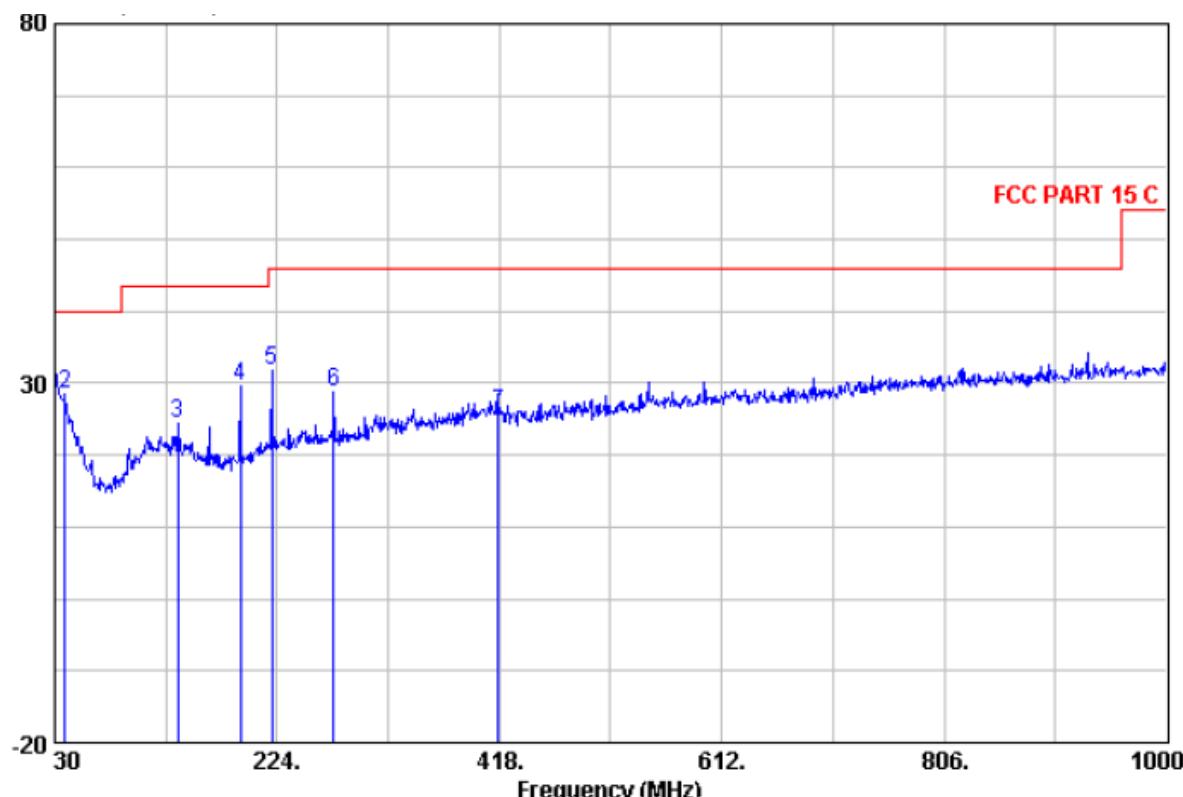
The following test results were performed on the EUT.

30MHz to 1GHz emissions**Tx Transmitting mode**

Horizontal:

Peak scan:

Level: dBuV/m

**Quasi-peak measurement**

Freq MHz	ReadAntenna Level Factor		Cable Loss Factor		Preamp Factor		Limit Line dBuV/m	Over Line dB	Over Limit Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m			
30.000	68.40	22.60	0.50	24.60	66.90	40.00	26.90	QP	
38.730	33.85	18.60	0.50	24.50	28.45	40.00	-11.55	QP	
137.670	35.94	11.74	1.00	24.40	24.28	43.50	-19.22	QP	
191.990	42.41	10.20	1.20	24.30	29.51	43.50	-13.99	QP	
219.150	42.73	11.82	1.30	24.10	31.75	46.00	-14.25	QP	
273.470	38.92	12.30	1.50	24.00	28.72	46.00	-17.28	QP	
417.030	33.04	16.08	1.80	25.10	25.82	46.00	-20.18	QP	

Remark:

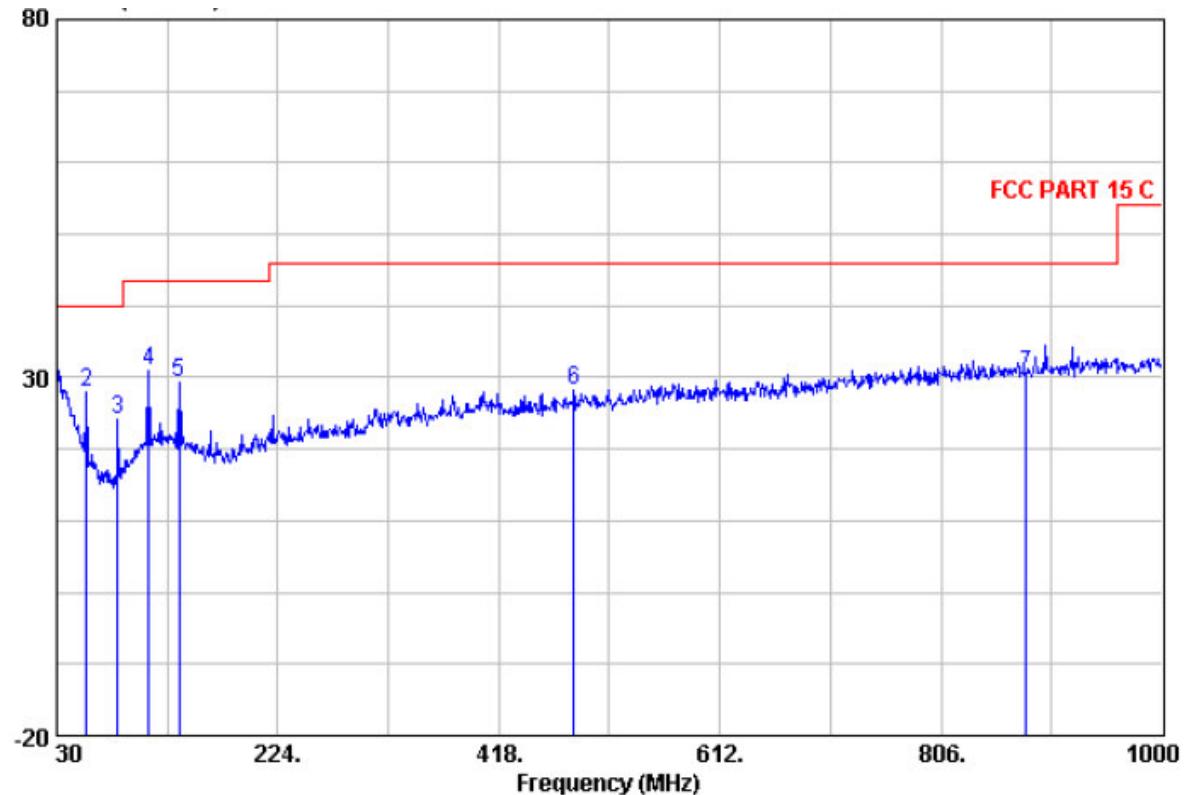
Level = Read level + Antenna Factor + Cable Loss – Preamp Factor

30MHz to 1GHz emissions**Tx Transmitting mode**

Vertical:

Peak scan:

Level: dBuV/m

**Quasi-peak measurement**

Freq	Read		Antenna		Cable		Preamp		Limit	Over	Over
	Level	Factor	Loss	Factor	Level	dBuV/m	dBuV/m	Remark			
MHz	dBuV	dB/m		dB		dBuV/m	dBuV/m				
30.000	65.40	22.60		0.50	24.60	63.90	40.00	23.90	QP		
56.190	41.83	9.90		0.60	24.50	27.83	40.00	-12.17	QP		
83.350	40.81	7.04		0.80	24.54	24.11	40.00	-15.89	QP		
110.510	42.47	12.12		0.90	24.50	30.99	43.50	-12.51	QP		
137.670	40.93	11.74		1.00	24.40	29.27	43.50	-14.23	QP		
483.960	34.82	16.88		1.90	25.40	28.20	46.00	-17.80	QP		
880.690	32.71	20.30		2.60	25.10	30.51	46.00	-15.49	QP		

Remark:

Level = Read level + Antenna Factor + Cable Loss – Preamp Factor

7.3 Occupied Bandwidth

Test Date: 2010-04-27

Test Method: ANSI C63.4

EUT Operation: Transmitter

Status: Kept Tx operating with modulation mode and standby mode.

Equipment Used: Refer to section 6 for details.

Test Requirement: FCC Part 15 C Section 15.215 (C) and Section 15.227.

15.215(c), Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Limit: **Operation within the band 26.960 – 27.280 MHz**

Test Procedure: The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector. The vertical Scale is set to 10dB per division. Record the 20 dB bandwidth of the carrier.

The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector. The vertical Scale is set to 10dB per division. The horizontal scale is set to 20KHz per division. Read the down 26dB bandwidth of the carrier.

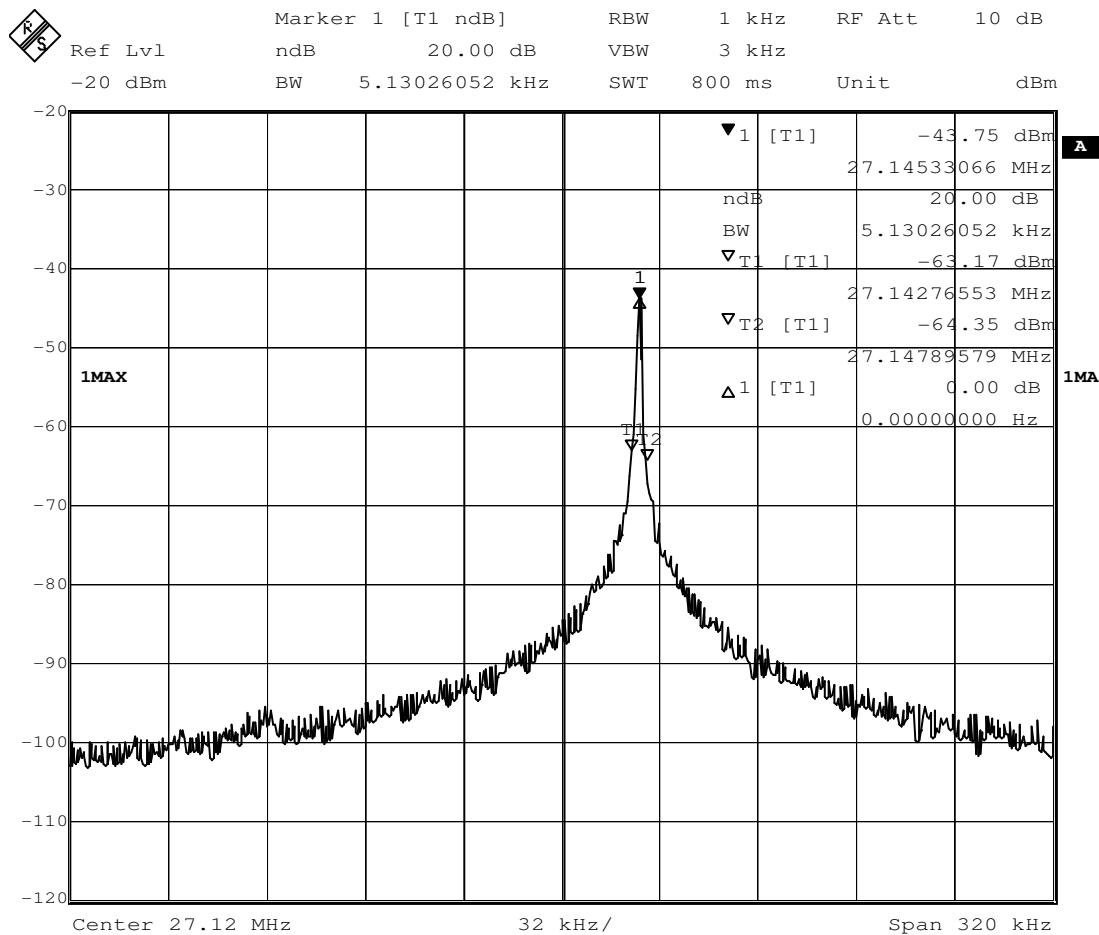
Set the spectrum analyzer: start at 26.96MHz and stop at 27.28MHz

Set the spectrum analyzer: RBW = 1kHz, VBW = 3KHz

Sweep = auto; Detector Function = Peak. Trace = Max Hold.

Mark the peak frequency and -20dB points bandwidth.

The graph as below:



Date: 25.MAY.2010 10:22:22

20dB bandwidth lower frequency : 27.14276553MHz

20dB bandwidth upper frequency : 27.14789579MHz

The results: The unit does meet the FCC requirements