

**Produkte Products** 

> Prüfbericht - Nr.: Seite 1 von 14 14044068 001 Page 1 of 14 Test Report No.: Auftraggeber: Stadlbauer Marketing + Vertrieb GmbH

Client: Rennbahn Allee 1, 5412 Puch

Salzburg, Austria

Gegenstand der Prüfung: Short Range Device - Radio Controlled Toy Transmitter (2.4GHz) Test Item:

Bezeichnung:

370401008, 401008 Identification:

Serien-Nr.: **Engineering sample** Serial No.:

Wareneingangs-Nr.: Receipt No.:

A000345491-003 Eingangsdatum: 15.04.2016

Date of Receipt:

Zustand des Prüfgegenstandes bei Anlieferung: Condition of test item at delivery:

Test sample is not damaged and suitable for

testing.

Prüfort: Testing Location: TÜV Rheinland Hong Kong Ltd.

8/F, First Group Centre, 14 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong

Hong Kong Productivity Council

HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong

Prüfgrundlage: Test Specification: FCC Part 15 Subpart C **RSS-Gen Issue 4** RSS-102 Issue 5

RSS-210 Issue 8 ANSI C63.10-2013

Prüfergebnis: Test Results:

Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben

genannter Prüfgrundlage.

The above mentioned product was tested and passed.

Prüflaboratorium:

TÜV Rheinland Hong Kong Ltd.

Testing Laboratory:

8 - 10/F., Goldin Financial Global Square, 7 Wang Tai Road, Kowloon Bay,

Kowloon, Hona Kona

geprüft/ tested by:

kontrolliert/ reviewed by:

Joey Leung 20.06.2016 Project Manager **Datum** Name/Stellung

P(ass)

F(ail)

Unterschrift Name/Position Sianature

Benny Lau 20.06.2016

Senior Project Manager Name/Stellung Unterschrift Name/Position

Sonstiges: Other Aspects

Date

FCC ID: YFA370401008 IC: 12260A-370401008

Abkürzungen:

entspricht Prüfgrundlage

entspricht nicht Prüfgrundlage

Abbreviations:

passed P(ass) . failed

Sianature

N/A nicht anwendbar nicht getestet

N/A not applicable not tested

F(ail)

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.

Datum

Date

This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.



# **Table of Content**

	Page
Cover Page	1
Table of Content	2
Product information	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents	4
Independent Operation Modes	4
Related Submittal(s) Grants	4
Remark	4
Test Set-up and Operation Mode	5
Principle of Configuration Selection	5
Test Operation and Test Software	5
Special Accessories and Auxiliary Equipment	5
Countermeasures to achieve EMC Compliance	5
Test Methodology	6
Radiated Emission	6
Field Strength Calculation	6
Test Setup Diagram	7
List of Test and Measurement Instruments	8
Measurement Uncertainty	9
Results FCC Part 15 – Subpart C / RSS-210 Issue 8	10
FCC 15.203 – Antenna Requirement 1	Pass 10
FCC 15.204 – Antenna Requirement 2	Pass 10
RSS-Gen 6.3 – External Control	Pass 10
RSS-Gen 8.3 – Antenna Requirement	Pass 10
FCC 15.207 / RSS-Gen 8.8 – Conducted Emission on AC Mains	N/A 11
FCC 15.215(c) – 20 dB Bandwidth	Pass 11
RSS-Gen 6.6 – Occupied Bandwidth	Pass 11
FCC 15.249(a) / RSS-210 A2.9(a) – Field Strength of Fundamental and Harmonics	Pass 12
FCC 15.249 (d), 15.205 / RSS-210 (b) – Out Of Band Radiated Emission	Pass 14

Date: 20.06.2016





Appendix 1 – Test protocols	3 pages
Appendix 2 – Test setup	4 pages
Appendix 3 – EUT External Photos	4 pages
Appendix 4 – EUT Internal Photos	4 pages
Appendix 5 – RF exposure information	2 pages

Test Report No.: 14044068 001 Date: 20.06.2016 page 3 of 14



## **Product information**

### **Manufacturers declarations**

	Transmitter
Operating frequency range	2410 - 2470MHz
Type of modulation	GFSK
Type of antenna	Wire Antenna
Power level	fix
Connection to public utility power line	No
Nominal voltage	V <sub>nor</sub> : 9.0 V (6 x 1.5V AA size battery)

### Product function and intended use

The equipment under test (EUT) is a radio control toy transmitter operating at 2.4GHz. It is powered by battery only.

FCC ID: YFA370401008 IC: 12260A-370401008

Models	Product description	
370401008, 401008	Radio Controlled Toy Transmitter	

### **Submitted documents**

Circuit Diagram Block Diagram Bill of material User manual Rating Label

### **Independent Operation Modes**

The basic operation mode is transmitting mode.

For further information refer to User Manual

### Related Submittal(s) Grants

This is a single application for certification of the transmitter.

### Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Report No.: 14044068 001 Date: 20.06.2016 page 4 of 14



# **Test Set-up and Operation Mode**

## **Principle of Configuration Selection**

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation

level. The test modes were adapted accordingly in reference to the instructions for use.

### **Test Operation and Test Software**

Test operation should refer to test methodology.

During testing, the EUT was programmed to test mode by manufacturer. Change of transmitting frequency can be achieved by pressing a built-in button on EUT. Output power of EUT was set to fixed level throughout testing.

## **Special Accessories and Auxiliary Equipment**

The product has been tested together with the following additional accessories:

- none

## **Countermeasures to achieve EMC Compliance**

- none

Test Report No.: 14044068 001 Date: 20.06.2016 page 5 of 14



# **Test Methodology**

#### **Radiated Emission**

The radiated emission measurements were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz, the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz, the EUT was placed at the middle of the 1.5 m height turntable. And the turntable is 3 meters far from the measuring antenna. In addition, RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated  $360^{\circ}$ , the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

### **Field Strength Calculation**

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

FS = R + AF + CF + FA - PA

Where FS = Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.

FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.


FA and PA are only be used for the measuring frequency above 1 GHz.

Test Report No.: 14044068 001 Date: 20.06.2016 page 6 of 14




# **Test Setup Diagram**

**Diagram of Measurement Configuration for Radiation Test** 

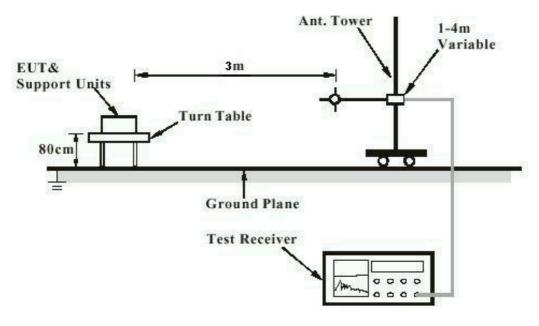

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

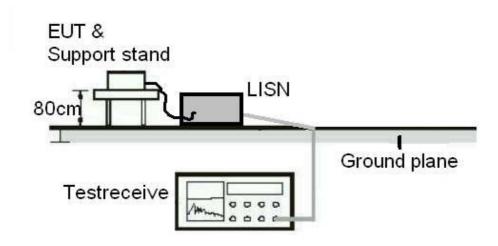

Test Report No.: 14044068 001 Date: 20.06.2016 page 7 of 14



# **List of Test and Measurement Instruments**

Hong Kong Productivity Council (FCC/ IC Registration number: 90656 / 4780A-1)

### **Radiated Emission**

Equipment	Manufacturer	Туре	S/N	Last Cal. Date	Cal. Due Date
Semi anechoic Chamber	Frankonia	Nil	Nil	14 Apr 2016	14 Apr 2017
Test Receiver	R&S	ESU40	100190	07 Dec 2015	07 Dec 2016
Bi conical Antenna	R&S	HK116	100241	01 Sep 2015	01 Sep 2017
Log Periodic Antenna	R&S	HL223	841516/017	01 Sep 2015	01 Sep 2017
Coaxial cable	Harbour	LL335	N/A	10 Jun 2016	10 Jun 2018
Microwave amplifer 0.5 26.5GHz, 25dB gain	HP	83017A	3950M00241	17 Jul 2014	17 Jul 2016
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	9829213	28 Oct 2015	28 Oct 2017
Horn Antenna	EMCO	3115	9002 3347	26 Aug 2015	26 Aug 2017
Active Loop Antenna	EMCO	6502	9107-2651	15 Aug 2015	15 Aug 2016

# **TÜV Rheinland Hong Kong Ltd**

**Radio Frequency Test** 

Equipment	Manufacturer	Туре	S/N	Last Cal. Date	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP30	100610	20 Jan 2016	19 Jan 2017

Test Report No.: 14044068 001 Date: 20.06.2016 page 8 of 14



# **Measurement Uncertainty**

The estimated combined standard uncertainty for power-line conducted emissions measurements is  $\pm 3.43$ dB.

The estimated combined standard uncertainty for radiated emissions measurements is  $\pm 4.68$ dB (30MHz to 200MHz) and  $\pm 5.73$ dB (200MHz to 1000MHz) and  $\pm 5.57$ dB (above 1GHz).

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of k=2, which for the level of confidence is approximately 95%.

Test Report No.: 14044068 001 Date: 20.06.2016 page 9 of 14



# Results FCC Part 15 - Subpart C / RSS-210 Issue 8

FCC 15.203 - Antenna Requirement 1

**Pass** 

FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the

device

Results: Antenna type: Fixed Integral wire antenna

Verdict: Pass

FCC 15.204 – Antenna Requirement 2

**Pass** 

FCC Requirement: An intentional radiator may be operated only with the antenna with which it is

authorized. If an antenna is marketed with the intentional radiator, it shall be of a type

which is authorized with the intentional radiator.

**Results:** Only one integral antenna can be used.

Verdict: N/A

RSS-Gen 6.3 – External Control

**Pass** 

IC Requirement: The device shall not have any external controls accessible to the user that enable it to

be adjusted, selected or programmed to operate in violation of the limits prescribed in

the applicable RSS.

**Results:** The device does not have any transmitter external controls accessible to the user that

can be adjusted and operated in violation of the limits of this standard.

Verdict: Pass

RSS-Gen 8.3 - Antenna Requirement

**Pass** 

IC Requirement: When a measurement at the antenna connector is used to determine RF output power,

the effective gain of the device's antenna shall be stated, based on measurement or on

data from the antenna manufacturer.

**Results:** a) Antenna type: Fixed Integral wire antenna

b) Manufacturer N/A
c) model no N/A
d) Gain with reference to an isotropic radiator: 0 dBi

d) dain with reference to an isotropic radiator.

Verdict: Pass

Test Report No.: 14044068 001 Date: 20.06.2016 page 10 of 14



### FCC 15.207 / RSS-Gen 8.8 - Conducted Emission on AC Mains

N/A

There is no AC power input or output ports on the EUT.

### FCC 15.215(c) - 20 dB Bandwidth

Pass

Test Specification: ANSI C63.10 - 2013

Mode of operation: Tx mode Port of testing: Enclosure

RBW/VBW : 100 kHz / 300 kHz

Supply voltage : 9.0VDC, 6 x 1.5V AA size new battery

Temperature : 23°C Humidity : 50%

Requirement: The intentional radiators must be designed to ensure that the 20dB bandwidth of the

emission, is contained within the frequency band designated in the rule section under

which the equipment is operated.

**Results:** For test protocols refer to Appendix 1, page 2-3.

Frequency (MHz)	20 dB left (MHz)	Limit (MHz)	20 dB right (MHz)	Limit (MHz)
2410	2407.030	> 2400	2413.090	< 2483.5
2440	2437.810	> 2400	2442.220	< 2483.5
2470	2468.560	> 2400	2471.710	< 2483.5

### RSS-Gen 6.6 - Occupied Bandwidth

**Pass** 

IC Requirement : N/A

Test Specification: RSS-Gen Mode of operation: Tx mode

Port of testing : Temporary antenna port

Detector : Peak

RBW/VBW : 100 kHz / 300 kHz

Supply voltage : 9.0VDC, 6 x 1.5V AA size new battery

Temperature : 23°C Humidity : 50%

**Results:** Pre-scan has been conducted to determine the worst-case mode from all possible

combinations between available modulations and packet types.

For test protocols refer to Appendix 1.

Frequency (MHz)	Left (MHz)	Right (MHz)	99% bandwidth (MHz)
2410	2407.030	2412.850	5.820
2440	2437.780	2442.130	4.350
2470	2468.440	2471.440	3.000

Test Report No.: 14044068 001 Date: 20.06.2016 page 11 of 14



FCC 15.249(a) / RSS-210 A2.9(a) – F	ield Strength of Fundamental a	nd Harmonics Pass
Test Specification: ANSI C63.10 – 2		1 (1)
Mode of operation: Tx mode	013	
Port of testing : Enclosure		
Frequency range : 9kHz – 25GHz		
RBW/VBW : 100 kHz / 300 kH	Iz for f < 1 GHz	
1 MHz / 3 MHz fo		
	' AA size new battery	
Temperature : 23°C		
Humidity : 50%		
	of emissions from intentional rad shall comply with the following lim	
Results: PASS.		
Fundamental Frequency 2410MHz	Vertical Polarization	
Freq	Level	Limit/ Detector
MHz	dBuV/m	dBuV/m
2409.679	100.24	114.0 / PK
2410.000	42.41	94.0 / AV
Fundamental Frequency 2410MHz	Horizontal Polarization	
Freq	Level	Limit/ Detector
MHz	dBuV/m	dBuV/m
2410.000	94.97	114.0 / PK
2409.840	37.84	94.0 / AV
Harmonics 2410MHz	Vertical Polarization	
Freq	Level	Limit/ Detector
MHz	dBuV/m	dBuV/m
4819.231	58.85	74.0 / PK
4819.551	38.96	54.0 / AV
Harmonics 2410MHz	Horizontal Polarization	
Freq	Level	Limit/ Detector
MHz	dBuV/m	dBuV/m
4819.952	61.41	74.0 / P
4819.631	39.46	54.0 / A
7228.862	66.98	74.0 / P
7229.054	44.71	54.0 / A
Fundamental Frequency 2440MHz	Vertical Polarization	
Freq	Level	Limit/ Detector
MHz	dBuV/m	dBuV/m
2439.599 100.56 114.0 / PK		
2439.840  Fundamental Frequency 2440MHz	42.50 Horizontal Polarization	94.0 / AV
Freq	Level	Limit/ Detector
MHz	dBuV/m	dBuV/m
2440.481	93.36	114.0 / PK
2439.760 37.51 94.0 / AV		

Test Report No.: 14044068 001 Date: 20.06.2016 page 12 of 14



Harmonics 2440MHz	Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4879.824	57.00	74.0 / P
4879.311	38.88	54.0 / A
7318.894	64.78	74.0 / P
7319.263	43.95	54.0 / A
Harmonics 2440MHz	Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4879.279	59.93	74.0 / P
4879.567	38.86	54.0 / A
Fundamental Frequency 2470MHz	Vertical Polarization	01.077
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2470.481	98.89	114.0 / PK
2469.840	38.19	94.0 / AV
Fundamental Frequency 2470MHz	Horizontal Polarization	
Freq	Level	Limit/ Detector
MHz	dBuV/m	dBuV/m
2470.353	93.78	114.0 / PK
2469.840	37.82	94.0 / AV
Harmonics 2470MHz	Vertical Polarization	
Freq	Level	Limit/ Detector
MHz	dBuV/m	dBuV/m
4940.881 4939.647	58.64 39.22	74.0 / P 54.0 / A
7408.894 7409.103	65.34 44.15	74.0 / P 54.0 / A
Harmonics 2470MHz	Horizontal Polarization	
Freq	Level	Limit/ Detector
MHz	dBuV/m	dBuV/m
4940.994	59.09	74.0 / P
4939.760	39.30	54.0 / A
7409.984	65.60	74.0 / P
7409.167	44.16	54.0 / A

Test Report No.: 14044068 001 Date: 20.06.2016 page 13 of 14



FCC 15.249 (d),	15.205 / RSS-210 (b)	- Out Of Band Radiated Emiss	sion Pass
Mode of operatio Port of testing Detector	: Enclosure : Peak : : 9kHz – 25GHz : 1 MHz / 3 MHz for : 9.0VDC, 6 x 1.5V		
Requirement:	be attenuated by a	d outside of the specified frequent t least 50dB below the level of th limits in Section 15.209, whichev	
Results:		requency modes comply with the us found below 30MHz.	field strength limit of section 15.209.
Tx frequency 241	10MHz	Vertical Polarization	
M	req Hz	Level dBuV/m	Limit/ Detector dBuV/m
	0.000	68.07	74.0 / PK
2400	0.000	38.32	54.0 / AV
Tx frequency 241	10MHz	Horizontal Polarization	
	req Hz	Level dBuV/m	Limit/ Detector dBuV/m
	0.000	62.40	74.0 / PK
	0.000	33.79	54.0 / AV
Tx frequency 244		Vertical Polarization	54.577V
Fr	req	Level	Limit/ Detector
	Hz	dBuV/m	dBuV/m
	ak found		74.0 / PK
	ak found		54.0 / AV
Tx frequency 244	•	Horizontal Polarization	
Fr	req	Level	Limit/ Detector
	Hz	dBuV/m	dBuV/m
	ak found		74.0 / PK
No pea	ak found		54.0 / AV
Tx frequency 247	70MHz	Vertical Polarization	
	req	Level	Limit/ Detector
	Hz	dBuV/m	dBuV/m
2483.500		63.86	74.0 / PK
2483	3.500	33.89	54.0 / AV
Tx frequency 247	70MHz	Horizontal Polarization	
	req	Level	Limit/ Detector
	Hz	dBuV/m	dBuV/m
	3.500	58.27	74.0 / PK
2483	3.500	33.88	54.0 / AV

Test Report No.: 14044068 001 Date: 20.06.2016 page 14 of 14