

TEST REPORT

Applicant Name & : Leadfar Industry Co., Ltd.
Address : No.1-2 Tong Fu Rd Niu Jiao Long village ,Ping Huan, Ping Shan
Manufacturing Site : Same as applicant

Sample Description :
Product : EZ fold laptop table
Model No. : MS30-021500-01
Electrical Rating : 5V/DC
FCC ID : YFQMS3002150001

Date Received : 28 April 2010
Date Test Conducted : 28 April 2010-11 May 2010
Test standards : FCC Part 15, Subpart B: 2008


Test Result : Pass
Conclusion : The submitted samples complied with the above rules/standards.
Remark : None.

*****End of Page*****

Prepared and Checked By:


Steven Zhou
Team Leader
Intertek Guangzhou

Approved By:


Signature
Carrie Chen
Sr. Project Engineer
Intertek Guangzhou
23 June 2010 Date

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China
Tel / Fax: 86-20-8213 9688/86-20-3205 7538

CONTENT

TEST REPORT	1
CONTENT	2
1 TEST RESULTS SUMMARY	3
2 TEST RESULTS CONCLUSION	4
3 LABORATORY MEASUREMENTS	5
4 TEST RESULTS	6
4.1 CONDUCTED EMISSION TEST	6
4.1.1 Used Test Equipment	6
4.1.2 Block Diagram of Test Setup	6
4.1.3 Test Setup and Procedure	7
4.1.4 Test Data	8
4.1.5 Emission Curve	10
4.1.6 Measurement Uncertainty	10
4.2 RADIATED EMISSION	11
4.2.1 Used Test Equipment	11
4.2.2 Block Diagram of Test Setup	11
4.2.3 Field Strength Calculation	12
4.2.4 Test Setup and Procedure	13
4.2.5 Test Data	13
4.2.6 Test Curve	14
4.2.7 Measurement uncertainty	14
5 APPENDIX I - PHOTOS OF TEST SETUP	15
6 APPENDIX II - PHOTOS OF EUT	17
7 APPENDIX III - DOCUMENT LIST	19
8 APPENDIX IIV - NAMEPLATE	20

1**TEST RESULTS SUMMARY****Classification of EUT: Class B**

Test Item	Standard	Result
Conducted Emission	FCC Part 15, Subpart B: 2008	Pass
Radiated Emission	FCC Part 15, Subpart B: 2008	Pass

Remark: 1. The symbol “N/A” in above table means Not Applicable.

2. When determining the test results, measurement uncertainty of tests has been considered.

2

Test Results Conclusion

(with Justification)

RE: EMC Testing Pursuant to FCC Part 15, Subpart B: 2008 Performed On the EZ fold laptop table, Model: MS30-021500-01.

We tested the EZ fold laptop table, Model: MS30-021500-01, to determine if it was in compliance with the relevant FCC rules as marked on the Test Results Summary. We found that the unit met the requirement of FCC Part 15, Subpart B: 2008 when tested as received. The worst case's test data was presented in this test report. Test items Conducted Emission and Radiated Emission were subcontracted.

The Equipment Under Test (EUT) is EZ fold laptop table, model: MS30-021500-01. It is powered by the USB port of computer. The EUT can provide functions that ergonomic multi-function laptop table, height adjustable for the perfect position and notebook stand with adjustable angle.

The EUT has a USB hub. During testing, the little USB port is connected with computer, one USB port is connected with LED light and other three USB ports are connected with USB flash memory. Data stream are transferred from computer to USB flash memory continuously.

The data on the below test result table lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

According 15.107, the worst case conducted emission at 0.198 MHz

Judgement: Passed by -14.5 dB

According 15.109, the worst case radiated emission at 960.000 MHz

Judgement: Passed by -0.6 dB

The production units are required to conform to the initial sample as received when the units are placed on the market.

3

LABORATORY MEASUREMENTS

Configuration Information

Equipment Under Test (EUT): EZ fold laptop table**Model:** MS30-021500-01**Serial No.** Not Labelled**Support Equipment:**

Product Name	Manufacturer	Model
Computer	HP	2510P(RL487AV)
Adapter	HP	PPP009H
Hard disk	Smart.drive	HD3-SU2FW
USB flash memory	Sandisk	SDCZ6/2GB

Rated Voltage: 5V/DC**Condition of Environment:** Temperature : 15~35°C
Relative Humidity: 35~60%
Atmosphere Pressure 86~106kPa**Notes:****1. EUT Grounding**

The unit was grounded as normally used.

2. Test Environment

If ambient levels of emissions exceed the appropriate limit, the following steps were taken to assure compliance. First, the measurement bandwidth was reduced, if this did not affect the peak readings. Such a reduction can allow much closer examination of emissions close to local ambient signals. Second, the antenna could be brought closer to the EUT. Finally, in severe cases, testing was re-performed at night or other times when the offending signal was off the air. The measurements were made at nominal room temperature ($25^{\circ}\text{C} \pm 10^{\circ}\text{C}$).

3. Test Site

Conducted Emission test and Radiated Emission test were subcontracted to Intertek Testing Services Shenzhen ltd. Kejiyuan Branch and located at 6F, Block D, Huahan Building, Langshan Road, Nanshan District Shenzhen, P.R.China. This test facility and site measurement data have been fully placed on file with File Number 242492

4. Test Platform

Radiated emission test was made on 0.8m high, 1m x 1.5m wide non-conductive platform. Conducted emission test was made on 0.8m high non-metallic table above earthed ground plane (Ground Reference Plane). The vertical conducting plane or wall of a screened room shall be located 40 cm to the rear of the EUT. All other surfaces of tabletop EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

5. Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

4 TEST RESULTS

4.1 Conducted Emission Test


Date of test: 04 May 2010

Test Result: Pass

4.1.1 Used Test Equipment

Equipment No.	Equipment	Model	Manufacturer	Serial No.	Cal. Date	Due Date
SZ185-02	EMI Test Receiver	ESCI	R&S	100692	23-Nov-09	23-Nov-10
SZ187-01	LISN	ENV216	R&S	100072	23-Nov-09	23-Nov-10
SZ067-03	Power Splitter	RVZ	R&S	100410	08-Mar-10	08-Mar-11
SZ066-01	Isolation Transformer	ISO TRAN	Erika Fiedler OHG	89	14-Jan-10	14-Jan-11
SZ067-01	Matching Pad	RAM	R&S	101055	08-Mar-10	08-Mar-11
SZ067-02	Matching Pad	RAM	R&S	101056	08-Mar-10	08-Mar-11
SZ062-09	RF Cable	RG58/AU	MIZU		/	/
SZ188-03	Shielding Room	ETS	RFD-100	4100	15-Sep-07	15-Sep-10

4.1.2 Block Diagram of Test Setup

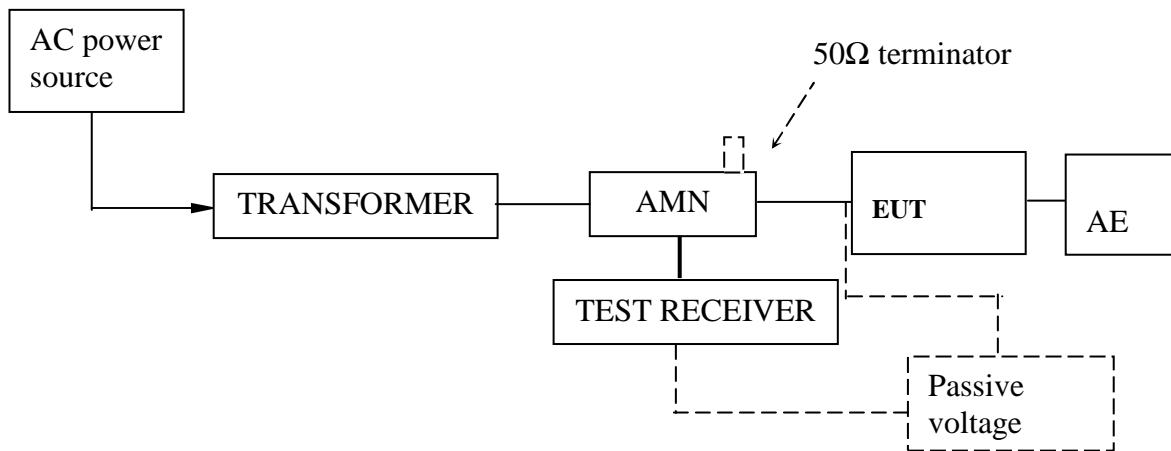

4.1.3 Test Setup and Procedure

Test was performed according to ANSI C63.4: 2003. The EUT was set to achieve the maximum emission level. The mains terminal disturbance voltage was measured with the EUT in a shielded room. The EUT was connected to AC power source through an Artificial Mains Network which provides a 50Ω linear impedance Artificial hand is used if appropriate (for handheld apparatus). The load/control terminal disturbance voltage was measured with passive voltage probe if appropriate.

The vertical conducting plane or wall of a screened room shall be located 40 cm to the rear of the EUT. All other surfaces of tabletop EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs. The table-top EUT was placed on a 0.8m high non-metallic table above earthed ground plane(Ground Reference Plane). And for floor standing EUT, was placed on a 0.1m high non-metallic supported on GRP. The Artificial Mains Network is situated at a distance of 0.8m from the EUT.

During the test, mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m.

The bandwidth of test receiver was set at 9 kHz. The frequency range from 150 kHz to 30MHz was checked.

4.1.4 Test Data**At main terminal: Pass****Tested Wire: Live****Operation Mode: Lamp On and Transfer data continuously**


Frequency [MHz]	Quasi-Peak		Average	
	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]
0.160	<55	65.5	<45	55.5
0.240	<52	62.1	<42	52.1
0.550	<46	56.0	<36	46.0
1.000	<46	56.0	<36	46.0
1.400	<46	56.0	<36	46.0
2.000	<46	56.0	<36	46.0
3.500	<46	56.0	<36	46.0
6.000	<50	60.0	<40	50.0
10.000	<50	60.0	<40	50.0
22.000	<50	60.0	<40	50.0
30.000	<50	60.0	<40	50.0

Tested Wire: Neutral**Operation Mode: Lamp On and Transfer data continuously**


Frequency [MHz]	Quasi-Peak		Average	
	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]
0.198	47.5	63.7	39.2	53.7
0.266	43.4	61.2	35.8	51.2
0.550	<46	56.0	<36	46.0
1.000	<46	56.0	<36	46.0
1.400	<46	56.0	<36	46.0
2.000	<46	56.0	<36	46.0
2.614	33.7	56.0	<36	46.0
3.500	<46	56.0	<36	46.0
6.000	<50	60.0	<40	50.0
10.000	<50	60.0	<40	50.0
22.000	<50	60.0	<40	50.0
30.000	<50	60.0	<40	50.0

4.1.5 Emission Curve

Tested Wire: Live

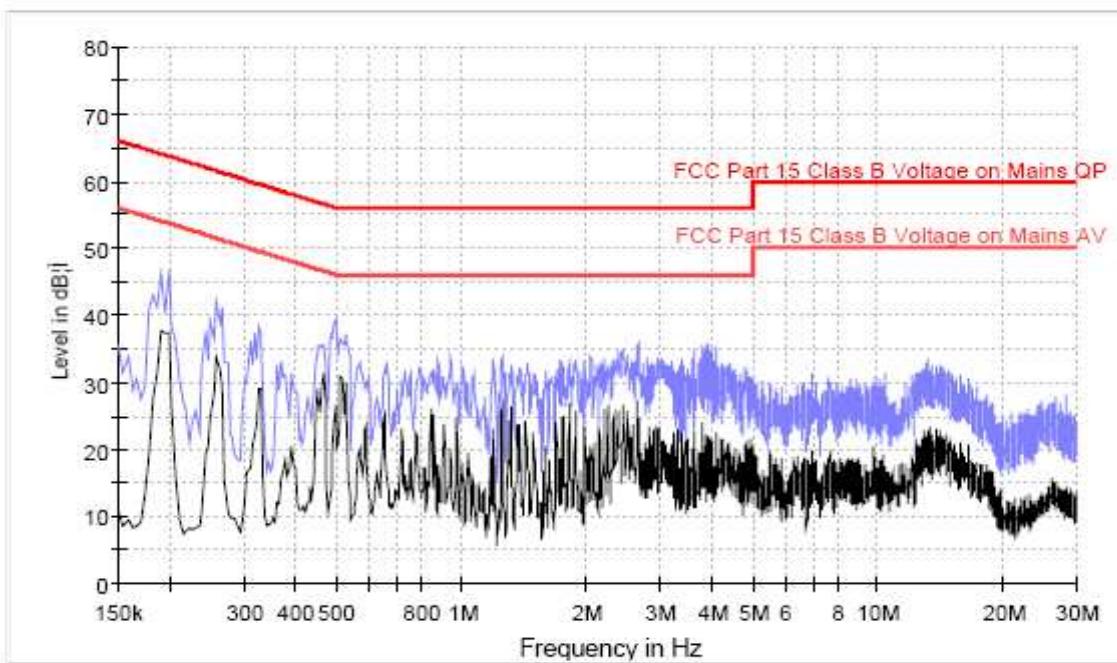

Tested Wire: Neutral

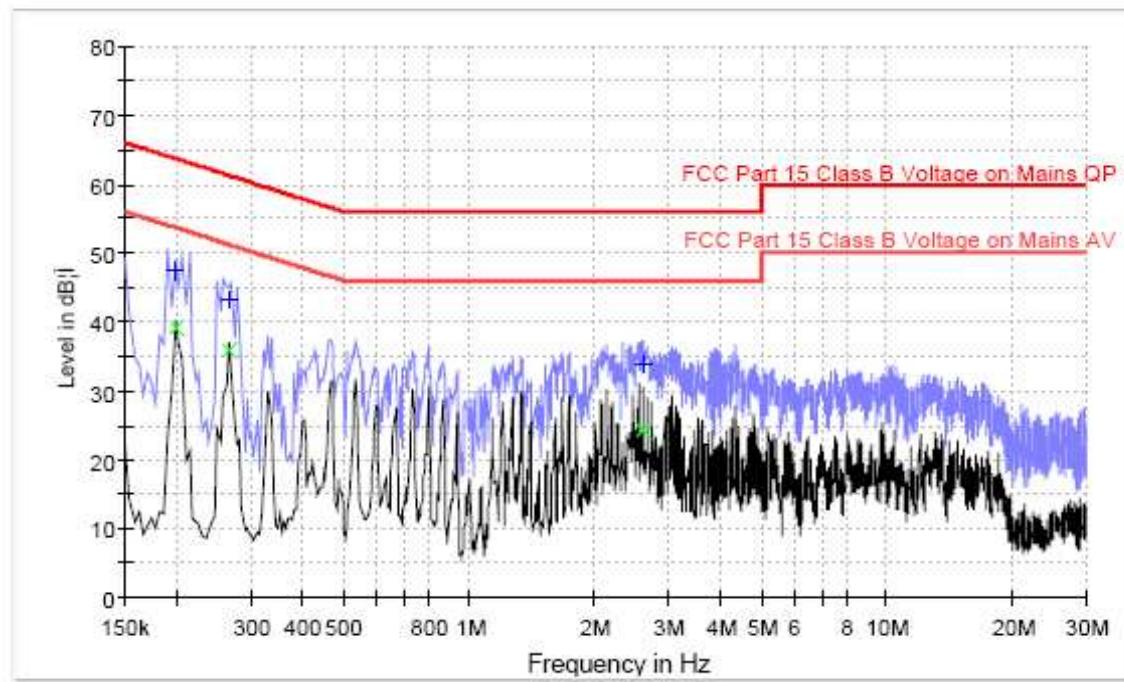

4.1.6 Measurement Uncertainty

Uncertainty: 1.7 dB at a level of confidence of 95%

4.2 Radiated Emission


Date of test: 11 May 2010

Test Result: Pass

4.2.1 Used Test Equipment

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-03	BiConiLog Antenna	ETS	3142C	00066460	25-Nov-09	25-May-11
SZ185-01	EMI Receiver	R&S	ESCI	100547	08-Mar-10	08-Mar-11
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	18-Mar-10	18-Mar-11
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	31-Oct-09	31-Oct-10
SZ062-04	RF Cable	RADIALL	RG 213U	--	05-Nov-09	05-Nov-10
SZ062-06	RF Cable	RADIALL	0.04-26.5GHz	--	17-Aug-09	17-Aug-10

4.2.2 Block Diagram of Test Setup

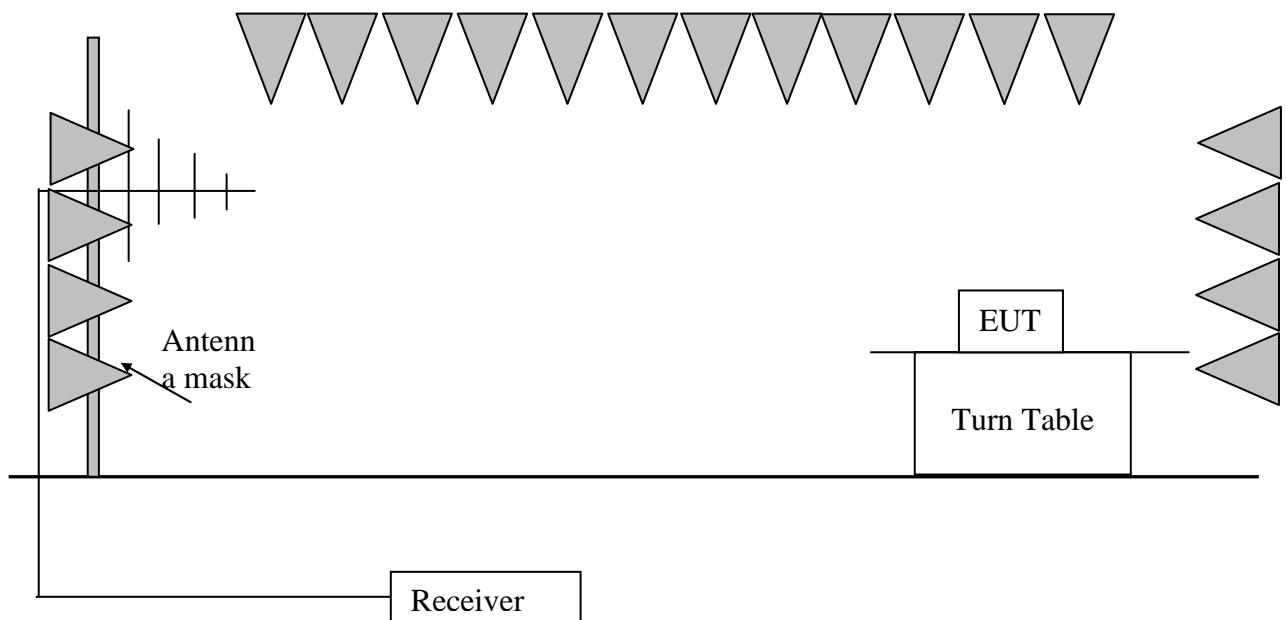

4.2.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RR = RA - AG - AV in $\text{dB}\mu\text{V}$

LF = CF + AF in dB

Assume a receiver reading of 52.0 $\text{dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 $\text{dB}\mu\text{V}/\text{m}$. This value in $\text{dB}\mu\text{V}/\text{m}$ was converted to its corresponding level in $\mu\text{V}/\text{m}$.

$$RA = 52.0 \text{ dB}\mu\text{V}/\text{m}$$

$$AF = 7.4 \text{ dB}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$CF = 1.6 \text{ dB}$$

$$LF = 9.0 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V}/\text{m})/20] = 22.4 \mu\text{V}/\text{m}$$

4.2.4 Test Setup and Procedure

The measurement was applied in a 3 m semi-anechoic chamber. The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mask. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

Broadband antenna was used as receiving antenna. Both horizontal and vertical polarization of the antenna was set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4: 2003 requirement during radiated test. The bandwidth setting on R&S Test Receiver was 120 kHz. The frequency range from 30MHz to 1000MHz was checked

4.2.5 Test Data


Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	600.100	39.7	20.0	22.3	-	42.0	46.0	-4.0
Horizontal	960.000	38.4	20.0	27	-	45.4	46.0	-0.6
Horizontal	960.100	40.1	20.0	27	-	47.1	54.0	-6.9
Vertical	300.100	43.3	20.0	15.2	-	38.5	46.0	-7.5
Vertical	480.000	38.9	20.0	19.9	-	38.8	46.0	-7.2


Remark: Antenna factor includes antenna and cable factor

4.2.6 Test Curve

Horizontal

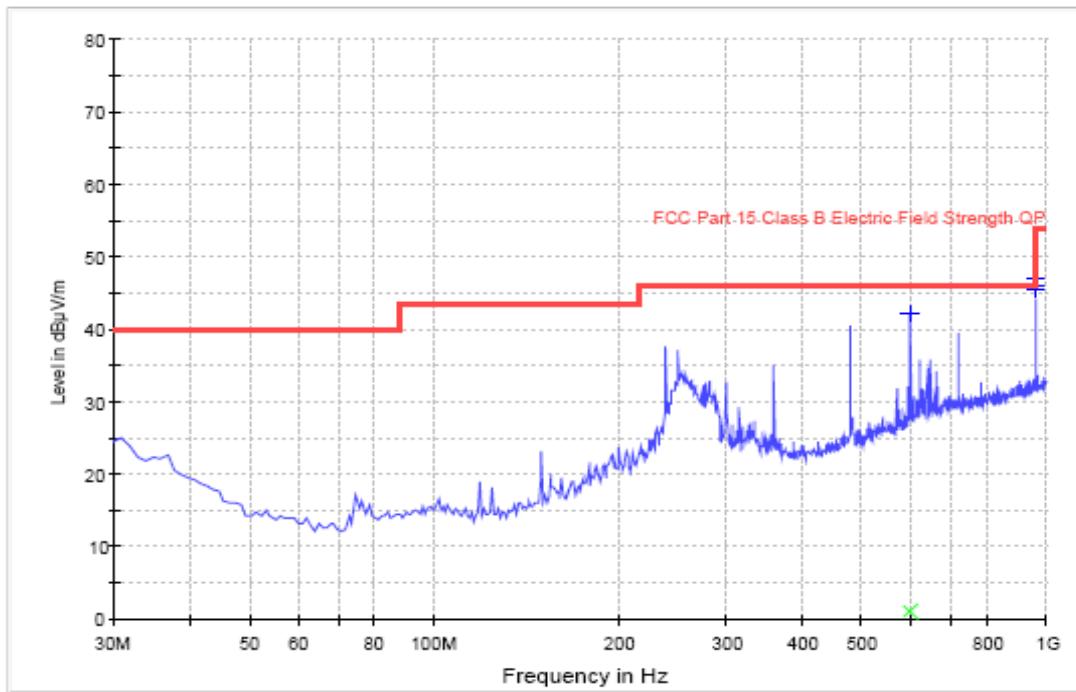

Vertical

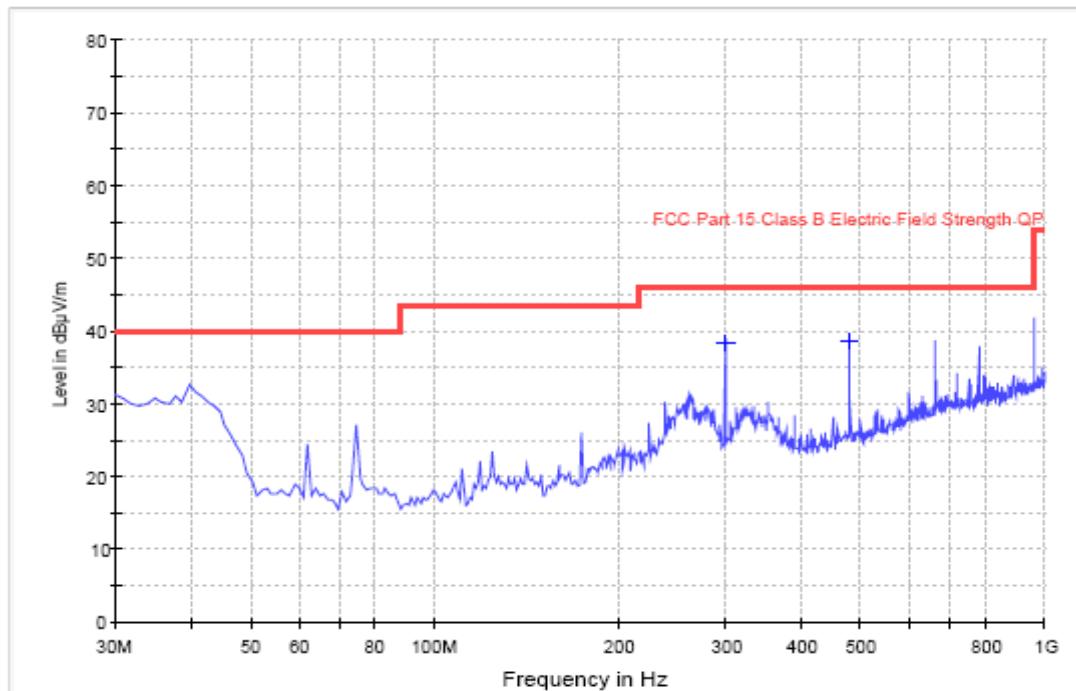


4.2.7 Measurement uncertainty


Uncertainty: 4.8 dB in the frequency range of 30-1000 MHz at a level of confidence of 95%

5 Appendix I - Photos of test setup

Conducted Emission

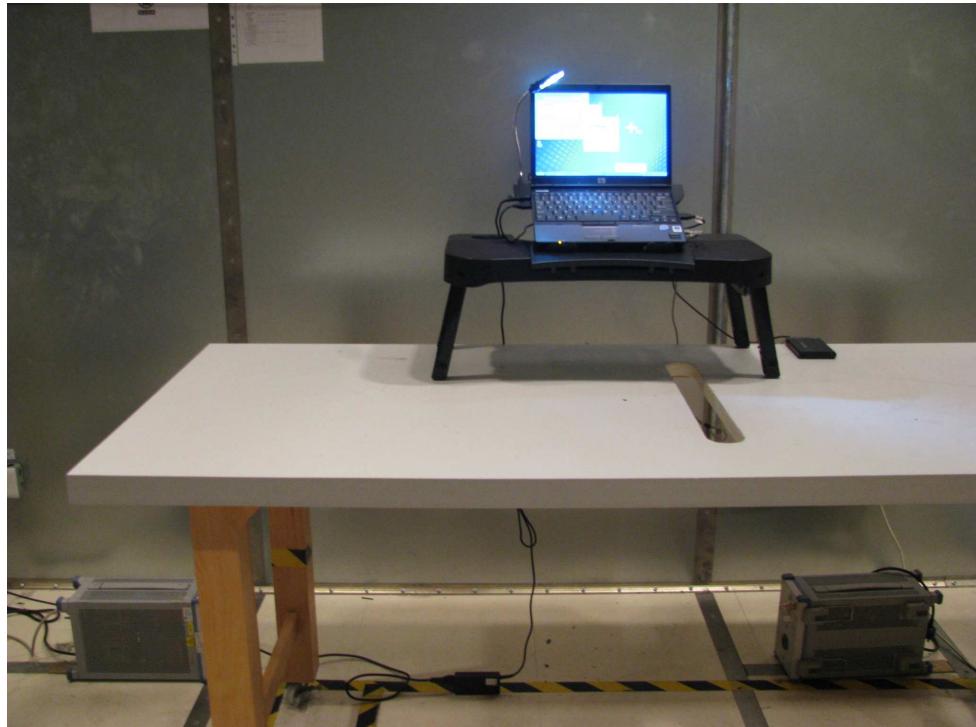

Radiated Emission

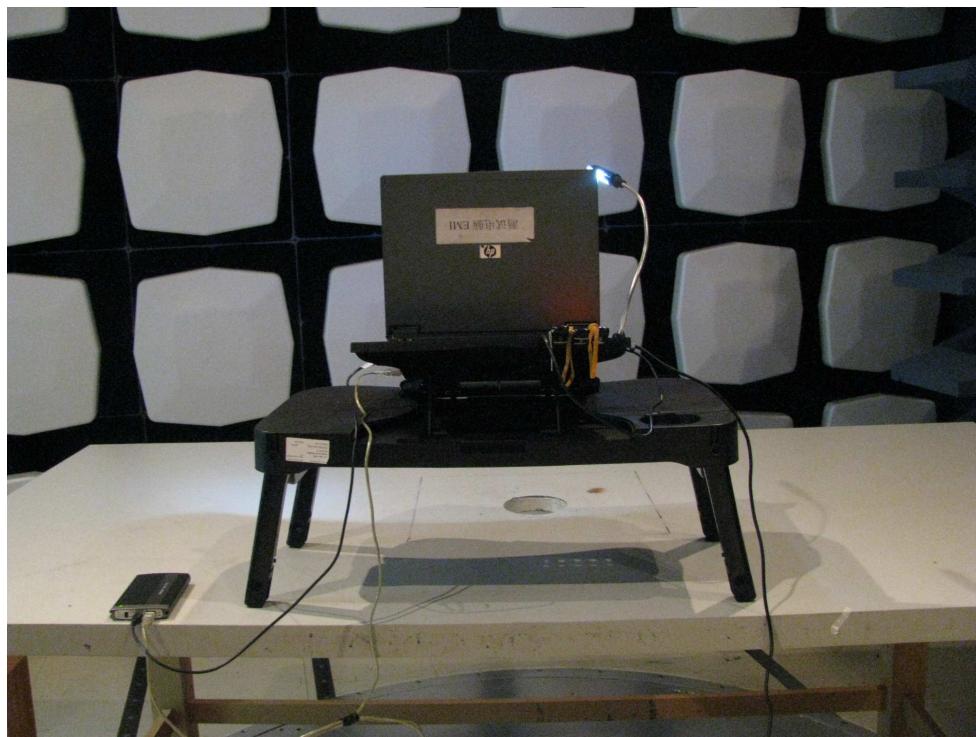


6 Appendix II - Photos of EUT


Outside



PCB
Front view

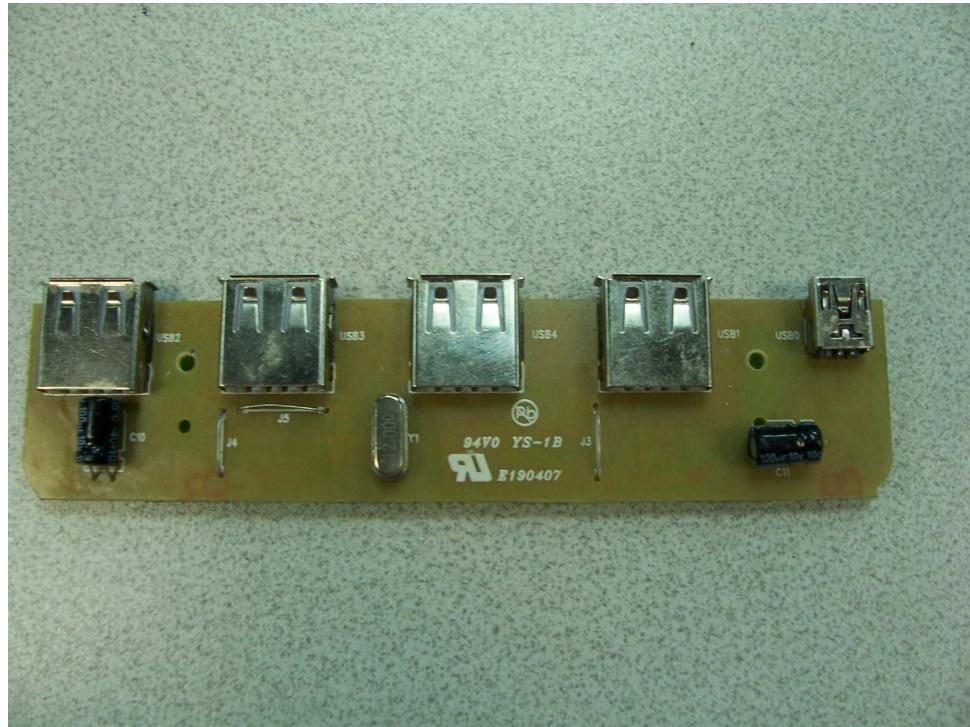

Back view

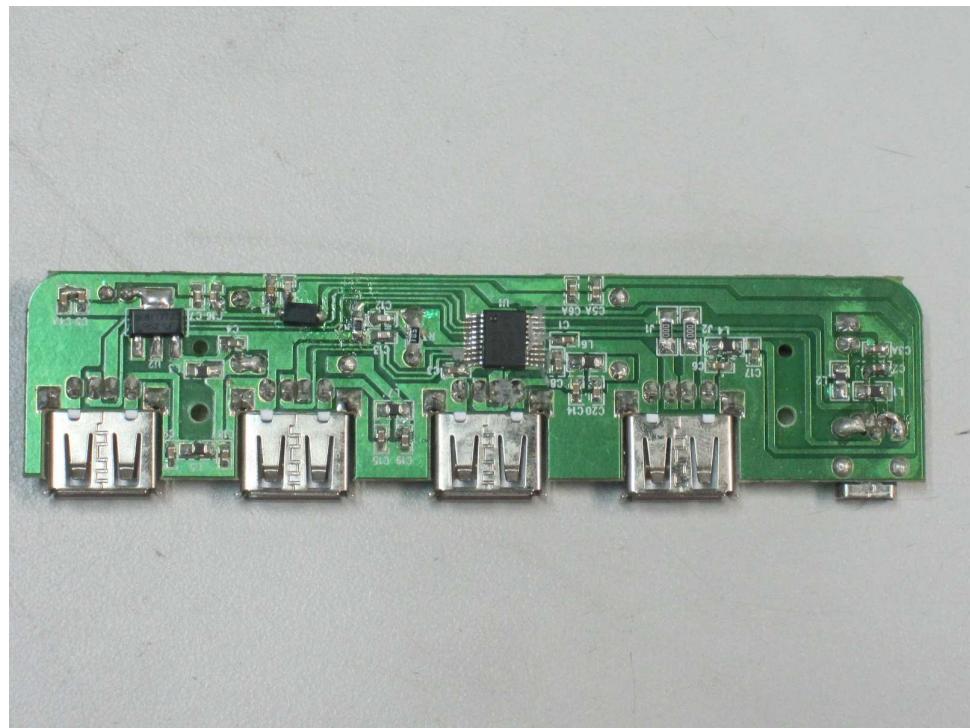

7 Appendix III - Document List

Exhibit type	File Description	Filename
Test Report	Test Report	Report.pdf
Modification Report	Modification Report	Modification Report.pdf
Block Diagram	Block Diagram	Block.pdf
Schematics	Circuit Diagram	Circuit.pdf
Operation Description	Technical Description	Description.pdf
ID Label/Location	Label Artwork and Location	Label.pdf
User Manual	User Manual	Manual.pdf
Cover Letter	Letter of Agency	Agency.pdf

8 Appendix II V - Nameplate

FCC LABELLING AND INSTRUCTION MANUAL REQUIREMENTS

Devices subject to FCC Part 15, Subpart B: 2008 verification must be labeled with the following statement. The label can be affixed at any space external to the product except the battery door or detachable parts. If the label too small to hold the statement, this statement can be written into instruction manual.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

In addition, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.**
- Increase the separation between the equipment and receiver.**
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.**
- Consult the dealer or an experienced radio/TV technician for help.**