

**ESTECH Co., Ltd.**Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea**Electromagnetic
Interference
Test Report****Test Report for FCC**

FCC ID:YFUKIP-3100

Report Number		ESTF151005-001				
Applicant	Company name	Kyung Gee Electronics Co., Ltd				
	Address	628-7 Dungchon-Dong, Kangseo-Gu, Seoul, Korea				
	Telephone	82-2-3661-3485				
Product	Product name	VOIP PHONE				
	Model No.	KIP-3100	Manufacturer	Kyung Gee Electronics Co., Ltd		
	Serial No.	05KT000029	Country of origin	KOREA		
Test date	4-May-10		Date of issue	28-May-10		
Testing location	ESTECH. Co., Ltd. 97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea					
Standard	FCC PART 15 2008 , ANSI C 63.4 2003					
Test item	<input checked="" type="checkbox"/> Conducted Emission	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B	Test result	OK	
	<input checked="" type="checkbox"/> Radiated Emission	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B	Test result	OK	
Measurement facility registration number		94696				
Tested by	Senior Engineer J.H.Kim					
Reviewed by	Engineering Manager J.M.Yang					
Abbreviation	OK, Pass = Passed, Fail = Failed, N/A = not applicable					
<ul style="list-style-type: none"> * Note – This test report is not permitted to copy partly without our permission – This test result is dependent on only equipment to be used – This test result based on a single evaluation of one sample of the above mentioned 						



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Gumcheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

Contents

1. Laboratory Information	3
2. Description of EUT	4
3. Test Standards	5
4. Measurement condition	6
5. Measurement of radiated emission	8
5.1 Measurement equipment	8
5.2 Environmental conditions	8
5.3 Test data	9
6. Measurement of conducted emission	10
6.1 Measurement equipment	10
6.2 Environmental conditions	10
6.3 Test data	11
7. Photographs of test setup	12
8. Photographs of EUT	14

Appendix 1. Spectral diagram

Appendix 2. Photographs of EUT in side PCB



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

1. Laboratory Information

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report. ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name : ESTECH Co., Ltd.

Head Office : Rm 1015, World Venture Center II, 426-5, Gasan-dong, Geumcheon-gu, Seoul, Korea
(Safety & Telecom. Test Lab)

EMC Test Lab : 97-1, Hoeok-ri, Majang-myun, Ichion-city, Kyonggi-do, South Korea

1.3 Official Qualification(s)

KCC : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Filed Laboratory at Federal Communications Commission

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

2. Description of EUT

2.1 Summary of Equipment Under Test

NONE : VOIP PHONE

Model Number : KIP-3100

Serial Number : NONE

Manufacturer : Kyung Gee Electronics Co., Ltd

Country of origin : KOREA

Rating : Adapter input : (100 ~240) Va.c. , (50/60) Hz , 1.8 A
: DC input : 5 Vd.c. , 2 A

Receipt Date : 3-Feb-10

X-tal : 8.192 MHz , 25 MHz



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Gumcheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

3. Test Standards

Test Standard : FCC PART 15 (2008)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

Test Method : ANSI C 63.4 (2003)

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guro-gu,
Seoul, 158-803, Korea




**Electromagnetic
Interference
Test Report**

4. Measurement Condition

4.1 EUT Operation.

- The EUT was in the following operation mode during all testing
- 1. Check to normal mode operation
- 2. The operational conditions of the EUT was determined by the manufacturer according to the typical use of the EUT with respect to the expected highest level of emission.
- 3. Connect EUT to Personal Computer Lan port and Connect to extenal network.
- 4. Execute Ping command between Personal Computer and External network.
- 5. Read/Write packet data continuously.

4.2 Configuration and Peripherals

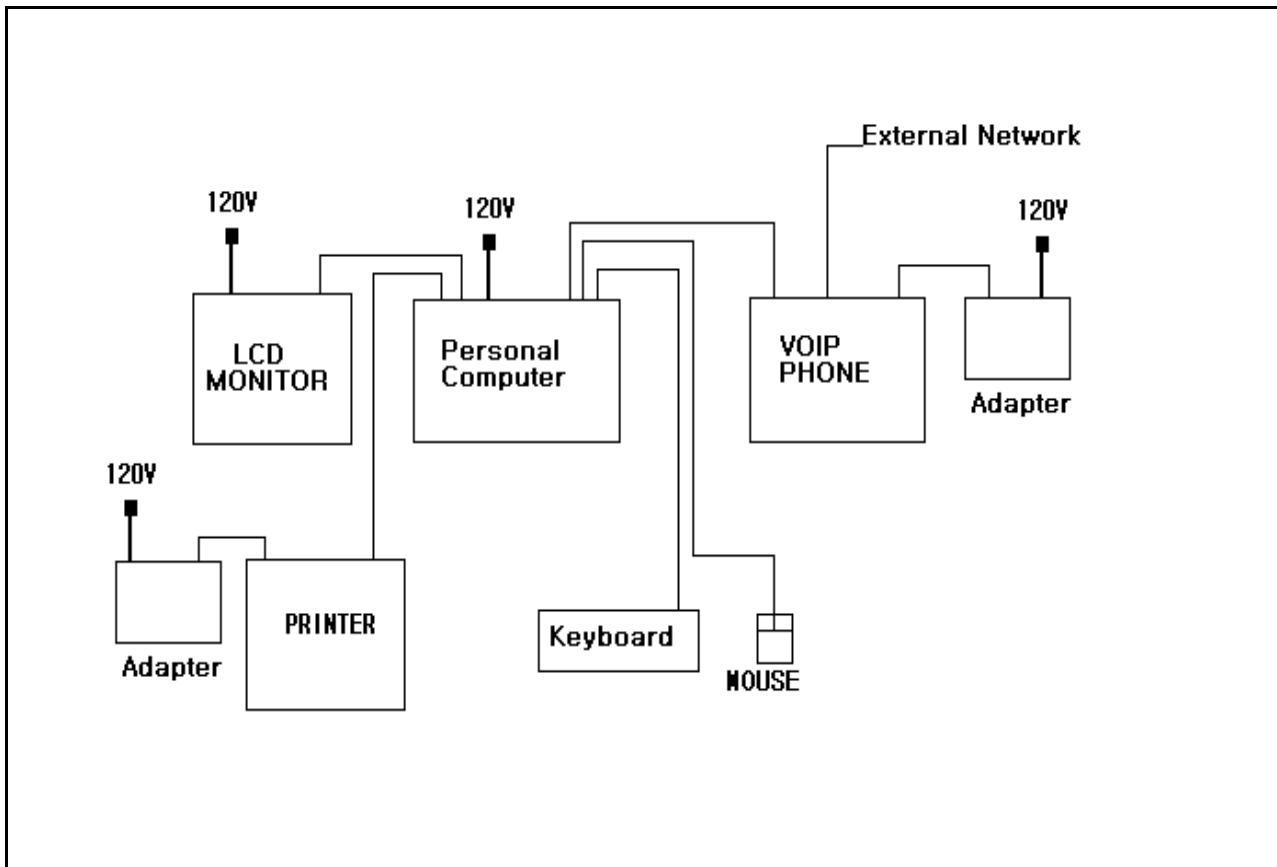

**ESTECH Co., Ltd.**Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea**Electromagnetic
Interference
Test Report**

4.3 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
VOIP PHONE	KIP-3100	05KT000029	Kyung Gee Electronics Co., Ltd	EUT
Personal Computer	DCGAF	HKKPHBX	Dell Inc.	
LCD Monitor	E228WFPc	A00	Dell Inc.	
Mouse	X08-71118	0403	Microsoft Corp.	
Keyboard	SK-8115	08JP	YET FOUNDATION LTD.	
Printer	VCVRA-0702	TH7C63255W	HP	
Adapter	SW10-05002000-EK	NONE	HONGKONG Power TEK International Co., Ltd.	
Adapter	0957-2231	07J0856632	Bestec DongGuan Electronics Co., Ltd.	

4.4 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
VOIP Phone	WAN	External Network	WAN	20	NO	
VOIP Phone	LAN	Personal Computer	LAN	1.2	NO	
VOIP Phone	Power	Adapter	Power	2	NO	
Personal Computer	RGB	LCD Monitor	RGB	2	Yes	
Personal Computer	USB	Keyboard	USB	2	Yes	
Personal Computer	USB	Printer	USB	2	Yes	
Personal Computer	USB	Mouse	USB	2	Yes	
Printer	Power	Adapter	Power	2	NO	



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Gumiheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

5. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC Part 15 (2008) . The test setup was made according to ANSI C 63.4 (2003) on an open test site, which allows a 3m distance measurement. The EUT was placed in the center of wooden turntable. The height of this table was 0.8m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

5.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
Test Receiver	ESVS10	Rohde & Schwarz	838562/002	2011. 2. 01
Spectrum Analyzer	R3273	ADVANTEST	110600592	2011. 2. 01
LogBicon Antenna	VULB 9160	Schwarzbeck	3142	2010. 5. 13
Amplifier	8447F	HP	2805A02972	2011. 2. 01
Turn Table	2087	EMCO	2129	-
Antenna Mast	2070-01	EMCO	9702-203	-
ANT Mast Controller	2090	EMCO	1535	-
Turn Table Controller	2090	EMCO	1535	-

5.2 Environmental Condition

Test Place : Open site(3 m)

Temperature (°C) : 15 °C

Humidity (%) : 69 %



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guro-gu,
Seoul, 158-803, Korea



Electromagnetic Interference Test Report

5.3 Test data

Test Date : 4-May-10

Measurement Distance : 3 m

H : Horizontal, V : Vertical

*CL = Cable Loss-Amplifier Gain (In case of above 1000MHz)

*CL = Cable Loss (In case of below 1000MHz)

Remark

- *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
- *The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection at frequency above 1GHz.
- *To meet the radiated emission applied a ferrite core in Main Board's flat cable.

**ESTECH Co., Ltd.**Rm 1015, World Venture Center 11,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea**Electromagnetic
Interference
Test Report**

6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 to 30 MHz was measured in accordance to FCC Part 15 (2008) . The test setup was made according to ANSI C 63.4 (2003) in a shielded. The EUT was placed on a non-conductive table at least 80 above the ground plan. A grounded vertical reference plane was positioned in a distance of 40cm from the EUT. The distance from the EUT to other metal surfaces was at least 0.8m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0m.. The test receiver with Quasi Peak detector complies with CISPR 16.

6.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
LISN	ESH3-Z5	Rohde & Schwarz	838979/010	2011. 2. 1
LISN	NNLA8120A	Schwarzbeck	8120161	2011. 2. 1
TEST Receiver	ESPI7	Rohde & Schwarz	100185	2010. 8. 25
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	2011. 2. 1

6.2 Environmental Condition

Test Place : Shield Room

Temperature (°C) : 22 °C

Humidity (%) : 55 %



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



Electromagnetic Interference Test Report

6.3 Test data

Test Date : 4-May-10



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

7. Photographs of test setup

7.1 Setup for Radiated Test : 30 ~ 1000 MHz

[Front]



[Rear]





ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Gumcheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

7.3 Setup for Conducted Test : 0.15 ~ 30 MHz

[Front]




[Rear]





ESTECH Co., Ltd.

Rm 1015, World Venture Center 11,
426-5 Gasan-dong, Guro-gu,
Seoul, 158-803, Korea

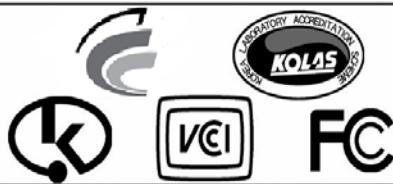

**Electromagnetic
Interference
Test Report**

8. Photographs of EUT


[Front]




[Rear]



Appendix 1. Spectral diagram

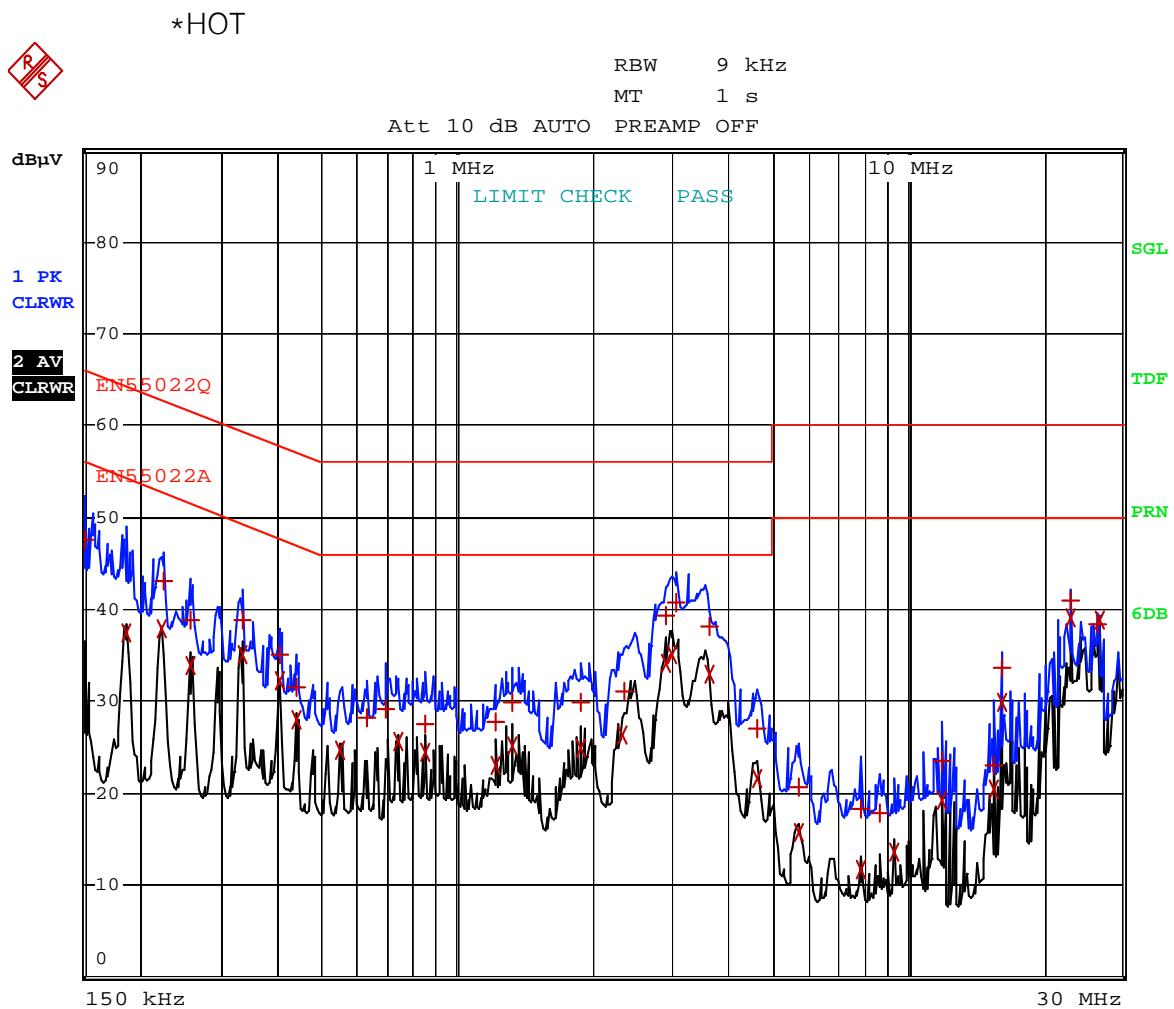

*NEUTRAL

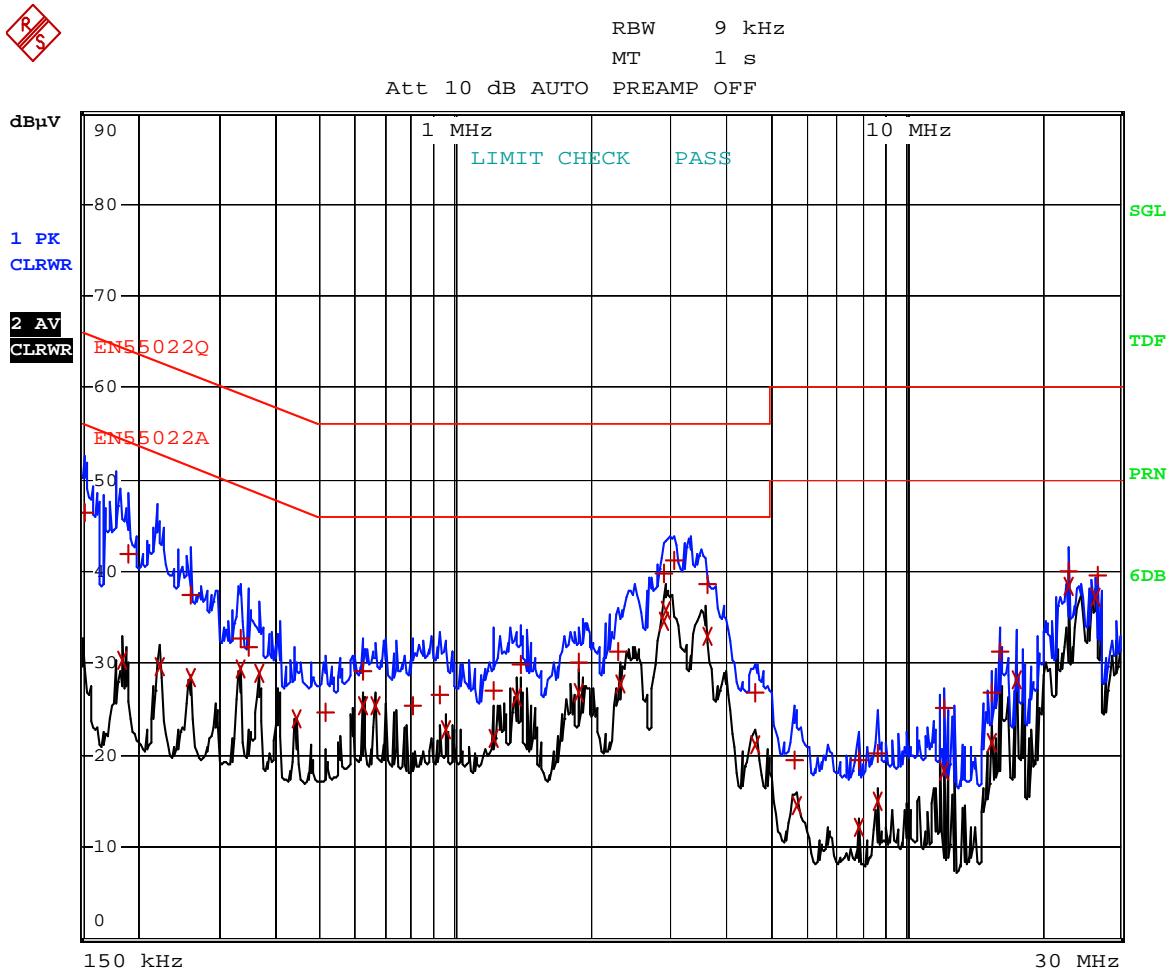

Appendix 2. Photographs of EUT in side PCB

