



TEST REPORT

Applicant	SHUOYING DIGITAL SCIENCE&TECHNOLOGY(CHINA)Co.,Ltd
Address	NO.187,5 th Binhai Road , Binhai Industrial Park , Economic and Technological Development Zone , Wenzhou , Zhejiang , China

Manufacturer or Supplier	SHUOYING DIGITAL SCIENCE&TECHNOLOGY(CHINA)Co.,Ltd		
Address	NO.187,5 th Binhai Road , Binhai Industrial Park , Economic and Technological Development Zone , Wenzhou , Zhejiang , China		
Product	Action Camera		
Brand Name	N/A		
Model	DVH1200		
Additional Model & Model Difference	SVC455, See item 2.1		
Date of tests	Sep. 16 ~ Sep. 25, 2013		

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

FCC Part 15, Subpart B, Class B

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Breeze Jiang Project Engineer / EMC Department	Approved by Madison Luo Supervisor/ EMC Department
preere	Madison.
	Date: Sep. 26, 2013

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



Table of Contents

RELE	ASE CONTROL RECORD	3
1 1.1	SUMMARY OF TEST RESULTSMEASUREMENT UNCERTAINTY	
2 2.1 2.2 2.3	GENERAL INFORMATION	5 6
3 3.1 3.1.1 3.1.2	EMISSION TEST CONDUCTED EMISSION MEASUREMENT LIMITS OF CONDUCTED EMISSION MEASUREMENT TEST INSTRUMENTS	7 7
3.1.3 3.1.4 3.1.5	TEST PROCEDURE DEVIATION FROM TEST STANDARD TEST SETUP	8 8 9
3.1.6 3.1.7 3.2 3.2.1	EUT OPERATING CONDITIONS	10 12
3.2.2 3.2.3 3.2.4	TEST INSTRUMENTS TEST PROCEDURE DEVIATION FROM TEST STANDARD	13 14
3.2.5 3.2.6 3.2.7	TEST SETUP EUT OPERATING CONDITIONS TEST RESULTS	15 15
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	19
5	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	19

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FC130913N026	Original release	Sep. 26, 2013

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart B			
Standard Section	Test Item	Result	Remark
FCC Part 15,	Conducted Emission Test	PASS	Meets Class B Limit Minimum passing margin is -10.77dB at 0.18508MHz
Subpart B Class B	Radiated Emission Test (30MHz ~ 3GHz)	PASS	Meets Class B Limit Minimum passing margin is -3.64dB at 31.94MHz

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

MEASUREMENT	FREQUENCY	UNCERTAINTY	
Conducted emissions	150kHz ~ 30MHz	+/- 2.67 dB	
Dedicted emissions	30MHz ~ 1GHz	+/- 4.12 dB	
Radiated emissions	Abover 1GHz	+/- 4.30 dB	

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Action Camera
MODEL NO.	DVH1200
ADDITIONAL MODEL	SVC455
POWER SUPPLY	DC 5V by USB host device input AC 120V/60Hz
DATA CABLE SUPPLIED	USB Line:unshielded, detachable 0.8m, with one core
THE HIGHEST	
OPERATING	Below 500MHz
FREQUENCY	

NOTE:

- 1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2. For the test results, the EUT had been tested with all conditions. But only the worst case was showed in test report.
- 3. Additional model SVC455 is identical with the test model DVH1200 except model name, appearance color and silk-screen the trade name and model number for marketing purpose.

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



2.2 DESCRIPTION OF TEST MODES

The EUT was tested under the following modes. And the final worst mode was marked in boldface and recorded in this report.

Conducted Emission Test

Test Mode	Test Voltage	
Data Transmitting And Charging	DC5V From Notebook PC Input AC120V	
Data Transmitting And Charging	60Hz	

Radiated Emission Test

Test Mode	Test Voltage	
Data Transmitting And Charging	DC5V From Notebook PC Input AC120V	
Data Transmitting And Charging	60Hz	

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an dependent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook PC	DELL	5P2PM2X	12400120329	N/A
2	Notebook PC	Lenovo	E430	MP-0DN27	N/A
3	Printer	Lenovo	LJ2200L	LP02857415 48001408	N/A
4	Mouse	DELL	MOC5UO	J0Z008H3	N/A

NO.	CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 0.8m, DC Line: Unshielded, Detachable 2.0m
2	AC Line: Unshielded, Detachable 1.5m, DC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m, USB Line: Unshielded, Detachable 1.5m
4	USB Line: Unshielded, Detachable 1.8m

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107)

	Class A (dBuV)		Class B (dBuV)			
FREQUENCY (MHz)	Quasi-peak	Average	Quasi-peak	Average		
0.15 - 0.5	79	66	66 - 56	56 - 46		
0.50 - 5.0	73	60	56	46		
5.0 - 30.0	73	60	60	50		

- **NOTES**: (1) The lower limit shall apply at the transition frequencies.
 - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU 26	100005	May 14,2013	May 13,2014
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	May 14,2013	May 13,2014
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	May 14,2013	May 13,2014
Test software	ADT	ADT_Cond_ V7.3.7	N/A	N/A	N/A

NOTE: 1. The test was performed in shielded room 553.

2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



3.1.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2009(section 7).

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit 20dB) were not recorded.

NOTE:

- 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3. Margin value = Emission level Limit value
- 4. Correction factor = Insertion loss + Cable loss
- 5. Emission Level = Correction Factor + Reading Value.


3.1.4 DEVIATION FROM TEST STANDARD

No deviation

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



3.1.5 TEST SETUP

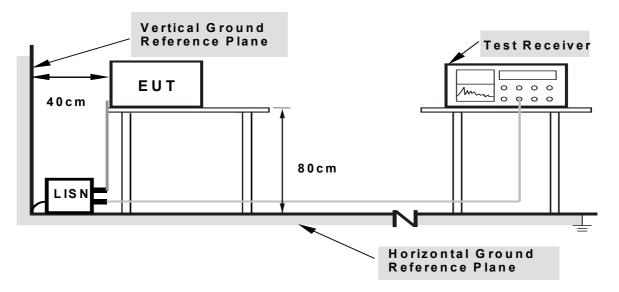

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

3.1.6 EUT OPERATING CONDITIONS

- Turned on the power of all equipment. connect to notebook PC then running data transmitting software.
- b. EUT was operated according to the type described in manufacturer's specifications or the user's manual.

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080




3.1.7 TEST RESULTS

TEST MODE	Data Transmitting And Charging	ing 6DB BANDWIDTH	
TEST VOLTAGE	DC5V From Notebook PC Input AC120V 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH	TESTED BY	Bin

	Freq.	Corr.	Readin	g Value		sion vel	Lir	nit	Mar	gin
No		Factor	[dB	(uV)]	[dB	(uV)]	[dB	(uV)]	(dl	В)
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18519	10.56	40.84	25.91	51.40	36.47	64.25	54.25	-12.85	-17.78
2	0.18519	10.56	40.63	26.00	51.19	36.56	64.25	54.25	-13.06	-17.69
3	0.24407	10.42	33.58	19.02	44.00	29.44	61.96	51.96	-17.96	-22.52
4	0.29898	10.44	28.11	12.53	38.55	22.97	60.27	50.27	-21.72	-27.30
5	20.29041	10.11	29.02	20.84	39.13	30.95	60.00	50.00	-20.87	-19.05
6	25.12317	10.39	27.56	18.77	37.95	29.16	60.00	50.00	-22.05	-20.84

REMARKS: The emission levels of other frequencies were very low against the limit.

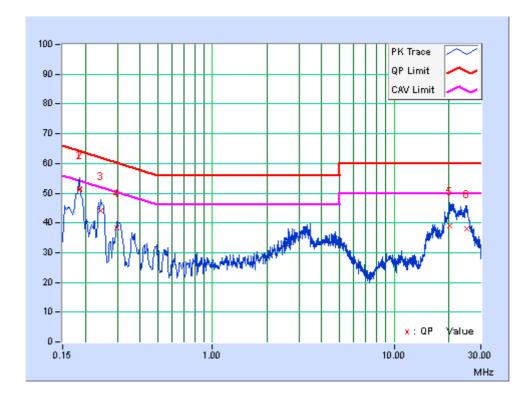


Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



TEST MODE	Data Transmitting And Charging	6DB BANDWIDTH	9 kHz
TEST VOLTAGE	DC5V From Notebook PC Input AC120V 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH	TESTED BY	Bin

	Freq.	Corr.	Readin	g Value		ssion vel	Lir	nit	Mai	gin
No		Factor	[dB	(uV)]	[dB	(uV)]	[dB	(uV)]	(d	B)
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18508	10.46	43.02	28.25	53.48	38.71	64.25	54.25	-10.77	-15.54
2	0.24384	10.37	35.78	20.60	46.15	30.97	61.96	51.96	-15.82	-21.00
3	0.31350	10.46	28.40	13.19	38.86	23.65	59.88	49.88	-21.02	-26.23
4	3.23499	9.63	23.99	15.77	33.62	25.40	56.00	46.00	-22.38	-20.60
5	20.92383	10.21	29.17	21.17	39.38	31.38	60.00	50.00	-20.62	-18.62
6	25.35777	10.30	27.08	19.17	37.38	29.47	60.00	50.00	-22.62	-20.53

REMARKS: The emission levels of other frequencies were very low against the limit.

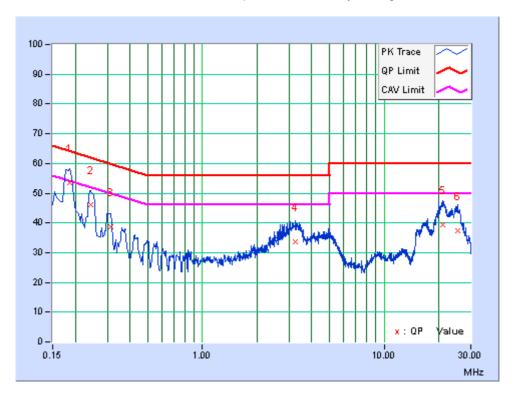

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.109)

FREQUENCY	Class A (at 10m) uV/m dBuV/m		Class B (at 3m)		
(MHz)			uV/m	dBuV/m	
30 – 88	90	39.1	100	40.0	
88 – 216	150	43.5	150	43.5	
216 – 960	210	46.4	200	46.0	
960 – 1000	300	49.5	500	54.0	

FREQUENCY RANGE OF RADIATED MEASUREMENT

(For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)				
Below 1.705	30				
1.705 – 108	1000				
108 – 500	2000				
500 – 1000	5000				
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower				

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBu	ıV/m) (at 3m)	Class B (dBuV/m) (at 3m)		
FREQUENCY (WINZ)	PEAK	AVERAGE	PEAK	AVERAGE	
Above 1000	80.0	60.0	74.0	54.0	

Note: (1) The lower limit shall apply at the transition frequencies.

- (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Guangdong 523942, China

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



3.2.2 TEST INSTRUMENTS

FOR FREQUENCY BELOW 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESVS10	841431/004	May 19,2013	May 18,2014
Bilog Antenna	Teseq	CBL 6111D	36043	Jul. 27,2013	Jul. 26,2014
EMI Test Receiver	Rohde&Schwarz	ESPI	100302	May 19,2013	May 18,2014
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 24,2013	Mar. 23,2014
Signal Amplifier	Agilent	8447D	2944A10488	N/A	N/A
Test software	ADT	ADT_Radiate	N/A	N/A	N/A

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

- 2. The test was performed in Chamber 966.
- 3. The FCC Site Registration No. is 494399

FOR FREQUENCY ABOVE 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	EMCO	3117	00062558	Oct.18,2012	Oct.17,2013
Spectrum Analyzer	Agilent	E4446A	MY46180622	April 24,2013	April 23,2014
Spectrum Analyzer (9KHz-25GHz)	Agilent	E7405A	MY45118807	May 14,2013	May 13,2014
Pre-Amplifier (100MHz-26.5GHz)	Agilent	8449B	3008A00409	May 14,2013	May 13,2014
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 04,2012	Nov. 03,2013
Test Software	ADT	ADT_Radiated_V 7.6.15	N/A	N/A	N/A

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

- 2. The test was performed in 10m Chamber.
- 3. The FCC Site Registration No. is 502831.

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



3.2.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2009 (section 12).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters (below 1GHz) and 3 meters (above 1GHz) away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

NOTE:

- 1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
- 3. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.
- 4. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 5. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 6. Margin value = Emission level Limit value.

3.2.4 DEVIATION FROM TEST STANDARD


No deviation

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080




3.2.5 TEST SETUP

<Frequency Range below 1GHz>

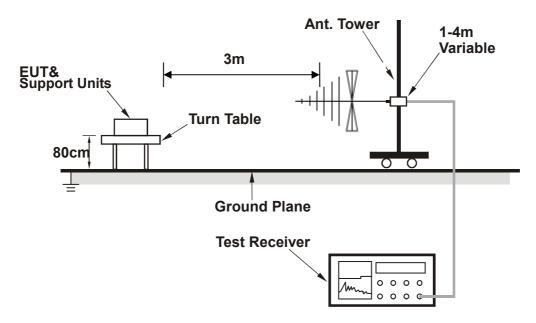

<Frequency Range above 1GHz>

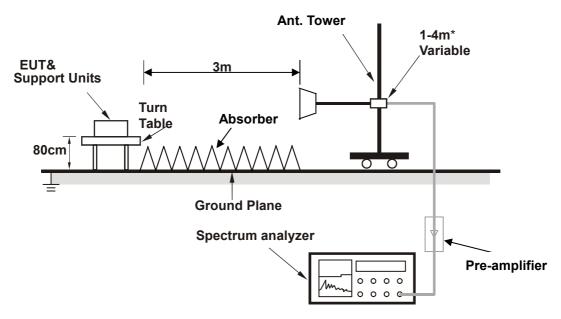

*: depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

3.2.6 EUT OPERATING CONDITIONS

Same as item 3.1.6.

Fax: +86 769 8593 1080

Tel.: +86 769 8593 5656




3.2.7 TEST RESULTS

TEST MODE	Data Transmitting And Charging	FREQUENCY RANGE	30-1000MHz	
TEST VOLTAGE	DC5V From Notebook PC Input AC120V 60Hz	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120kHz	
ENVIRONMENTAL CONDITIONS	23deg. C, 53% RH	TESTED BY: Eric		

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
	Freq. (MHz)	Correction	Raw	Emission	Limit Margin		Antenna	Table			
No.		I Factor I Valle I I AVAI I			Height	Angle					
		(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m) (dB)	(cm)	(Degree)				
1	62.98	6.65	23.42	30.07	40.00	-9.93	140	117			
2	136.70	12.82	21.97	34.79	43.50	-8.71	164	82			
3	225.94	11.73	24.43	36.16	46.00	-9.84	100	198			
4	398.60	19.20	13.42	32.62	46.00	-13.38	100	241			
5	485.90	21.70	18.73	40.43	46.00	-5.57	195	35			
6	497.54	21.96	17.08	39.05	46.00	-6.95	100	298			

REMARKS: The emission levels of other frequencies were very low against the limit.

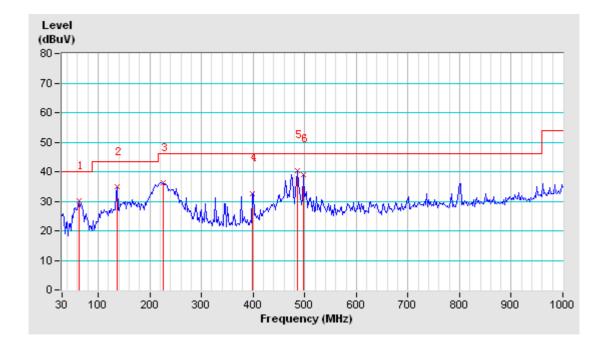

Fax: +86 769 8593 1080


Tel.: +86 769 8593 5656



TEST MODE	Data Transmitting And Charging	FREQUENCY RANGE	30-1000MHz
TEST VOLTAGE	DC5V From Notebook PC Input AC120V 60Hz	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 53% RH	TESTED BY: Eric	

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT AT 3 M									
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)		
1	31.94	18.39	17.98	36.36	40.00	-3.64	100	88		
2	49.40	8.88	21.26	30.14	40.00	-9.86	110	120		
3	136.70	12.82	20.49	33.30	43.50	-10.20	234	308		
4	216.00	10.76	22.07	32.82	43.50	-10.68	158	191		
5	377.26	18.34	11.82	30.16	46.00	-15.84	100	45		
6	474.26	21.34	13.63	34.97	46.00	-11.03	190	242		

REMARKS: The emission levels of other frequencies were very low against the limit.

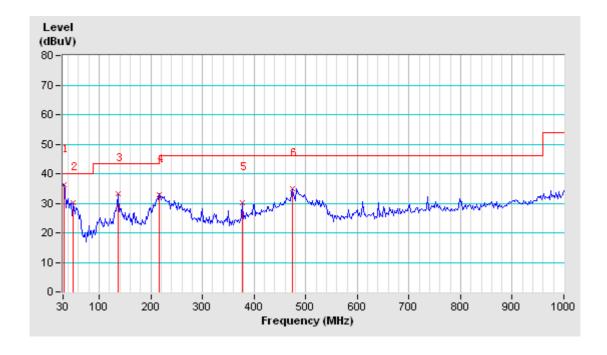

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



TEST MODE	Data Transmitting And Charging	FREQUENCY RANGE	1-6GHz	
TEST VOLTAGE	DC5V From Notebook PC Input AC120V 60Hz	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1MHz	
ENVIRONMENTAL CONDITIONS	25deg. C, 61% RH	TESTED BY: Endy Xie		

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq.	Emission	Limit	Margin	Antenna	Table	Raw	Correction	
No.	(MHz)	Level		_	Height	Angle	Value	Factor	
	(IVIHZ)	(dBuV/m)	(dBuV/m)		(cm)	(Degree)	(dBuV)	(dB/m)	
1	1483.33 PK	48.51	74.00	-25.49	100	204	51.65	-3.14	
2	1483.53 AV	44.03	54.00	-9.97	100	204	47.17	-3.14	
3	1975.00 PK	47.20	74.00	-26.80	100	129	45.30	1.90	
4	1975.00 AV	37.85	54.00	-16.15	100	129	35.95	1.91	
5	2075.00 PK	52.93	74.00	-21.07	100	225	50.61	2.32	
6	2076.98 AV	44.20	54.00	-9.80	100	225	41.88	2.32	

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freg.	Emission	Limit	Margin	Antenna	Table	Raw	Correction	
No.	•	Level	(dBuV/m)	_	Height	Angle	Value	Factor	
	(MHz)	(dBuV/m)	(ubuv/III)	i) (dB)	(cm)	(Degree)	(dBuV)	(dB/m)	
1	1483.33 PK	49.09	74.00	-24.91	100	207	52.23	-3.14	
2	1483.64 AV	43.34	54.00	-10.66	100	207	46.48	-3.14	
3	2075.00 PK	51.20	74.00	-22.80	100	207	48.88	2.32	
4	2076.98 AV	44.04	54.00	-9.96	100	219	41.72	2.32	
5	2225.00 PK	48.60	74.00	-25.40	100	207	45.99	2.61	
6	2225.40 AV	41.33	54.00	-12.67	100	231	38.72	2.61	

REMARKS:

- 1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.

Tel.: +86 769 8593 5656 Fax: +86 769 8593 1080



4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to attached file (Test Setup Photo).

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

Some modifications were made to the EUT by the lab during the test. And more details to see the modification letter.

---END---