

SHUOYING DIGITAL SCIENCE&TECHNOLOGY (CHINA)CO., LTD

Application For Certification

FCC ID: YGB-WDV6000

Wifi Camera

Model: WDV6000

Class B Personal Computer Peripherals

Report No.: 150109018SZN-002

Prepared and Checked by:	Approved by:	
Sign on file		
Sunny Zhou	Andy Yan	
Engineer	Senior Project Engineer	
-	Date: March 23, 2015	

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C_PC_b

LIST OF EXHIBITS

INTRODUCTION

EXHIBIT 1: General Description

EXHIBIT 2: System Test Configuration

EXHIBIT 3: Emission Results

EXHIBIT 4: Equipment Photographs

EXHIBIT 5: Product Labeling

EXHIBIT 6: Technical Specifications

EXHIBIT 7: Instruction Manual

EXHIBIT 8: Miscellaneous Information

EXHIBIT 9: Confidentiality Request

EXHIBIT 10: Test Equipment List

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

MEASUREMENT / TECHNICAL REPORT

SHUOYING DIGITAL SCIENCE&TECHNOLOGY (CHINA)CO., LTD MODEL: WDV6000 FCC ID: YGB-WDV6000

This report concerns (check one:)	Original Grant _	Х	Class II Cha	ange _	
Equipment Type: <u>JBP-Part 15 Class B C</u>	Computing Device	/Peripher	<u>als</u>		
Deferred grant requested per 47 CFR 0.	457(d)(1)(ii)?	Yes_		No _	X
	If yes, de	efer until:	da		
Company Name agrees to notify the Cor	mmission by:	dat	•		
of the intended date of announcement of that date.	of the product so		~	e issue	d on
Transition Rules Request per 15.37?		Yes_		No _	X
If no, assumed Part 15, Subpart B for u Edition] provision.	nintentional radia	itor – the	new 47 CFF	R [10-0	1-13
Report prepared by:					
	Sunny Zhou Intertek Test S Kejiyuan Brand 6F, D Block, H Nanshan Distr Phone: (86 7	ch luahan Bu ict, Shenz	uilding, Lang zhen, P. R. 0	shan R	oad

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

Table of Contents

1.0	General Description	2
	1.1 Product Description	2
	1.2 Related Submittal(s) Grants	2
	1.3 Test Methodology	2
	1.4 Test Facility	
2.0	System Test Configuration	4
	2.1 Justification	
	2.2 EUT Exercising Software	4
	2.3 Special Accessories	4
	2.4 Equipment Modification	5
	2.5 Measurement Uncertainty	
	2.6 Support Equipment List and Description	5
3.0	Emission Results	7
0.0	3.1 Field Strength Calculation	
	3.2 Radiated Emission Configuration Photograph	
	3.3 Radiated Emission Data	
	3.4 Conducted Emission Configuration Photograph	
	3.5 Conducted Emission Data	
4.0 <u>I</u>	Equipment Photographs	15
5.0 <u>I</u>	Product Labelling	17
6.0	Technical Specifications	19
7.0 <u>I</u>	nstruction Manual	21
8.0 <u>I</u>	Miscellaneous Information	23
	8.1 Emissions Test Procedures	23
9.0	Confidentiality Request	26
10.0	Test Equipment List	28

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

EXHIBIT 1 GENERAL DESCRIPTION

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

1.0 **General Description**

1.1 Product Description

The Equipment Under Test (EUT) is a Wifi Camera, The EUT was powered by 3.8Vdc rechargeable battery which can be charged by 5Vdc USB Port. Data can be transferred through USB port between the personal computers and the camera. For more detailed features description, please refer to the user's manual.

1.2 Related Submittal(s) Grants

This is an application for certification of a computer peripherals.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application.

1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Test Services Shenzhen Ltd. Kejiyuan Branch** and located at 6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: 242492).

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

EXHIBIT 2 SYSTEM TEST CONFIGURATION

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

2.0 **System Test Configuration**

2.1 Justification

The system was configured for Test in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The device was powered by a 3.8V fully charged battery and charged by PC USB Port (The PC was powered by AC 120V/60Hz). All test modes such as Data transfer, Video record and TF card with HDMI playing have been performed, the worst case data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. The step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for Test in a typical fashion (as a customer would normally use it). The EUT was placed on turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

The frequency range from 30MHz to 5GHz (EUT highest frequency is 1GHz, so according to 15.33, the test range is update to 5GHz) was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

2.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted Test was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified Test.

2.3 Special Accessories

One shielded USB cable attached with the EUT was used.

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

Report No.: 150109018SZN-002

4

2.4 Equipment Modification

Any modifications installed previous to Test by SHUOYING DIGITAL SCIENCE&TECHNOLOGY (CHINA)CO., LTD Will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Test Services Shenzhen Ltd. Kejiyuan Branch.

2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Model No.
Laptop	Lenovo	T420
Hard Disk	Smart.drive	HD-003
1394 Cable	Smart.drive	Unshielded, Length 180cm
USB Cable	Smart.drive	Unshielded, Length 120cm
Mini SD Card	SanDisk	4G
HDMI cable	N/A	Unshielded, Length 150cm
USB Cable	N/A	Shielded, Length 100cm
Dummy Load	N/A	E214887 RM-01

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

EXHIBIT 3

EMISSION RESULTS

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

3.0 **Emission Results**

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

3.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where FS = Field Strength in $dB\mu V/m$

RA = Receiver Amplitude (including preamplifier) in $dB\mu V$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of $62.0dB\mu V$ is obtained. The antenna factor of 7.4dB and cable factor of 1.6dB is added. The amplifier gain of 29dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0dB, and the resultant average factor was -10dB. The net field strength for comparison to the appropriate emission limit is $32dB\mu V/m$. This value in $dB\mu V/m$ was converted to its corresponding level in $\mu V/m$.

 $RA = 62.0 dB\mu V$

AF = 7.4dB

CF = 1.6dB

AG = 29.0dB

PD = 0dB

AV = -10dB

 $FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32dB\mu V/m$

Level in $\mu V/m = Common Antilogarithm [(32dB<math>\mu V/m)/20] = 39.8 \mu V/m$

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

3.2 Radiated Emission Configuration Photograph

Worst Case Radiated Emission At 720.156MHz (Data transfer Mode)

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 2.8dB margin (Data transfer Mode)

TEST PERSONNEL:

Sign on file

Sunny Zhou Engineer
Typed/Printed Name

January 29, 2015

Date

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

Applicant: SHUOYING DIGITAL SCIENCE&TECHNOLOGY (CHINA)CO., LTD

Model: WDV6000

Worst case operating Mode: Data transfer with PC

Radiated Emissions (30MHz~5GHz)

Polarization	Frequency	Reading	Pre-	Antenna	Net	Limit	Margin
	(MHz)	(dBµV)	Amp	Factor	at 3m	at 3m	(dB)
			Gain	(dB)	(dBµV/m)	(dBµV/m)	
			(dB)				
Horizontal	500.260	54.1	20.0	8.0	42.1	46.0	-3.9
Horizontal	662.259	42.9	20.0	18.3	41.2	46.0	-4.8
Horizontal	720.156	41.1	20.0	22.1	43.2	46.0	-2.8
Vertical	533.468	53.7	20.0	7.6	41.3	46.0	-4.7
Vertical	583.277	50.2	20.0	8.0	38.2	46.0	-7.8
Vertical	760.752	37.9	20.0	18.3	36.2	46.0	-9.8
Vertical	1812.462	34.6	20.0	29.9	44.5	54.0	- 9.5

NOTES:

- 1. Quasi-Peak detector is used for frequency up to 1GHz and PEAK detector is used for frequency from 1-5GHz.
- 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3 meter distances were measured at 0.3- meter and an inverse proportional extrapolation was performed to compare the signal level to the 3 meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- 3. Negative value in the margin column shows emission below limit.
- 4. All emissions up to 1GHz are below the QP limit and all emissions between 1-5GHz are below the AV limit.

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

3.4 Conducted Emission Configuration Photograph

Worst Case Conducted Configuration at 4.634 MHz (Data transfer Mode)

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

3.5 Conducted Emission Data

Judgement: Passed by 16.2 dB margin (Data transfer Mode)

TEST PERSONNEL:

Sign on file

Sunny Zhou Engineer
Typed/Printed Name

January 29, 2015
Date

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000


Applicant: SHUOYING DIGITAL SCIENCE&TECHNOLOGY (CHINA)CO., LTD

Model: WDV6000

Worst case operating Mode: Data transfer with PC

Line: Live

Conducted Emission Test - FCC

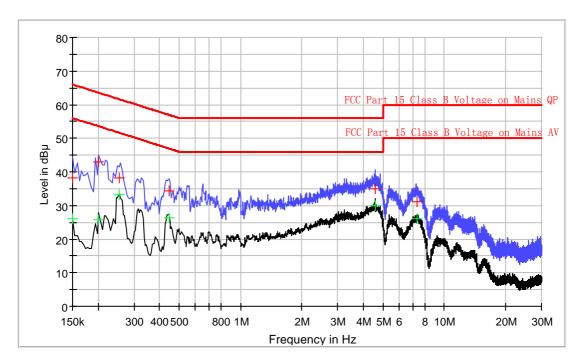

Result Table QP

	Frequency (MHz)	QuasiPeak	Line	Corr. (dB)	Margin (dB)	Limit
ļ	(IVITZ)	(dB µ V)		(ub)	(ub)	(dB µ V)
	0.150000	38.1	L1	9.8	27.9	66.0
	0.202000	43.0	L1	9.8	20.5	63.5
	0.254000	38.1	L1	9.8	23.5	61.6
	0.446000	34.3	L1	9.8	22.6	56.9
	4.574000	34.9	L1	10.0	21.1	56.0
	7.394000	31.2	L1	10.1	28.8	60.0

Result Table AV

Frequency	Average	Line	Corr.	Margin	Limit
(MHz)	(dB µ V)		(dB)	(dB)	(dB µ V)
0.150000	26.2	L1	9.8	29.8	56.0
0.202000	25.7	L1	9.8	27.8	53.5
0.254000	33.2	L1	9.8	18.4	51.6
0.446000	26.3	L1	9.8	20.6	46.9
4.574000	29.7	L1	10.0	16.3	46.0
7.394000	26.2	L1	10.1	23.8	50.0

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000


Applicant: SHUOYING DIGITAL SCIENCE&TECHNOLOGY (CHINA)CO., LTD

Model: WDV6000

Worst case operating Mode: Data transfer with PC

Line: Neutral

Conducted Emission Test - FCC

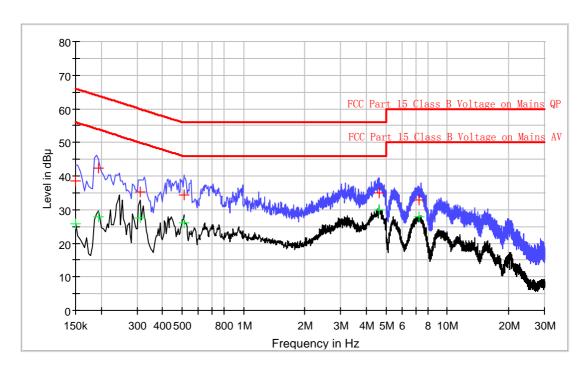

Result Table QP

Frequency (MHz)	QuasiPeak (dB µ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.150000	38.5	N	10.0	27.5	66.0
0.194000	42.5	N	10.0	21.4	63.9
0.310000	35.3	N	10.1	24.7	60.0
0.510000	34.4	N	10.1	21.6	56.0
4.634000	35.1	N	10.3	20.9	56.0
7.266000	32.8	N	10.4	27.2	60.0

Result Table AV

Frequency	Average	Line	Corr.	Margin	Limit
(MHz)	(dB µ V)		(dB)	(dB)	(dB µ V)
0.150000	25.8	N	10.0	30.2	56.0
0.194000	27.8	N	10.0	26.1	53.9
0.310000	27.7	N	10.1	22.3	50.0
0.510000	26.2	N	10.1	19.8	46.0
4.634000	29.8	N	10.3	16.2	46.0
0.150000	25.8	N	10.0	30.2	56.0

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

EXHIBIT 4 EQUIPMENT PHOTOGRAPHS

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

4.0 **Equipment Photographs**

For electronic filing, photographs of the tested EUT are saved with filename: external photos.pdf and internal photos.pdf.

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

EXHIBIT 5 PRODUCT LABELLING

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

5.0 **Product Labelling**

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

EXHIBIT 6

TECHNICAL SPECIFICATIONS

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

6.0 <u>Technical Specifications</u>

For electronic filing, the block diagram of the tested EUT is saved with filename: block.pdf.

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

EXHIBIT 7

INSTRUCTION MANUAL

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold / leased in the United States.

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

EXHIBIT 8

MISCELLANEOUS INFORMATION

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

8.0 <u>Miscellaneous Information</u>

This miscellaneous information includes emission measuring procedure.

8.1 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Test Services in the measurements of computer peripheral operating under Part 15, Subpart B rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 - 2009.

The computer equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The antenna height and polarization are varied during the Test to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions are in QP mode from the frequency band 30MHz to 1GHz with RBW setting 120kHz. Detector function for radiated emissions are in PK&AV mode from the frequency band above 1GHz with RBW setting 1MHz. Detector function for conducted emissions are in QP & AV mode and IFBW setting is 9kHz from the frequency band 150kHz to 30MHz.

For radiated emission, the frequency range scanned is 30MHz to 5GHz. For line-conducted emissions, the range scanned is 150kHz to 30MHz.

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

8.1 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

Conducted measurements are made as described in ANSI C63.4 - 2009.

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

EXHIBIT 9 CONFIDENTIALITY REQUEST

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

9.0 **Confidentiality Request**

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

EXHIBIT 10

TEST EQUIPMENT LIST

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000

10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-03	BiConiLog Antenna	ETS	3142C	00066460	28-Jun-2014	28-Jun-2015
SZ185-01	EMI Receiver	R&S	ESCI	100547	10-Mar-2014	10-Mar-2015
SZ061-09	Horn Antenna	ETS	3115	00092346	01-Nov-2014	01-Nov-2015
EM031-03	EXA Spectrum Analyzer	R&S	FSV40	101506	09-Jun-2014	09-Jun-2015
SZ181-04	Preamplifier	Agilent	8449B	3008A0247 4	10-Mar-2014	10-Mar-2015
SZ188-01	Anechoic Chamber	ETS	RFD-F/A- 100	4102	19-Apr-2014	19-Apr-2015
SZ062-02	RF Cable	RADIALL	RG 213U		03-Jan-2015	03-Jan-2016
SZ062-05	RF Cable	RADIALL	0.04- 26.5GHz		09-Oct-2014	09-Apr-2015
SZ062-12	RF Cable	RADIALL	0.04- 26.5GHz		09-Oct-2014	09-Apr-2015
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	01-Nov-2014	01-Nov-2015
SZ187-01	Two-Line V- Network	R&S	ENV216	100072	01-Nov-2014	01-Nov-2015
SZ187-02	Two-Line V- Network	R&S	ENV216	100073	16-Jun-2014	16-Jun-2015
SZ188-03	Shielding Room	ETS	RFD-100	4100	23-Aug-2014	23-Aug-2015

TRF No.: FCC 15C_PC_b FCC ID: YGB-WDV6000