

Report No.: AGC00630130501FE03 Page 1 of 48

# **FCC Test Report**

Report No.: AGC00630130501FE03

FCC ID : YGKS801

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Bluetooth Headset

**BRAND NAME** : Roman

MODEL NAME : S801

**CLIENT** : Shenzhen Roman Technology Co., Ltd.

**DATE OF ISSUE** : June 29,2013

**STANDARD(S)** : FCC Part 15 Rules

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 2 of 48

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	June 29,2013	Valid	Original Report

# **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RECEIVER INPUT BANDWIDTH	7
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	7
2.6. RELATED SUBMITTAL(S) / GRANT (S)	8
2.7. TEST METHODOLOGY	8
2.8. SPECIAL ACCESSORIES	8
2.9. EQUIPMENT MODIFICATIONS	8
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2. EQUIPMENT USED IN EUT SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3. LIMITS AND MEASUREMENT RESULT	
8. 20DB BANDWIDTH	14
8.1. MEASUREMENT PROCEDURE	14
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	14
9. CONDUCTED SPURIOUS EMISSION	21
9.1. MEASUREMENT PROCEDURE	21
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	21
9.3. MEASUREMENT EQUIPMENT USED	21
9.4. LIMITS AND MEASUREMENT RESULT	21
10. RADIATED EMISSION	25
10.1. MEASUREMENT PROCEDURE	25
10.2. TEST SETUP	27

10.3. TEST RESULT	28
11. BAND EDGE EMISSION	32
11.1. MEASUREMENT PROCEDURE	32
11.2. TEST SET-UP	32
11.3. TEST RESULT	33
12. NUMBER OF HOPPING FREQUENCY	37
12.1. MEASUREMENT PROCEDURE	37
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	37
12.3. MEASUREMENT EQUIPMENT USED	37
12.4. LIMITS AND MEASUREMENT RESULT	37
13. TIME OF OCCUPANCY (DWELL TIME)	
13.1. MEASUREMENT PROCEDURE	38
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	38
13.3. MEASUREMENT EQUIPMENT USED	38
13.4. LIMITS AND MEASUREMENT RESULT	38
14. FREQUENCY SEPARATION	
14.1. MEASUREMENT PROCEDURE	
14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	41
14.3. MEASUREMENT EQUIPMENT USED	
14.4. LIMITS AND MEASUREMENT RESULT	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	42
APPENDIX B: PHOTOGRAPHS OF EUT	43

Page 5 of 48

#### 1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen Roman Technology Co., Ltd.
Address	Floor 3, Building C, Feng Men Ao Industrial Park, GangTou, BanTian, Longgang District, Shenzhen, Guangdong, China
Manufacturer	Shenzhen Roman Technology Co., Ltd.
Address Floor 3, Building C, Feng Men Ao Industrial Park, GangTou, Bar District, Shenzhen, Guangdong, China	
Product Designation	Bluetooth Headset
Brand Name	Roman
Test Model	S801
Date of test	June 20,2013 to June 25,2013
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF (2013-03-01)

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Wall Huang June 29,2013

Checked By

Forrest Lei June 29,2013

Authorized By

Solger Zhang June 29,2013

Page 6 of 48

#### 2. GENERAL INFORMATION

#### 2.1. PRODUCT DESCRIPTION

The EUT is a **Bluetooth Headset** designed as a "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	3.03dBm (MAX)
Bluetooth Version	V 3.0
Modulation	GFSK, π /4-DQPSK, 8DPSK
Number of channels	79
Antenna Designation	Integrated Antenna
Antenna Gain	1.0dBi
Power Supply	DC3.7V by Built-in Li-ion Battery

Note: The EUT can't be operated during charging via USB port (adaptor or PC connection), the USB port is for charging only.

#### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	0	2402MHZ	
	1	2403MHZ	
	·	:	
	38	2440 MHZ	
2400~2483.5MHZ	39	2441 MHZ 2442 MHZ	
	40		
	•	:	
	77	2479 MHZ	
	78	2480 MHZ	

Page 7 of 48

#### 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHZ,In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

#### 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01, 51, 03, 55, 05, 04

#### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For ehavior zation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire. LAP(24 bits), 4LSB's (4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate te Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following ehavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

Page 8 of 48

#### 2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: YGKS801** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

#### 2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 9 of 48

#### 3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB Radiated measurement: +/- 3.2dB

#### 4. DESCRIPTION OF TEST MODES

	TEST MODE DESCRIPTION				
NO.	TEST MODE DESCRIPTION	WORST			
1	Low channel TX(1,2,3Mbps)				
2	Middle channel TX(1,2,3Mbps)				
3	High channel TX(1,2,3Mbps)				
4	Normal Hopping	V			

#### Note:


- 1. V means EMI worst mode.
- 2. All the test modes can be supply by Built-in Li-ion battery and adapter, only the result of the worst case was recorded in the report, if no other cases.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

Page 10 of 48


#### **5. SYSTEM TEST CONFIGURATION**

#### **5.1. CONFIGURATION OF EUT SYSTEM**

**Configuration 1:** (Normal Hopping)



Configuration 2: (control continuous TX through PC)



#### **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Bluetooth Headset	Roman	S801	EUT
2	Battery	N/A	N/A	Accessory
3	PC	Dell	INSPIRON	A.E
4	Mobile Phone	HTC	N/A	A.E
5	Control Box	N/A	N/A	A.E

#### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant

Page 11 of 48

### **6. TEST FACILITY**

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China		
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003.		

#### **ALL TEST EQUIPMENT LIST**

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Meter	R&S	NRP-Z23	100323	07/18/2012	07/17/2013
RF attenuator	N/A	RFA20db	68	N/A	N/A
Spectrum Analyzer	Agilent	E4440A	US41421290	07/18/2012	07/17/2013
Amplifier	EM	EM30180	0607030	02/28/2013	02/27/2014
Horn Antenna	EM	EM-AH-10180	67	04/21/2013	04/20/2014
Horn Antenna	A.H. Systems Inc.	SAS-574		06/08/2013	06/07/2014
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/18/2012	07/17/2013
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	26	06/08/2013	06/07/2014
Loop Antenna	Daze	ZN30900N	SEL0097	07/18/2012	07/17/2013
Isolation Transformer	LETEAC	LTBK		07/18/2012	07/17/2013

Page 12 of 48

#### 7. PEAK OUTPUT POWER

#### 7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 4. Set the RBW greater than 6DB bandwidth of emission.
- 5. Record the maximum power from the Spectrum Analyzer.


#### For average power test:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to power meter through an RF attenuator
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the power meter.
- 5. The maximum peak power shall be less 1 Watt (30dBm).


**Note**: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

#### 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

#### **PEAK POWER TEST SETUP**

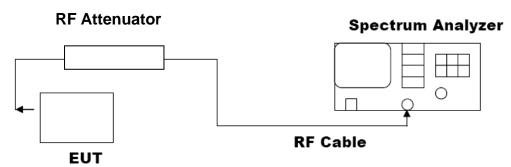

#### **AVERAGE POWER SETUP**



Page 13 of 48

#### 7.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MOUDULATION						
Frequency (GHz)	Frequency Average Power Peak Power Applicable Limits					
2.402	-0.68	1.61	30	Pass		
2.441	0.72	2.66	30	Pass		
2.480	1.11	3.03	30	Pass		

PEAK OUTPUT POWER MEASUREMENT RESULT FOR Ⅲ /4-DQPSK MODULATION									
Frequency (GHz)  Average Power (dBm)  Peak Power Applicable Limits (dBm)  Pass or Fail									
2.402	-0.31	1.25	30	Pass					
2.441 0.31 2.24 30 Pass									
2.480	0.69	2.62	30	Pass					

	PEAK OUTPUT POWER MEASUREMENT RESULT										
FOR 8-DPSK MODULATION  Frequency Average Power Peak Power Applicable Limits Pass or Fail											
(GHz)	(GHz) (dBm) (dBm) (dBm)										
2.402	-1.85	0.74	30	Pass							
2.441	2.441 -0.91 1.87 30										
2.480	0.38	2.31	30	Pass							


Page 14 of 48

#### 8. 20DB BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

#### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

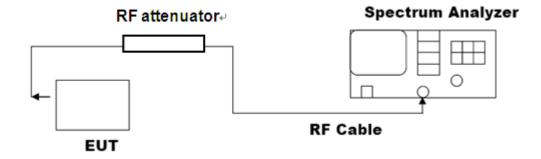

#### **8.3. LIMITS AND MEASUREMENT RESULTS**

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL							
Amplicable Limite		Measurement Resu	lt				
Applicable Limits	Test Da	Criteria					
	Low Channel	0.902	PASS				
N/A	Middle Channel	0.868	PASS				
	High Channel	0.879	PASS				

Page 15 of 48

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



Page 16 of 48

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

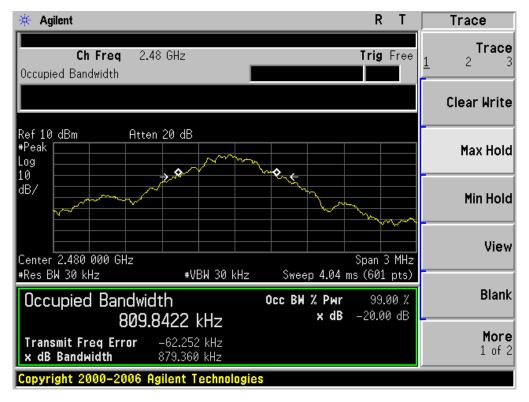

Page 17 of 48


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESUL							
Amaliachla Limita		Measurement Resu	lt				
Applicable Limits	Test Da	Criteria					
	Low Channel	1.254	PASS				
N/A	Middle Channel	1.253	PASS				
	High Channel	1.249	PASS				

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




Page 18 of 48

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

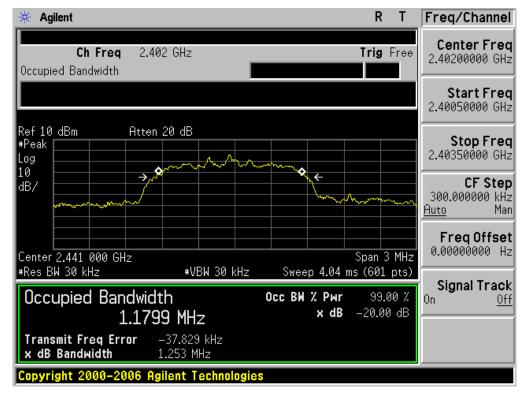


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

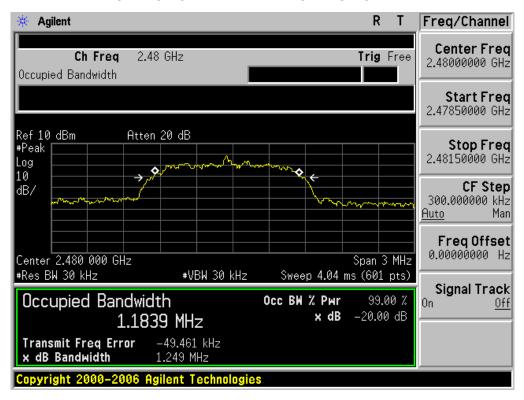

Page 19 of 48


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESUL							
Amaliachla Limita		Measurement Resu	lt				
Applicable Limits	Test Da	Criteria					
	Low Channel	1.262	PASS				
N/A	Middle Channel	1.262	PASS				
	High Channel	1.265	PASS				

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

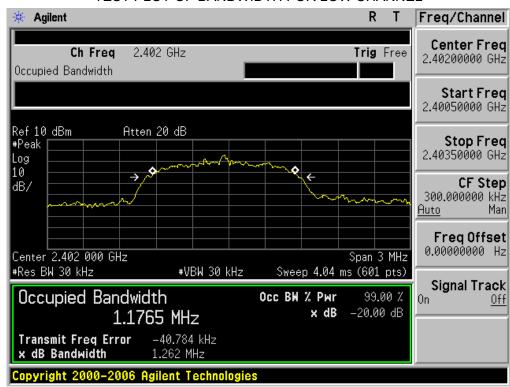


Page 20 of 48

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

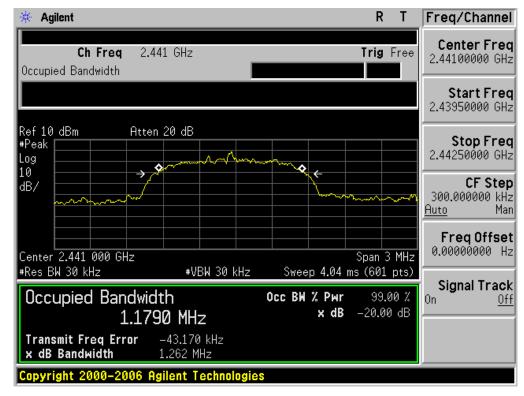

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

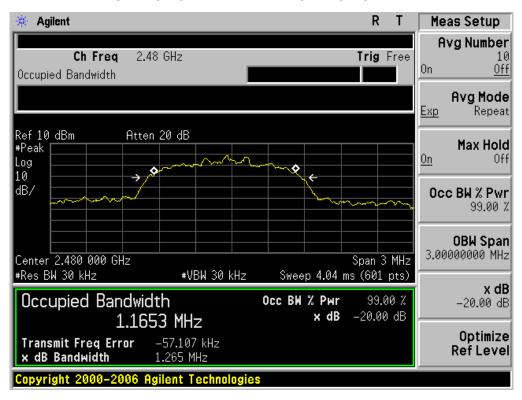

Page 21 of 48

#### 9. CONDUCTED SPURIOUS EMISSION

#### 9.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 4. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
  - RBW = 100 kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak.
- 5. Set SPA Trace 1 Max hold, then View.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

#### 9.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6


#### 9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT									
Applicable Limite	Measurement Result								
Applicable Limits	Test Data	Criteria							
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit								
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS							
intentional radiator is operating, the radio frequency	Channel								
power that is produce by the intentional radiator									
shall be at least 20 dB below that in 100KHz									
bandwidth within the band that contains the highest									
level of the desired power.	At least -20dBc than the limit	DACC							
In addition, radiation emissions which fall in the	Specified on the TOP Channel	PASS							
restricted bands, as defined in §15.205(a), must also									
comply with the radiated emission limits specified									
in§15.209(a))									

Page 22 of 48


# TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL

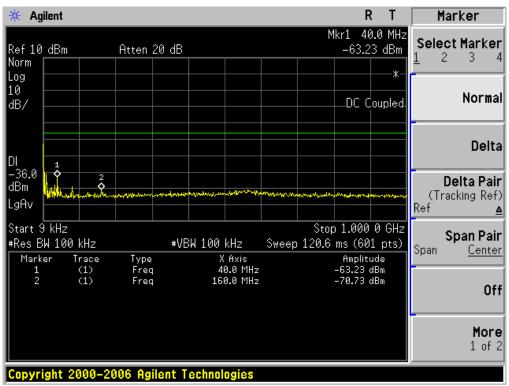


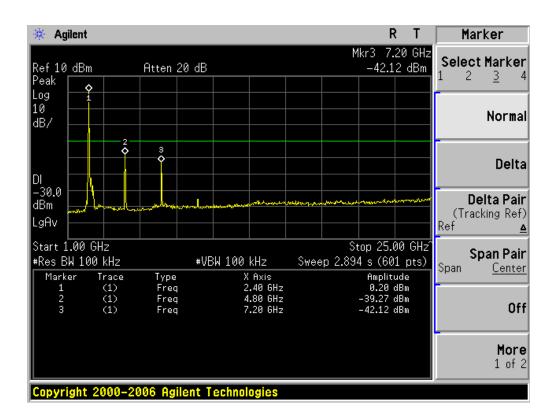

Page 23 of 48


# TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

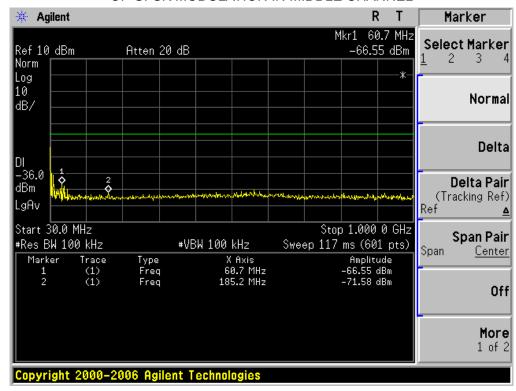


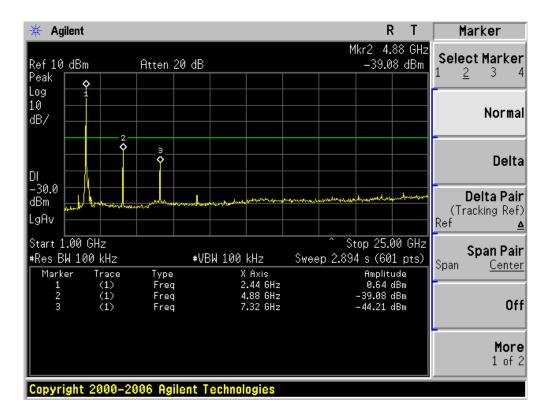

Page 24 of 48

# TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

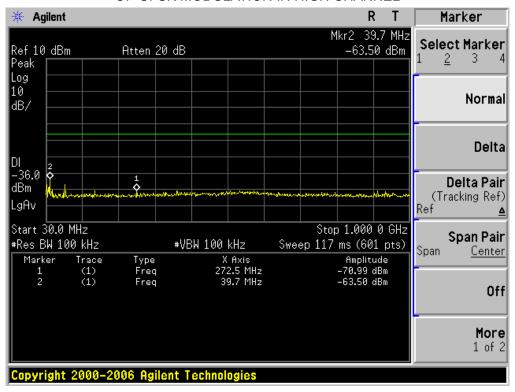

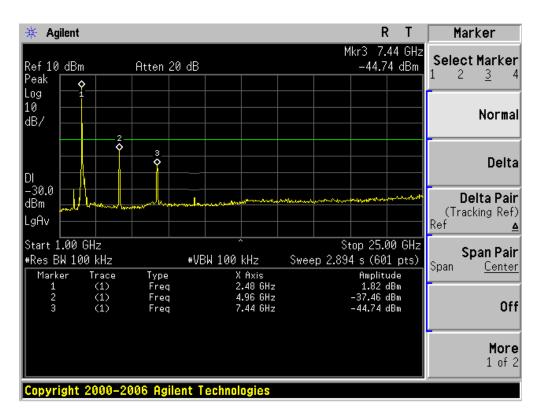

Page 25 of 48

#### 10. RADIATED EMISSION

#### **10.1. MEASUREMENT PROCEDURE**

- 1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Report No.: AGC00630130501FE03 Page 26 of 48

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Page 27 of 48

#### 10.2. TEST SETUP


#### RADIATED EMISSION TEST SETUP BELOW 30MHz

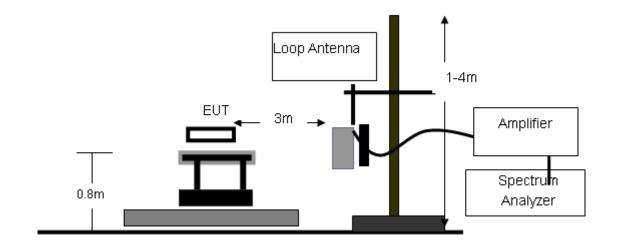

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

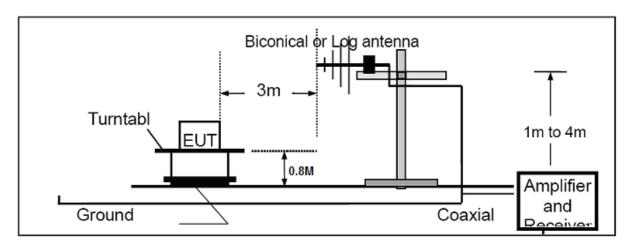

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

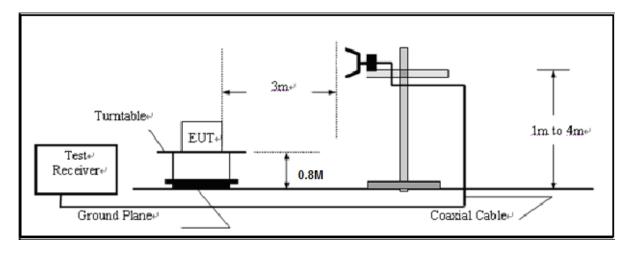


Page 28 of 48

#### 10.3. TEST RESULT

#### RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

#### RADIATED EMISSION BELOW 1GHZ-Horizontal

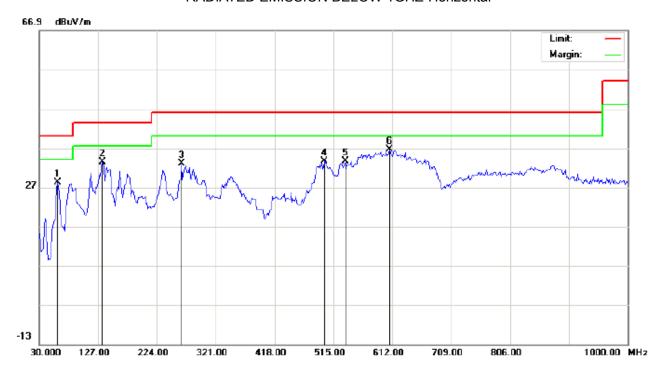

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Headset

M/N: S801

Mode: Normal Hopping

Note:

Polarization: Horizontal Temperature: 26
Power: Humidity: 60 %

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		60.7167	24.22	4.06	28.28	40.00	-11.72	peak			
2		133.4667	19.72	13.73	33.45	43.50	-10.05	peak			
3		264.4167	18.34	14.71	33.05	46.00	-12.95	peak			
4		500.4500	10.73	22.90	33.63	46.00	-12.37	peak			
5		534.4000	13.46	20.18	33.64	46.00	-12.36	peak			
6	*	607.1500	11.63	24.97	36.60	46.00	-9.40	peak			

Page 29 of 48

#### **RADIATED EMISSION BELOW 1GHZ-Vertical**



Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %

EUT: Bluetooth Headset Distance: 3m

M/N: S801


Mode: Normal Hopping

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1	*	63.9500	30.47	2.25	32.72	40.00	-7.28	peak			
2		149.6333	16.60	14.15	30.75	43.50	-12.75	peak			
3		240.1667	21.55	14.23	35.78	46.00	-10.22	peak			
4		264.4167	19.20	14.67	33.87	46.00	-12.13	peak			
5		571.5833	13.57	24.39	37.96	46.00	-8.04	peak			
6		626.5500	7.90	24.96	32.86	46.00	-13.14	peak			

Page 30 of 48

# RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics) -Horizontal

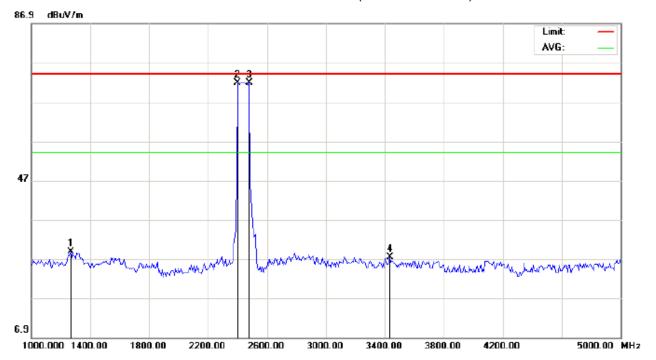

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Headset Distance: 3m

M/N: S801


Mode: Normal Hopping

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment	
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB				cm	degree
1		1266.667	39.86	-11.02	28.84	74.00	-45.16	peak				
2	*	2402.000	80.21	-8.39	71.82	74.00	-2.18	peak				
3		2480.000	79.89	-8.08	71.81	74.00	-2.19	peak				
4		3433.333	35.06	-7.75	27.31	74.00	-46.69	peak				

Page 31 of 48

# RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics) –Vertical

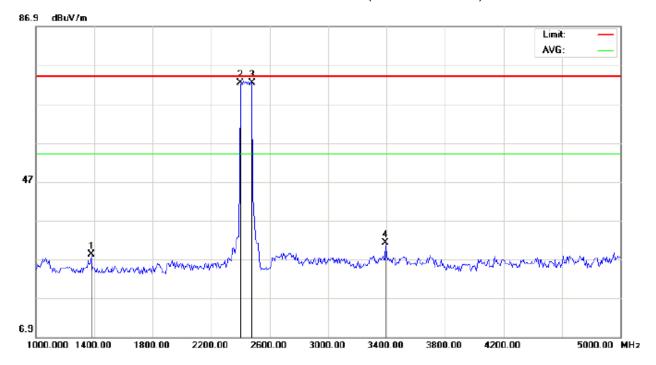

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Headset Distance: 3m

M/N: S801

Mode: Normal Hopping

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1380.000	39.04	-10.76	28.28	74.00	-45.72	peak			
2	*	2402.000	80.71	-8.39	72.32	74.00	-1.68	peak			
3		2480.000	80.39	-8.08	72.31	74.00	-1.69	peak			
4		3393.333	38.98	-7.85	31.13	74.00	-42.87	peak			

#### **RESULT: PASS**

Note: 5~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

Page 32 of 48

#### 11. BAND EDGE EMISSION

#### 11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency = Operation Frequency, RBW>=1%span, VBW>=RBW
- 3. The band edges was measured and recorded.


#### **11.2. TEST SET-UP**

Radiated same as 10.2

Page 33 of 48

#### 11.3. TEST RESULT

#### TEST PLOT OF BAND EDGE FOR LOW CHANNEL (3Mbps)-Horizontal

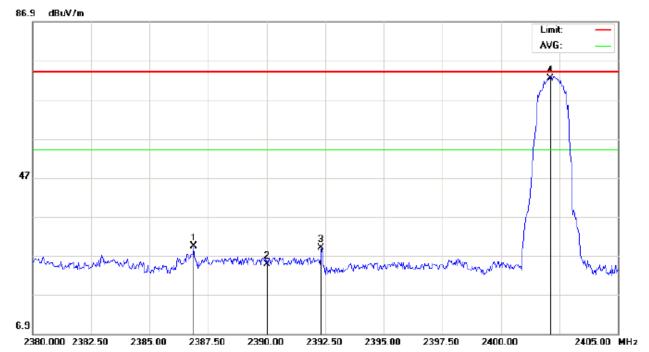

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Headset Distance: 3m

M/N: S801


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2386.875	37.81	-8.45	29.36	74.00	-44.64	peak			
2		2390.000	33.18	-8.44	24.74	74.00	-49.26	peak			
3		2392.333	37.35	-8.43	28.92	74.00	-45.08	peak			
4	*	2402.101	80.75	-8.39	72.36	74.00	-1.64	peak			

Page 34 of 48

#### TEST PLOT OF BAND EDGE FOR LOW CHANNEL (3Mbps)-Vertical

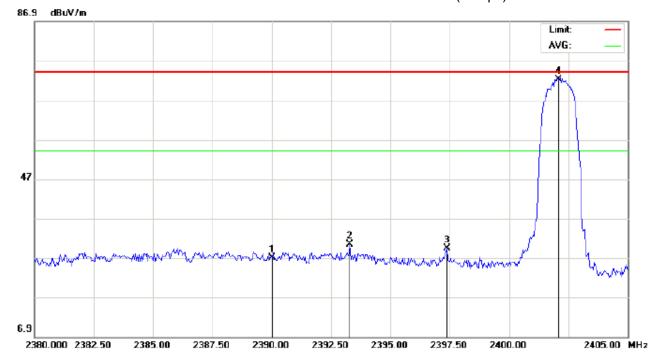

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Headset Distance: 3m

M/N: S801


Mode: Low Channel TX

Note:

No.	Mk	Mk Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2390.000	35.49	-8.44	27.05	74.00	-46.95	peak			
2		2393.292	38.77	-8.43	30.34	74.00	-43.66	peak			
3		2397.375	37.84	-8.41	29.43	74.00	-44.57	peak			
4	*	2402.086	80.57	-8.39	72.18	74.00	-1.82	peak			

Page 35 of 48

### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (3Mbps)-Horizontal

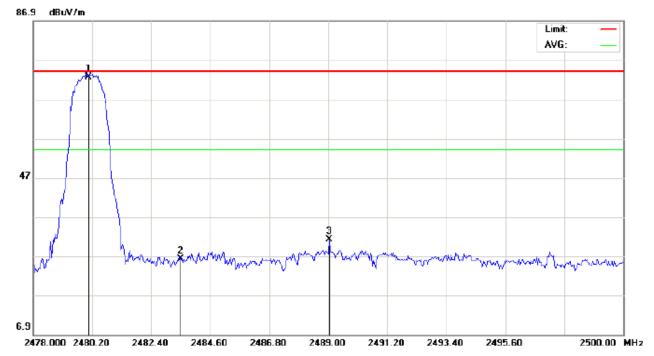

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Headset Distance: 3m

M/N: S801


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.077	80.73	-8.08	72.65	74.00	-1.35	peak			
2		2483.500	34.24	-8.07	26.17	74.00	-47.83	peak			
3		2489.037	39.31	-8.04	31.27	74.00	-42.73	peak			

Page 36 of 48

### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (3Mbps)-Vertical

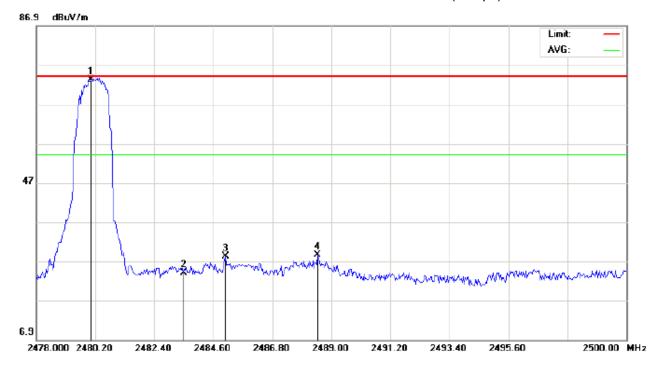

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Headset Distance: 3m

M/N: S801

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.045	81.27	-8.08	73.19	74.00	-0.81	peak			
2		2483.500	32.11	-8.07	24.04	74.00	-49.96	peak			
3		2485.040	36.21	-8.06	28.15	74.00	-45.85	peak			
4		2488.487	36.75	-8.05	28.70	74.00	-45.30	peak			

Page 37 of 48

## 12. NUMBER OF HOPPING FREQUENCY

#### 12.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
- 4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=RBW.

## 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2


#### 12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

#### 12.4. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
HOPPING CHANNEL	>=15	79	PASS

### TEST PLOT FOR NO. OF TOTAL CHANNELS

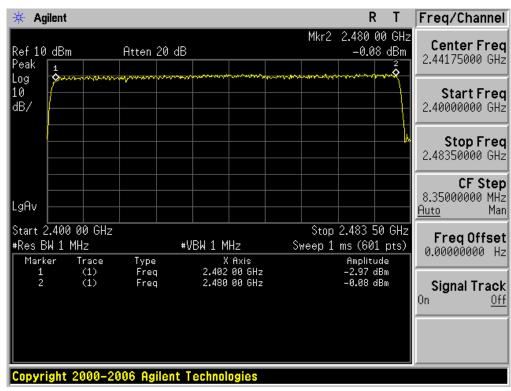

Page 38 of 48

# 13. TIME OF OCCUPANCY (DWELL TIME)

#### 13.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set Span = zero span, centered on a hoping channel
- 4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

# 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

#### 13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

#### 13.4. LIMITS AND MEASUREMENT RESULT


#### The Worst Case (3Mbps)

	\ 1 /				
Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)	
Low	2.944	31.6	314.03	400	
Middle	2.944	31.6	314.03	400	
High	2.88	31.6	307.20	400	


Low Channel Time 2.944\*(1600/6)/79\*31.6=314.03ms Middle Channel Time 2.944\*(1600/6)/79\*31.6=314.03ms High Channel Time 2.88\*(1600/6)/79\*31.6=307.20ms

Page 39 of 48

#### TEST PLOT OF LOW CHANNEL

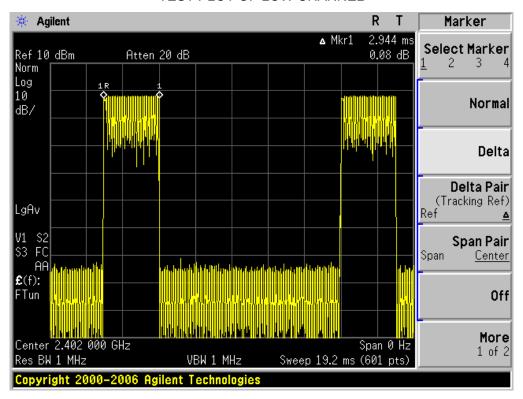


## TEST PLOT OF MIDDLE CHANNEL

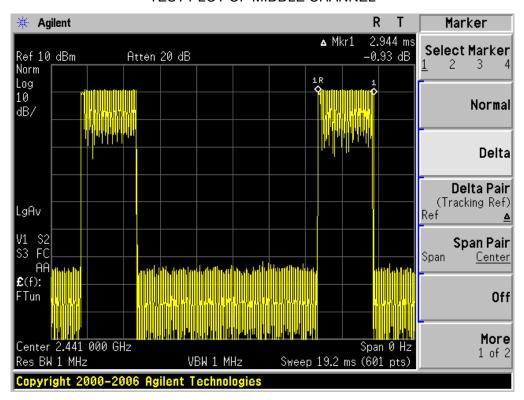

Page 40 of 48

## TEST PLOT OF HIGH CHANNEL

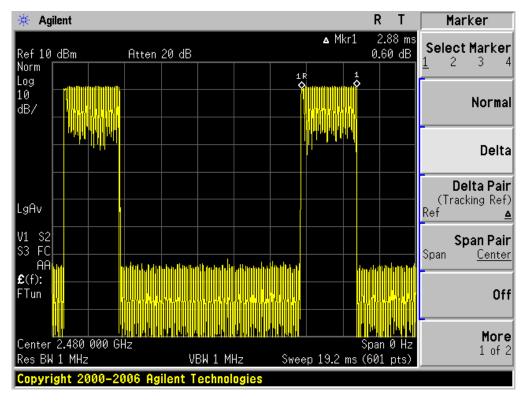

Page 41 of 48

#### 14. FREQUENCY SEPARATION

#### 14.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold

# 14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2


#### 14.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

#### 14.4. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT	
	KHz	KHz	Dago	
CH00-CH01	1009	>=25 KHz or 2/3 20 dB BW	Pass	


TEST PLOT FOR FREQUENCY SEPARATION (3Mbps)

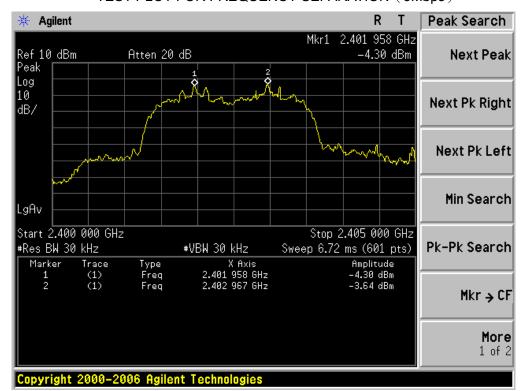


Page 42 of 48

# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC RADIATED EMISSION TEST SETUP

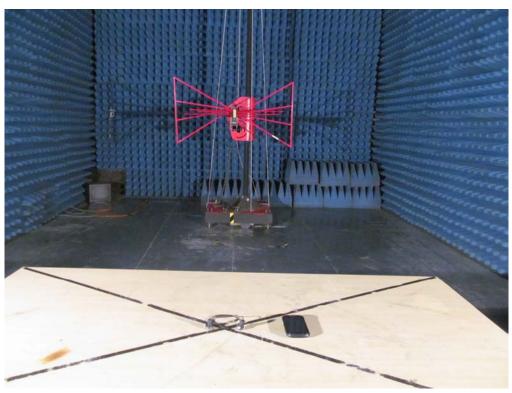

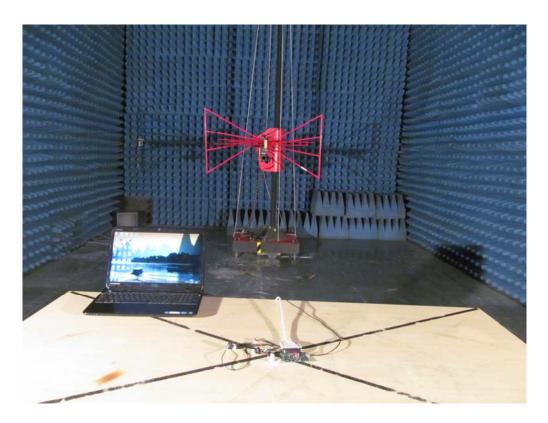

Page 43 of 48

# **APPENDIX B: PHOTOGRAPHS OF EUT**

TOTAL VIEW OF EUT



TOP VIEW OF EUT



Page 44 of 48





FRONT VIEW OF EUT




Page 45 of 48






LEFT VIEW OF EUT

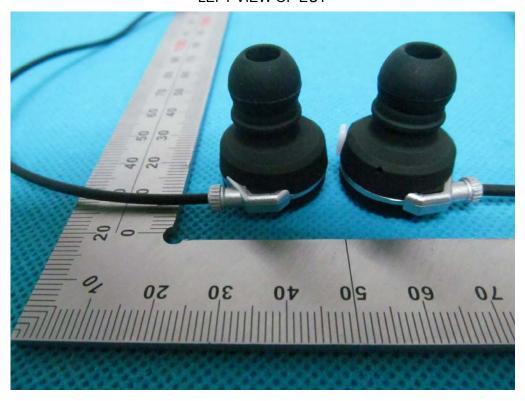

RIGHT VIEW OF EUT




**OPEN VIEW OF EUT-1** 

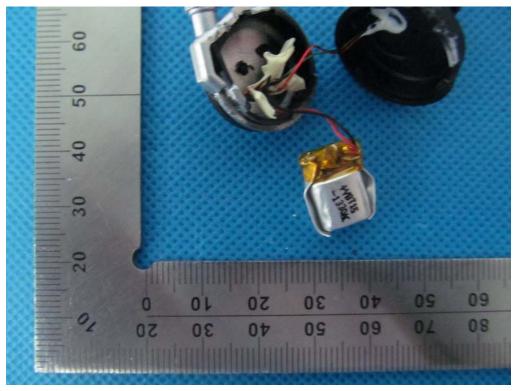


Page 47 of 48

**OPEN VIEW OF EUT-2** 

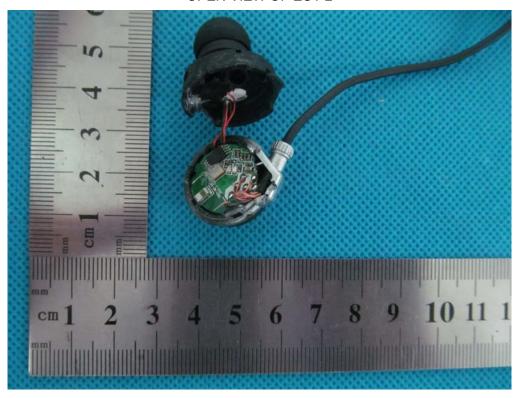


**INTERNAL VIEW OF EUT-1** 

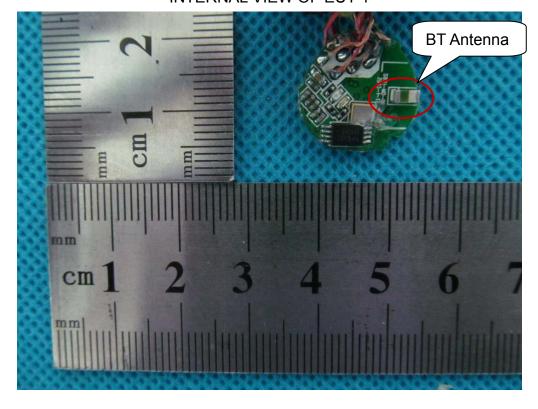

Page 48 of 48

# **INTERNAL VIEW OF EUT-2**

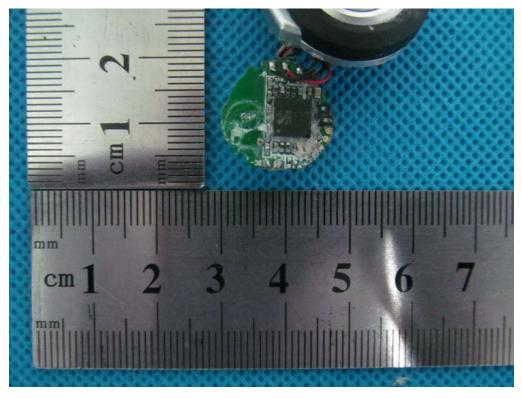

----END OF REPORT----