



**Technical Description
and
User's Manual
of the
Door-Handle with NFC**

Model: HUF14632






Contents

1 General description of the door-handle	3
2 Communication Interfaces.....	4
3 Block diagram	5
4 Technical data	5
4.1 Electrical characteristics	5
4.2 Connector definition	5
4.3 General NFC specification	6
5 Declaration of Conformity, product Label	7
5.1 Radio equipment authorization to FCC in USA	7
5.2 Radio equipment authorization to RSS-210 in Canada.....	7
5.3 Location of product label.....	8


1 General description of the door-handle

The Door-Handle HUF14632 with NFC is equipped with sensors that enables users of a car with passive entry system to lock/unlock the doors by carrying the key fob or an authorised NFC-Device with them.

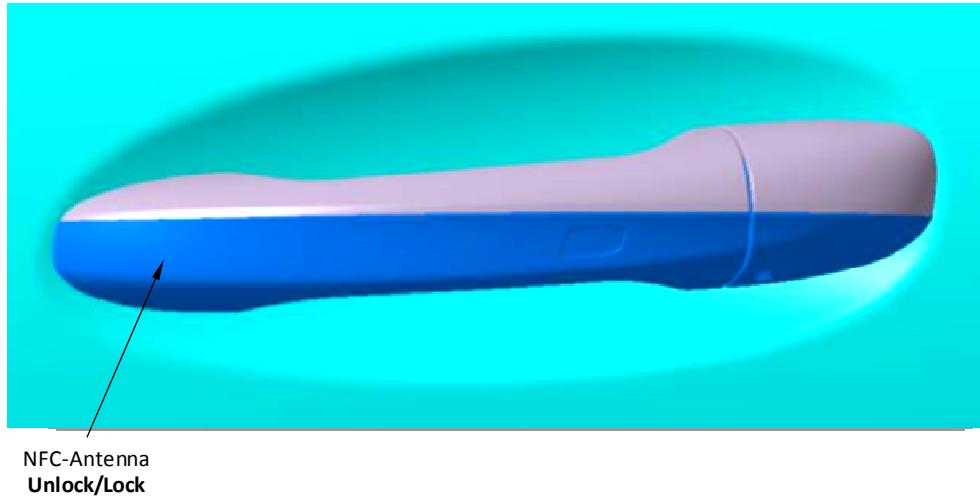


NFC-Reader:

When an NFC-Device approaches to the NFC-Antenna, the door handle sends a signal to the electronic control unit to initiate the authorisation sequence for unlocking or locking the door.

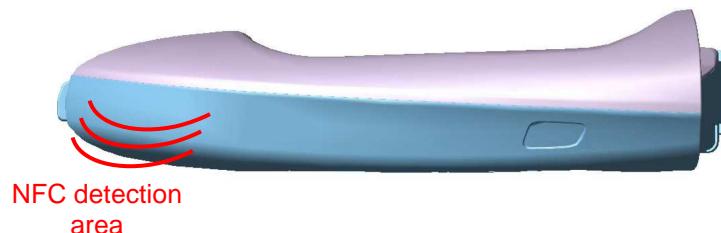


2 Communication Interfaces

Following picture shows a simplified diagram of the system.

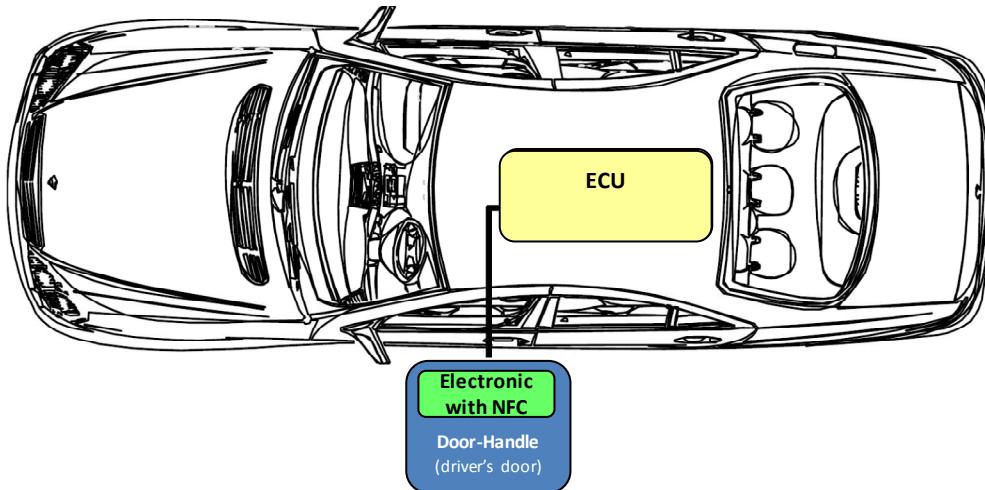

The door-handle communicates with the Electronic Control Unit (ECU) by using one-wire interface and with the NFC-Device by using Near Field Communication.

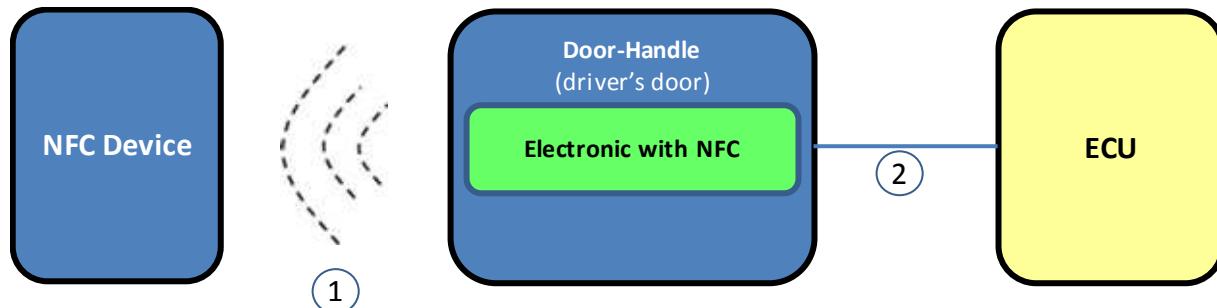


Communication with the NFC-Device ①

Near Field Communication between the door-handle and the NFC-Device.

Communication with the ECU ②

Bidirectional communication with the ECU during the NFC-authorisation sequence

3 Block diagram

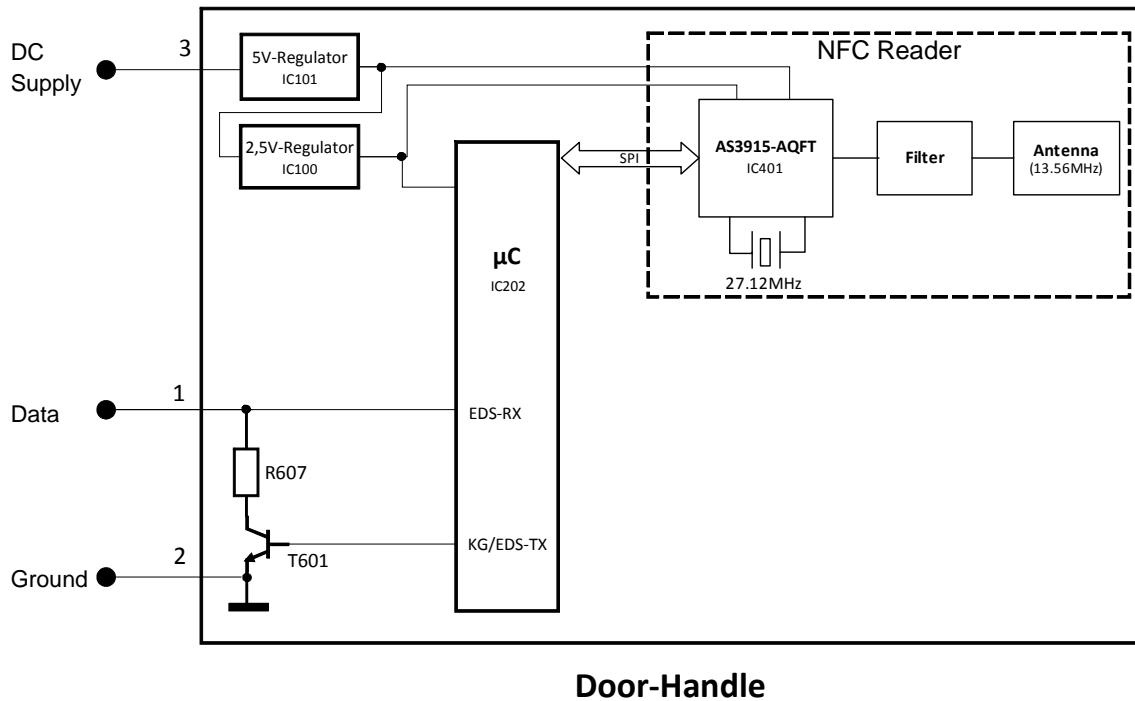


4 Technical data

4.1 Electrical characteristics

	min.	typ.	max.	Unit
Voltage	8	12	16	V
Temperature	-40		+85	°C


4.2 Connector definition

Connector on Handle side	
Manufacturer	Delphi
Part Number	A 213 540 65 00
Type	Male
Number of positions	6

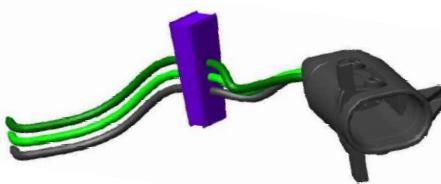

Connector pin-out description:

PIN	Function	Wire Colour
1	Data	yellow
2	Ground	black
3	Power supply	red





4.3 General NFC specification

Standards:	ISO 14443-A ISO 14443-B
Communication role:	Proximity Coupling Device (PCD)
Anti-collision support:	Yes
Communication range:	≤ 3cm approx. (dependent on Proximity Integrated Circuit Card (PICC))
Type of NFC antenna:	PCB Loop antenna
NFC Frequency rate:	13,56 MHz ± 7 kHz
Data rate:	106 kb/s
Type of modulation:	ISO 14443-A → Load modulation OOK ISO 14443-B → Load modulation AM
Test Modes	NFC Field-On: The Door-Handle produces a high frequency electromagnetic field (13,56 MHz) NFC-A Frames: The Door-Handle produces frames of high frequency electromagnetic field (13,56 MHz) and modulates its amplitude according to ISO 14443-A in order to transmit data. The Inter-frame space is 5ms NFC-B Frames: The Door-Handle produces frames of high frequency electromagnetic field (13,56 MHz) and modulates its amplitude ISO 14443-B in order to transmit data. The Inter-frame space is 5ms



5 Declaration of Conformity, product Label

5.1 Radio equipment authorization to FCC in USA

FCC ID: YGOHUF14632

The transmitter will be supplied as an original equipment device to the car manufacturer.

According to 47 CFR 15.19 (labelling requirements) the car manufacturer will print the following text in the appropriate User's Manual of the car:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Usually this is followed by the following FCC caution:

Any changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

5.2 Radio equipment authorization to RSS-210 in Canada

IC: 4008C- HUF14632

The transmitter will be supplied as an original equipment device to the car manufacturer.

According to RSS-210 (labelling requirements) the car manufacturer will print the following text in the appropriate User's Manual of the car:

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.


Usually this is followed by the following RSS caution:

Any changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.


5.3 Location of product label

The labelling with radio certification marks, the product model and the manufacturer logo, country code and control identification data can be found at the door-handle.

Position of the labelling for radio certification:

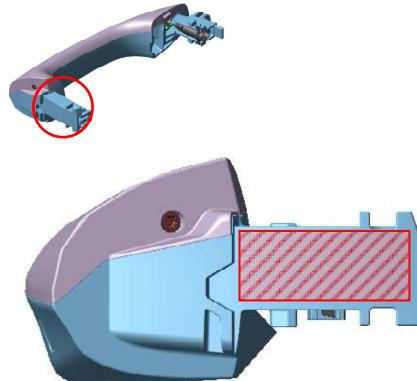

Position of the labelling with the product model:

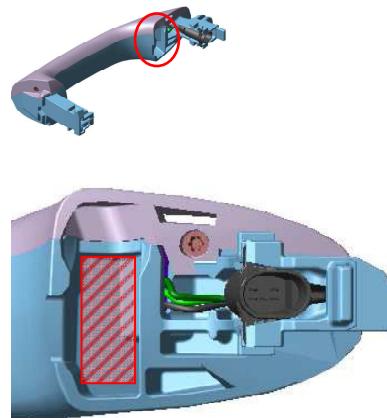

Position of the labelling with manufacturer logo, country code and control identification data:

