
FCC Test Report

Report No.: AGC05465160701FE08

FCC ID : YH57DTB44

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : Tablet PC

BRAND NAME : Hipstreet

MODEL NAME : 7DTB44

CLIENT : Kobian Canada INC.

DATE OF ISSUE : Aug. 04, 2016

STANDARD(S) : FCC Part 15.247

TEST PROCEDURE(S) : KDB 558074 v03r05

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 04, 2016	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE.....	5
2. GENERAL INFORMATION	6
2.1 PRODUCT DESCRIPTION	6
2.2 RELATED SUBMITTAL(S)/GRANT(S).....	6
2.3 TEST METHODOLOGY	6
2.4 TEST FACILITY	6
2.5 SPECIAL ACCESSORIES.....	6
2.6 EQUIPMENT MODIFICATIONS.....	6
3. SYSTEM TEST CONFIGURATION.....	7
3.1 CONFIGURATION OF TESTED SYSTEM.....	7
3.2 EQUIPMENT USED IN TESTED SYSTEM	7
4. SUMMARY OF TEST RESULTS.....	9
5. DESCRIPTION OF TEST MODES	9
6. ANTENNA REQUIREMENT	10
6.1. STANDARD APPLICABLE	10
6.2. TEST RESULT	10
7. RADIATED EMISSION.....	11
7.1 MEASUREMENT PROCEDURE	11
7.2 TEST SETUP.....	12
7.3 LIMITS AND MEASUREMENT RESULT	13
7.4 TEST RESULT	13
8. BAND EDGE EMISSION.....	21
8.1. MEASUREMENT PROCEDURE	21
8.2. TEST SET-UP	21
8.3. RADIATED TEST RESULT.....	22
8.4. CONDUCTED TEST RESULT	23
9. 6DB BANDWIDTH	24
9.1. TEST PROCEDURE.....	24
9.2. SUMMARY OF TEST RESULTS/PLOTS	24
10. CONDUCTED OUTPUT POWER	26
10.1. MEASUREMENT PROCEDURE	26
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	26
10.3. LIMITS AND MEASUREMENT RESULT	26
11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	29
11.1 MEASUREMENT PROCEDURE.....	29
11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	29

11.3 LIMITS AND MEASUREMENT RESULT	29
12. FCC LINE CONDUCTED EMISSION TEST	32
12.1 LIMITS	32
12.2 TEST SETUP	32
12.3 PRELIMINARY PROCEDURE	32
12.4 FINAL TEST PROCEDURE	33
12.5 TEST RESULT OF POWER LINE	34
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	36
APPENDIX B: PHOTOGRAPHS OF EUT	38

1. VERIFICATION OF COMPLIANCE

Applicant	Kobian Canada INC.
Address	560 Denison Street, Unit 5, Markham, Ontario, L3R 2M8, Canada
Manufacturer	Kobian Canada INC.
Address	560 Denison Street, Unit 5, Markham, Ontario, L3R 2M8, Canada
Product Designation	Tablet PC
Brand Name	Hipstreet
Test Model	7DTB44
Date of test	July 25, 2016~Aug. 02, 2016
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BLE/RF

WE HEREBY CERTIFY THAT:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Tested By

Dota Zhang

Dota Zhang(Zhang Jianfeng)

Aug. 04, 2016

Reviewed By

Bart Xie

Bart Xie(Xie Xiaobin)

Aug. 04, 2016

Approved By

Solger Zhang

Solger Zhang(Zhang Hongyi)
Authorized Officer

Aug. 04, 2016

2.GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

The EUT is designed as “**Tablet PC**”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
Bluetooth Version	V4.0
Modulation	GFSK
Number of channels	40 Channel(37 Hopping Channel,3 advertising Channel)
Antenna Designation	Integrated Antenna
Antenna Gain	1.5dBi
Hardware Version	EM_T8370_V6.1
Software Version	Android 5.1
Power Supply	DC3.7V by Built-in Li-ion Battery

2.2 RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: YH57DTB44** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.3 TEST METHODOLOGY

All measurements contained in this report were conducted with KDB 558074 D01 DTS Meas Guidance v03r02, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions. The EUT was tested in all three orthogonal planes and the worse case was showed.

2.4 TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D, Baoding Technology Park, Guangming Road 2, Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013.

2.5 SPECIAL ACCESSORIES

Refer to section 2.2.


2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

3. SYSTEM TEST CONFIGURATION

3.1 CONFIGURATION OF TESTED SYSTEM

Configuration:

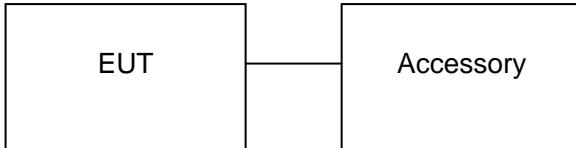

3.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Tablet PC	7DTB44	YH57DTB44	EUT
2	Battery	N/A	N/A	Accessory
3	Adapter	JK050200-S04USA	DC5V 2A	Accessory

ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 3, 2016	July 2, 2017
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 3, 2016	July 2, 2017
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 3, 2016	July 2, 2017
RF Cable	SCHWARZBECK	AK9515E	96221	July 3, 2016	July 2, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 5, 2016	June 4, 2017
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 5, 2016	June 4, 2017
Spectrum analyzer	Agilent	E4407B	MY46185649	June 5, 2016	June 4, 2017
Power Probe	R&S	NRP-Z23	100323	July 24, 2016	July 23, 2017
RF attenuator	N/A	RFA20db	68	N/A	N/A

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 3, 2016	July 2, 2017
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 10, 2016	July 9, 2017
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 3, 2016	July 2, 2017
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 6, 2016	July 5, 2017
RF Cable	SCHWARZBECK	AK9515H	96220	July 7, 2016	July 6, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 5, 2016	June 4, 2017
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 5, 2016	June 4, 2017
Power Probe	R&S	NRP-Z23	100323	July 24,2016	July 23,2017
RF attenuator	N/A	RFA20db	68	N/A	N/A

Conducted Emission Test Site

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 3, 2016	July 2, 2017
Artificial Mains Network	Narda	L2-16B	000WX31025	July 7, 2016	July 6, 2017
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 7, 2016	July 6, 2017
RF Cable	SCHWARZBECK	AK9515E	96222	July 3, 2016	July 2, 2017
Shielded Room	CHENGYU	843	PTS-002	June 5,2016	June 4,2017

Conducted Emission Test Site

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 3, 2016	July 2, 2017
Artificial Mains Network	Narda	L2-16B	000WX31025	July 7, 2016	July 6, 2017
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 7, 2016	July 6, 2017
RF Cable	SCHWARZBECK	AK9515E	96222	July 3, 2016	July 2, 2017
Shielded Room	CHENGYU	843	PTS-002	June 5,2016	June 4,2017

4. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203	Antenna Requirement	Compliant
§15.209 §15.247(d)	Radiated Emission	Compliant
§15.247(d)	Band Edges	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247(b)	Conducted Power	Compliant
§15.247(e)	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.207	Line Conduction Emission	Compliant

5. DESCRIPTION OF TEST MODES

The EUT has been operated in three modulations: GFSK independently.

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal Operating (BT)

Note:

1. All the test modes can be supply by Built-in Li-ion battery, only the result of the worst case was recorded in the report if no any records.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. Eut is operating at its maximum duty cycle>or equal 98%

6. ANTENNA REQUIREMENT

6.1. STANDARD APPLICABLE

According to FCC 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

6.2. TEST RESULT

This product has a permanent antenna, fulfill the requirement of this section.


7. RADIATED EMISSION

7.1 MEASUREMENT PROCEDURE


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

7.2 TEST SETUP

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

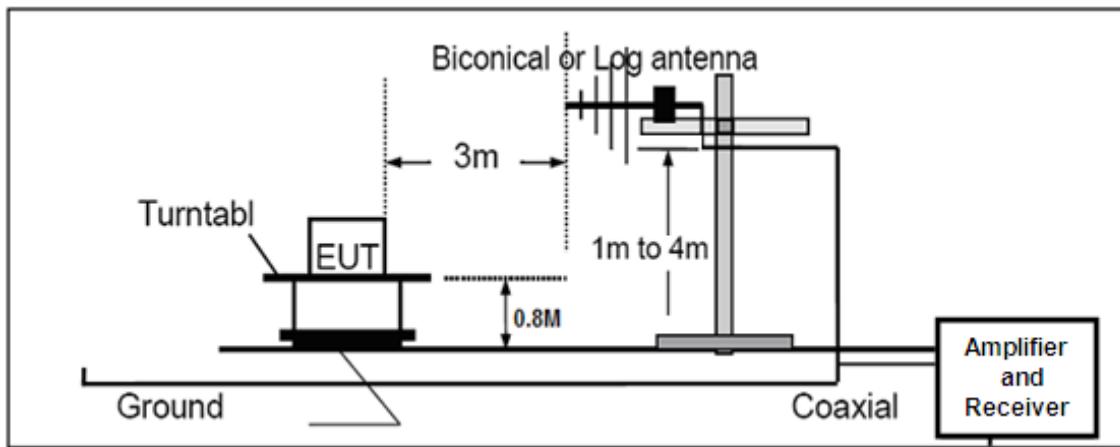

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

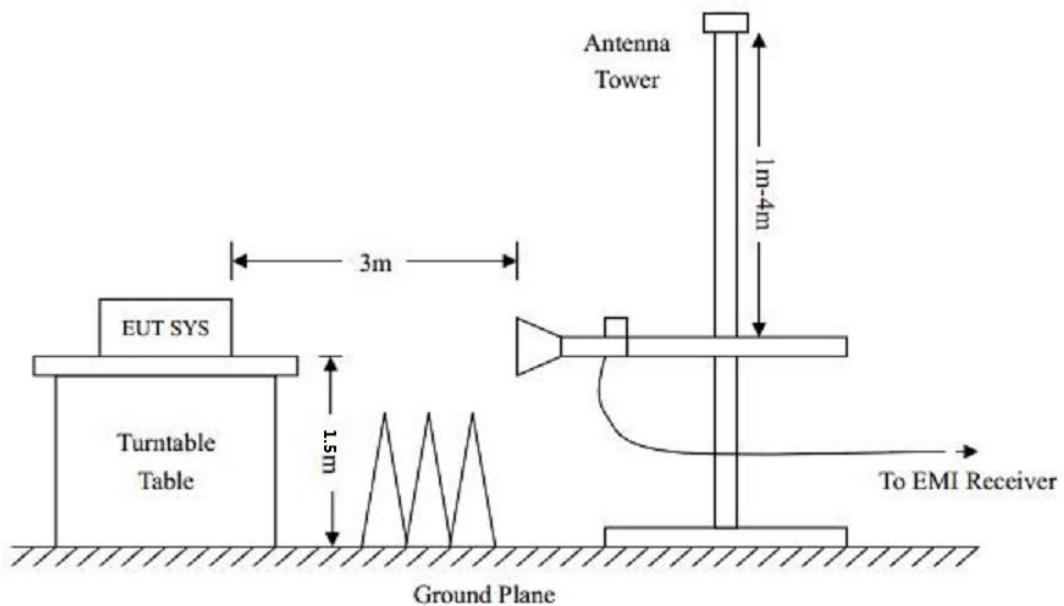

7.3 LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,
the test records reported below are the worst result compared to other modes.


7.4 TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

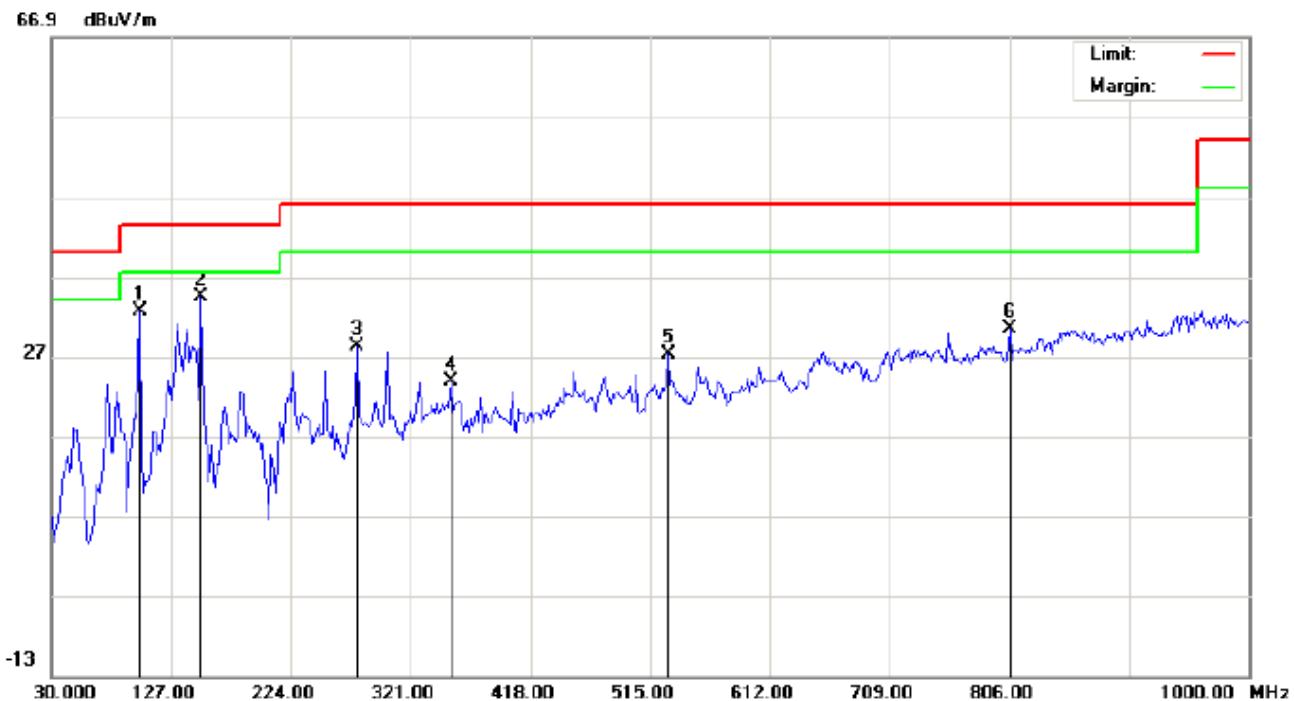

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Tablet PC
M/N: 7DTB44
Mode: Low channel TX
Note:

Polarization: **Horizontal**

Power: AC 120V/60Hz

Distance: 3m


Temperature: 22.8

Humidity: 53.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		101.1333	22.39	10.22	32.61	43.50	-10.89	peak			
2	*	151.2500	21.85	12.46	34.31	43.50	-9.19	peak			
3		277.3500	16.68	11.55	28.23	46.00	-17.77	peak			
4		353.3333	4.99	18.76	23.75	46.00	-22.25	peak			
5		529.5499	5.23	21.93	27.16	46.00	-18.84	peak			
6		806.0000	3.08	27.32	30.40	46.00	-15.60	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

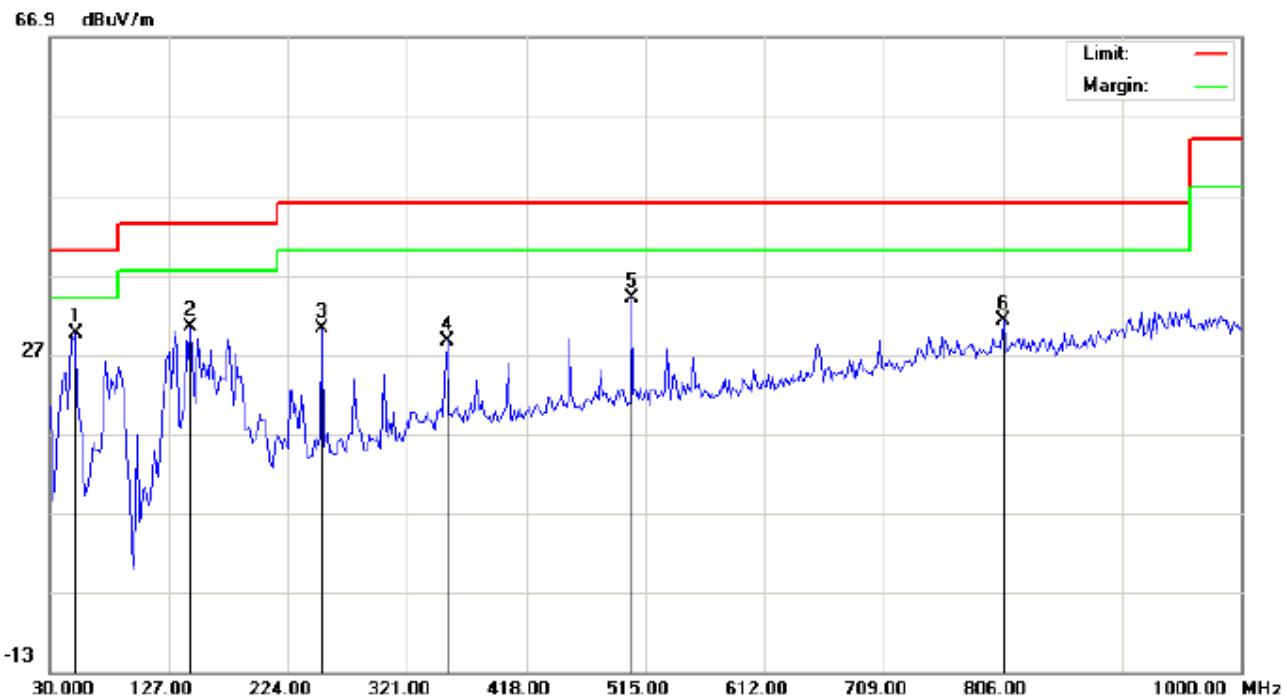

Site: site #1 Polarization: **Vertical** Temperature: 22.8
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 53.8 %
EUT: Tablet PC Distance: 3m
M/N: 7DTB44
Mode: Low channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	51.0167	21.30	8.23	29.53	40.00	-10.47	peak			
2		144.7833	15.18	15.23	30.41	43.50	-13.09	peak			
3		251.4833	16.30	13.94	30.24	46.00	-15.76	peak			
4		353.3333	9.93	18.76	28.69	46.00	-17.31	peak			
5		503.6833	12.84	21.23	34.07	46.00	-11.93	peak			
6		806.0000	3.98	27.32	31.30	46.00	-14.70	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL



Site: site #1

Limit: FCC Class B 3M Radiation

Polarization: **Horizontal**

Temperature: 22.8

EUT: Tablet PC

Power: AC 120V/60Hz

Humidity: 53.8 %

M/N: 7DTB44

Distance: 3m

Mode: Middle channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		49.4000	10.06	11.28	21.34	40.00	-18.66	peak			
2		130.2332	11.23	10.64	21.87	43.50	-21.63	peak			
3		272.5000	10.03	10.73	20.76	46.00	-25.24	peak			
4		416.3833	2.20	19.57	21.77	46.00	-24.23	peak			
5	*	532.7833	9.48	22.02	31.50	46.00	-14.50	peak			
6		891.6833	2.85	28.39	31.24	46.00	-14.76	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL



Site: site #1
 Polarization: **Vertical**
 Temperature: 22.8
 Limit: FCC Class B 3M Radiation
 Power: AC 120V/60Hz
 Humidity: 53.8 %
 EUT: Tablet PC
 Distance: 3m
 M/N: 7DTB44
 Mode: Middle channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	47.7833	20.11	8.39	28.50	40.00	-11.50	peak			
2		143.1667	9.55	15.22	24.77	43.50	-18.73	peak			
3		266.0333	8.46	14.38	22.84	46.00	-23.16	peak			
4		442.2500	3.50	20.35	23.85	46.00	-22.15	peak			
5		689.6000	2.88	24.91	27.79	46.00	-18.21	peak			
6		922.4000	3.26	29.23	32.49	46.00	-13.51	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL



Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 22.8
Limit: FCC Class B 3M Radiation	Power: AC 120V/60Hz	Humidity: 53.8 %
EUT: Tablet PC	Distance: 3m	
M/N: 7DTB44		
Mode: High channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		49.4000	9.29	11.28	20.57	40.00	-19.43	peak			
2		141.5500	1.47	14.82	16.29	43.50	-27.21	peak			
3		333.9333	1.69	17.67	19.36	46.00	-26.64	peak			
4		456.8000	1.59	20.66	22.25	46.00	-23.75	peak			
5		532.7833	5.46	22.02	27.48	46.00	-18.52	peak			
6	*	915.9333	3.50	29.05	32.55	46.00	-13.45	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL



Site: site #1 Polarization: **Vertical** Temperature: 22.8
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 53.8 %
EUT: Tablet PC Distance: 3m
M/N: 7DTB44
Mode: High channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	49.4000	20.34	8.28	28.62	40.00	-11.38	peak			
2		141.5500	5.65	15.21	20.86	43.50	-22.64	peak			
3		264.4166	5.50	14.34	19.84	46.00	-26.16	peak			
4		485.9000	1.98	20.98	22.96	46.00	-23.04	peak			
5		772.0500	2.49	26.93	29.42	46.00	-16.58	peak			
6		860.9667	2.99	27.60	30.59	46.00	-15.41	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHZ

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type	Comment
Low Channel (2402 MHz)							
4804	41.46	10.44	51.9	74	-22.1	Pk	Horizontal
4804	33.48	10.44	43.92	54	-10.08	AV	Horizontal
7206	43.04	12.39	55.43	74	-18.57	pk	Horizontal
7206	33.09	12.39	45.48	54	-8.52	AV	Horizontal
4804	45.21	10.4	55.61	74	-18.39	Pk	Vertical
4804	23.42	10.4	33.82	54	-20.18	AV	Vertical
7206	36.18	12.75	48.93	74	-25.07	Pk	Vertical
7206	23.43	12.75	36.18	54	-17.82	AV	Vertical
Mid Channel (2440 MHz)							
4880	46.14	10.4	56.54	74	-17.46	Pk	Horizontal
4880	35.54	10.4	45.94	54	-8.06	AV	Horizontal
7320	49.32	12.75	62.07	74	-11.93	Pk	Horizontal
7320	35.11	12.75	47.86	54	-6.14	AV	Horizontal
4880	43.05	10.39	53.44	74	-20.56	Pk	Vertical
4880	35.19	10.44	45.63	54	-8.37	AV	Vertical
7320	33.02	12.68	45.7	74	-28.3	Pk	Vertical
7320	36.17	12.68	48.85	54	-5.15	AV	Vertical
High Channel (2480 MHz)							
4960	35.23	10.39	45.62	74	-28.38	pk	Horizontal
4960	21.17	10.39	31.56	54	-22.44	AV	Horizontal
7440	43.47	12.68	56.15	74	-17.85	pk	Horizontal
7440	35.26	12.68	47.94	54	-6.06	AV	Horizontal
4960	34.32	10.39	44.71	74	-29.29	pk	Vertical
4960	38.21	10.39	48.6	54	-5.4	AV	Vertical
7440	41.19	12.68	53.87	74	-20.13	pk	Vertical
7440	22.06	12.68	34.74	54	-19.26	AV	Vertical

RESULT: PASS

Note: 1~25GHz scan with GFSK. No recording in the test report at least have 20dB margin.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission - Leve Limit

8. BAND EDGE EMISSION

8.1. MEASUREMENT PROCEDURE

1) Radiated restricted band edge measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

2) Conducted Emissions at the band edge

a) The transmitter output was connected to the spectrum analyzer


b) Set RBW=100kHz, VBW=300kHz

c) Suitable frequency span including 100kHz bandwidth from band edge

8.2. TEST SET-UP

Radiated same as 6.2

Conducted set up



8.3. Radiated Test Result

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type	Comment
Low Channel (2402 MHz)							
2399.9	71.16	-13	58.16	74	-15.84	peak	Horizontal
2399.9	53.42	-13	40.42	54	-13.58	AVG	Horizontal
2400	71.14	-12.99	58.15	74	-15.85	peak	Horizontal
2400	55.41	-12.99	42.42	54	-11.58	AVG	Horizontal
2399.9	74.37	-12.97	61.4	74	-12.6	peak	Vertical
2399.9	55.13	-12.97	42.16	54	-11.84	AVG	Vertical
2400	72.05	-12.94	59.11	74	-14.89	peak	Vertical
2400	56.47	-12.94	43.53	54	-10.47	AVG	Vertical
High Channel (2480 MHz)							
2483.5	72.01	-12.78	59.23	74	-14.77	peak	Horizontal
2483.5	53.47	-12.78	40.69	54	-13.31	AVG	Horizontal
2483.6	71.46	-12.77	58.69	74	-15.31	peak	Horizontal
2483.6	52.24	-12.77	39.47	54	-14.53	AVG	Horizontal
2483.5	73.73	-12.76	60.97	74	-13.03	peak	Vertical
2483.5	52.18	-12.76	39.42	54	-14.58	AVG	Vertical
2483.6	75.78	-12.72	63.06	74	-10.94	peak	Vertical
2483.6	52.53	-12.72	39.81	54	-14.19	AVG	Vertical

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain,

Emission Level = Meter Reading + Factor


Margin= Emission Level -Limit.

The "Factor" value can be calculated automatically by software of measurement system.

8.4. Conducted Test Result

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	LCH	-3.22	-61.87	-23.22	PASS
BLE	HCH	-2.99	-61.70	-22.99	PASS

Test Graph

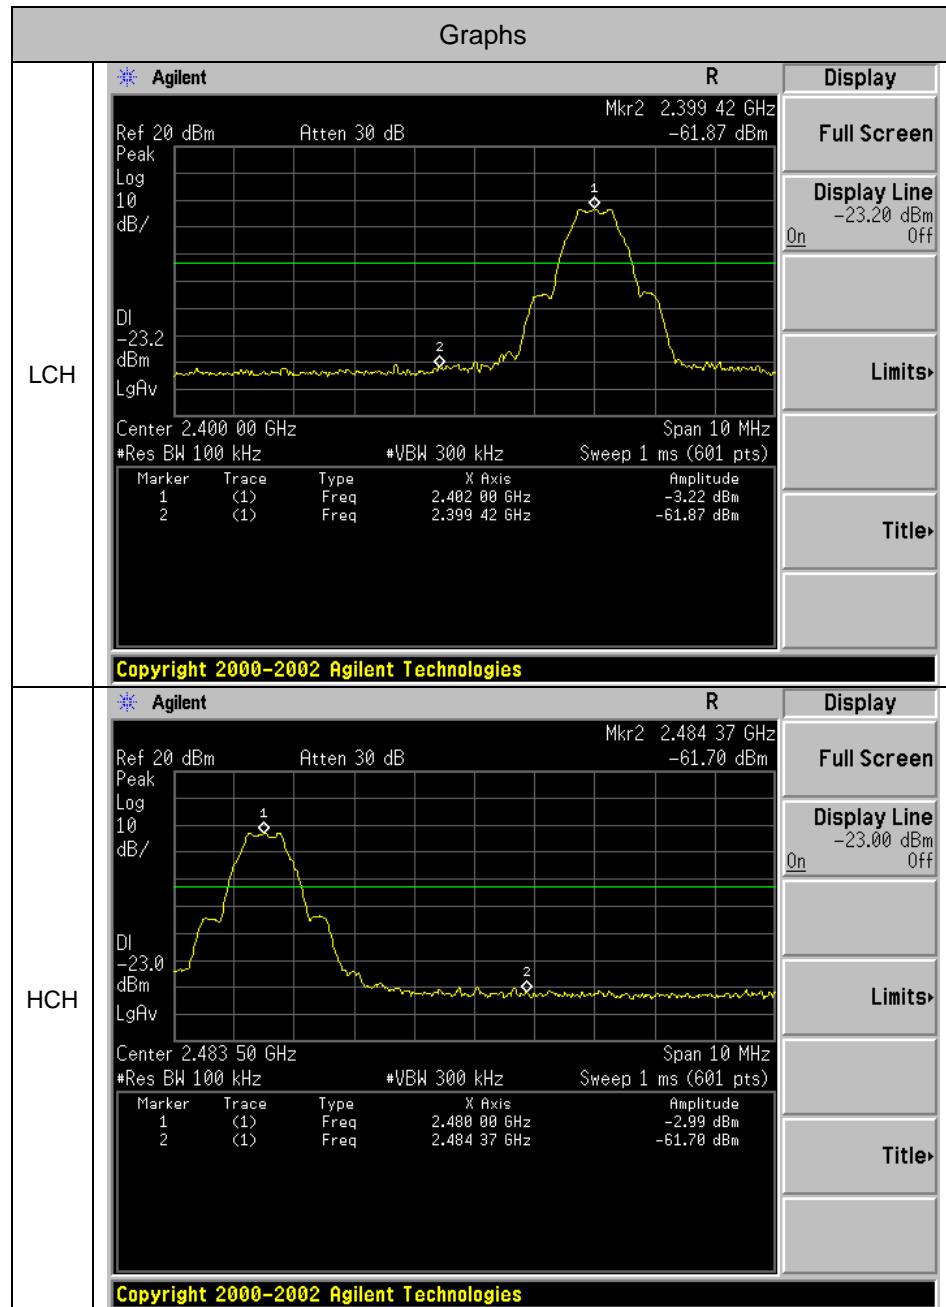

9. 6DB BANDWIDTH


9.1. TEST PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW \geq RBW.
4. Set SPA Trace 1 Max hold, then View.

9.2. SUMMARY OF TEST RESULTS/PLOTS

Mode	Channel	6dB Bandwidth [MHz]	OBW[MHz]	Verdict
BLE	LCH	0.6863	1.0261	PASS
BLE	MCH	0.6924	1.0270	PASS
BLE	HCH	0.6915	1.0290	PASS

Test Graph

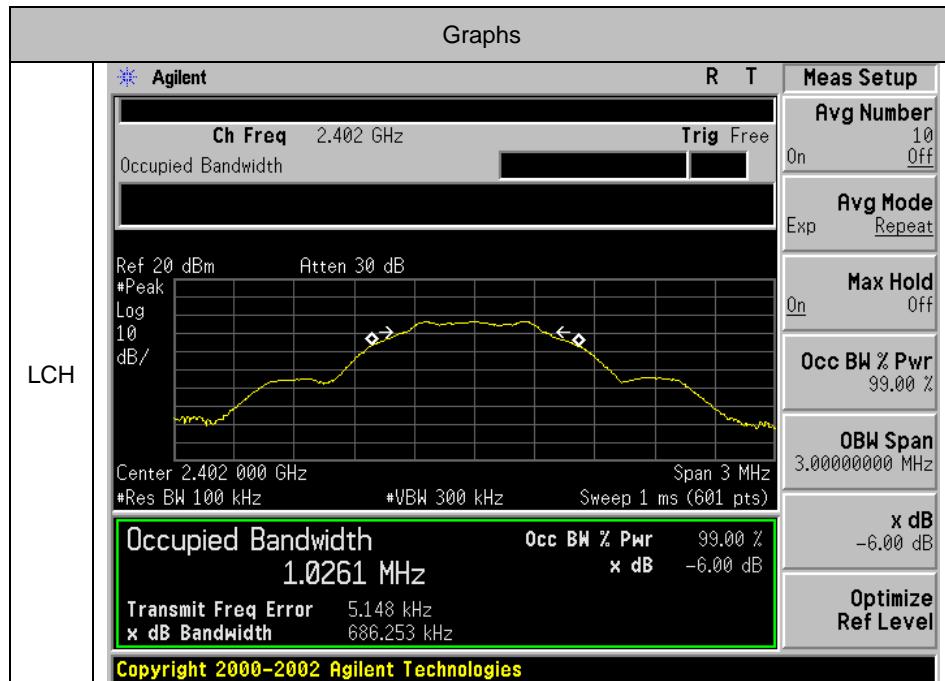



10. CONDUCTED OUTPUT POWER

10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, middle and the bottom operation frequency individually.

3. Use the following spectrum analyzer settings:

Set the RBW \geq DTS bandwidth

Set the VBW \geq 3 x RBW

Set the span \geq 3 x RBW

Detector = peak

Sweep time = auto couple


Trace mode = max hold

4. Allow the trace to stabilize. Use peak marker function to determine the peak amplitude level

5. Record the result form the Spectrum Analyzer.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

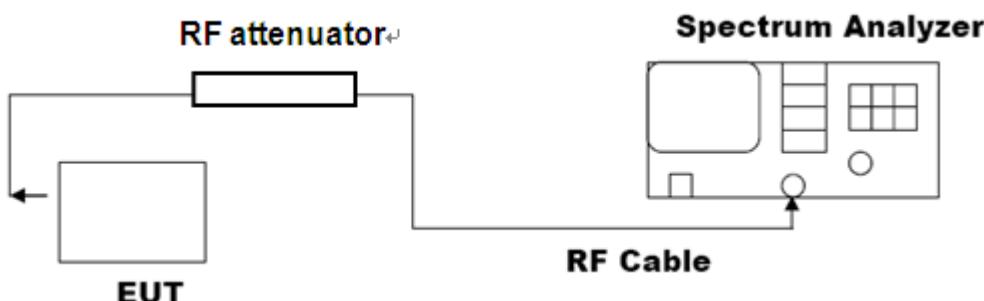


10.3. LIMITS AND MEASUREMENT RESULT


Channel	Peak Power (dBm)	Applicable Limits (dBm)	Pass/Fail
Low Channel	-2.58	20	Pass
Middle Channel	-2.25	20	Pass
High Channel	-2.30	20	Pass

The Low Channel Result

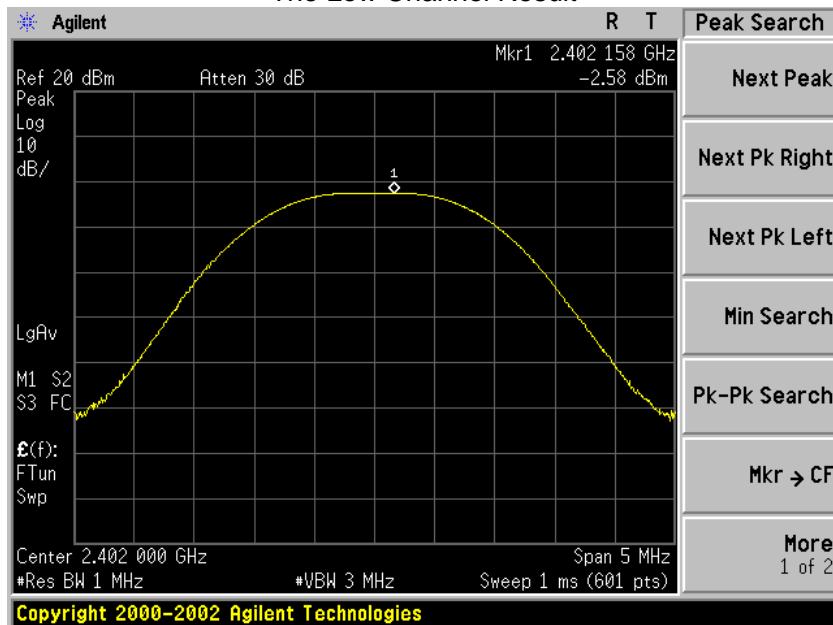

The Middle Channel Result

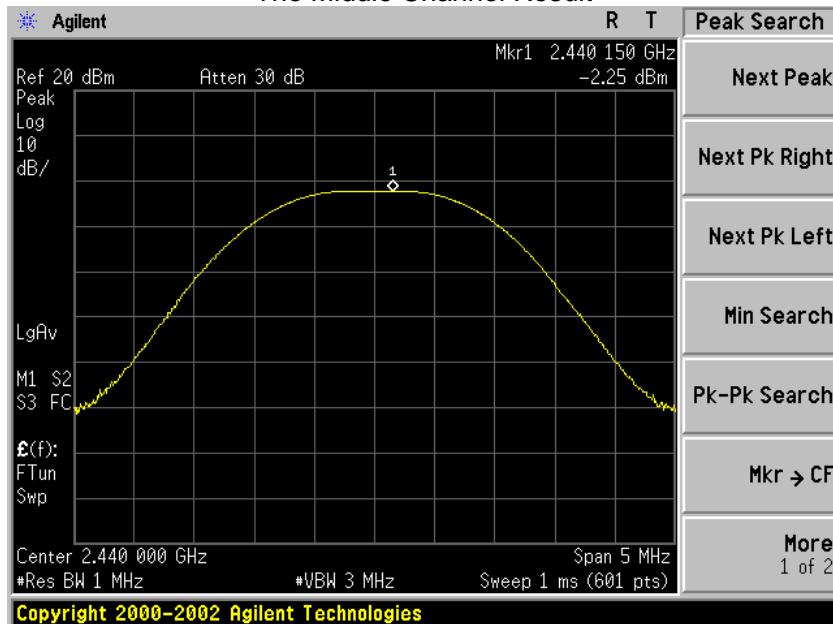

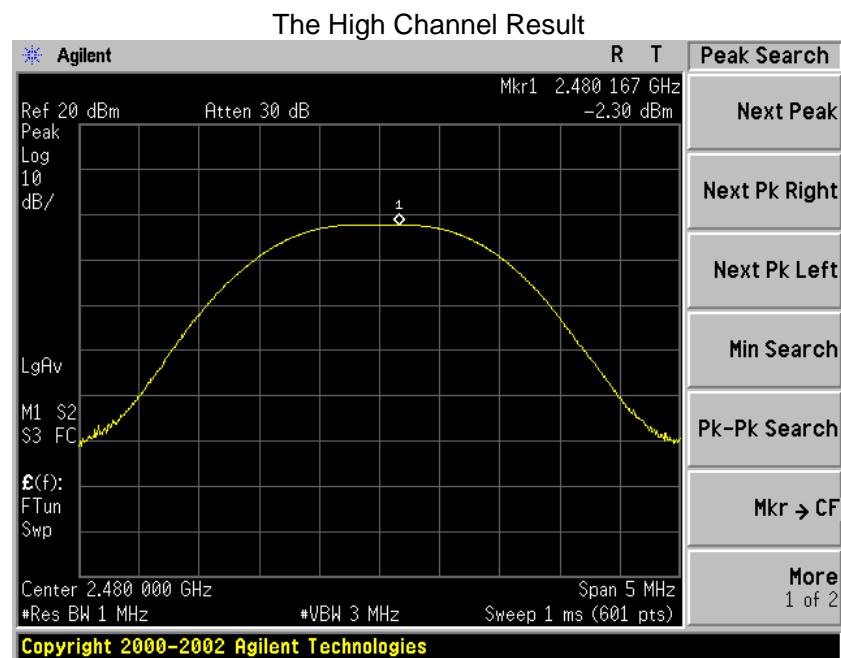


11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

11.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

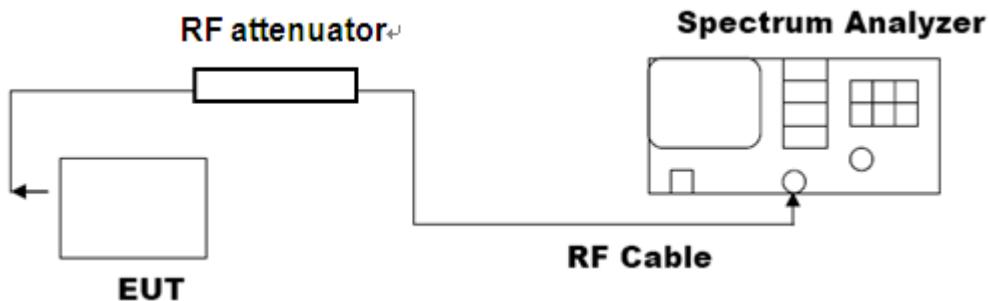


11.3 LIMITS AND MEASUREMENT RESULT

Mode	Channel	PSD [dBm/20kHz]	Limit[dBm/3kHz]	Verdict
BLE	LCH	-8.79	8	PASS
BLE	MCH	-8.45	8	PASS
BLE	HCH	-8.71	8	PASS

Test Graph

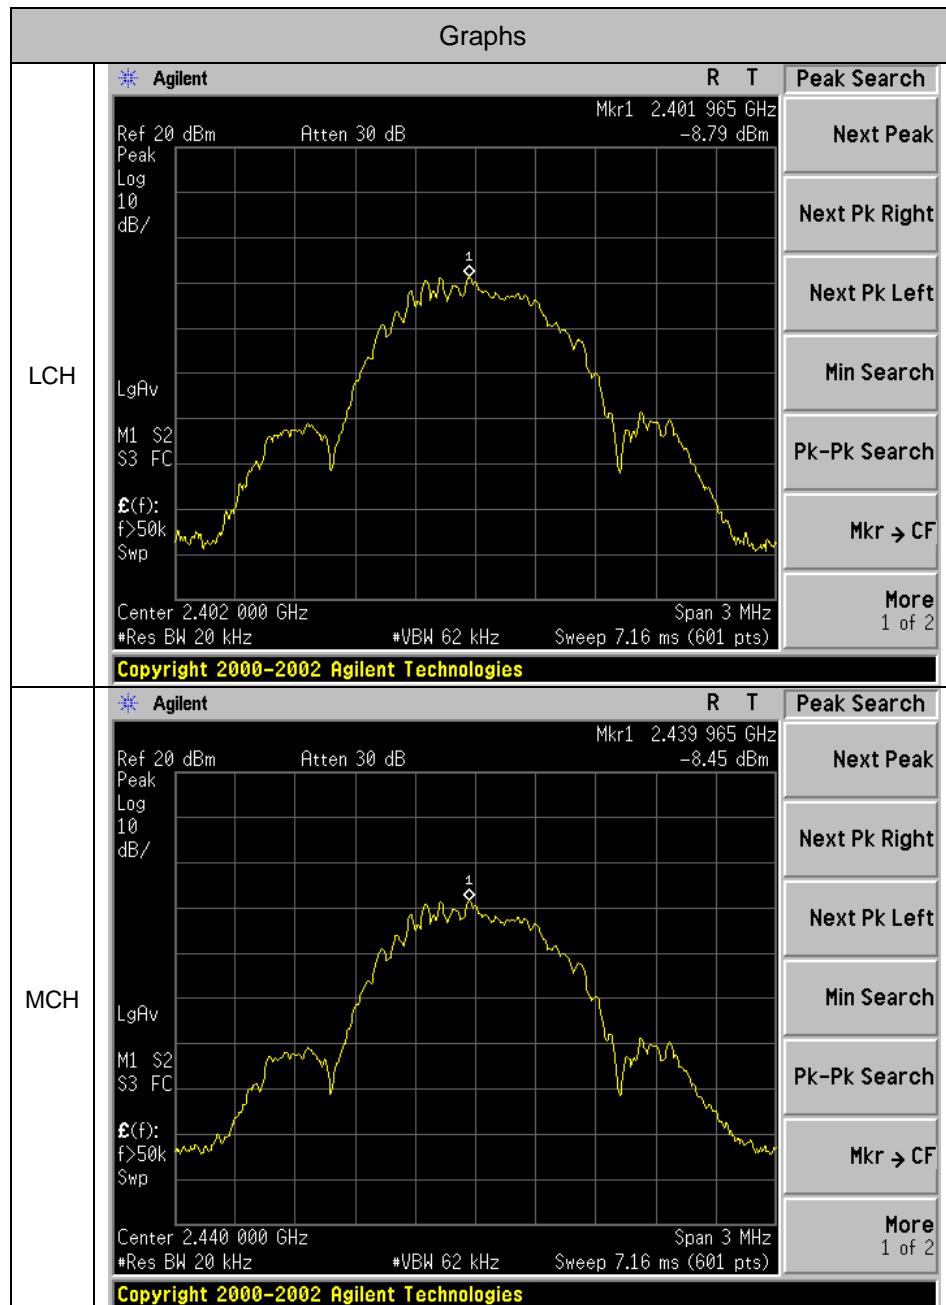

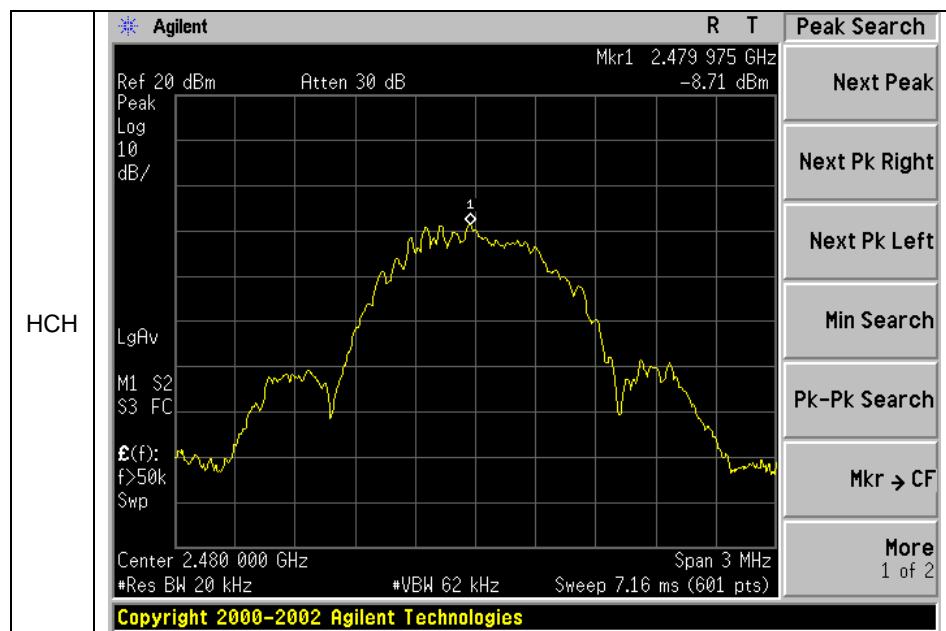

12. FCC LINE CONDUCTED EMISSION TEST


12.1 LIMITS

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average (dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

****Note:** 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 TEST SETUP

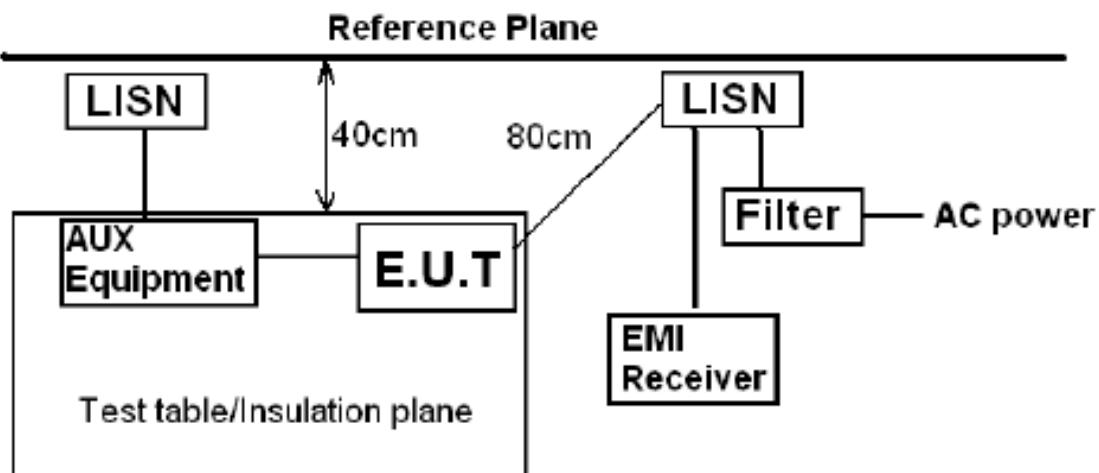

Remark:

E.U.T: Equipment Under Test

LISN: Line Impedance Stabilization Network

Test table height=0.8m

12.3 PRELIMINARY PROCEDURE

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane

used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2) Support equipment, if needed, was placed as per ANSI C63.10.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by adapter which received power by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 FINAL TEST PROCEDURE

- 10) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 11) 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 12) 3) The test data of the worst case condition(s) was reported on the Summary Data page.

12.5 TEST RESULT OF POWER LINE

Line Conducted Emission Test Line 1-L

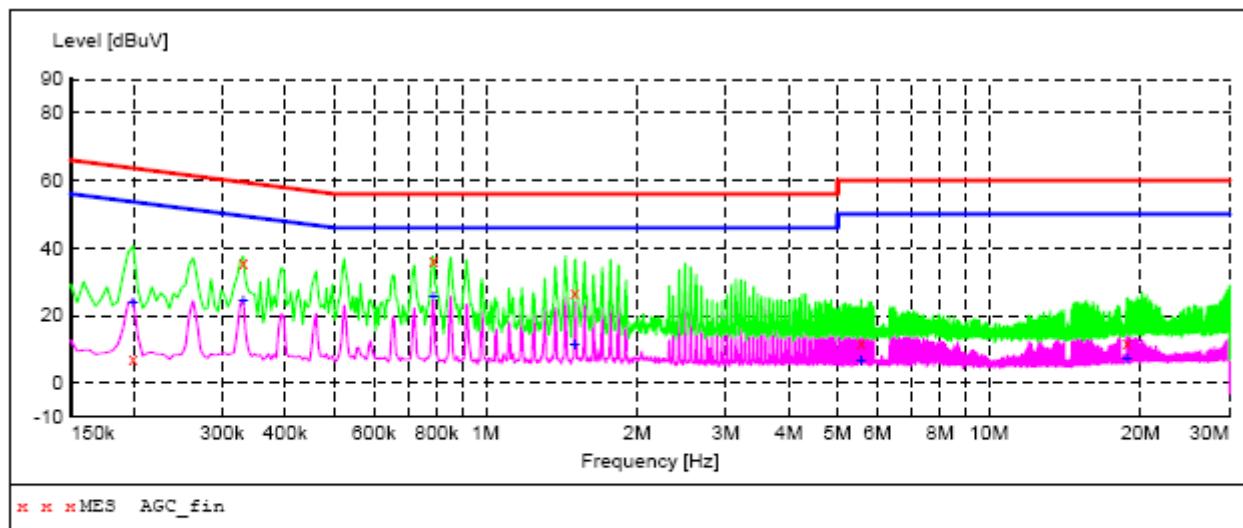

MEASUREMENT RESULT: "AGC_fin"

2016/7/26 11:34


Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.199500	7.10	10.3	64	56.5	QP	L1	FLO	ON
0.330000	35.40	10.3	60	24.1	QP	L1	FLO	ON
0.789000	36.00	10.3	56	20.0	QP	L1	FLO	ON
1.504500	26.50	10.4	56	29.5	QP	L1	FLO	ON
5.572500	11.70	10.6	60	48.3	QP	L1	FLO	ON
18.811500	11.80	11.9	60	48.2	QP	L1	FLO	ON

MEASUREMENT RESULT: "AGC_fin2"

2016/7/26 11:34

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.199500	23.50	10.3	54	30.1	AV	L1	FLO	ON
0.330000	24.60	10.3	50	24.9	AV	L1	FLO	ON
0.789000	25.60	10.3	46	20.4	AV	L1	FLO	ON
1.504500	11.20	10.4	46	34.8	AV	L1	FLO	ON
5.572500	6.60	10.6	50	43.4	AV	L1	FLO	ON
18.811500	6.90	11.9	50	43.1	AV	L1	FLO	ON

Line Conducted Emission Test Line 1-N

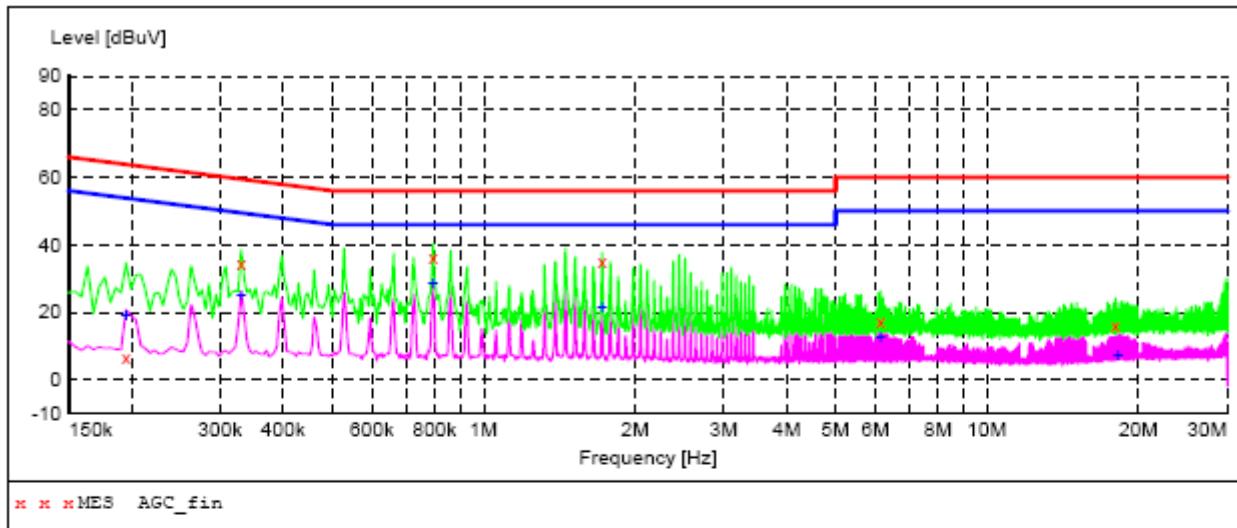

MEASUREMENT RESULT: "AGC_fin"

2016/7/26 11:45

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.195000	6.70	10.3	64	57.1	QP	N	FLO	ON
0.330000	34.50	10.3	60	25.0	QP	N	FLO	ON
0.793500	36.50	10.3	56	19.5	QP	N	FLO	ON
1.720500	34.80	10.4	56	21.2	QP	N	FLO	ON
6.148500	17.40	10.6	60	42.6	QP	N	FLO	ON
17.983500	16.10	11.7	60	43.9	QP	N	FLO	ON

MEASUREMENT RESULT: "AGC_fin2"

2016/7/26 11:45


Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.195000	19.20	10.3	54	34.6	AV	N	FLO	ON
0.330000	25.20	10.3	50	24.3	AV	N	FLO	ON
0.793500	28.30	10.3	46	17.7	AV	N	FLO	ON
1.720500	21.60	10.4	46	24.4	AV	N	FLO	ON
6.148500	12.70	10.6	50	37.3	AV	N	FLO	ON
18.181500	7.10	11.8	50	42.9	AV	N	FLO	ON


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

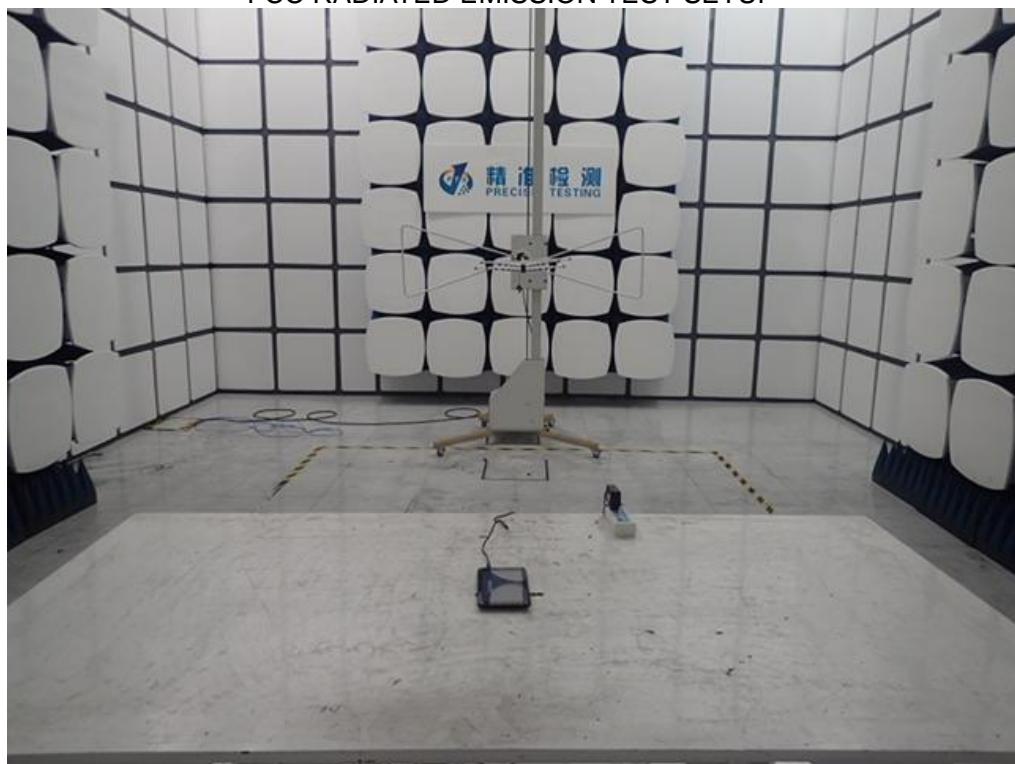

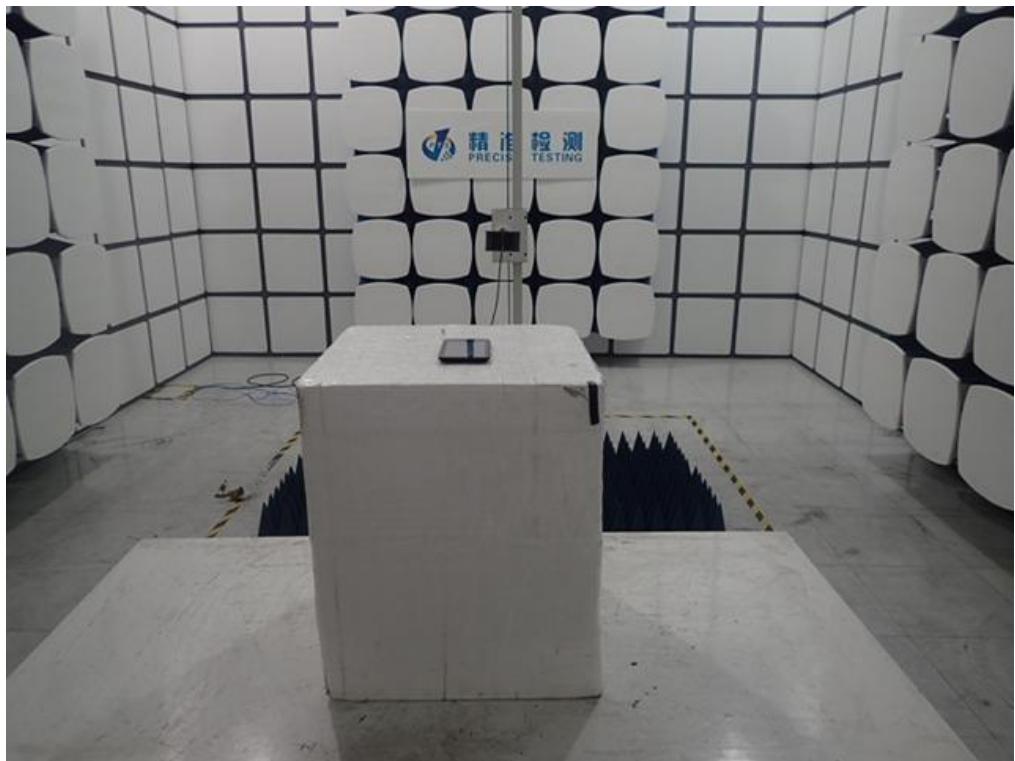

APPENDIX B: PHOTOGRAPHS OF EUT


TOTAL VIEW OF EUT




THE LABEL OF ADAPTER



TOP VIEW OF EUT

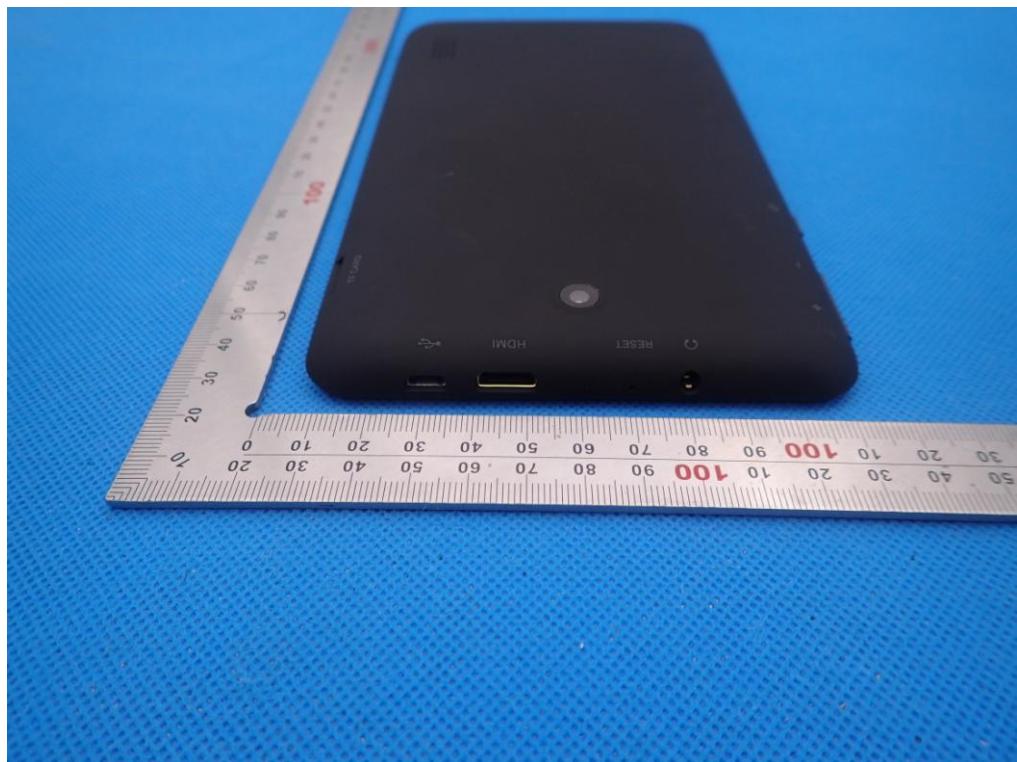

BOTTOM VIEW OF EUT

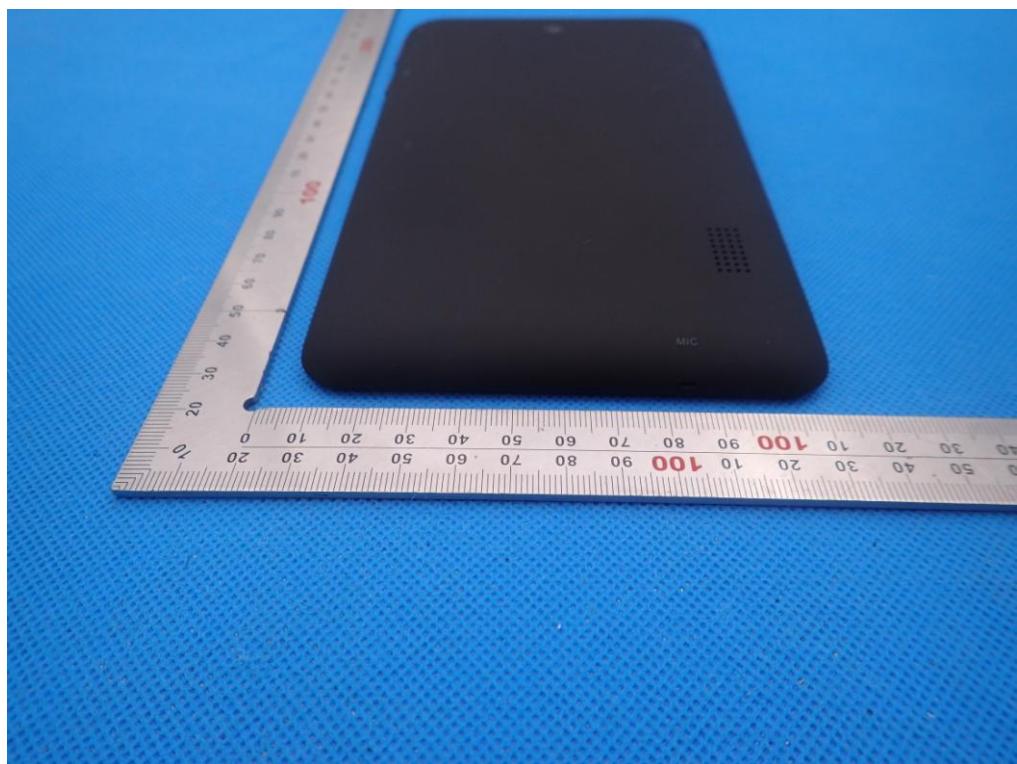


FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT

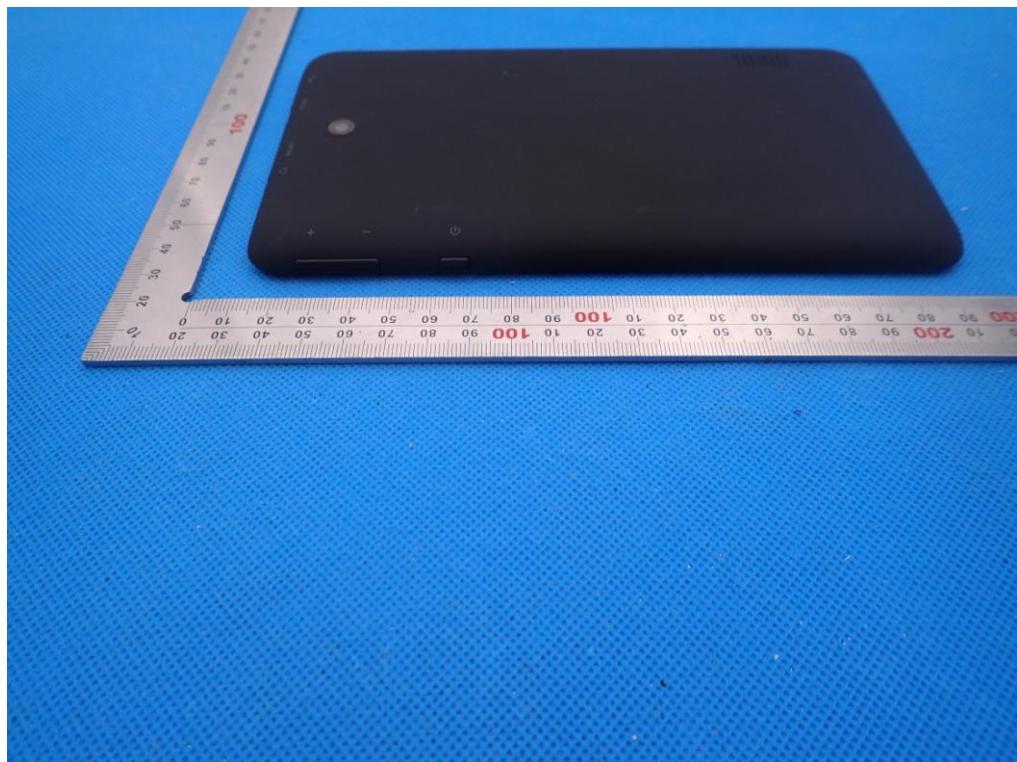

RIGHT VIEW OF EUT




OPEN VIEW OF EUT-1




OPEN VIEW OF EUT-2



INTERNAL VIEW OF EUT-1

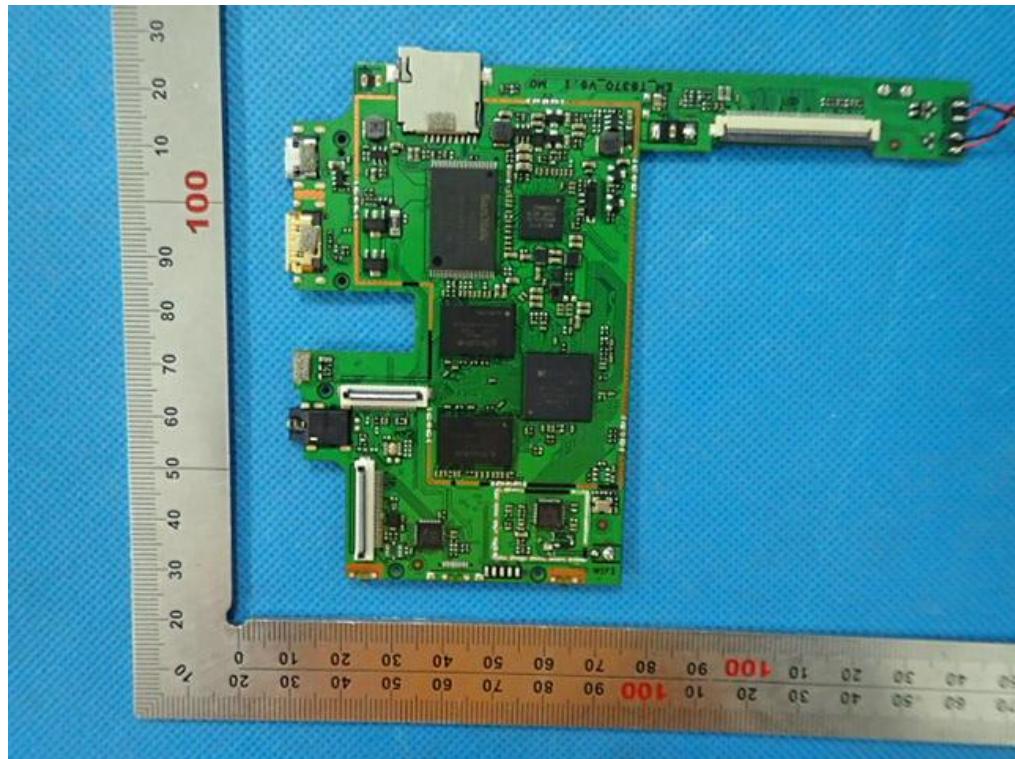

INTERNAL VIEW OF EUT-2

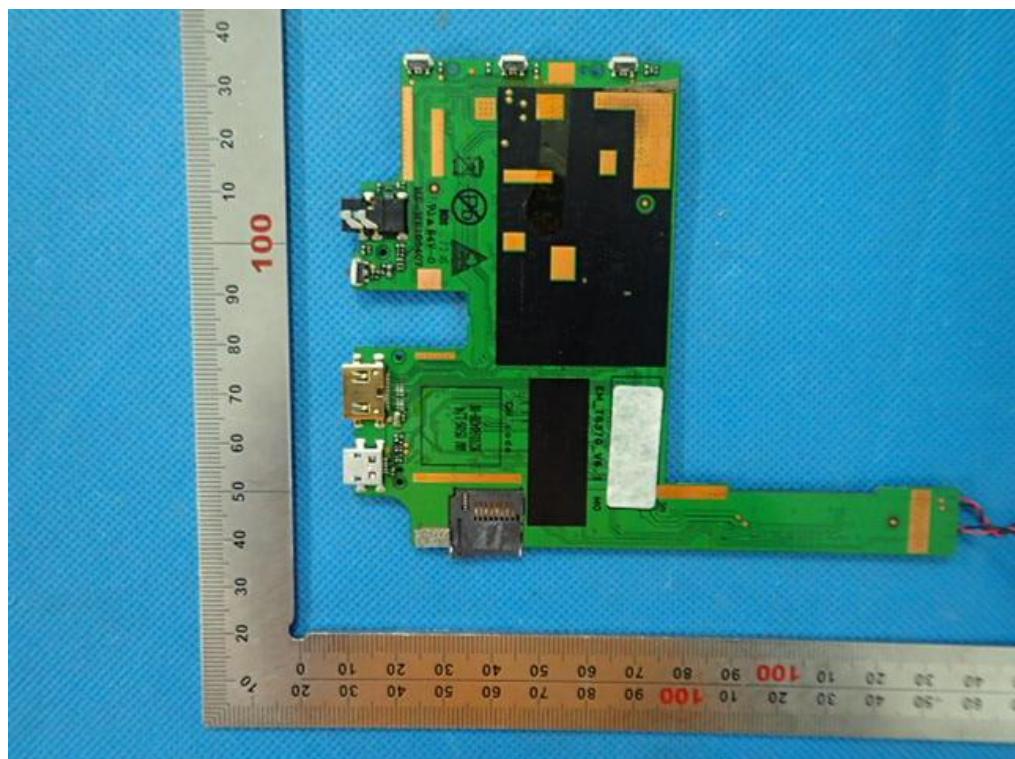

----END OF REPORT----