





PCID: YTHXOFM2
IC: 8544-XXOFM2
CAN ICES-003 (B) / NMB-003 (B)

ENCLOSED ENERGY
MONT EQLUP
T1AA

INPUTS:
Power: 120-240VAC, 50/60Hz, 10A max
Occupancy Sensor: 0-30VDC, 50mA
OUTPUTS:
Relay: 120VAC, 15A, TUNISTEX
120-240VAC, 5A, BALLAST
120-277VAC, 5A, 2-BALLAST
24VDC, 1A, 2-BALLAST
48VAC, 5A, BALLAST

Operating Temperature:
40°C to 50°C
Humidity: 5-95% RH
Altitude: 0-10000 ft



Current
NXOPM2-1R1D-UNV
NX™ Released On Future Control Module
1 Relay, 1 Dimmer
Black
Ratings
Made in China

NX LIGHTING
CONTROLS
CP: XXX, Data Code: XXX
RP: XXX
Manufactured for:
HLI Solidtron, Inc.
Greenville, SC 29607
www.currentlighting.com

FCCID: YH8NXOPM2
IC: 8044A-NXOPM2
CAN ICES-003 (B) / NMB-003 (B)












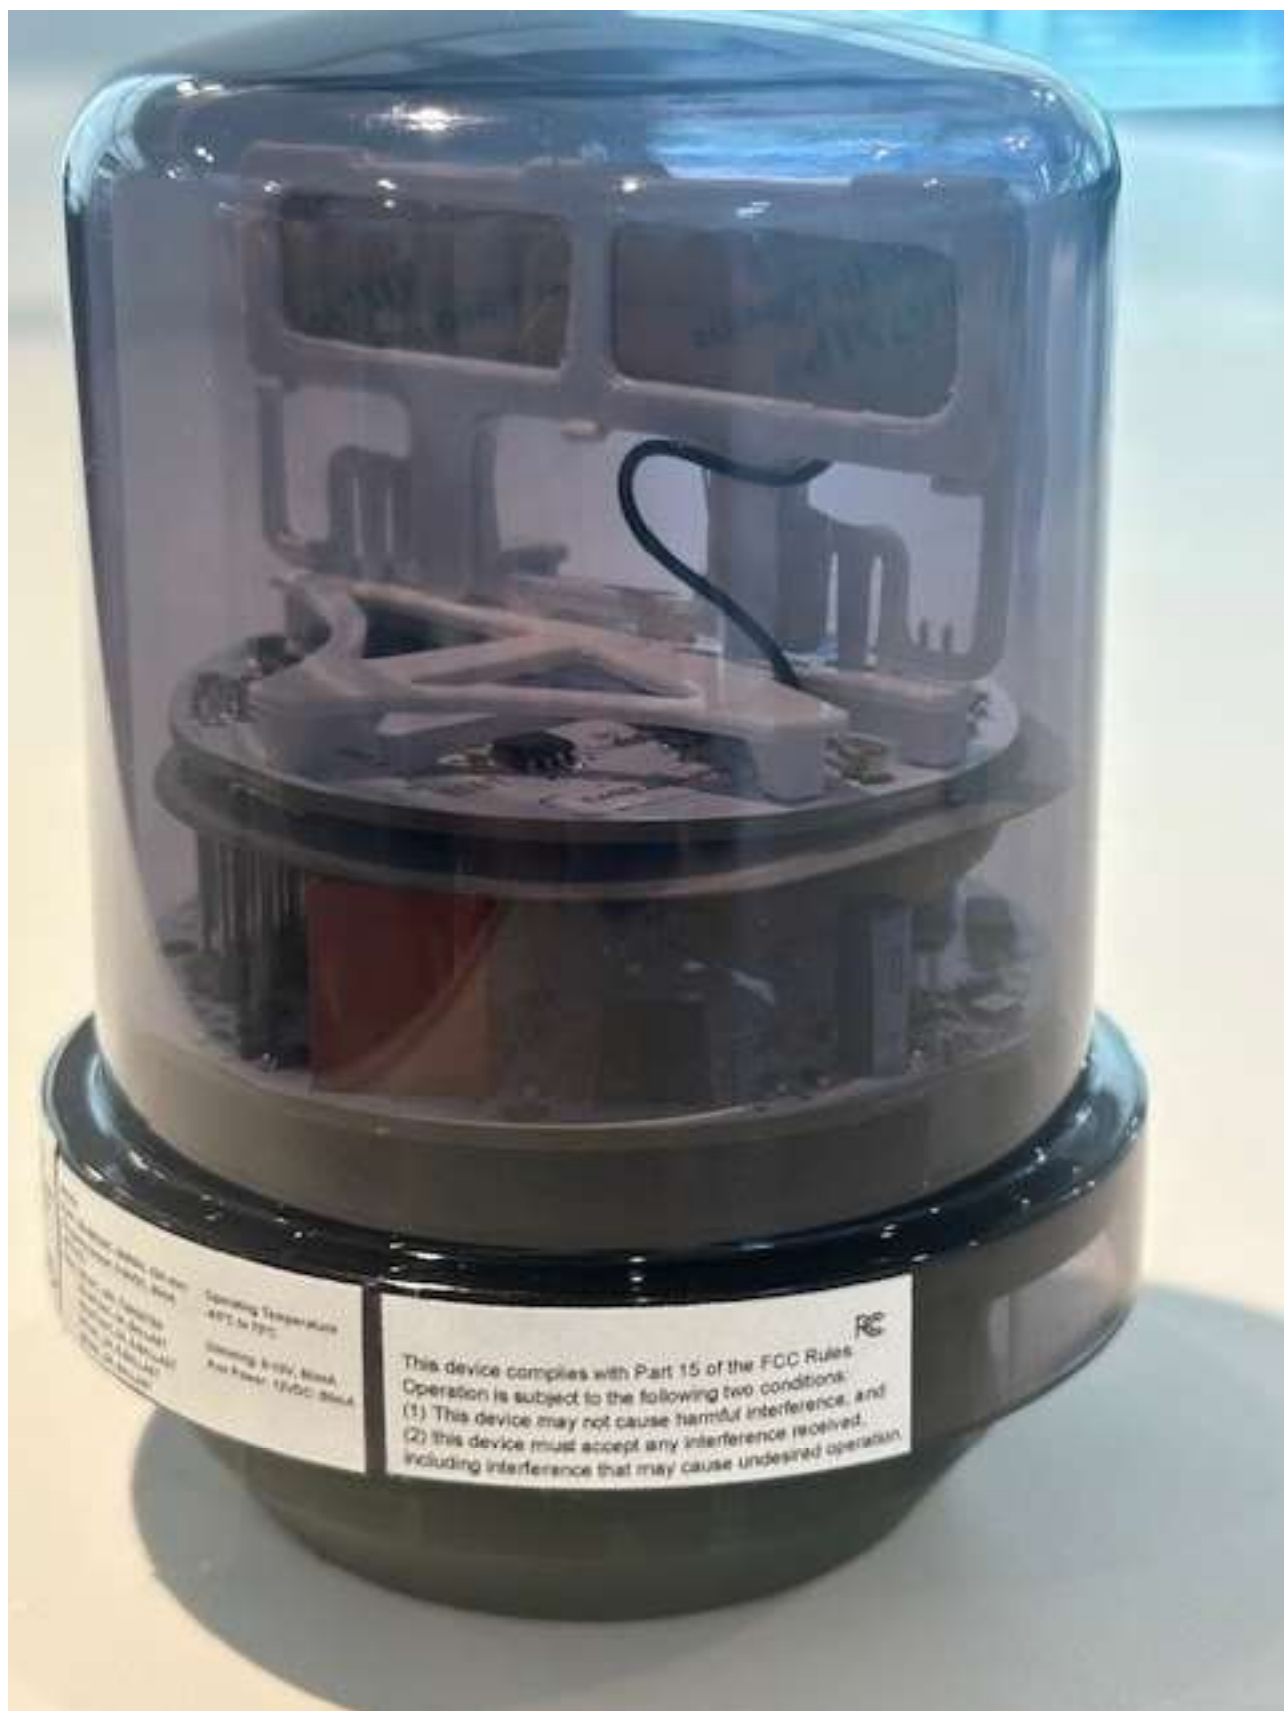



Current
K80PM2-IR1DUNV
Wi-Fi Network for Philips Hue Smart Home
1. Battery 1. Device
Warning:
Do not touch the bulb

NX LIGHTING
CONTROLS
OP. 5.5K, Date Code: 1014
SP. 5.5K
Manufactured by
Philips Lighting, Inc.
Glenview, IL 60045
www.currentlighting.com

PCOD: YH101040
IC: 8044A-800PM2
CAK: 1025-001 (R) 1000-001 (R)
Warning:
Do not touch the bulb