



HEADQUARTERS: 914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230 • PHONE (410) 354-3300 • FAX (410) 354-3313

12/06/2024

HLI Solutions, Inc.
710 Hesters Crossing
Round Rock, TX 78681
USA

Dear Justin Foster,

Enclosed is the EMC Wireless test report for compliance testing of the HLI Solutions, Inc. NXSW2-W Family as tested to the requirements of FCC Part 15.247 and RSS-247 Issue 3 for Intentional Radiators.

Thank you for using the services of Eurofins MET Labs. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
EUROFINS MET LABS

A handwritten signature in blue ink that reads "Nancy LaBrecque".

Nancy LaBrecque
Documentation Department

Reference: WIRA132787-FCC-IC-BLE_WP

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins MET Labs.

The Nation's First Licensed Nationally Recognized Testing Laboratory

Maryland | California | Texas
www.metlabs.com

Bluetooth Low Energy Test Report

for the

HLI Solutions, Inc.
NXSW2-W Family

Tested under

FCC Part 15.247 and RSS-247 Issue 3
For Intentional Radiators



Bryan Taylor, Wireless Team Lead
Electromagnetic Compatibility Lab



Nancy LaBrecque
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.



Matthew Hinojosa
EMC Manager, Austin Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	12/06/2024	Initial Issue.

Table of Contents

I.	Executive Summary	8
	A. Purpose of Test	9
	B. Executive Summary	9
II.	Equipment Configuration	10
	A. Overview.....	11
	B. References.....	12
	C. Test Site	13
	D. Measurement Uncertainty	13
	E. Description of Test Sample.....	13
	F. Equipment Configuration.....	14
	G. Mode of Operation.....	15
	H. Method of Monitoring EUT Operation.....	15
	I. Modifications	15
	a) Modifications to EUT	15
	b) Modifications to Test Standard.....	15
	J. Disposition of EUT	15
III.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	16
	§ 15.203 Antenna Requirement	17
	§ 15.207(a) Conducted Emissions Limits.....	18
	§ 15.247(a)(a) 6 dB and 99% Bandwidth	23
	RSS-GEN (6.7) 99% Bandwidth	24
	§ 15.247(b) Peak Power Output	27
	§ 15.247(e) Peak Power Spectral Density	31
	§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge.....	34
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge.....	38
IV.	Test Equipment	50

List of Tables

Table 1. Executive Summary	9
Table 2. EUT Summary Table.....	11
Table 3. References	12
Table 4. Uncertainty Calculations Summary.....	13
Table 5. Ports and Cabling Information	14
Table 6. Test Channels Utilized	15
Table 7. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	18
Table 8. Conducted Emissions, 15.207(a), Phase, Test Results, (BLE)	19
Table 9. Conducted Emissions, 15.207(a), Neutral, Test Results, (BLE)	20
Table 10. Conducted Emissions, 15.207(a), Phase, Test Results, (Wirepas)	21
Table 11. Conducted Emissions, 15.207(a), Neutral, Test Results, (Wirepas).....	22
Table 12. 99% and 6 dB Occupied Bandwidth, Test Results	24
Table 13. Output Power Requirements from §15.247(b)	27
Table 14. Peak Power Output, Test Results	29
Table 15. Peak Power Spectral Density, Test Results	32
Table 16. Restricted Bands of Operation.....	38
Table 17. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)	39
Table 18. Test Equipment List (For Test Dates in July and August, 2024)	51
Table 19. Test Equipment List (For Test Dates in December, 2024)	52

List of Figures

Figure 1. Block Diagram of Test Configuration.....	14
Figure 2. Block Diagram, Occupied Bandwidth Test Setup.....	24
Figure 3. Analyzer Settings During Measurement	28
Figure 4. Peak Power Output Test Setup.....	29
Figure 5. Analyzer Settings During Measurement	31
Figure 6. Block Diagram, Peak Power Spectral Density Test Setup.....	32
Figure 7. Analyzer Settings During Measurement	34
Figure 8. Block Diagram, Conducted Spurious Emissions Test Setup.....	34
Figure 9. Low Channel, Band Edge (BLE)	36
Figure 10. High Channel, Band Edge (BLE).....	36
Figure 11. Low Channel, Band Edge (Wirepas)	37
Figure 12. High Channel, Band Edge (Wirepas).....	37
Figure 13. Restricted Band Edge Spurious Emissions, Low Channel, (BLE)	42
Figure 14. Restricted Band Edge Spurious Emissions, High Channel, (BLE)	42
Figure 15. Restricted Band Edge Spurious Emissions, Low Channel, (Wirepas)	43
Figure 16. Restricted Band Edge Spurious Emissions, High Channel, (Wirepas)	43
Figure 17. Worst Case Cabinet Radiation, 9kHz - 30MHz (BLE)	44
Figure 18. Worst Case Cabinet Radiation, 9kHz - 30MHz (Wirepas)	44
Figure 19. Worst Case Cabinet Radiation, 30MHz - 1GHz (BLE)	44
Figure 20. Worst Case Cabinet Radiation, 30MHz - 1GHz (Wirepas)	44
Figure 21. Worst Case Cabinet Radiation, Above 1GHz (BLE)	45
Figure 22. Worst Case Cabinet Radiation, Above 1GHz (Wirepas)	45

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dBμA	Decibels above one microamp
dBμV	Decibels above one microvolt
dBμA/m	Decibels above one microamp per meter
dBμV/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	microhenry
μ	microfarad
μ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the NXSW2-W Family, with the requirements of FCC Part 15.247 and RSS-247 Issue 3. HLI Solutions, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the NXSW2-W Family, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15.247 and RSS-247 Issue 3, in accordance with HLI Solutions, Inc. purchase order number 4710457511. All tests were conducted using measurement procedures ANSI C63.4-2014 and ANSI C63.10-2013.

FCC Reference 47 CFR Part 15.247:2005	IC Reference RSS-247 Issue 3: 2023 RSS-GEN Issue 5: 2018	Description	Compliance
Title 47 of the CFR, Part 15 §15.203	---	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-GEN(8.8)	Conducted Emission Limits	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(2)	RSS-247 (5.2)	6dB Occupied Bandwidth	Compliant
---	RSS-GEN(6.7)	99% Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	RSS-247(5.4)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	RSS-GEN (6.13), (8.9), & (8.10)	Radiated Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	RSS-247(5.5)	RF Conducted Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	RSS-247(5.2)	Peak Power Spectral Density	Compliant

Table 1. Executive Summary

II. Equipment Configuration

A. Overview

Eurofins MET Labs was contracted by HLI Solutions, Inc. to perform testing on the NXSW2-W Family, under HLI Solutions, Inc.'s purchase order number 4710457511.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the NXSW2-W Family.

The results obtained relate only to the item(s) tested.

Product Name:	NXSW2-W Family	
Model(s) Tested:	NXSW2-W Family	
Model(s) Covered:	NXSW2-W5 NXSW2-W6 NXSW2-W8	
Sample Number:	24688-4	
FCCID:	YH9-NXSW2	
ICID:	9044A-NXSW2	
EUT Specifications:	Primary Power: 120Vac – 277Vac, 347 Vac	
	Type of Modulations:	BLE: GFSK Wirepas: GFSK
	Equipment Code:	BLE: DTS Wirepas: DTS
	Peak RF Output Power:	BLE: 9.28dBm Wirepas: 8.85dBm
	EUT Frequency Ranges:	BLE: 2402MHz – 2480MHz Wirepas: 2402MHz – 2480MHz
	Antenna Gain ¹ :	BLE: 1.5dBi Wirepas: 1.5dBi
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Bryan Taylor	
Report Date(s):	12/06/2024	

Table 2. EUT Summary Table

¹ The antenna gain information was provided by HLI Solutions, Inc. and may affect compliance.

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
RSS-247, Issue 3, August 2023	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS-GEN, Issue 5, March 2019	General Requirements and Information for the Certification of Radio Apparatus
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2017	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Table 3. References

C. Test Site

All testing was performed at Eurofins MET Labs, 13501 McCallen Pass, Austin, TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

ISED Lab Info:

CAB Identifier: US0004
 Company Number: 2043D

FCC Lab Info:

Designation Number: US1127

D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
Occupied Bandwidth Measurements	± 4.52 Hz	2	95%
Conducted Power Measurements	± 2.74 dB	2	95%
Power Spectral Density Measurements	± 2.74 dB	2	95%
Conducted Spurious Emissions	± 2.80 dB	2	95%
Conducted Emissions (Mains)	± 2.97 dB	2	95%
Radiated Spurious Emissions (9kHz – 1GHz)	± 2.95 dB	2	95%
Radiated Spurious Emissions (1GHz - 40GHz)	± 3.54 dB	2	95%

Table 4. Uncertainty Calculations Summary

E. Description of Test Sample

The NXSW2-W is a line-powered Wireless Wall Station that communicates wirelessly with current NX lighting control wireless products.



Figure 1. Block Diagram of Test Configuration

F. Equipment Configuration

The EUT was set up as outlined in Figure 1 above. The test sample were configured to transmit on low, mid, or high channels at maximum output power automatically upon power up.

G. Support Equipment

No support equipment was used during this evaluation.

H. Ports and Cabling Information

Ref. Id	Port Name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
---	AC Input	AC Input	1	2m	---	No	N/A

Table 5. Ports and Cabling Information

I. Mode of Operation

The test sample were configured to transmit on low, mid, or high channels at maximum output power automatically upon power up.

The EUT has the capability to operate in BLE and Wirepas modes. Both modes were tested and results are presented for each.

Transmit Band	Modulation	Channel Frequencies Tested
2400 – 2483.5MHz	BLE	2402MHz / 2440MHz / 2480MHz
2400 – 2483.5MHz	Wirepas	2402MHz / 2440MHz / 2480MHz

Table 6. Test Channels Utilized

J. Method of Monitoring EUT Operation

A spectrum analyzer was used to confirm proper transmitter operation.

K. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

L. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to HLI Solutions, Inc. upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. The TX antenna is not accessible by the end user and is permanently attached to the unit.

Test Engineer(s): Bryan Taylor

Test Date(s): 08/13/2024

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207(a) Conducted Emissions Limits

Test Requirement(s): **§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 - 56	56 - 46
0.5-5	56	46
5-30	60	50

Table 7. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure:

The EUT was placed on a 0.8 m-high wooden table. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed using a 50 Ω /50 μ H LISN as the input transducer to an EMI receiver. For the purpose of this testing, the transmitter was turned on.

Test Results:

The EUT was compliant with this requirement..


Test Engineer(s):

An Dang/Tyler Quintana, Frank Hernandez

Test Date(s):

07/31/2024, 12/4/2024

15.207(a) Conducted Emissions Test Results

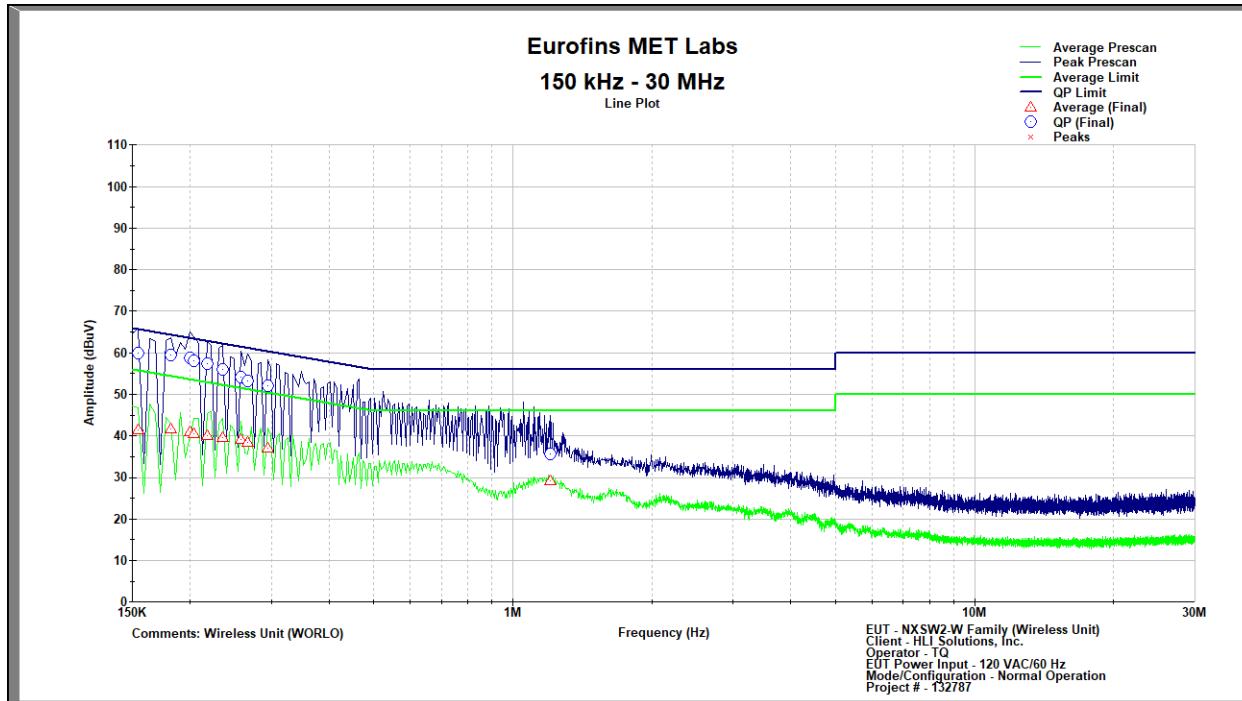


Conducted Emissions, 15.207(a), Phase, (BLE)

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Quasi-Peak Limit (dB μ V/m)	Quasi-Peak Margin (dB)	Average (dB μ V/m)	Average Limit (dB μ V/m)	Average Margin (dB)
0.154	59.860	65.871	6.011	41.488	55.871	14.384
0.181	59.539	65.100	5.561	41.574	55.100	13.526
0.200	58.757	64.586	5.829	40.857	54.586	13.729
0.204	58.044	64.457	6.413	40.412	54.457	14.045
0.217	57.378	64.071	6.693	40.125	54.071	13.946
0.235	55.882	63.557	7.675	39.657	53.557	13.901
0.258	54.236	62.914	8.678	39.077	52.914	13.837
0.267	53.334	62.657	9.324	38.456	52.657	14.201
0.294	52.156	61.886	9.730	37.128	51.886	14.757
1.208	35.667	56.000	20.333	29.167	46.000	16.833

Table 8. Conducted Emissions, 15.207(a), Phase, Test Results, (BLE)


15.207(a) Conducted Emissions Test Results

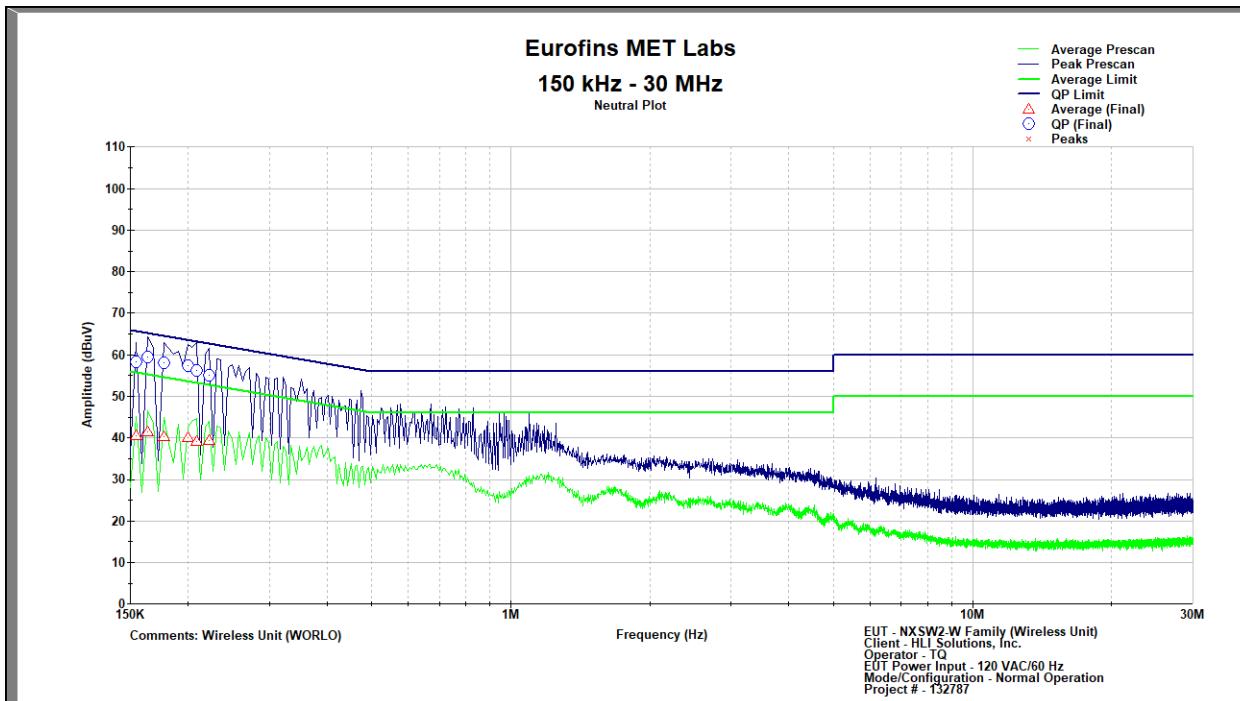

Conducted Emissions, 15.207(a), Neutral, (BLE)

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Quasi-Peak Limit (dB μ V/m)	Quasi-Peak Margin (dB)	Average (dB μ V/m)	Average Limit (dB μ V/m)	Average Margin (dB)
0.154	58.412	65.871	7.459	40.519	55.871	15.352
0.164	59.358	65.614	6.256	41.325	55.614	14.289
0.177	58.096	65.229	7.132	40.282	55.229	14.946
0.200	57.275	64.586	7.311	39.925	54.586	14.661
0.208	56.150	64.329	8.179	39.181	54.329	15.148
0.222	54.997	63.943	8.946	39.270	53.943	14.673


Table 9. Conducted Emissions, 15.207(a), Neutral, Test Results, (BLE)

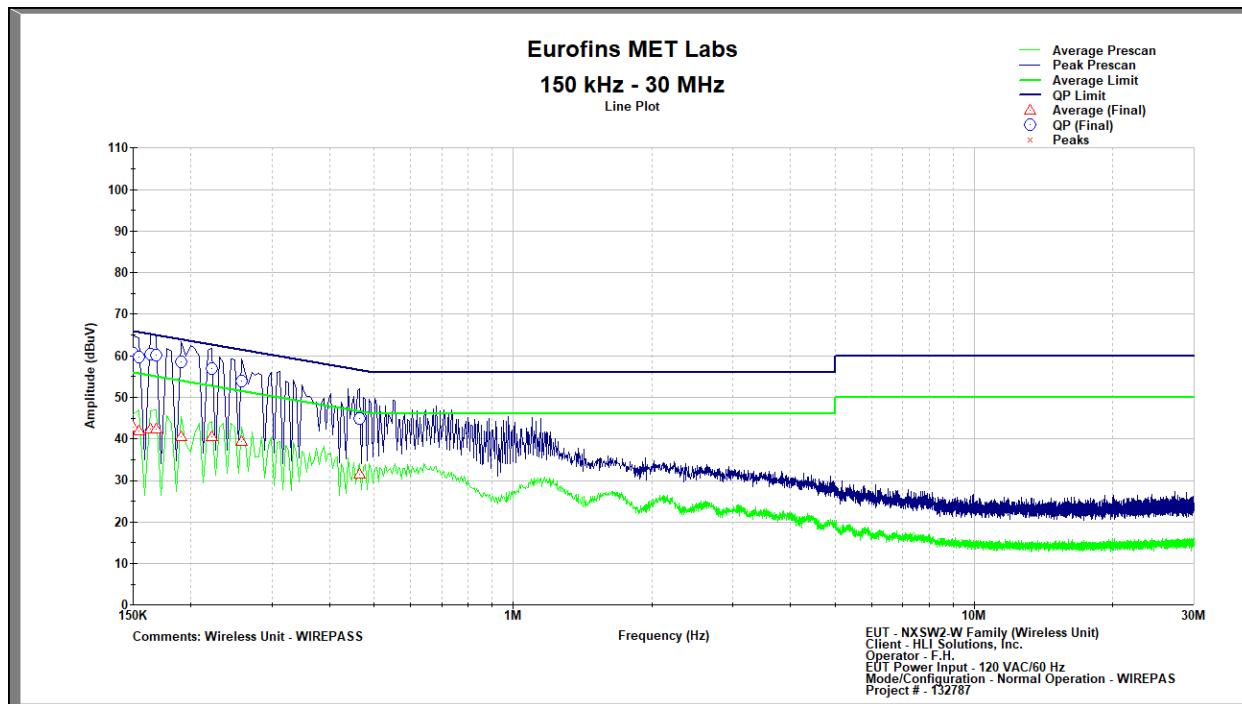
Conducted Emissions, 15.207(a), Phase, (Wirepas)

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Quasi-Peak Limit (dB μ V/m)	Quasi-Peak Margin (dB)	Average (dB μ V/m)	Average Limit (dB μ V/m)	Average Margin (dB)
0.150	60.499	66.000	5.501	42.820	56.000	13.180
0.154	59.693	65.871	6.178	41.882	55.871	13.990
0.164	60.259	65.614	5.356	42.307	55.614	13.307
0.168	60.225	65.486	5.261	42.437	55.486	13.049
0.191	58.465	64.843	6.378	40.530	54.843	14.313
0.222	56.866	63.940	7.074	40.388	53.940	13.552
0.258	53.971	62.911	8.941	39.323	52.911	13.588
0.465	44.787	57.000	12.213	31.475	47.000	15.525

Table 10. Conducted Emissions, 15.207(a), Phase, Test Results, (Wirepas)

15.207(a) Conducted Emissions Test Results

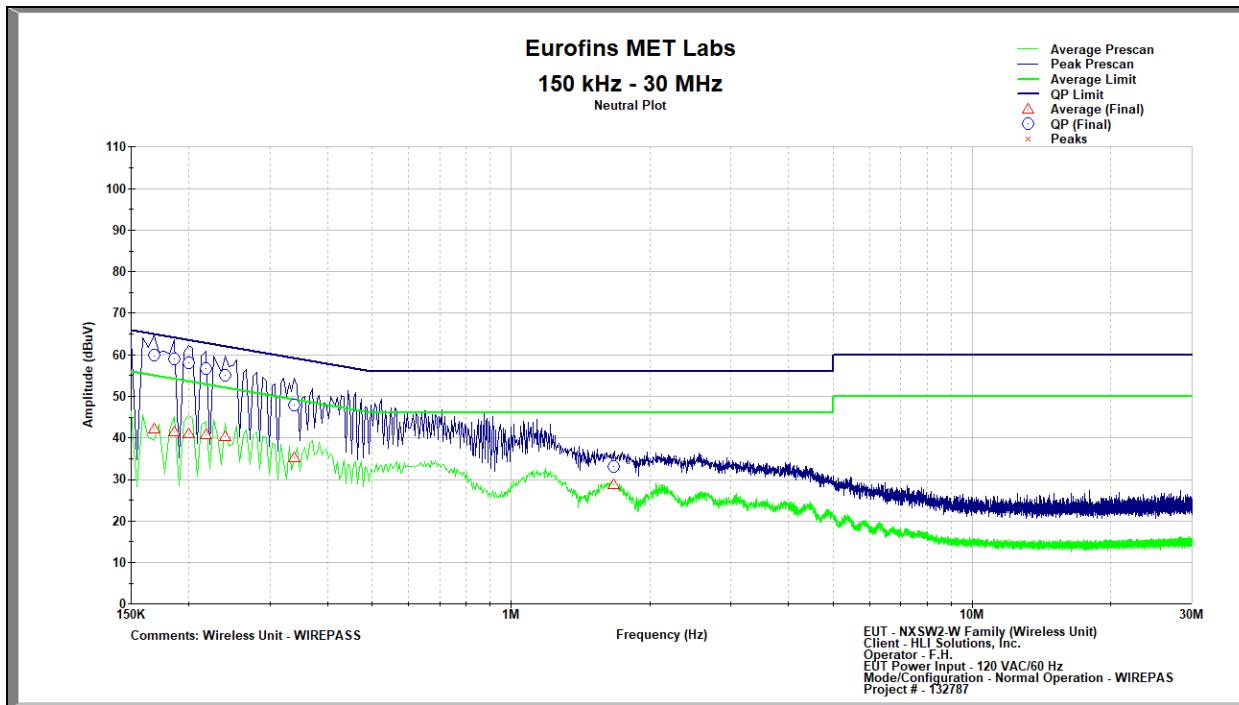

Conducted Emissions, 15.207(a), Neutral, (Wirepas)

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Quasi-Peak Limit (dB μ V/m)	Quasi-Peak Margin (dB)	Average (dB μ V/m)	Average Limit (dB μ V/m)	Average Margin (dB)
0.168	59.792	65.486	5.694	42.184	55.486	13.302
0.186	58.986	64.971	5.986	41.317	54.971	13.654
0.200	58.040	64.586	6.545	41.005	54.586	13.580
0.217	56.643	64.071	7.428	40.660	54.071	13.412
0.240	54.962	63.429	8.466	40.257	53.429	13.172
0.339	47.977	60.600	12.623	35.211	50.600	15.389
1.671	33.039	56.000	22.961	28.652	46.000	17.348

Table 11. Conducted Emissions, 15.207(a), Neutral, Test Results, (Wirepas)

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a)(2) 6 dB Bandwidth

Test Requirements: **§ 15.247(a)(2):** Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure: The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, and the VBW > RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

Test Results The EUT was compliant with § 15.247 (a)(2).

The 6 dB Bandwidth was determined from the plots on the following pages.

Test Engineer(s): Bryan Taylor

Test Date(s): 08/13/2024

Electromagnetic Compatibility Criteria for Intentional Radiators

RSS-GEN (6.7)

99% Bandwidth

Test Requirements: The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

Test Procedure: The transmitter was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, and the VBW > RBW. The 99% Bandwidth was measured and recorded.

Test Results The 99% Bandwidth determined from the plots on the following pages.

Test Engineer(s): Bryan Taylor

Test Date(s): 08/13/2024, 12/5/2024


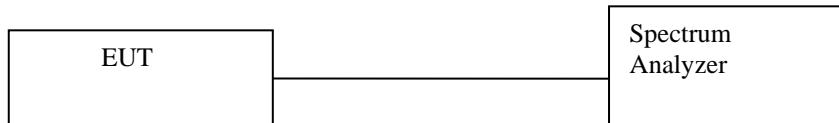



Figure 2. Block Diagram, Occupied Bandwidth Test Setup

TX Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Limit (MHz)	99% Bandwidth (MHz)	Result
BLE	Low	2402MHz	0.685MHz	0.5	1.046MHz	Pass
	Middle	2440MHz	0.700MHz	0.5	1.037MHz	Pass
	High	2480MHz	0.697MHz	0.5	1.058MHz	Pass
Wirepas	Low	2402MHz	0.681MHz	0.5	1.034MHz	Pass
	Middle	2440MHz	0.680MHz	0.5	1.044MHz	Pass
	High	2480MHz	0.679MHz	0.5	1.044MHz	Pass

Table 12. 99% and 6 dB Occupied Bandwidth, Test Results

Occupied Bandwidth Test Results

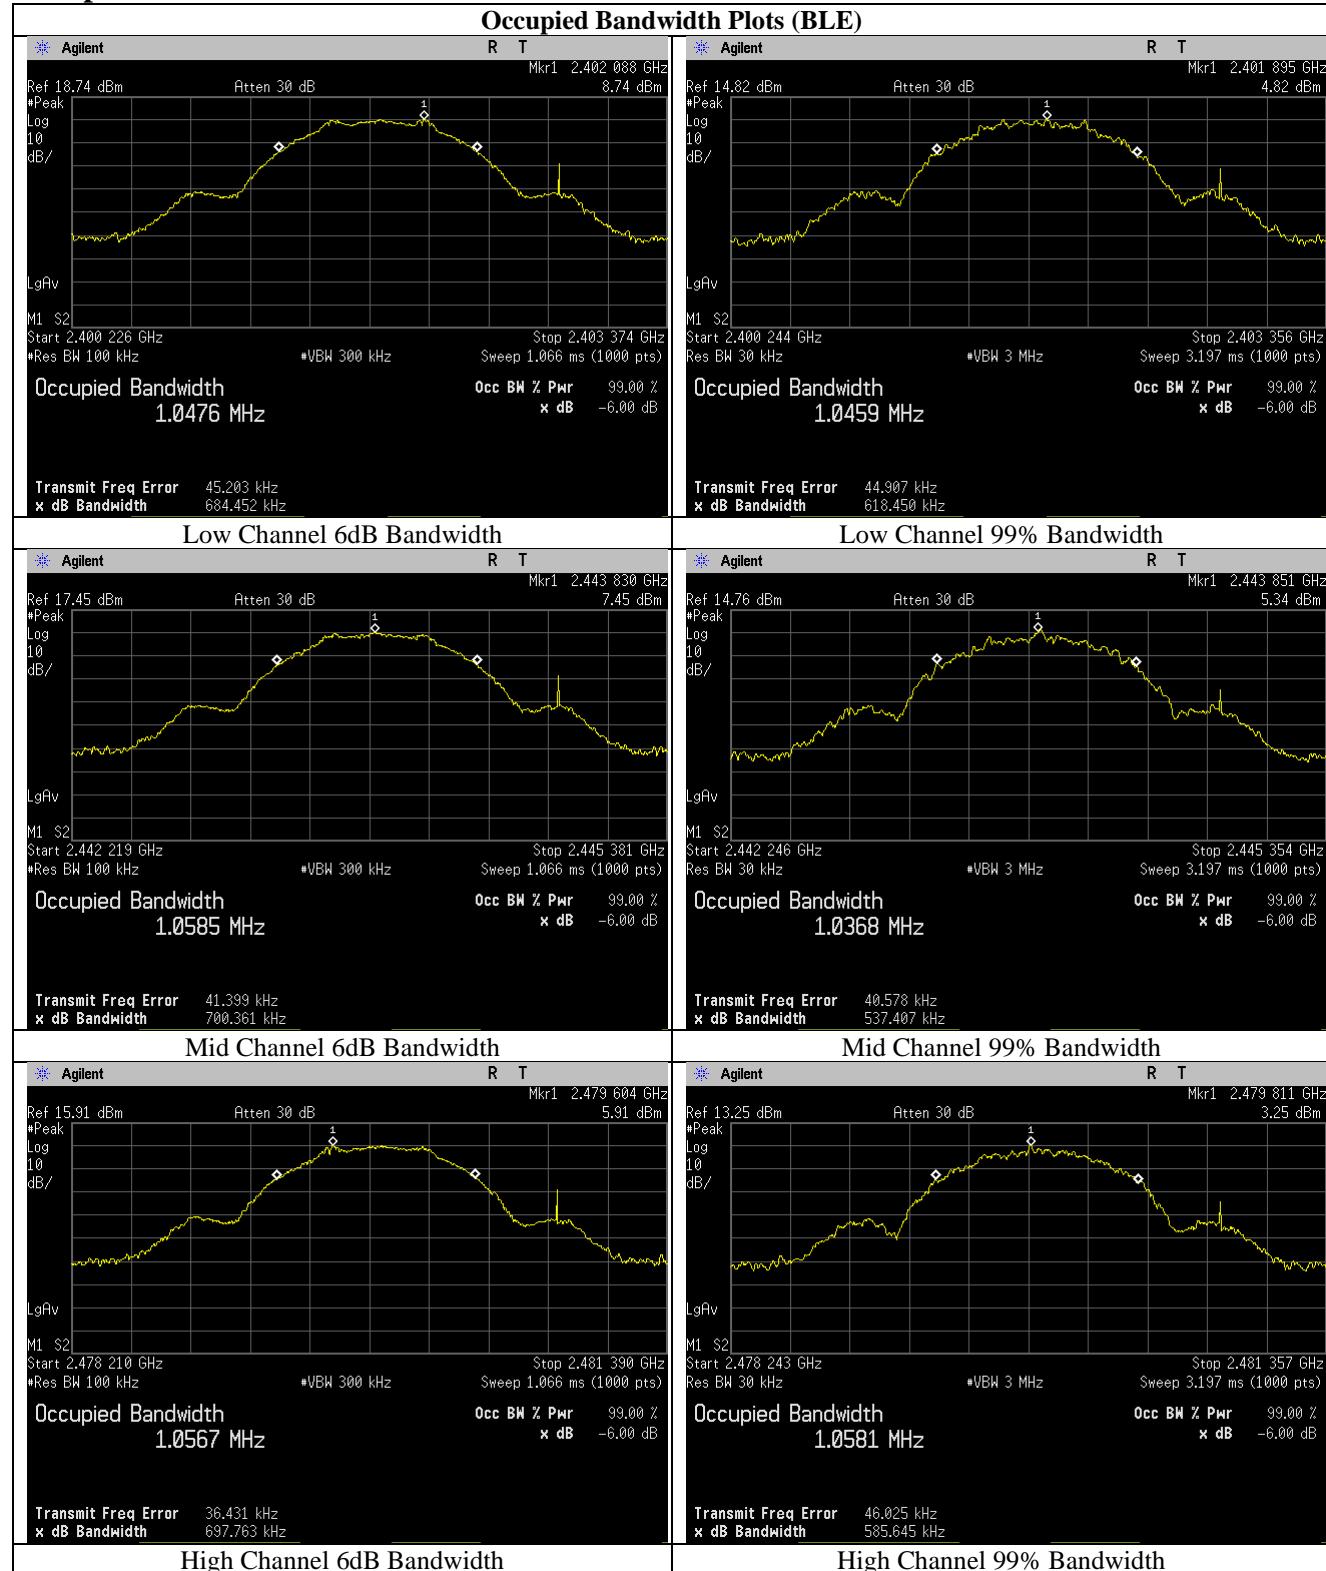

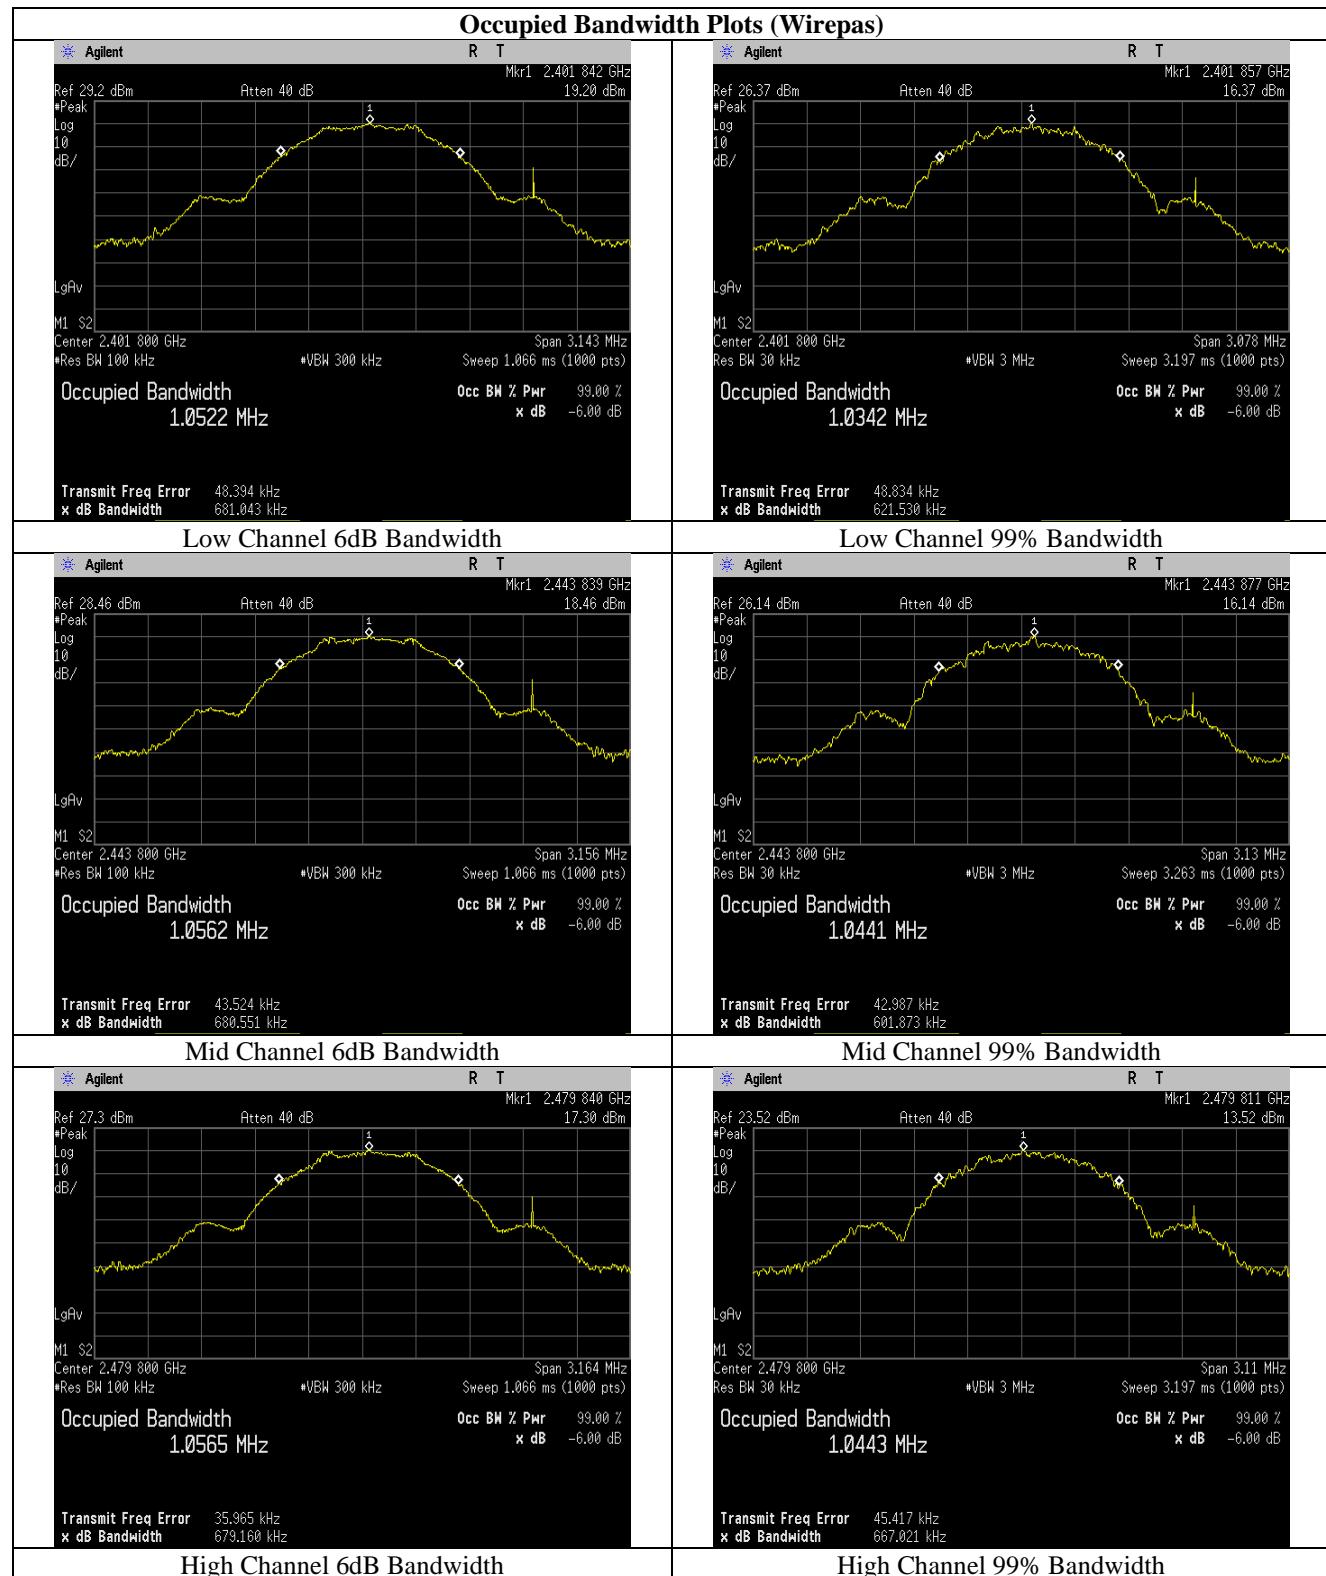

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output

Test Requirements: **§15.247(b):** The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

Table 13. Output Power Requirements from §15.247(b)

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 13, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band and using a point to point application may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, Omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

RSS-247 EIRP Limit: For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

Test Procedure: The transmitter was connected to a calibrated spectrum analyzer. The analyzer reference level was offset by cable loss connecting to the test sample. The peak power was measured at the low, mid and high channels of each band at the maximum power level.

The analyzer settings are shown in the following table:

RBW:	3MHz	Detector:	Peak	Reference Level:	30dBm
VBW:	10MHz	Sweep Time:	Auto	Internal Attenuation:	30dB

Figure 3. Analyzer Settings During Measurement

Test Software: TILE Version 7.4.2.5 (Manufactured by ETS Lindgren) was utilized to perform these measurements.

Test Results: The EUT was compliant with the Peak Power Output limits of **§15.247(b)**.

Test Engineer(s): Bryan Taylor

Test Date(s): 08/13/2024, 12/5/2024


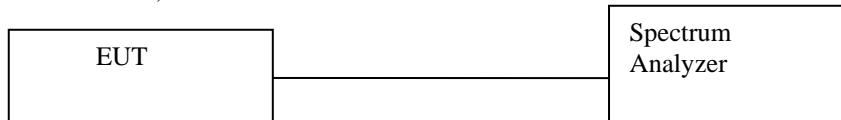


Figure 4. Peak Power Output Test Setup

Peak Power Output Test Results

Transmit Mode	Channel	Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result
BLE	Low	2402MHz	9.28	30	1.5	10.78	36	Pass
	Middle	2440MHz	8.00	30	1.5	9.50	36	Pass
	High	2480MHz	6.80	30	1.5	8.30	36	Pass
Wirepas	Low	2402MHz	8.85	30	1.5	10.35	36	Pass
	Middle	2440MHz	7.77	30	1.5	9.27	36	Pass
	High	2480MHz	6.89	30	1.5	8.39	36	Pass

Table 14. Peak Power Output, Test Results

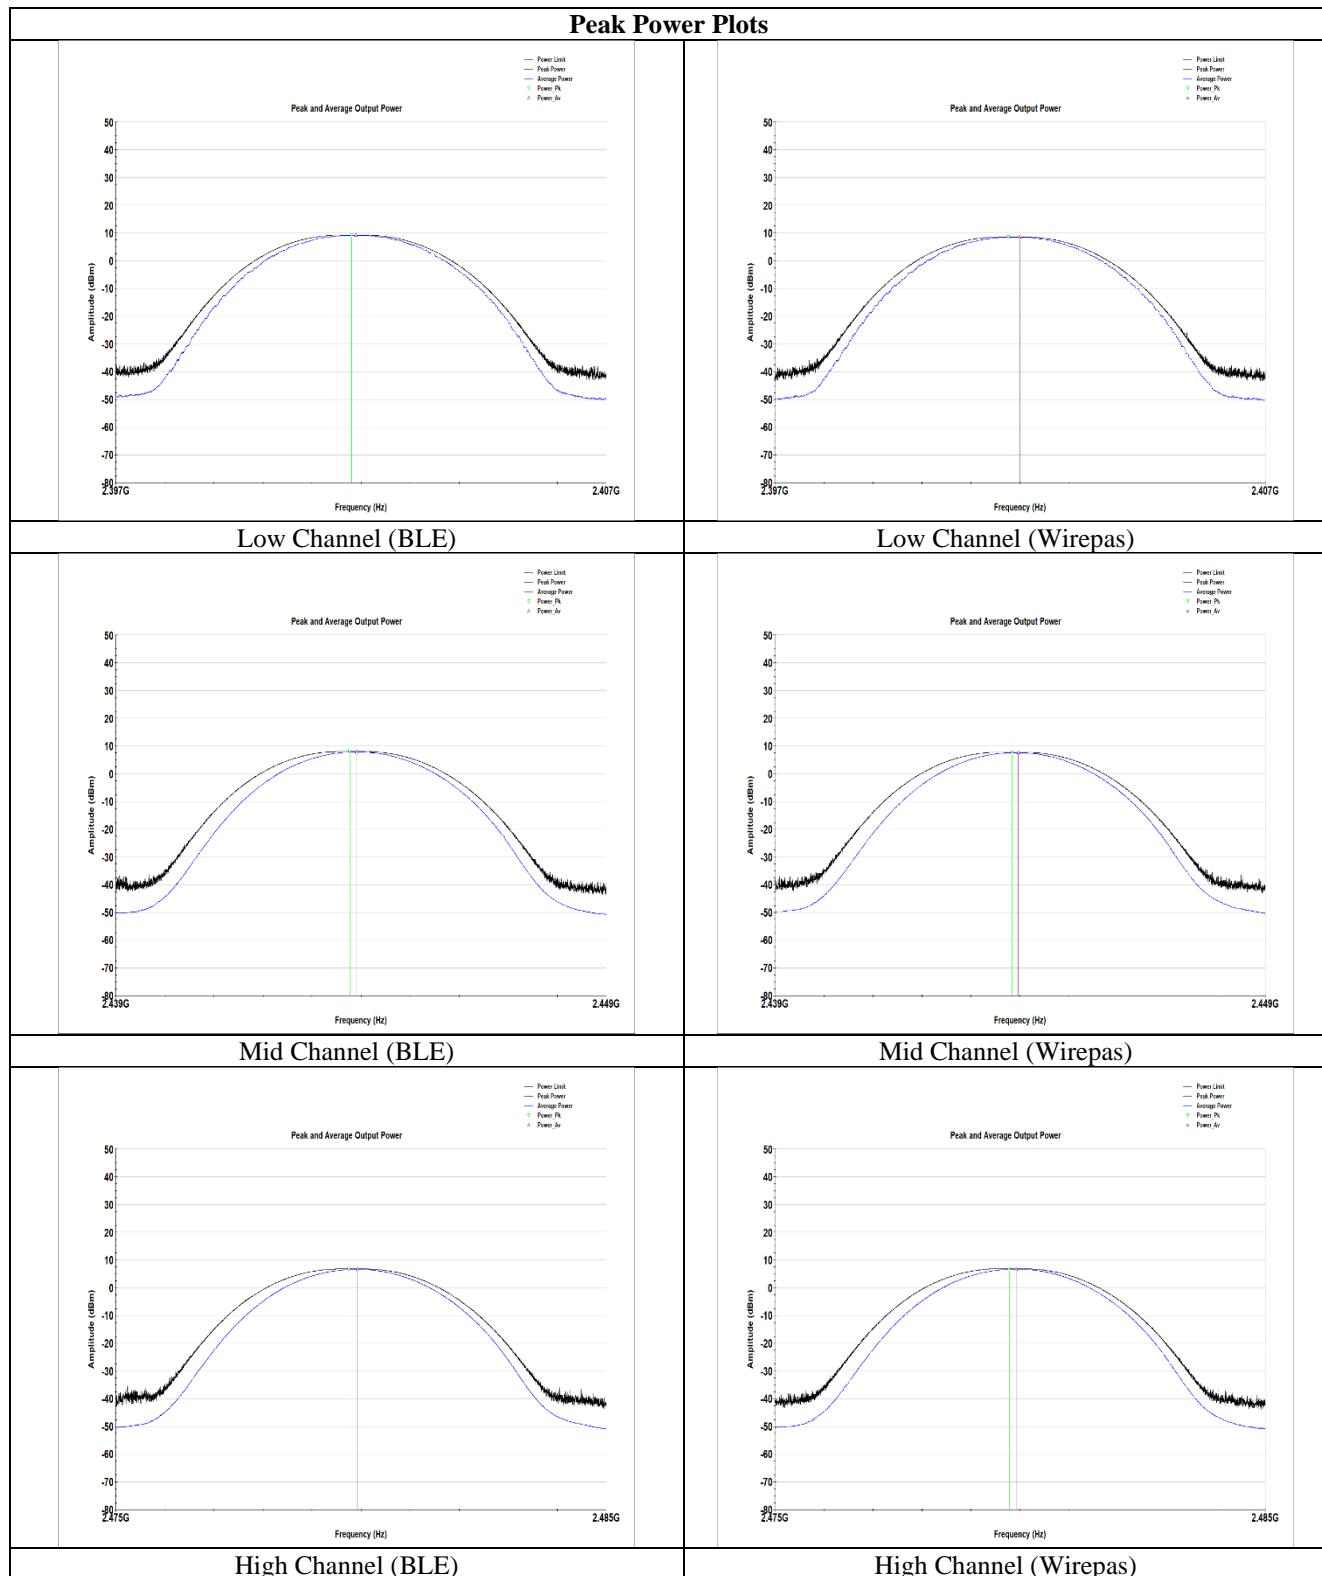

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: **§15.247(e):** For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level. The RBW was set between 3kHz and 100 kHz. The VBW was set to 3x the RBW. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

The analyzer settings are shown in the following table:

RBW:	3kHz	Detector:	Peak	Reference Level:	10dBm
VBW:	30kHz	Sweep Time:	Auto	Internal Attenuation:	20dB

Figure 5. Analyzer Settings During Measurement

Test Software: TILE Version 7.4.2.5 (Manufactured by ETS Lindgren) was utilized to perform these measurements.

Test Results: The EUT was compliant with the peak power spectral density limits of § 15.247 (e).

The peak power spectral density was determined from plots on the following page(s).

Test Engineer: Bryan Taylor

Test Date: 08/13/2024, 12/5/2024


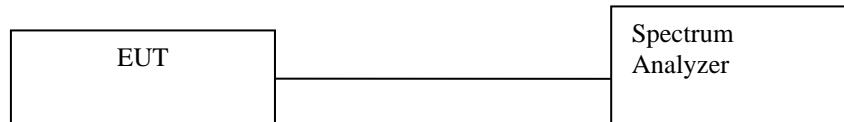


Figure 6. Block Diagram, Peak Power Spectral Density Test Setup

Transmit Mode	Channel	Frequency (MHz)	Peak Power Spectral Density (dBm / 3kHz)	Peak Power Spectral Density Limit (dBm / 3kHz)	Result
BLE	Low	2402MHz	-4.51	8	Pass
	Middle	2440MHz	-6.13	8	Pass
	High	2480MHz	-8.46	8	Pass
Wirepas	Low	2402MHz	-5.21	8	Pass
	Middle	2440MHz	-6.33	8	Pass
	High	2480MHz	-8.21	8	Pass

Table 15. Peak Power Spectral Density, Test Results

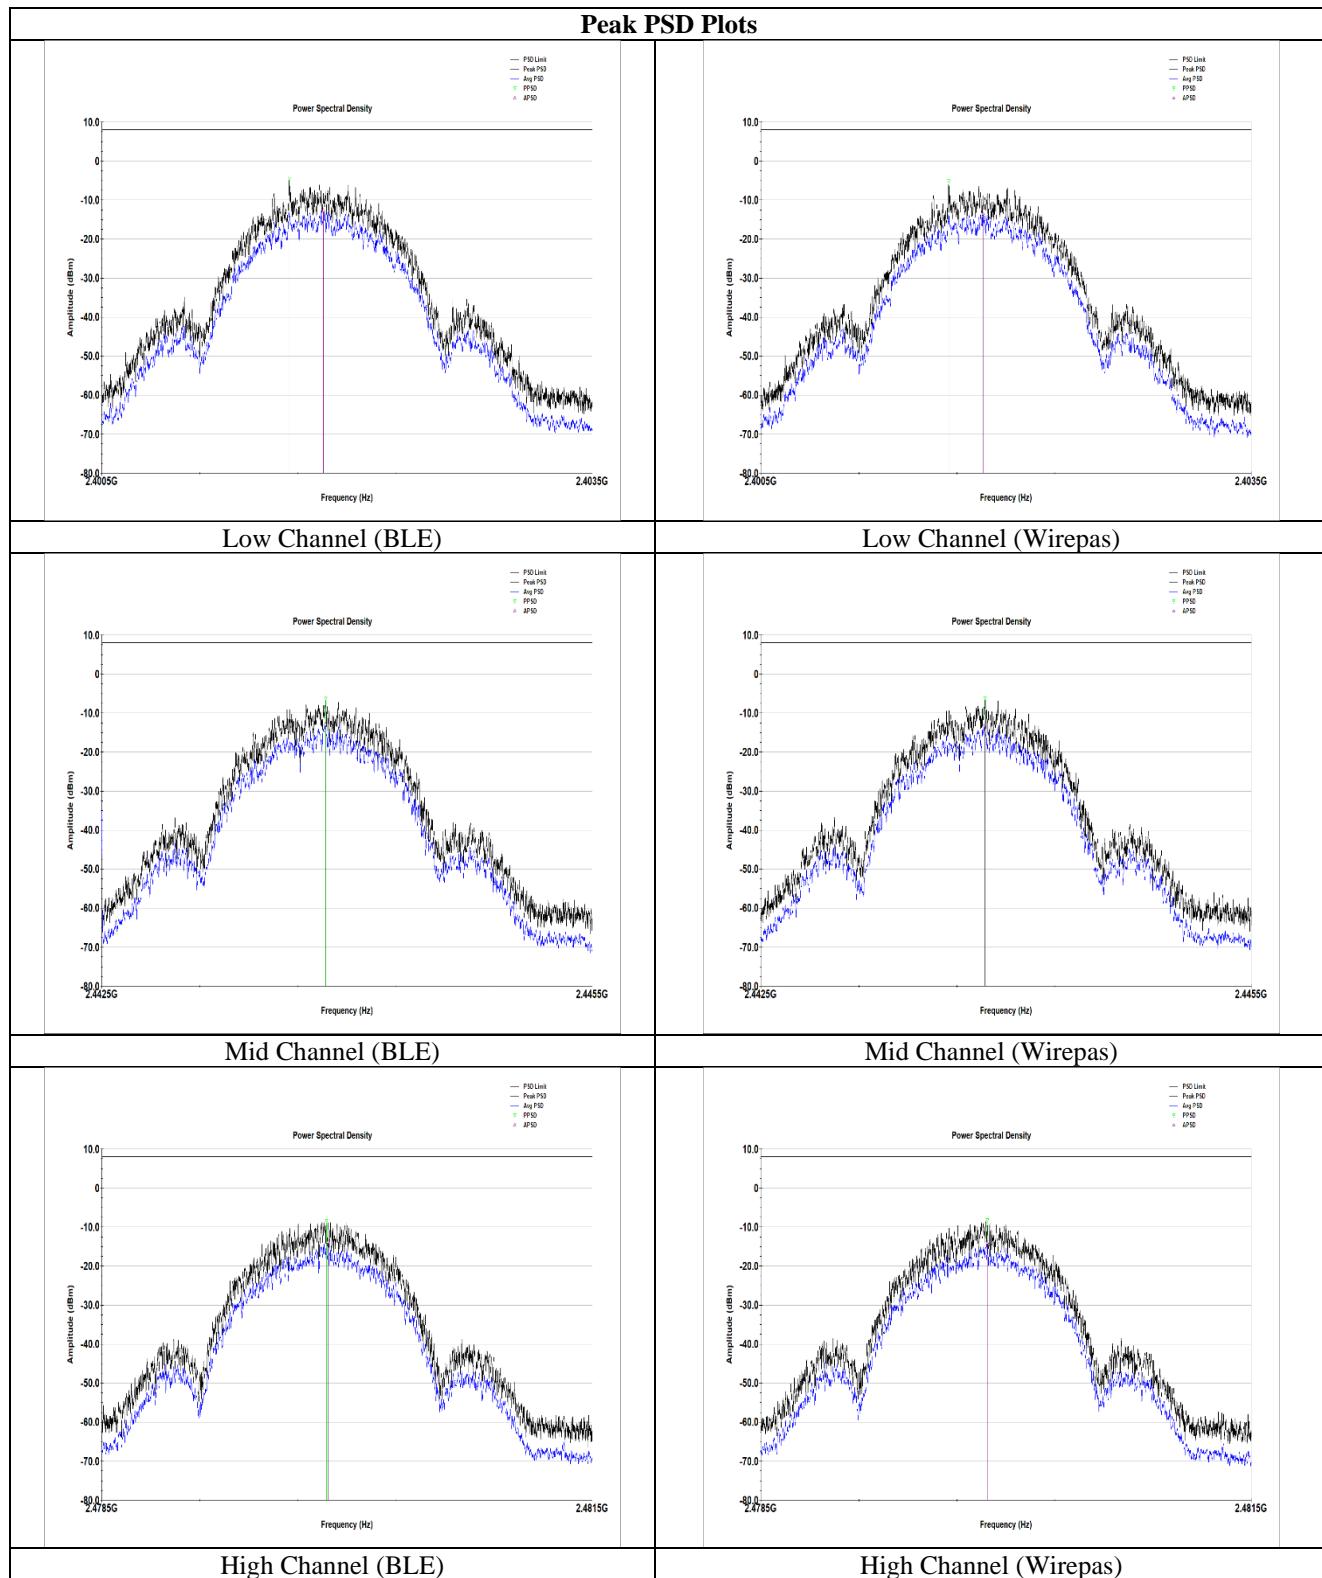

Electromagnetic Compatibility Criteria for Intentional Radiators**§ 15.247(d) RF Conducted Spurious Emissions Requirements**

Test Requirement: **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level. The RBW was set to 100 kHz. The VBW was set to 3x the RBW. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

See following pages for detailed test results with RF Conducted Spurious Emissions.

The analyzer settings are shown in the following table:

RBW:	100kHz	Detector:	Peak	Reference Level:	30dBm
VBW:	300kHz	Sweep Time:	Auto	Internal Attenuation:	30dB

Figure 7. Analyzer Settings During Measurement

Test Software: TILE Version 7.4.2.5 (Manufactured by ETS Lindgren) was utilized to perform these measurements.

Test Results: The EUT was compliant with the Conducted Spurious Emission limits of **§15.247(d)**.

Test Engineer(s): Bryan Taylor

Test Date(s): 08/13/2024, 12/6/2024






Figure 8. Block Diagram, Conducted Spurious Emissions Test Setup

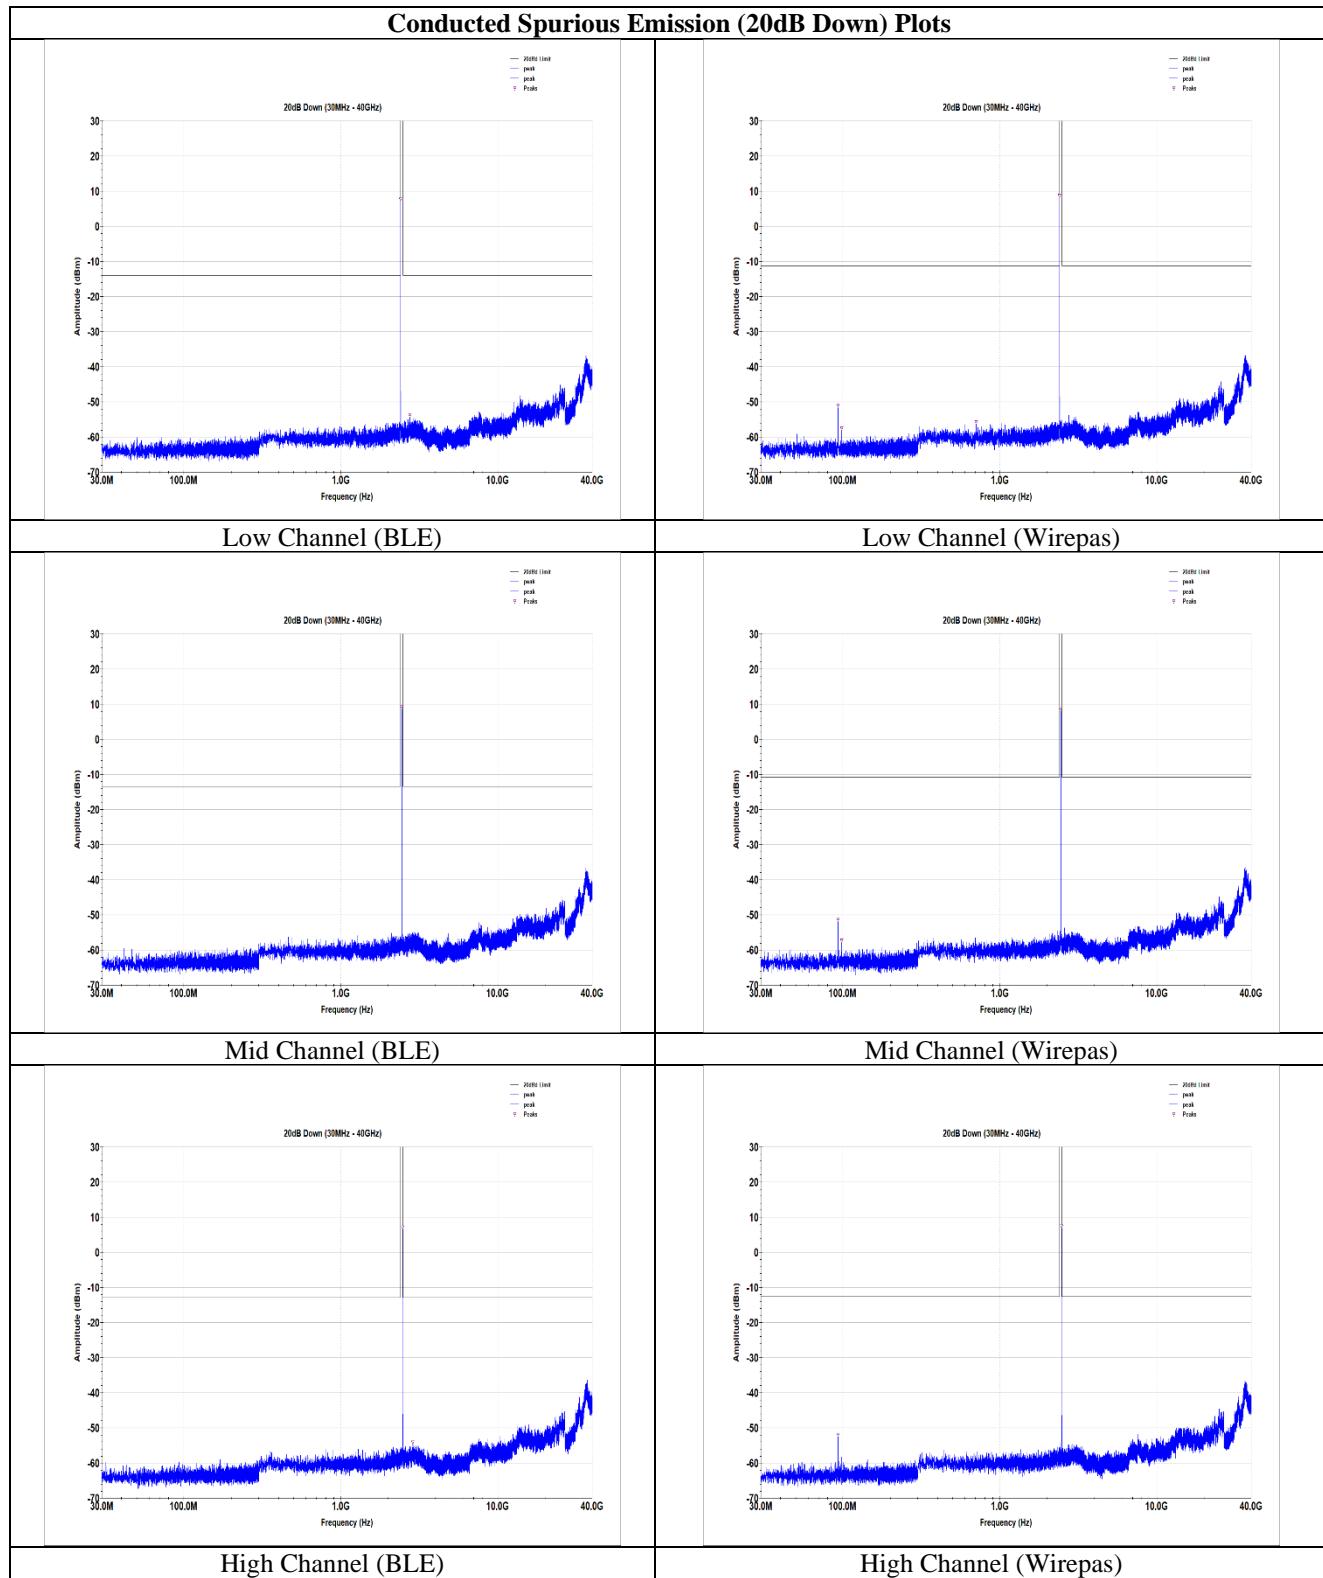

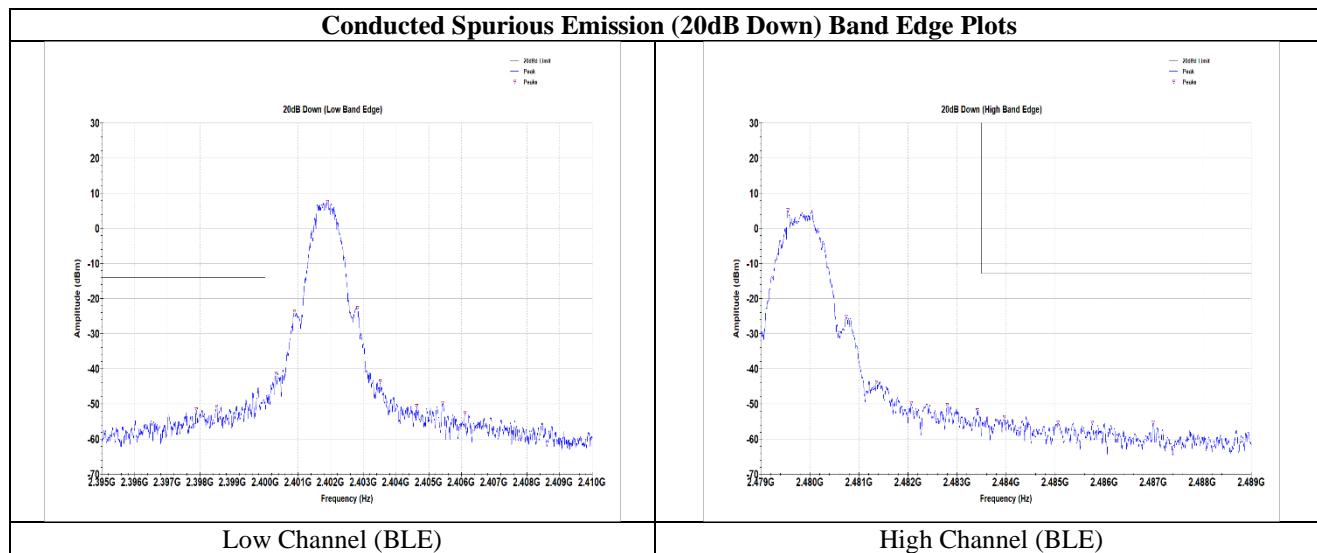


Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
2397.887	-51.49	-13.93	37.56	Pass
2398.512	-50.68	-13.93	36.75	Pass

Figure 9. Low Channel, Band Edge (BLE)

Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
2483.964	-53.69	-12.89	40.8	Pass
2485.057	-55.24	-12.89	42.35	Pass
2485.758	-55.4	-12.89	42.51	Pass
2487.003	-55.37	-12.89	42.48	Pass

Figure 10. High Channel, Band Edge (BLE)

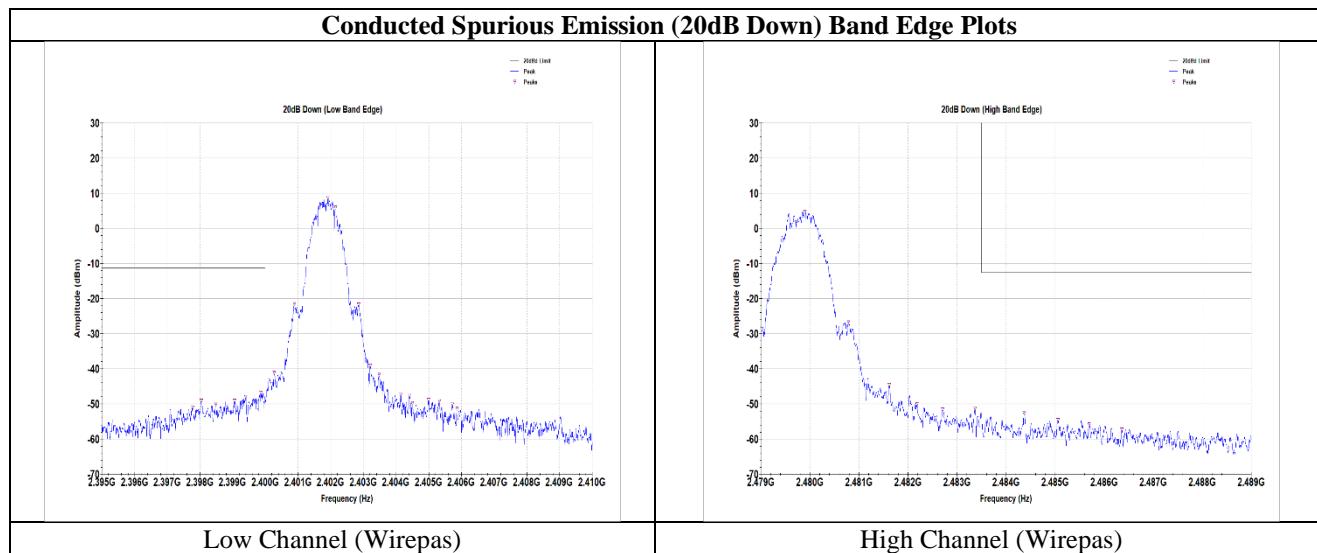

Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
2397.784	-51	-11.25	39.75	Pass
2398.049	-49.02	-11.25	37.77	Pass
2398.484	-50.16	-11.25	38.91	Pass
2399.061	-49.05	-11.25	37.8	Pass
2399.401	-48.02	-11.25	36.77	Pass
2399.862	-46.85	-11.25	35.6	Pass

Figure 11. Low Channel, Band Edge (Wirepas)

Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
2484.371	-52.58	-12.66	39.92	Pass
2485.056	-54.55	-12.66	41.89	Pass
2485.695	-55.71	-12.66	43.05	Pass
2486.363	-57.29	-12.66	44.63	Pass

Figure 12. High Channel, Band Edge (Wirepas)

Electromagnetic Compatibility Criteria for Intentional Radiators**§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge****Test Requirements:** **§15.247(d); §15.205:** Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Table 16. Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6

Test Requirement(s): **§ 15.209 (a):** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 17.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dB μ V) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

Table 17. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)

Test Procedures: The radiated methodology referenced in ANSI C63.10: 2013 Section 11.12.1 was utilized in order to assess the unwanted emissions in the restricted bands.


A radiated scan was performed with the antenna of proper impedance installed. The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes if multiple mounting orientations are supported. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.


Radiated measurements below 30MHz were performed in a semi-anechoic chamber that has been correlated to an open area site.


Test Results: The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d).

Test Engineer(s): Bryan Taylor, Sergio Gutierrez

Test Date(s): 7/30/2024 – 8/13/2024, 12/4/2024 – 12/6/2024

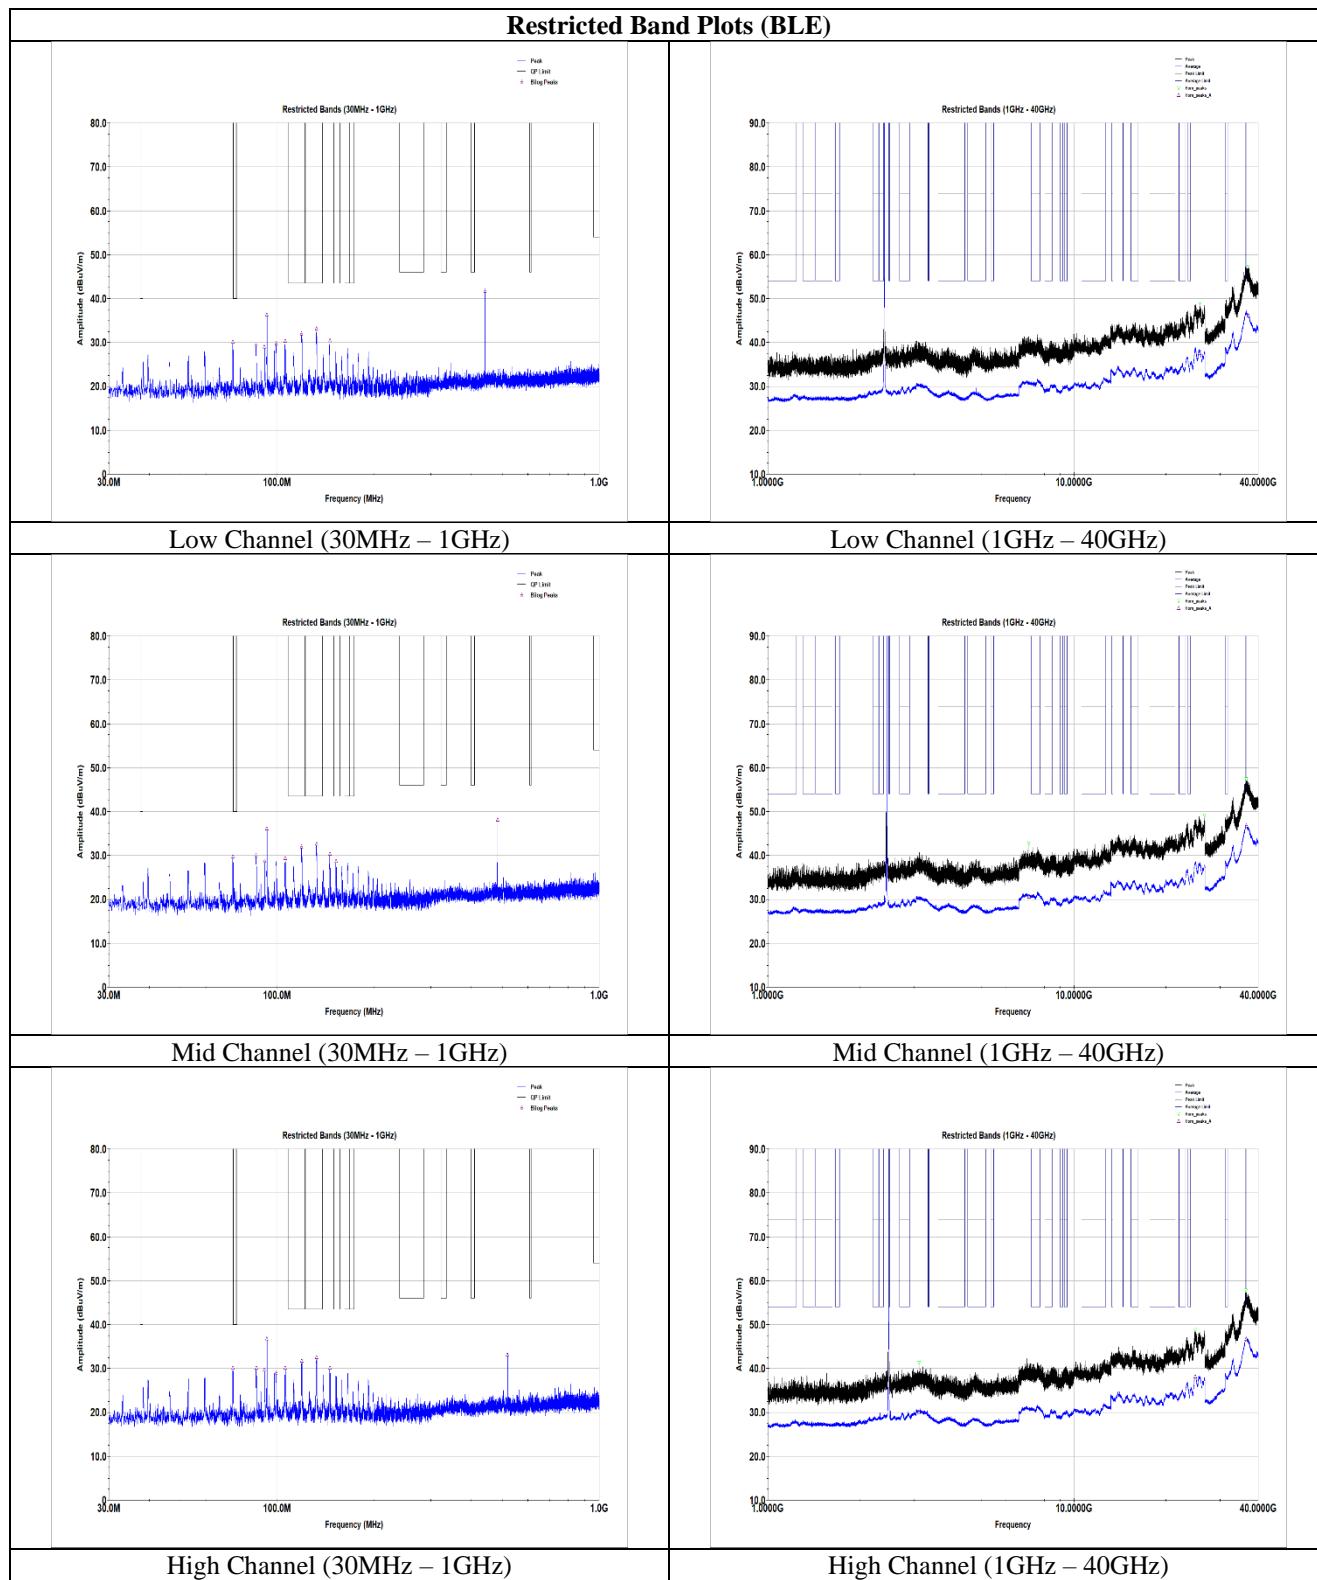

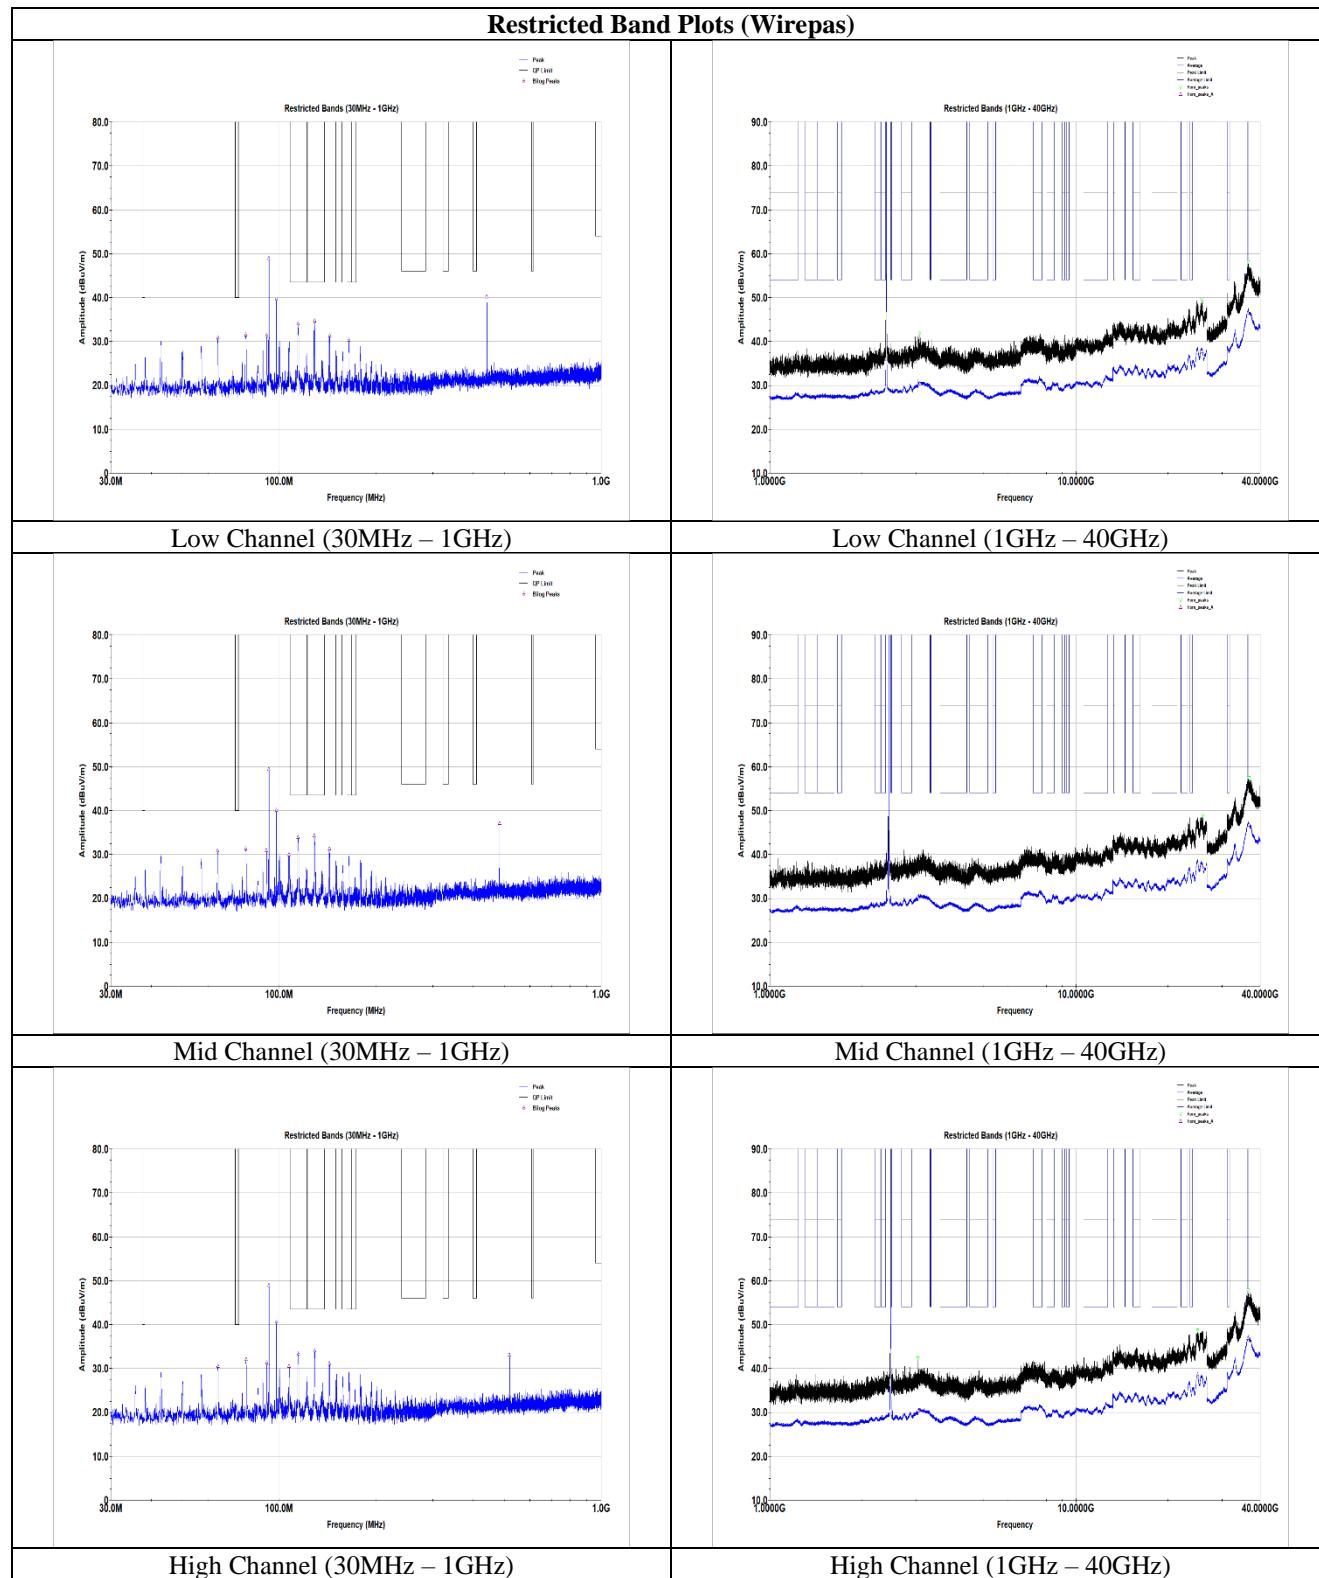

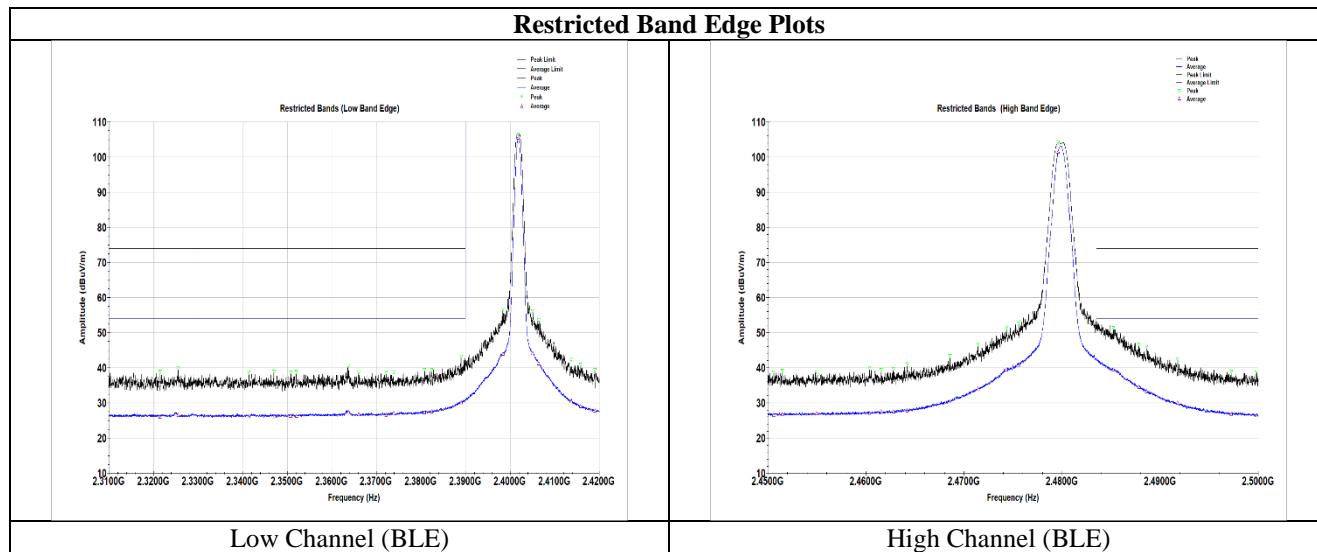


Frequency	Peak Reading (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Avg Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dBuV/m)	Result
2321.495	38.86	74	35.14	26.07	54	27.93	Pass
2325.579	39.99	74	34.01	26.52	54	27.48	Pass
2341.405	38.77	74	35.23	26.23	54	27.77	Pass
2347.015	38.88	74	35.12	26.11	54	27.89	Pass
2350.782	38.63	74	35.37	26.25	54	27.75	Pass
2352.034	38.85	74	35.15	26.26	54	27.74	Pass
2363.666	40.48	74	33.52	27.46	54	26.54	Pass
2366.031	38.82	74	35.18	26.67	54	27.33	Pass
2372.205	38.8	74	35.2	26.57	54	27.43	Pass
2373.896	38.7	74	35.3	27.06	54	26.94	Pass
2380.813	39.48	74	34.52	27.29	54	26.71	Pass
2382.366	39.4	74	34.6	27.53	54	26.47	Pass
2388.994	43.24	74	30.76	30.11	54	23.89	Pass

Figure 13. Restricted Band Edge Spurious Emissions, Low Channel, (BLE)

Frequency	Peak Reading (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Avg Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dBuV/m)	Result
2485.231	51.39	74	22.61	39.49	54	14.51	Pass
2487.819	46.72	74	27.28	34.51	54	19.49	Pass
2488.6	45.98	74	28.02	33.32	54	20.68	Pass
2491.775	42.39	74	31.61	30.05	54	23.95	Pass
2497.244	38.93	74	35.07	26.86	54	27.14	Pass
2499.781	38.77	74	35.23	26.5	54	27.5	Pass

Figure 14. Restricted Band Edge Spurious Emissions, High Channel, (BLE)

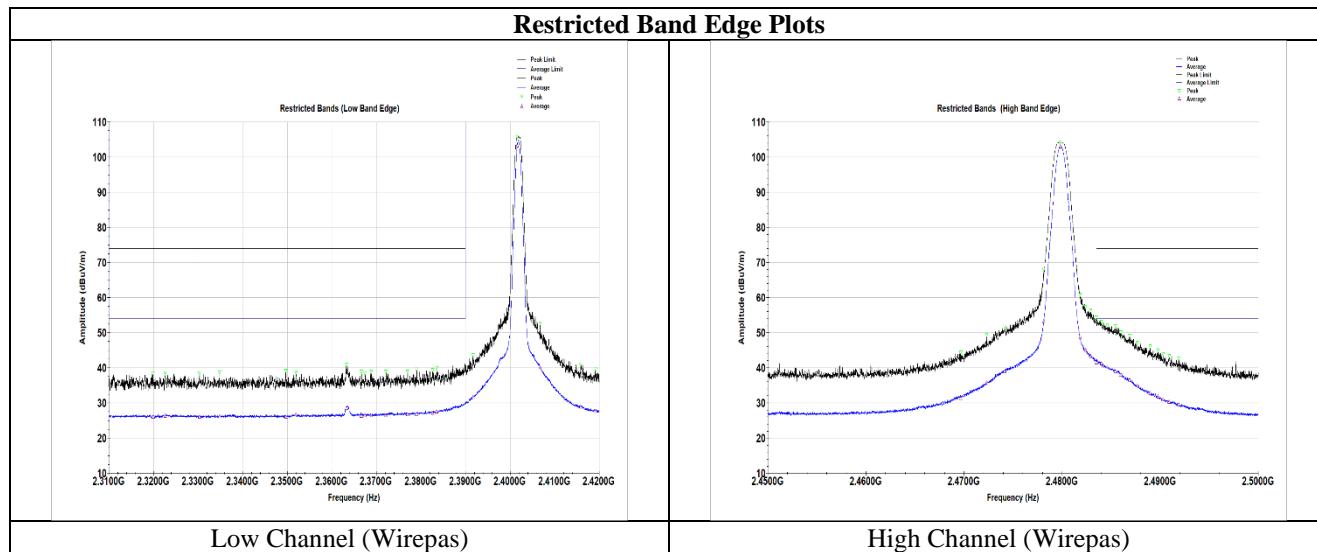

Frequency	Peak Reading (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Avg Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dBuV/m)	Result
2319.927	38.54	74	35.46	26.08	54	27.92	Pass
2322.622	38.32	74	35.68	26.3	54	27.7	Pass
2330.323	38.42	74	35.58	26.03	54	27.97	Pass
2334.832	38.57	74	35.43	26.14	54	27.86	Pass
2349.682	39.14	74	34.86	26.08	54	27.92	Pass
2351.992	38.58	74	35.42	26.65	54	27.35	Pass
2363.281	40.92	74	33.08	28.45	54	25.55	Pass
2366.636	38.91	74	35.09	26.37	54	27.63	Pass
2367.448	38.3	74	35.7	26.4	54	27.6	Pass
2368.919	38.96	74	35.04	26.47	54	27.53	Pass
2372.164	38.86	74	35.14	26.45	54	27.55	Pass
2376.99	38.86	74	35.14	26.76	54	27.24	Pass
2379.025	39.53	74	34.47	26.8	54	27.2	Pass
2382.6	39.42	74	34.58	27.09	54	26.91	Pass
2383.535	39.93	74	34.07	27.58	54	26.42	Pass

Figure 15. Restricted Band Edge Spurious Emissions, Low Channel, (Wirepas)

Frequency	Peak Reading (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Avg Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dBuV/m)	Result
2484	53.13	74	20.87	41.22	54	12.78	Pass
2484.6	52.16	74	21.84	40.16	54	13.84	Pass
2485.444	51.9	74	22.1	39.04	54	14.96	Pass
2486.006	50.08	74	23.92	38.01	54	15.99	Pass
2486.887	49.11	74	24.89	36.58	54	17.42	Pass
2487.65	47.08	74	26.92	34.87	54	19.13	Pass
2488.981	46.11	74	27.89	32.72	54	21.28	Pass
2489.769	45.08	74	28.92	31.75	54	22.25	Pass
2490.287	43.99	74	30.01	31	54	23	Pass
2490.912	43.39	74	30.61	30.27	54	23.73	Pass
2491.894	42.64	74	31.36	29.55	54	24.45	Pass

Figure 16. Restricted Band Edge Spurious Emissions, High Channel, (Wirepas)

Worst Case Cabinet Spurious Emissions

Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
0.094	41.65	108.15	66.50	11.55	V	254.8	1	0.200	Pass
0.109	41.15	106.90	65.75	11.36	H	184.7	1	0.200	Pass
0.501	45.64	73.69	28.06	11.27	V	191.7	1	9.000	Pass
0.506	45.44	73.62	28.17	11.31	H	338	1	9.000	Pass

Figure 17. Worst Case Cabinet Radiation, 9kHz - 30MHz (BLE)

Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
0.093	42.67	108.28	65.61	11.62	H	96.5	1	0.200	Pass
0.096	40.70	107.95	67.25	11.47	V	192.5	1	0.200	Pass
0.506	47.19	73.62	26.43	11.31	H	152.3	1	9.000	Pass
0.510	45.48	73.54	28.06	11.35	V	345.3	1	9.000	Pass

Figure 18. Worst Case Cabinet Radiation, 9kHz - 30MHz (Wirepas)

Frequency [MHz]	QPK Level [dB μ V/m]	QPK Limit [dB μ V/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
126.750	6.97	43.52	36.55	-6.25	H	226.8	4.00	120.000	Pass
279.720	13.21	46.02	32.81	-5.94	H	318.8	3.99	120.000	Pass

Figure 19. Worst Case Cabinet Radiation, 30MHz - 1GHz (BLE)

Frequency [MHz]	QPK Level [dB μ V/m]	QPK Limit [dB μ V/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
127.440	6.95	43.52	36.57	-6.29	H	225	3.37	120.000	Pass
137.160	8.42	43.52	35.10	-6.82	V	204.1	2.06	120.000	Pass
249.600	18.15	46.02	27.87	-7.48	V	269.5	1.12	120.000	Pass
263.670	18.71	46.02	27.31	-6.33	V	281.1	1.15	120.000	Pass
284.760	17.43	46.02	28.59	-5.93	H	10.9	3.59	120.000	Pass
284.760	21.51	46.02	24.51	-5.85	V	291.7	1.03	120.000	Pass
322.920	13.20	46.02	32.82	-4.78	V	115.4	3.95	120.000	Pass


Figure 20. Worst Case Cabinet Radiation, 30MHz - 1GHz (Wirepas)


Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	Avg Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
4,887.500	56.13	74.00	17.87	49.92	54.00	4.08	-3.22	H	21.1	2.01	Pass
4,887.500	54.21	74.00	19.79	47.50	54.00	6.50	-3.22	V	109.2	1.02	Pass
7,332.000	42.93	74.00	31.07	30.24	54.00	23.76	-2.73	H	39	1.49	Pass
7,332.000	43.71	74.00	30.29	30.26	54.00	23.74	-2.73	V	302.9	3.18	Pass
12,220.000	42.34	74.00	31.66	29.80	54.00	24.20	-1.95	H	174	3.50	Pass
12,220.000	42.98	74.00	31.02	29.86	54.00	24.14	-1.95	V	120.5	1.18	Pass
18,176.688	52.64	74.00	21.36	39.49	54.00	14.51	13.04	H	196.5	3.12	Pass
19,544.000	51.56	74.00	22.44	38.96	54.00	15.04	12.31	H	294.3	1.50	Pass
19,544.000	52.53	74.00	21.47	38.94	54.00	15.06	12.31	V	171.1	2.49	Pass
22,094.063	50.76	74.00	23.24	38.21	54.00	15.79	13.28	H	209.7	1.50	Pass
31,476.375	54.48	74.00	19.52	41.45	54.00	12.55	16.72	H	105.9	1.51	Pass
31,602.875	55.28	74.00	18.72	42.12	54.00	11.88	16.86	V	269.5	3.99	Pass


Figure 21. Worst Case Cabinet Radiation, Above 1GHz (BLE)


Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	Avg Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
4,887.500	55.66	74.00	18.34	49.25	54.00	4.75	-3.22	H	360.4	3.41	Pass
4,887.500	56.57	74.00	17.43	50.29	54.00	3.71	-3.22	V	158.7	2.82	Pass
7,304.000	42.03	74.00	31.97	28.89	54.00	25.11	-2.88	V	262.7	2.03	Pass
7,397.500	46.84	74.00	27.16	33.68	54.00	20.32	-2.47	H	129.9	1.5	Pass
12,210.000	44.89	74.00	29.11	31.58	54.00	22.42	-1.93	V	117	1.5	Pass
12,273.000	45.28	74.00	28.72	32.15	54.00	21.85	-2.09	H	117.2	1.41	Pass
18,713.625	51.79	74.00	22.21	40.47	54.00	13.53	13.08	V	0	2.57	Pass
18,746.625	51.61	74.00	22.39	40.60	54.00	13.40	12.97	H	309.1	1.51	Pass
19,439.625	51.99	74.00	22.01	40.64	54.00	13.36	12.35	H	170.4	1.5	Pass
19,547.563	51.68	74.00	22.32	40.35	54.00	13.65	12.30	V	234.3	4	Pass
22,030.125	50.46	74.00	23.54	38.88	54.00	15.12	13.07	V	164.3	4	Pass
23,662.938	50.55	74.00	23.45	38.73	54.00	15.27	14.48	H	121	2.92	Pass
31,479.813	54.92	74.00	19.08	42.69	54.00	11.31	16.72	V	117.6	2.51	Pass
31,498.375	54.51	74.00	19.49	42.76	54.00	11.24	16.76	H	69.8	2.29	Pass

Figure 22. Worst Case Cabinet Radiation, Above 1GHz (Wirepas)

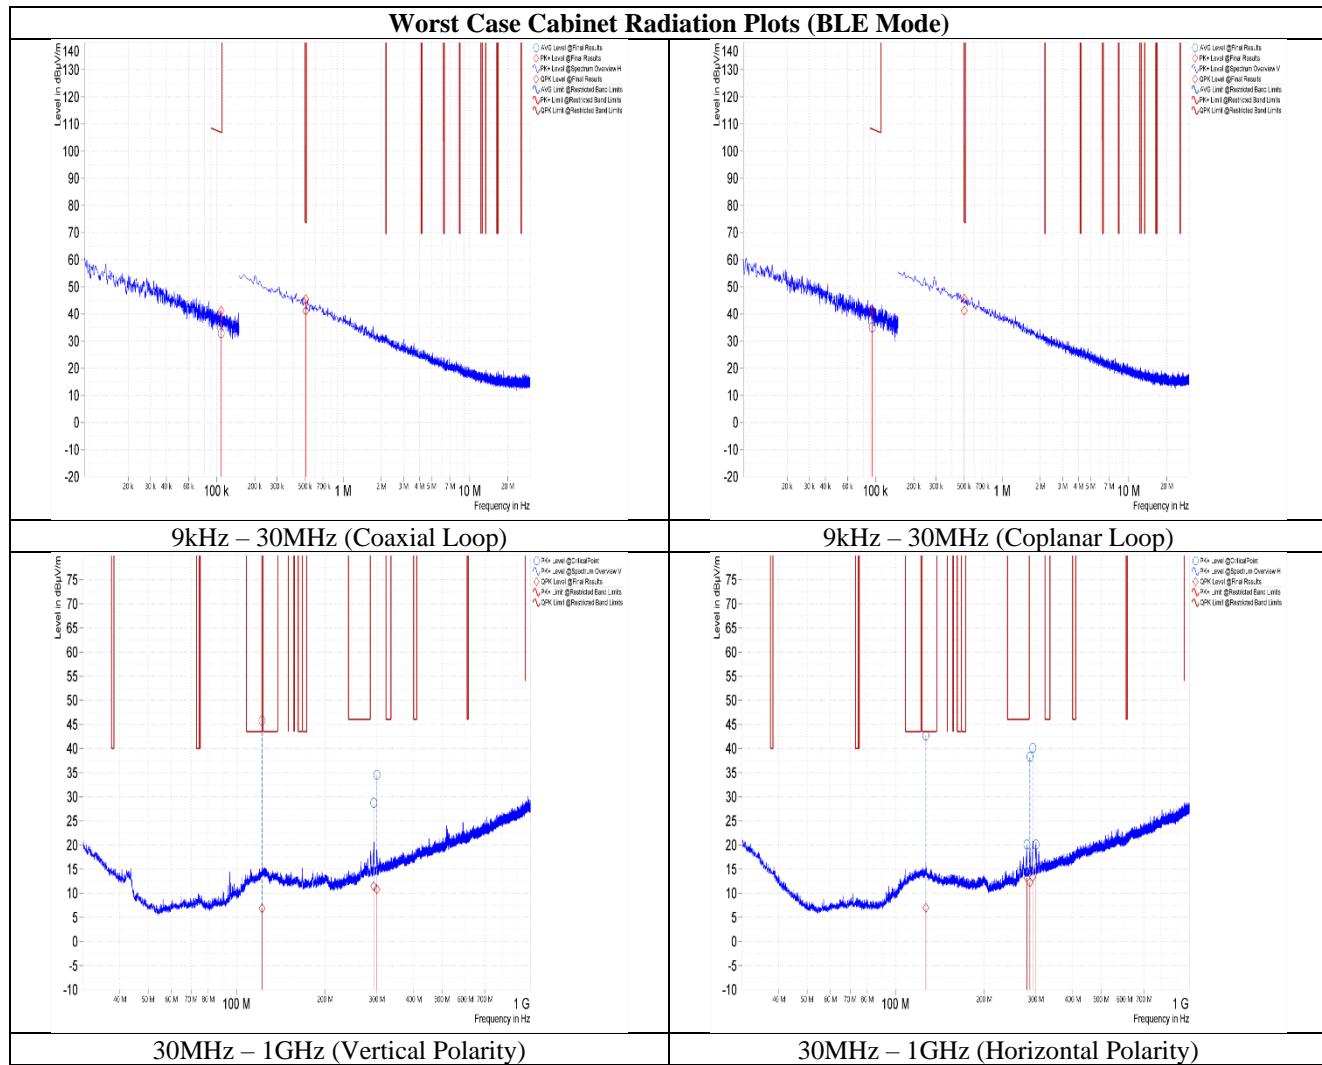

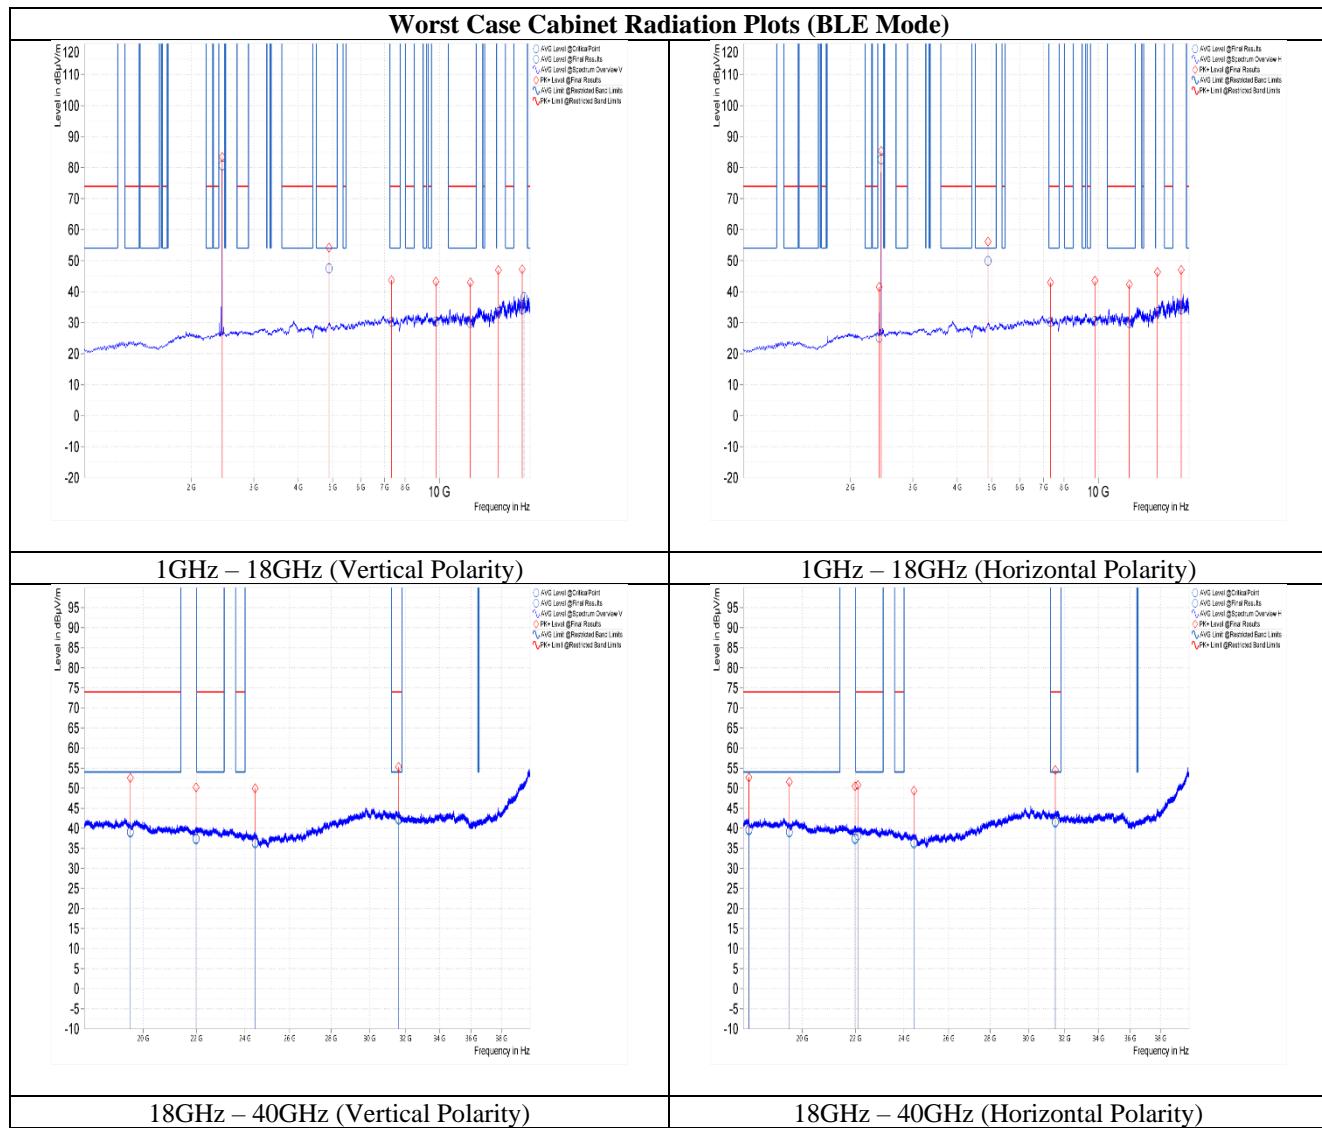

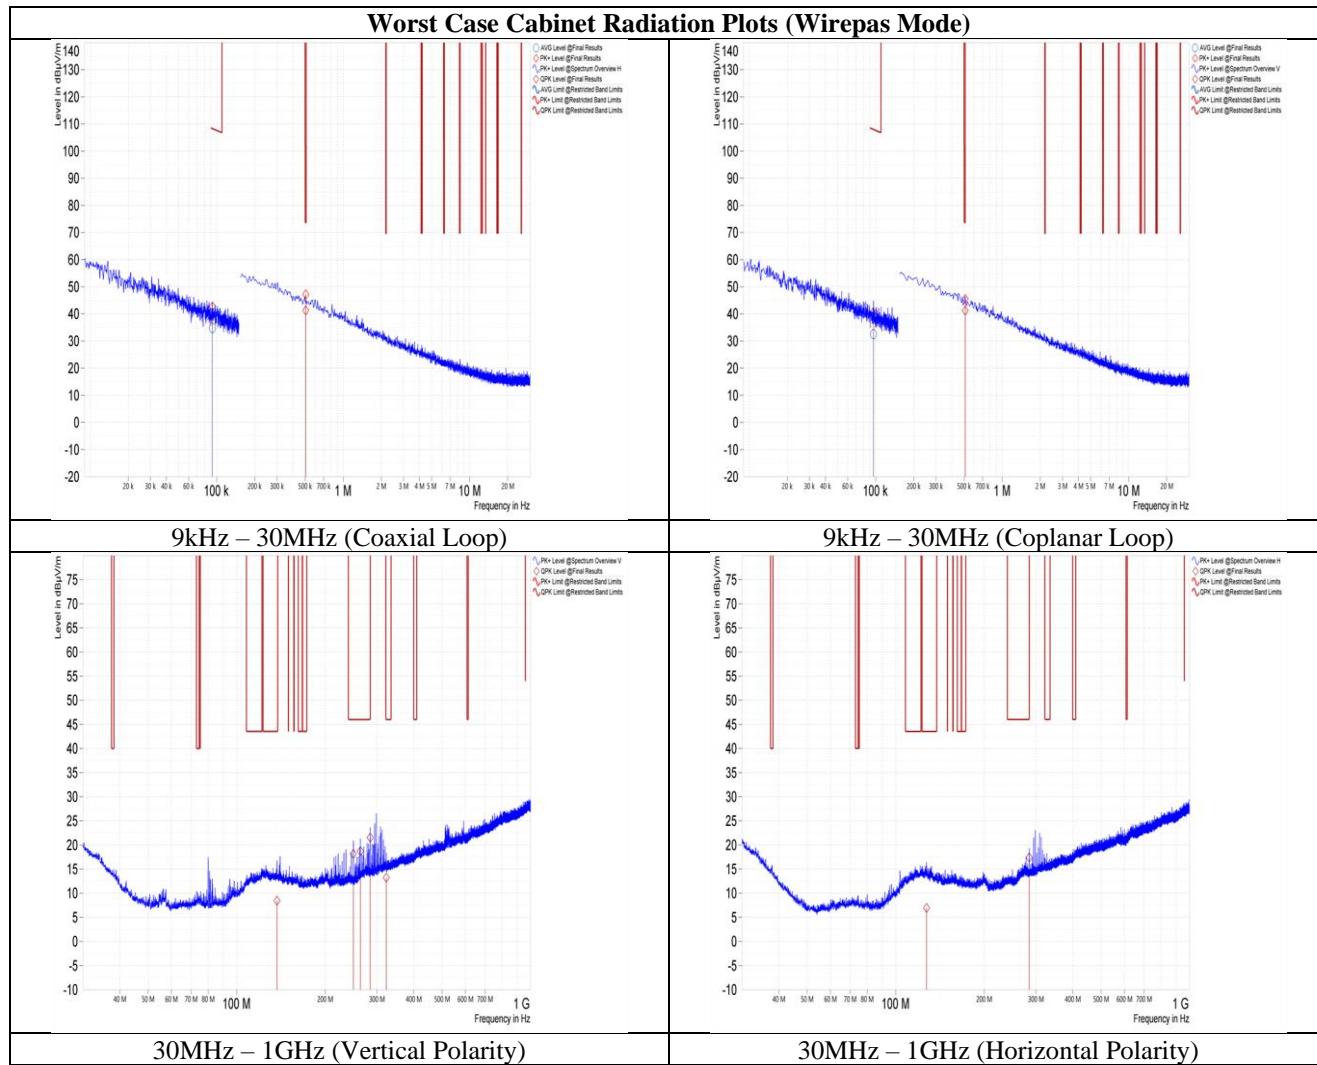

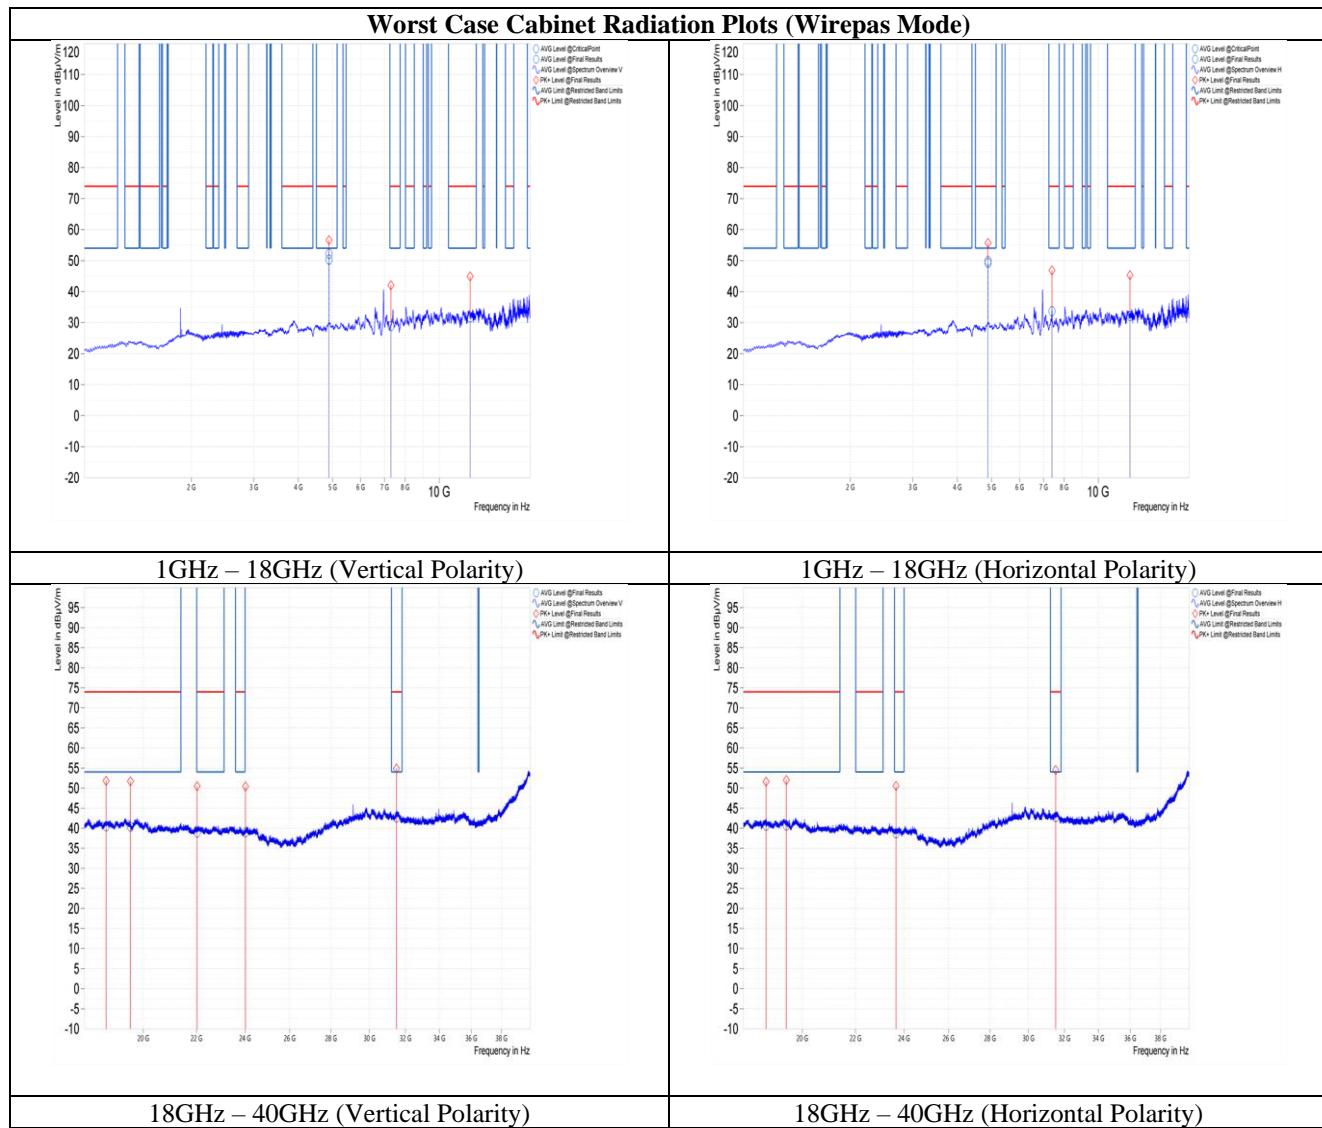

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

MET Asset #	Description	Manufacturer	Model	Last Cal Date	Cal Due Date
MY46180897	Spectrum Analyzer	Keysight	E4448A	07/27/2023	08/27/2024
1A1083	Receiver	Rohde & Schwarz	ESU40	11/20/2023	11/20/2024
1A1250	Receiver	Rohde & Schwarz	ESW44	04/08/2024	04/08/2025
1A1176	Active Loop Antenna (9KHz-30MHz)	ETS-Lindgren	6502	07/13/2023	08/13/2024
1A1147	Bi-Log Antenna	Sunol Sciences Corp	JB3	04/06/2023	04/06/2025
1A1183	Horn Antenna	ETS - Lindgren	3117	02/20/2024	02/20/2026
1A1161	Horn Antenna (18GHz – 40GHz)	ETS Lindgren	3116C	07/11/2023	07/11/2024
1A1065	EMI Receiver	Rohde & Schwarz	ESCI	08/04/2023	08/04/2024
1A1177	Pulse Limiter	Rohde & Schwarz	ESH3Z2	12/14/2023	12/14/2024
1A1122	LISN	TESEQ	NNB 51	09/21/2023	09/21/2024
1A1099	Generator	Com-Power	CGO-51000	See Note	
1A1088	Preamplifier	Rohde & Schwarz	TS-PR1	See Note	
1A1044	Generator	Com-Power	CG-520	See Note	
1A1073	Multi Device Controller	ETS	2090	See Note	
1A1074	System Controller	Panasonic	WV-CU101	See Note	
1A1080	Multi-Device	ETS	2090	See Note	
1A1180	Preamplifier	Miteq	AMF-7D-01001800-22-10P	See Note	

Table 18. Test Equipment List (For Test Dates in July and August, 2024)

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

MET Asset #	Description	Manufacturer	Model	Last Cal Date	Cal Due Date
MY46180897	Spectrum Analyzer	Keysight	E4448A	8/28/2024	8/28/2025
1A1234	Signal Analyzer	Rohde & Schwarz	FSV40	01/23/2023	01/23/2025
1A1250	Receiver	Rohde & Schwarz	ESW44	04/08/2024	04/08/2025
1A1176	Active Loop Antenna (9KHz-30MHz)	ETS-Lindgren	6502	08/22/2024	08/22/2026
1A1147	Bi-Log Antenna	Sunol Sciences Corp	JB3	04/06/2023	04/06/2025
1A1183	Horn Antenna	ETS - Lindgren	3117	02/20/2024	02/20/2026
1A1161	Horn Antenna (18GHz – 40GHz)	ETS Lindgren	3116C	08/01/2024	08/01/2026
1A1065	EMI Receiver	Rohde & Schwarz	ESCI	08/20/2024	08/20/2025
1A1177	Pulse Limiter	Rohde & Schwarz	ESH3Z2	12/14/2023	12/14/2024
1A1123	LISN	TESEQ	NNB 51	12/14/2023	12/14/2024
1A1099	Generator	Com-Power	CGO-51000	See Note	
1A1088	Preamplifier	Rohde & Schwarz	TS-PR1	See Note	
1A1044	Generator	Com-Power	CG-520	See Note	
1A1073	Multi Device Controller	ETS	2090	See Note	
1A1074	System Controller	Panasonic	WV-CU101	See Note	
1A1080	Multi-Device	ETS	2090	See Note	
1A1180	Preamplifier	Miteq	AMF-7D-01001800-22-10P	See Note	

Table 19. Test Equipment List (For Test Dates in December, 2024)

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

End of Report